
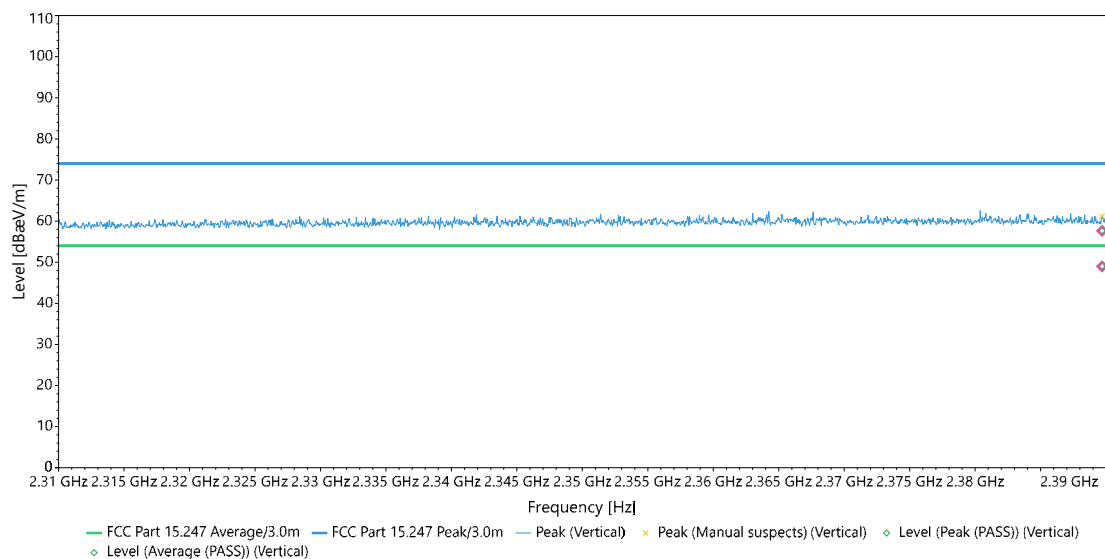


EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11 N20 2412 MHz		

Vertical

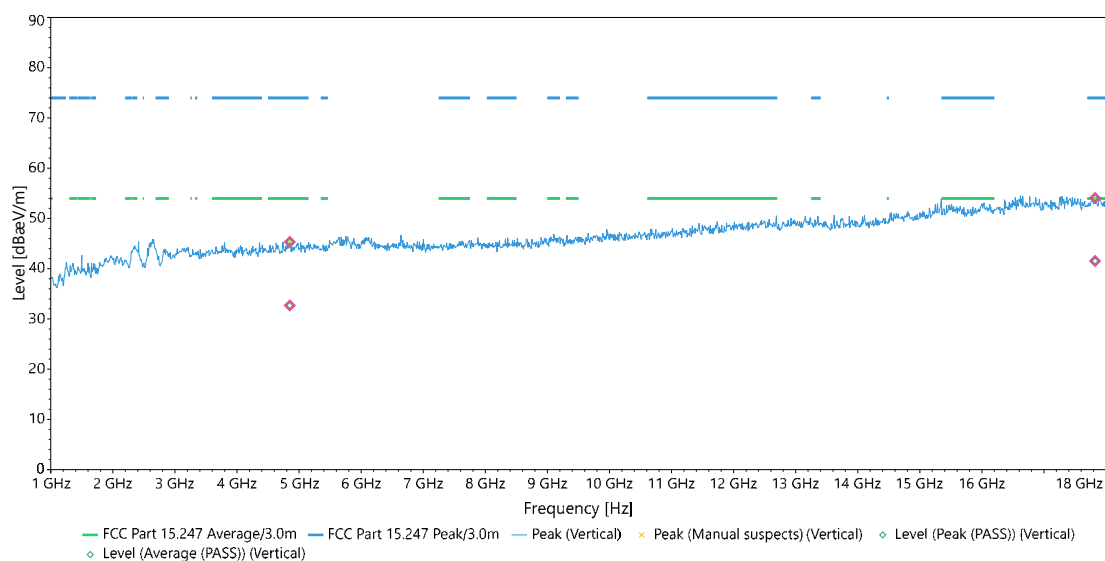



Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4848.8	Vertical	45.32069	74	-28.6793	1.08	38	1.87	Pass
2	4848.8	Vertical	32.68233	54	-21.3177	1.08	38	1.87	Pass
3	17823	Vertical	54.07658	74	-19.9234	2.28	143	3.23	Pass
4	17823	Vertical	41.52477	54	-12.4752	2.28	143	3.23	Pass
5	2389.70	Vertical	57.64	74.00	-16.36	1.56	279.00	37.46	Pass
6	2389.70	Vertical	49.00	54.00	-5.00	1.56	279.00	37.46	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N20 2412 MHz		

Horizontal

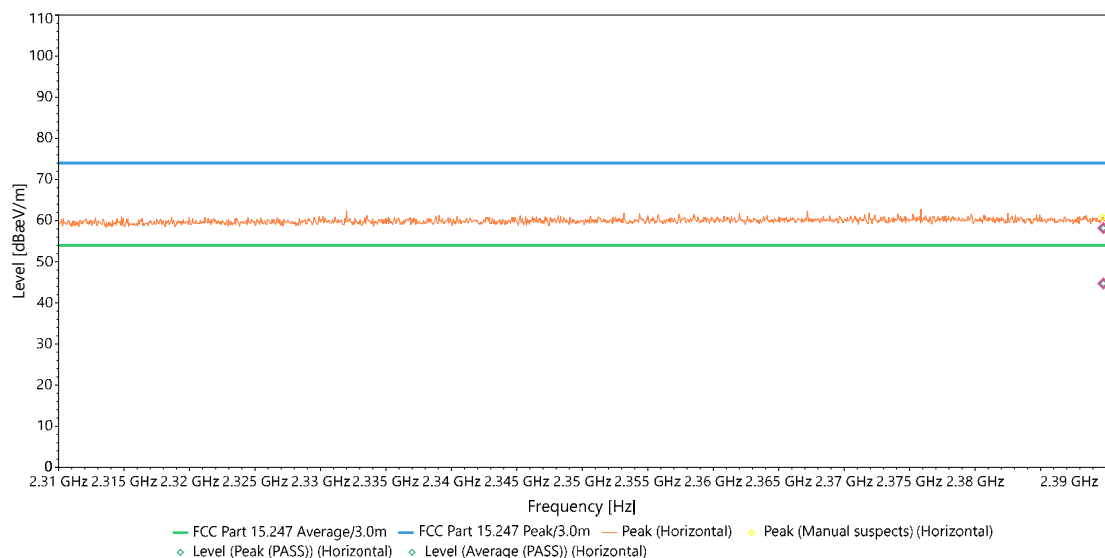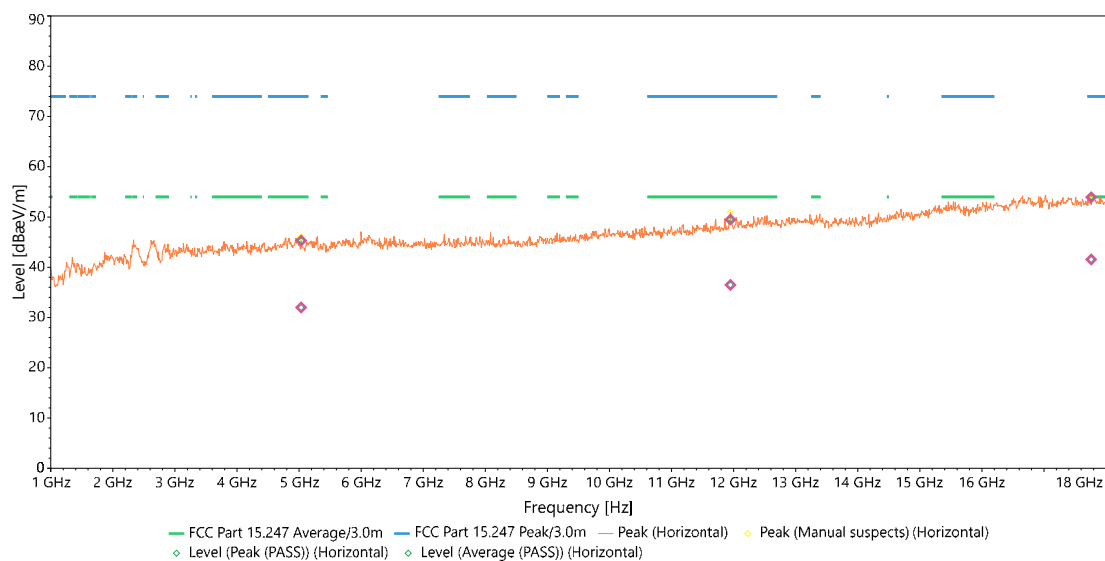


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	5032.40	Horizontal	45.31	74.00	-28.69	1.43	299.00	2.50	Pass
2	5032.40	Horizontal	31.99	54.00	-22.01	1.43	299.00	2.50	Pass
3	11948.00	Horizontal	49.49	74.00	-24.51	1.92	124.00	3.99	Pass
4	11948.00	Horizontal	36.48	54.00	-17.52	1.92	124.00	3.99	Pass
5	17760.00	Horizontal	53.92	74.00	-20.08	1.25	16.00	3.32	Pass
6	17760.00	Horizontal	41.55	54.00	-12.45	1.25	16.00	3.32	Pass
7	2389.80	Horizontal	58.19	74.00	-15.81	1.38	281.00	37.50	Pass
8	2389.80	Horizontal	44.71	54.00	-9.29	1.38	281.00	37.50	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11B 2437 MHz		

Vertical

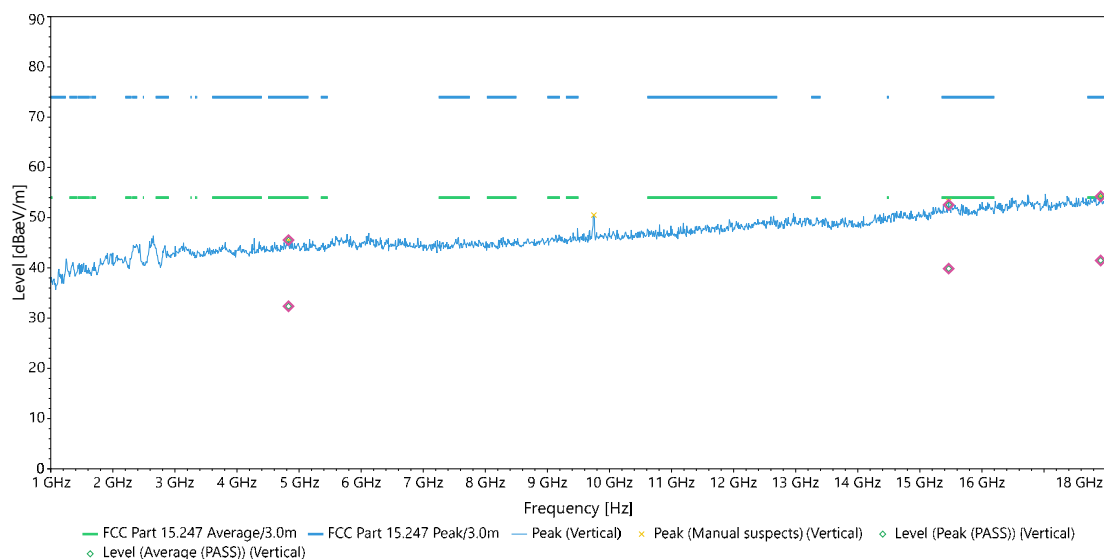


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4830.10	Vertical	45.53	74.00	-28.47	1.01	282.00	1.81	Pass
2	4830.10	Vertical	32.36	54.00	-21.64	1.01	282.00	1.81	Pass
3	15465.00	Vertical	52.54	74.00	-21.46	1.27	4.00	4.79	Pass
4	15465.00	Vertical	39.86	54.00	-14.14	1.27	4.00	4.79	Pass
5	17912.00	Vertical	54.23	74.00	-19.77	1.77	266.00	3.08	Pass
6	17912.00	Vertical	41.48	54.00	-12.52	1.77	266.00	3.08	Pass

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N20 2437 MHz		

Horizontal

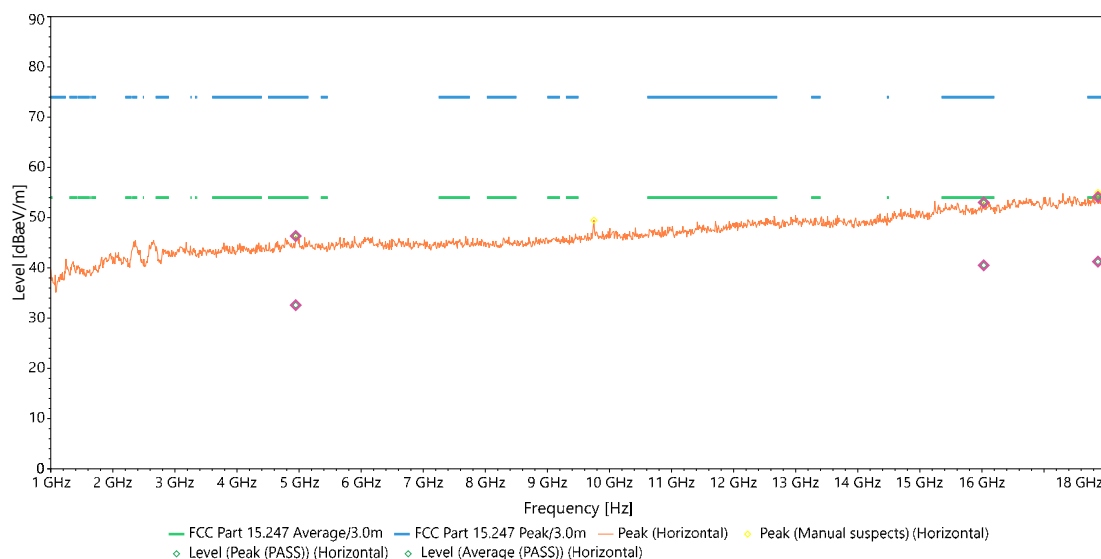



Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4945.70	Horizontal	46.34	74.00	-27.66	2.35	92.00	2.55	Pass
2	4945.70	Horizontal	32.58	54.00	-21.42	2.35	92.00	2.55	Pass
3	16030.00	Horizontal	53.02	74.00	-20.98	2.95	272.00	5.28	Pass
4	16030.00	Horizontal	40.51	54.00	-13.49	2.95	272.00	5.28	Pass
5	17869.00	Horizontal	54.12	74.00	-19.88	1.98	42.00	3.16	Pass
6	17869.00	Horizontal	41.24	54.00	-12.76	1.98	42.00	3.16	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N20 2462 MHz		

Vertical

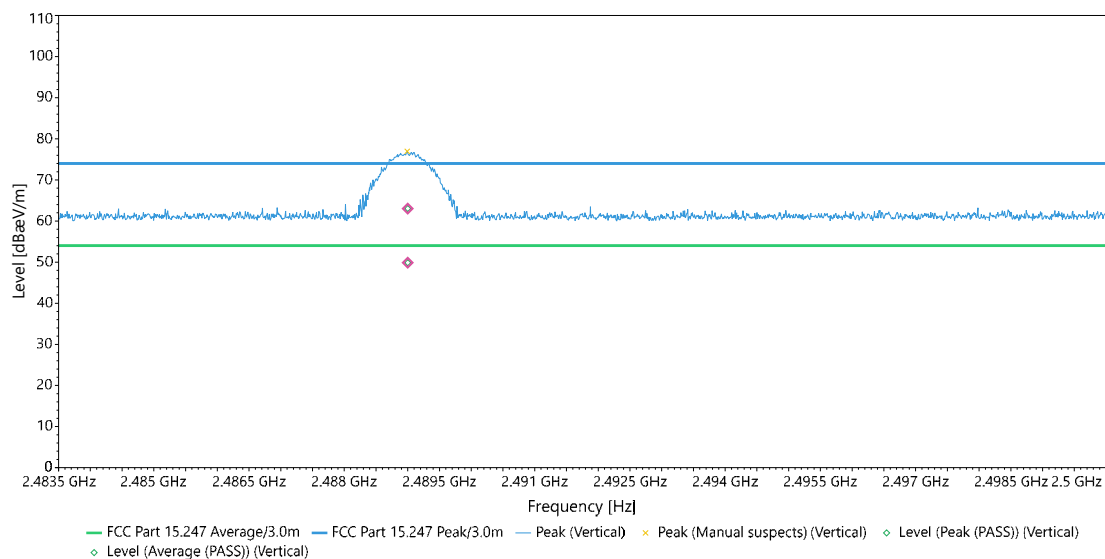
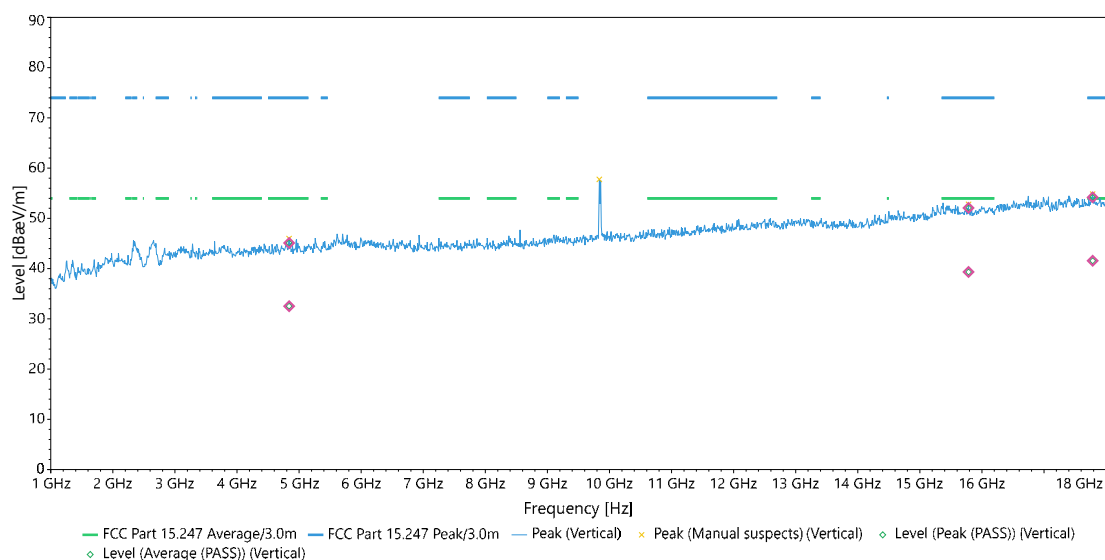


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4838.60	Vertical	45.10	74.00	-28.90	1.09	227.00	1.84	Pass
2	4838.60	Vertical	32.53	54.00	-21.47	1.09	227.00	1.84	Pass
3	15785.00	Vertical	52.09	74.00	-21.91	2.59	174.00	4.73	Pass
4	15785.00	Vertical	39.34	54.00	-14.66	2.59	174.00	4.73	Pass
5	17784.00	Vertical	54.19	74.00	-19.81	1.52	17.00	3.28	Pass
6	17784.00	Vertical	41.56	54.00	-12.44	1.52	17.00	3.28	Pass
7	2489.00	Vertical	63.04	74.00	-10.96	1.81	103.00	37.84	Pass
8	2489.00	Vertical	49.88	54.00	-4.12	1.81	103.00	37.84	Pass

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N20 2462 MHz		

Horizontal

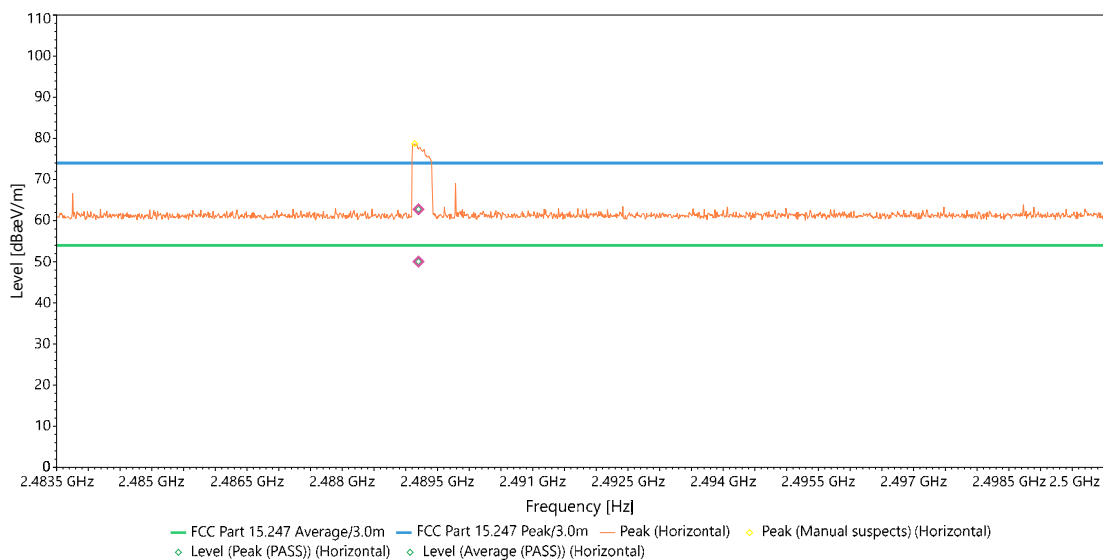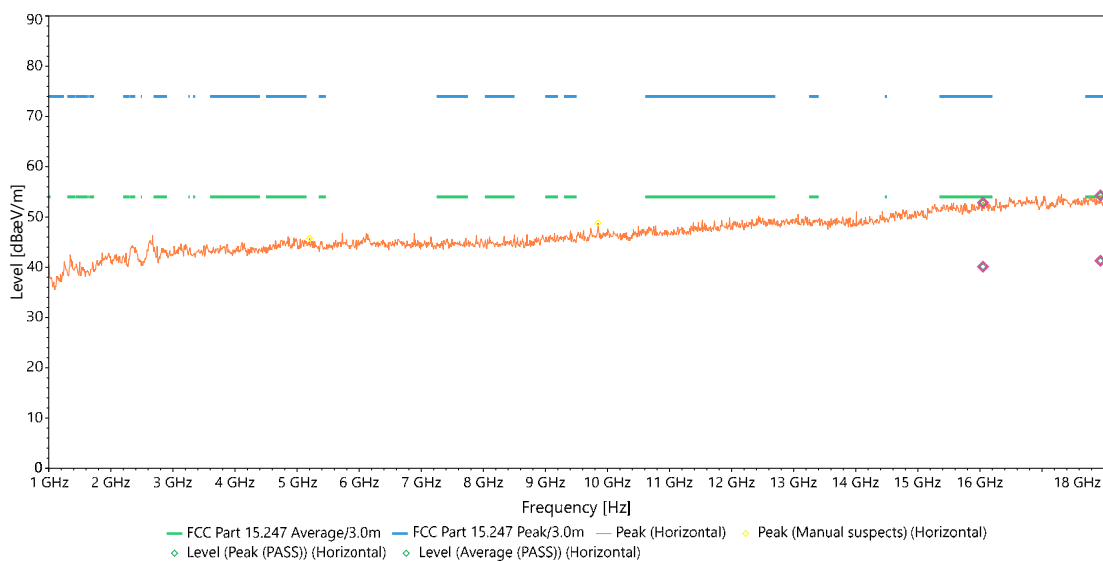


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/ Fail
1	16050.00	Horizontal	52.84	74.00	-21.16	1.15	106.00	5.32	Pass
2	16050.00	Horizontal	40.12	54.00	-13.88	1.15	106.00	5.32	Pass
3	17942.00	Horizontal	54.28	74.00	-19.72	2.17	122.00	3.06	Pass
4	17942.00	Horizontal	41.29	54.00	-12.71	2.17	122.00	3.06	Pass
5	2489.20	Horizontal	37.98	37.98	37.98	37.98	37.98	37.98	Pass
6	2489.20	Horizontal	37.98	37.98	37.98	37.98	37.98	37.98	Pass

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11 N40 2422 MHz		

Vertical

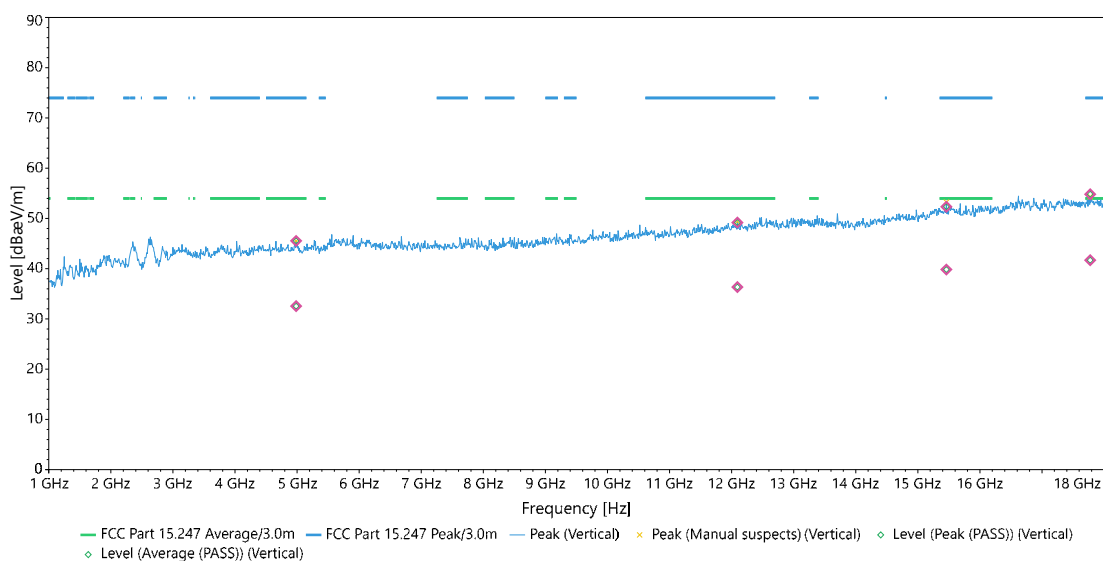

Vertical

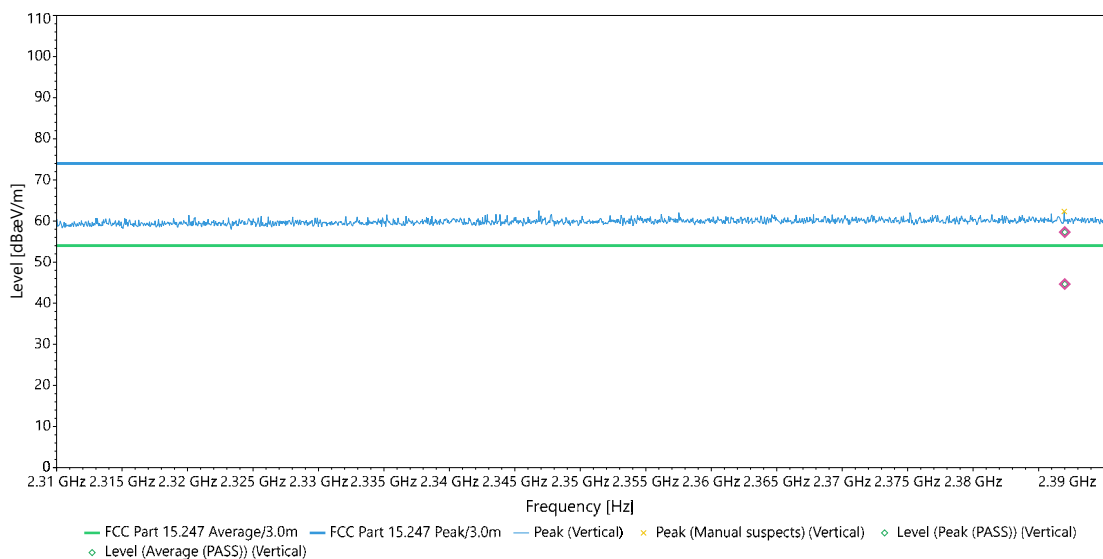


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4984.80	Vertical	45.53	74.00	-28.47	2.18	349.00	1.98	Pass
2	4984.80	Vertical	32.54	54.00	-21.46	2.18	349.00	1.98	Pass
3	12093.00	Vertical	49.19	74.00	-24.81	1.35	285.00	4.03	Pass
4	12093.00	Vertical	36.34	54.00	-17.66	1.35	285.00	4.03	Pass
5	15460.00	Vertical	52.34	74.00	-21.66	1.44	268.00	4.79	Pass
6	15460.00	Vertical	39.83	54.00	-14.17	1.44	268.00	4.79	Pass
7	17777.00	Vertical	54.81	74.00	-19.19	2.29	59.00	3.29	Pass
8	17777.00	Vertical	41.69	54.00	-12.31	2.29	59.00	3.29	Pass
9	2387.00	Vertical	57.29	74.00	-16.71	1.26	29.00	37.45	Pass
10	2387.00	Vertical	44.67	54.00	-9.33	1.26	29.00	37.45	Pass

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N40 2422 MHz		

Horizontal

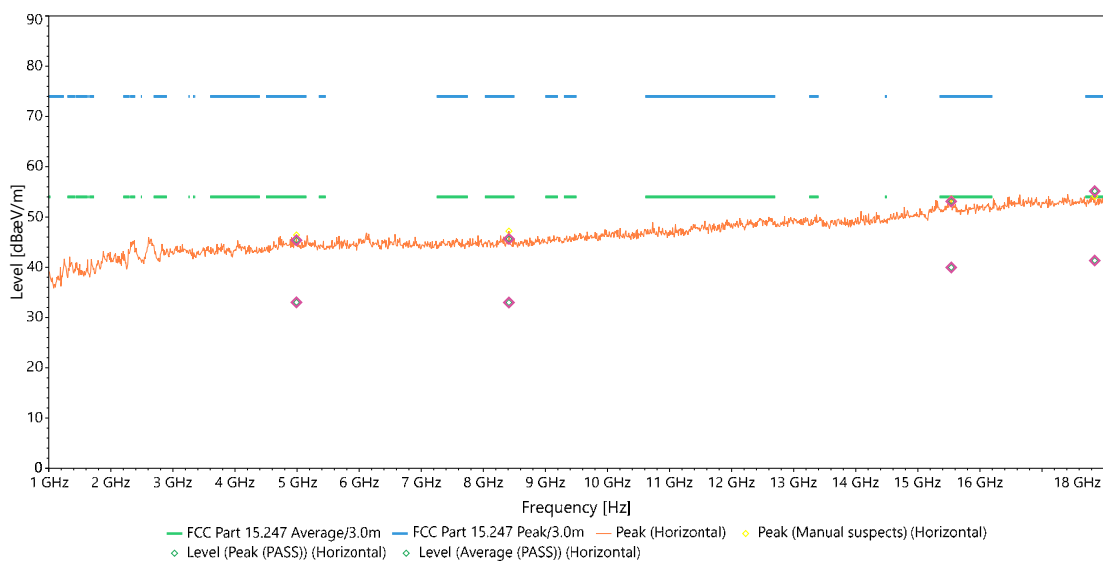

Horizontal

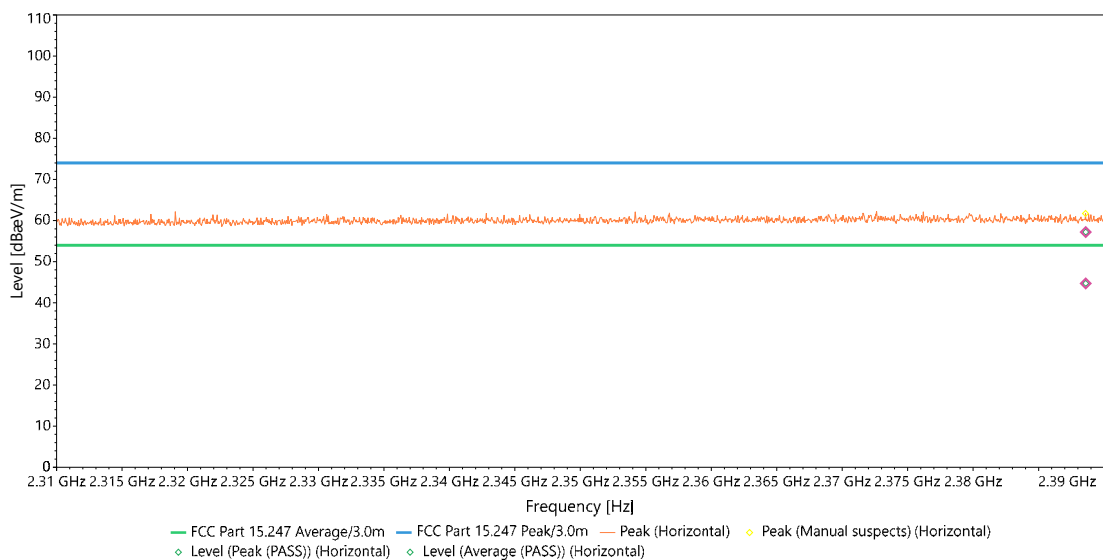


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4989.90	Horizontal	45.38	74.00	-28.62	2.91	55.00	2.54	Pass
2	4989.90	Horizontal	33.02	54.00	-20.98	2.91	55.00	2.54	Pass
3	8412.00	Horizontal	45.64	74.00	-28.36	2.61	337.00	2.71	Pass
4	8412.00	Horizontal	32.98	54.00	-21.02	2.61	337.00	2.71	Pass
5	15538.00	Horizontal	53.11	74.00	-20.89	1.43	110.00	4.98	Pass
6	15538.00	Horizontal	39.96	54.00	-14.04	1.43	110.00	4.98	Pass
7	17850.00	Horizontal	55.15	74.00	-18.85	2.40	258.00	3.17	Pass
8	17850.00	Horizontal	41.34	54.00	-12.66	2.40	258.00	3.17	Pass
9	2388.60	Horizontal	57.20	74.00	-16.80	1.61	137.00	37.51	Pass
10	2388.60	Horizontal	44.72	54.00	-9.28	1.61	137.00	37.51	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N40 2437 MHz		

Vertical

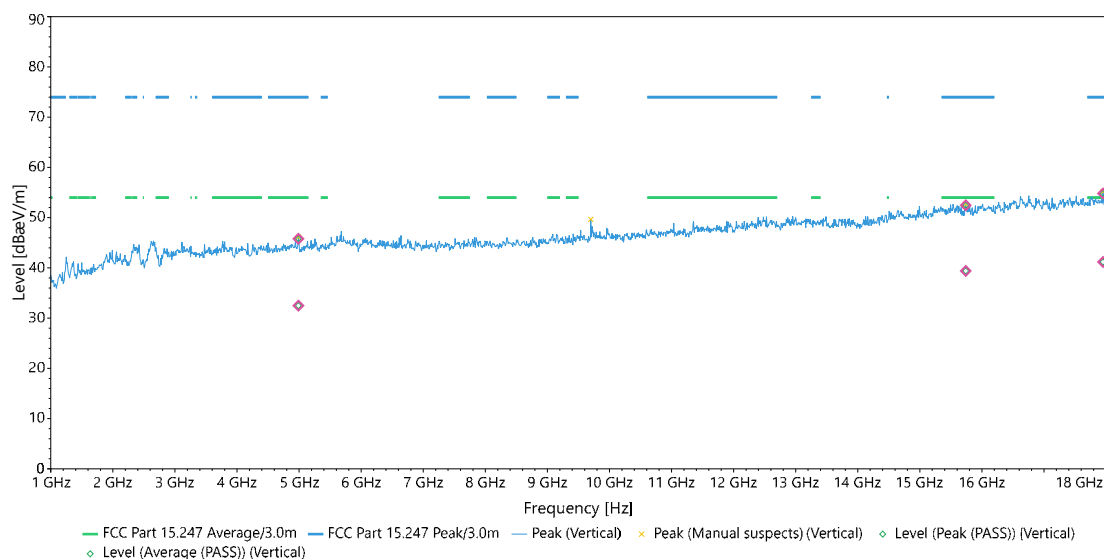


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4988.20	Vertical	45.81	74.00	-28.19	2.93	159.00	1.98	Pass
2	4988.20	Vertical	32.49	54.00	-21.51	2.93	159.00	1.98	Pass
3	15739.00	Vertical	52.45	74.00	-21.55	1.35	228.00	4.68	Pass
4	15739.00	Vertical	39.40	54.00	-14.60	1.35	228.00	4.68	Pass
5	17952.00	Vertical	54.81	74.00	-19.19	2.42	230.00	2.99	Pass
6	17952.00	Vertical	41.18	54.00	-12.82	2.42	230.00	2.99	Pass

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N40 2437 MHz		

Horizontal

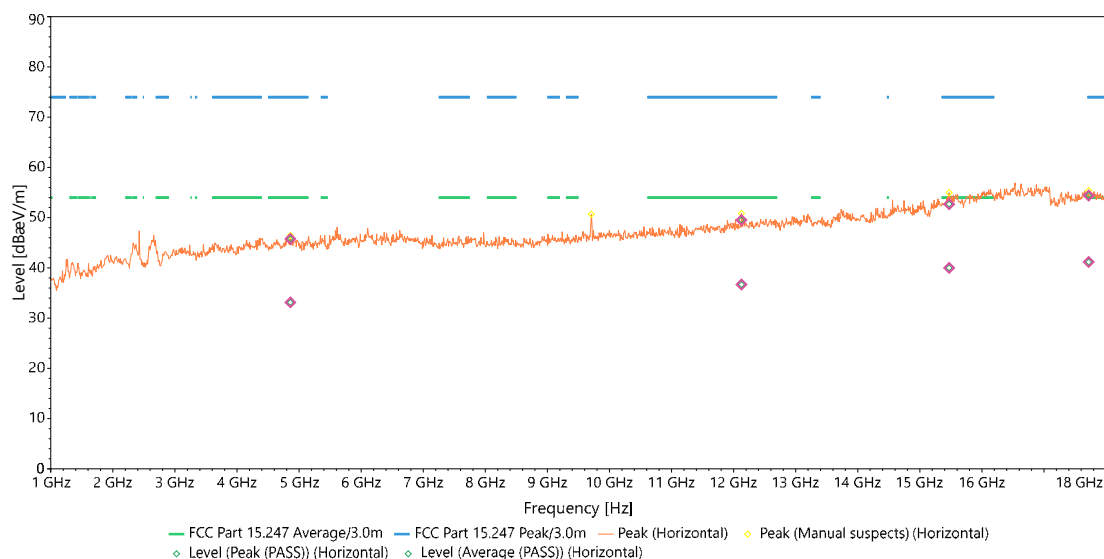


Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak[dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4859.00	Horizontal	45.78	74.00	-28.22	1.17	111.00	2.24	Pass
2	4859.00	Horizontal	33.14	54.00	-20.86	1.17	111.00	2.24	Pass
3	12126.00	Horizontal	49.52	74.00	-24.48	1.12	331.00	4.28	Pass
4	12126.00	Horizontal	36.68	54.00	-17.32	1.12	331.00	4.28	Pass
5	15472.00	Horizontal	52.69	74.00	-21.31	1.88	260.00	5.01	Pass
6	15472.00	Horizontal	40.01	54.00	-13.99	1.88	260.00	5.01	Pass
7	17719.00	Horizontal	54.41	74.00	-19.59	1.14	124.00	3.40	Pass
8	17719.00	Horizontal	41.18	54.00	-12.82	1.14	124.00	3.40	Pass

REMARKS:


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N40 2452 MHz		

Vertical

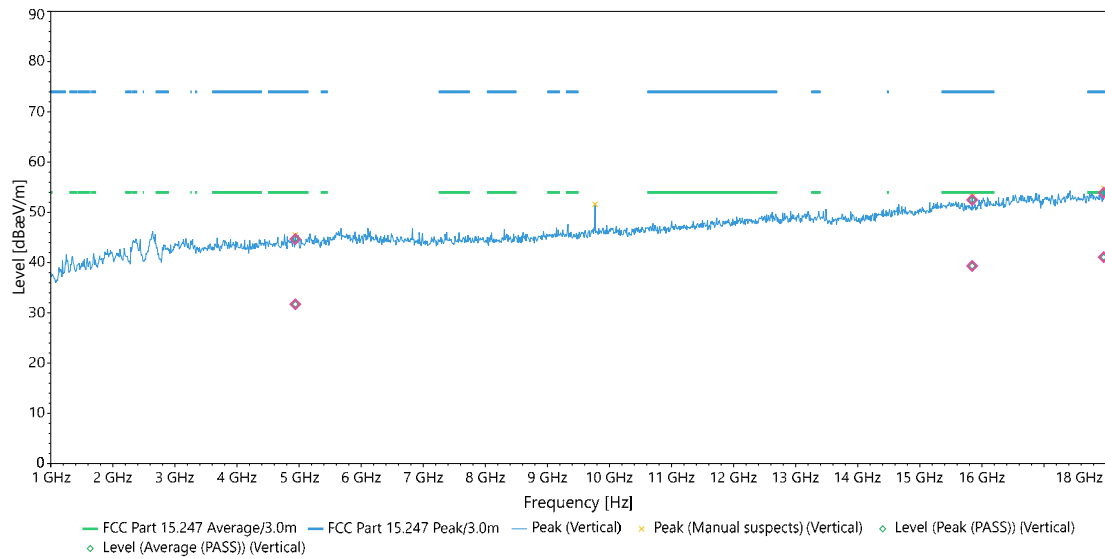

Vertical

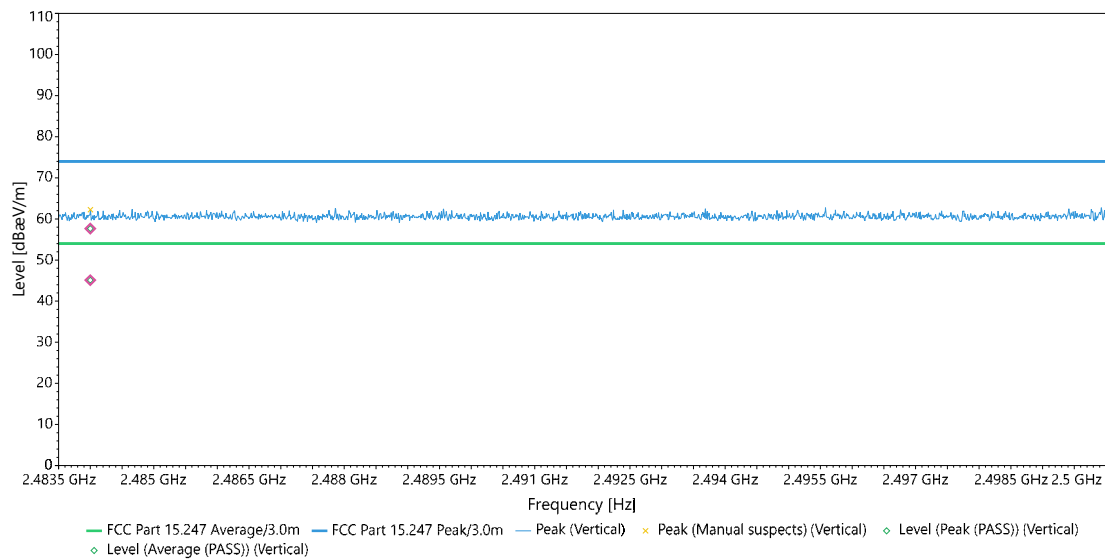


Antenna Polarity & Test Distance: Vertical at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4938.90	Vertical	44.69	74.00	-29.31	1.79	224.00	1.95	Pass
2	4938.90	Vertical	31.71	54.00	-22.29	1.79	224.00	1.95	Pass
3	15844.00	Vertical	52.50	74.00	-21.50	1.89	110.00	4.80	Pass
4	15844.00	Vertical	39.33	54.00	-14.67	1.89	110.00	4.80	Pass
5	17963.00	Vertical	53.90	74.00	-20.10	2.70	102.00	2.98	Pass
6	17963.00	Vertical	41.08	54.00	-12.92	2.70	102.00	2.98	Pass
7	2484.00	Vertical	57.65	74.00	-16.35	1.34	5.00	37.84	Pass
8	2484.00	Vertical	45.10	54.00	-8.90	1.34	5.00	37.84	Pass


1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

EUT Test Condition		Measurement Detail	
Input Power	6Vdc	Frequency Range	1GHz-26GHz
Environmental Conditions	25 deg. C, 70% RH	Tested By	Rafael Aguilar
Test Mode	TX MODE 11N40 2452 MHz		

Horizontal

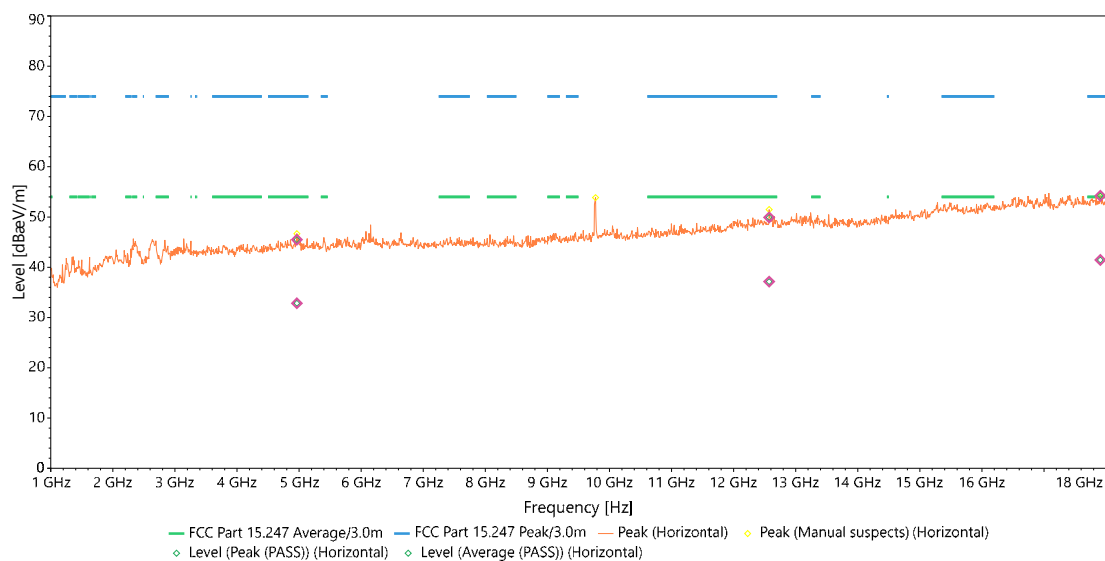

Horizontal

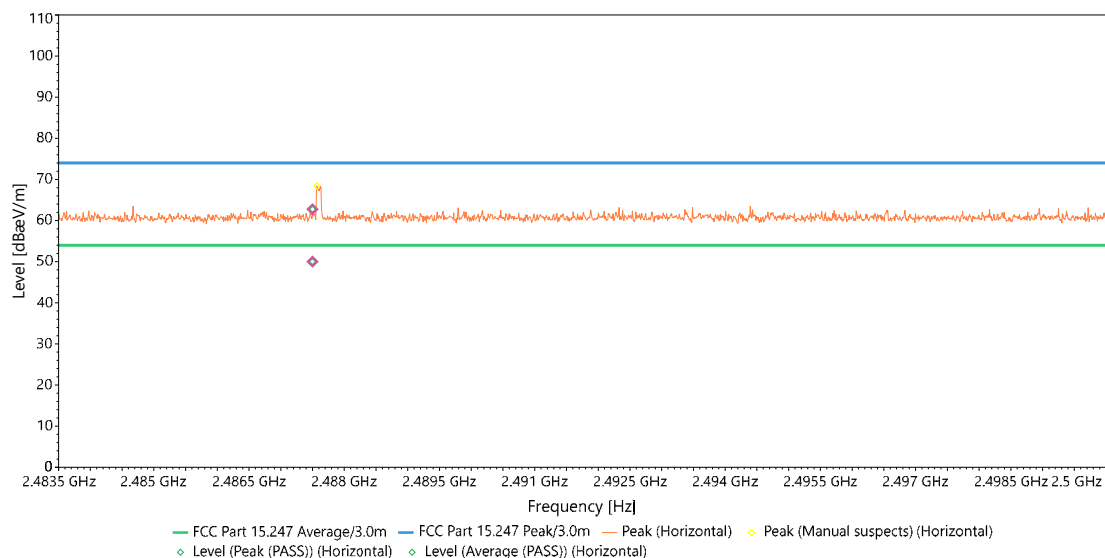

Antenna Polarity & Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Polarization	Level Peak [dB(uV/m)]	Limit Peak dB(uV/m)	Margin Peak [dB]	Height (cm)	Angle (Deg)	Factor [dB(1/m)]	Pass/Fail
1	4964.40	Horizontal	45.50	74.00	-28.50	1.70	218.00	2.56	Pass
2	4964.40	Horizontal	32.84	54.00	-21.16	1.70	218.00	2.56	Pass
3	12572.00	Horizontal	49.91	74.00	-24.09	1.27	33.00	4.30	Pass
4	12572.00	Horizontal	37.14	54.00	-16.86	1.27	33.00	4.30	Pass
5	17907.00	Horizontal	54.21	74.00	-19.79	2.79	195.00	3.13	Pass
6	17907.00	Horizontal	41.45	54.00	-12.55	2.79	195.00	3.13	Pass
7	2487.50	Horizontal	62.75	74.00	-11.25	1.77	198.00	37.98	Pass
8	2487.50	Horizontal	50.02	54.00	-3.98	1.77	198.00	37.98	Pass

REMARKS:

1. Level (dBuV) = Reading (dBuV) + Factor (dB(1/m)).
2. Factor (dB(1/m)) = Antenna Factor(AF) (dB(1/m)) + Cable Loss (dB) +Preamplifier
3. Margin value = Emission level – Limit value.
4. The emission levels of other frequencies were less than 20dB margin against the limit.

IV. Pictures of test Arrangements

Please see setup photo file

END OF REPORT