

FCC RF Test Report

(DTS)

Applicant: PORTMAN ELECTRONICS (DONGGUAN) CO., LTD.

Address of Applicant: NO#10, Luyi 2 Road, Keyuancheng, Tangxia Town

Equipment Under Test (EUT)

Product Name: CAR ALARM

Model No.: 4180069TI

FCC ID: TBQRX03-LR2WTI

Applicable Standards: FCC CFR Title 47 Part 15C (§15.247)

Date of Sample Receipt: 08 Mar., 2022

Date of Test: 09 Mar., to 11 May., 2022

Date of Report Issued: 12 May., 2022

Test Result: PASS

Tested by: Mike. OU

Date: 12 May., 2022

Test Engineer

Reviewed by: Wenker Zhou

Date: 12 May., 2022

Project Engineer

Approved by: Wenker Zhou

Date: 12 May., 2022

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

| Version No. | Date | Description |
|-------------|---------------|---|
| 00 | 24 Apr., 2022 | <i>Original</i> |
| 01 | 12 May., 2022 | 1. <i>Updated test data on page 14.</i> |
| | | |
| | | |
| | | |

3 Contents

| | Page |
|--|-----------|
| 1 Cover Page | 1 |
| 2 Version | 2 |
| 3 Contents..... | 3 |
| 4 General Information..... | 4 |
| 4.1 Client Information | 4 |
| 4.2 General Description of E.U.T | 4 |
| 4.3 Test Mode and Test Environment | 5 |
| 4.4 Description of Support Units..... | 5 |
| 4.5 Measurement Uncertainty..... | 5 |
| 4.6 Additions to, Deviations, or Exclusions from the Method..... | 5 |
| 4.7 Laboratory Facility..... | 5 |
| 4.8 Laboratory Location | 5 |
| 4.9 Test Instruments List | 6 |
| 5 Measurement Setup and Procedure | 7 |
| 5.1 Test Channel | 7 |
| 5.2 Test Setup..... | 7 |
| 5.3 Test Procedure | 9 |
| 6 Test Results..... | 10 |
| 6.1 Summary | 10 |
| 6.2 Antenna requirement | 12 |
| 6.3 Conducted Output Power | 13 |
| 6.4 Emission Bandwidth | 14 |
| 6.5 Power Spectral Density..... | 15 |
| 6.6 Spurious Emission | 16 |

4 General Information

4.1 Client Information

| | |
|------------------------|--|
| Applicant: | PORTMAN ELECTRONICS (DONGGUAN) CO., LTD. |
| Address: | NO#10, Luyi 2 Road, Keyuancheng, Tangxia Town |
| Manufacturer/ Factory: | DONGGUAN PORTMAN ELECTRONIC SCIENCE AND TECHNOLOGY CO., LTD. |
| Address: | NO.10, LUYI 2 ROAD, TANGXIA TOWN, DONGGUAN CITY GUANGDONG PROVINCE |

4.2 General Description of E.U.T.

| | |
|------------------------|---|
| Product Name: | CAR ALARM |
| Model No.: | 4180069TI |
| Operation Frequency: | 916.30 MHz |
| Channel Numbers: | 1 |
| Modulation Technology: | Lora |
| Antenna Type: | Helix Antenna |
| Antenna Gain: | 0 dBi (declare by applicant) |
| Power Supply: | DC12.0V |
| Test Sample Condition: | The test samples were provided in good working order with no visible defects. |

4.3 Test Mode and Test Environment

| Test Mode: | |
|-------------------------------|---|
| Tx mode | Keep the EUT in continuous transmitting with modulation |
| Operating Environment: | |
| Temperature: | 15°C ~ 35°C |
| Humidity: | 20 % ~ 75 % RH |
| Atmospheric Pressure: | 1010 mbar |

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Measurement Uncertainty

| Parameter | Expanded Uncertainty (Confidence of 95%(U = 2Uc(y))) |
|--|---|
| Radiated Emission (30MHz ~ 1GHz) (3m SAC) | ±4.45 dB |
| Radiated Emission (1GHz ~ 18GHz) (3m SAC) | ±5.34 dB |
| Radiated Emission (18GHz ~ 40GHz) (3m SAC) | ±5.34 dB |

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.6 Additions to, Deviations, or Exclusions from the Method

No

4.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTe@lets.com, Website: <http://jyt.lets.com>

4.9 Test Instruments List

| Radiated Emission(3m SAC): | | | | | |
|-------------------------------|-----------------|-----------------|------------------|---------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal.Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| 3m SAC | ETS | 9m*6m*6m | WXJ001-1 | 01-19-2021 | 01-18-2024 |
| BiConiLog Antenna | Schwarzbeck | VULB9163 | WXJ002 | 02-17-2022 | 02-16-2023 |
| Biconical Antenna | Schwarzbeck | VUBA9117 | WXJ002-1 | 06-20-2021 | 06-19-2022 |
| Horn Antenna | Schwarzbeck | BBHA9120D | WXJ002-2 | 02-17-2022 | 02-16-2023 |
| Horn Antenna | Schwarzbeck | BBHA9120D | WXJ002-3 | 06-18-2021 | 06-17-2022 |
| Pre-amplifier (30MHz ~ 1GHz) | Schwarzbeck | BBV9743B | WXG001-7 | 02-17-2022 | 02-16-2023 |
| Pre-amplifier (1GHz ~ 18GHz) | SKET | LNPA_0118G-50 | WXG001-3 | 02-17-2022 | 02-16-2023 |
| Pre-amplifier (18GHz ~ 40GHz) | RF System | TRLA-180400G45B | WXG001-9 | 02-17-2022 | 02-16-2023 |
| EMI Test Receiver | Rohde & Schwarz | ESRP7 | WXJ003-1 | 02-17-2022 | 02-16-2023 |
| Spectrum Analyzer | KEYSIGHT | N9010B | WXJ004-2 | 11-27-2021 | 11-26-2022 |
| Band Reject Filter Group | Tonscend | JS0806-F | WXJ089 | N/C | |
| Coaxial Cable (30MHz ~ 1GHz) | JYTSZ | JYT3M-1G-NN-8M | WXG001-4 | 02-17-2022 | 02-16-2023 |
| Coaxial Cable (1GHz ~ 18GHz) | JYTSZ | JYT3M-18G-NN-8M | WXG001-5 | 02-17-2022 | 02-16-2023 |
| Coaxial Cable (18GHz ~ 40GHz) | JYTSZ | JYT3M-40G-SS-8M | WXG001-7 | 02-17-2022 | 02-16-2023 |
| Test Software | Tonscend | TS+ | Version: 3.0.0.1 | | |

| Conducted Method: | | | | | |
|-------------------|-----------------|-----------|------------|----------------------|--------------------------|
| Test Equipment | Manufacturer | Model No. | Manage No. | Cal. Date (mm-dd-yy) | Cal. Due date (mm-dd-yy) |
| Spectrum Analyzer | Rohde & Schwarz | FSP 30 | WXJ004 | 01-20-2022 | 01-20-2023 |
| DC Power Supply | Keysight | E3642A | WXJ025-2 | 10-25-2021 | 10-24-2022 |

5 Measurement Setup and Procedure


5.1 Test Channel

According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

| Test channel | |
|--------------|----------------|
| Channel No. | Frequency(MHz) |
| / | 916.3 |

5.2 Test Setup


1) Conducted emission measurement:

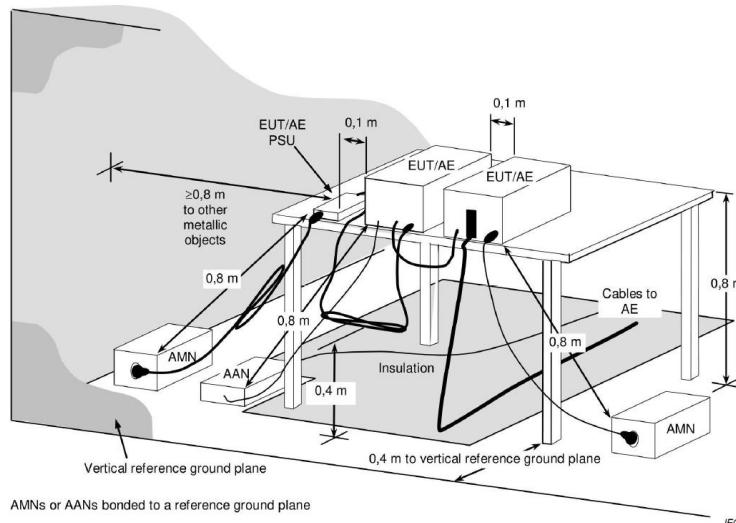


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

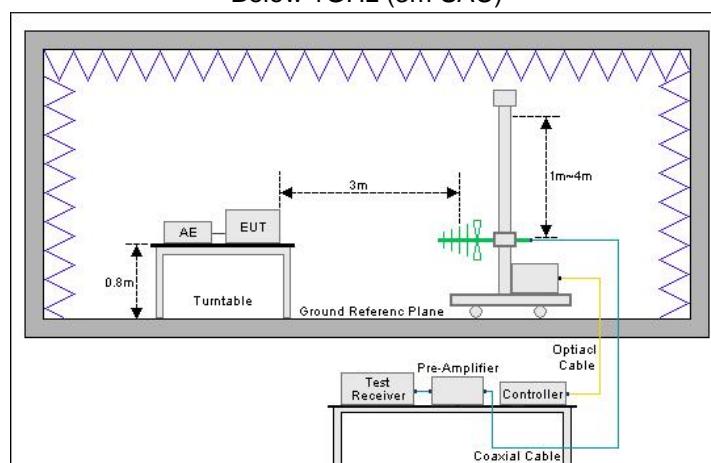

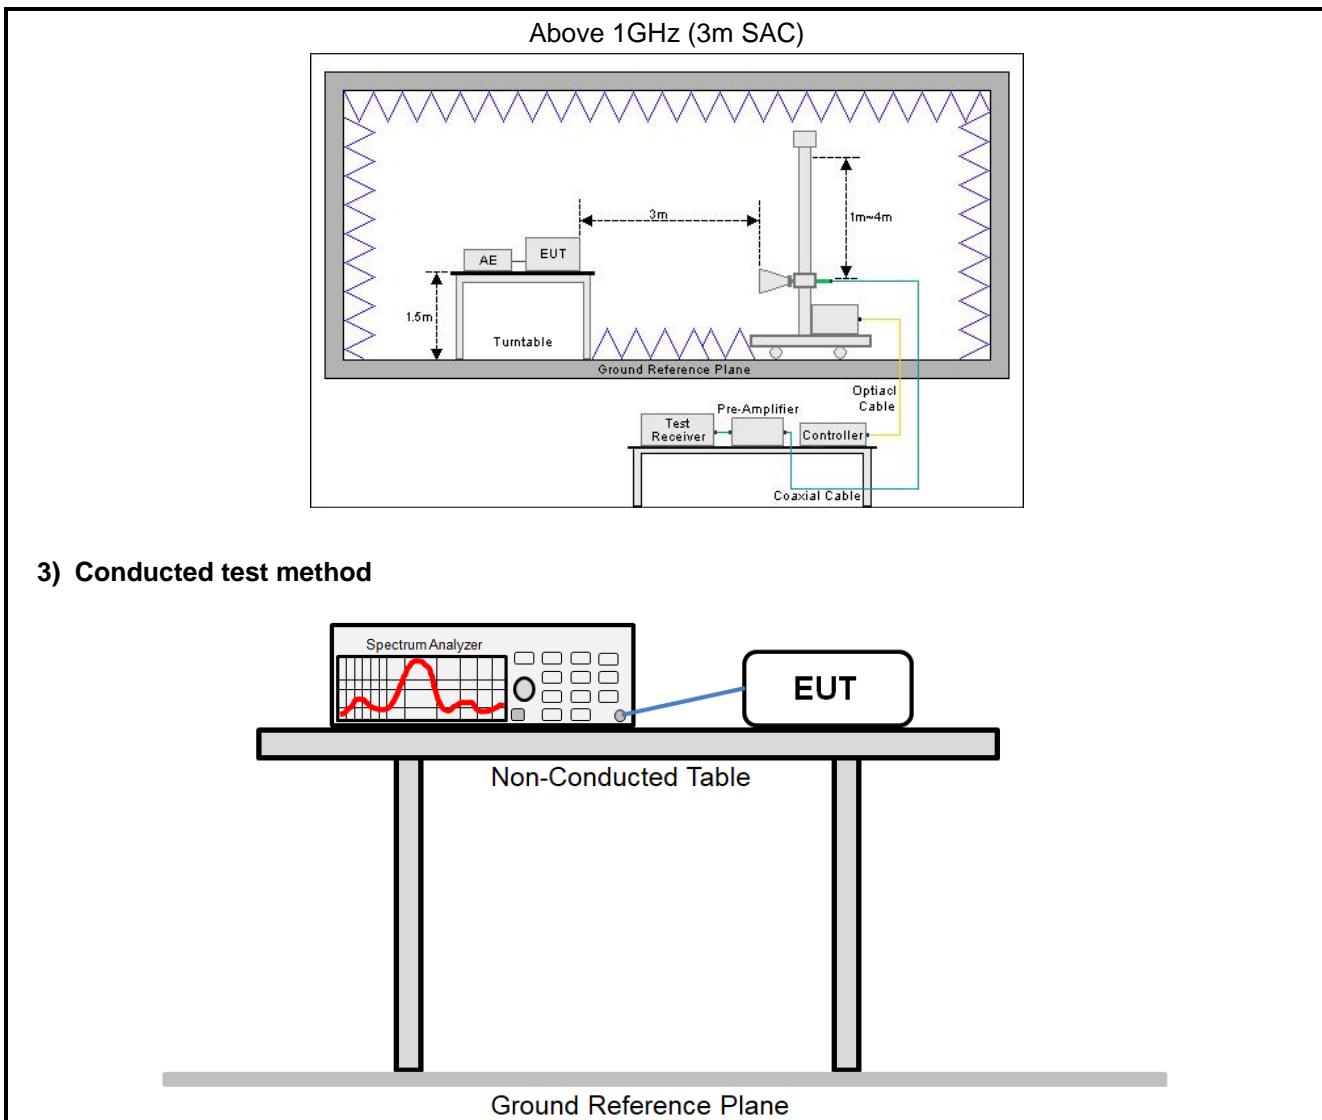

5.3 Test Procedure

| Test method | Test step |
|-----------------------|---|
| Conducted emission | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. |
| Radiated emission | <p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. |
| Conducted test method | <ol style="list-style-type: none"> 1. The antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software. |

6 Test Results

6.1 Summary

6.1.1 Clause and Data Summary

| Test items | Standard clause | Test data | Result |
|--|--|-----------------|--------|
| Antenna Requirement | 15.203 15.247 (b)(4) | See Section 6.2 | Pass |
| AC Power Line Conducted Emission | 15.207 | / | N/A |
| Conducted Output Power | 15.247 (b)(3) | See Section 6.3 | Pass |
| 6dB Emission Bandwidth 99% Occupied Bandwidth | 15.247 (a)(2) | See Section 6.4 | Pass |
| Power Spectral Density | 15.247 (e) | See Section 6.5 | Pass |
| Spurious Emission | 15.205 15.209 15.247 (d) | See Section 6.6 | Pass |
| Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. EUT power by DC12V. 3. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB (provided by the customer). | | | |
| Test Method: | ANSI C63.10-2013 KDB 558074 D01 15.247 Meas Guidance v05r02 | | |

6.1.2 Test Limit

| Test items | Limit | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--|-----------------|----------------------|--|----------|------|-------|---------|------|------|------------|----------|------|------|------------|-----------|------|------|------------|------------|------|------|------------|-----------|---------------------------|--|---------|-------|-------------|------|------|
| Conducted Output Power | For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6dB Emission Bandwidth | The minimum 6 dB bandwidth shall be at least 500 kHz. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 99% Occupied Bandwidth | N/A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Power Spectral Density | For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Spurious Emission | <p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)):</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Limit (dBμV/m)</th> <th rowspan="2">Detector</th> </tr> <tr> <th>@ 3m</th> <th>@ 10m</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>40.0</td> <td>30.0</td> <td>Quasi-peak</td> </tr> <tr> <td>88 – 216</td> <td>43.5</td> <td>33.5</td> <td>Quasi-peak</td> </tr> <tr> <td>216 – 960</td> <td>46.0</td> <td>36.0</td> <td>Quasi-peak</td> </tr> <tr> <td>960 – 1000</td> <td>54.0</td> <td>44.0</td> <td>Quasi-peak</td> </tr> </tbody> </table> <p>Note: The more stringent limit applies at transition frequencies.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="2">Limit (dBμV/m) @ 3m</th> </tr> <tr> <th>Average</th> <th>Peake</th> </tr> </thead> <tbody> <tr> <td>Above 1 GHz</td> <td>54.0</td> <td>74.0</td> </tr> </tbody> </table> <p>Note: The measurement bandwidth shall be 1 MHz or greater.</p> | Frequency (MHz) | Limit (dB μ V/m) | | Detector | @ 3m | @ 10m | 30 – 88 | 40.0 | 30.0 | Quasi-peak | 88 – 216 | 43.5 | 33.5 | Quasi-peak | 216 – 960 | 46.0 | 36.0 | Quasi-peak | 960 – 1000 | 54.0 | 44.0 | Quasi-peak | Frequency | Limit (dB μ V/m) @ 3m | | Average | Peake | Above 1 GHz | 54.0 | 74.0 |
| Frequency (MHz) | Limit (dB μ V/m) | | Detector | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | @ 3m | @ 10m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30 – 88 | 40.0 | 30.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 88 – 216 | 43.5 | 33.5 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 216 – 960 | 46.0 | 36.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 960 – 1000 | 54.0 | 44.0 | Quasi-peak | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency | Limit (dB μ V/m) @ 3m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Average | Peake | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Above 1 GHz | 54.0 | 74.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

6.2 Antenna requirement

| | |
|--|--|
| Standard requirement: | FCC Part 15 C Section 15.203 /247(b)(4) |
| 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. | |
| 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. | |
| E.U.T Antenna: | The EUT antenna is an Helix Antenna which cannot replace by end-user, the best case gain of the antenna is 0 dBi. See product internal photos for details. |

6.3 Conducted Output Power

| Test Channel | Maximum Output Power (dBm) | Limit(dBm) | Result |
|--------------|----------------------------|------------|--------|
| 916.30 MHz | 18.71 | 30.00 | Pass |


Test plot as follows:



6.4 Emission Bandwidth

| Test Channel | 6dB Emission Bandwidth (MHz) | Limit (kHz) | Result |
|--------------|------------------------------|-------------|--------|
| 916.30 MHz | 0.820 | >500 | Pass |
| Test Channel | 99% Occupy Bandwidth (MHz) | Limit (kHz) | Result |
| 916.30 MHz | 0.620 | N/A | N/A |


Test plot as follows:

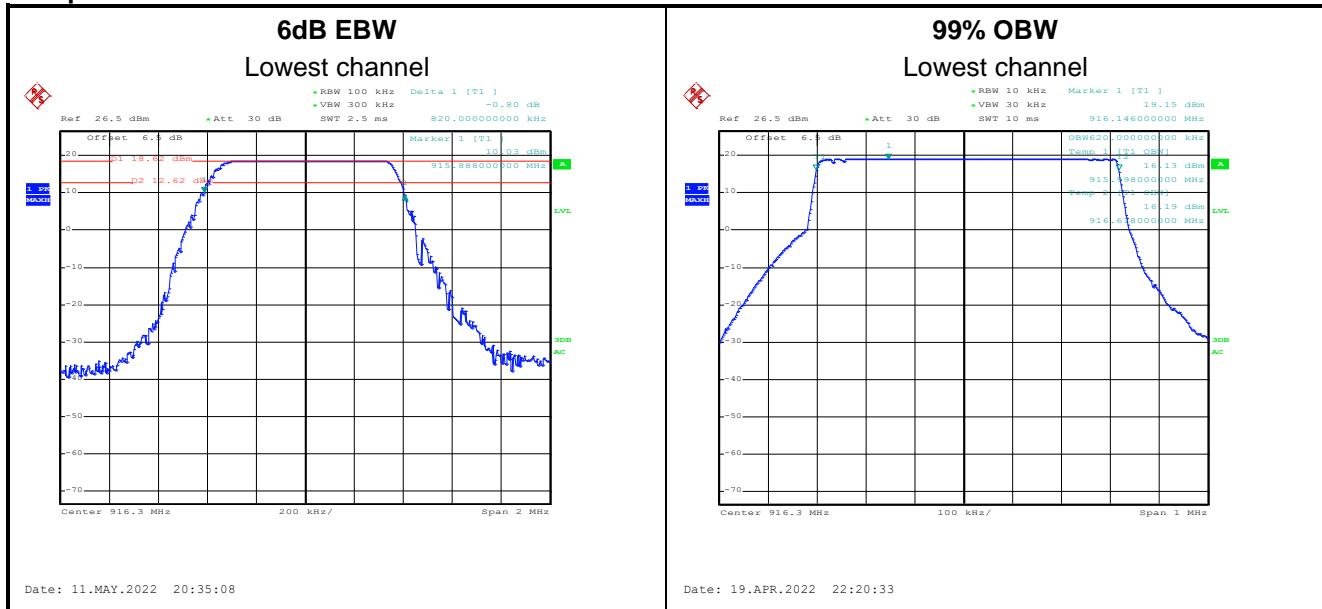

6.5 Power Spectral Density


| Test Channel | Power Spectral Density (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|--------------|--------------------------------------|---------------------|--------|
| 916.30 MHz | -3.35 | 8.00 | Pass |

Test plot as follows:

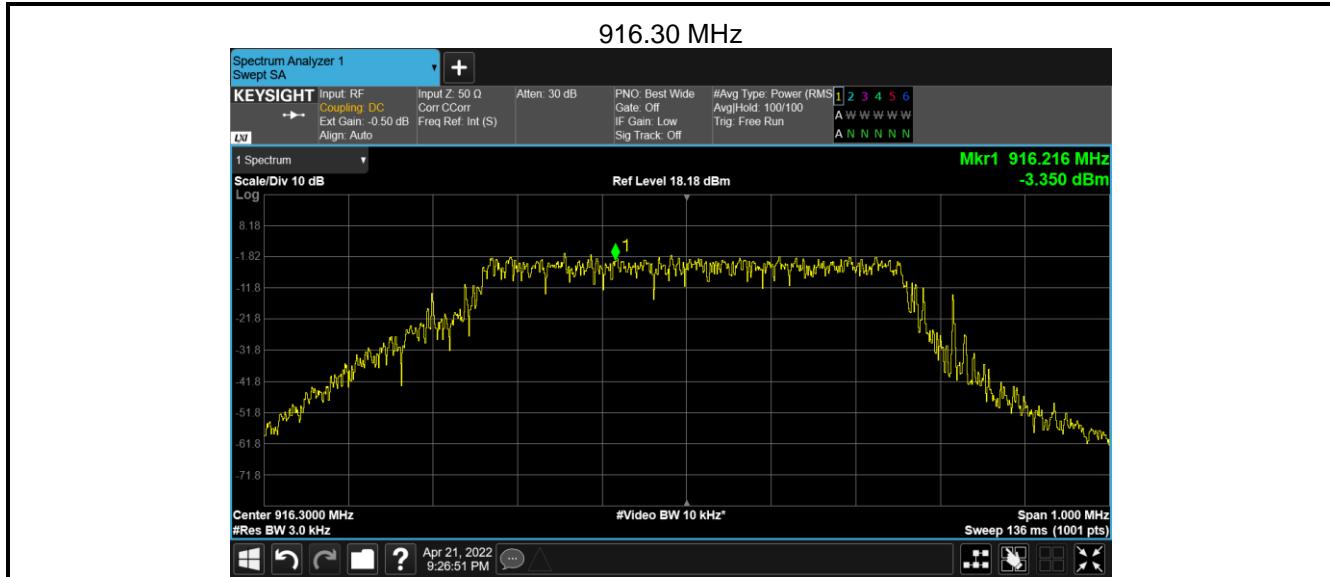


6.6 Spurious Emission


6.6.1 Band-edge Emission

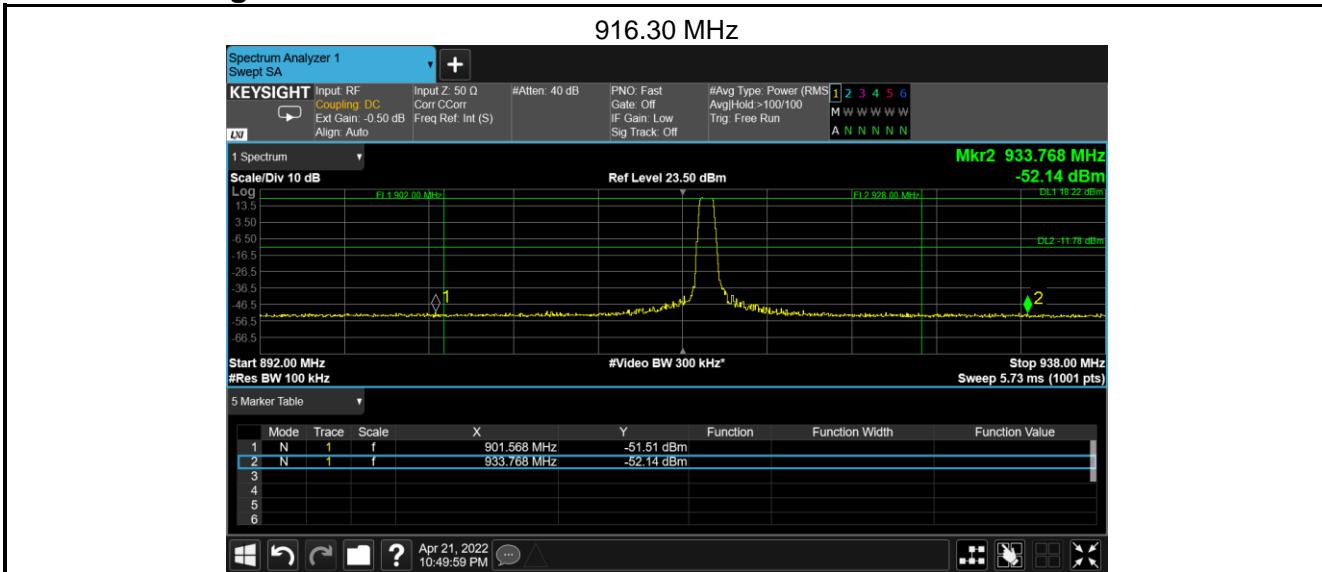


6.6.2 Conducted Spurious Emission

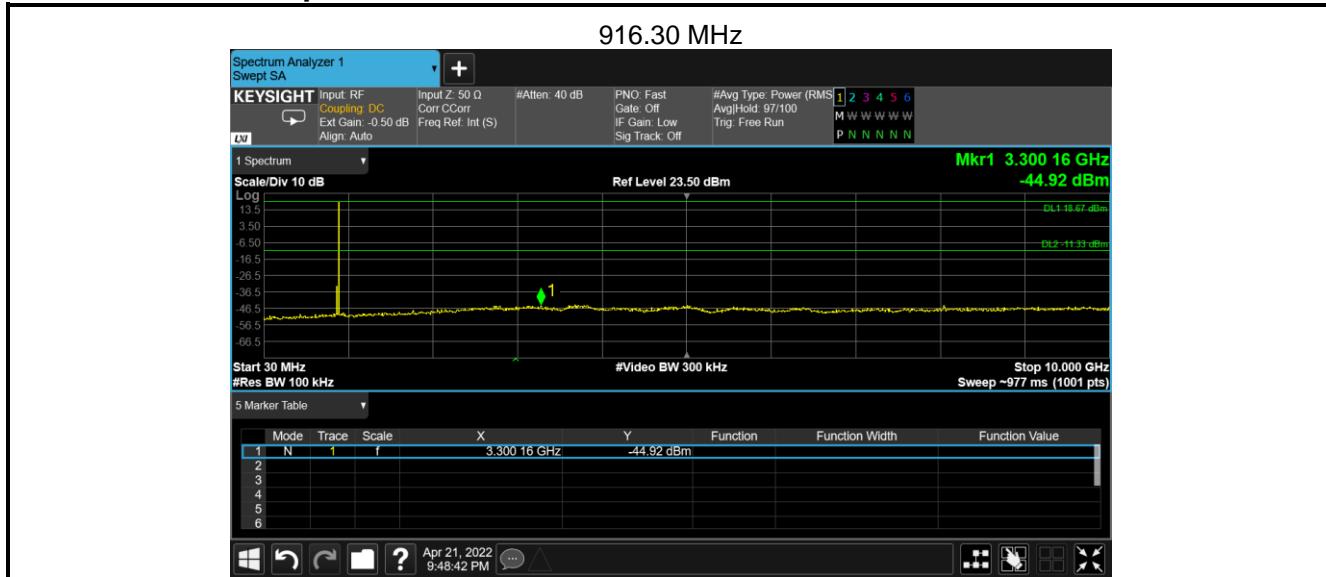

6.6.3 Emissions in Restricted Frequency Bands
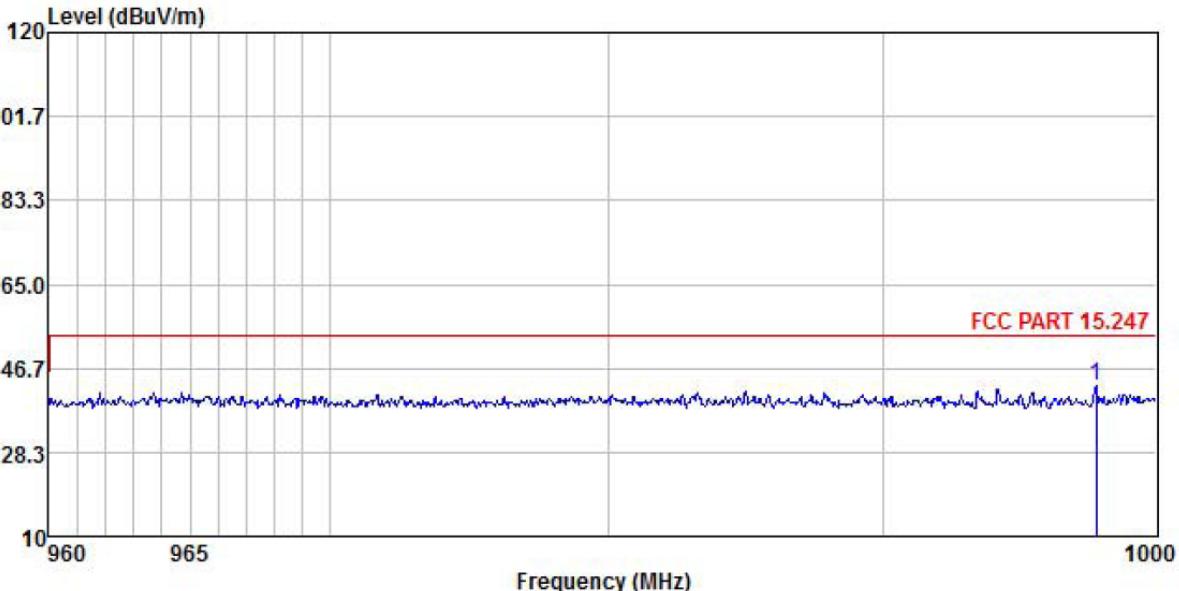
| Product Name: | CAR ALARM | Product Model: | 4180069TI | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-----------------|----------------|------------|---------------|-------------|----------------|------------|---------------|-------------|------------|------------|--------|-----|------|------|----|----|--------|--------|----|--|---|---------|-------|-------|------|------|-------|-------|--------|
| Test By: | Mike | Test mode: | Tx mode | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Channel: | 960 MHz ~ 1 GHz | Polarization: | Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test Voltage: | DC 12.0V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table> <thead> <tr> <th>Freq</th> <th>Read Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamp Factor</th> <th>Limit Level</th> <th>Line Limit</th> <th>Over Limit</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>997.757</td> <td>16.29</td> <td>23.08</td> <td>3.67</td> <td>0.00</td> <td>43.04</td> <td>54.00</td> <td>-10.96</td> </tr> </tbody> </table> | | | | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Line Limit | Over Limit | Remark | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | 1 | 997.757 | 16.29 | 23.08 | 3.67 | 0.00 | 43.04 | 54.00 | -10.96 |
| Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Line Limit | Over Limit | Remark | | | | | | | | | | | | | | | | | | | | | | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 997.757 | 16.29 | 23.08 | 3.67 | 0.00 | 43.04 | 54.00 | -10.96 | | | | | | | | | | | | | | | | | | | | | | |
| Remark: 1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | | | |
|----------------------|-----------------|-----------------------|------------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Channel: | 960 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12.0V | | |

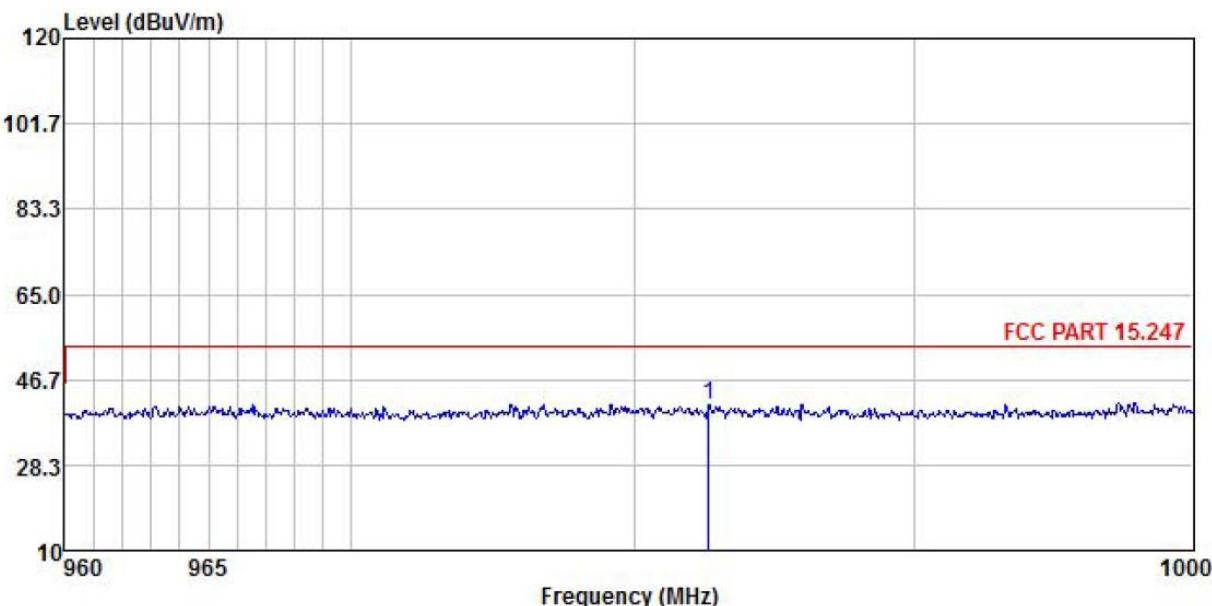


| Freq | Read | Antenna | Cable | Preamp | Limit | Over | Remark |
|------|---------|---------|--------|--------|--------|--------|--------------|
| | Freq | Level | Factor | Loss | Factor | Line | |
| MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dB |
| 1 | 982.640 | 14.66 | 23.00 | 3.61 | 0.00 | 41.27 | 54.00 -12.73 |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

| | | | |
|----------------------|------------------|-----------------------|-----------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Channel: | 1 GHz ~ 1.24 GHz | Polarization: | Vertical |
| Test Voltage: | DC 12.0V | | |

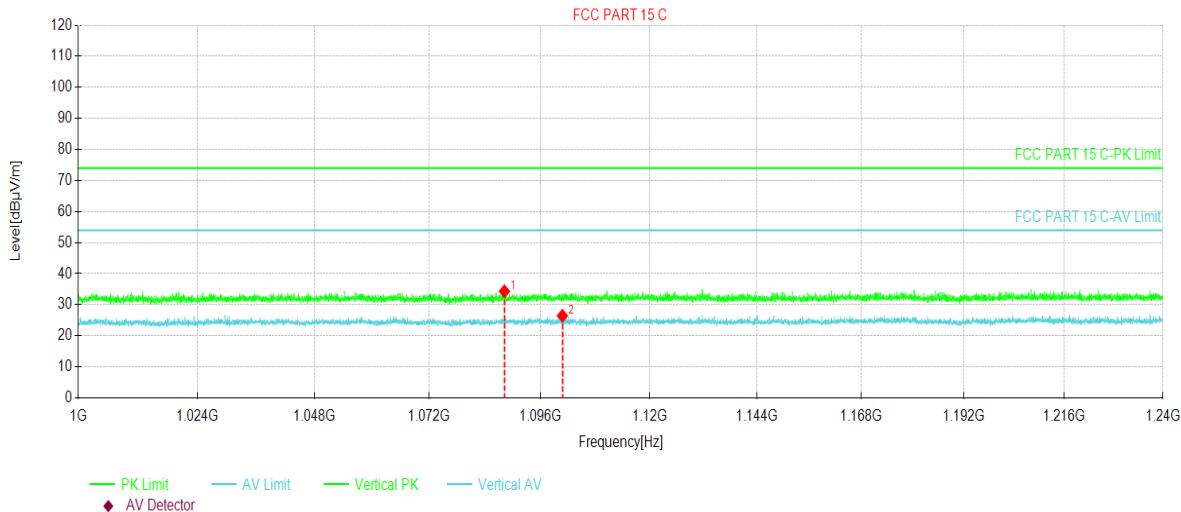


Suspected Data List

| NO. | Freq. [MHz] | Reading [dB μ V/m] | Level [dB μ V/m] | Factor [dB] | Limit [dB μ V/m] | Margin [dB] | Trace | Polarity |
|-----|-------------|------------------------|----------------------|-------------|----------------------|-------------|-------|----------|
| 1 | 1088.20 | 58.26 | 34.31 | -23.95 | 74.00 | 39.69 | PK | Vertical |
| 2 | 1100.77 | 50.37 | 26.45 | -23.92 | 54.00 | 27.55 | AV | Vertical |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

| | | | |
|----------------------|------------------|-----------------------|------------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Channel: | 1 GHz ~ 1.24 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12.0V | | |

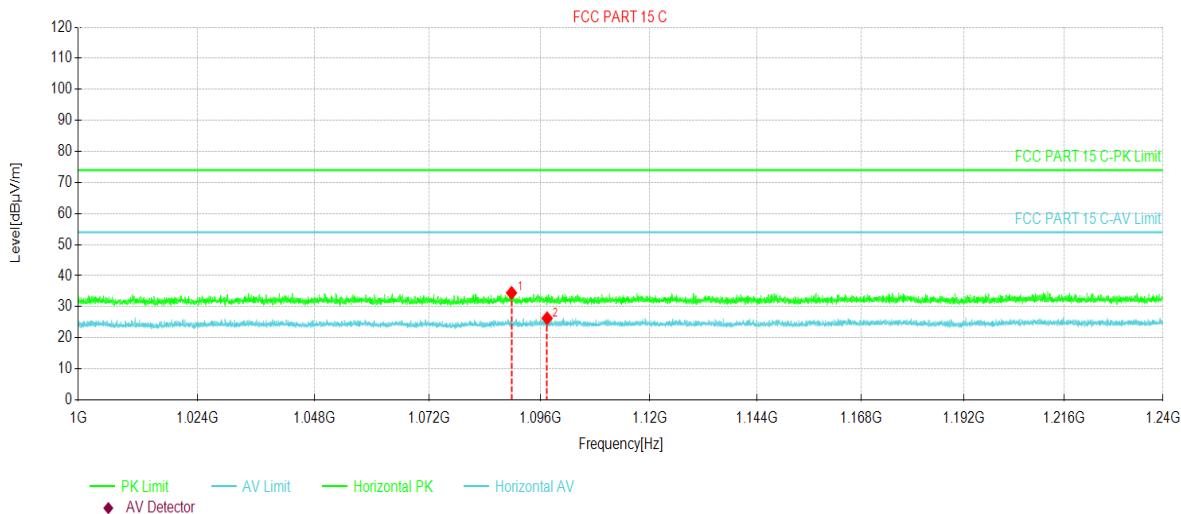

| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------|----------------|-------------|----------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dBμV/m] | Level [dBμV/m] | Factor [dB] | Limit [dBμV/m] | Margin [dB] | Trace | Polarity |
| 1 | 1089.73 | 58.41 | 34.46 | -23.95 | 74.00 | 39.54 | PK | Horizontal |
| 2 | 1097.44 | 50.21 | 26.28 | -23.93 | 54.00 | 27.72 | AV | Horizontal |


Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

6.6.4 Emissions in Non-restricted Frequency Bands

Below 1GHz:

| | | | |
|------------------------|----------------|-----------------------|-----------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Vertical |
| Test Voltage: | DC 12.0V | | |

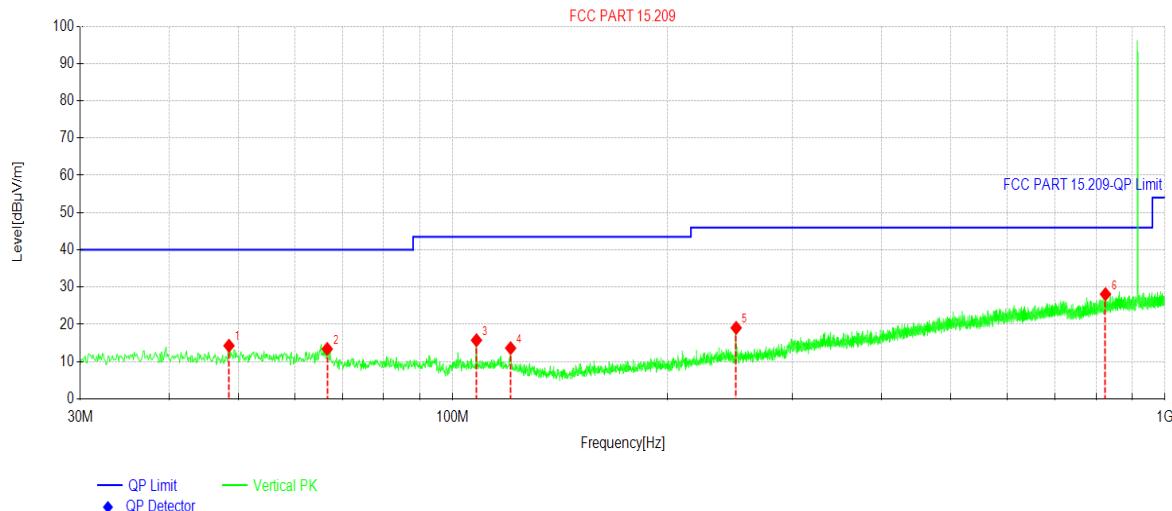


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------------|----------------------|-------------|----------------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dB μ V/m] | Level [dB μ V/m] | Factor [dB] | Limit [dB μ V/m] | Margin [dB] | Trace | Polarity |
| 1 | 48.5289 | 29.08 | 14.27 | -14.81 | 40.00 | 25.73 | PK | Vertical |
| 2 | 66.6697 | 29.47 | 13.40 | -16.07 | 40.00 | 26.60 | PK | Vertical |
| 3 | 107.995 | 31.68 | 15.74 | -15.94 | 43.50 | 27.76 | PK | Vertical |
| 4 | 120.607 | 29.73 | 13.62 | -16.11 | 43.50 | 29.88 | PK | Vertical |
| 5 | 250.018 | 32.84 | 19.05 | -13.79 | 46.00 | 26.95 | PK | Vertical |
| 6 | 824.994 | 30.06 | 28.09 | -1.97 | 46.00 | 17.91 | PK | Vertical |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

| | | | |
|------------------------|----------------|-----------------------|------------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Frequency: | 30 MHz ~ 1 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12.0V | | |

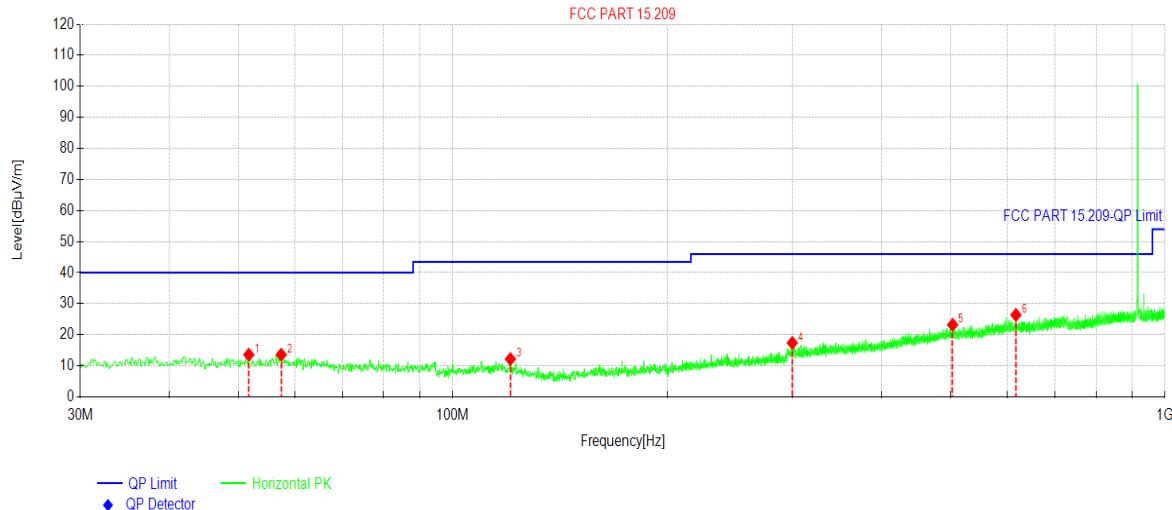


| Suspected Data List | | | | | | | | |
|---------------------|-------------|-----------------------|----------------------|-------------|----------------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading[dB μ V/m] | Level [dB μ V/m] | Factor [dB] | Limit [dB μ V/m] | Margin [dB] | Trace | Polarity |
| 1 | 51.7302 | 28.28 | 13.60 | -14.68 | 40.00 | 26.40 | PK | Horizontal |
| 2 | 57.4537 | 28.40 | 13.59 | -14.81 | 40.00 | 26.41 | PK | Horizontal |
| 3 | 120.510 | 28.29 | 12.19 | -16.10 | 43.50 | 31.31 | PK | Horizontal |
| 4 | 299.784 | 30.09 | 17.38 | -12.71 | 46.00 | 28.62 | PK | Horizontal |
| 5 | 503.310 | 30.15 | 23.22 | -6.93 | 46.00 | 22.78 | PK | Horizontal |
| 6 | 617.587 | 31.74 | 26.40 | -5.34 | 46.00 | 19.60 | PK | Horizontal |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

Above 1GHz:

| | | | |
|-----------------|----------------|----------------|-----------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Frequency: | 1 GHz ~ 10 GHz | Polarization: | Vertical |
| Test Voltage: | DC 12.0V | | |

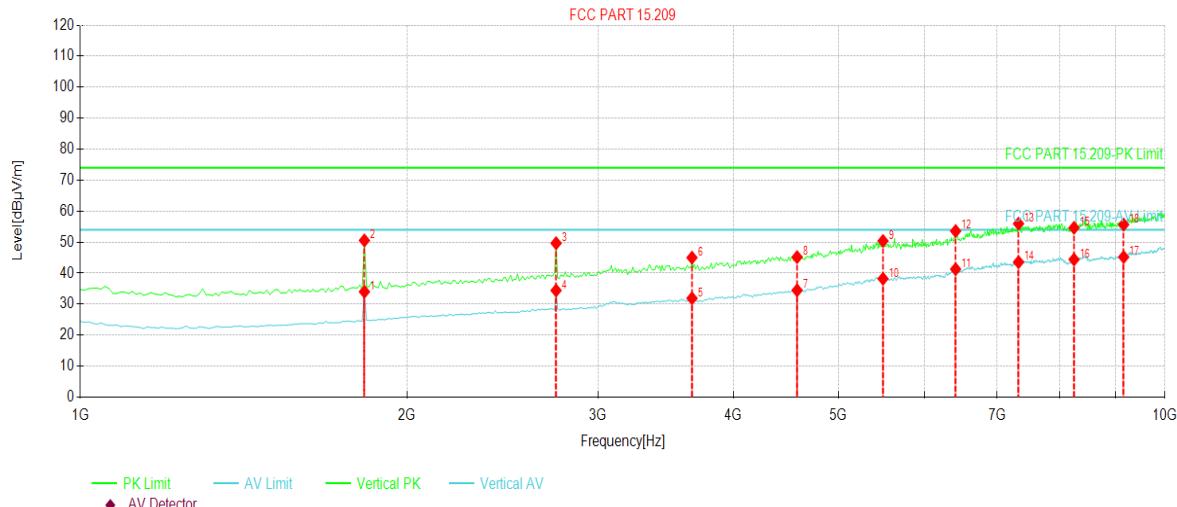


| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------------|----------------------|-------------|----------------------|-------------|-------|----------|
| NO. | Freq. [MHz] | Reading [dB μ V/m] | Level [dB μ V/m] | Factor [dB] | Limit [dB μ V/m] | Margin [dB] | Trace | Polarity |
| 1 | 1828.00 | 55.27 | 34.01 | -21.26 | 54.00 | 19.99 | AV | Vertical |
| 2 | 1828.00 | 71.81 | 50.55 | -21.26 | 74.00 | 23.45 | PK | Vertical |
| 3 | 2746.00 | 67.23 | 49.66 | -17.57 | 74.00 | 24.34 | PK | Vertical |
| 4 | 2746.00 | 51.99 | 34.42 | -17.57 | 54.00 | 19.58 | AV | Vertical |
| 5 | 3664.00 | 46.52 | 31.89 | -14.63 | 54.00 | 22.11 | AV | Vertical |
| 6 | 3664.00 | 59.63 | 45.00 | -14.63 | 74.00 | 29.00 | PK | Vertical |
| 7 | 4580.00 | 44.90 | 34.46 | -10.44 | 54.00 | 19.54 | AV | Vertical |
| 8 | 4580.00 | 55.61 | 45.17 | -10.44 | 74.00 | 28.83 | PK | Vertical |
| 9 | 5496.00 | 56.46 | 50.38 | -6.08 | 74.00 | 23.62 | PK | Vertical |
| 10 | 5496.00 | 44.27 | 38.19 | -6.08 | 54.00 | 15.81 | AV | Vertical |
| 11 | 6412.00 | 44.00 | 41.28 | -2.72 | 54.00 | 12.72 | AV | Vertical |
| 12 | 6412.00 | 56.31 | 53.59 | -2.72 | 74.00 | 20.41 | PK | Vertical |
| 13 | 7328.00 | 55.85 | 55.95 | 0.10 | 74.00 | 18.05 | PK | Vertical |
| 14 | 7328.00 | 43.46 | 43.56 | 0.10 | 54.00 | 10.44 | AV | Vertical |
| 15 | 8244.00 | 53.43 | 54.63 | 1.20 | 74.00 | 19.37 | PK | Vertical |
| 16 | 8244.00 | 43.22 | 44.42 | 1.20 | 54.00 | 9.58 | AV | Vertical |
| 17 | 9160.00 | 42.94 | 45.20 | 2.26 | 54.00 | 8.80 | AV | Vertical |
| 18 | 9160.00 | 53.39 | 55.65 | 2.26 | 74.00 | 18.35 | PK | Vertical |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

| | | | |
|-----------------|----------------|----------------|------------|
| Product Name: | CAR ALARM | Product Model: | 4180069TI |
| Test By: | Mike | Test mode: | Tx mode |
| Test Frequency: | 1 GHz ~ 10 GHz | Polarization: | Horizontal |
| Test Voltage: | DC 12.0V | | |

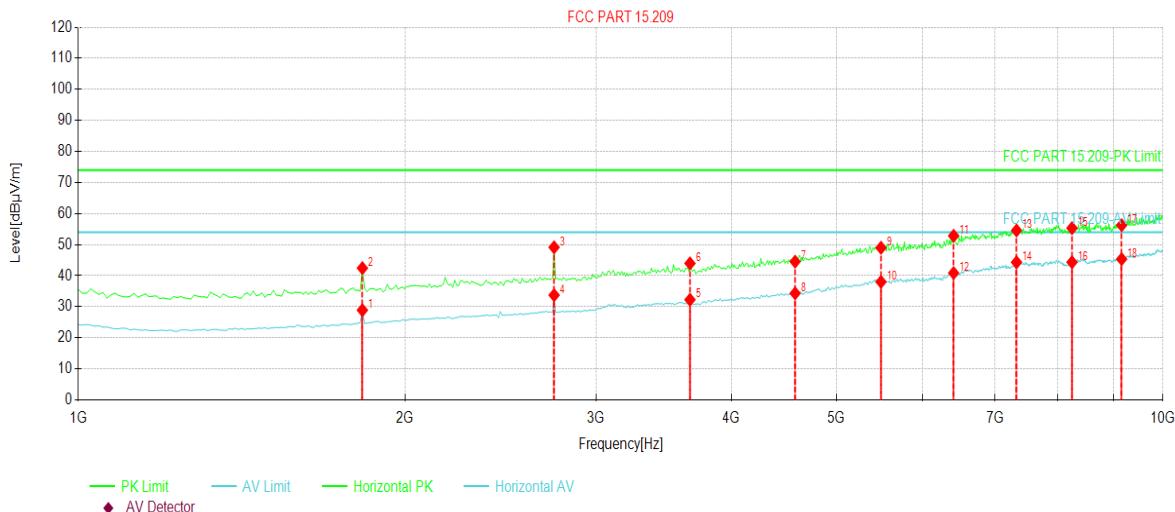

| Suspected Data List | | | | | | | | |
|---------------------|-------------|------------------------|----------------------|-------------|----------------------|-------------|-------|------------|
| NO. | Freq. [MHz] | Reading [dB μ V/m] | Level [dB μ V/m] | Factor [dB] | Limit [dB μ V/m] | Margin [dB] | Trace | Polarity |
| 1 | 1828.00 | 50.15 | 28.89 | -21.26 | 54.00 | 25.11 | AV | Horizontal |
| 2 | 1828.00 | 63.70 | 42.44 | -21.26 | 74.00 | 31.56 | PK | Horizontal |
| 3 | 2746.00 | 66.70 | 49.13 | -17.57 | 74.00 | 24.87 | PK | Horizontal |
| 4 | 2746.00 | 51.30 | 33.73 | -17.57 | 54.00 | 20.27 | AV | Horizontal |
| 5 | 3664.00 | 46.88 | 32.25 | -14.63 | 54.00 | 21.75 | AV | Horizontal |
| 6 | 3664.00 | 58.60 | 43.97 | -14.63 | 74.00 | 30.03 | PK | Horizontal |
| 7 | 4580.00 | 54.97 | 44.53 | -10.44 | 74.00 | 29.47 | PK | Horizontal |
| 8 | 4580.00 | 44.76 | 34.32 | -10.44 | 54.00 | 19.68 | AV | Horizontal |
| 9 | 5496.00 | 55.07 | 48.99 | -6.08 | 74.00 | 25.01 | PK | Horizontal |
| 10 | 5496.00 | 44.09 | 38.01 | -6.08 | 54.00 | 15.99 | AV | Horizontal |
| 11 | 6412.00 | 55.55 | 52.83 | -2.72 | 74.00 | 21.17 | PK | Horizontal |
| 12 | 6412.00 | 43.58 | 40.86 | -2.72 | 54.00 | 13.14 | AV | Horizontal |
| 13 | 7328.00 | 54.46 | 54.56 | 0.10 | 74.00 | 19.44 | PK | Horizontal |
| 14 | 7328.00 | 44.21 | 44.31 | 0.10 | 54.00 | 9.69 | AV | Horizontal |
| 15 | 8244.00 | 54.11 | 55.31 | 1.20 | 74.00 | 18.69 | PK | Horizontal |
| 16 | 8244.00 | 43.13 | 44.33 | 1.20 | 54.00 | 9.67 | AV | Horizontal |
| 17 | 9160.00 | 54.00 | 56.26 | 2.26 | 74.00 | 17.74 | PK | Horizontal |
| 18 | 9160.00 | 43.08 | 45.34 | 2.26 | 54.00 | 8.66 | AV | Horizontal |

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

-----End of report-----