

FCC CERTIFICATION
On Behalf of
Teleway Industrial Ltd.

Full FM Transmitter w/LCD
Model No.: TMP3FT-FS(JA-CK703)

FCC ID: TM4TMP3FT-FS

Prepared for : Teleway Industrial Ltd.
Address : 5/F., Block 40, Ma Jia Long Industrial Area, Nanshan
District, Shenzhen, 518052, Guangdong Province, China
Prepared by : Accurate Technology Co., Ltd.
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20072199
Date of Test : September 07, 2007
Date of Report : September 12, 2007

TABLE OF CONTENTS

| Description | Page |
|---|-----------|
| Test Report Certification | |
| 1. GENERAL INFORMATION | 4 |
| 1.1. Description of Device (EUT)..... | 4 |
| 1.2. Description of Test Facility | 4 |
| 1.3. Measurement Uncertainty | 4 |
| 2. MEASURING DEVICE AND TEST EQUIPMENT | 5 |
| 3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)..... | 6 |
| 3.1. Block Diagram of Test Setup..... | 6 |
| 3.2. The Emission Limit for section 15.239(c) | 6 |
| 3.3. Configuration of EUT on Measurement | 7 |
| 3.4. Operating Condition of EUT | 7 |
| 3.5. Test Procedure | 7 |
| 3.6. The Field Strength of Radiation Emission Measurement Results | 8 |
| 4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B) | 11 |
| 4.1. Block Diagram of Test Setup..... | 11 |
| 4.2. The Emission Limit For Section 15.239(b) | 11 |
| 4.3. EUT Configuration on Measurement | 12 |
| 4.4. Operating Condition of EUT | 12 |
| 4.5. Test Procedure | 12 |
| 4.6. The Emission Measurement Result | 13 |
| 5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A)..... | 16 |
| 5.1. The Requirement For Section 15.239(a)..... | 16 |
| 5.2. EUT Configuration on Measurement | 16 |
| 5.3. Operating Condition of EUT | 16 |
| 5.4. Test Procedure | 16 |
| 5.5. Test Result | 17 |
| 6. TUNING RANGE | 18 |
| 6.1. The Requirement For Section 15.239..... | 18 |
| 6.2. EUT Configuration on Measurement | 18 |
| 6.3. Operating Condition of EUT | 18 |
| 6.4. Test Procedure | 18 |
| 6.5. Test Result | 19 |
| APPENDIX I (TEST CURVES) (9 pages) | |

Test Report Certification

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.239: 2006& ANSI 63.4: 2003

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section15.239 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : September 07, 2007

Prepared by :

sky Wang

(Engineer)

Reviewer :

Seawell

(Quality Manager)

Approved & Authorized Signer :

Martin L.

(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Full FM Transmitter w/LCD
 Model Number : TMP3FT-FS(JA-CK703)
 Power Supply : DC 1.5V (AAA Battery × 1)
 Operate Frequency : 88.1M-107.9MHz
 Channel : 0.1MHz interval
 iPod 20G : Manufacturer: Apple
 M/N: A1136
 S/N: JQ543GF9SZA
 Applicant : Teleway Industrial Ltd.
 Address : 5/F., Block 40, Ma Jia Long Industrial Area, Nanshan
 District, Shenzhen, 518052, Guangdong Province, China
 Manufacturer : Teleway Industrial Ltd.
 Address : 5/F., Block 40, Ma Jia Long Industrial Area, Nanshan
 District, Shenzhen, 518052, Guangdong Province, China
 Date of sample received : September 05, 2007
 Date of Test : September 07, 2007

1.2. Description of Test Facility

EMC Lab : Accredited by TUV Rheinland Shenzhen, May 10, 2004
 Accredited by FCC, May 10, 2004
 The Certificate Registration Number is 253065
 Accredited by Industry Canada, May 18, 2004
 The Certificate Registration Number is IC 5077
 Name of Firm : ACCURATE TECHNOLOGY CO. LTD
 Site Location : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
 Science & Industry Park, Nanshan, Shenzhen, Guangdong
 P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

| Kind of equipment | Manufacturer | Type | S/N | Calibrated until |
|-------------------|---------------|----------|------------|------------------|
| EMI Test Receiver | Rohde&Schwarz | ESCS30 | 100307 | 03.31.2008 |
| EMI Test Receiver | Rohde&Schwarz | ESI26 | 838786/013 | 01.24.2008 |
| Bilog Antenna | Schwarzbeck | VULB9163 | 9163-194 | 03.31.2008 |
| Bilog Antenna | Chase | CBL6112B | 2591 | 03.31.2008 |
| Horn Antenna | Rohde&Schwarz | HF906 | 100013 | 01.24.2008 |
| Spectrum Analyzer | Anritsu | MS2651B | 6200238856 | 03.31.2008 |
| Pre-Amplifier | Agilent | 8447D | 2944A10619 | 03.31.2008 |
| L.I.S.N. | Rohde&Schwarz | ESH3-Z5 | 100305 | 03.31.2008 |
| L.I.S.N. | Rohde&Schwarz | ESH3-Z5 | 100310 | 03.31.2008 |

3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Full FM Transmitter w/LCD)

3.1.2. Anechoic Chamber Test Setup Diagram

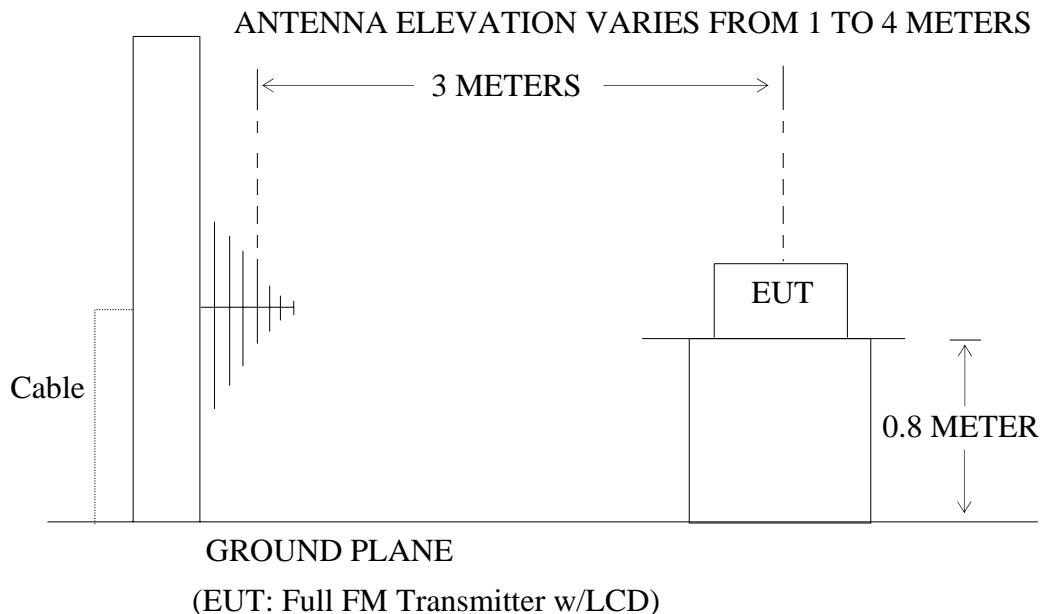

3.2. The Emission Limit for section 15.239(c)

3.2.1 The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in section 15.209

Radiation Emission Measurement Limits According to Section 15.209

| Frequency (MHz) | Limit, | | |
|--------------------|---|---|---|
| | Field Strength of Quasi-peak Value (microvolts/m) | Field Strength of Quasi-peak Value (dB μ V/m) | The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands |
| 30 - 88 | 100 | 40 | |
| 88 - 216 | 150 | 43.5 | |

| | | | |
|-----------|-----|----|---|
| 216 - 960 | 200 | 46 | mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector. |
| Above 960 | 500 | 54 | |

3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1.Full FM Transmitter w/LCD (EUT)

Model Number : TMP3FT-FS(JA-CK703)
 Serial Number : N/A
 Manufacturer : Teleway Industrial Ltd.

3.4.Operating Condition of EUT

3.4.1.Setup the EUT and simulator as shown as Section 3.1.

3.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes [Plug EUT audio input to iPod headphone dock and iPod playing typical audio signal (music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.The frequency range from 30MHz to 1100MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

3.6.The Field Strength of Radiation Emission Measurement Results

PASS.

The frequency range 30MHz to 1000MHz is investigated.

| | | | |
|---------------|---------------------------|----------------|--------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery ×1) |
| Test Mode: | TX 88.1MHz | Test Engineer: | Andy |

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 176.195 | 22.9 | 7.9 | 30.8 | 43.5 | 12.7 |
| Horizontal | 239.991 | 28.4 | 9.8 | 38.2 | 46.0 | 7.8 |
| Horizontal | 265.991 | 27.9 | 10.8 | 38.7 | 46.0 | 7.3 |
| Horizontal | 683.964 | 18.4 | 19.7 | 38.1 | 46.0 | 7.9 |
| Horizontal | 707.961 | 17.2 | 20.1 | 37.3 | 46.0 | 8.7 |
| Vertical | 240.001 | 20.1 | 8.6 | 28.7 | 46.0 | 17.3 |
| Vertical | 264.288 | 18.5 | 10.0 | 28.5 | 46.0 | 17.5 |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

| | | | |
|---------------|---------------------------|----------------|---------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery × 1) |
| Test Mode: | TX 98.1MHz | Test Engineer: | Andy |

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 196.179 | 24.7 | 9.6 | 34.3 | 43.5 | 9.2 |
| Horizontal | 240.004 | 29.0 | 9.8 | 38.8 | 46.0 | 7.2 |
| Horizontal | 683.956 | 19.1 | 19.7 | 38.8 | 46.0 | 7.2 |
| Vertical | 196.201 | 14.8 | 9.0 | 23.8 | 43.5 | 19.7 |
| Vertical | 239.989 | 20.8 | 8.6 | 29.4 | 46.0 | 16.6 |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

| | | | |
|---------------|---------------------------|----------------|--------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery ×1) |
| Test Mode: | TX 107.9MHz | Test Engineer: | Andy |

| Polarization | Frequency (MHz) | Reading(dB μ V/m) QP | Factor Corr.(dB) | Result(dB μ V/m) QP | Limits(dB μ V/m) QP | Margin(dB μ V/m) QP |
|--------------|-----------------|-----------------------------|-------------------|----------------------------|----------------------------|----------------------------|
| Horizontal | 215.794 | 30.6 | 9.7 | 40.3 | 46.0 | 5.7 |
| Horizontal | 240.001 | 28.7 | 9.8 | 38.5 | 46.0 | 7.5 |
| Vertical | 215.796 | 23.1 | 8.8 | 31.9 | 46.0 | 14.1 |
| Vertical | 240.001 | 21.3 | 8.6 | 29.9 | 46.0 | 16.1 |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


Reviewer :

4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

SECTION 15.239(B)


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Full FM Transmitter w/LCD)

4.1.2. Anechoic Chamber Test Setup Diagram

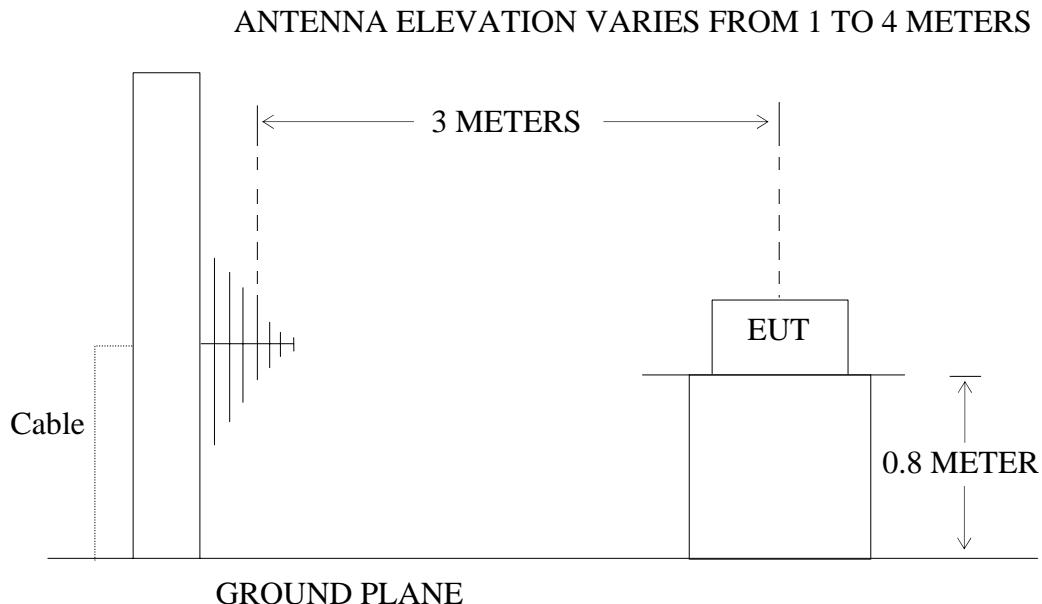

(EUT: Full FM Transmitter w/LCD)

4.2. The Emission Limit For Section 15.239(b)

4.2.1 The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1.Full FM Transmitter w/LCD (EUT)

Model Number : TMP3FT-FS(JA-CK703)
 Serial Number : N/A
 Manufacturer : Teleway Industrial Ltd.

4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes [Plug EUT audio input to iPod headphone dock and iPod playing typical audio signal (music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz.We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

4.6.The Emission Measurement Result

PASS.

| | | | |
|---------------|---------------------------|----------------|--------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery ×1) |
| Test Mode: | TX 88.1MHz | Test Engineer: | Andy |

Fundamental Radiated Emissions

| Frequency (MHz) | Reading(dB μ V/m) | | Factor(dB) Corr. | Result(dB μ V/m) | | Limit(dB μ V/m) | | Margin(dB μ V/m) | | Polarizati on |
|--------------------|-----------------------|------|---------------------|----------------------|------|---------------------|------|----------------------|------|------------------|
| | AV | PEAK | | AV | PEAK | AV | PEAK | AV | PEAK | |
| 88.1 | 30.1 | 33.3 | 6.3 | 36.4 | 39.6 | 48 | 68 | 11.6 | 28.4 | Vertical |
| 88.1 | 34.4 | 37.5 | 8.5 | 42.9 | 46.0 | 48 | 68 | 5.1 | 22.0 | Horizontal |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

$$\text{Where Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

| | | | |
|---------------|---------------------------|----------------|---------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery × 1) |
| Test Mode: | TX 98.1MHz | Test Engineer: | Andy |

Fundamental Radiated Emissions

| Frequency (MHz) | Reading(dB μ V/m) | | Factor(dB) Corr. | Result(dB μ V/m) | | Limit(dB μ V/m) | | Margin(dB μ V/m) | | Polarizati on |
|--------------------|-----------------------|------|---------------------|----------------------|------|---------------------|------|----------------------|------|------------------|
| | AV | PEAK | | AV | PEAK | AV | PEAK | AV | PEAK | |
| 98.1 | 23.3 | 27.0 | 6.7 | 30.0 | 33.7 | 48 | 68 | 18.0 | 34.3 | Vertical |
| 98.1 | 31.9 | 34.5 | 7.4 | 39.3 | 41.9 | 48 | 68 | 8.7 | 26.1 | Horizontal |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

| | | | |
|---------------|---------------------------|----------------|---------------------------|
| Date of Test: | September 07, 2007 | Temperature: | 24°C |
| EUT: | Full FM Transmitter w/LCD | Humidity: | 48% |
| Model No.: | TMP3FT-FS(JA-CK703) | Power Supply: | DC 1.5V (AAA Battery × 1) |
| Test Mode: | TX 107.9MHz | Test Engineer: | Andy |

Fundamental Radiated Emissions

| Frequency (MHz) | Reading(dB μ V/m) | | Factor(dB) Corr. | Result(dB μ V/m) | | Limit(dB μ V/m) | | Margin(dB μ V/m) | | Polarizati on |
|--------------------|-----------------------|------|---------------------|----------------------|------|---------------------|------|----------------------|------|------------------|
| | AV | PEAK | | AV | PEAK | AV | PEAK | AV | PEAK | |
| 107.9 | 22.5 | 26.3 | 7.0 | 29.5 | 33.3 | 48 | 68 | 18.5 | 34.7 | Vertical |
| 107.9 | 28.6 | 32.1 | 7.0 | 35.6 | 39.1 | 48 | 68 | 12.4 | 28.9 | Horizontal |

The spectral diagrams in appendix I display the measurement of peak values with corrected factors counted.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

15.239(A)

5.1. The Requirement For Section 15.239(a)

5.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

5.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.2.1. Full FM Transmitter w/LCD (EUT)

Model Number : TMP3FT-FS(JA-CK703)
 Serial Number : N/A
 Manufacturer : Teleway Industrial Ltd.

5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 4.1.

5.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Plug EUT audio input to iPod headphone dock and iPod playing typical audio signal(music song) with maximum audio level] measure it. The transmit frequency are 88.1-107.9MHz. We are select 88.1M, 98.1M, 107.9MHz TX frequency to transmitted.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

5.4. Test Procedure

- 5.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 5.4.2. Set EUT as normal operation. Playing MP3.(the volume control of iPod was set to maximum.)
- 5.4.3. Set EMI test receiver Center Frequency = fundamental frequency, RBW= 3kHz, VBW= 10kHz, Span=500kHz.
- 5.4.4. Set EMI test receiver Max hold. Mark peak, -26dB.

5.5. Test Result

The EUT does meet the FCC requirement.

Input signal : play typical audio signal(music song)
FM 88.1MHz
-26dB bandwidth = 134.0kHz

FM 98.1 MHz
-26dB bandwidth = 140.0kHz

FM 107.9 MHz
-26dB bandwidth = 160.0kHz

6. TUNING RANGE

6.1. The Requirement For Section 15.239

88-108MHz

6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.2.1. Full FM Transmitter w/LCD (EUT)

Model Number : TMP3FT-FS(JA-CK703)
 Serial Number : N/A
 Manufacturer : Teleway Industrial Ltd.

6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes

6.4. Test Procedure

- 6.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 6.4.2. Set the EUT working on the working frequency.
- 6.4.3. Set EMI test receiver center frequency = working frequency, RBW=3kHz, VBW= 10kHz, Span=300kHz.
- 6.4.4. Measuring the working frequency.
- 6.4.5. The working frequency should be inside 88-108MHz.


6.5. Test Result

The EUT does meet the FCC requirement.

| | |
|----------------------------|-----------------------------|
| Low Frequency= 88.1010MHz | EUT screen display 88.1MHz |
| Mid Frequency= 98.1010MHz | EUT screen display 98.1MHz |
| High Frequency=107.9010MHz | EUT screen display 107.9MHz |

The working frequency range is from 88.1 to 107.9MHz.

APPENDIX I (Test Curves)

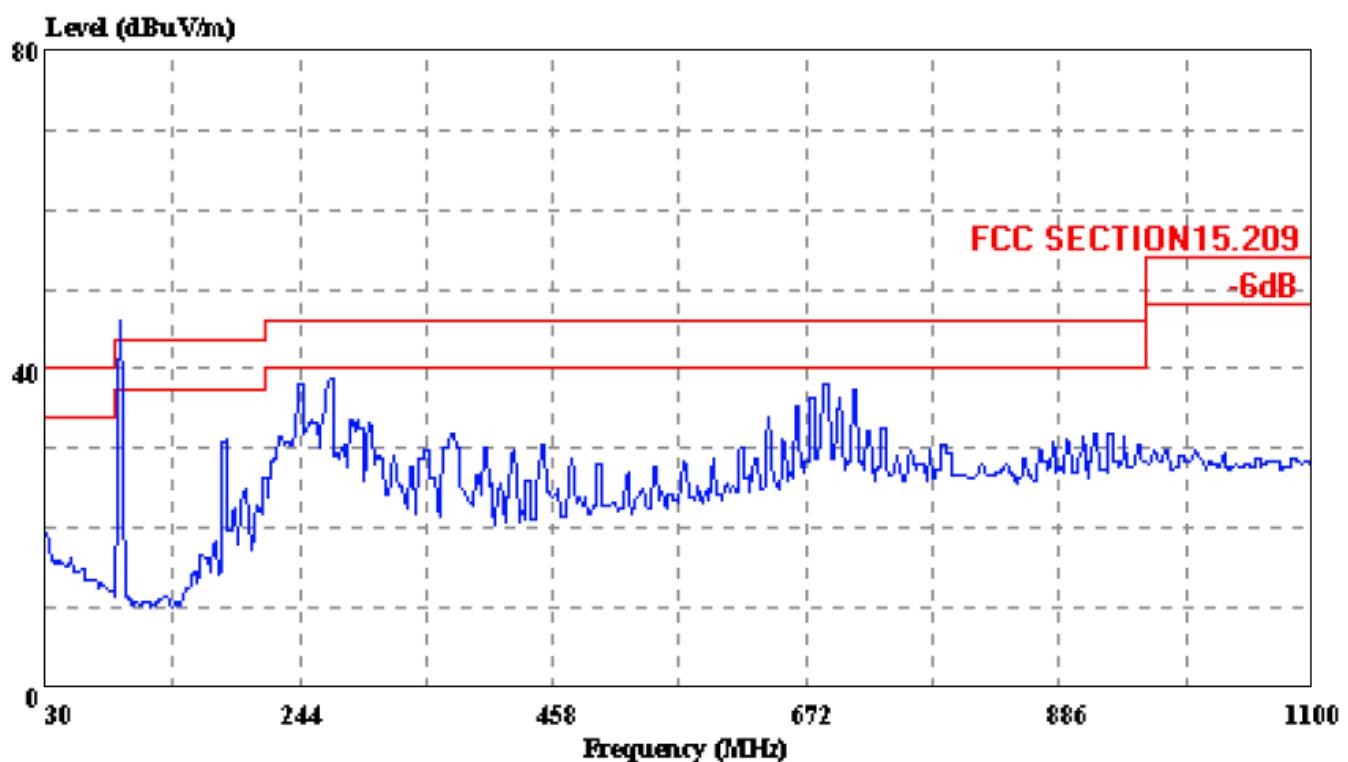


PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 88.1MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N:TMP3FT-FS (JA-CK703)

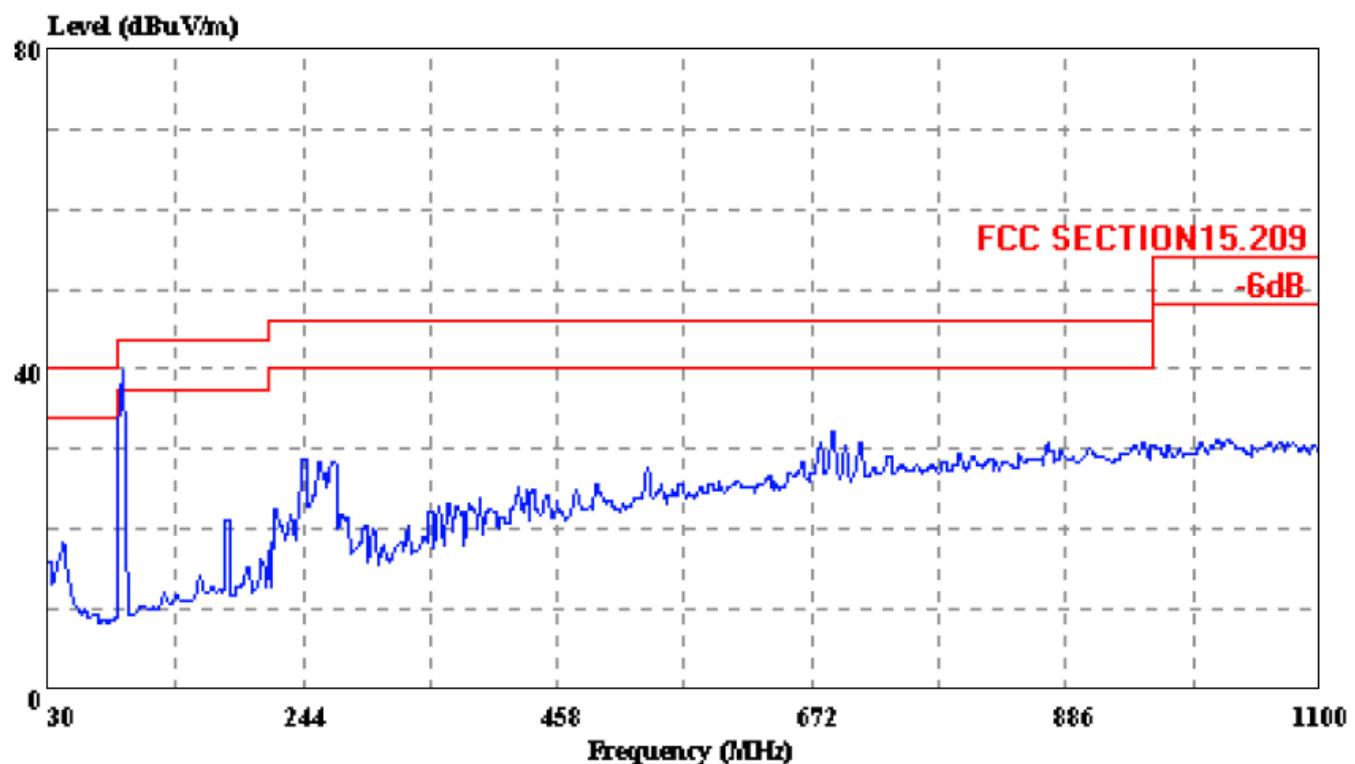


PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 88.1MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N:TMP3FT-FS (JA-CK703)

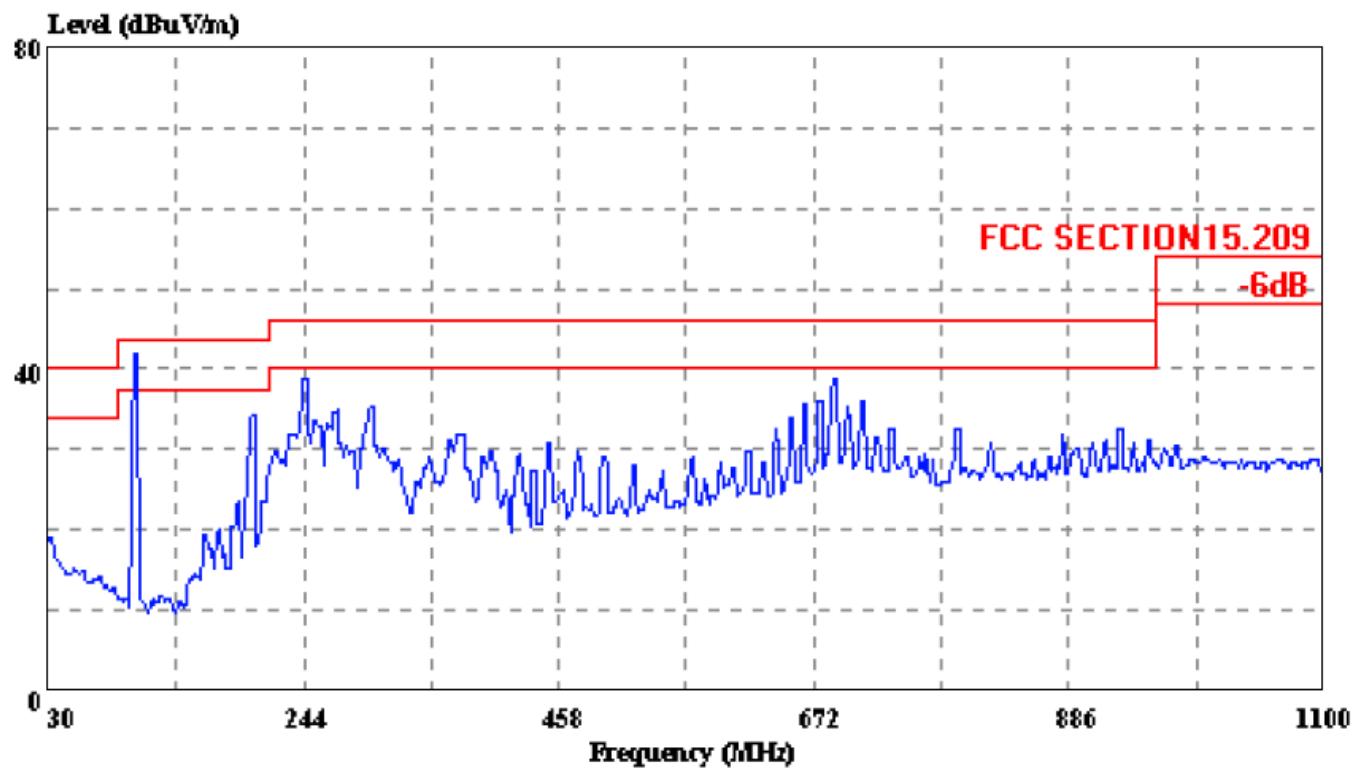


PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 98.1MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N: TMP3FT-FS (JA-CK703)

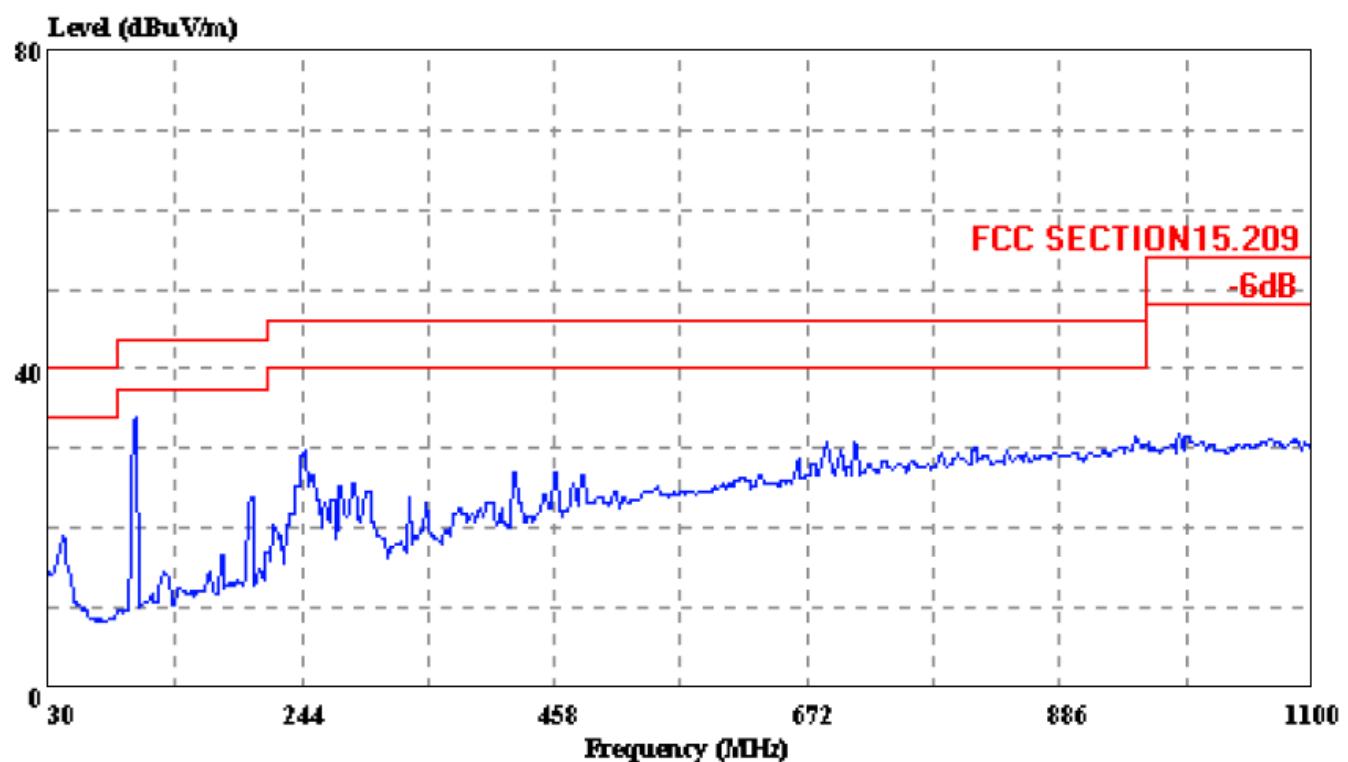


PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 98.1MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N:TMP3FT-FS (JA-CK703)

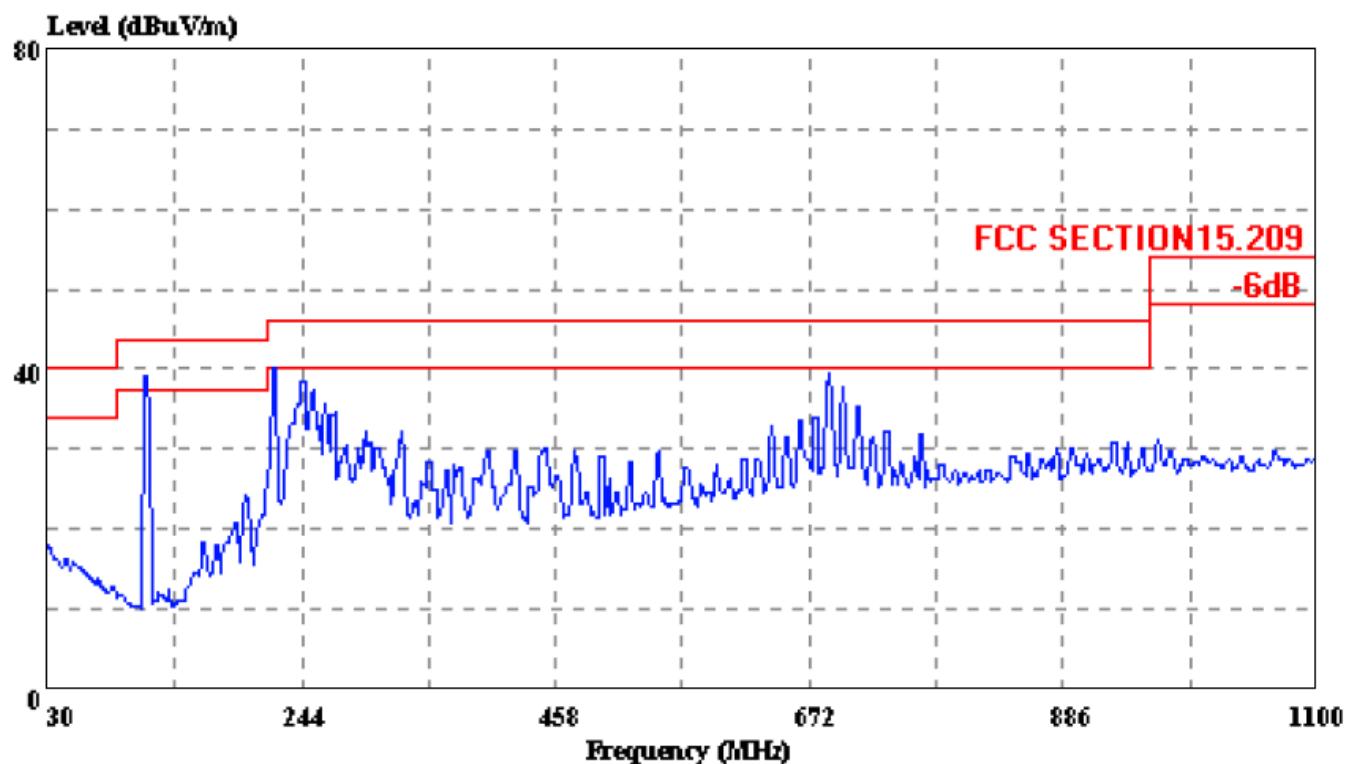


PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 107.9MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N:TMP3FT-FS (JA-CK703)

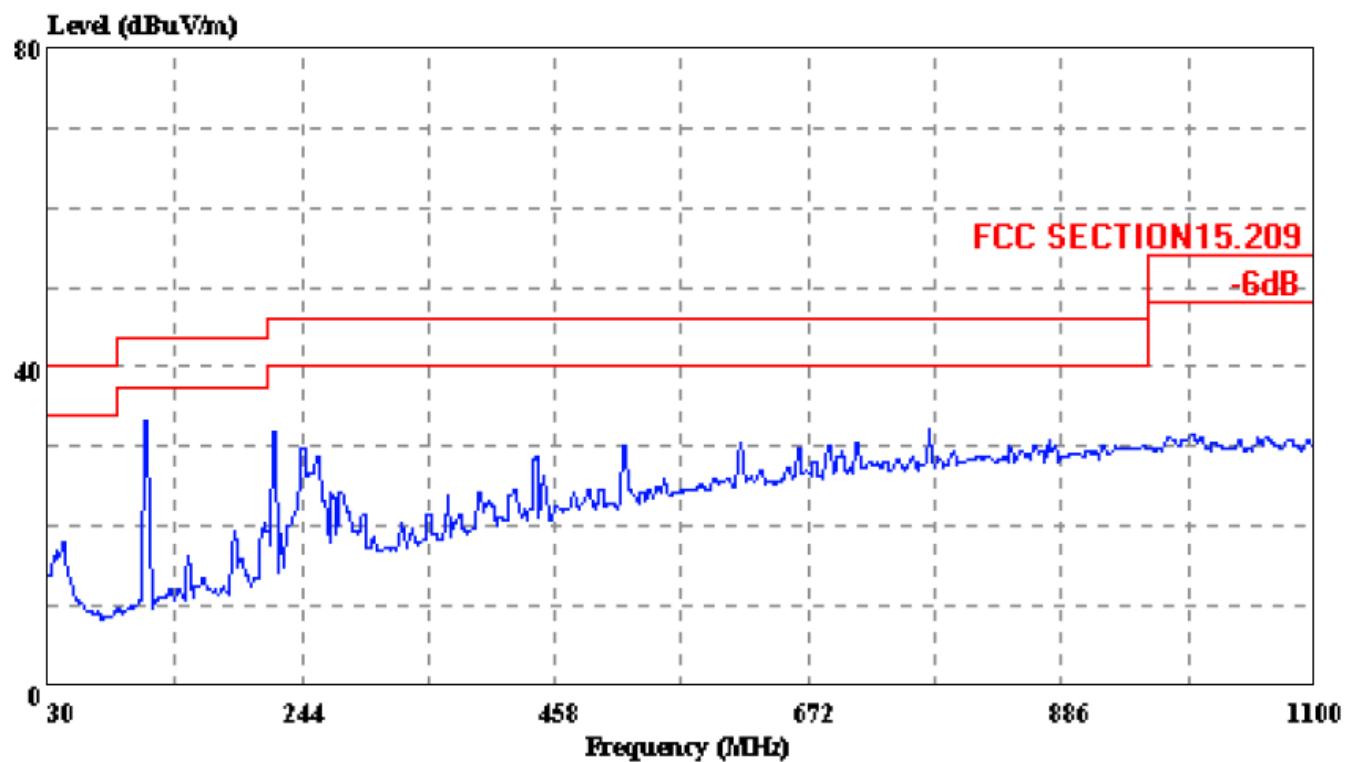

PROVIEW TECHNOLOGY(SHENZHEN)CO.,LTD. (Accurate Technology Co.,Ltd.)

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL
 eut : Full FM Transmitter w/LCD
 power : DC 1.5V
 memo : TX 107.9MHz
 manuf : TELEWAY
 sample no.: 074080
 report no.: ATE20072199
 : M/N:TMP3FT-FS (JA-CK703)

