

Report No.: AAEMT/RF/250131-01-03


FCC RADIO TEST REPORT

Part 15 subpart E

FCC ID: TOR-C400

Report Reference No.....: AAEMT/RF/250131-01-03
Date of issue.....: 2025-05-06
Testing Laboratory.....: AA Electro Magnetic Test Laboratory Private Limited
Address: Plot No 174, Udyog Vihar - Phase 4, Sector 18,
Gurgaon, Haryana, India
*Applicant's name: Arista Networks, Inc.
*Address: 5453 Great America Parkway, Santa Clara, CA 95054 USA
*Manufacturer.....: VVDN Technologies Private Limited
*Address: GIP, Plot No: CP07, Sector 8 IMT Manesar, Gurugram, Haryana
122050
*Test specification:
*Test item description.....: Wireless Access Point
*Trade Mark: **ARISTA**
*Model/Type reference: C-400
Ratings: EUT Input:12.0VDC,2.0A (Powered through Adapter)
Input of Adapter :100~240VAC, 50-60 Hz, 0.7Amax,
Output of Adapter:12.0VDC, 2.0A,24.0W

Prepared By: (+ signature) Ankur Kumar



Reviewed & Approved by: (+ signature)



Dr. Lenin Raja (Authorized Representative) (/ lenin83/)

TABLE OF CONTENTS

1.	Summary of test results.....	5
2.	General test information	6
2.1.	Description of EUT	6
2.2.	Accessories of EUT	8
2.3.	Assistant equipment used for test	8
3.	Equipment's List for All Test Items	9
3.1.	Block diagram of EUT configuration for test.....	11
3.2.	Test environment conditions.....	11
3.3.	Measurement uncertainty.....	11
4.	POWER SPECTRAL DENSITY TEST	12
4.1.	Block diagram of test setup	12
4.2.	Applied procedures / limit	12
4.3.	Test Procedure	12
4.4.	Test Result:.....	13
5.	26 dB & 99% Emission Bandwidth.....	106
5.1.	Block diagram of test setup	106
5.2.	Applied procedures / limit	106
5.3.	Test Procedure	106
5.4.	Test Result	107
6.	MAXIMUM CONDUCTED OUTPUT POWER.....	264
6.1.	Test Result	265
7.	Band Edges Measurement	269
7.1.	Test Result	270
8.	RADIATED EMISSION MEASUREMENT	304
8.1.	Block diagram of test setup	304
8.2.	Limit	306
8.3.	Test Procedure	307
8.4.	Test result(Below 30MHz)	309
9.	Power Line Conducted Emission.....	343
9.1.	Block diagram of test setup	343
9.2.	Power Line Conducted Emission Limits	343
9.3.	Test Procedure	344
9.4.	Test Result	344

Report No.: AAEMT/RF/250131-01-03

10.	Conducted Spurious Emissions	347
11	in-banD Emissions.....	499
11.1	limit	499
11.2	TEST PROCEDURE.....	499
11.3	DEVIATION FROM STANDARD	499
11.4	TEST SETUP	499
11.5	EUT OPERATION CONDITIONS	499
11.6	TEST RESULTS	500
12.	Automatically Discontinue Transmission.....	510
12.1	Limit of Automatically Discontinue Transmission.....	510
12.2	Test Result of Automatically Discontinue Transmission.....	510
13.	Contention Based Protocol	511
13.1	limit	511
13.2	TEST PROCEDURE.....	511
13.3	DEVIATION FROM STANDARD	511
13.4	TEST SETUP	512
14.	Antenna Requirements.....	513
14.1.	Limit	513
14.2.	EUT ANTENNA.....	513

Report No.: AAEMT/RF/250131-01-03

TEST REPORT DECLARE

Applicant	:	Arista Networks, Inc.
Address	:	5453 Great America Parkway, Santa Clara, CA 95054 USA
Equipment under Test	:	Wireless Access Point
Model No	:	C-400
Trade Mark	:	ARISTA
Manufacturer	:	VVDN Technologies Private Limited
Address	:	GIP, Plot No: CP07, Sector 8 IMT Manesar, Gurugram, Haryana 122050

Test Standard Used: FCC Part 15E 15.407

Test procedure used: ANSI C63.10-2020, KDB 789033 D02 General UNII Test Procedures New Rules Compliance Procedures New Rules v02r01 and KDB 987594 D02 UNII 6 GHz EMC Measurement v03.

We Declare:

Disclaimer: The * Information are provided by Manufacturer and it is verified through the Request form and Marking Label, AA Electro Magnetic Test Laboratory is not responsible for the above information accuracy. The equipment described above is tested by AA Electro Magnetic Test Laboratory Private Limited and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and AA Electro Magnetic Test Laboratory Private Limited is assumed of full responsibility for the accuracy and completeness of these tests.

After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.

Report No:	AAEMT/RF/250131-01-03		
Date of Test:	Jan. 31, 2025~ Apr. 03, 2025	Date of Report:	May. 06, 2025

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of AA Electro Magnetic Test Laboratory Private Limited

Report No.: AAEMT/RF/250131-01-03

1. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below.		
FCC Part15 (15.407) , Subpart E		
Description of Test Item	Standard	Results
AC Power Line Conducted Emissions	FCC 15.207, FCC §15.407(b)	PASS
Spurious Radiated Emissions	FCC §15.209(a), 15.407(b)	PASS
26 dB and 99% Emission Bandwidth	FCC §15.407(a), ANSI C63.10 Section 6.9.3	PASS
Maximum Conducted Output Power	FCC §407(a)	PASS
Band Edges	FCC §2.1051, §15.407(b)	PASS
Power Spectral Density	FCC §15.407(a)	PASS
Spurious Emissions at Antenna Terminals	FCC §2.1051, §15.407(b)	PASS
In-Band Emission(Mask)	15.407(b)	PASS
Automatically Discontinue Transmission	15.407(c)	PASS
Contention Based Protocol	15.407(d)	PASS
Antenna Requirement	FCC §15.203	PASS

2. GENERAL TEST INFORMATION

2.1. DESCRIPTION OF EUT

EUT Name	:	Wireless Access Point	
Model Number	:	C-400	
Power supply	:	EUT Input:12.0VDC,2.0A (Powered through Adapter) Input of Adapter :100~240VAC, 50-60 Hz, 0.7Amax, Output of Adapter:12.0VDC, 2.0A,24.0W	
Operation frequency	:	WiFi: 802.11ax (HE20)/be (EHT20): 5935MHz~7115MHz; 802.11ax (HE40)/be (EHT40): 5965MHz~7085MHz; 802.11ax (HE80)/be (EHT80): 5985MHz~7025MHz; 802.11ax (HE160)/be (EHT160): 6025MHz~6985MHz 802.11be (EHT320): 6105MHz~6905MHz	
Modulation	:	802.11ax/be: BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM	
Data Rate	:	802.11ax(HE20/40/80/160)/ be(EHT20/40/80/160/320): MCS0-MCS11	
Antenna Type	:	PCB Antenna	
Antenna gain	:	5.5 dBi	
Antenna Function Description	:	802.11ax/be20 802.11ax/be40 802.11ax/be80 802.11ax160/be160 802.11be320	ANT0, ANT1
H/W No.	:	Rev B1	
S/W No.	:	1.0.0.4	
Battery	:	N/A	
Date of Receipt	:	Jan. 31, 2025	
Condition of Sample on receipt	:	Good	
Note:	:	1 .For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2. Antenna gain and antenna type provided by manufacturer.	
Opinions and Interpretations:	:	See the specific Note / Annexure if any in the whole /full report /NA	

Channel List

ax HE20 / be EHT20							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
2	5935	57	6235	117	6535	177	6835
1	5955	61	6255	121	6555	181	6855
5	5975	65	6275	125	6575	185	6875
9	5995	69	6295	129	6595	189	6895
13	6015	73	6315	133	6615	193	6915
17	6035	77	6335	137	6635	197	6935
21	6055	81	6355	141	6655	201	6955
25	6075	85	6375	145	6675	205	6975
29	6095	89	6395	149	6695	209	6995
33	6115	93	6415	153	6715	213	7015
37	6135	97	6435	157	6735	217	7035
41	6155	101	6455	161	6755	221	7055
45	6175	105	6475	165	6775	225	7075
49	6195	109	6495	169	6795	229	7095
53	6215	113	6515	173	6815	233	7115

ax HE40 / be EHT40							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	5965	67	6285	131	6605	195	6925
11	6005	75	6325	139	6645	203	6965
19	6045	83	6365	147	6685	211	7005
27	6085	91	6405	155	6725	219	7045
35	6125	99	6445	163	6765	227	7085
43	6165	107	6485	171	6805	---	---
51	6205	115	6525	179	6845	---	---
59	6245	123	6565	187	6885	---	---

ax HE80 / be EHT80							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
7	5985	71	6305	135	6625	199	6945
23	6065	87	6385	151	6705	215	7025
39	6145	103	6465	167	6785	---	---
55	6225	119	6545	183	6865	---	---

ax HE160 / be EHT160							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
15	6025	79	6345	143	6665	207	6985
47	6185	111	6505	175	6825	---	---

be EHT320							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	---	---
31	6105	95	6425	159	6745	---	---
63	6265	127	6585	191	6905	---	---

2.2. ACCESSORIES OF EUT

Description of Accessories	Shielded Type	Ferrite Core	Length
Adapter	-	-	1m unshielded Cable

2.3. ASSISTANT EQUIPMENT USED FOR TEST

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN
Laptop	DELL	Latitude 3490	-	5M2Z1W2


3. EQUIPMENT'S LIST FOR ALL TEST ITEMS

No	Test Equipment	Manufacturer	Model No	Serial No	Cal. Date	Cal.Due Date
1	Spectrum Analyser	R&S	FSP	-	2024/01/10	2026/01/10
2	Loop antenna	DAZE Beijing	ZN30900C	18052	2023/09/15	2026/09/15
3	Hi power horn antenna	DAZE Beijing	ZN30700	18012	2023/09/11	2026/09/10
4	MXA Signal Analyzer	KEYSIGHT	N9020A	MY53290443	2023/07/27	2025/07/27
5	Horn antenna	DAZE Beijing	ZN30703	18005	2023/09/11	2026/09/10
6	Pre-Amplifier	KELIANDA	LNA-0009295	-	2024/01/10	2026/01/10
7	Pre-Amplifier	HP	8447FOPTH64	-	2024/01/10	2026/01/10
8	Biconical Antenna	DAZE Beijing	ZN30505C	17038	2023/09/11	2026/09/10
9	EMI- Test RECEIVER	Rohde and Schwarz	ESIB26	509371	2023/06/11	2025/06/10
10	LISN	Kyoritsu	KNW-407	8-1789-5	2024/01/10	2026/01/10
11	Network – LISN	Schwarzbeck	NNBM8125	81251314	2024/01/10	2026/01/10
12	Network – LISN	Schwarzbeck	NNBM8125	81251315	2024/01/10	2026/01/10
13	PULSE LIMITER	Rohde and Schwarz	ESH3-Z2	100681	-	-
14	50Ω Coaxial Switch	DAIWA	1565157	-	-	-
15	50Ω Coaxial Switch	-	-	-	-	-
16	USB RF Power Sensor	DARE!!	RPR3006W	18I00043SN O02	2025/01/13	2026/01/12
17	USB RF Power Sensor	DARE!!	RPR3006W	18I00043SN O04	2025/01/13	2026/01/12
18	Signal Generator	KEYSIGHT	N5181A	512071	2024/01/10	2026/01/10

Report No.: AAEMT/RF/250131-01-03

19	RF Vector Signal Generator	KEYSIGHT	N5182B	512094	2024/01/10	2026/01/10
20	Spectrum analyzer	ROHDE & SCHWARZ	FSV40-N	101385	2023/04/28	2025/04/28
21	Radio Communication Tester	ROHDE & SCHWARZ	CMW 500	124589	2023/09/08	2025/09/08
22	Signal Generator	R&S	SMP 02	837017/004	2023/09/08	2025/09/07
23	DC Regulated Power Supply	Mettravi	RPS-3005	669076	2023/12/12	2025/12/11
24	Climatic Chamber (Environmental Chamber)	SUNRISE SCIENTIFIC INSTRUMENTS	-	-	2024/11/06	2025/11/05
25	Attenuators	HP	8494B	1510A04625	2024/03/21	2026/03/21
26	Attenuators	AGILENT	8495B	MY42140429	2024/03/21	2026/03/21

3.1. BLOCK DIAGRAM OF EUT CONFIGURATION FOR TEST

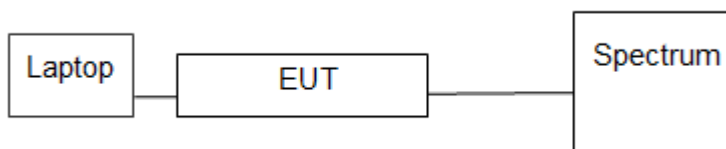

3.2. TEST ENVIRONMENT CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa


3.3. MEASUREMENT UNCERTAINTY

No.	Item	Uncertainty
1	Conducted Emission Test	2.70dB
2	Radiated Emission Test	3.09dB
3	RF power, conducted	2.46dB
4	RF power density, conducted	2.24dB
5	Spurious emissions, conducted	2.71dB
6	All emissions, radiated(<1G)	3.08dB
7	All emissions, radiated(>1G)	3.09dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4. POWER SPECTRAL DENSITY TEST

4.1. BLOCK DIAGRAM OF TEST SETUP

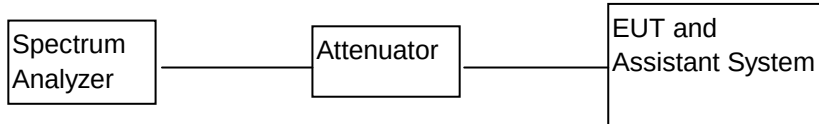

4.2. APPLIED PROCEDURES / LIMIT

According to FCC §15.407

- (4) For a standard power access point and fixed client device operating in the 5.925-6.425 GHz and 6.525-6.875 GHz bands, the maximum power spectral density must not exceed 23 dBm e.i.r.p in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (5) For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm e.i.r.p. in any 1-megahertz band. In addition, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm.

4.3. TEST PROCEDURE

Duty cycle $\geq 98\%$

1. Set RBW=1MHz/VBW=3MHz, Sweep time=auto Detector=RMS
 2. Trace average 100 traces.
 3. Use the peak marker function to determine the maximum amplitude level
 4. EIRPPSD=Measured conducted power density+Antenna gain
- Duty cycle<98%
1. Set RBW=1MHz/VBW=3MHz Detector=RMS
 2. Set sweep time $\geq 10 \times (\text{number of points in sweep}) \times (\text{total on/off period of the transmitted signal})$
 3. Perform a single sweep.
 4. Use the peak marker function to determine the maximum amplitude level
 5. Add $10\log(1/x)$ where x is the duty cycle.
 6. EIRP PSD=Measured conducted power density+Antenna gain.

4.4. TEST RESULT:

Antenna 0:

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH2	5935	0.39	5	Pass
CH45	6175	2.06	5	Pass
CH93	6415	0.56	5	Pass
TX 802.11ax40 Mode				
CH3	5965	-1.71	5	Pass
CH43	6165	-0.34	5	Pass
CH91	6405	-2.26	5	Pass
TX 802.11ax80 Mode				
CH7	5985	-5.31	5	Pass
CH39	6145	-3.77	5	Pass
CH87	6385	-4.85	5	Pass
TX 802.11ax160 Mode				
CH15	6025	-9.34	5	Pass
CH47	6185	-8.59	5	Pass
CH79	6345	-9.24	5	Pass
TX 802.11be20 Mode				
CH2	5935	0.36	5	Pass
CH45	6175	1.94	5	Pass
CH93	6415	0.45	5	Pass
TX 802.11be40 Mode				
CH3	5965	-2.06	5	Pass
CH43	6165	-0.18	5	Pass
CH91	6405	-2.25	5	Pass
TX 802.11be80 Mode				
CH7	5985	-5.32	5	Pass
CH39	6145	-3.88	5	Pass
CH87	6385	-4.85	5	Pass
TX 802.11be160 Mode				
CH15	6025	-9.45	5	Pass

Report No.: AAEMT/RF/250131-01-03

CH47	6185	-8.90	5	Pass
CH79	6345	-9.52	5	Pass
TX 802.11be320 Mode				
CH31	6105	-10.23	5	Pass
CH63	6265	-11.43	5	Pass
CH95	6425	-5.64	5	Pass
CH127	6585	-9.37	5	Pass
CH159	6745	-8.03	5	Pass
CH191	6905	-8.27	5	Pass

Report No.: AAEMT/RF/250131-01-03

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH97	6435	0.23	5	Pass
CH105	6475	0.39	5	Pass
CH113	6515	1.09	5	Pass
TX 802.11ax40 Mode				
CH99	6445	-2.71	5	Pass
CH107	6485	-2.15	5	Pass
CH123	6565	-1.64	5	Pass
TX 802.11ax80 Mode				
CH103	6465	-5.85	5	Pass
TX 802.11be20 Mode				
CH97	6435	-0.04	5	Pass
CH105	6475	0.07	5	Pass
CH113	6515	0.90	5	Pass
TX 802.11be40 Mode				
CH99	6445	-2.62	5	Pass
CH107	6485	-2.46	5	Pass
CH123	6565	-1.80	5	Pass
TX 802.11be80 Mode				
CH103	6465	-5.79	5	Pass

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH117	6535	1.61	5	Pass
CH153	6715	1.52	5	Pass
CH181	6855	-1.28	5	Pass
TX 802.11ax40 Mode				
CH123	6565	-1.64	5	Pass
CH155	6725	-0.92	5	Pass
CH179	6845	-3.85	5	Pass
TX 802.11ax80 Mode				
CH135	6625	-5.77	5	Pass
CH151	6705	-4.13	5	Pass
CH167	6785	-5.34	5	Pass
TX 802.11ax160 Mode				
CH143	6665	-7.90	5	Pass
TX 802.11be20 Mode				
CH117	6535	1.22	5	Pass
CH153	6715	1.71	5	Pass
CH181	6855	-1.15	5	Pass
TX 802.11be40 Mode				
CH123	6565	-1.80	5	Pass
CH155	6725	-0.93	5	Pass
CH179	6845	-3.82	5	Pass
TX 802.11be80 Mode				
CH135	6625	-5.88	5	Pass
CH151	6705	-4.51	5	Pass
CH167	6785	-5.42	5	Pass
TX 802.11be160 Mode				
CH143	6665	-8.23	5	Pass

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH189	6895	-0.12	5	Pass
CH213	7015	-7.15	5	Pass
CH233	7115	-7.66	5	Pass
TX 802.11ax40 Mode				
CH195	6925	-1.67	5	Pass
CH211	7005	2.95	5	Pass
CH227	7085	-11.40	5	Pass
TX 802.11ax80 Mode				
CH199	6945	-4.17	5	Pass
CH215	7025	-0.91	5	Pass
TX 802.11ax160 Mode				
CH207	6985	-4.20	5	Pass
TX 802.11be20 Mode				
CH189	6895	-0.10	5	Pass
CH213	7015	-7.36	5	Pass
CH233	7115	-8.43	5	Pass
TX 802.11be40 Mode				
CH195	6925	-1.45	5	Pass
CH211	7005	2.22	5	Pass
CH227	7085	-11.95	5	Pass
TX 802.11be80 Mode				
CH199	6945	-4.09	5	Pass
CH215	7025	-0.71	5	Pass
TX 802.11be160 Mode				
CH207	6985	-4.11	5	Pass

Antenna 1:

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH2	5935	-0.42	5	Pass
CH45	6175	1.63	5	Pass
CH93	6415	-0.20	5	Pass
TX 802.11ax40 Mode				
CH3	5965	-2.43	5	Pass
CH43	6165	-0.34	5	Pass
CH91	6405	-2.53	5	Pass
TX 802.11ax80 Mode				
CH7	5985	-5.48	5	Pass
CH39	6145	-4.14	5	Pass
CH87	6385	-4.91	5	Pass
TX 802.11ax160 Mode				
CH15	6025	-9.27	5	Pass
CH47	6185	-8.91	5	Pass
CH79	6345	-9.65	5	Pass
TX 802.11be20 Mode				
CH2	5935	-0.16	5	Pass
CH45	6175	1.75	5	Pass
CH93	6415	-0.38	5	Pass
TX 802.11be40 Mode				
CH3	5965	-2.78	5	Pass
CH43	6165	-0.76	5	Pass
CH91	6405	-2.85	5	Pass
TX 802.11be80 Mode				
CH7	5985	-5.90	5	Pass
CH39	6145	-4.55	5	Pass
CH87	6385	-5.53	5	Pass
TX 802.11be160 Mode				
CH15	6025	-9.76	5	Pass
CH47	6185	-9.45	5	Pass

Report No.: AAEMT/RF/250131-01-03

CH79	6345	-9.75	5	Pass
TX 802.11be320 Mode				
CH31	6105	-8.31	5	Pass
CH63	6265	-10.91	5	Pass
CH95	6425	-6.90	5	Pass
CH127	6585	-9.24	5	Pass
CH159	6745	-8.60	5	Pass
CH191	6905	-8.57	5	Pass

Report No.: AAEMT/RF/250131-01-03

CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH97	6435	-0.50	5	Pass
CH105	6475	-0.09	5	Pass
CH113	6515	1.25	5	Pass
TX 802.11ax40 Mode				
CH99	6445	-3.04	5	Pass
CH107	6485	-2.36	5	Pass
CH123	6565	-5.84	5	Pass
TX 802.11ax80 Mode				
CH103	6465	-0.61	5	Pass
TX 802.11be20 Mode				
CH97	6435	-0.16	5	Pass
CH105	6475	1.13	5	Pass
CH113	6515	-3.49	5	Pass
TX 802.11be40 Mode				
CH99	6445	-2.90	5	Pass
CH107	6485	-6.20	5	Pass
CH123	6565	1.45	5	Pass
TX 802.11be80 Mode				
CH103	6465	1.77	5	Pass



CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)		Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode					
CH117	6535	1.45		5	Pass
CH153	6715	1.77		5	Pass
CH181	6855	-1.43		5	Pass
TX 802.11ax40 Mode					
CH123	6565	-1.29		5	Pass
CH155	6725	-0.63		5	Pass
CH179	6845	-3.61		5	Pass
TX 802.11ax80 Mode					
CH135	6625	-5.81		5	Pass
CH151	6705	-4.33		5	Pass
CH167	6785	-4.97		5	Pass
TX 802.11ax160 Mode					
CH143	6665	-8.12		5	Pass
TX 802.11be20 Mode					
CH117	6535	1.44		5	Pass
CH153	6715	1.83		5	Pass
CH181	6855	-1.30		5	Pass
TX 802.11be40 Mode					
CH123	6565	-1.64		5	Pass
CH155	6725	-0.79		5	Pass
CH179	6845	-3.66		5	Pass
TX 802.11be80 Mode					
CH135	6625	-5.87		5	Pass
CH151	6705	-4.27		5	Pass
CH167	6785	-5.08		5	Pass
TX 802.11be160 Mode					
CH143	6665	-8.35		5	Pass



CH. No.	Frequency (MHz)	e.i.r.p. Power spectral density (dBm/MHz)	Limit e.i.r.p. Power spectral density (dBm/MHz)	Result
TX 802.11ax20 Mode				
CH189	6895	-0.41	5	Pass
CH213	7015	-7.52	5	Pass
CH233	7115	-8.44	5	Pass
TX 802.11ax40 Mode				
CH195	6925	-1.69	5	Pass
CH211	7005	2.82	5	Pass
CH227	7085	-11.10	5	Pass
TX 802.11ax80 Mode				
CH199	6945	-4.34	5	Pass
CH215	7025	-1.12	5	Pass
TX 802.11ax160 Mode				
CH207	6985	-3.51	5	Pass
TX 802.11be20 Mode				
CH189	6895	-0.31	5	Pass
CH213	7015	-8.08	5	Pass
CH233	7115	-9.20	5	Pass
TX 802.11be40 Mode				
CH195	6925	-1.89	5	Pass
CH211	7005	2.43	5	Pass
CH227	7085	-11.51	5	Pass
TX 802.11be80 Mode				
CH199	6945	-4.62	5	Pass
CH215	7025	-0.96	5	Pass
TX 802.11be160 Mode				
CH207	6985	-4.09	5	Pass


Test plots as followed

Antenna 0:



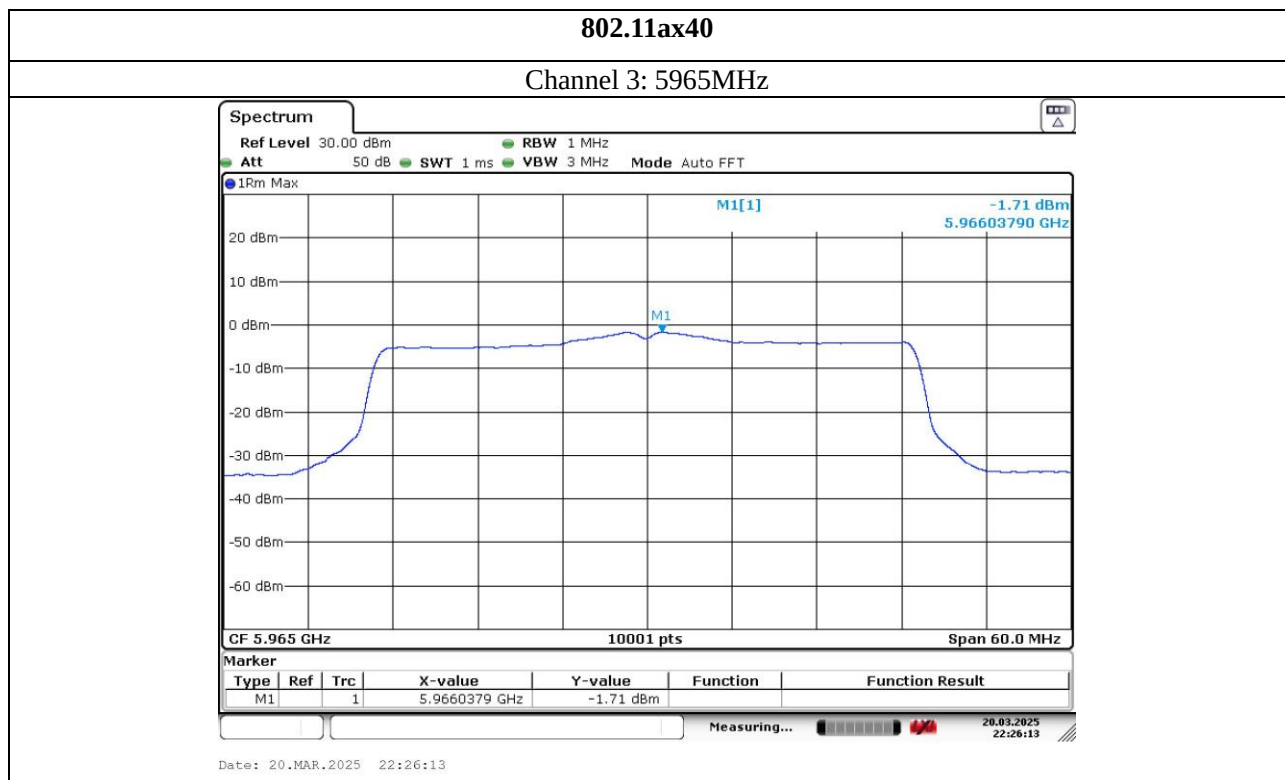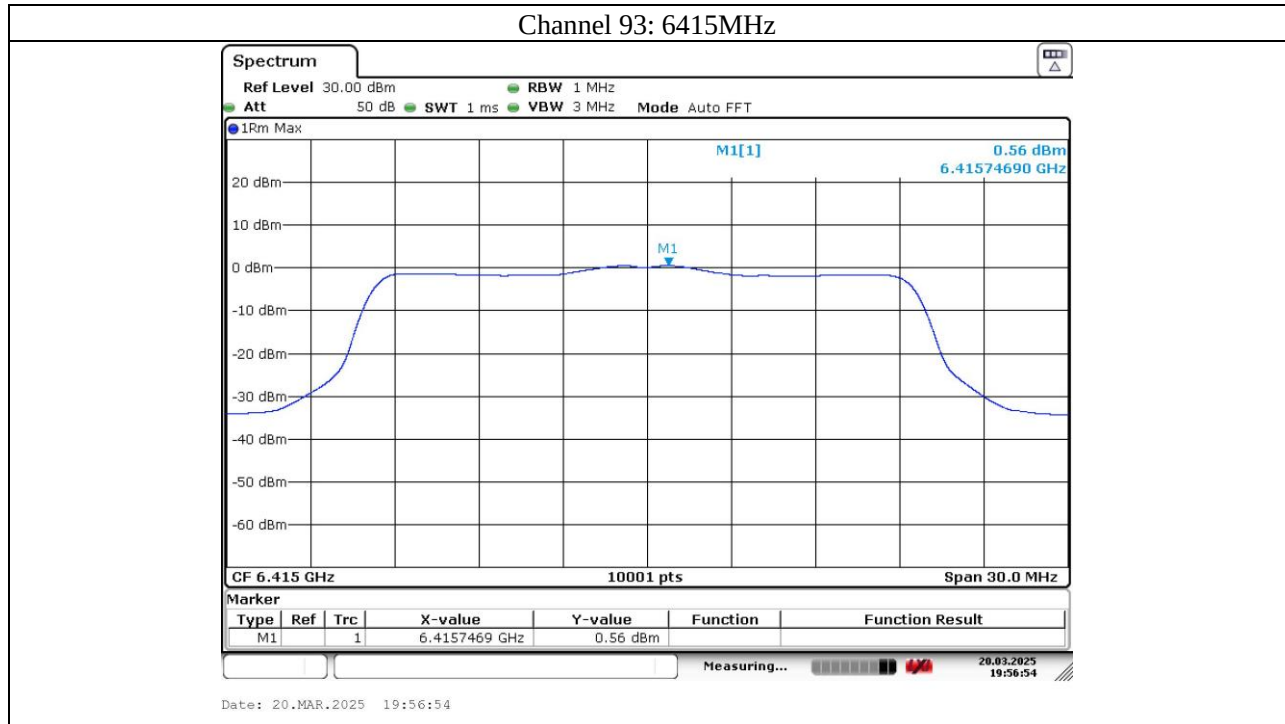


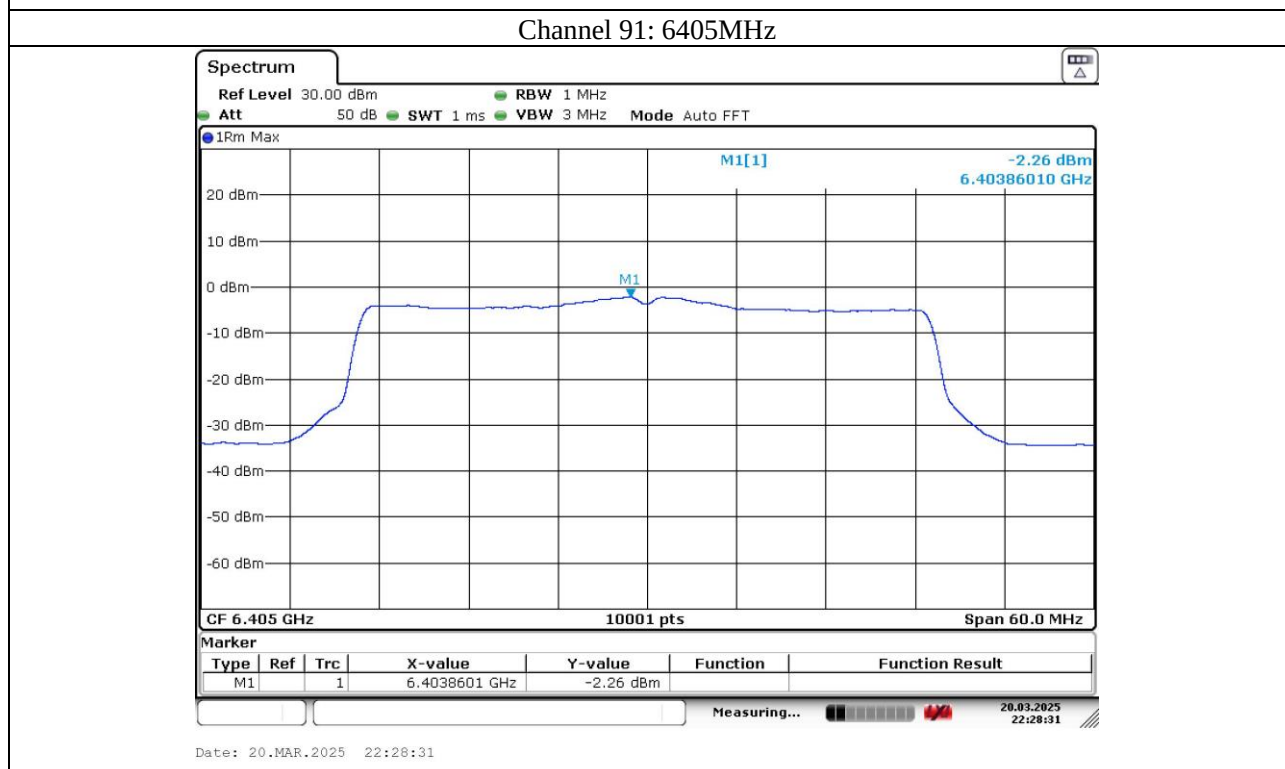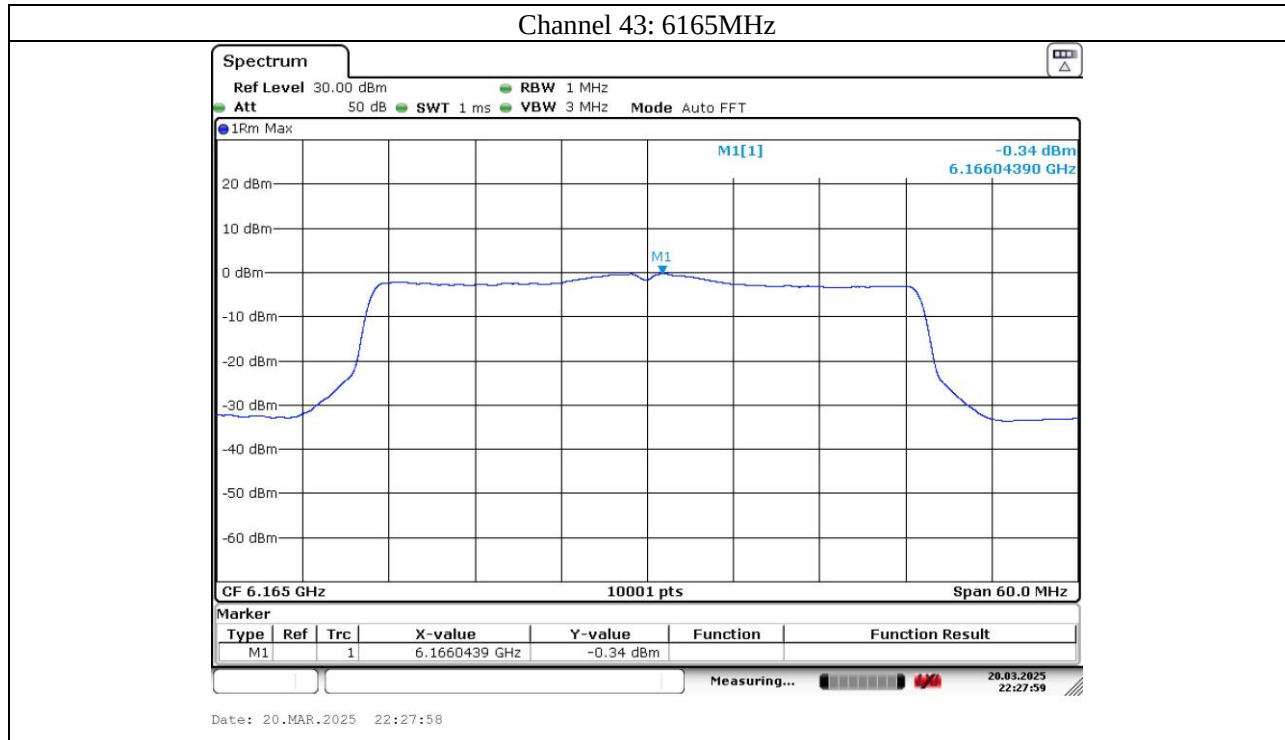

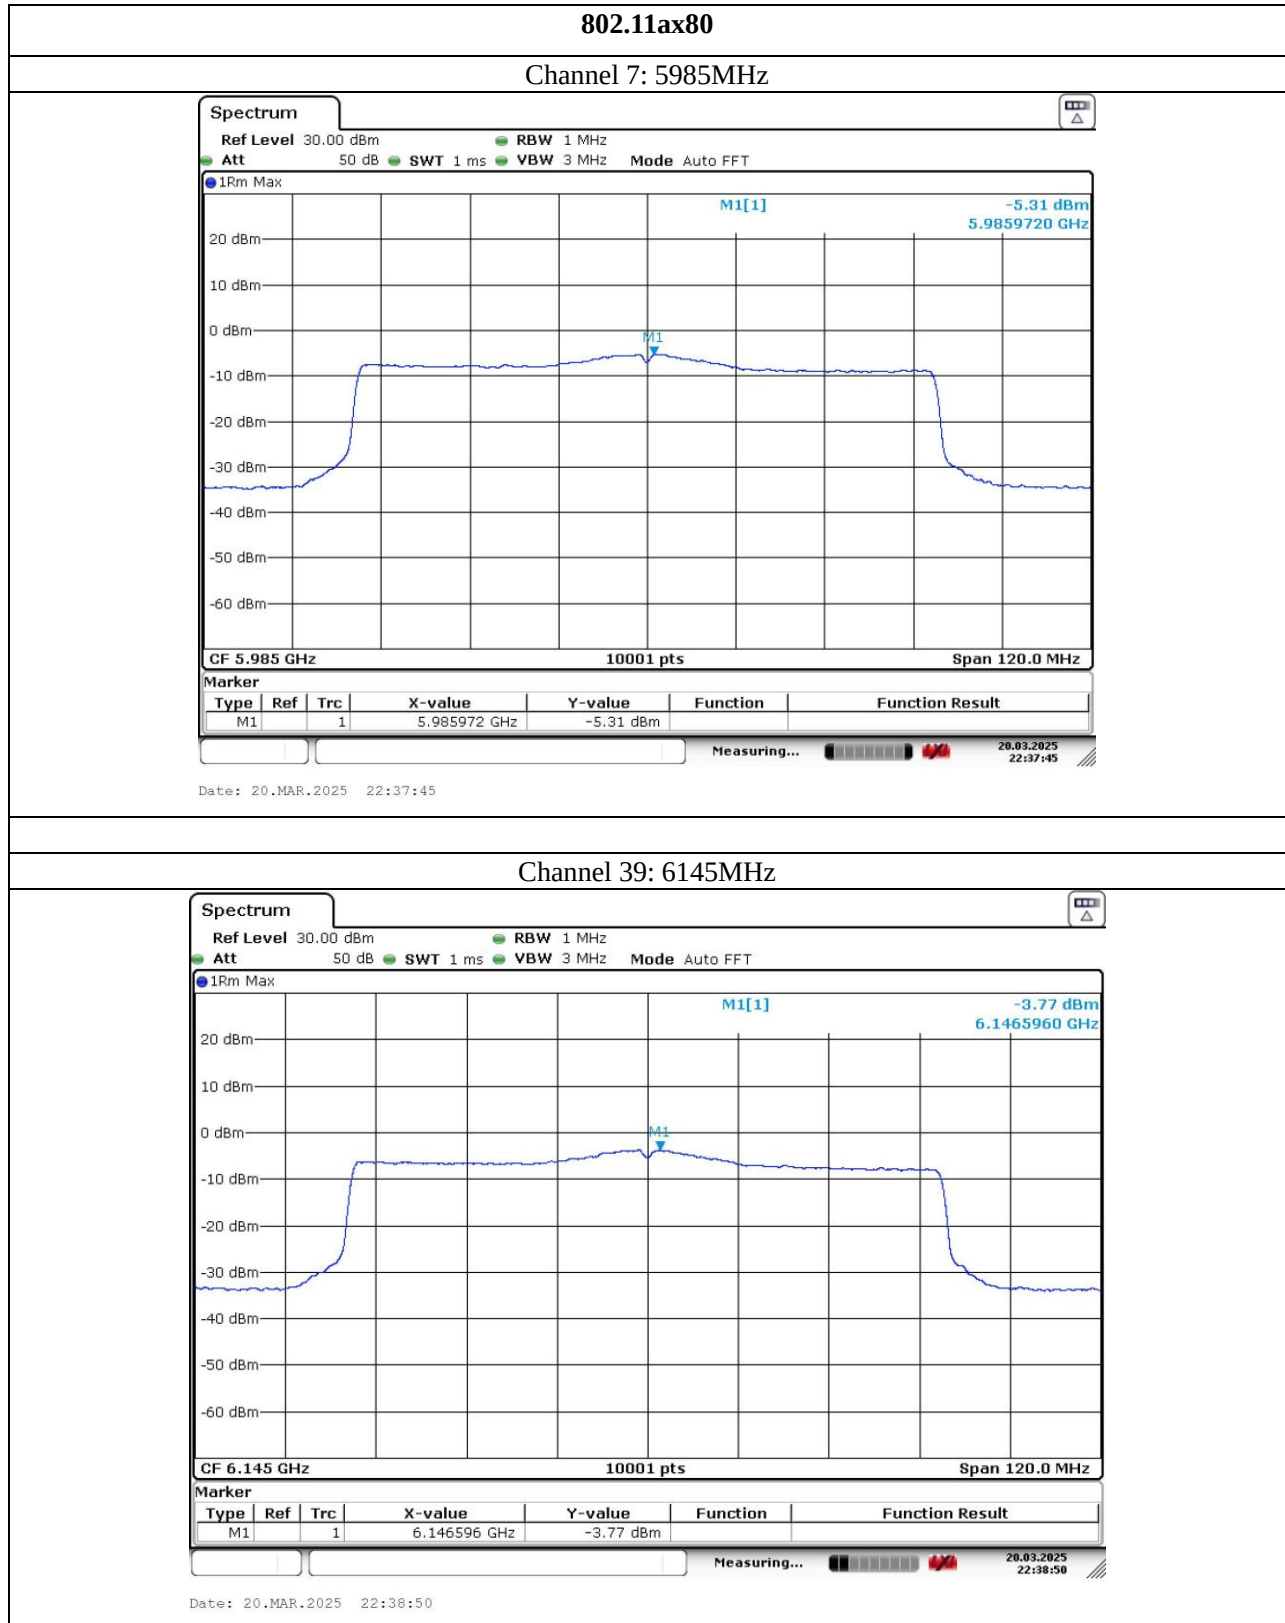


Report No.: AAEMT/RF/250131-01-03



Channel 87: 6385MHz

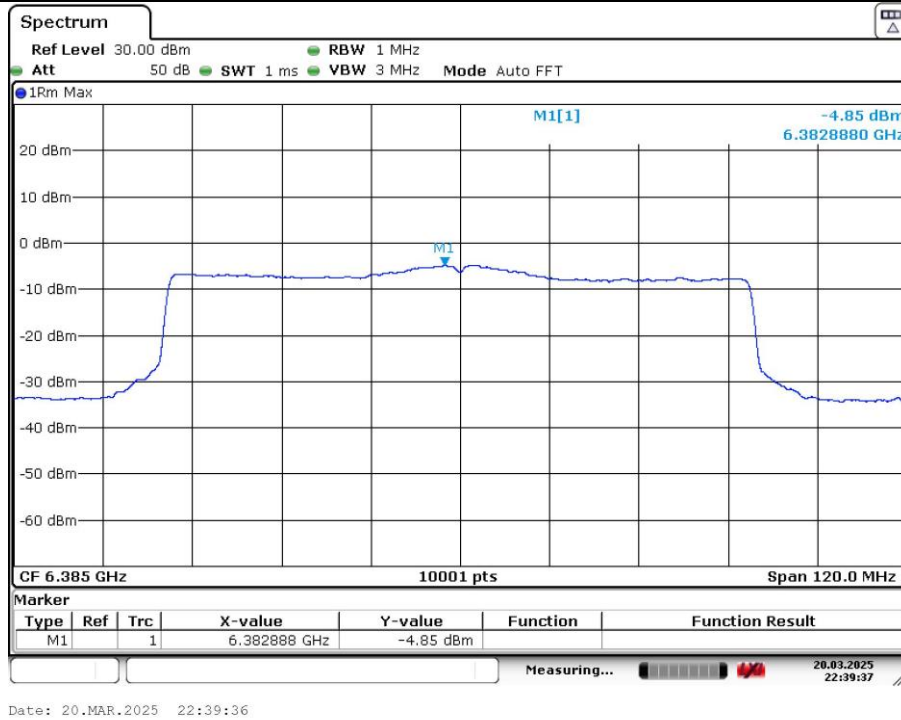




802.11ax160


Channel 15: 6025MHz

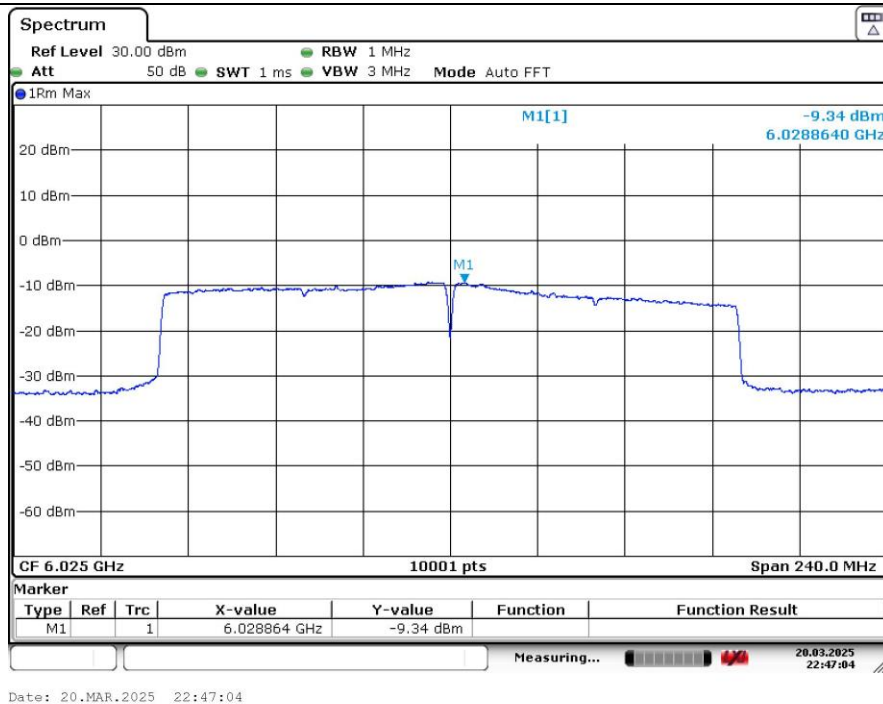


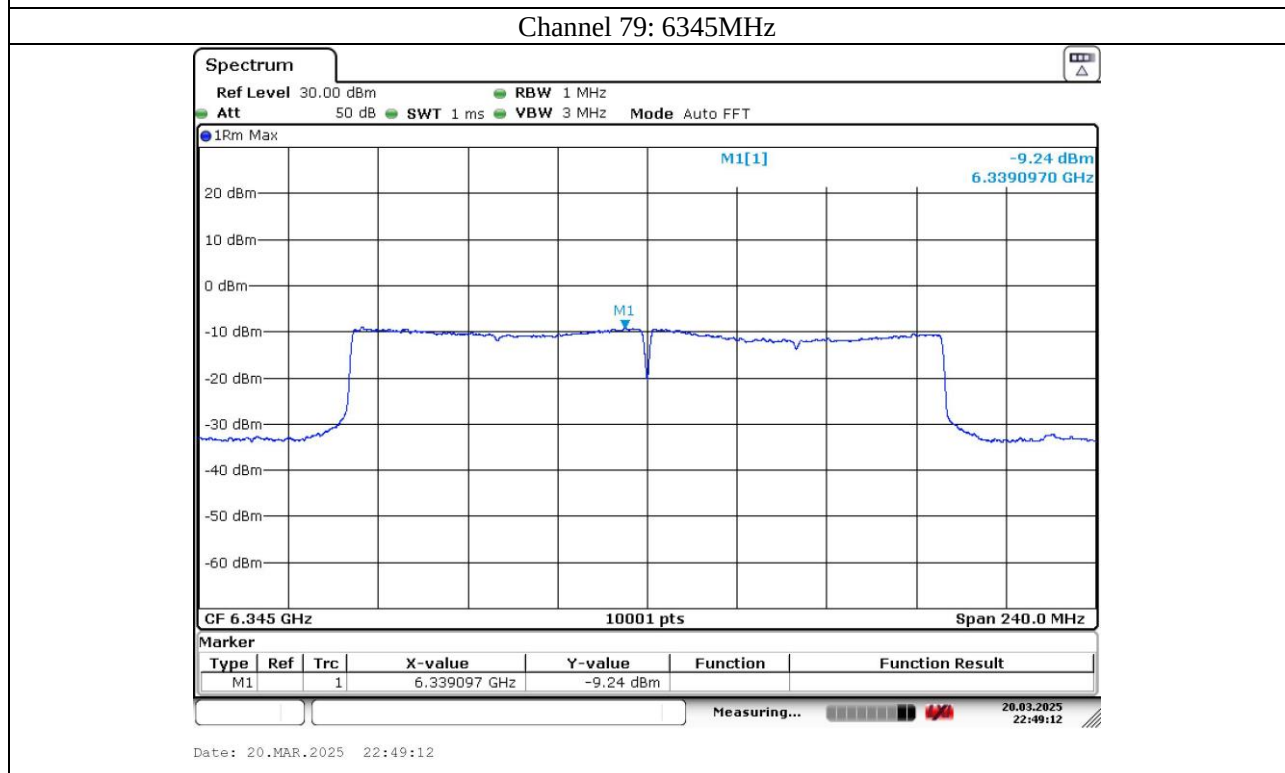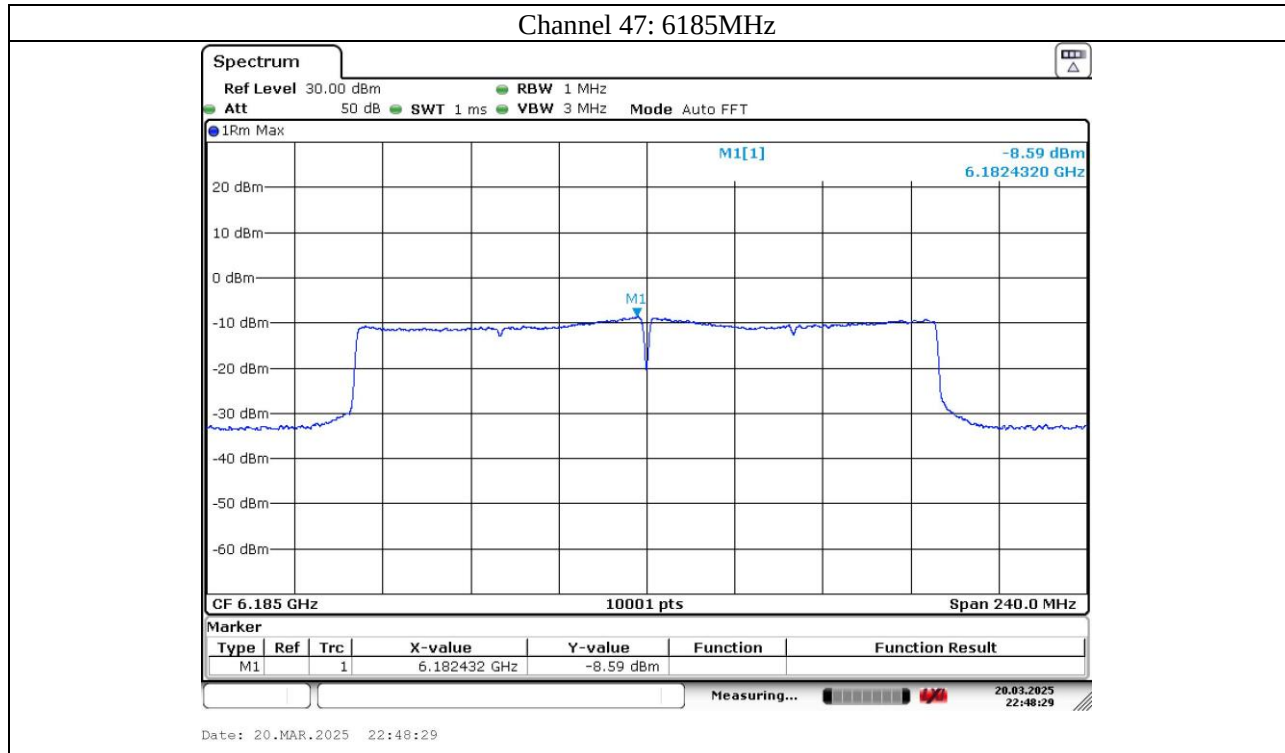


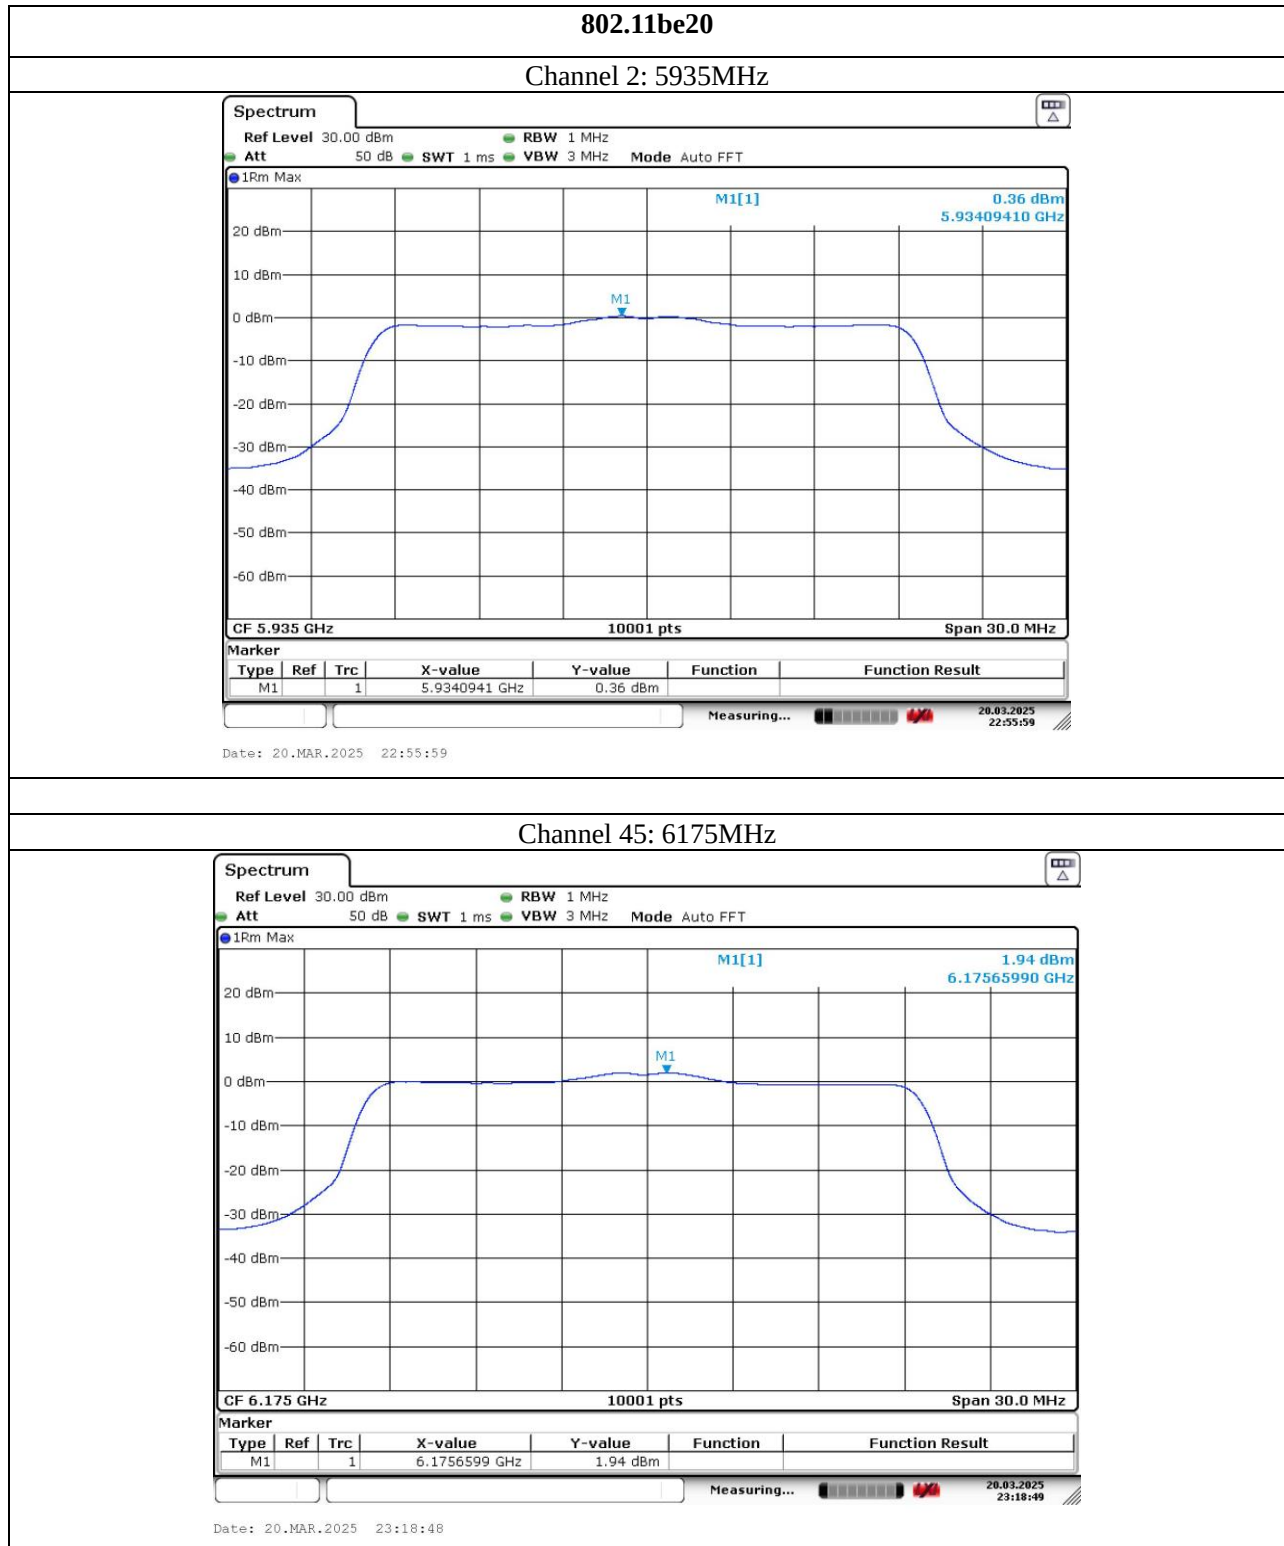

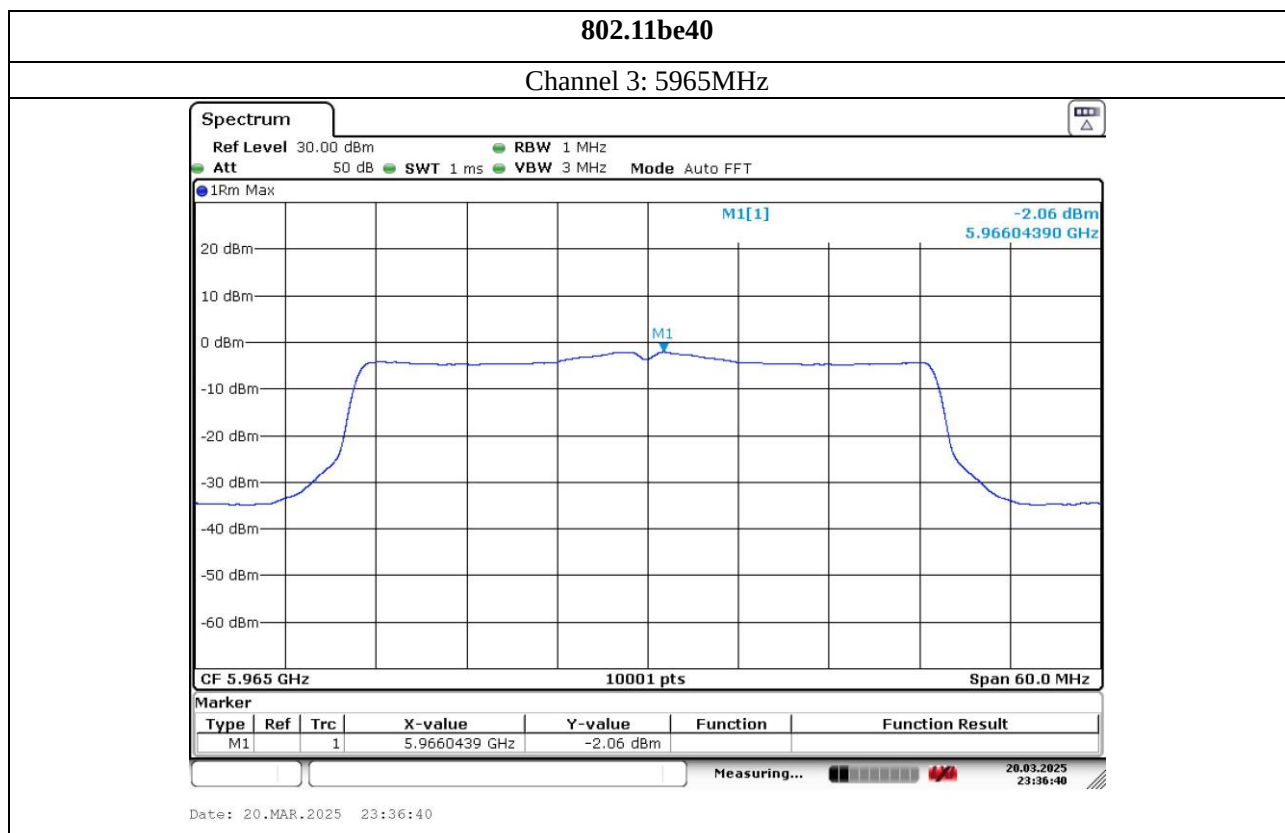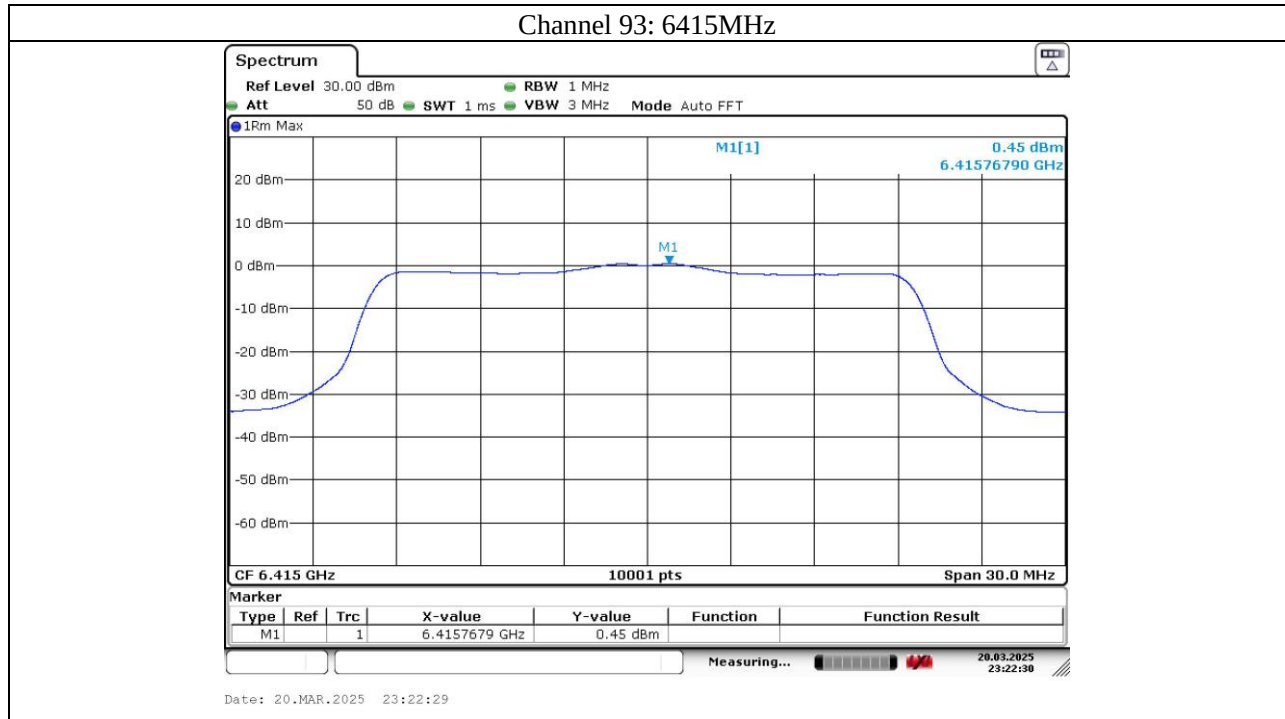



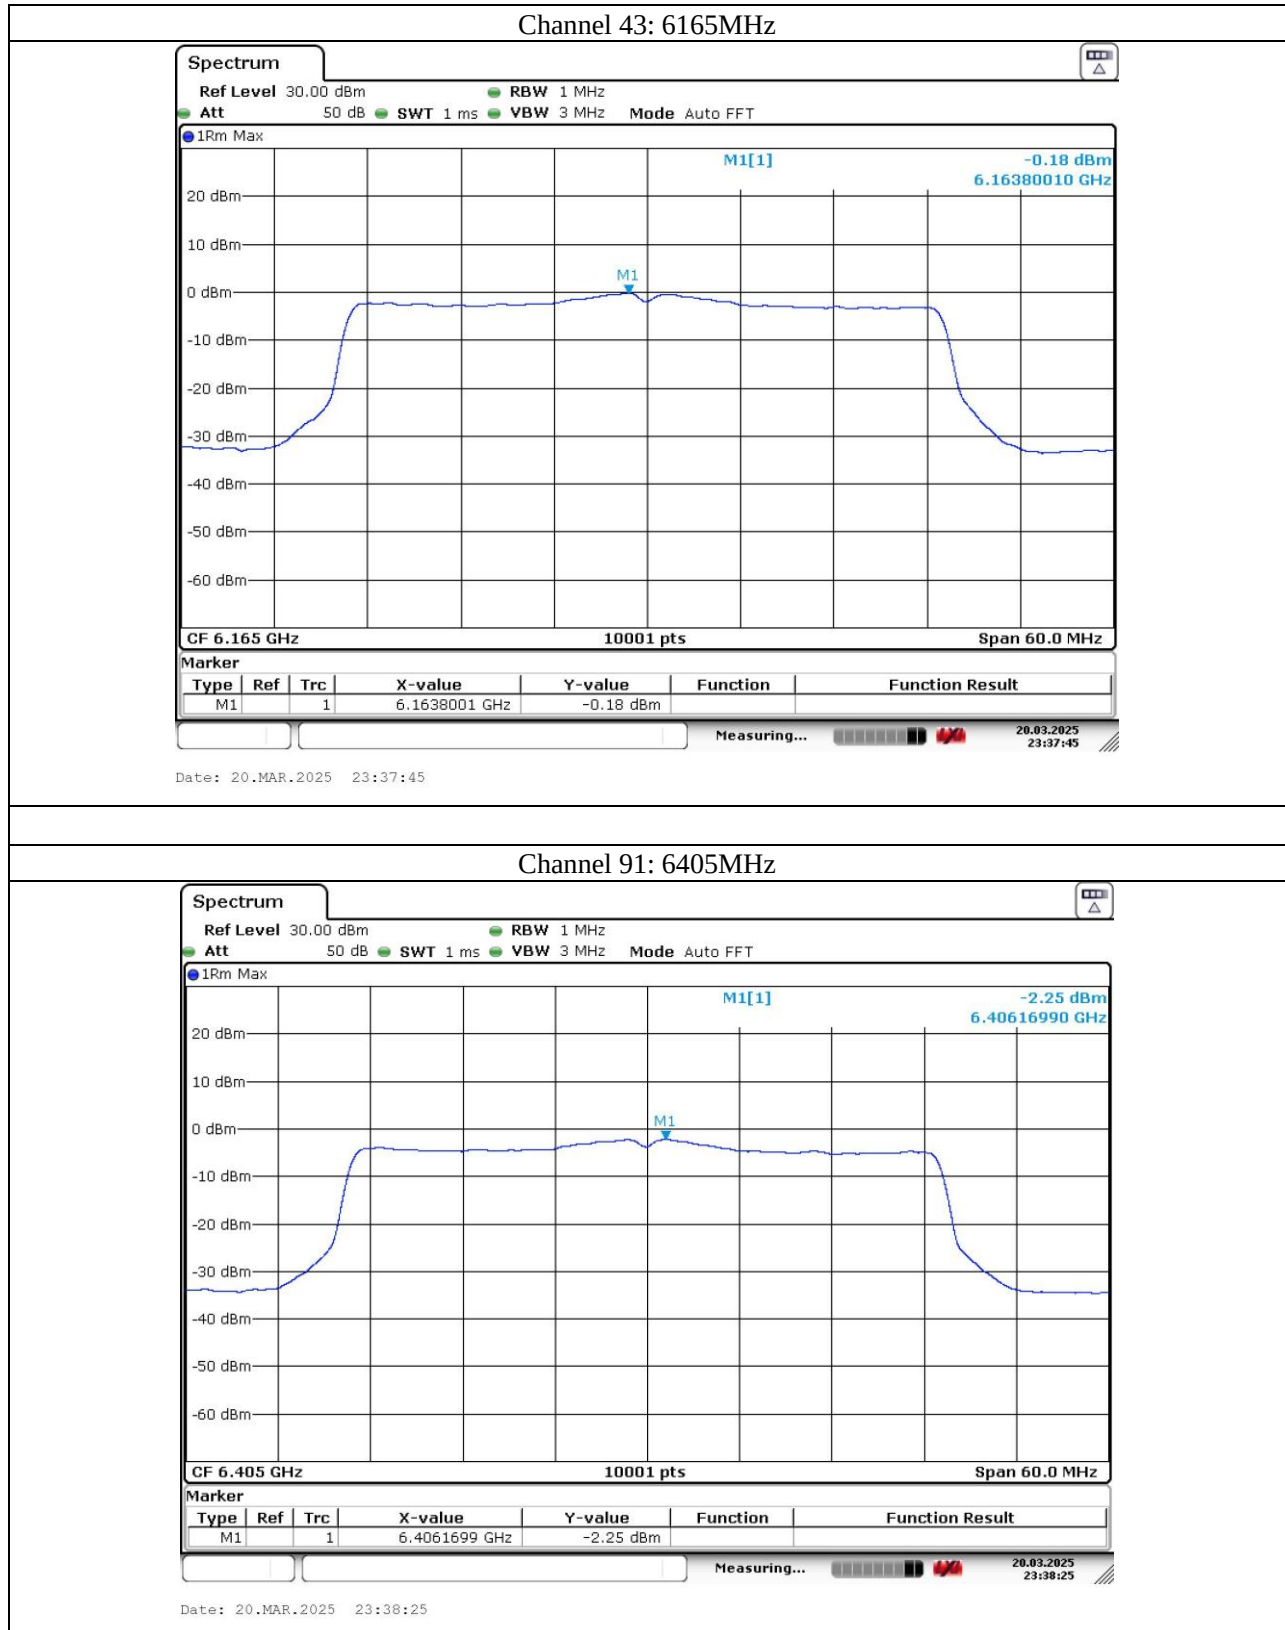


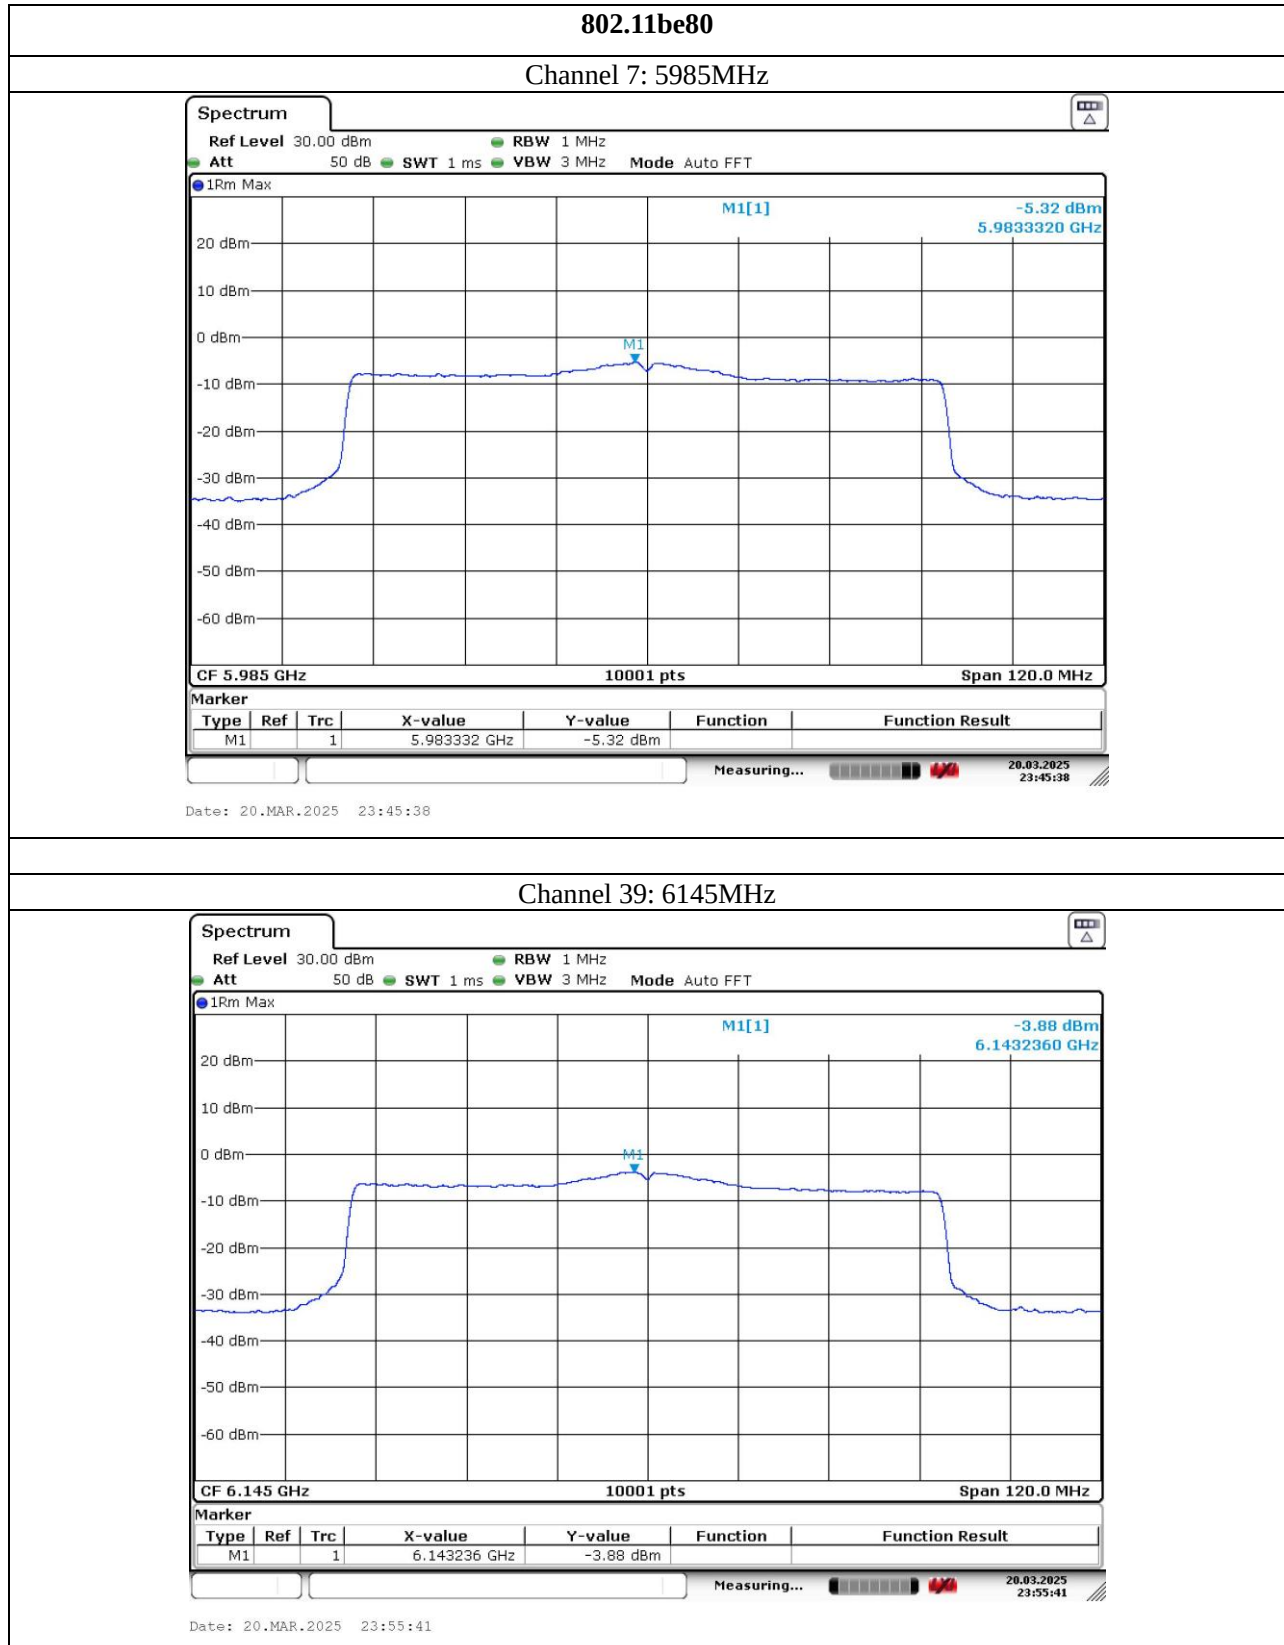


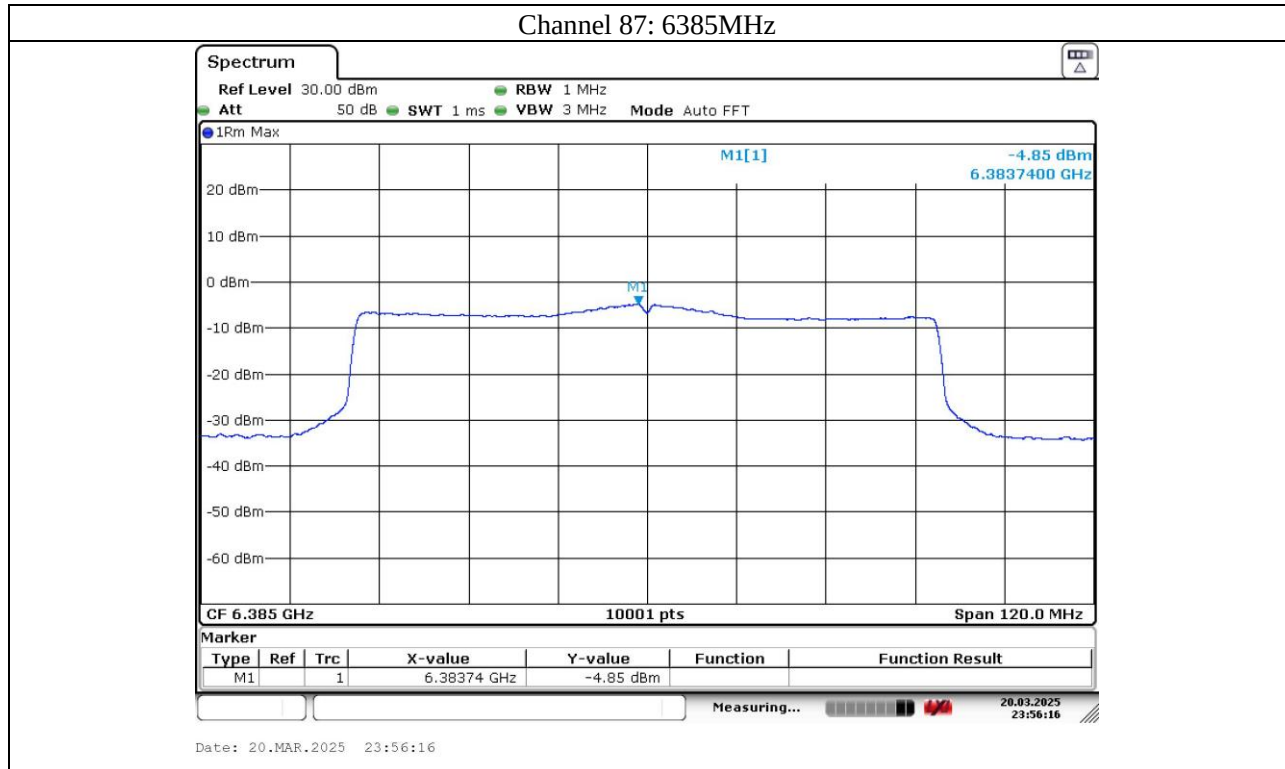




802.11be160

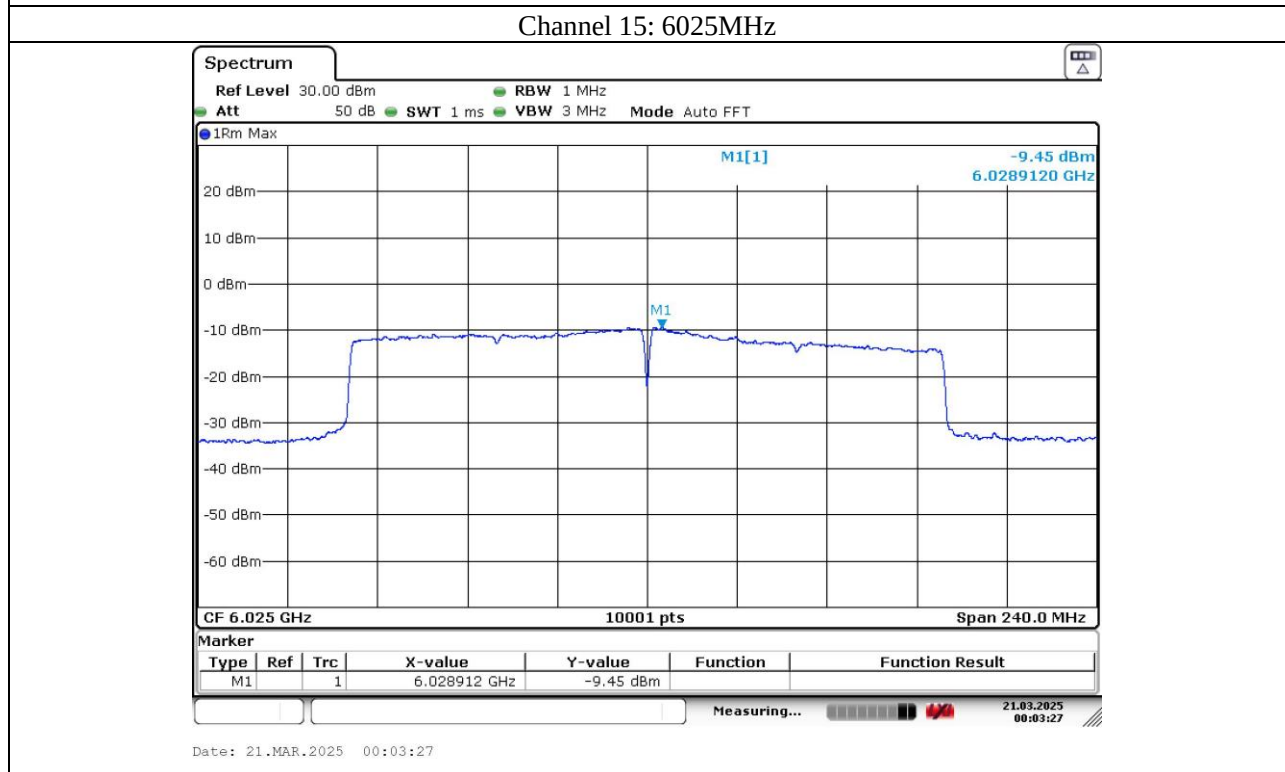


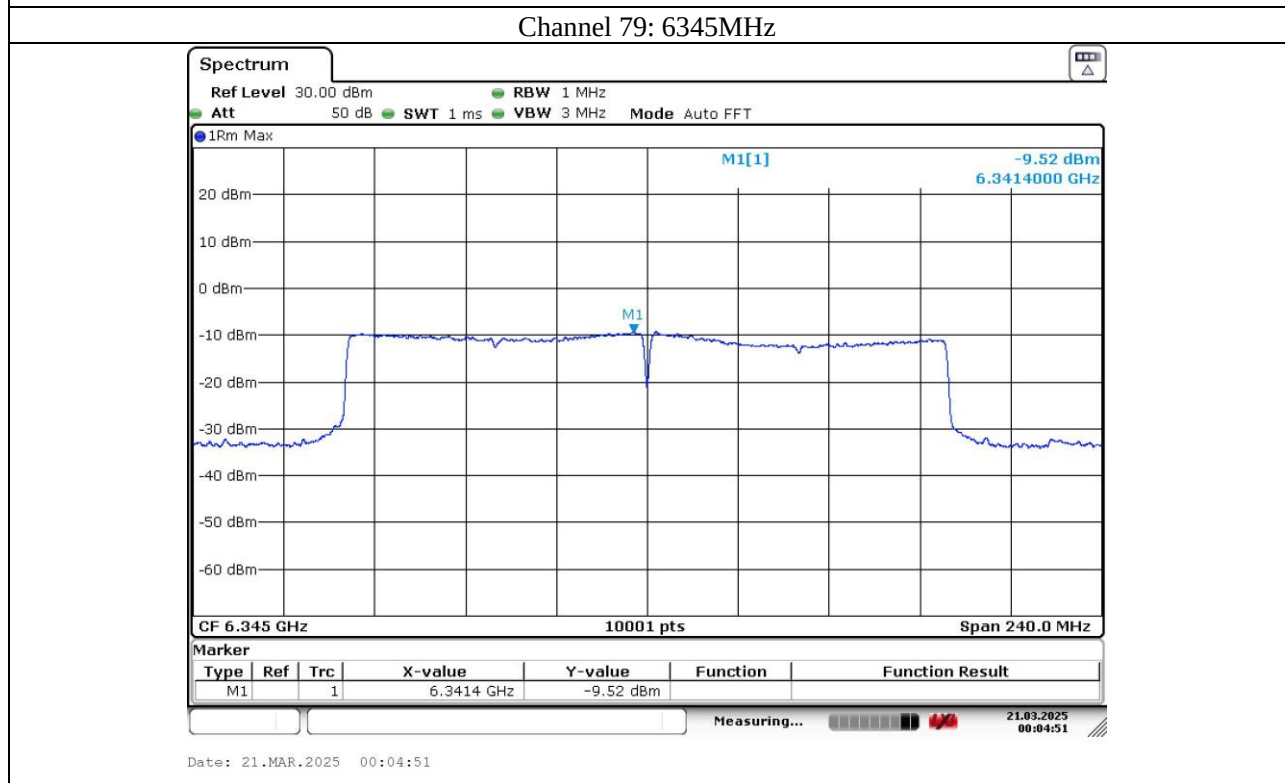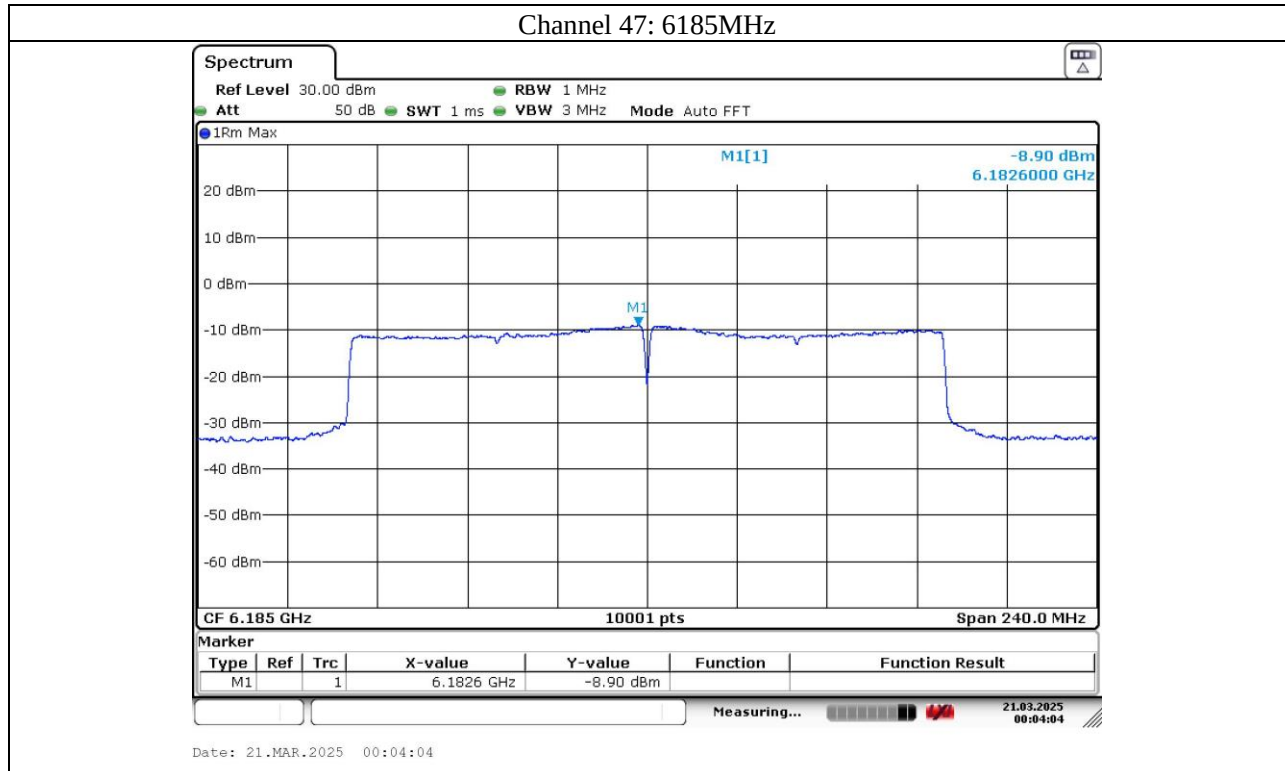


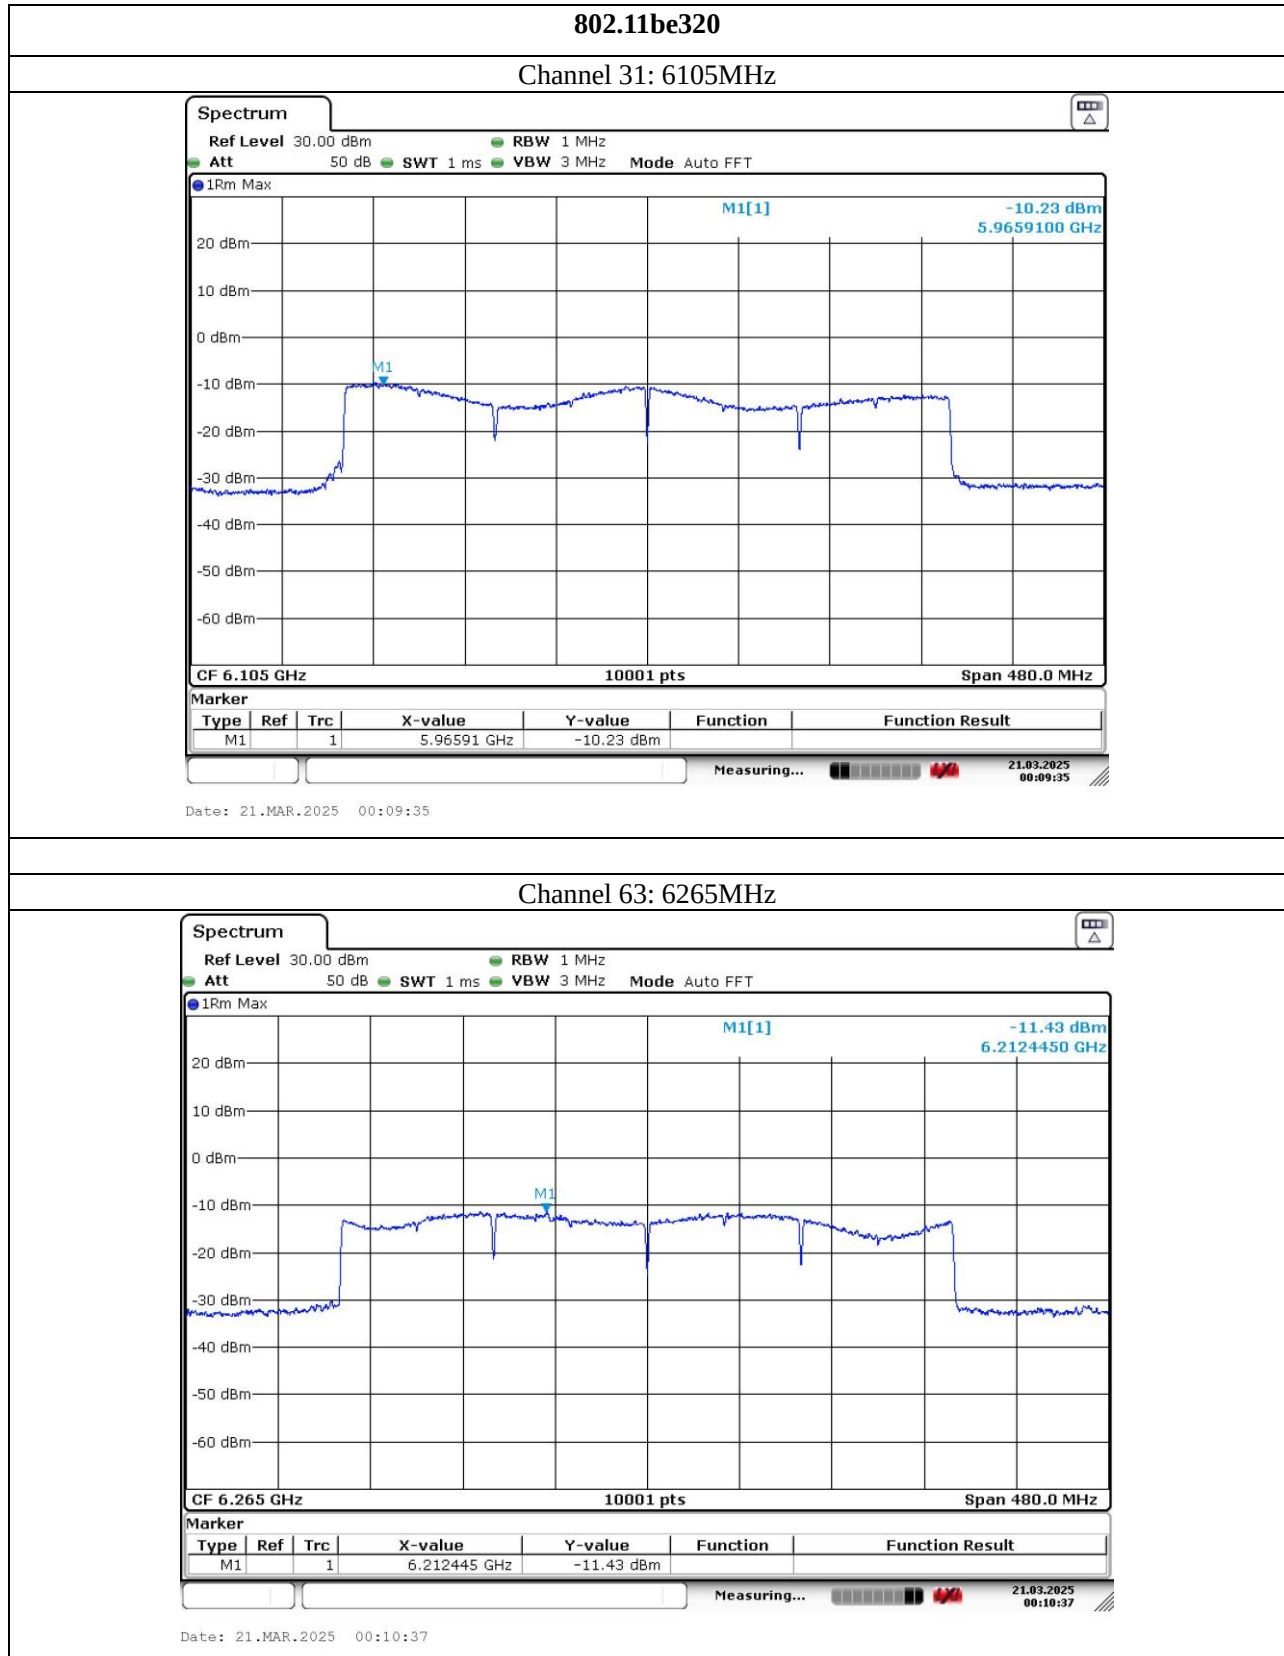



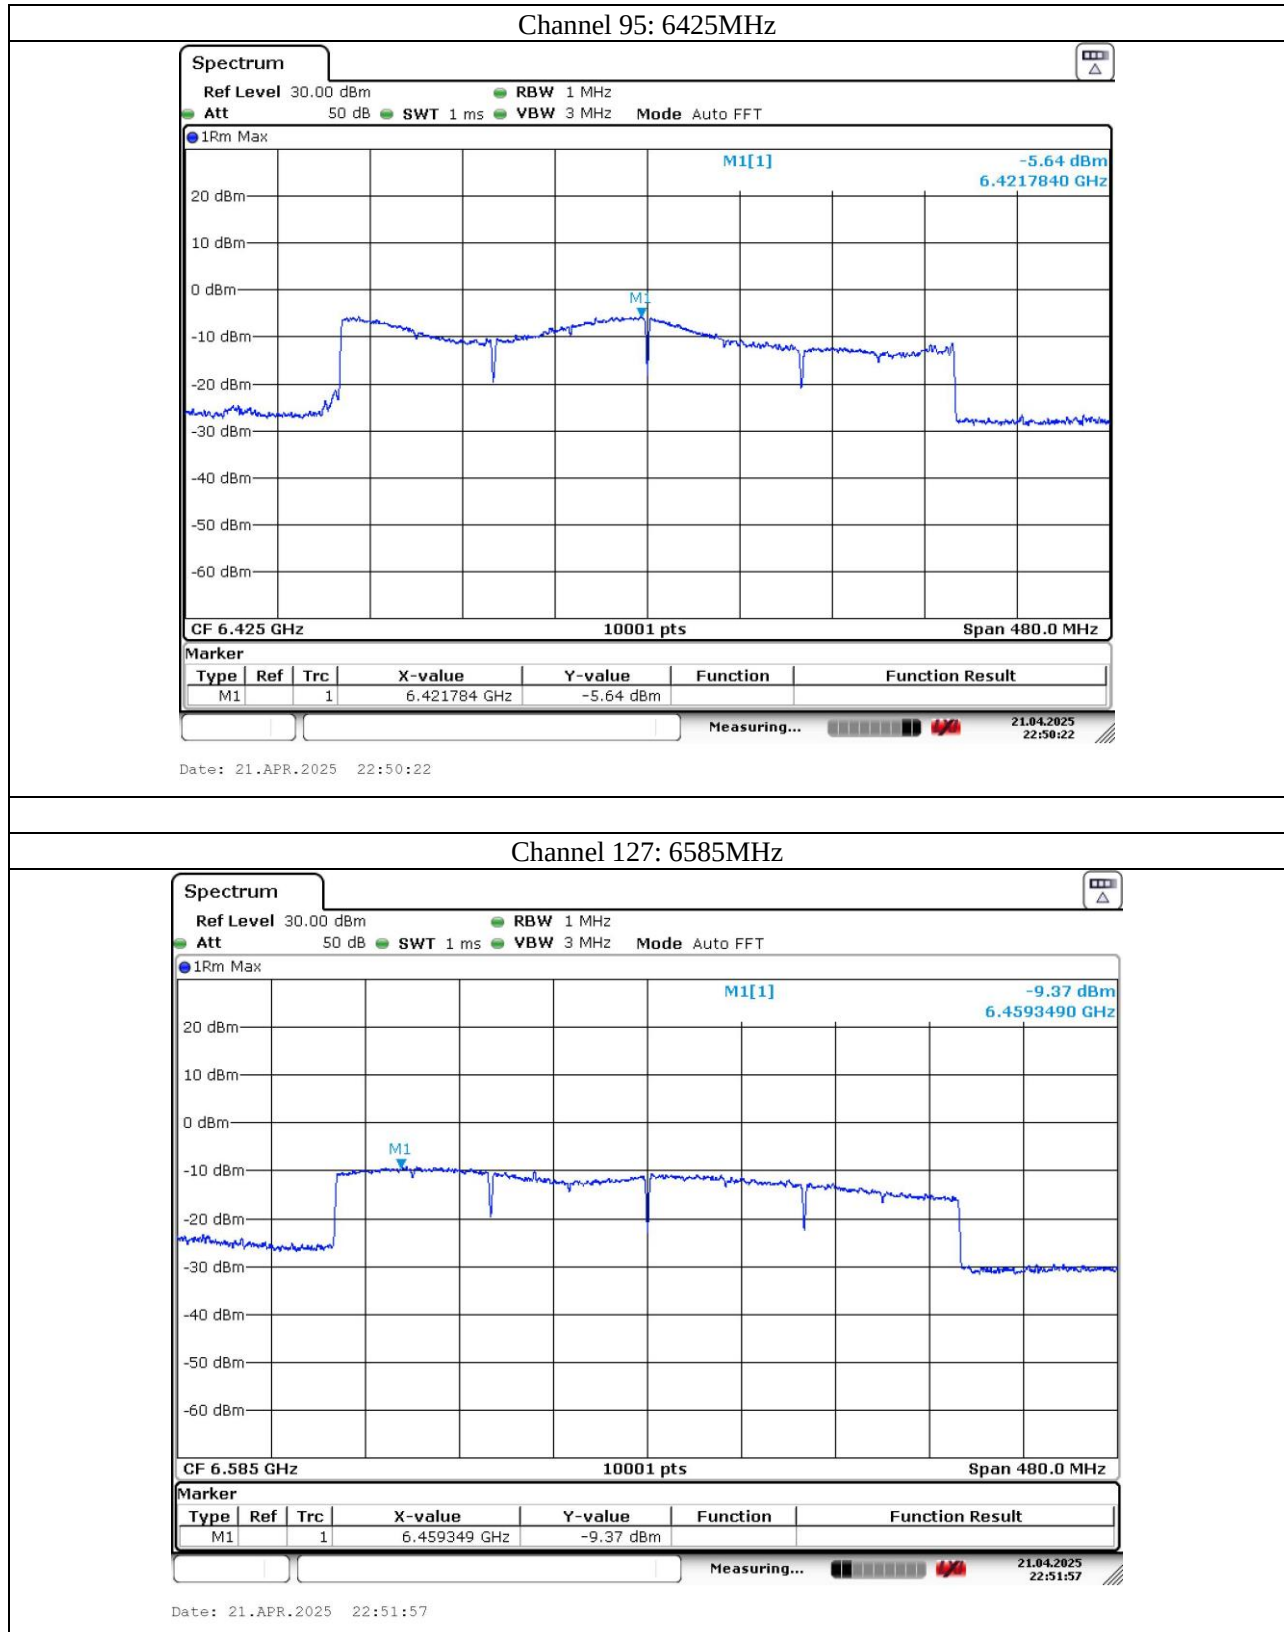


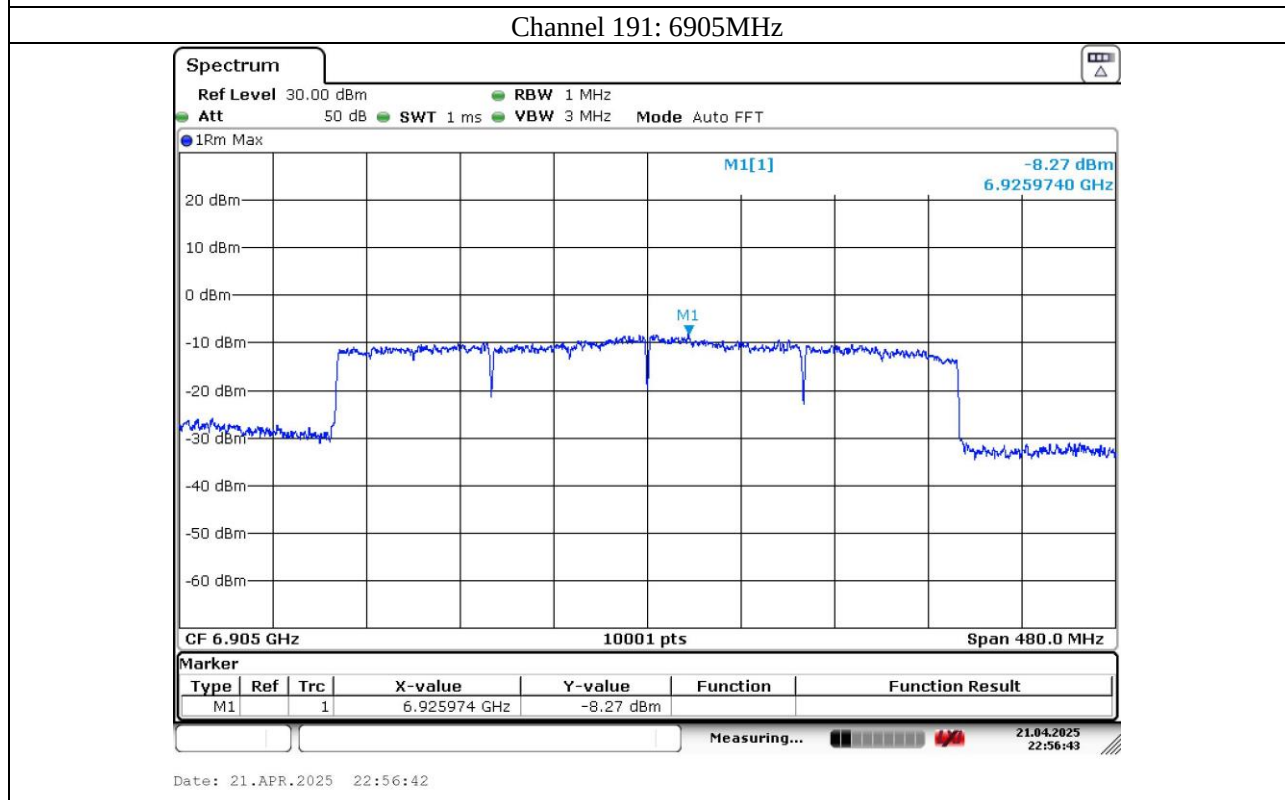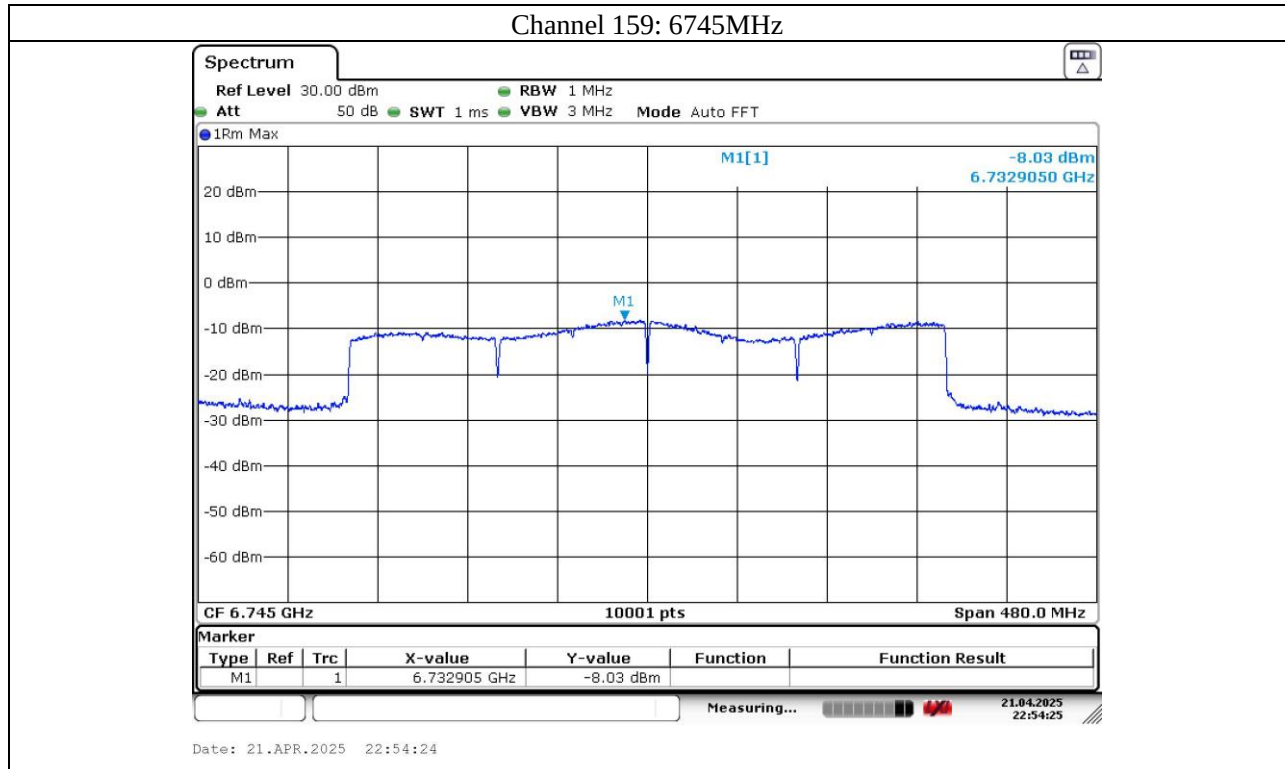



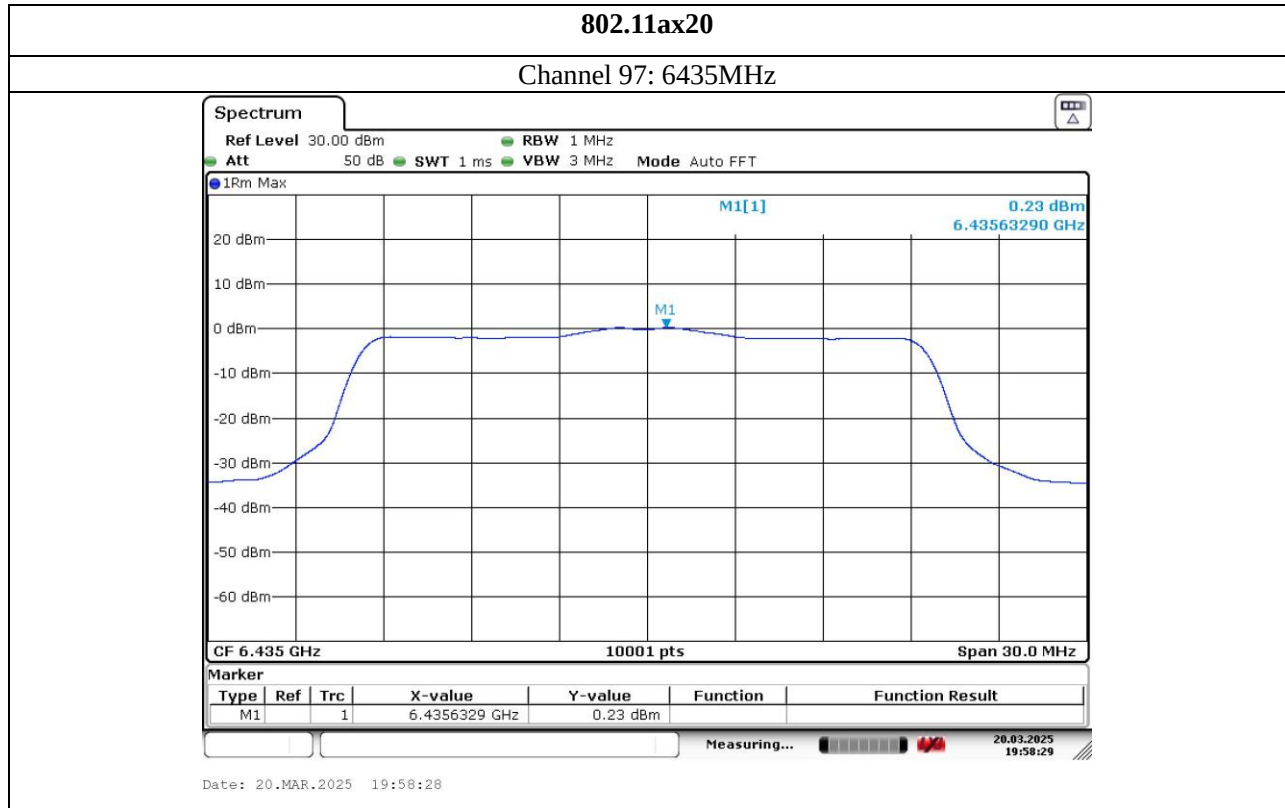



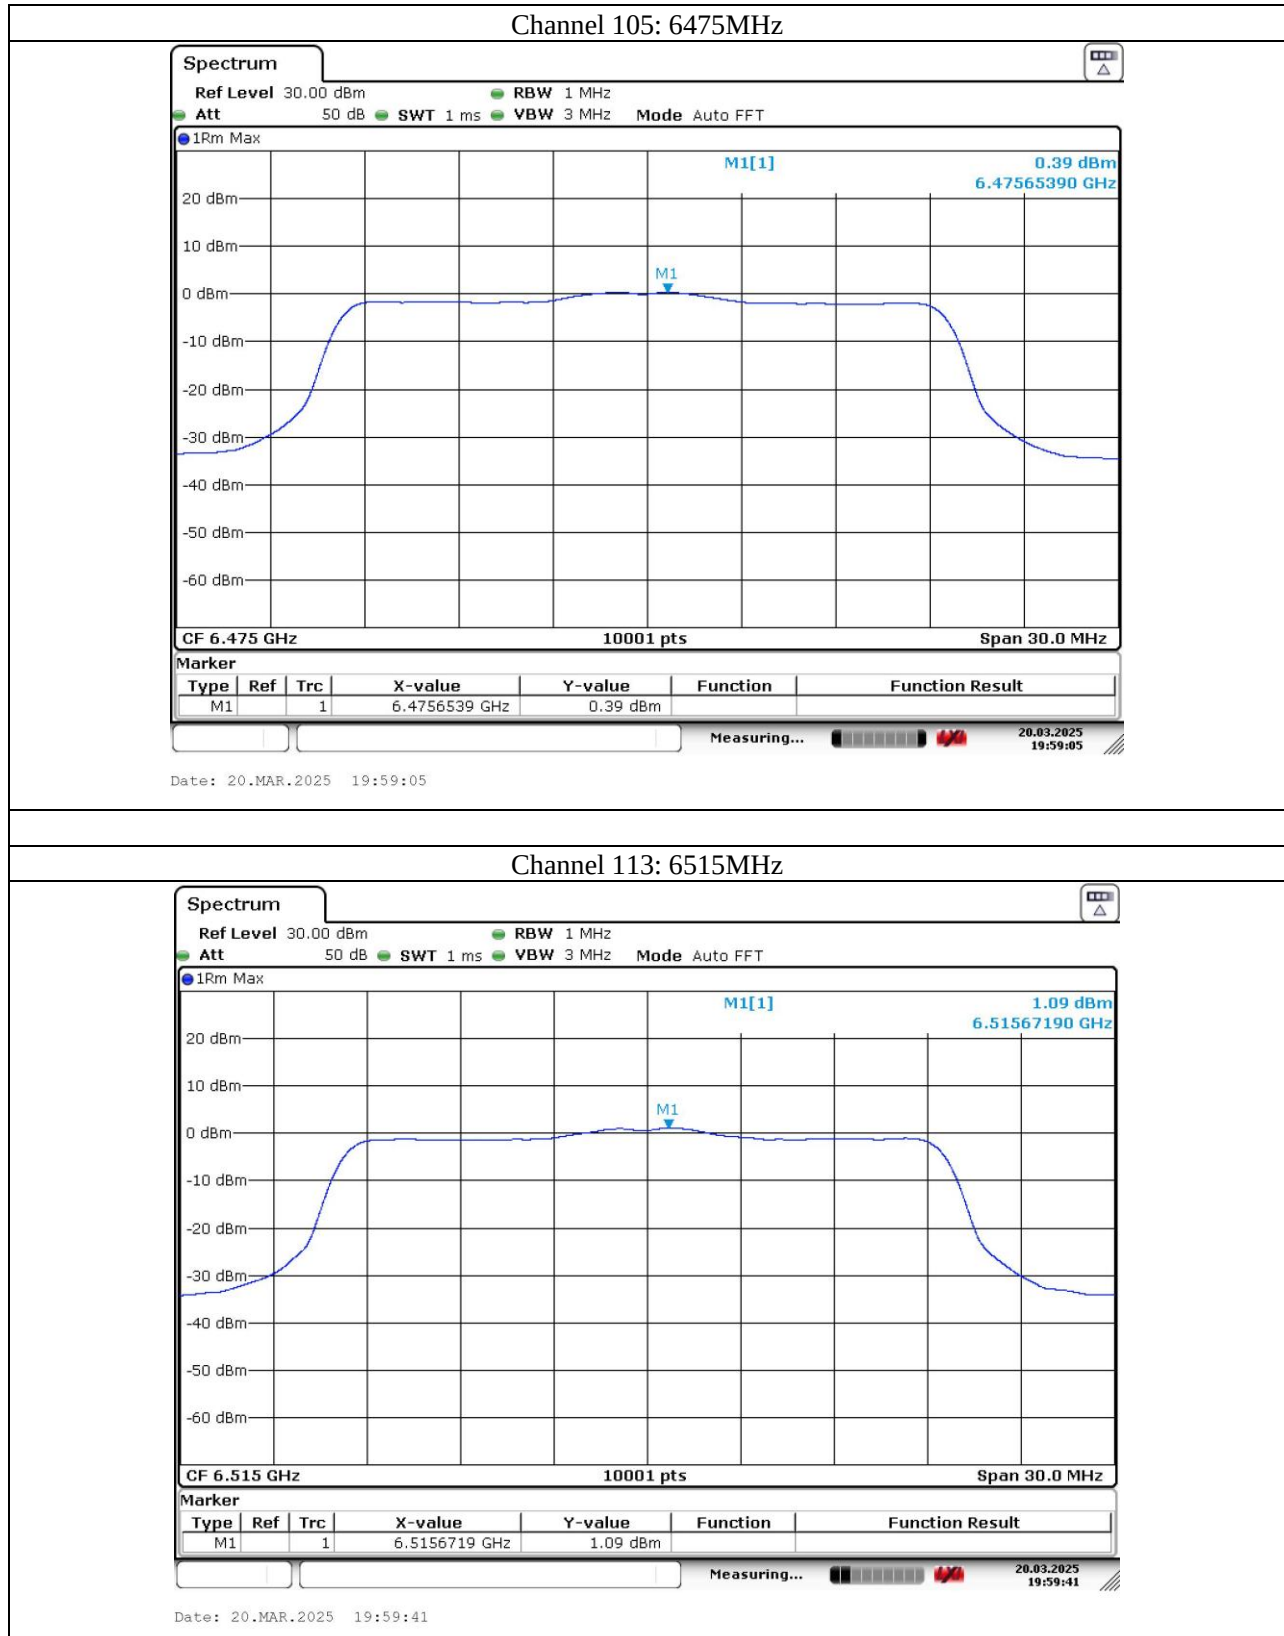



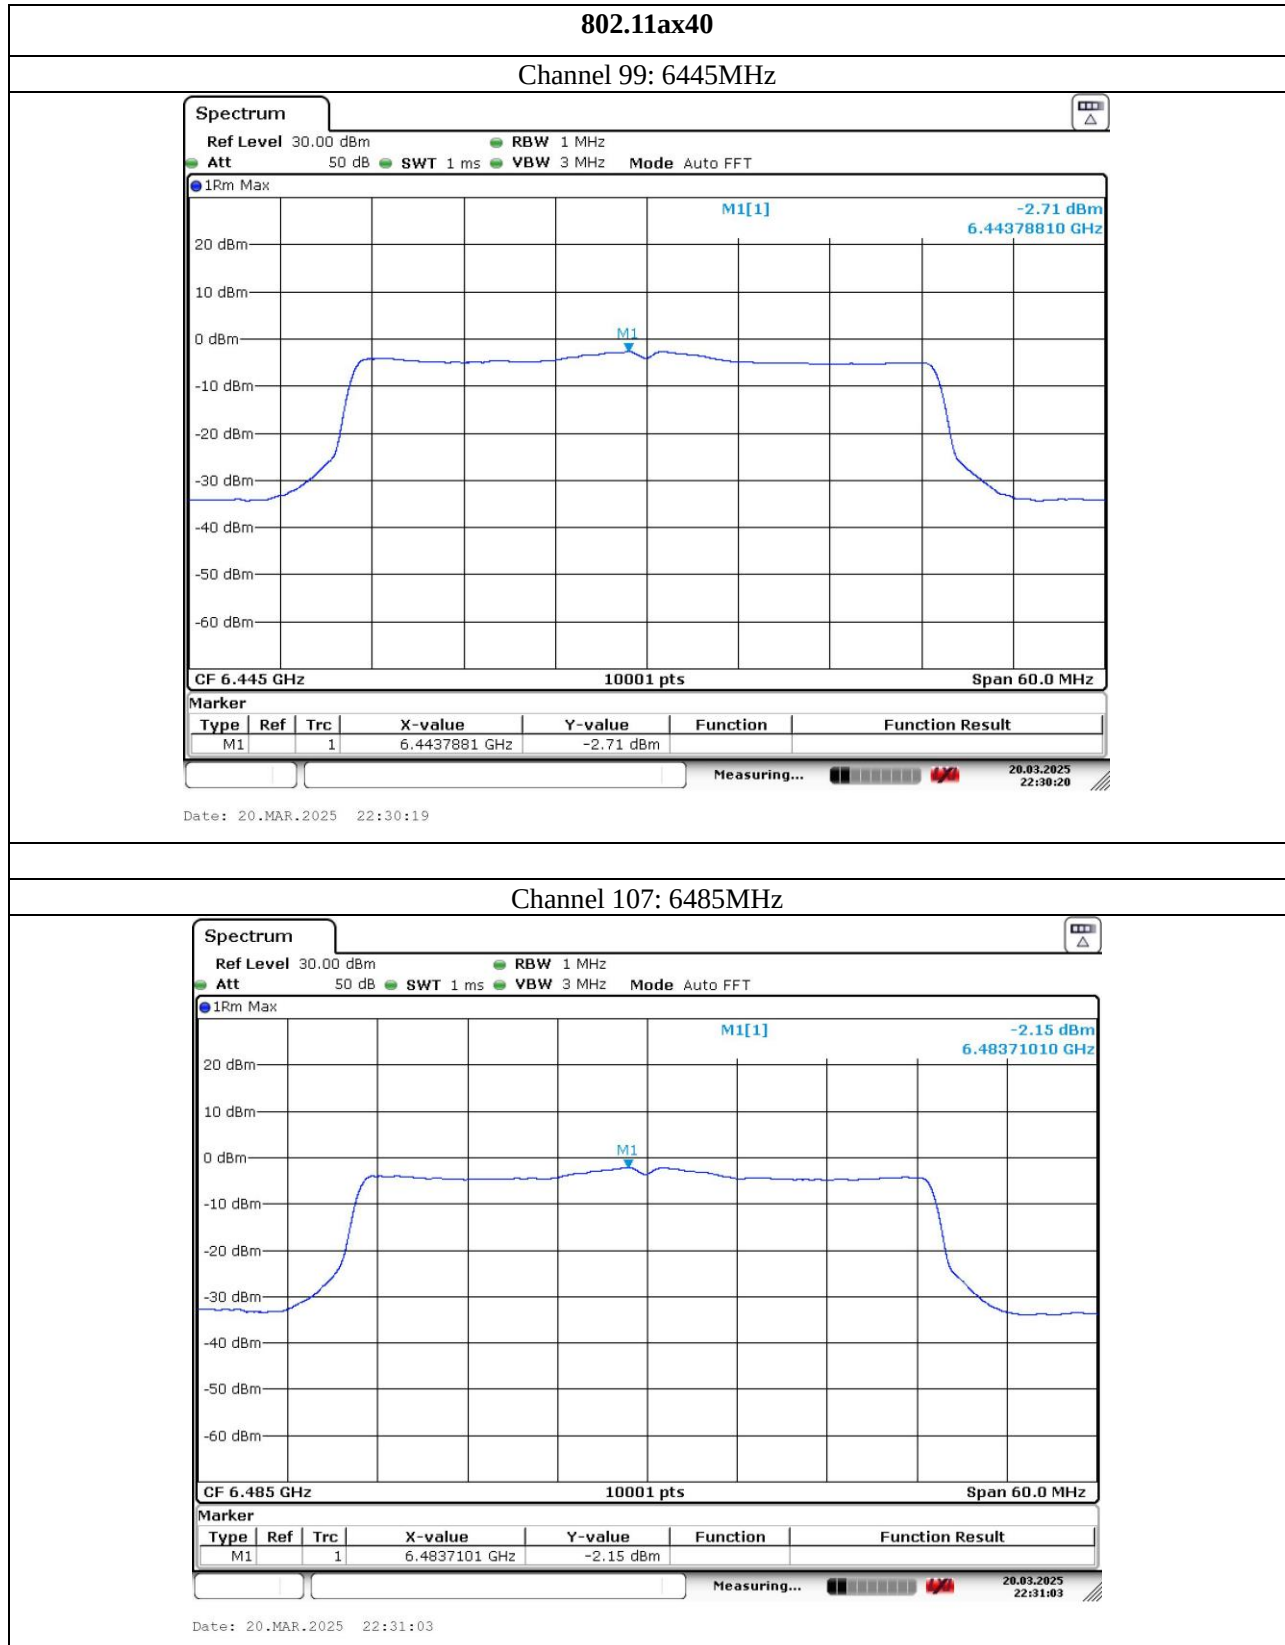


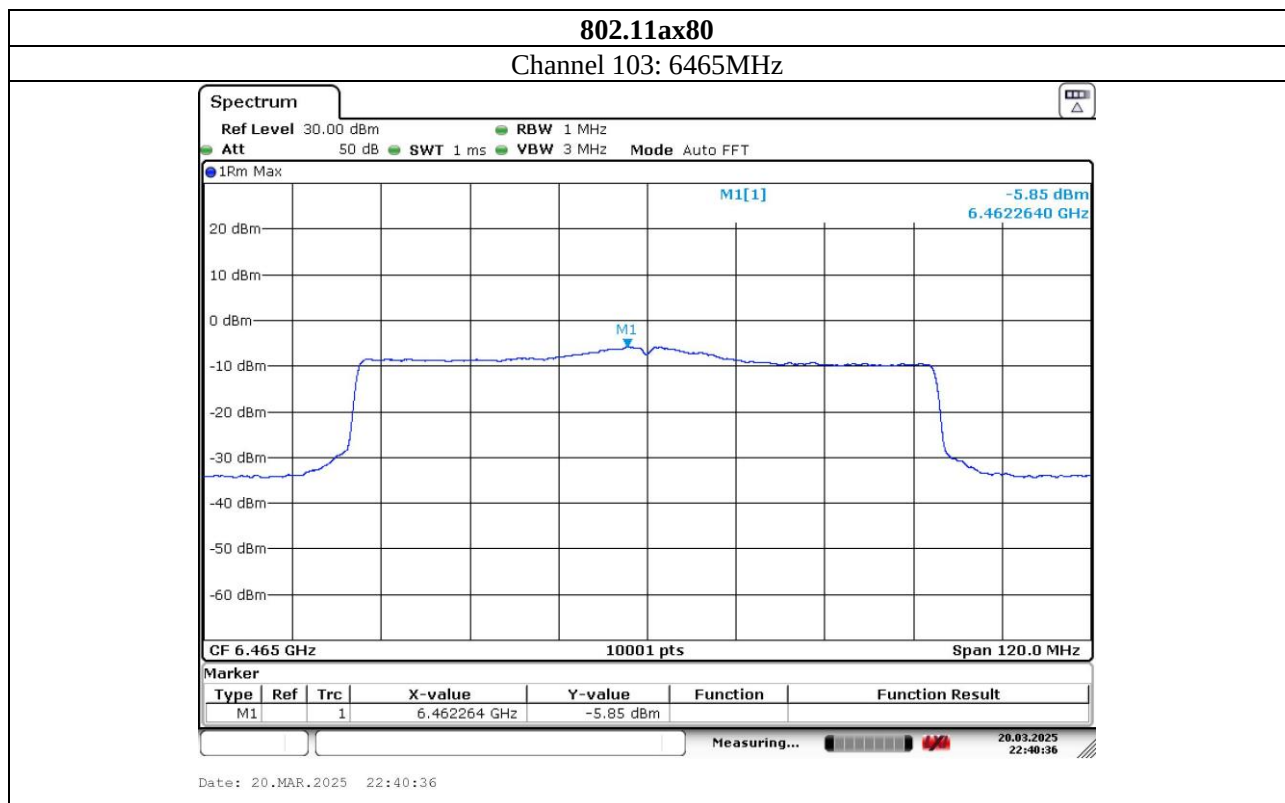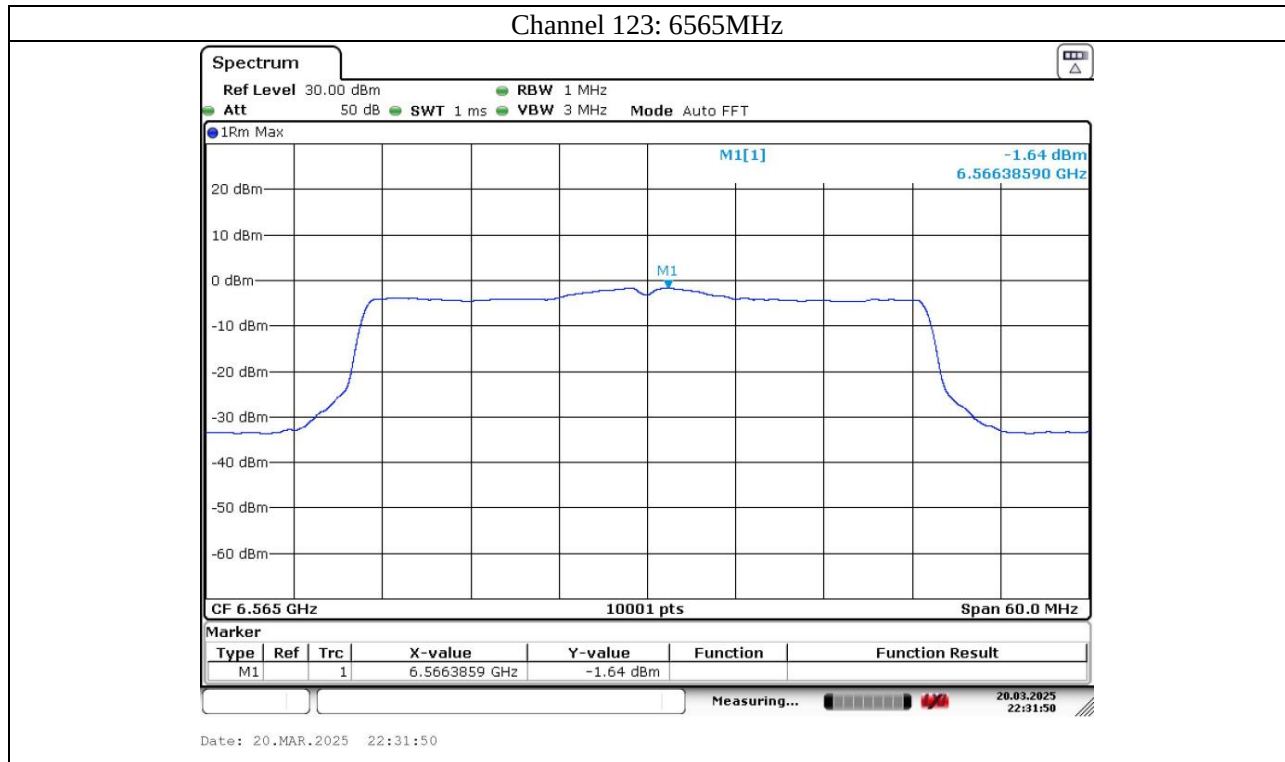


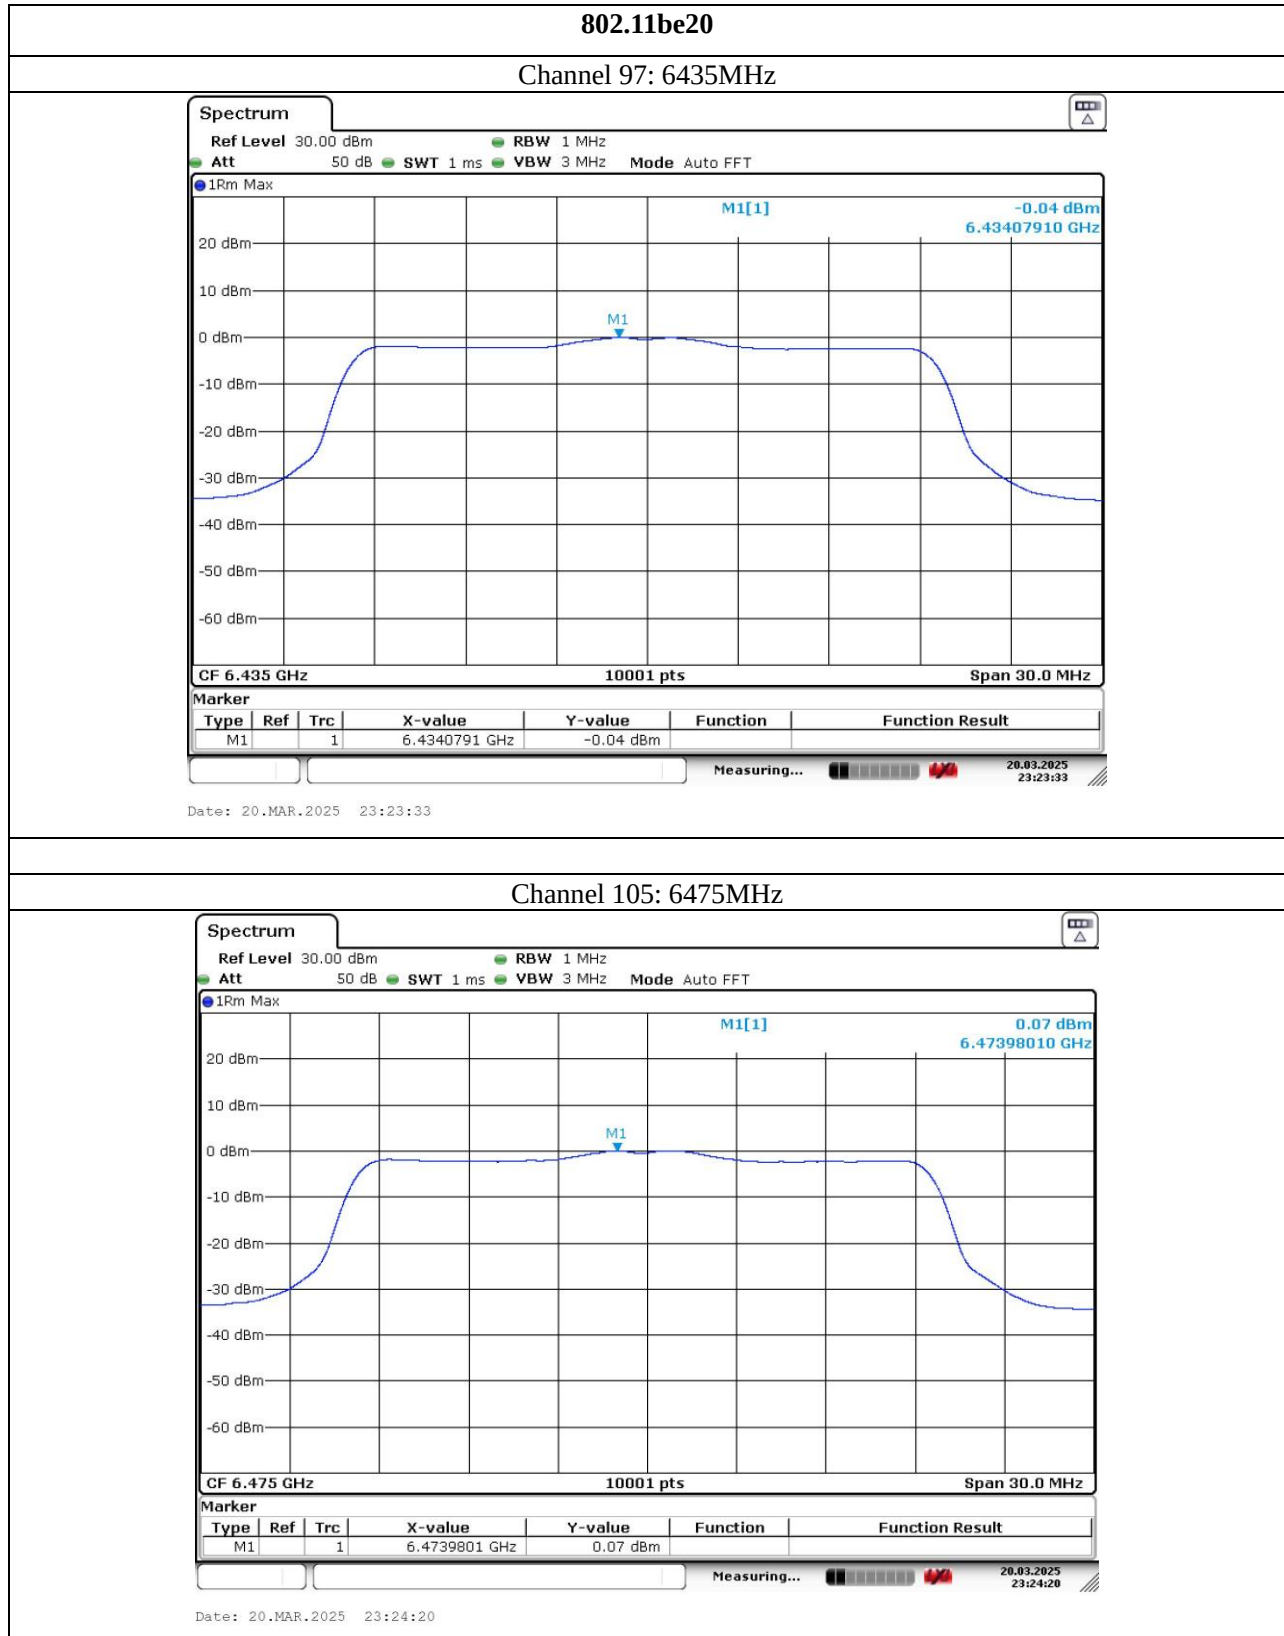

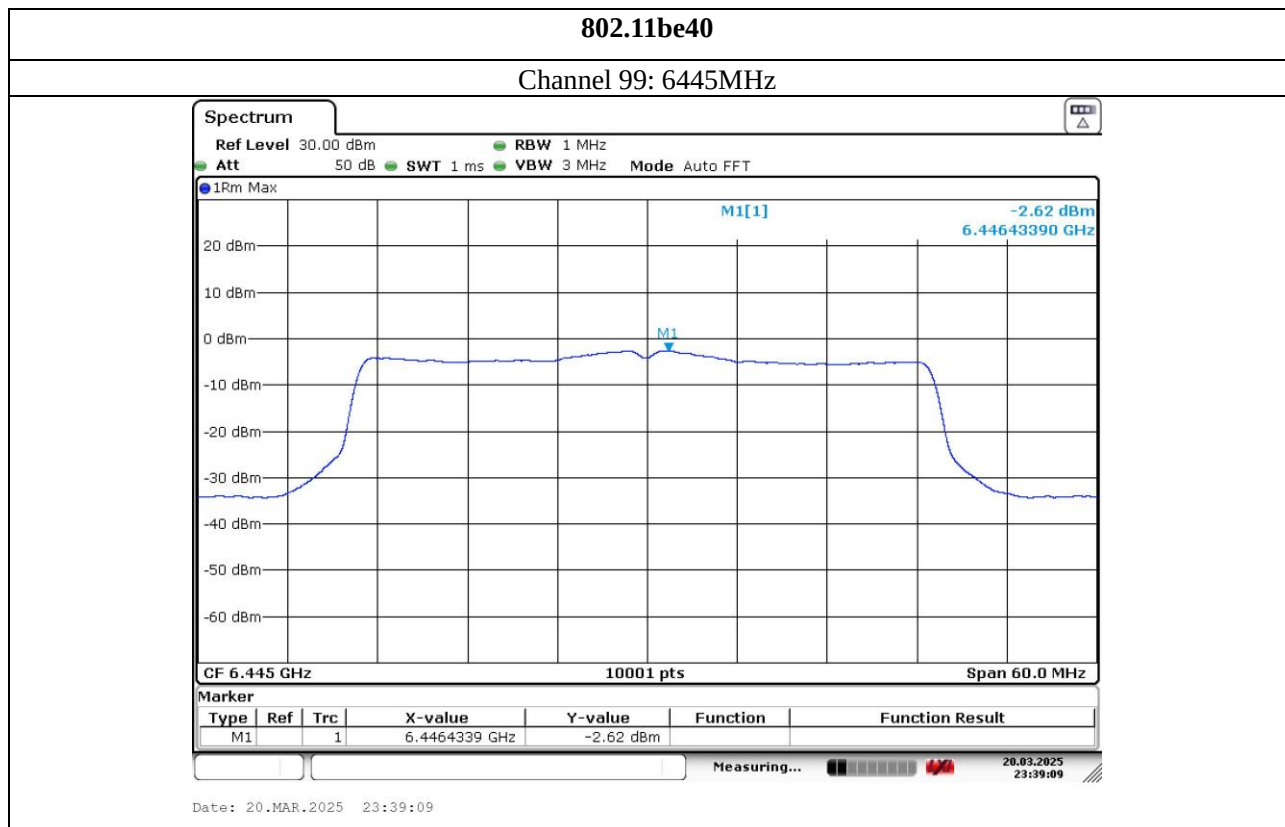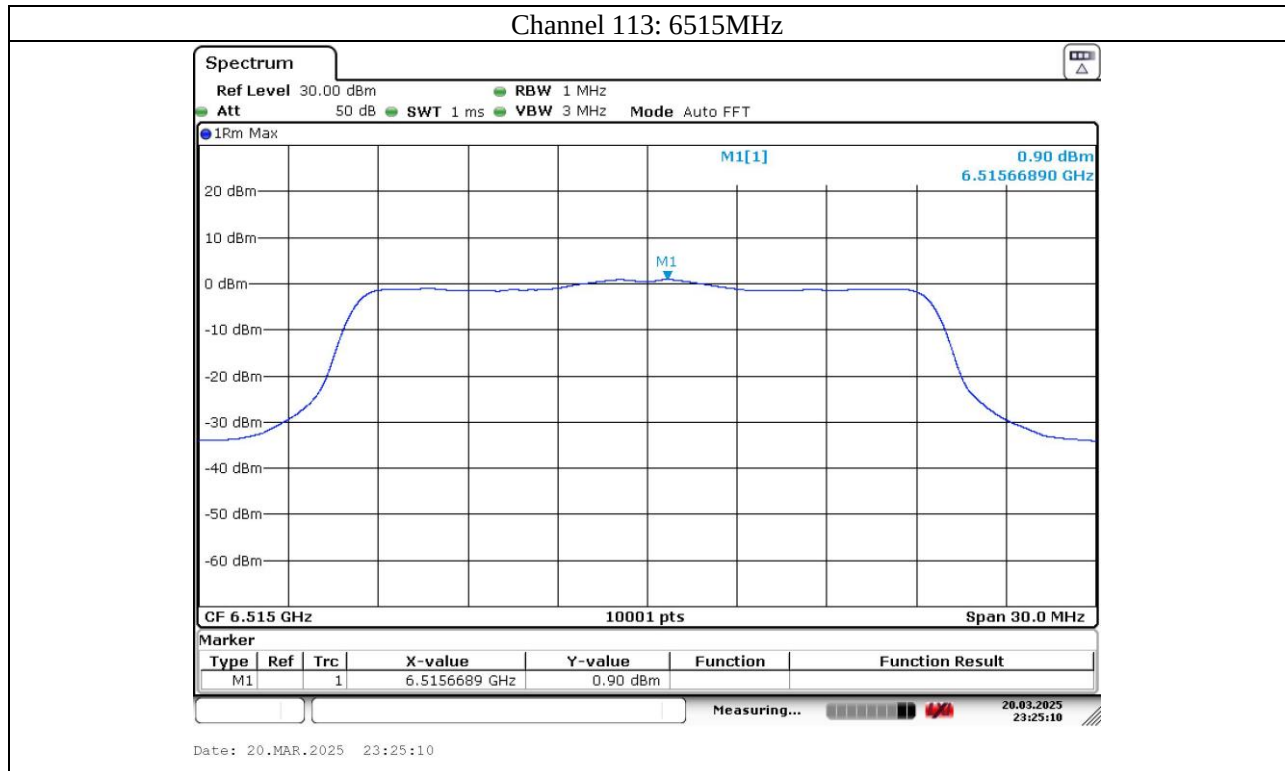

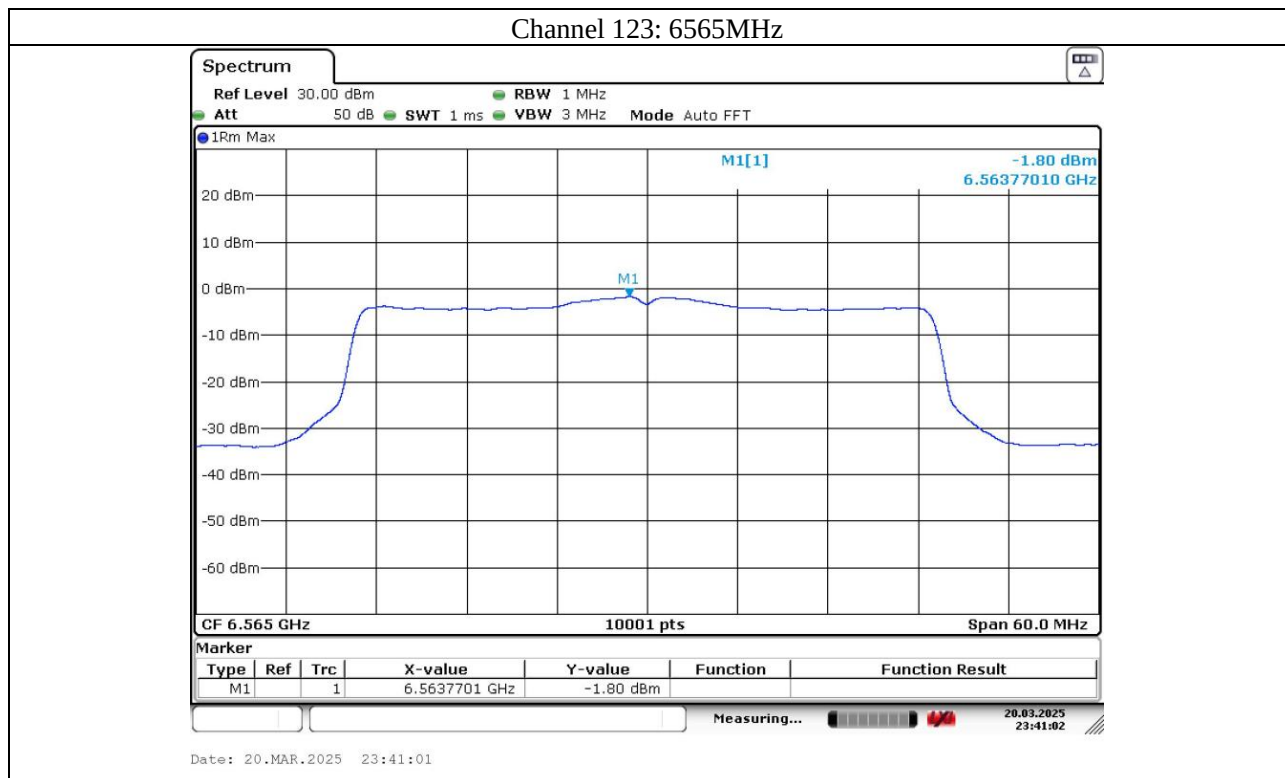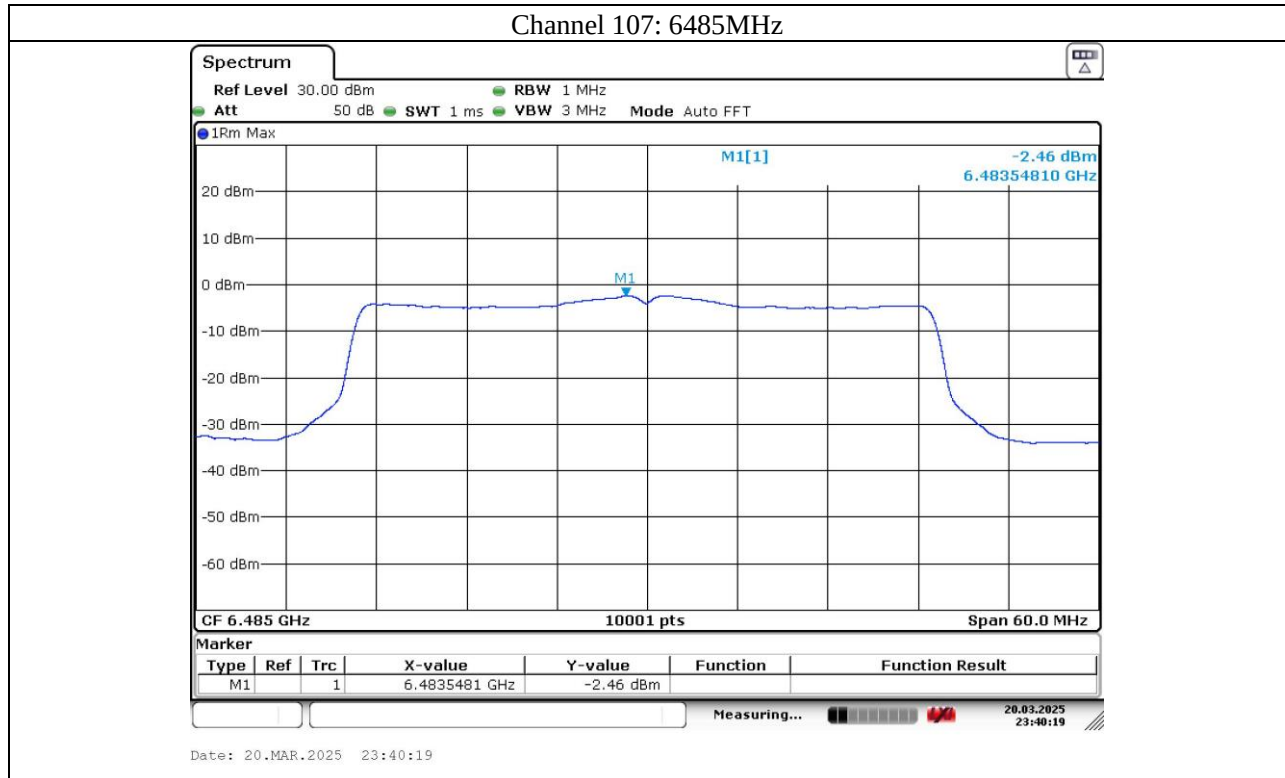


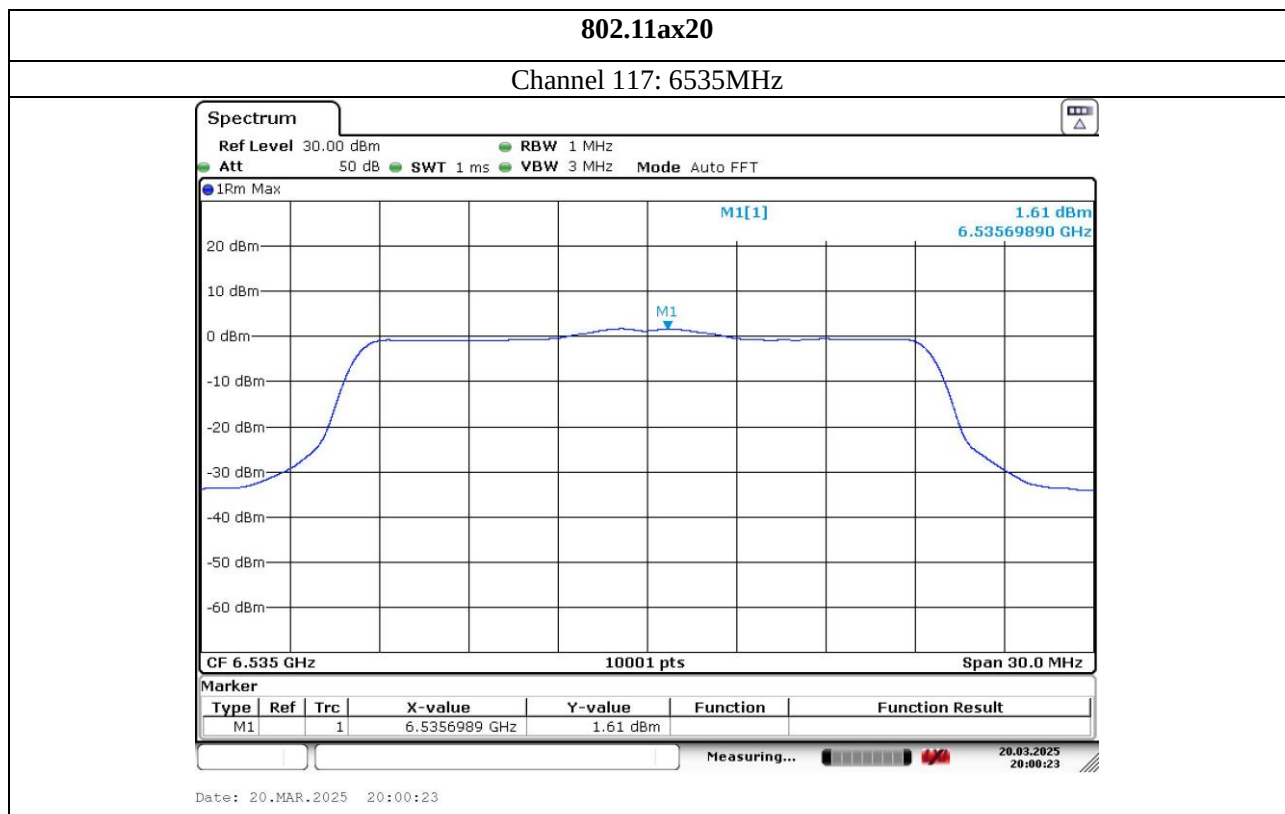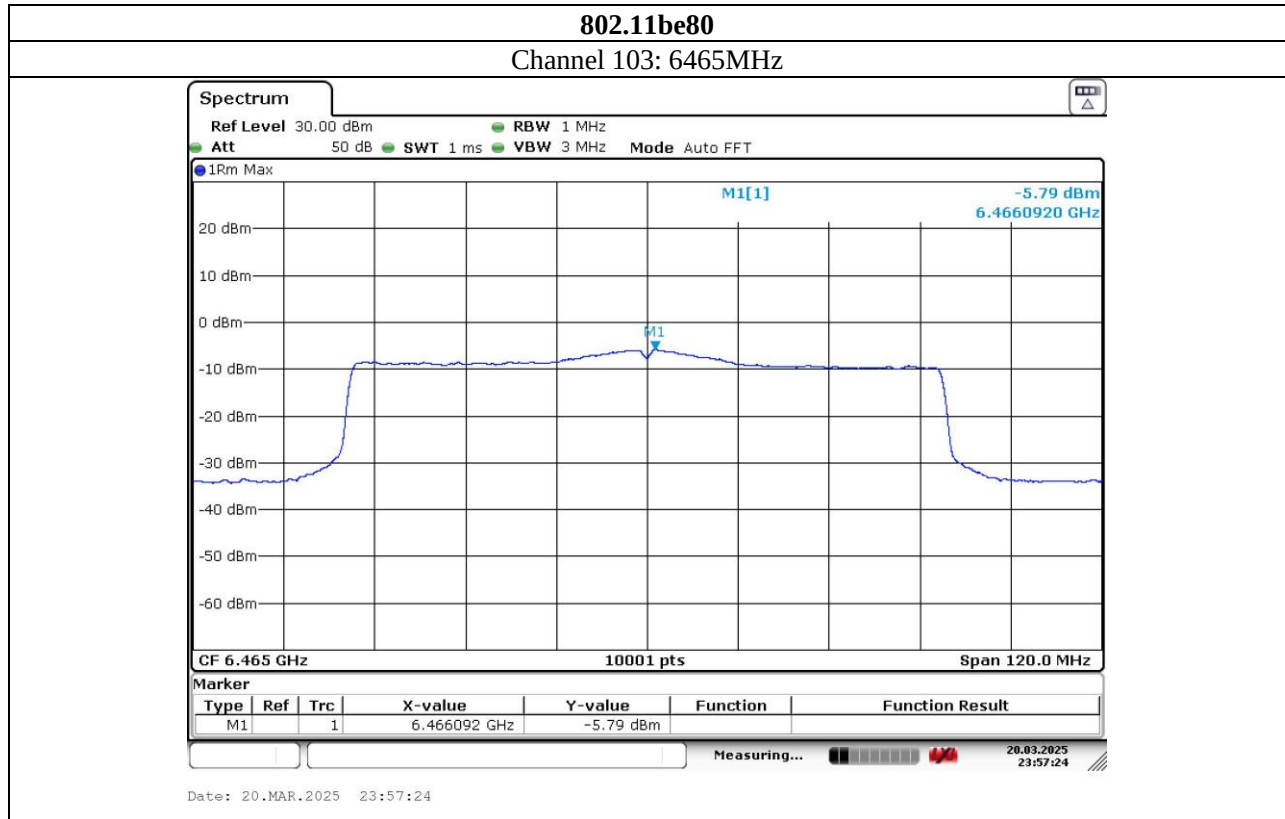

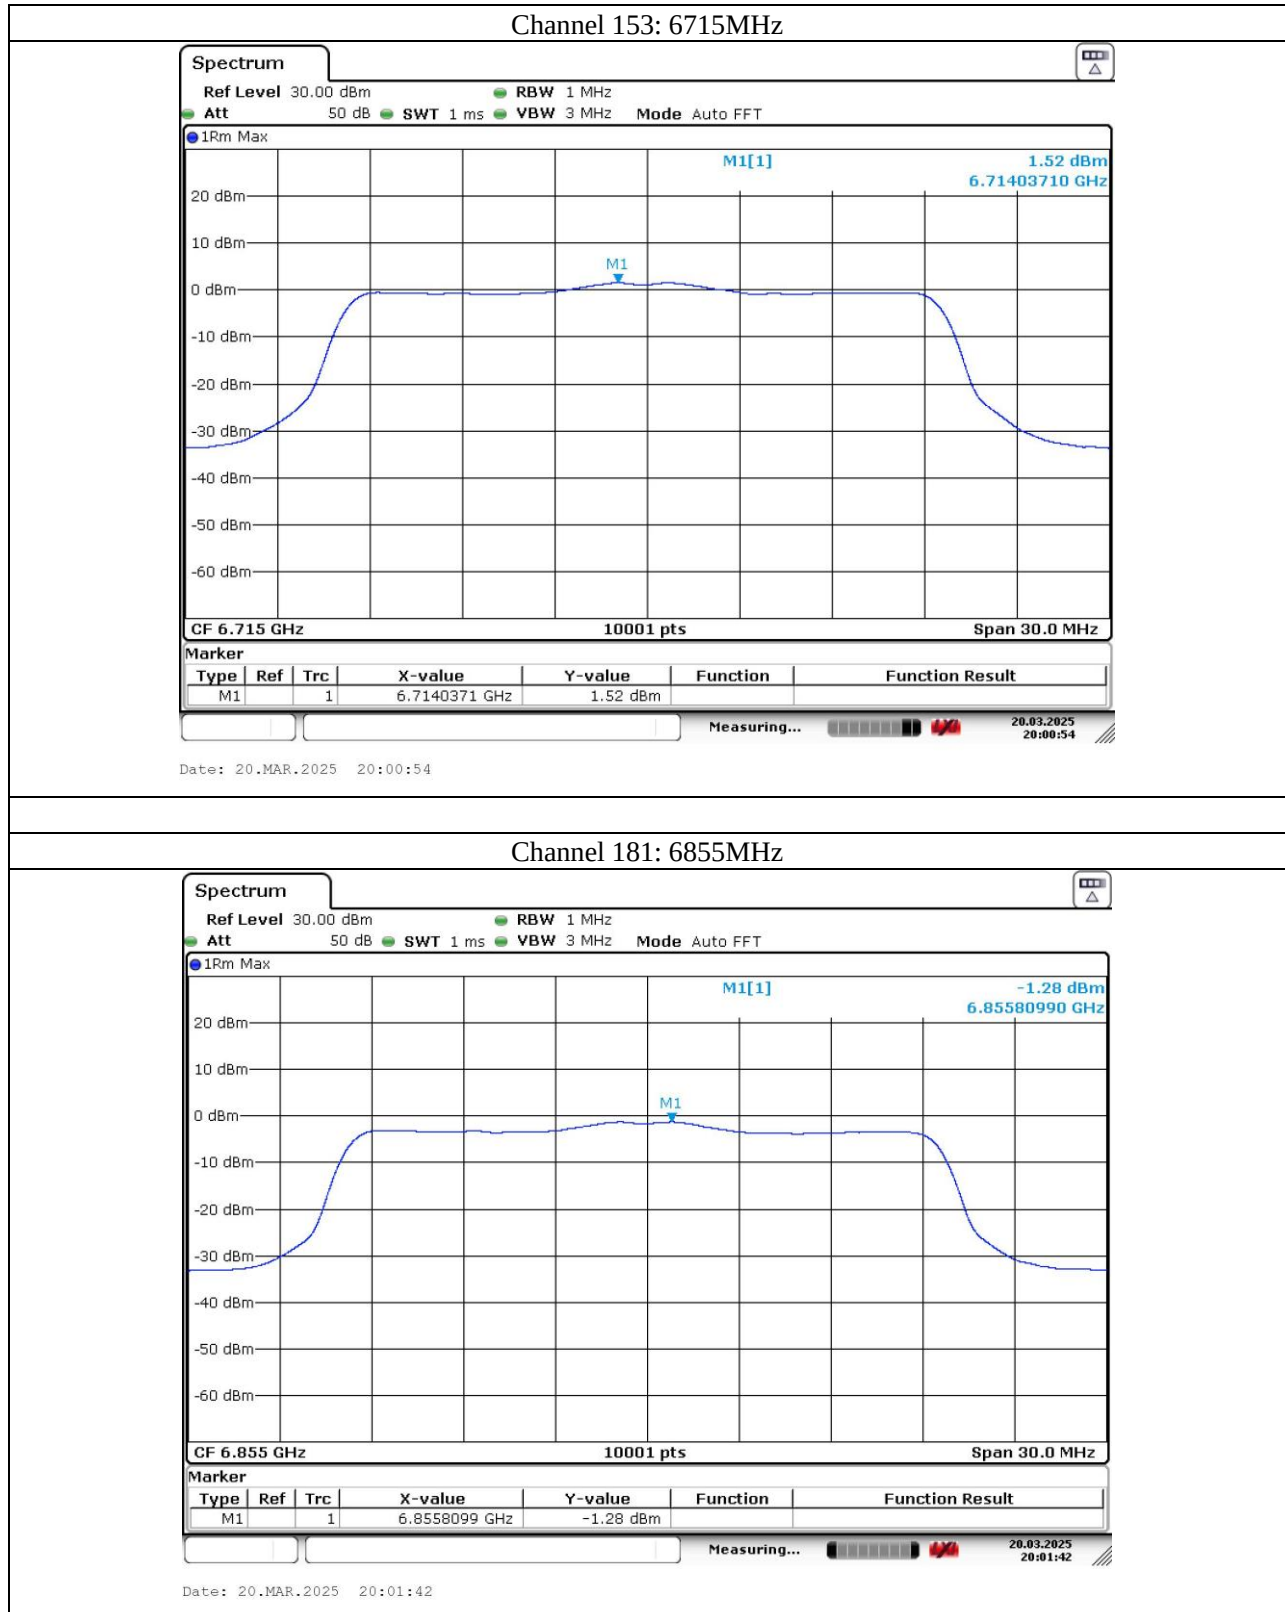

802.11ax40

Channel 123: 6565MHz

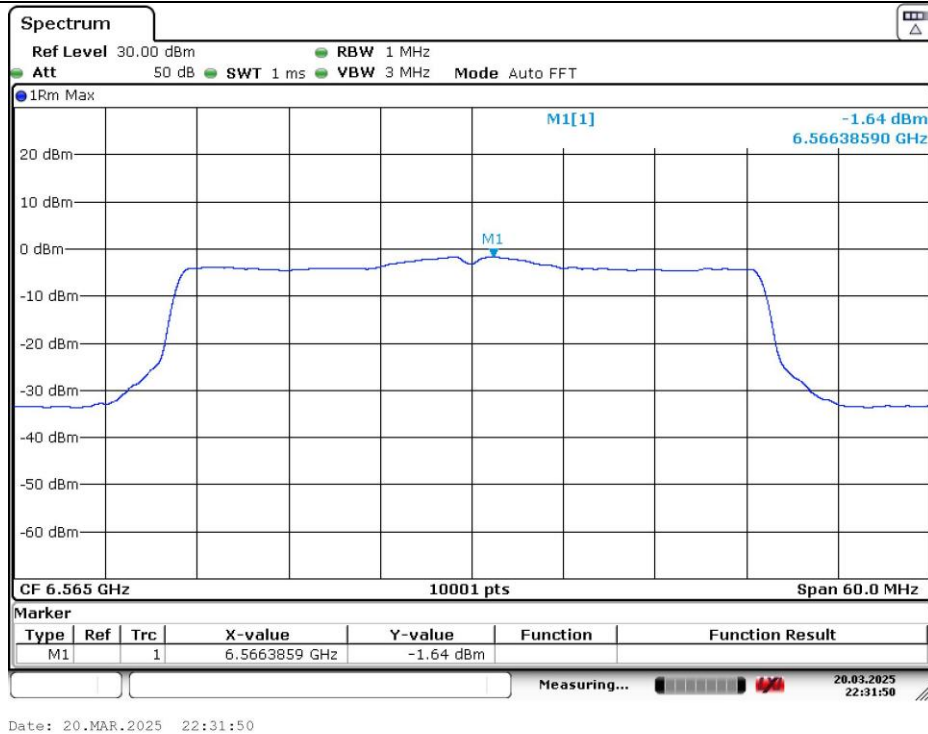

Channel 155: 6725MHz

