



FCC RADIO TEST REPORT

FCC ID : TOR-C460
Equipment : Wireless Access Point
Brand Name : ARISTA
Model Name : C-460
Applicant : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Manufacturer : Arista Networks, Inc.
5453 Great America Parkway, Santa Clara, CA 95054 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Sep. 25, 2023, and testing was started from Jan. 16, 2024 and completed on Dec. 11, 2024. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.

Approved by: Ben Tseng

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	16
1.3 Testing Location Information	16
1.4 Measurement Uncertainty	17
2 Test Configuration of EUT.....	18
2.1 Test Channel Mode	18
2.2 The Worst Case Measurement Configuration.....	48
2.3 Accessories	50
2.4 Support Equipment.....	50
2.5 Test Setup Diagram	51
3 Transmitter Test Result	53
3.1 AC Power-line Conducted Emissions	53
3.2 Emission Bandwidth	55
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	56
3.4 Peak Power Spectral Density (E.I.R.P.)	58
3.5 Unwanted Emissions.....	61
3.6 Contention Based Protocol.....	67
4 Test Equipment and Calibration Data	68
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver.2.6
FCC ID: TOR-C460

Page Number : 3 of 71
Issued Date : Feb. 06, 2025
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.4	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Ryan Hsiao

Report Producer: Amber Chiu



1 General Description

1.1 Information

1.1.1 RF General Information

Radio 0

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	ax (HEW20)	5955 ~ 7095	1 ~ 229 [58]
5925 ~ 7125	ax (HEW40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160)	6025 ~ 6985	15 ~ 207 [7]

Radio 0_Non-Beamforming

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11ax HEW20	20	2TX
6.425-6.525GHz	802.11ax HEW20	20	2TX
6.525-6.875GHz	802.11ax HEW20	20	2TX
6.875-7.125GHz	802.11ax HEW20	20	2TX
5.925-6.425GHz	802.11ax HEW40	40	2TX
6.425-6.525GHz	802.11ax HEW40	40	2TX
6.525-6.875GHz	802.11ax HEW40	40	2TX
6.875-7.125GHz	802.11ax HEW40	40	2TX
5.925-6.425GHz	802.11ax HEW80	80	2TX
6.425-6.525GHz	802.11ax HEW80	80	2TX
6.525-6.875GHz	802.11ax HEW80	80	2TX
6.875-7.125GHz	802.11ax HEW80	80	2TX
5.925-6.425GHz	802.11ax HEW160	160	2TX
6.425-6.525GHz	802.11ax HEW160	160	2TX
6.525-6.875GHz	802.11ax HEW160	160	2TX
6.875-7.125GHz	802.11ax HEW160	160	2TX

**Radio 0 Beamforming**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11ax HEW20-BF	20	2TX
6.425-6.525GHz	802.11ax HEW20-BF	20	2TX
6.525-6.875GHz	802.11ax HEW20-BF	20	2TX
6.875-7.125GHz	802.11ax HEW20-BF	20	2TX
5.925-6.425GHz	802.11ax HEW40-BF	40	2TX
6.425-6.525GHz	802.11ax HEW40-BF	40	2TX
6.525-6.875GHz	802.11ax HEW40-BF	40	2TX
6.875-7.125GHz	802.11ax HEW40-BF	40	2TX
5.925-6.425GHz	802.11ax HEW80-BF	80	2TX
6.425-6.525GHz	802.11ax HEW80-BF	80	2TX
6.525-6.875GHz	802.11ax HEW80-BF	80	2TX
6.875-7.125GHz	802.11ax HEW80-BF	80	2TX
5.925-6.425GHz	802.11ax HEW160-BF	160	2TX
6.425-6.525GHz	802.11ax HEW160-BF	160	2TX
6.525-6.875GHz	802.11ax HEW160-BF	160	2TX
6.875-7.125GHz	802.11ax HEW160-BF	160	2TX

**Radio 2**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	ax (HEW20), be (EHT20)	5955 ~ 7095	1 ~ 229 [58]
5925 ~ 7125	ax (HEW40), be (EHT40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80), be (EHT80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160), be (EHT160)	6025 ~ 6985	15 ~ 207 [7]
5925 ~ 7125	be (EHT320)	6105 ~ 6905	31 ~ 191 [6]

Radio 2_Full RU_Non-Beamforming

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT20	20	4TX
6.425-6.525GHz	802.11be EHT20	20	4TX
6.525-6.875GHz	802.11be EHT20	20	4TX
6.875-7.125GHz	802.11be EHT20	20	4TX
5.925-6.425GHz	802.11be EHT40	40	4TX
6.425-6.525GHz	802.11be EHT40	40	4TX
6.525-6.875GHz	802.11be EHT40	40	4TX
6.875-7.125GHz	802.11be EHT40	40	4TX
5.925-6.425GHz	802.11be EHT80	80	4TX
6.425-6.525GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
6.875-7.125GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.425-6.525GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
6.875-7.125GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
6.425-6.525GHz	802.11be EHT320	320	4TX
6.525-6.875GHz	802.11be EHT320	320	4TX
6.875-7.125GHz	802.11be EHT320	320	4TX

**Radio 2_Multi-RU_Non-Beamforming**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT80	80	4TX
6.425-6.525GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
6.875-7.125GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.425-6.525GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
6.875-7.125GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
6.425-6.525GHz	802.11be EHT320	320	4TX
6.525-6.875GHz	802.11be EHT320	320	4TX
6.875-7.125GHz	802.11be EHT320	320	4TX

Radio 2_Channel Puncturing_Non-Beamforming

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT80	80	4TX
6.425-6.525GHz	802.11be EHT80	80	4TX
6.525-6.875GHz	802.11be EHT80	80	4TX
6.875-7.125GHz	802.11be EHT80	80	4TX
5.925-6.425GHz	802.11be EHT160	160	4TX
6.425-6.525GHz	802.11be EHT160	160	4TX
6.525-6.875GHz	802.11be EHT160	160	4TX
6.875-7.125GHz	802.11be EHT160	160	4TX
5.925-6.425GHz	802.11be EHT320	320	4TX
6.425-6.525GHz	802.11be EHT320	320	4TX
6.525-6.875GHz	802.11be EHT320	320	4TX
6.875-7.125GHz	802.11be EHT320	320	4TX

**Radio 2_Full RU_Beamforming**

Band	Mode	BWch (MHz)	Nant
5.925-6.425GHz	802.11be EHT20-BF	20	4TX
6.425-6.525GHz	802.11be EHT20-BF	20	4TX
6.525-6.875GHz	802.11be EHT20-BF	20	4TX
6.875-7.125GHz	802.11be EHT20-BF	20	4TX
5.925-6.425GHz	802.11be EHT40-BF	40	4TX
6.425-6.525GHz	802.11be EHT40-BF	40	4TX
6.525-6.875GHz	802.11be EHT40-BF	40	4TX
6.875-7.125GHz	802.11be EHT40-BF	40	4TX
5.925-6.425GHz	802.11be EHT80-BF	80	4TX
6.425-6.525GHz	802.11be EHT80-BF	80	4TX
6.525-6.875GHz	802.11be EHT80-BF	80	4TX
6.875-7.125GHz	802.11be EHT80-BF	80	4TX
5.925-6.425GHz	802.11be EHT160-BF	160	4TX
6.425-6.525GHz	802.11be EHT160-BF	160	4TX
6.525-6.875GHz	802.11be EHT160-BF	160	4TX
6.875-7.125GHz	802.11be EHT160-BF	160	4TX
5.925-6.425GHz	802.11be EHT320-BF	320	4TX
6.425-6.525GHz	802.11be EHT320-BF	320	4TX
6.525-6.875GHz	802.11be EHT320-BF	320	4TX
6.875-7.125GHz	802.11be EHT320-BF	320	4TX

Note:

- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 and EHT320 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ The channel defined in the IEEE Standard P802.11ax™/D6.1.
- ♦ Evaluated EHT20/EHT40/EHT80/EHT160 mode only due to the similar modulation. The power setting of HEW20/HEW40/HEW80/HEW160 mode are the same or lower than EHT20/EHT40/EHT80/EHT160.

1.1.2 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		80		CH7	CH215
484+242	1	242	484	--	V
	2	242	484	V	V
	3	484	242	V	V
	4	484	242	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		160		CH15	CH207
996+484	1	484	996	--	V
	2	484	996	V	V
	3	996	484	V	V
	4	996	484	V	--
996+484+242	1	242	484	996	--
	2	242	484	996	V
	3	484	242	996	V
	4	484	242	996	V
	5	996	242	484	V
	6	996	242	484	V
	7	996	484	242	V
	8	996	484	242	V

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)		6GHz Test CH	
		320		CH31	CH191
2x996+484	1	484	996	996	--
	2	484	996	996	V
	3	996	484	996	V
	4	996	484	996	V
	5	996	996	484	V
	6	996	996	484	V
	7	484	996	996	--
	8	484	996	996	--
	9	996	484	996	--
	10	996	484	996	--
	11	996	996	484	--
	12	996	996	484	--
3x996	1	996	996	996	--
	2	996	996	996	V
	3	996	996	996	V
	4	996	996	996	V
3x996+484	1	484	996	996	--
	2	484	996	996	V
	3	996	484	996	V
	4	996	484	996	V
	5	996	996	484	V
	6	996	996	484	V
	7	996	996	484	V
	8	996	996	484	V

1.1.3 Worst case of MRU (static preamble puncturing) evaluation procedure

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated PSD testing
5. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
6. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 2 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.
7. Use worst configuration of MRU(static preamble puncturing) and perform MASK measurements by conducted method .

**1.1.4 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	WHAYU	C393-510253-A	Dipole	I-Pex	6E	Radio 2
2	WHAYU	C393-510253-A	Dipole	I-Pex	6E	Radio 2
3	WHAYU	C393-510253-A	Dipole	I-Pex	6E	Radio 2
4	WHAYU	C393-510253-A	Dipole	I-Pex	6E	Radio 2
5	WHAYU	C393-510253-A	PIFA	I-Pex	Scan 2.4G+5G+6E	Radio 0
6	WHAYU	C393-510253-A	PIFA	I-Pex	Scan 2.4G+5G+6E	Radio 0
7	WHAYU	C393-510253-A	PIFA	I-Pex	2.4G+5G	Radio 1_2.4G Radio 3_5G
8	WHAYU	C393-510253-A	PIFA	I-Pex	2.4G+5G	Radio 1_2.4G Radio 3_5G
9	WHAYU	C393-510253-A	PIFA	I-Pex	2.4G+5G	Radio 1_2.4G Radio 3_5G
10	WHAYU	C393-510253-A	PIFA	I-Pex	2.4G+5G	Radio 1_2.4G Radio 3_5G
11	WHAYU	C393-510253-A	Dipole	I-Pex	BT	-
12	WHAYU	C393-510253-A	PIFA	I-Pex	GPS	-

Ant.	Port	Gain (dBi)										
		2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	BT	GPS
1	1	-	-	-	-	-	4.41	4.44	4.06	3.96	-	-
2	2	-	-	-	-	-	5.42	4.8	4.15	4.72	-	-
3	3	-	-	-	-	-	5.35	5.01	5.61	4.45	-	-
4	4	-	-	-	-	-	4.2	3.99	4.51	5.75	-	-
5	1	4.2	6.1				6.4				-	-
6	2	4.3	6.3				6.5				-	-
7	1	2.52	5.01	4.18	4.47	4.79	-	-	-	-	-	-
8	2	2.26	4.71	4.72	4.48	5.01	-	-	-	-	-	-
9	3	2.81	3.56	3.49	5.25	4.23	-	-	-	-	-	-
10	4	2.36	5.14	4.59	4.41	4.31	-	-	-	-	-	-
11	1	-	-	-	-	-	-	-	-	-	4.8	-
12	1	-	-	-	-	-	-	-	-	-	-	2.7



Composite Gain (dBi)									
	2.4G	UNII-1	UNII-2A	UNII-2C	UNII-3	6.175G	6.475G	6.695G	6.995G
DG [1SS]	5.74	7.95	7.31	8.43	8.69	7.81	7.66	6.82	6.65
DG [2SS]	2.81	5.14	4.72	5.43	5.69	5.42	5.01	5.61	5.75
DG [4SS]	2.81	5.14	4.72	5.25	5.01	5.42	5.01	5.61	5.75

Note 1: The EUT has twelve antennas.

Note 2: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP392143.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax mode (2TX/2RX) < **Radio 0** >

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (4TX/4RX) < **Radio 1** >

Ant. 7 (port 1), Ant. 8 (port 2), Ant. 9 (port 3) and Ant. 10 (port 4) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode(2TX/2RX) < **Radio 0** >

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) < **Radio 3** >

Ant. 7 (port 1), Ant. 8 (port 2), Ant. 9 (port 3) and Ant. 10 (port 4) could transmit/receive simultaneously.

For 6GHz function:

For IEEE 802.11axmode (2TX/2RX) < **Radio 0** >

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For IEEE 802.11 ax/be mode (4TX/4RX) < **Radio 2** >

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 11 could transmit/receive.

**1.1.5 EUT Information**

Operational Condition			
EUT Power Type	From AC Adapter / PoE		
EUT Function	☒	Indoor Access Point (Radio 2)	☒ Subordinate (Radio 2)
	☒	Indoor Client (Radio 0)	☐ Standard Power Access Point
	☐	Dual Client	☐ Standard Client
	☐	Fixed Client	☐ Very Low Power
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☐ Partial RU
	☒	MRU (static preamble puncturing)	☐ MRU (dynamic preamble puncturing)
Channel Puncturing	☒	Support	☐ Not support
Software / Firmware Version for CBP		Linux version 5.4.213 (timhuang@dbdell-HP-ProDesk-600-G1-T WR) (gcc version 7.5.0 (OpenWrt GCC 7.5.0 unknown)) #0 SMP PREEMPT Mon Dec 25 09:27:25 2023	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

**1.1.6 Mode Test Duty Cycle****Radio 0_Non-Beamforming**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20_Nss1,(MCS0)_2TX	0.817	0.88	5.446m	300
802.11ax HEW40_Nss1,(MCS0)_2TX	0.769	1.14	5.446m	300
802.11ax HEW80_Nss1,(MCS0)_2TX	0.795	1	5.446m	300
802.11ax HEW160_Nss1,(MCS0)_2TX	0.816	0.88	5.446m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 2_Full RU_Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT20_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT40_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT80_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT160_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT320_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 2_Multi-RU_Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT80_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT160_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT320_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 2_Channel Puncturing_Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT80_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT160_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT320_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 0_Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	0.817	0.88	5.446m	300
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	0.769	1.14	5.446m	300
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	0.795	1	5.446m	300
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	0.816	0.88	5.446m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

**Radio 2_Full RU_Beamforming**

Mode	DC	DCF(dB)	T(s)	VBW(Hz) $\geq 1/T$
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT40-BF_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT160-BF_Nss1,(MCS0)_4TX	0.998	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)
802.11be EHT320-BF_Nss1,(MCS0)_4TX	0.997	0.01	n/a (DC $\geq$ 0.98)	n/a (DC $\geq$ 0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.1.7 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR392143AE

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Replacement of FEM module with alternative component.	All RF Item (Radio 2)



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v03
- ♦ KDB 987594 D02 v03
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 662911 D03 v01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Rian Chung	21.1~23.2°C / 54~58%	09/Nov/2024
RF Conducted_ Radio 2_Full RU	TH07-HY	Xun Hsieh	23.2~24.1°C / 55~59%	05/Nov/2024
Radiated (Co-location)	03CH02-HY	Darren Cho	21.8~22.7°C / 56~59%	05/Mar/2024~06/Mar/2024
Contention Based Protocol	DFS01-HY	John Yang	23.2~25.0°C / 55~61%	06/Nov/2024~07/Nov/2024
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	EL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated_ Radio 0	03CH24-HY	Daniel Lin	20.3~21.5°C / 59~65%	17/Jan/2024~06/Feb/2024
Radiated_ Radio 2_Full RU	03CH24-HY	Jack Tang	21.3~22.6°C / 52~58%	18/Nov/2024~20/Nov/2024
Radiated (Radio 2 Multi-RU & Channel Puncturing)	03CH26-HY	Ivan Chung	20.5~22.3°C / 50~57%	03/Dec/2024~05/Dec/20244
RF Conducted_ Radio 0	TH06-HY	Johnny Yu	21.8~22.7°C / 51~63%	16/Jan/2024~22/Mar/2024
RF Conducted_ Radio 2_Multi-RU & Channel Puncturing	TH06-HY	Johnny Yu	21.6~23.6°C / 49~57%	25/Nov/2024~28/Nov/2024
Radiated (Co-location)	03CH26-HY	Henry Ho	22.3~23.1°C / 55~56%	11/Dec/2024



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	4.53 dB	Confidence levels of 95%
Emission Bandwidth	1.5 MHz	Confidence levels of 95%
Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Contention-Based Protocol	1 ms	Confidence levels of 95%
Frequency Stability	1.18 ppm	Confidence levels of 95%
Temperature	0.41 °C	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	Qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Radio 0_Non-Beamforming

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5955MHz	-1
6195MHz	-1
6415MHz	-1.5
6435MHz	-1.5
6475MHz	-1.5
6515MHz	-1
6535MHz	-1.5
6695MHz	-2
6875MHz	-1.5
6895MHz	-2
6995MHz	-2
7095MHz	-0.5
802.11ax HEW40_Nss1,(MCS0)_2TX	-
5965MHz	2.5
6205MHz	2.5
6405MHz	2
6445MHz	2
6485MHz	2
6525MHz	2.5
6565MHz	1.5
6685MHz	1.5
6885MHz	2
6925MHz	1.5
7005MHz	2
7085MHz	2.5
802.11ax HEW80_Nss1,(MCS0)_2TX	-
5985MHz	5.5
6225MHz	5.5



Mode	Power Setting
6385MHz	5.5
6465MHz	5.5
6545MHz	5
6625MHz	5
6705MHz	4.5
6785MHz	5.5
6865MHz	5.5
6945MHz	5
7025MHz	6
802.11ax HEW160_Nss1,(MCS0)_2TX	-
6025MHz	8.5
6185MHz	9
6345MHz	8.5
6505MHz	8.5
6665MHz	8
6825MHz	8.5
6985MHz	8

**Radio 2_Full RU_Non-Beamforming**

Mode	Power Setting
802.11be EHT20_Nss1,(MCS0)_4TX	-
5955MHz	6.5
6195MHz	6.5
6415MHz	6.5
6435MHz	6.5
6475MHz	6.5
6515MHz	6
6535MHz	7
6695MHz	7.5
6875MHz	7
6895MHz	7.5
6995MHz	7.5
7095MHz	9
802.11be EHT40_Nss1,(MCS0)_4TX	-
5965MHz	9
6205MHz	9.5
6405MHz	10
6445MHz	10
6485MHz	10
6525MHz	9.5
6565MHz	10.5
6685MHz	10.5
6885MHz	10.5
6925MHz	10.5
7005MHz	10.5
7085MHz	11.5
802.11be EHT80_Nss1,(MCS0)_4TX	-
5985MHz	12
6225MHz	12.5
6385MHz	13
6465MHz	12.5
6545MHz	12.5
6625MHz	13.5
6705MHz	13.5
6785MHz	13



Mode	Power Setting
6865MHz	13
6945MHz	14
7025MHz	13.5
802.11be EHT160_Nss1,(MCS0)_4TX	-
6025MHz	14.5
6185MHz	15
6345MHz	15
6505MHz	15
6665MHz	16
6825MHz	16
6985MHz	16
802.11be EHT320_Nss1,(MCS0)_4TX	-
6105MHz	16.5
6265MHz	16.5
6425MHz	16.5
6585MHz	16.5
6745MHz	16.5
6905MHz	16.5

**Radio 2_Multi-RU_Non-Beamforming**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
5985MHz	7.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
5985MHz	6
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6225MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6225MHz	7
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6385MHz	9
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6385MHz	7
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6465MHz	9.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6465MHz	8
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6545MHz	9
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6545MHz	7.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6625MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6625MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6705MHz	10



Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6705MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6785MHz	10
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6785MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6865MHz	10
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6865MHz	8.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
6945MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
6945MHz	9
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-
7025MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-
7025MHz	9
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6025MHz	12
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6025MHz	10.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6025MHz	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6185MHz	13
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242	-



Mode	Power Setting
MRU 1_4TX	
6185MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6185MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6345MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6345MHz	12
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6345MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6505MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6505MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6505MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6665MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6665MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6665MHz	12
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6825MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6825MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-



Mode	Power Setting
6825MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-
6985MHz	13
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-
6985MHz	12
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-
6985MHz	11
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6105MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6105MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6105MHz	12.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-
6105MHz	12.5
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6265MHz	13
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6265MHz	13
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-
6265MHz	13
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6425MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6425MHz	14



Mode	Power Setting
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6425MHz	12.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-
6425MHz	13
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6585MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6585MHz	13
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6585MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-
6585MHz	12.5
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6745MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6745MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6745MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-
6745MHz	12.5
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-
6905MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU	-



FCC RADIO TEST REPORT

Report No. : FR392143-11AE

Mode	Power Setting
1_4TX	
6905MHz	12.5

**Radio 2_Channel Puncturing_Non-Beamforming**

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
5985MHz	9
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
5985MHz	9
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
5985MHz	9
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
5985MHz	9.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6225MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6225MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6225MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6225MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6385MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6385MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6385MHz	11
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6385MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6465MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6465MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6465MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6465MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6545MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-



Mode	Power Setting
6545MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6545MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6545MHz	10
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6625MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6625MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6625MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6625MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6705MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6705MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6705MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6705MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6785MHz	11
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6785MHz	11
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6785MHz	11
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6785MHz	11
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6865MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6865MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6865MHz	10.5



Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6865MHz	10.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
6945MHz	12
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
6945MHz	12
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
6945MHz	12
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
6945MHz	12
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
7025MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
7025MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
7025MHz	11.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
7025MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6025MHz	12.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-



Mode	Power Setting
6025MHz	12
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6025MHz	12
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6025MHz	12
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6025MHz	11.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6185MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6185MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6185MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6185MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6185MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6185MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6185MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6345MHz	14



Mode	Power Setting
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6345MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6345MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6345MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6345MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6345MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-



Mode	Power Setting
6505MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6505MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6505MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6505MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6505MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6665MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6665MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6665MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6665MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6665MHz	14
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6825MHz	14.5



Mode	Power Setting
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6825MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6825MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6825MHz	13
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6825MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6825MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-



Mode	Power Setting
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-
6985MHz	14.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-
6985MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-
6985MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-
6985MHz	13.5
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-
6985MHz	13.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6105MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6105MHz	14.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6105MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6105MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6105MHz	15



Mode	Power Setting
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6105MHz	14
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6265MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-



Mode	Power Setting
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6265MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6265MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6265MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6265MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6265MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6265MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6265MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6265MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6265MHz	13.5



Mode	Power Setting
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6265MHz	13.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6425MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6425MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6425MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6425MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6425MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-



Mode	Power Setting
6425MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6425MHz	13.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6425MHz	14
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-
6585MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6585MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6585MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6585MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6585MHz	15



Mode	Power Setting
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6585MHz	14.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6585MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6585MHz	14
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-



Mode	Power Setting
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6745MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6745MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6745MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6745MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6745MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6745MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6745MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6745MHz	14



Mode	Power Setting
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6745MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6745MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6745MHz	14.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-
6905MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-
6905MHz	13.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-
6905MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-
6905MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-
6905MHz	15.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-
6905MHz	15
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-



Mode	Power Setting
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-
6905MHz	14
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-
6905MHz	14.5
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-
6905MHz	14.5

**Radio 0_Beamforming**

Mode	Power Setting
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
5955MHz	-1
6195MHz	-1
6415MHz	-1.5
6435MHz	-1.5
6475MHz	-1.5
6515MHz	-1
6535MHz	-1.5
6695MHz	-2
6875MHz	-1.5
6895MHz	-2
6995MHz	-2
7095MHz	-0.5
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-
5965MHz	2.5
6205MHz	2.5
6405MHz	2
6445MHz	2
6485MHz	2
6525MHz	2.5
6565MHz	1.5
6685MHz	1.5
6885MHz	2
6925MHz	1.5
7005MHz	2
7085MHz	2.5
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-
5985MHz	5.5
6225MHz	5.5
6385MHz	5.5
6465MHz	5.5
6545MHz	5
6625MHz	5
6705MHz	4.5
6785MHz	5.5



Mode	Power Setting
6865MHz	5.5
6945MHz	5
7025MHz	6
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-
6025MHz	8.5
6185MHz	9
6345MHz	8.5
6505MHz	8.5
6665MHz	8
6825MHz	8.5
6985MHz	8

**Radio 2_Full RU_Beamforming**

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-
5955MHz	6.5
6195MHz	6.5
6415MHz	6.5
6435MHz	6.5
6475MHz	6.5
6515MHz	6
6535MHz	7
6695MHz	7.5
6875MHz	7
6895MHz	7.5
6995MHz	7.5
7095MHz	9
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-
5965MHz	9
6205MHz	9.5
6405MHz	10
6445MHz	10
6485MHz	10
6525MHz	9.5
6565MHz	10.5
6685MHz	10.5
6885MHz	10.5
6925MHz	10.5
7005MHz	10.5
7085MHz	11.5
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-
5985MHz	12
6225MHz	12.5
6385MHz	13
6465MHz	12.5
6545MHz	12.5
6625MHz	13.5
6705MHz	13.5
6785MHz	13



Mode	Power Setting
6865MHz	13
6945MHz	14
7025MHz	13.5
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-
6025MHz	14.5
6185MHz	15
6345MHz	15
6505MHz	15
6665MHz	16
6825MHz	16
6985MHz	16
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-
6105MHz	16.5
6265MHz	16.5
6425MHz	16.5
6585MHz	16.5
6745MHz	16.5
6905MHz	16.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.) Unwanted Emissions Contention Based Protocol Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter Mode (Radio 0, Radio 2)		
2	PoE Mode (Radio 0)		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V(Radio 2)		V(Radio 0)



The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Operating Mode	CTX
1	Radio 1 + Radio 3 + Radio 2 + Radio 0 (WLAN 2.4GHz) + Bluetooth
2	Radio 1 + Radio 3 + Radio 2 + Radio 0 (WLAN 5GHz) + Bluetooth
	Radio 1 + Radio 3 + Radio 2 + Radio 0 (WLAN 6GHz) + Bluetooth
Refer to Sporton Test Report No.: FA392143-11 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	



2.3 Accessories

Accessories				
Ceiling	Brand Name	ARISTA	Model Name	MNT-AP-15MM

Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Adapter	ASIAN POWER DEVICES	WA-48B12R	-	Provided by Customer


Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	AC Adapter	ASIAN POWER DEVICES	WA-48B12R	-	Provided by Customer


Support Equipment – Radiated_Radio 0					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Adapter	ASIAN POWER DEVICES	WA-48B12R	-	Provided by Customer
2	RJ45 Cable	Power sync	CAT-6E-03	-	-
3	AC Power Cable (Remote)	Power sync	PW-GPC180-3	-	-
4	PoE (Remote)	PHIHONG	POE60U-1BT-5	-	-

Support Equipment – Radiated_Radio 2					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Adapter	ASIAN POWER DEVICES	WA-48B12R	-	Provided by Customer


Support Equipment – Contention Based Protocol					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Client(Slave)	ARISTA	C-460	-	-
2	AC Adapter	ASIAN POWER DEVICES	WA-48B12R	-	Provided by Customer
3	PoE	Microsemi	PD-9001GR	-	-
4	Notebook	DELL	Latitude E5550	-	-

2.5 Test Setup Diagram

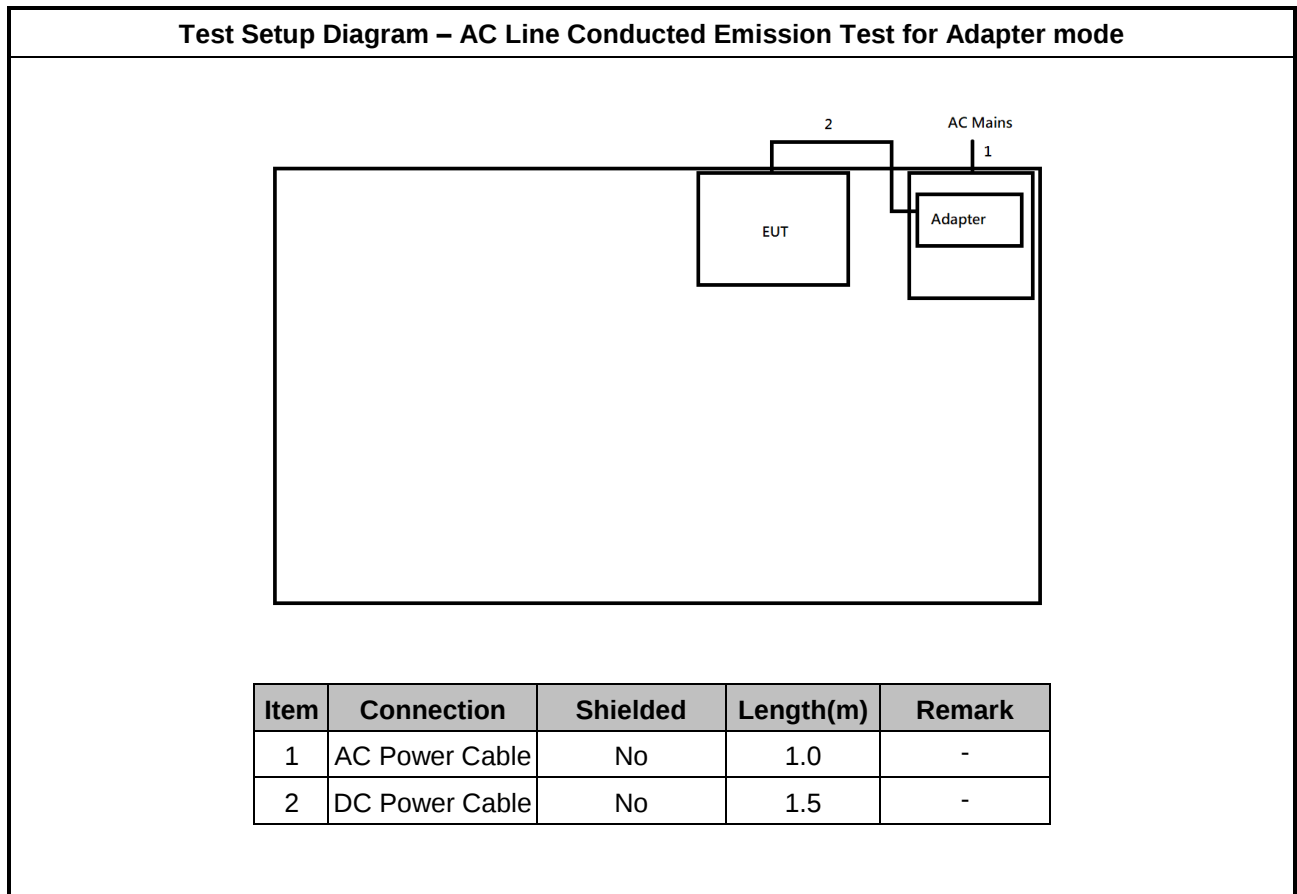

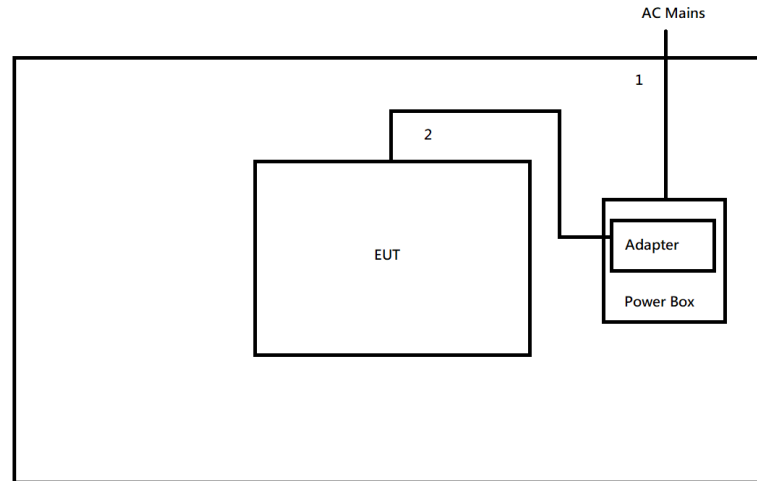Test Setup Diagram - Radiated Test for Adapter mode (Radio 0, Radio 2)


Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.8	-
2	DC Power Cable	No	1.5	-

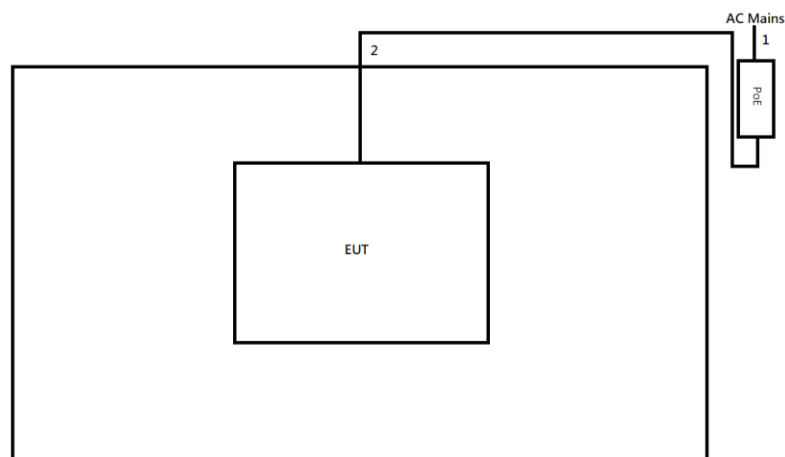Test Setup Diagram - Radiated Test for PoE mode (Radio 0)


Item	Connection	Shielded	Length(m)	Remark
1	AC Power Cable	No	1.8	-
2	RJ45 Cable	No	3.0	-



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

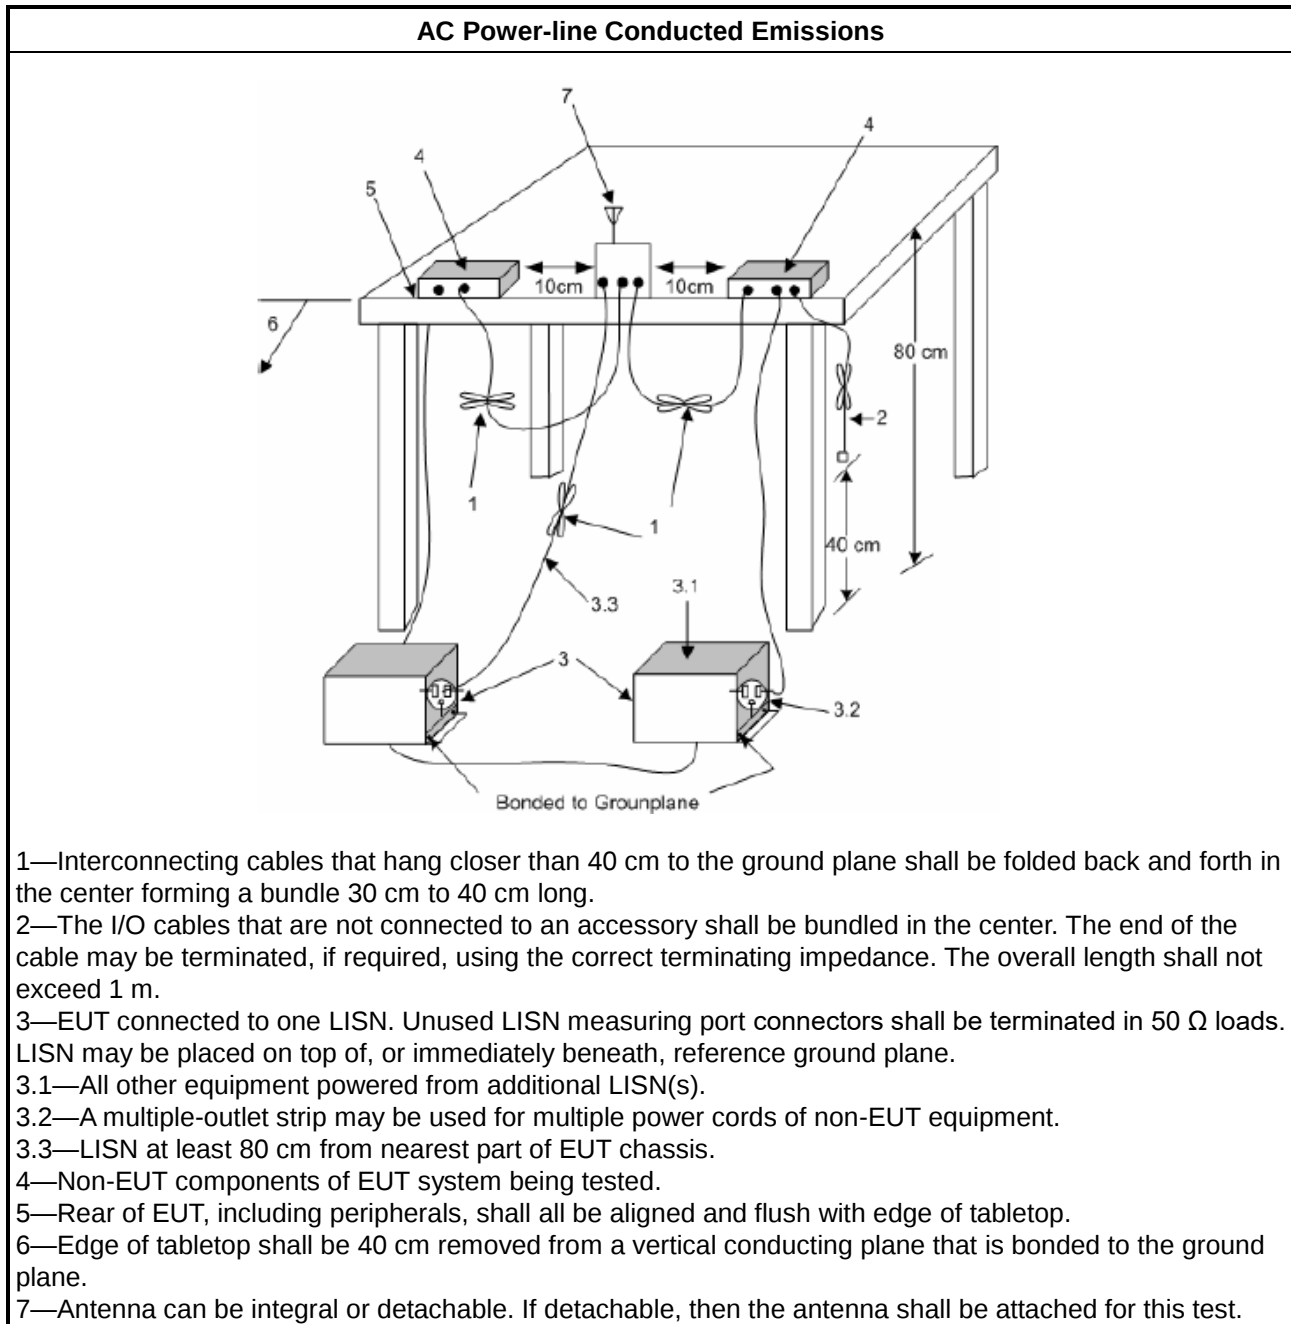

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☒	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☒	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

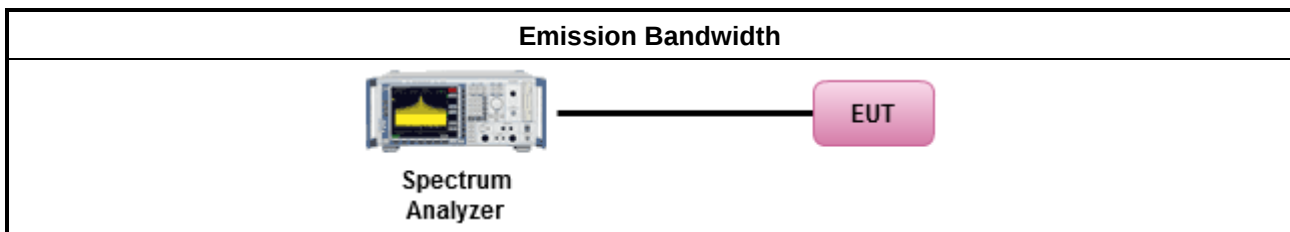

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of a standard power access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.
	■ For very low power device : e.i.r.p < 14 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p < 30 dBm.
	■ For client device control of an indoor access point : e.i.r.p < 24 dBm.


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Output Power Setting	
	Duty cycle $\geq 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$
☐	For radiated measurement.
	- Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as KDB 412172, clause 2.2 for EIRP calculation.

3.3.4 Test Setup

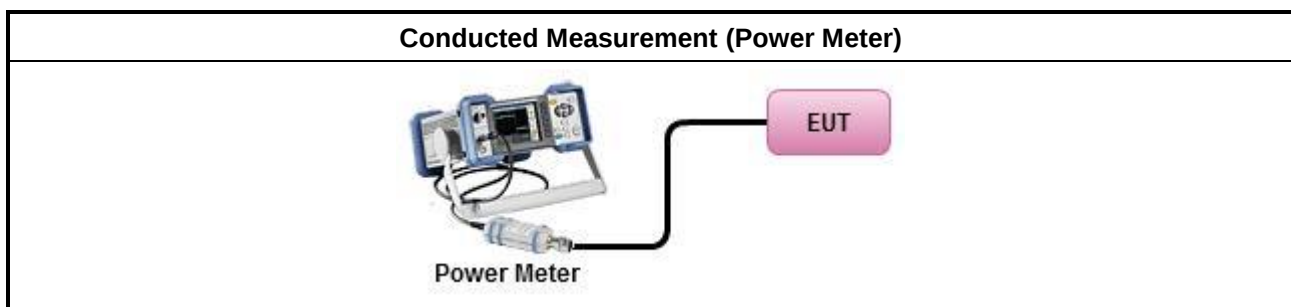

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒ For the 5.925 ~ 6.425 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.425 ~ 6.525 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☒ For the 6.525 ~ 6.875 GHz band:	
	■ For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
	■ For very low power device : e.i.r.p < -5 dBm.
☒ For the 6.875 ~ 7.125 GHz band:	
	■ For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
	■ For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☒	Refer as FCC KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☒	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☒	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☐ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as KDB 412172, clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

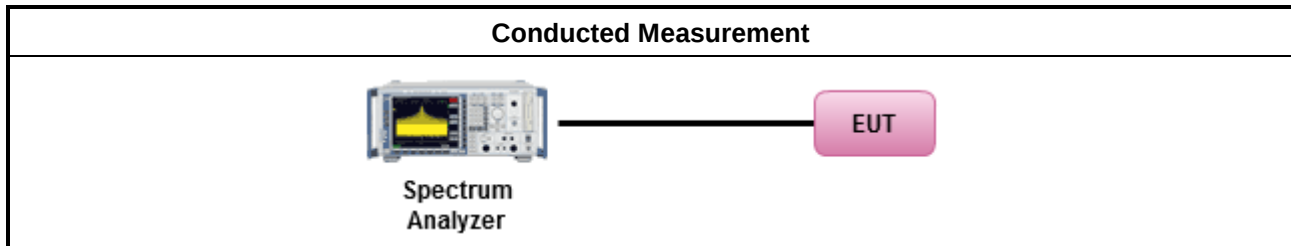

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

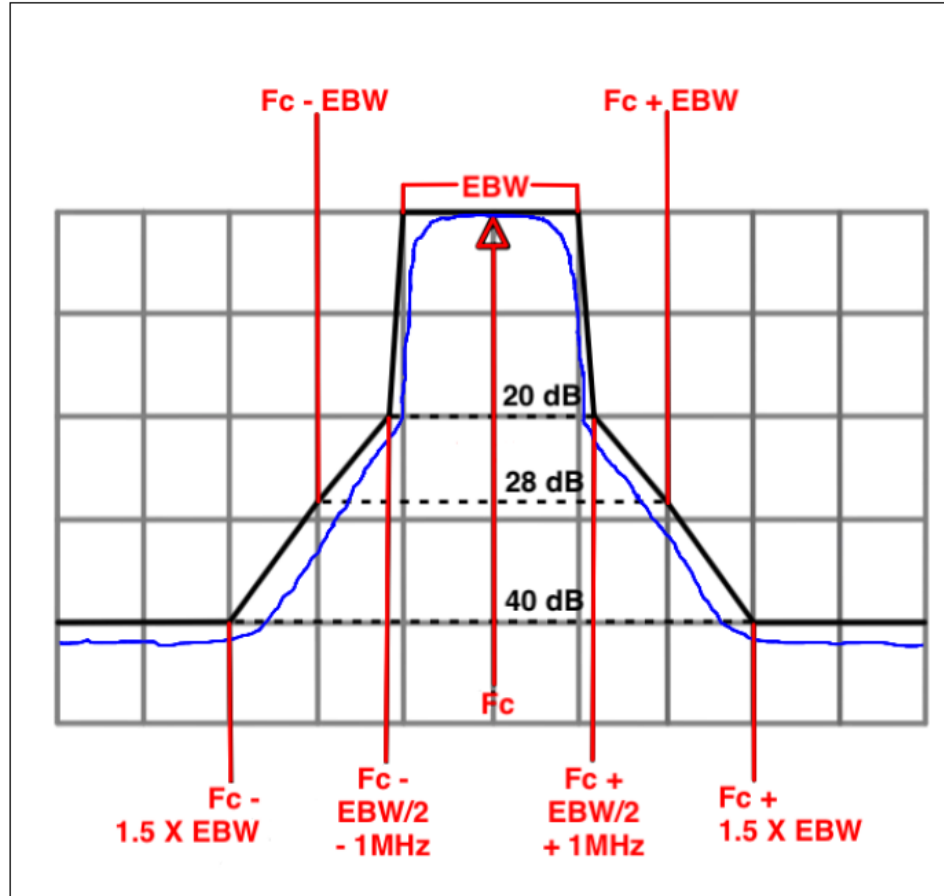



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	




▪ Use the following spectrum analyzer settings:	
	▪ Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	▪ Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	▪ Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.5.5 Test Setup

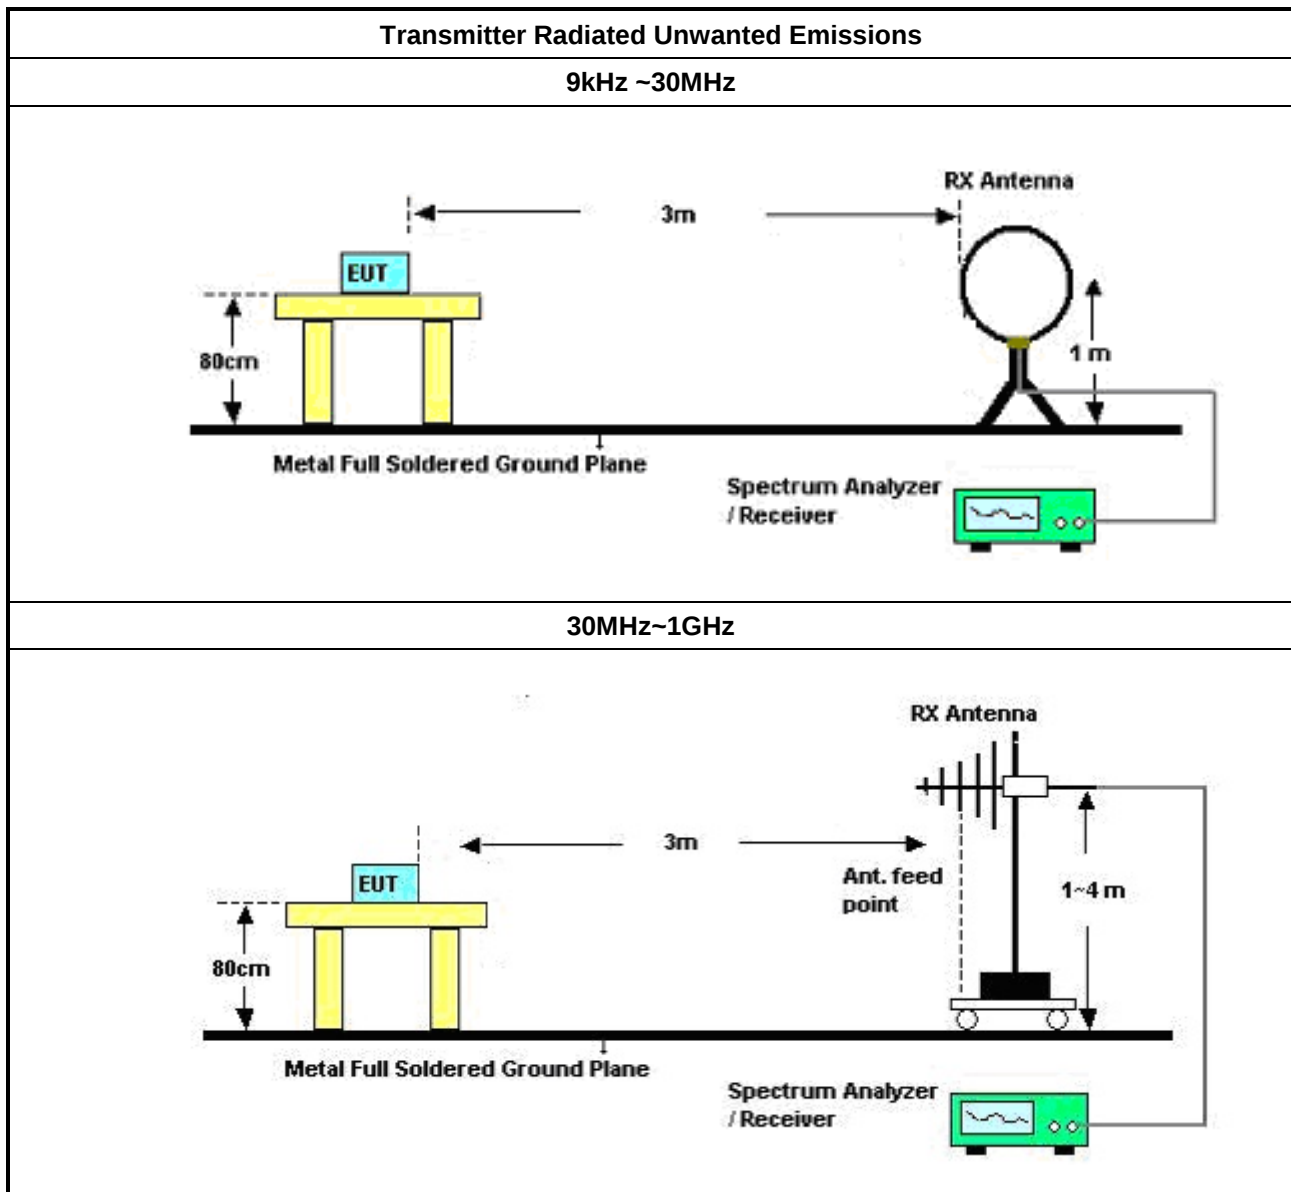

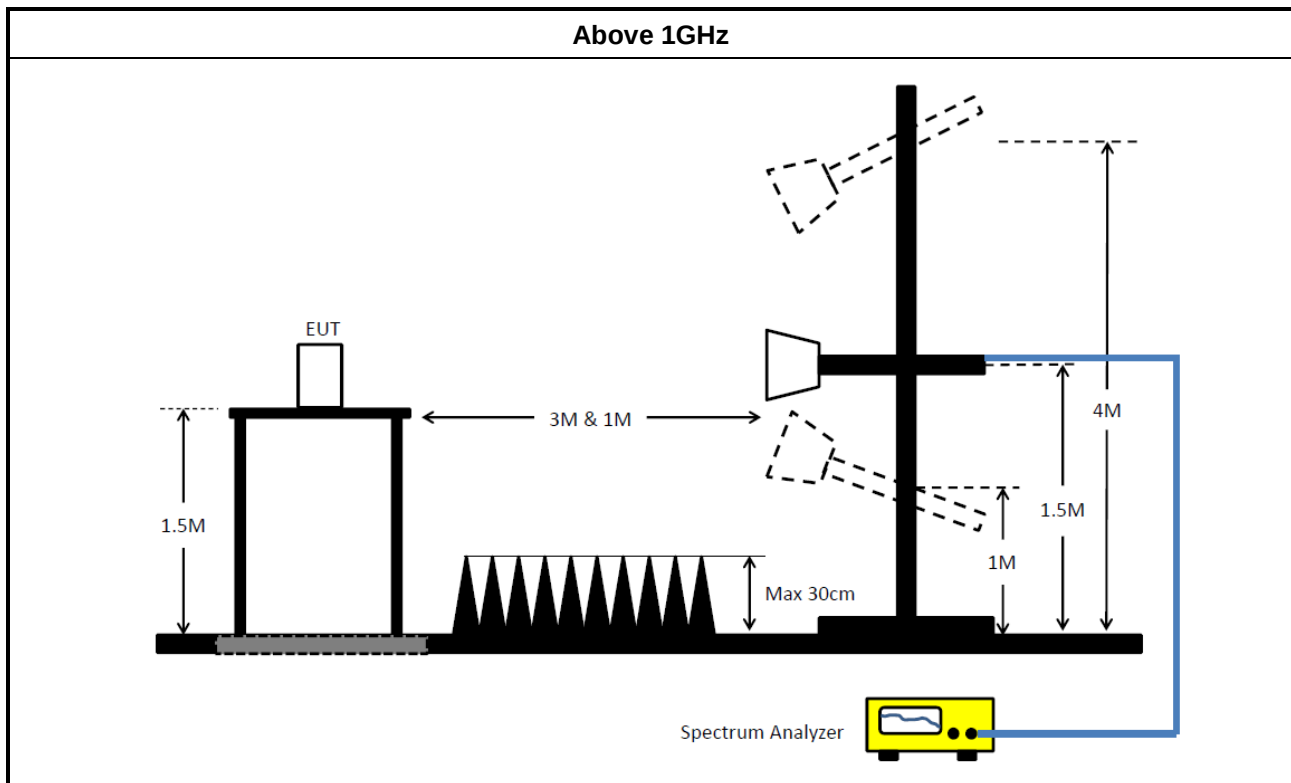

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

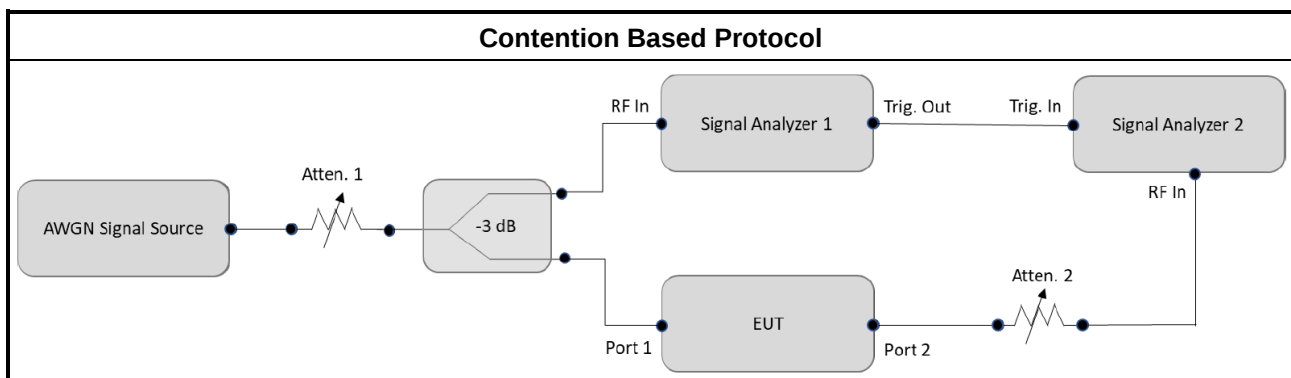

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	17/May/2024	16/May/2025
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101274	9kHz ~ 30MHz	18/Jun/2024	17/Jun/2025
LISN(Artificial Mains Network)	SCHWARZBECK	NSLK 8127	8127477	9kHz ~ 30MHz	12/Apr/2024	11/Apr/2025
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	27/Feb/2024	26/Feb/2025
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9kHz ~ 30MHz	17/Oct/2024	16/Oct/2025
SENSE-EMI	Sporton	V5.11.3	N/A	N/A	N/A	N/A

Instrument for Conducted Test_Radio 0

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2023	29/Oct/2024
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	20/Oct/2023	19/Oct/2024
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	29/Mar/2023	28/Mar/2024
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	29/Mar/2023	28/Mar/2024
SENSE-15407_NII	Sporton	V5.11.11	N/A	N/A	N/A	N/A

Instrument for Conducted Test_Radio 2_Full RU

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	9kHz~40GHz	02/Feb/2024	01/Feb/2025
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	16/Oct/2024	15/Oct/2025
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	15/Dec/2023	14/Dec/2024
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	15/Dec/2023	14/Dec/2024
SENSE-15407_NII	Sporton	V5.11.20	N/A	N/A	N/A	N/A

Instrument for Conducted Test_Radio 2_Multi-RU &Channel Puncturing

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	28/Oct/2024	27/Oct/2025
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	16/Oct/2024	15/Oct/2025
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	01/Apr/2024	31/Mar/2025
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	02/Apr/2024	01/Apr/2025
SENSE-15407_NII	Sporton	V5.11.20	N/A	N/A	N/A	N/A

**Instrument for Radiated Test_Radio 0 (03CH24-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	30MHz~1GHz 3m	17/Aug/2023	16/Aug/2024
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	03/Aug/2023	02/Aug/2024
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	27/Dec/2023	26/Dec/2024
Signal Analyzer	ROHDE & SCHWARZ	FSV3044	101345	10Hz~44GHz	10/Aug/2023	09/Aug/2024
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	23/Mar/2023	22/Mar/2024
Bilog Antenna & 6dB Attenuator	TESEQ / Woken	CBL 6112D / 00800N1D01N-06	35376 / 02	30MHz~1GHz	17/Apr/2023	16/Apr/2024
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	17/Aug/2023	16/Aug/2024
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	21/Aug/2023	20/Aug/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB002	9kHz~1GHz	21/Jul/2023	20/Jul/2024
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB002	1GHz~40GHz	21/Jul/2023	20/Jul/2024
Pre-Amplifier	Aglient	8447D	2944A06292	30MHz~1GHz	26/Apr/2023	25/Apr/2024
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	10/Aug/2023	09/Aug/2024
Microwave Prempplier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	16/Mar/2023	15/Mar/2024
SENSE-15407-NII	Sporton	V5.11.16	NA	NA	NA	NA

**Instrument for Radiated Test_Radio 2_Full RU (03CH24-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	30MHz~1GHz 3m	16/Aug/2024	15/Aug/2025
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	30/Jul/2024	29/Jul/2025
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	27/Dec/2023	26/Dec/2024
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101345	10Hz~44GHz	27/Aug/2024	26/Aug/2025
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	19/Mar/2024	18/Mar/2025
Bilog Antenna & 6dB Attenuator	TESEQ / Woken	CBL 6112D / 00800N1D01N-06	35376 / 02	30MHz~1GHz	14/Apr/2024	13/Apr/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	15/Aug/2024	14/Aug/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	04/Jun/2024	05/Jun/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	03CH24-cable-01	9kHz~40GHz	01/Oct/2024	30/Sep/2025
Pre-Amplifier	Aglient	8447D	2944A06292	30MHz~1GHz	18/Apr/2024	17/Apr/2025
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	12/Aug/2024	11/Aug/2025
Microwave Prempplier	EMC INSTRUMENTS	EM18G40G	060604	18GHz ~ 40GHz	19/Apr/2024	18/Apr/2025
SENSE-15407-NII	Sporton	V5.11.20	NA	NA	NA	NA

Instrument for Radiated Test_Radio 2_Multi-RU &Channel Puncturing (03CH26-HY)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	07/Aug/2024	06/Aug/2025
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	09/Oct/2024	08/Oct/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	11/Jul/2024	10/Jul/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	04/Jun/2024	03/Jun/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	21/Oct/2024	20/Oct/2025
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	24/May/2024	23/May/2025
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	15/Mar/2024	14/Mar/2025
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	15/Apr/2024	14/Apr/2025
SENSE-15407-NII	Sporton	V5.11.20	NA	NA	NA	NA

**Instrument for Radiated Test (Co-location)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	07/Aug/2024	06/Aug/2025
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	09/Oct/2024	08/Oct/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	11/Jul/2024	10/Jul/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	04/Oct/2024	03/Oct/2025
RF Cable	HUBER+SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	21/Oct/2024	20/Oct/2025
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	24/May/2024	23/May/2025
Microwave Preamplifier	Agilent	8449B	3008A02602	1GHz ~18GHz	15/Mar/2024	14/Mar/2025
SENSE-EMI	Sporton	V5.11.8	NA	NA	NA	NA

Instrument for Contention-Based Protocol Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSP40	100593	9 kHz ~ 40GHz	11/Mar/2024	10/Mar/2025
Vector Signal Generator	Keysight	N5182B	MY53051912	9kHz~6GHz	29/Feb/2024	28/Feb/2025
Signal Generator	Keysight	N5171B	MY53051240	9kHz~6GHz	21/Nov/2023	20/Nov/2024
DFS-Adaptivity	Sporton	Ver 2.10	N/A	N/A	N/A	N/A
Adaptivity Analysis-5G	Sporton	Ver 2.10	N/A	N/A	N/A	N/A




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	156.109k	50.93	65.67	-14.74	Neutral

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	150.6k	49.11	65.96	-16.85	Line
Mode 1	Pass	AV	150.6k	31.71	55.96	-24.25	Line
Mode 1	Pass	QP	173.183k	47.64	64.80	-17.16	Line
Mode 1	Pass	AV	173.183k	29.89	54.80	-24.91	Line
Mode 1	Pass	QP	254.063k	36.14	61.62	-25.48	Line
Mode 1	Pass	AV	254.063k	23.40	51.62	-28.22	Line
Mode 1	Pass	QP	633.814k	34.15	56.00	-21.85	Line
Mode 1	Pass	AV	633.814k	25.69	46.00	-20.31	Line
Mode 1	Pass	QP	1.652M	21.59	56.00	-34.41	Line
Mode 1	Pass	AV	1.652M	18.23	46.00	-27.77	Line
Mode 1	Pass	QP	7.869M	28.35	60.00	-31.65	Line
Mode 1	Pass	AV	7.869M	23.25	50.00	-26.75	Line
Mode 1	Pass	QP	156.109k	50.93	65.67	-14.74	Neutral
Mode 1	Pass	AV	156.109k	33.16	55.67	-22.51	Neutral
Mode 1	Pass	QP	193.664k	44.67	63.88	-19.21	Neutral
Mode 1	Pass	AV	193.664k	27.36	53.88	-26.52	Neutral
Mode 1	Pass	QP	290.996k	31.54	60.49	-28.95	Neutral
Mode 1	Pass	AV	290.996k	18.75	50.49	-31.74	Neutral
Mode 1	Pass	QP	633.814k	30.45	56.00	-25.55	Neutral
Mode 1	Pass	AV	633.814k	22.56	46.00	-23.44	Neutral
Mode 1	Pass	QP	2.832M	21.90	56.00	-34.10	Neutral
Mode 1	Pass	AV	2.832M	18.73	46.00	-27.27	Neutral
Mode 1	Pass	QP	7.652M	28.23	60.00	-31.77	Neutral
Mode 1	Pass	AV	7.652M	23.09	50.00	-26.91	Neutral

Conducted Emissions at Powerline_Mode 1

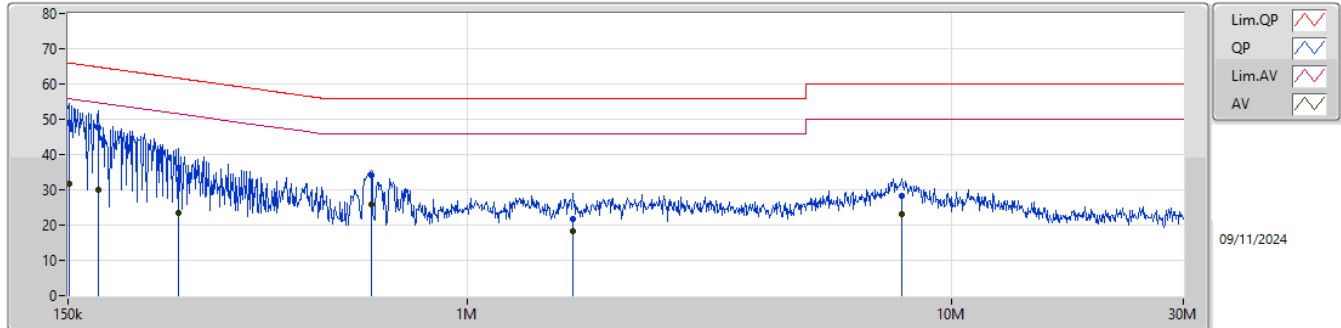

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150.6k	49.11	65.96	-16.85	19.70	Line	-	29.41	9.66	0.07	9.97						
AV	150.6k	31.71	55.96	-24.25	19.70	Line	-	12.01	9.66	0.07	9.97						
QP	173.183k	47.64	64.80	-17.16	19.70	Line	-	27.94	9.65	0.08	9.97						
AV	173.183k	29.89	54.80	-24.91	19.70	Line	-	10.19	9.65	0.08	9.97						
QP	254.063k	36.14	61.62	-25.48	19.72	Line	-	16.42	9.65	0.10	9.97						
AV	254.063k	23.40	51.62	-28.22	19.72	Line	-	3.68	9.65	0.10	9.97						
QP	633.814k	34.15	56.00	-21.85	19.74	Line	-	14.41	9.66	0.10	9.98						
AV	633.814k	25.69	46.00	-20.31	19.74	Line	-	5.95	9.66	0.10	9.98						
QP	1.652M	21.59	56.00	-34.41	19.74	Line	-	1.85	9.67	0.10	9.97						
AV	1.652M	18.23	46.00	-27.77	19.74	Line	-	-1.51	9.67	0.10	9.97						
QP	7.869M	28.35	60.00	-31.65	19.74	Line	-	8.61	9.70	0.06	9.98						
AV	7.869M	23.25	50.00	-26.75	19.74	Line	-	3.51	9.70	0.06	9.98						

Conducted Emissions at Powerline_Mode 1

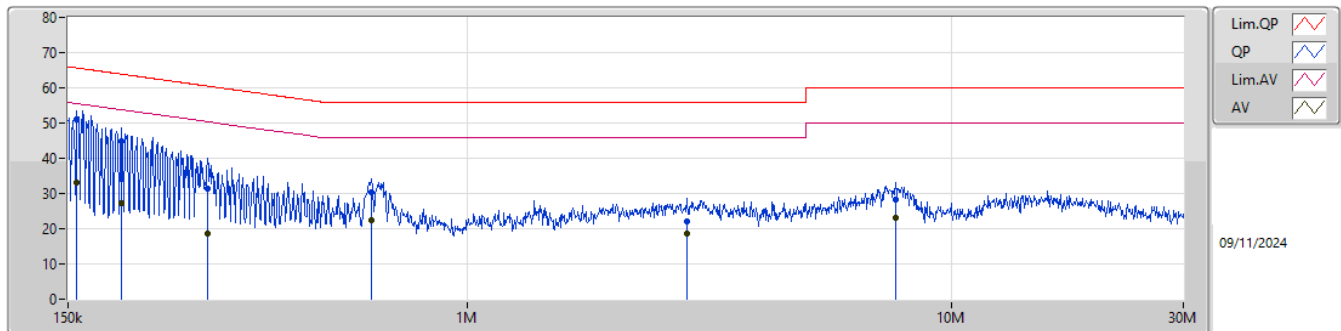

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	156.109k	50.93	65.67	-14.74	19.64	Neutral	-	31.29	9.60	0.07	9.97						
AV	156.109k	33.16	55.67	-22.51	19.64	Neutral	-	13.52	9.60	0.07	9.97						
QP	193.664k	44.67	63.88	-19.21	19.66	Neutral	-	25.01	9.60	0.09	9.97						
AV	193.664k	27.36	53.88	-26.52	19.66	Neutral	-	7.70	9.60	0.09	9.97						
QP	290.996k	31.54	60.49	-28.95	19.69	Neutral	-	11.85	9.60	0.11	9.98						
AV	290.996k	18.75	50.49	-31.74	19.69	Neutral	-	-0.94	9.60	0.11	9.98						
QP	633.814k	30.45	56.00	-25.55	19.69	Neutral	-	10.76	9.61	0.10	9.98						
AV	633.814k	22.56	46.00	-23.44	19.69	Neutral	-	2.87	9.61	0.10	9.98						
QP	2.832M	21.90	56.00	-34.10	19.69	Neutral	-	2.21	9.62	0.09	9.98						
AV	2.832M	18.73	46.00	-27.27	19.69	Neutral	-	-0.96	9.62	0.09	9.98						
QP	7.652M	28.23	60.00	-31.77	19.69	Neutral	-	8.54	9.65	0.06	9.98						
AV	7.652M	23.09	50.00	-26.91	19.69	Neutral	-	3.40	9.65	0.06	9.98						

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.57M	18.941M	18M9D1D	19.965M	18.816M
802.11ax HEW40_Nss1,(MCS0)_2TX	39.82M	37.631M	37M6D1D	38.83M	37.581M
802.11ax HEW80_Nss1,(MCS0)_2TX	81.84M	77.161M	77M2D1D	80.74M	76.862M
802.11ax HEW160_Nss1,(MCS0)_2TX	164.12M	154.923M	155MD1D	162.36M	154.323M
6.425-6.525GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.57M	18.916M	18M9D1D	20.185M	18.841M
802.11ax HEW40_Nss1,(MCS0)_2TX	39.71M	37.681M	37M7D1D	39.16M	37.581M
802.11ax HEW80_Nss1,(MCS0)_2TX	82.72M	77.161M	77M2D1D	80.3M	76.962M
802.11ax HEW160_Nss1,(MCS0)_2TX	163.68M	154.523M	155MD1D	161.48M	153.923M
6.525-6.875GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.57M	18.916M	18M9D1D	20.075M	18.841M
802.11ax HEW40_Nss1,(MCS0)_2TX	39.71M	37.681M	37M7D1D	39.16M	37.581M
802.11ax HEW80_Nss1,(MCS0)_2TX	82.5M	77.061M	77M1D1D	81.18M	76.962M
802.11ax HEW160_Nss1,(MCS0)_2TX	164.12M	154.923M	155MD1D	162.36M	154.123M
6.875-7.125GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.79M	18.916M	18M9D1D	20.35M	18.866M
802.11ax HEW40_Nss1,(MCS0)_2TX	39.82M	37.681M	37M7D1D	39.27M	37.531M
802.11ax HEW80_Nss1,(MCS0)_2TX	82.28M	77.061M	77M1D1D	81.4M	76.962M
802.11ax HEW160_Nss1,(MCS0)_2TX	164.12M	153.523M	154MD1D	162.8M	153.323M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	Inf	20.515M	18.941M	20.185M	18.866M
6195MHz	Pass	Inf	20.57M	18.891M	20.185M	18.916M
6415MHz	Pass	Inf	19.965M	18.841M	20.35M	18.816M
6435MHz	Pass	Inf	20.515M	18.841M	20.515M	18.866M
6475MHz	Pass	Inf	20.57M	18.916M	20.185M	18.866M
6515MHz	Pass	Inf	20.24M	18.866M	20.35M	18.916M
6535MHz	Pass	Inf	20.57M	18.866M	20.185M	18.916M
6695MHz	Pass	Inf	20.13M	18.891M	20.075M	18.891M
6875MHz	Pass	Inf	20.57M	18.916M	20.46M	18.841M
6895MHz	Pass	Inf	20.735M	18.866M	20.625M	18.916M
6995MHz	Pass	Inf	20.35M	18.916M	20.57M	18.891M
7095MHz	Pass	Inf	20.625M	18.866M	20.79M	18.891M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	Inf	39.71M	37.631M	39.27M	37.631M
6205MHz	Pass	Inf	39.49M	37.581M	38.83M	37.631M
6405MHz	Pass	Inf	39.38M	37.631M	39.82M	37.581M
6445MHz	Pass	Inf	39.16M	37.681M	39.38M	37.681M
6485MHz	Pass	Inf	39.6M	37.581M	39.71M	37.631M
6525MHz	Pass	Inf	39.27M	37.681M	39.49M	37.631M
6565MHz	Pass	Inf	39.49M	37.581M	39.71M	37.631M
6685MHz	Pass	Inf	39.27M	37.681M	39.49M	37.581M
6885MHz	Pass	Inf	39.6M	37.631M	39.16M	37.581M
6925MHz	Pass	Inf	39.27M	37.681M	39.49M	37.631M
7005MHz	Pass	Inf	39.27M	37.531M	39.49M	37.681M
7085MHz	Pass	Inf	39.6M	37.681M	39.82M	37.581M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	Inf	81.84M	77.161M	81.4M	76.962M
6225MHz	Pass	Inf	80.74M	77.061M	81.18M	76.962M
6385MHz	Pass	Inf	80.74M	76.862M	81.18M	76.962M
6465MHz	Pass	Inf	81.62M	77.161M	80.3M	77.061M
6545MHz	Pass	Inf	82.72M	77.061M	81.62M	76.962M
6625MHz	Pass	Inf	81.18M	76.962M	82.5M	77.061M
6705MHz	Pass	Inf	81.18M	76.962M	81.84M	76.962M
6785MHz	Pass	Inf	81.84M	76.962M	81.84M	76.962M
6865MHz	Pass	Inf	81.4M	77.061M	81.84M	77.061M
6945MHz	Pass	Inf	81.62M	77.061M	81.4M	76.962M
7025MHz	Pass	Inf	82.28M	76.962M	81.84M	77.061M
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	Inf	163.24M	154.723M	164.12M	154.523M
6185MHz	Pass	Inf	164.12M	154.523M	163.68M	154.923M
6345MHz	Pass	Inf	162.36M	154.323M	162.8M	154.923M
6505MHz	Pass	Inf	163.68M	154.523M	161.48M	153.923M
6665MHz	Pass	Inf	164.12M	154.123M	162.36M	154.123M
6825MHz	Pass	Inf	164.12M	154.123M	163.68M	154.923M
6985MHz	Pass	Inf	164.12M	153.523M	162.8M	153.323M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5955MHz

17/01/2024

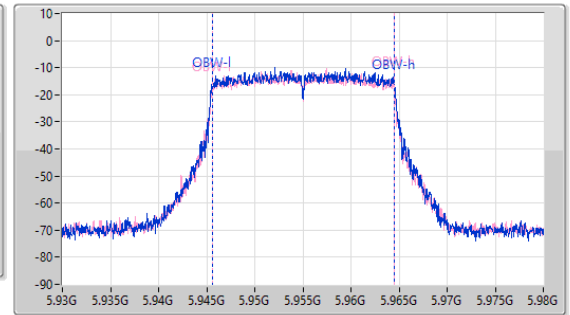
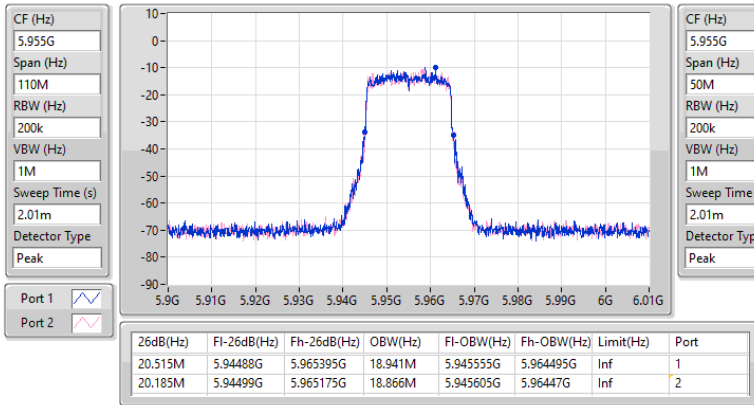


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6195MHz

17/01/2024

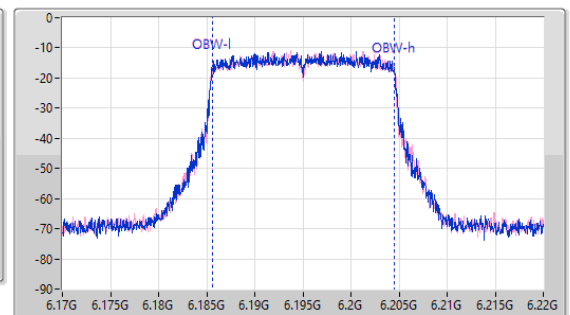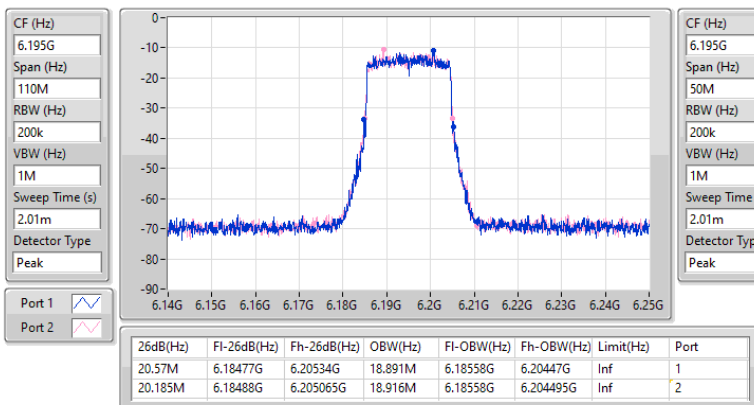


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6415MHz

17/01/2024

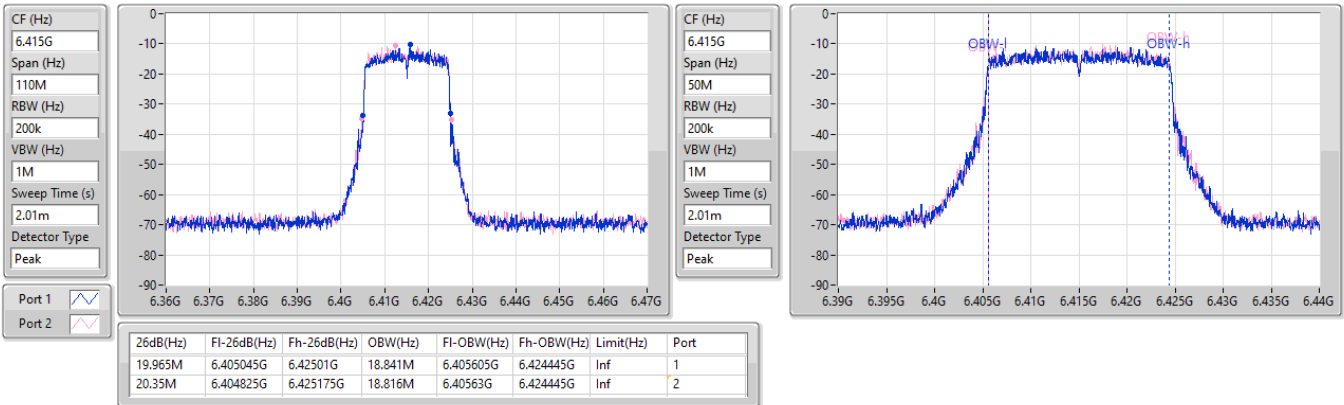


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6435MHz

17/01/2024


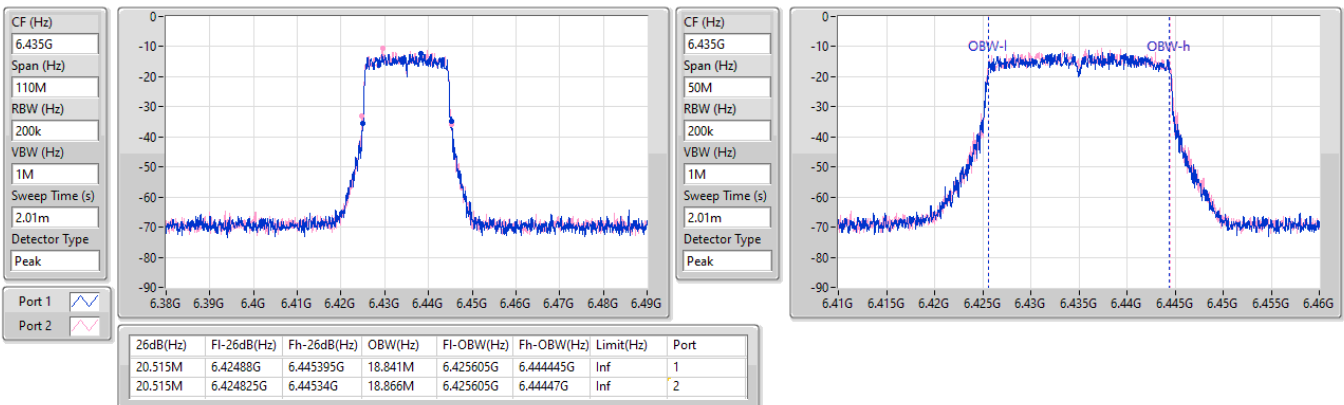


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6475MHz

17/01/2024

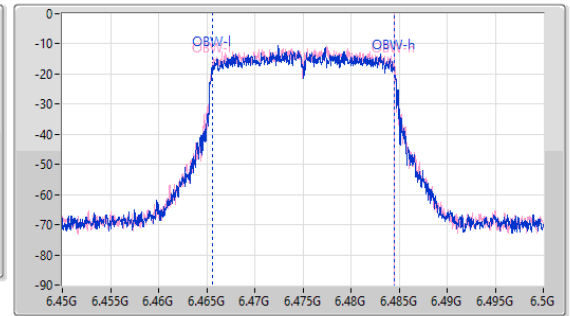
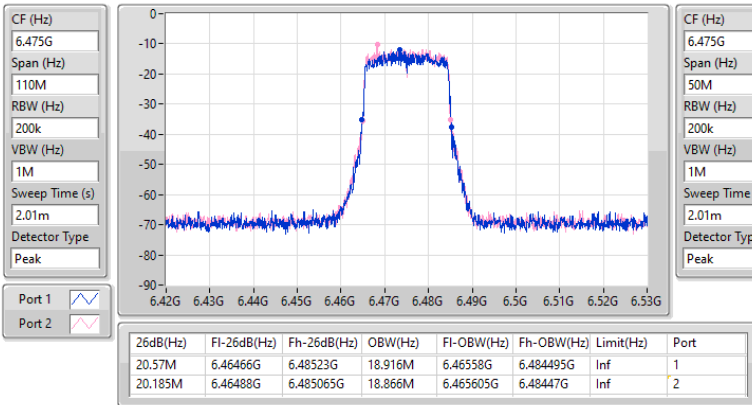


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6515MHz

17/01/2024

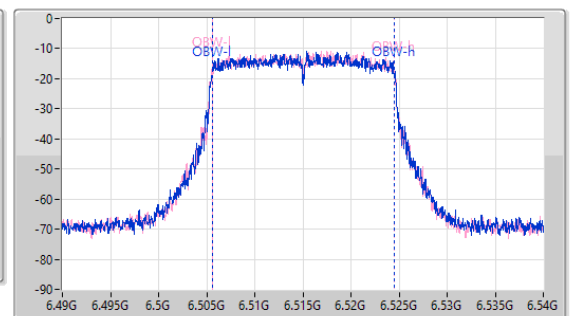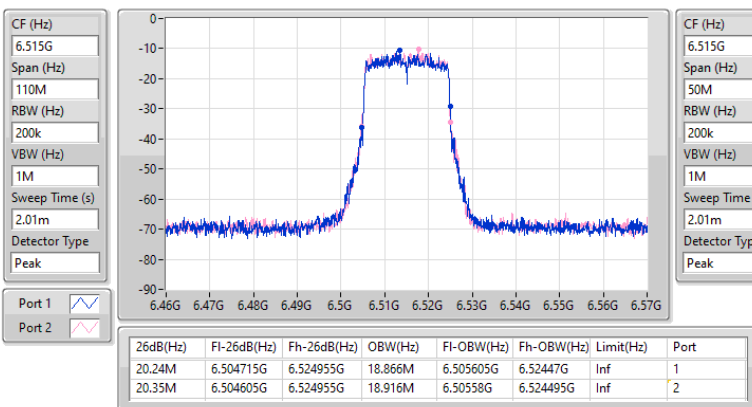


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6535MHz

17/01/2024

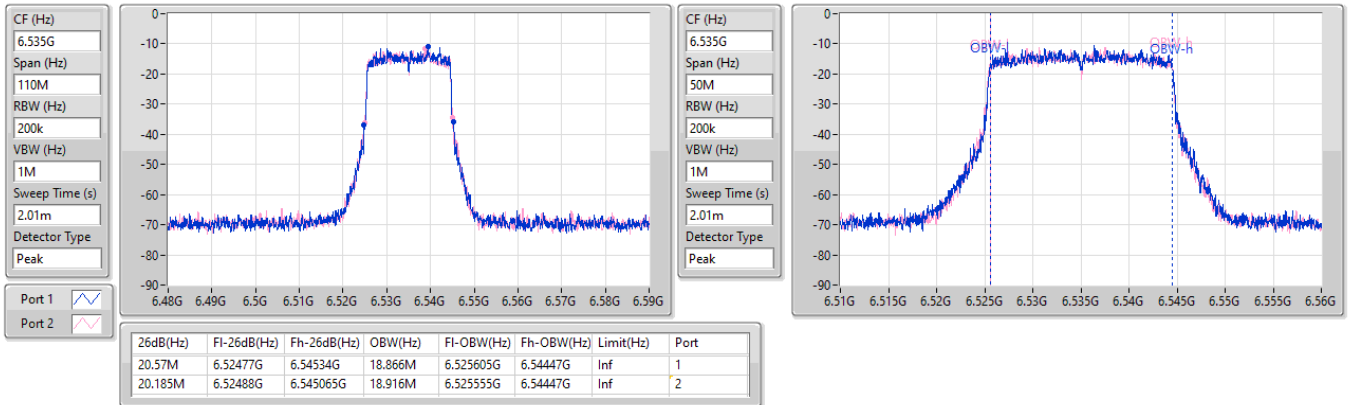


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6695MHz

17/01/2024


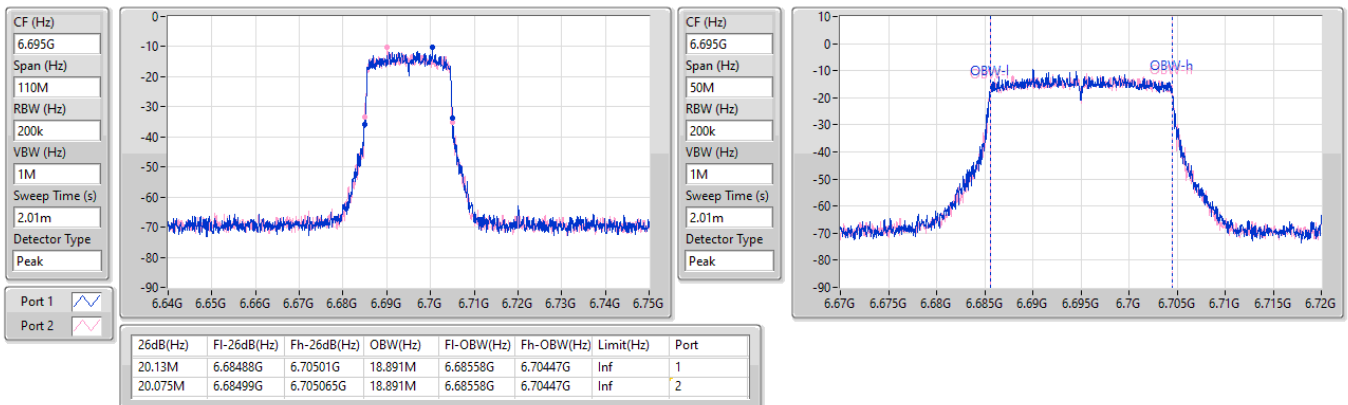


6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6875MHz

17/01/2024

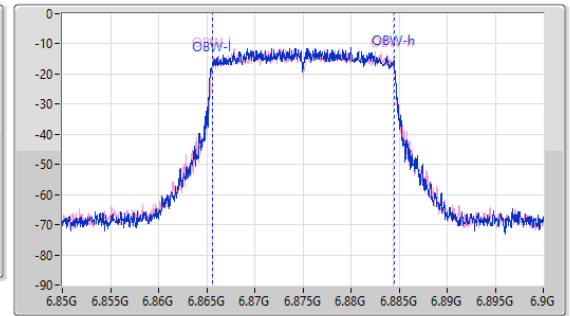
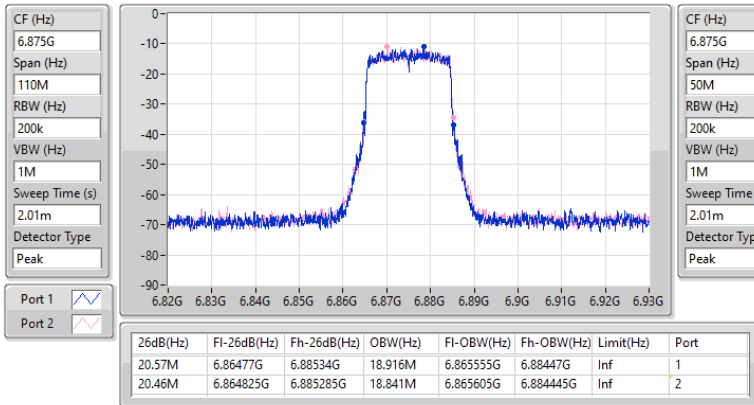


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6895MHz

17/01/2024

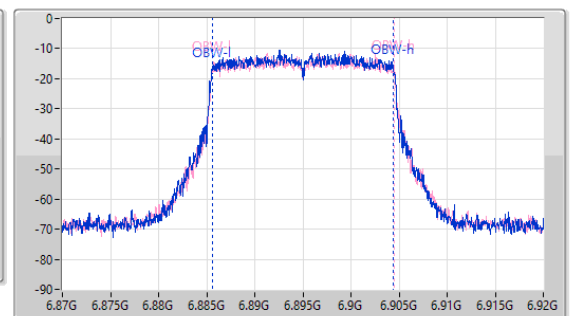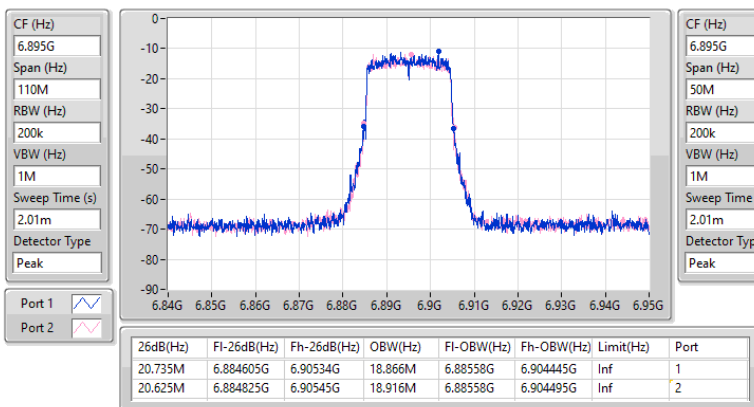


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

6995MHz

17/01/2024

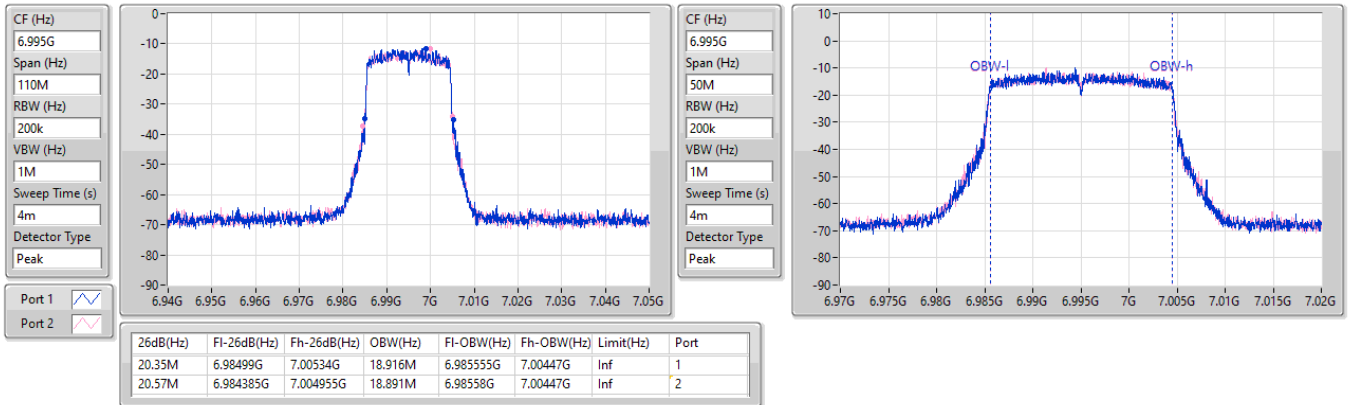


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

7095MHz

17/01/2024


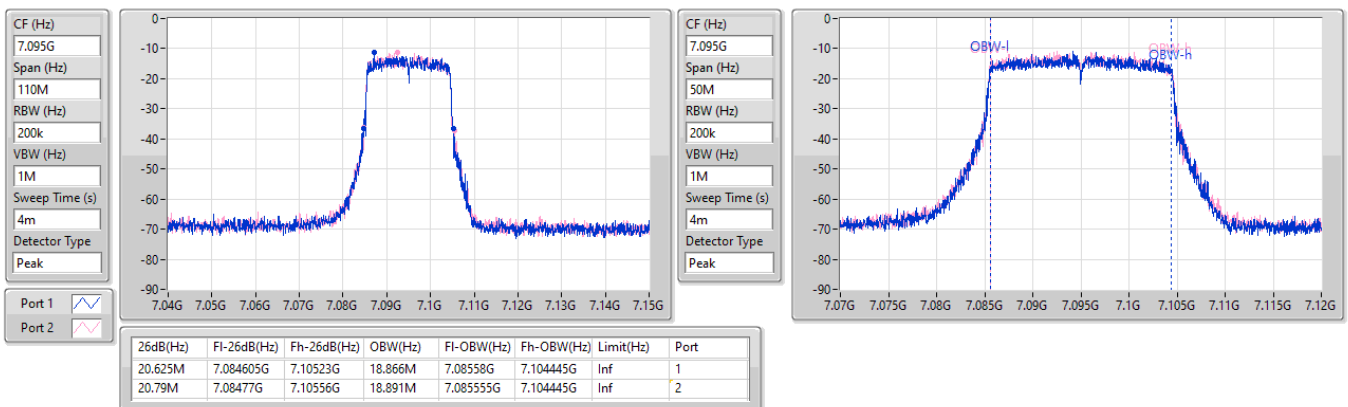


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

5965MHz

17/01/2024

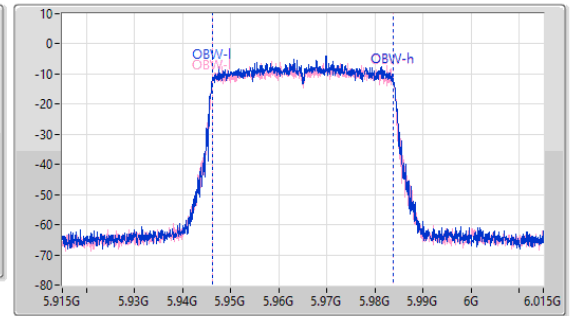
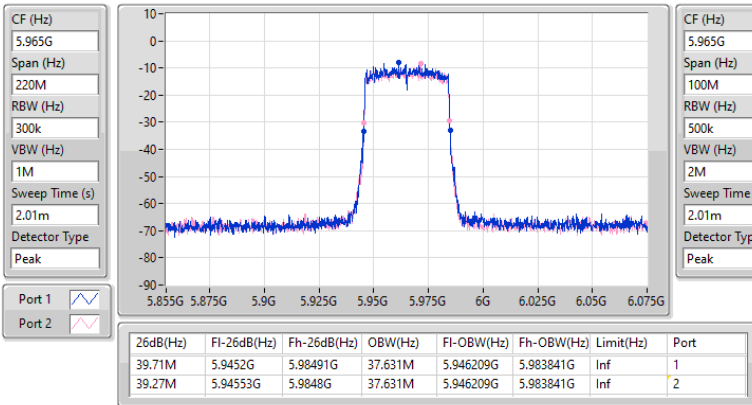


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6205MHz

17/01/2024

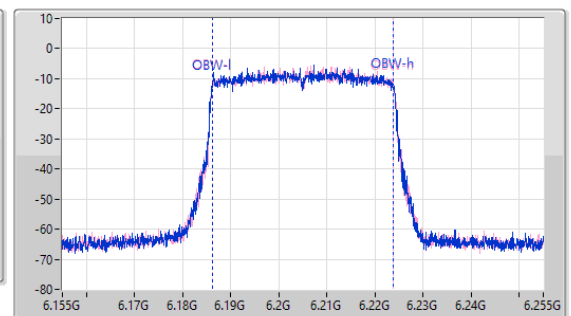
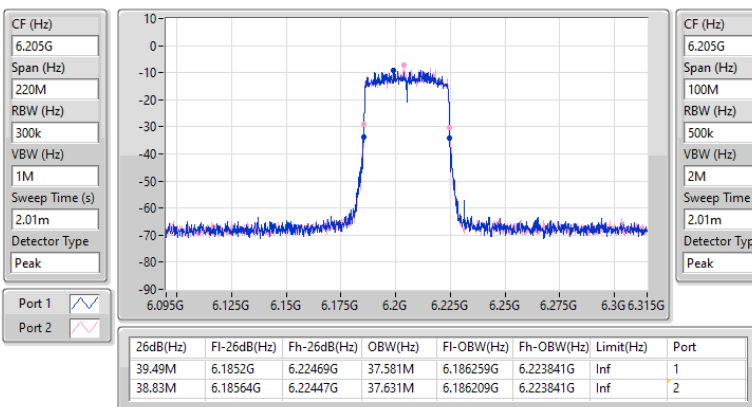


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6405MHz

17/01/2024

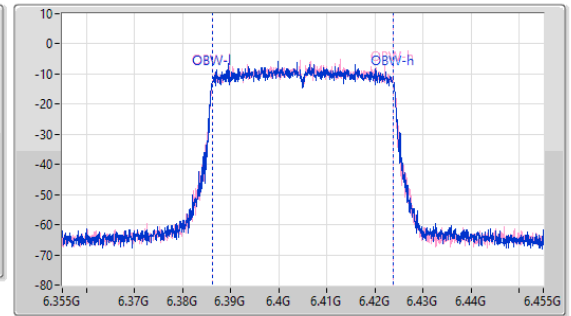
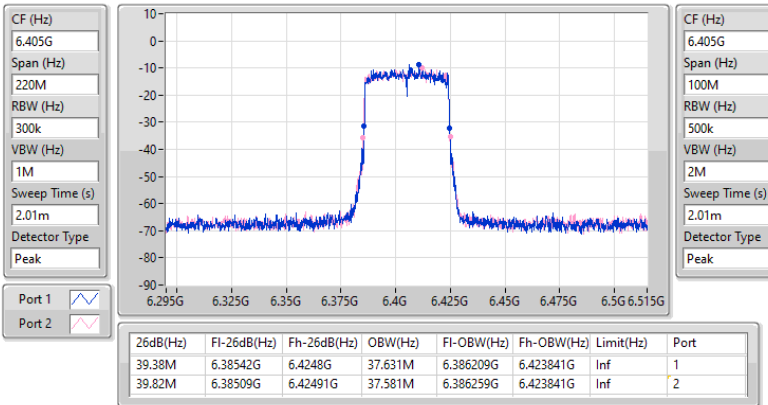


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6445MHz

17/01/2024

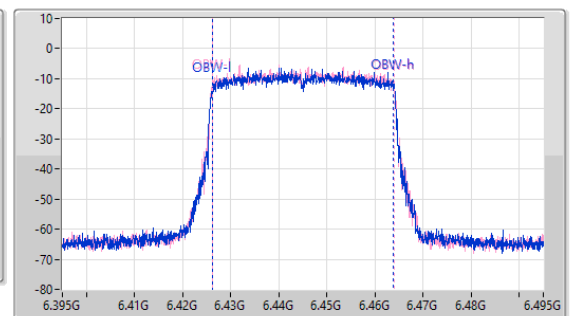
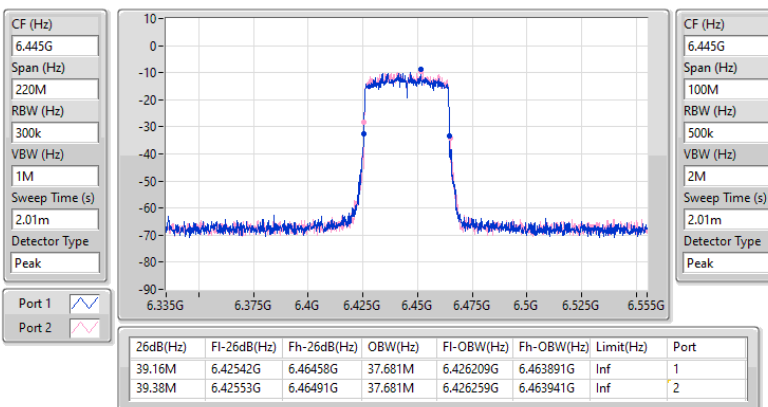


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6485MHz

17/01/2024

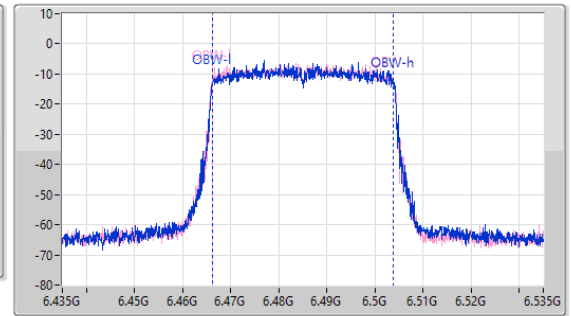
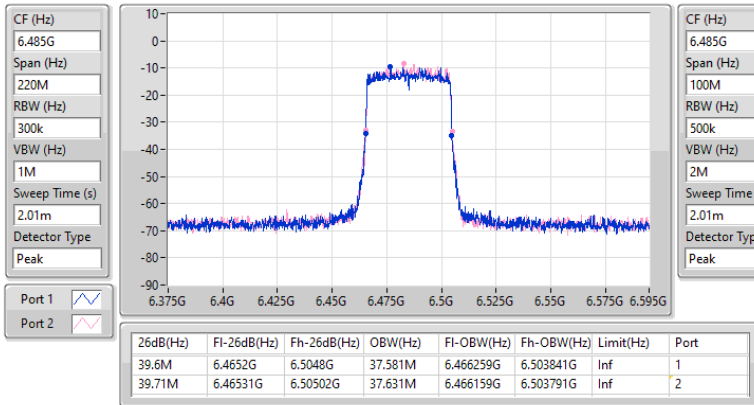


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6525MHz

17/01/2024

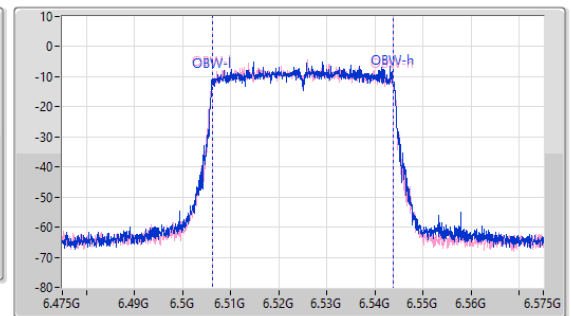
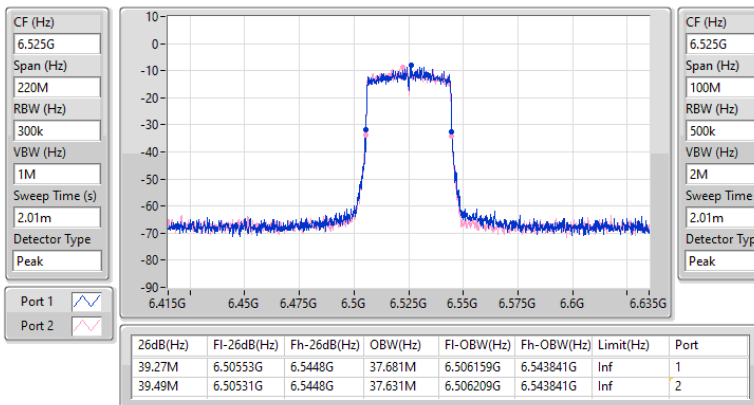


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6565MHz

17/01/2024

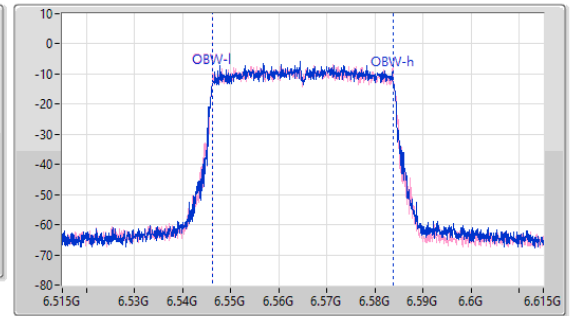
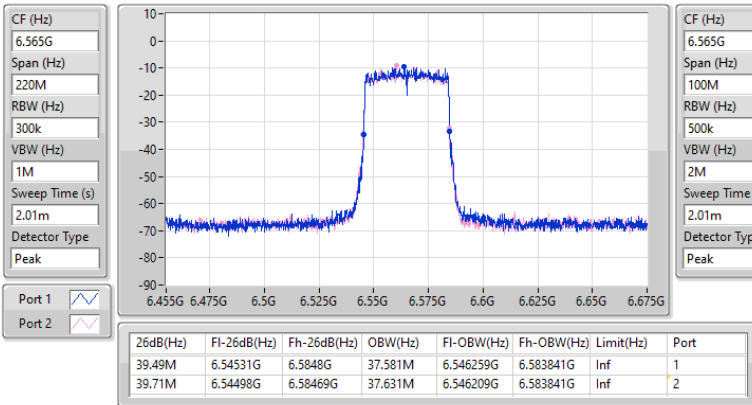


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6685MHz

17/01/2024

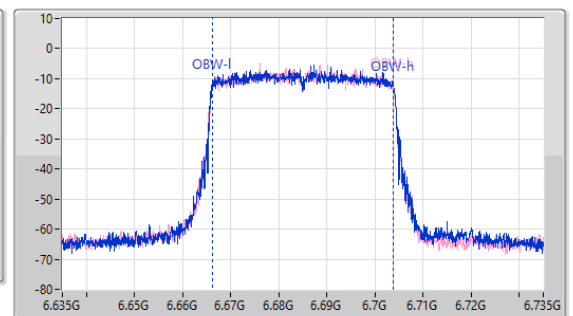
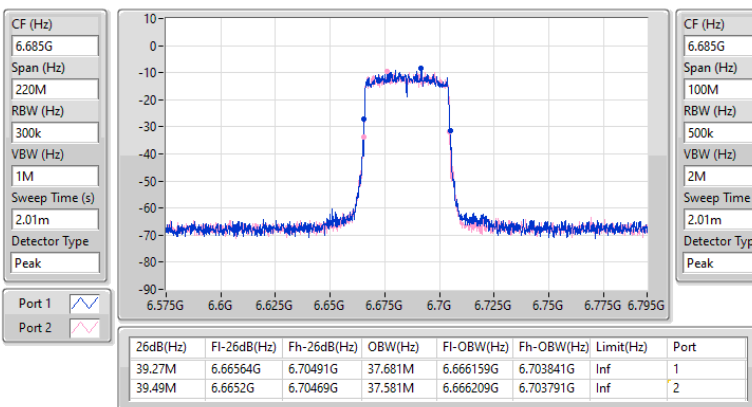


6.525-6.875GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6885MHz

17/01/2024

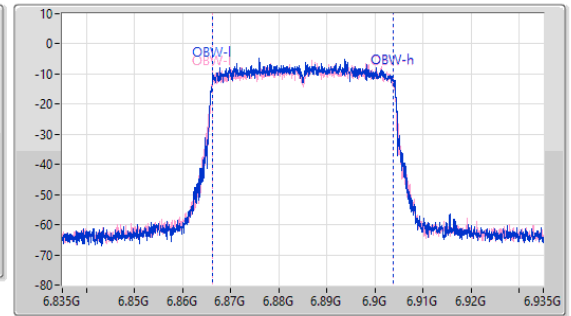
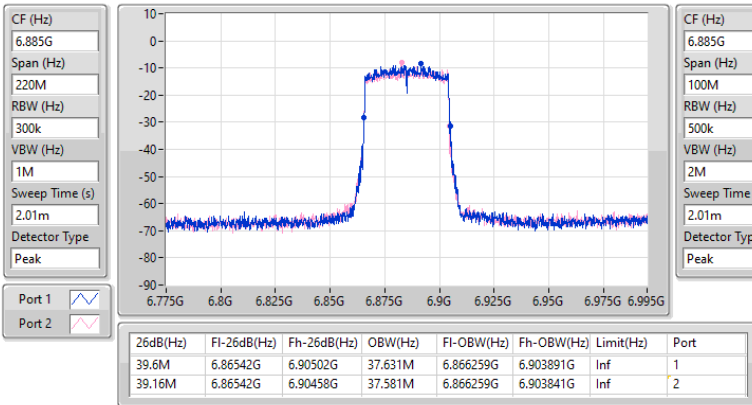


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

6925MHz

17/01/2024

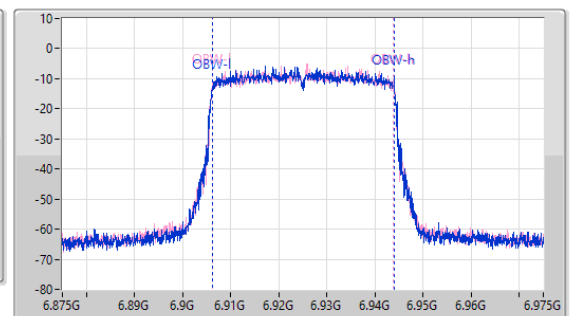
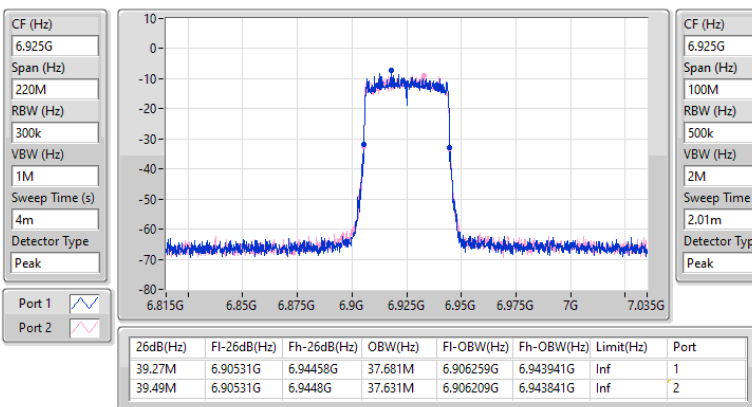


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

7005MHz

17/01/2024

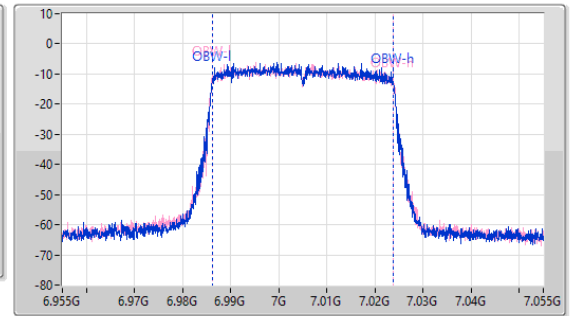
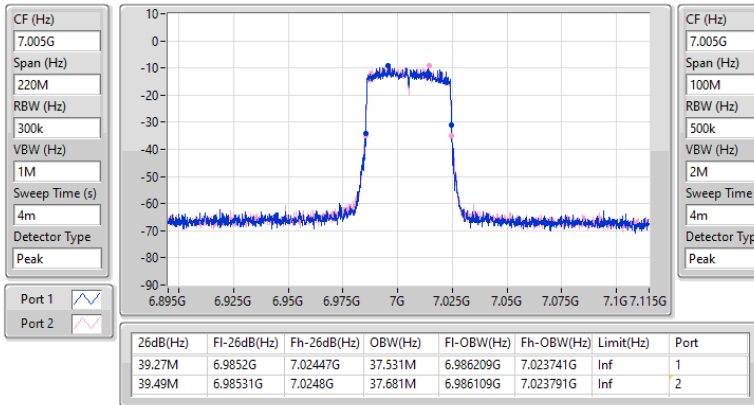


6.875-7.125GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

7085MHz

17/01/2024

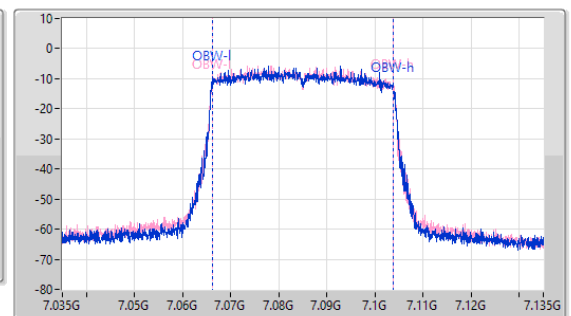
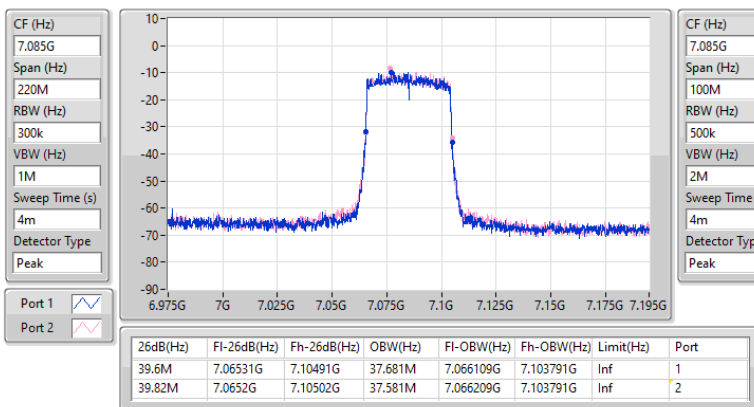


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

5985MHz

17/01/2024

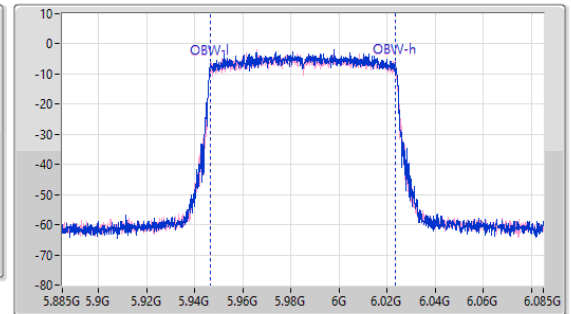
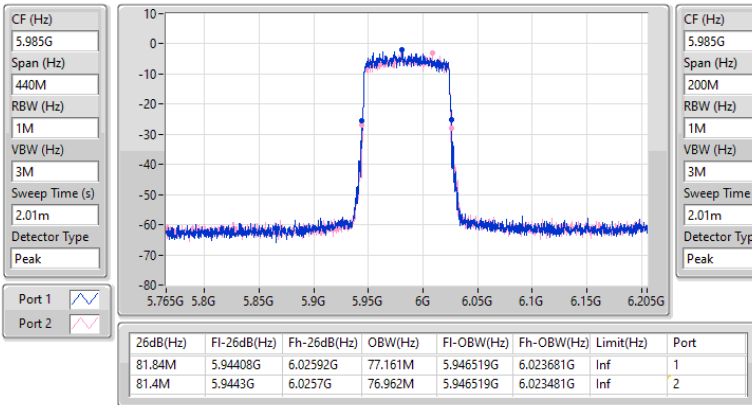


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6225MHz

17/01/2024

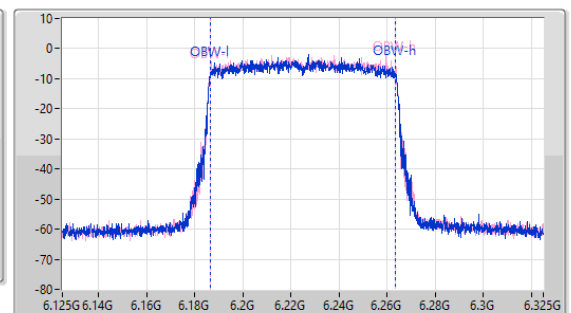
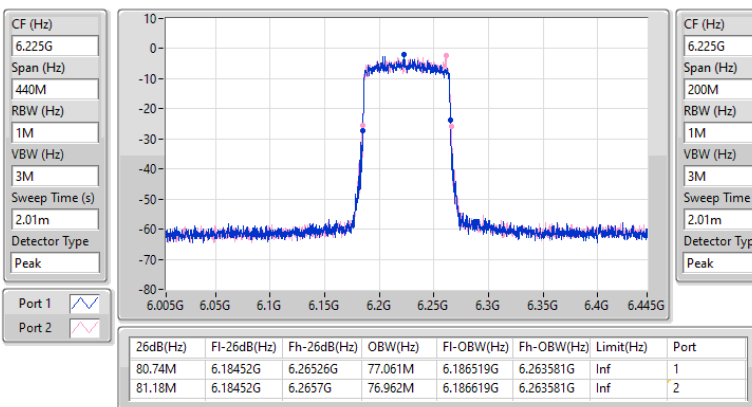


5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6385MHz

17/01/2024

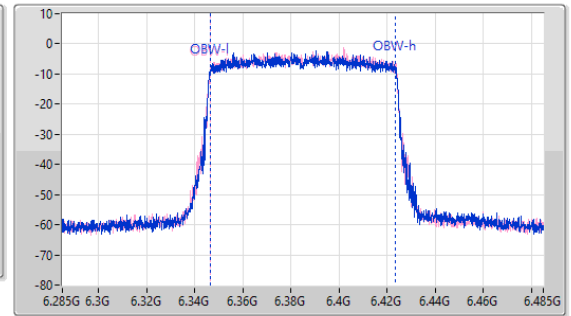
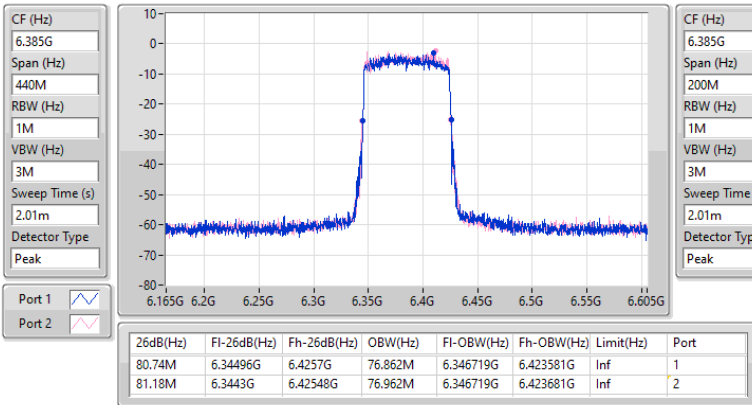


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6465MHz

17/01/2024

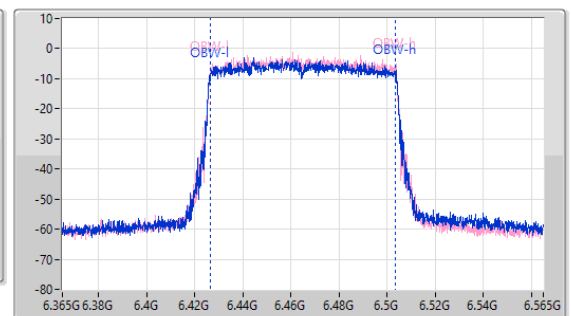
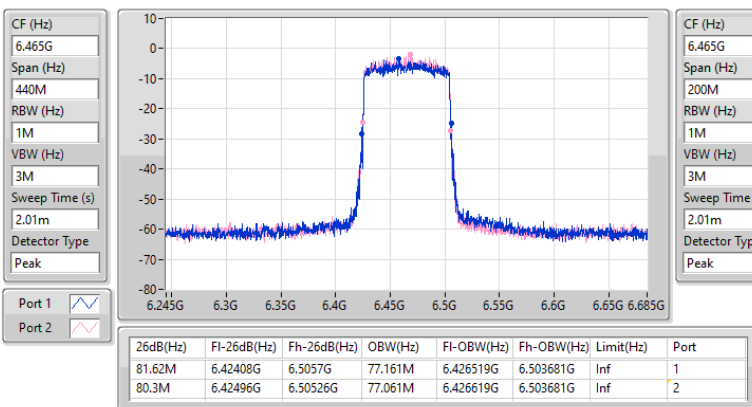


6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6545MHz

17/01/2024

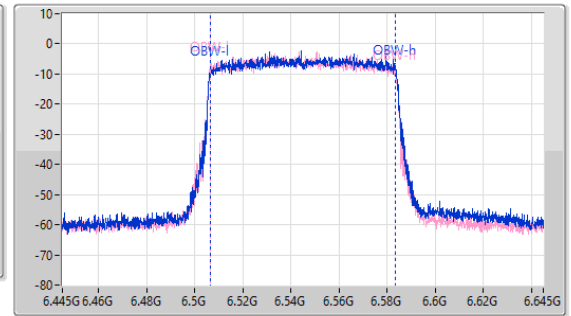
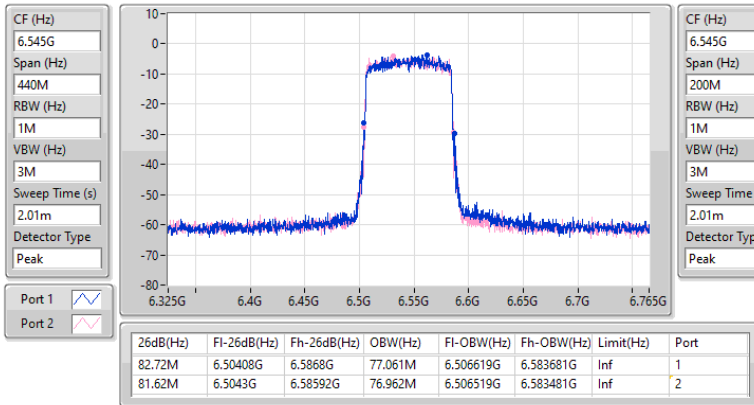


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6625MHz

17/01/2024

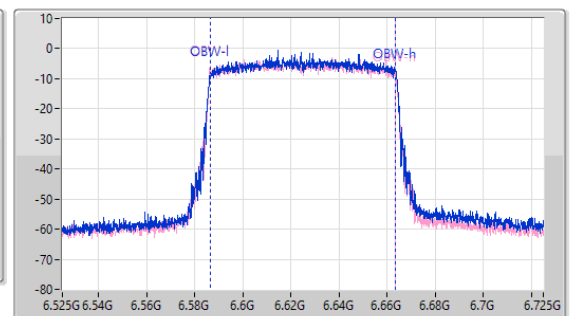
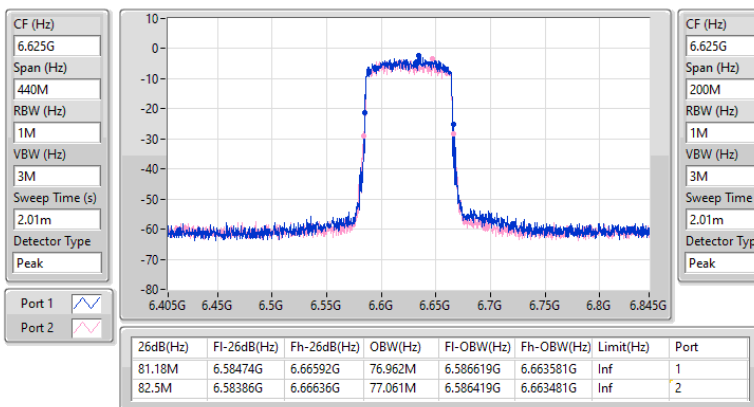


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6705MHz

17/01/2024

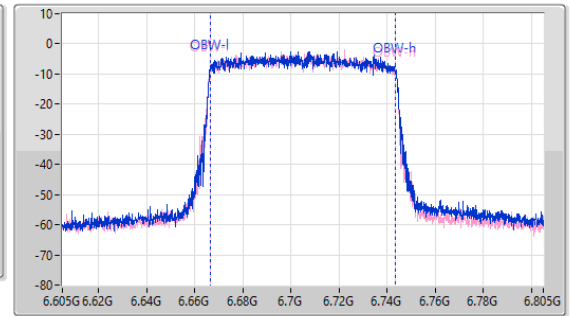
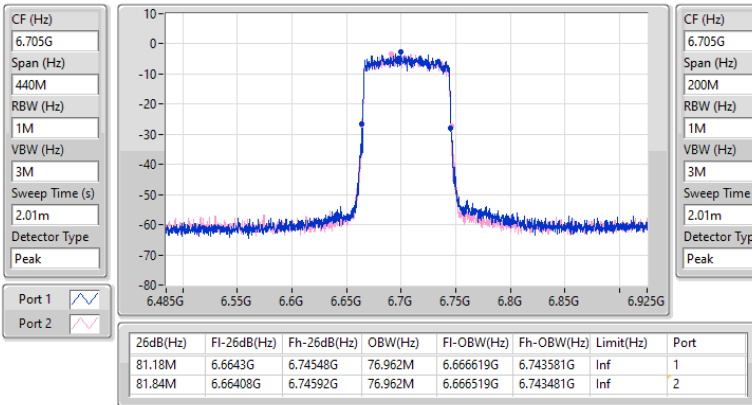


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6785MHz

17/01/2024

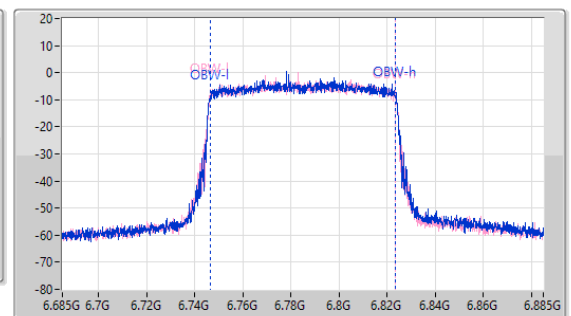
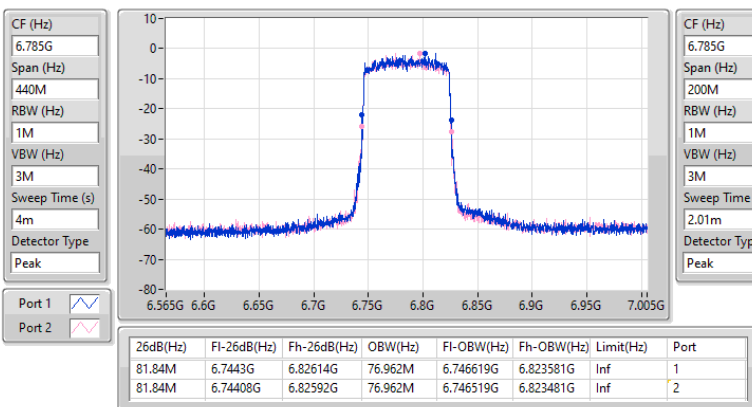


6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6865MHz

17/01/2024

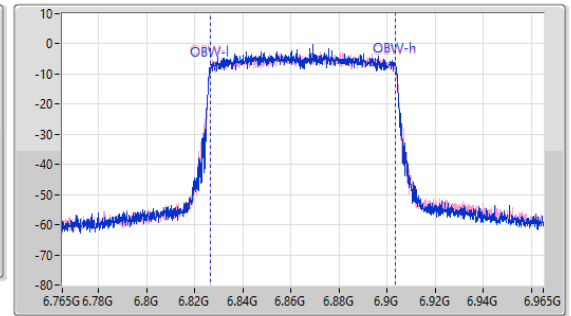
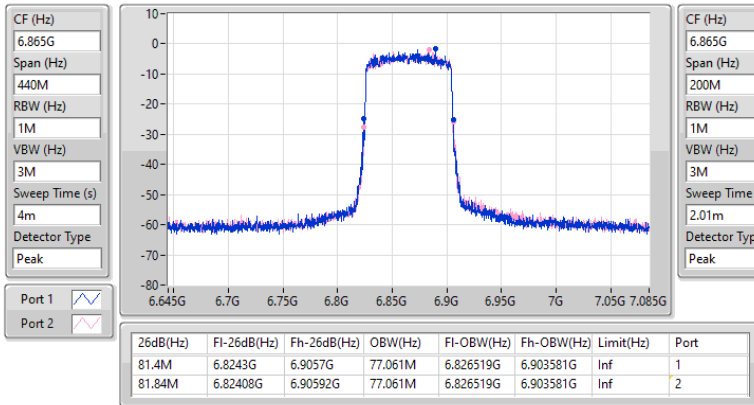


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

6945MHz

17/01/2024

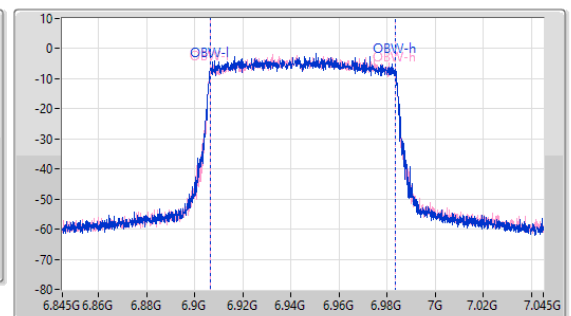
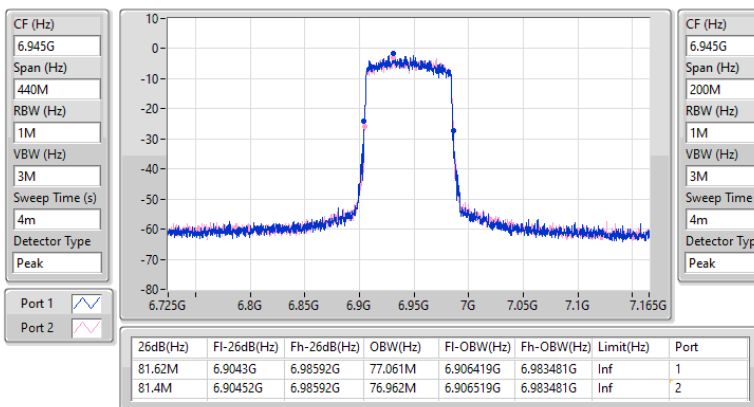


6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

EBW

7025MHz

17/01/2024

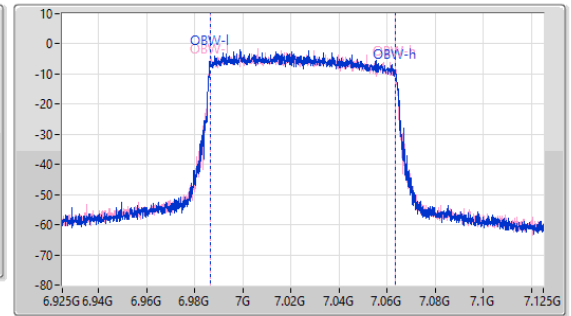
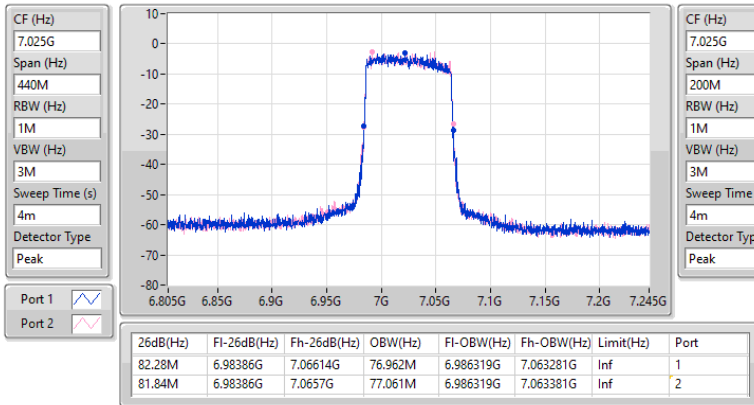


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6025MHz

17/01/2024

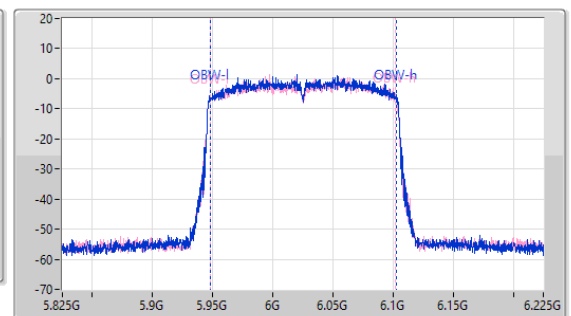
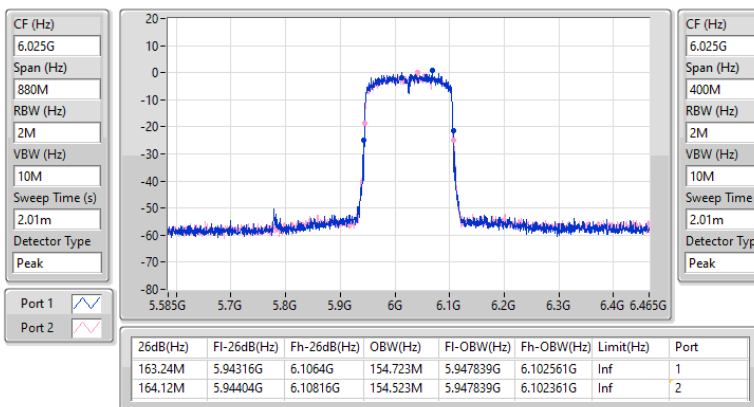


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6185MHz

17/01/2024

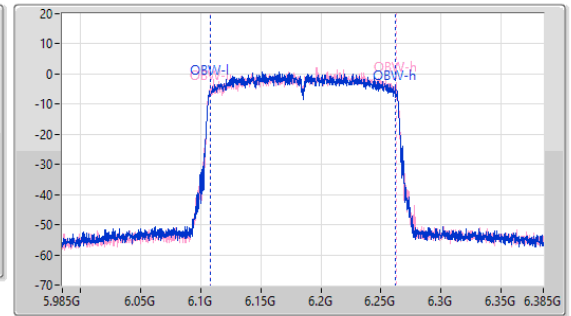
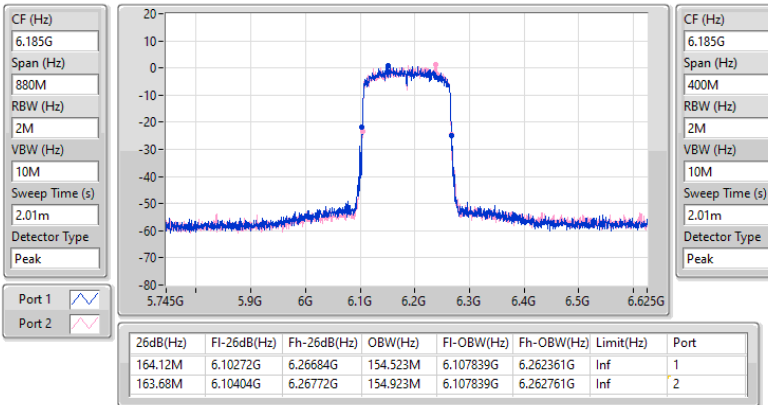


5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6345MHz

17/01/2024

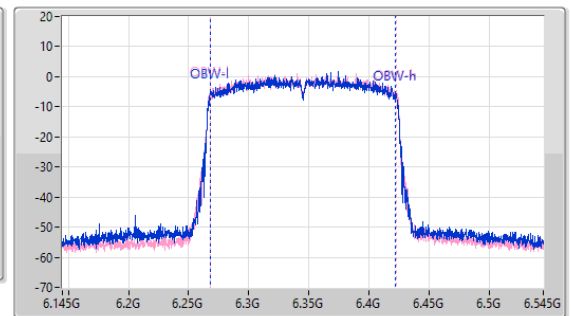
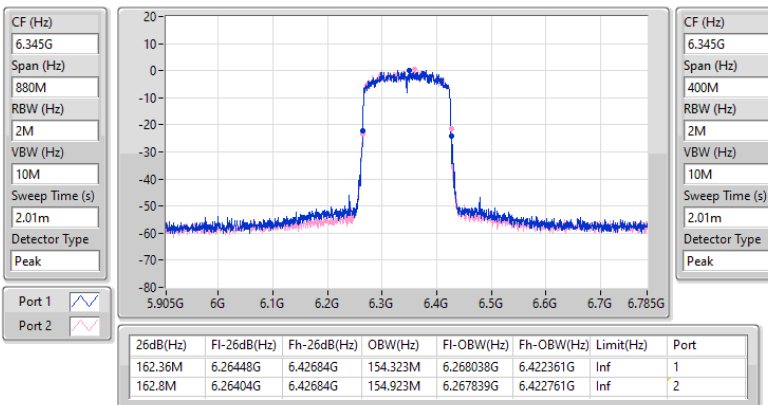


6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6505MHz

17/01/2024

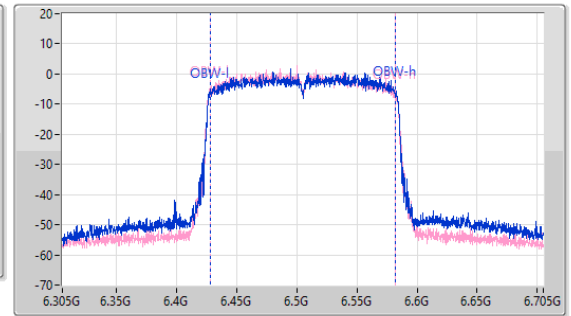
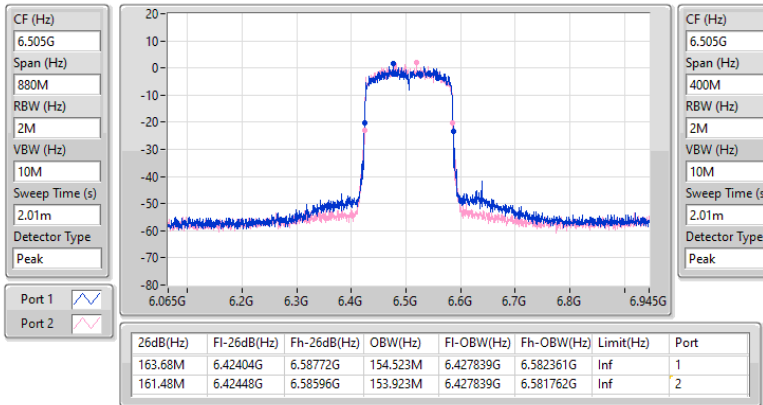


6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6665MHz

17/01/2024

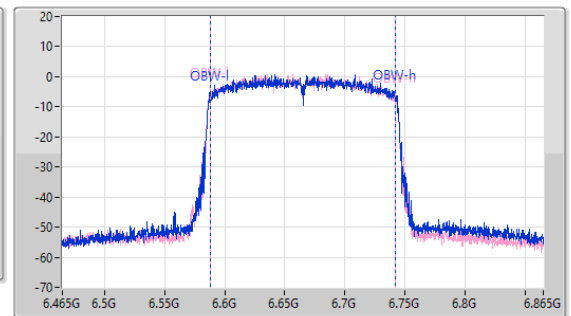
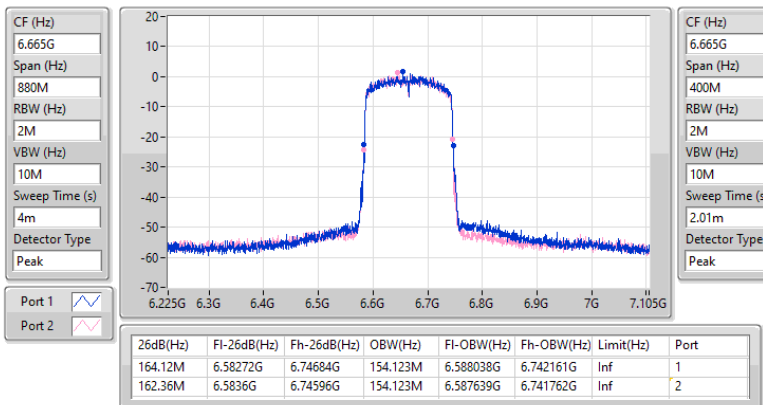


6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6825MHz

17/01/2024

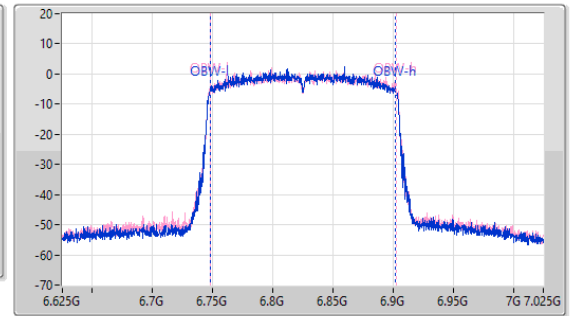
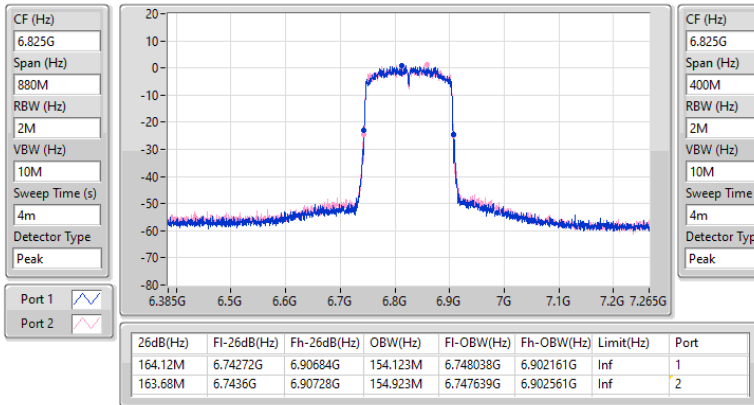


6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

EBW

6985MHz

17/01/2024

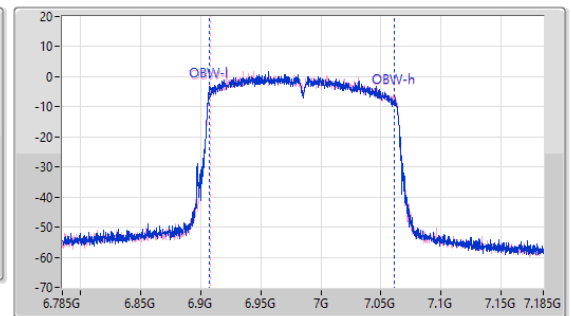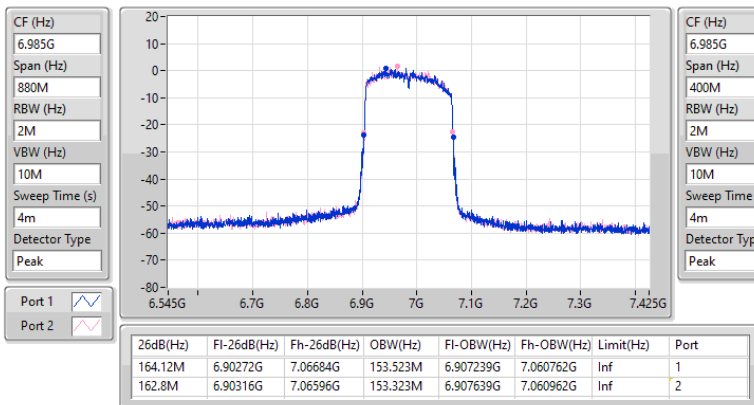



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	22.715M	19.115M	19M1D1D	20.625M	18.991M
802.11be EHT40_Nss1,(MCS0)_4TX	45.1M	38.081M	38M1D1D	42.57M	37.931M
802.11be EHT80_Nss1,(MCS0)_4TX	90.64M	77.761M	77M8D1D	85.8M	77.461M
802.11be EHT160_Nss1,(MCS0)_4TX	175.12M	157.121M	157MD1D	165.88M	156.722M
802.11be EHT320_Nss1,(MCS0)_4TX	344.96M	316.642M	317MD1D	335.28M	315.442M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	22.77M	19.115M	19M1D1D	21.835M	19.015M
802.11be EHT40_Nss1,(MCS0)_4TX	43.89M	38.081M	38M1D1D	42.13M	37.931M
802.11be EHT80_Nss1,(MCS0)_4TX	89.54M	77.961M	78M0D1D	85.8M	77.561M
802.11be EHT160_Nss1,(MCS0)_4TX	171.6M	156.922M	157MD1D	165.88M	156.922M
802.11be EHT320_Nss1,(MCS0)_4TX	342.32M	315.442M	315MD1D	336.16M	315.442M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	23.21M	19.09M	19M1D1D	21.34M	18.991M
802.11be EHT40_Nss1,(MCS0)_4TX	44M	38.031M	38M0D1D	41.91M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	91.3M	77.861M	77M9D1D	84.7M	77.561M
802.11be EHT160_Nss1,(MCS0)_4TX	172.04M	157.121M	157MD1D	168.08M	156.722M
802.11be EHT320_Nss1,(MCS0)_4TX	341.44M	316.242M	316MD1D	336.16M	314.643M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	22.935M	19.09M	19M1D1D	21.78M	19.015M
802.11be EHT40_Nss1,(MCS0)_4TX	44.44M	38.081M	38M1D1D	42.13M	37.881M
802.11be EHT80_Nss1,(MCS0)_4TX	90.86M	77.861M	77M9D1D	86.46M	77.661M
802.11be EHT160_Nss1,(MCS0)_4TX	171.16M	157.121M	157MD1D	170.28M	156.722M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	Inf	22.165M	19.015M	21.78M	19.015M	20.625M	19.04M	22M	19.115M
6195MHz	Pass	Inf	22.385M	19.065M	22.33M	18.991M	21.395M	19.115M	22.44M	19.065M
6415MHz	Pass	Inf	21.395M	19.09M	22.055M	19.065M	22.715M	19.015M	21.725M	19.065M
6435MHz	Pass	Inf	21.835M	19.065M	22.77M	19.115M	22.055M	19.04M	22.715M	19.015M
6475MHz	Pass	Inf	22.55M	19.04M	22.77M	19.04M	22.385M	19.015M	22.055M	19.115M
6515MHz	Pass	Inf	22.11M	19.115M	22.055M	19.065M	22.44M	19.04M	22.33M	19.04M
6535MHz	Pass	Inf	22.44M	19.04M	22.44M	19.065M	22.165M	19.015M	22.66M	19.065M
6695MHz	Pass	Inf	22.22M	19.04M	23.21M	19.09M	21.34M	19.04M	22.11M	19.04M
6875MHz	Pass	Inf	21.78M	19.04M	21.67M	19.065M	21.89M	19.04M	21.505M	18.991M
6895MHz	Pass	Inf	22.935M	19.015M	22.33M	19.09M	22.165M	19.04M	22.33M	19.065M
6995MHz	Pass	Inf	22.11M	19.09M	22.66M	19.065M	21.945M	19.015M	21.89M	19.04M
7095MHz	Pass	Inf	21.78M	19.04M	22M	19.065M	22M	19.04M	22.605M	19.09M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	Inf	45.1M	37.931M	42.79M	37.981M	43.34M	38.081M	42.9M	38.031M
6205MHz	Pass	Inf	43.78M	37.981M	44.55M	37.981M	43.89M	38.031M	43.89M	38.081M
6405MHz	Pass	Inf	43.23M	37.981M	44M	37.981M	42.57M	37.981M	42.9M	37.981M
6445MHz	Pass	Inf	43.12M	38.081M	43.12M	37.981M	43.78M	37.981M	42.46M	37.981M
6485MHz	Pass	Inf	42.35M	38.031M	42.68M	37.931M	43.89M	38.081M	42.35M	38.031M
6525MHz	Pass	Inf	43.12M	38.031M	43.78M	37.981M	42.57M	37.981M	42.13M	37.931M
6565MHz	Pass	Inf	43.56M	38.031M	42.79M	37.931M	43.67M	38.031M	42.24M	37.931M
6685MHz	Pass	Inf	43.89M	38.031M	43.01M	37.981M	44M	38.031M	43.45M	37.981M
6885MHz	Pass	Inf	42.46M	38.031M	43.45M	37.881M	41.91M	38.031M	42.57M	38.031M
6925MHz	Pass	Inf	44.44M	37.981M	42.13M	38.031M	43.34M	37.931M	43.34M	37.881M
7005MHz	Pass	Inf	42.13M	38.081M	43.34M	38.081M	42.79M	38.031M	43.78M	38.031M
7085MHz	Pass	Inf	43.78M	38.031M	44.22M	37.981M	43.56M	38.031M	43.01M	38.031M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	Inf	87.56M	77.661M	86.9M	77.461M	85.8M	77.661M	89.76M	77.661M
6225MHz	Pass	Inf	88.44M	77.761M	89.1M	77.561M	90.64M	77.661M	86.9M	77.761M
6385MHz	Pass	Inf	85.8M	77.661M	90.2M	77.761M	87.12M	77.761M	89.54M	77.561M
6465MHz	Pass	Inf	85.8M	77.761M	87.56M	77.661M	89.54M	77.561M	88M	77.961M
6545MHz	Pass	Inf	86.46M	77.761M	87.78M	77.561M	89.54M	77.761M	89.54M	77.761M
6625MHz	Pass	Inf	86.68M	77.561M	86.9M	77.761M	88.22M	77.561M	88.88M	77.661M
6705MHz	Pass	Inf	87.12M	77.761M	84.7M	77.761M	87.56M	77.661M	87.12M	77.661M
6785MHz	Pass	Inf	88.66M	77.761M	88M	77.661M	88M	77.861M	91.3M	77.661M
6865MHz	Pass	Inf	89.1M	77.661M	88.44M	77.661M	86.68M	77.661M	90.42M	77.561M
6945MHz	Pass	Inf	90.86M	77.761M	89.98M	77.761M	86.68M	77.761M	86.46M	77.661M
7025MHz	Pass	Inf	88.44M	77.761M	87.34M	77.861M	88.88M	77.861M	88.22M	77.861M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	Inf	169.4M	156.922M	167.2M	156.722M	169.4M	157.121M	169.4M	156.722M
6185MHz	Pass	Inf	175.12M	156.922M	172.04M	156.922M	173.8M	156.922M	165.88M	156.922M
6345MHz	Pass	Inf	168.96M	156.922M	169.84M	156.722M	169.84M	157.121M	168.52M	157.121M
6505MHz	Pass	Inf	167.2M	156.922M	165.88M	156.922M	171.6M	156.922M	170.28M	156.922M
6665MHz	Pass	Inf	170.72M	156.922M	168.08M	156.922M	169.84M	156.722M	169.4M	156.922M
6825MHz	Pass	Inf	172.04M	156.922M	172.04M	156.922M	171.6M	157.121M	168.96M	156.922M
6985MHz	Pass	Inf	171.16M	156.722M	171.16M	156.922M	170.28M	157.121M	170.28M	156.722M
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	Inf	342.32M	316.242M	338.8M	315.442M	335.28M	315.842M	340.56M	316.242M
6265MHz	Pass	Inf	337.92M	316.242M	339.68M	315.842M	337.92M	316.642M	340.56M	316.242M
6425MHz	Pass	Inf	344.96M	315.842M	338.8M	315.842M	339.68M	316.242M	343.2M	315.842M
6585MHz	Pass	Inf	337.92M	315.442M	336.16M	315.442M	337.92M	315.442M	342.32M	315.442M
6745MHz	Pass	Inf	338.8M	315.842M	336.16M	315.042M	337.92M	316.242M	338.8M	315.442M
6905MHz	Pass	Inf	340.56M	316.242M	336.16M	314.643M	341.44M	315.842M	341.44M	315.442M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6415MHz

05/11/2024

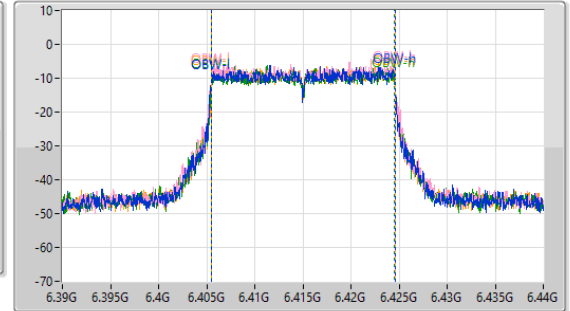
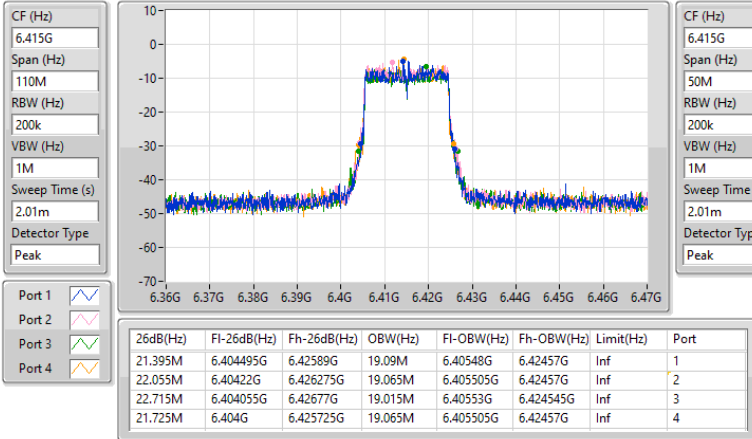


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5965MHz

05/11/2024

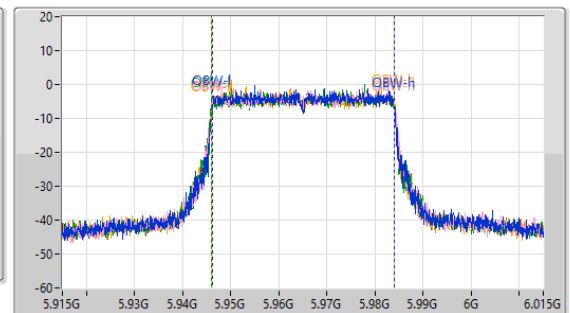
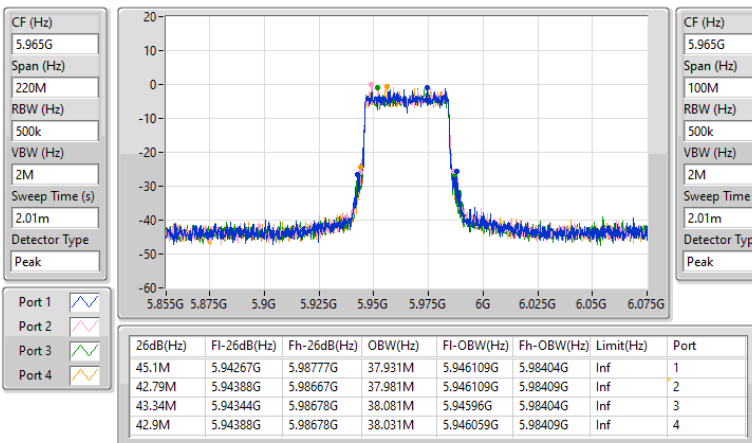


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6225MHz

05/11/2024

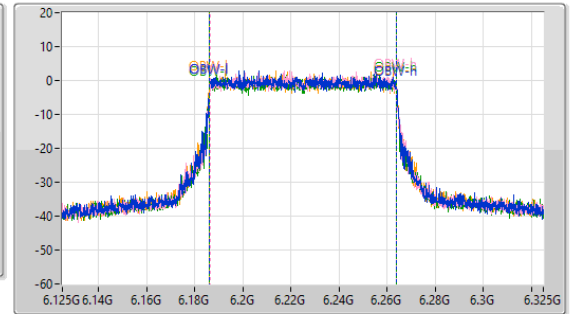
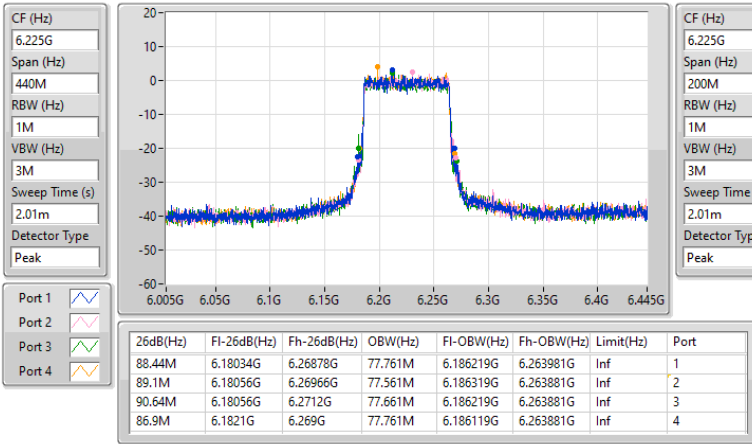


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6185MHz

05/11/2024

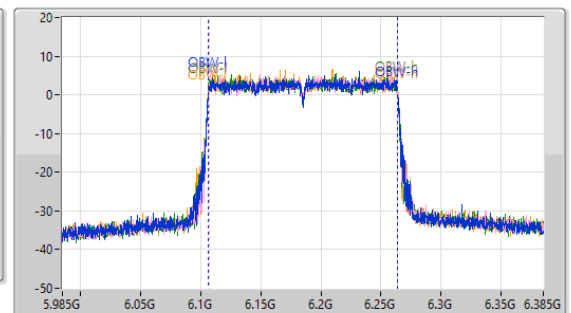
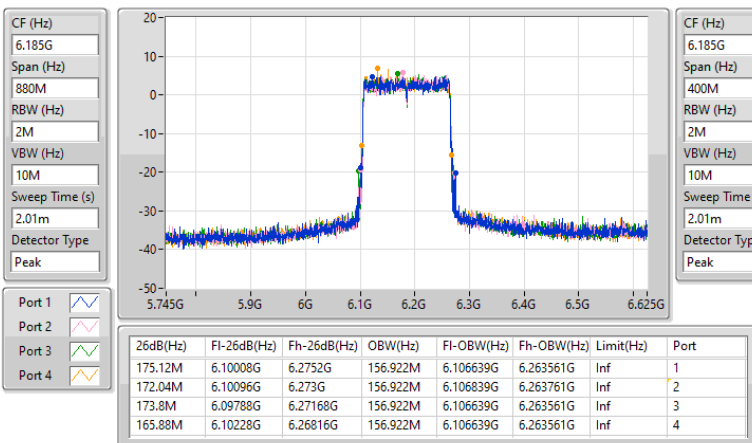


5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6425MHz

05/11/2024

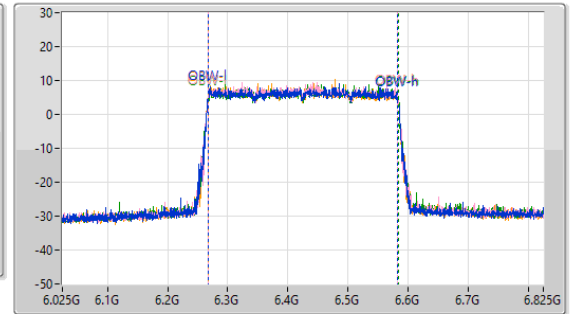
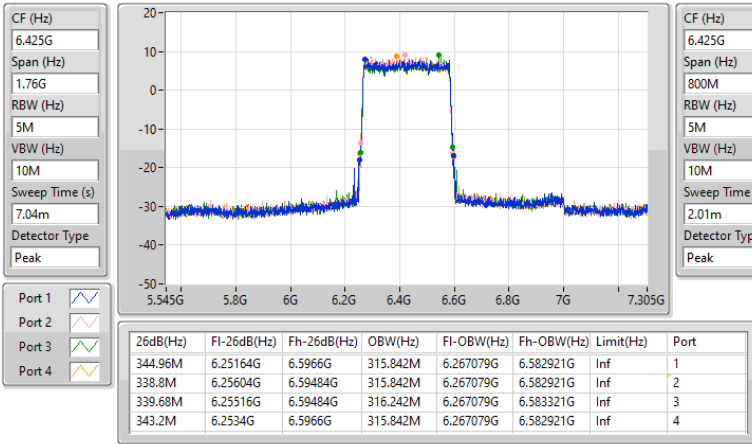


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6435MHz

05/11/2024

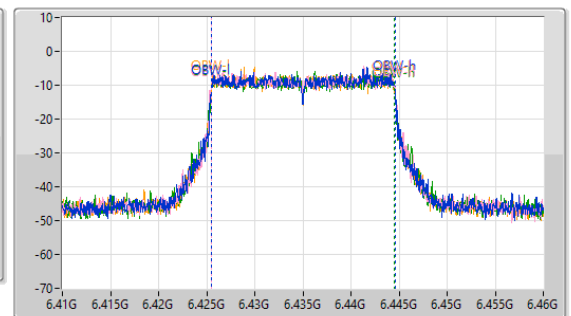
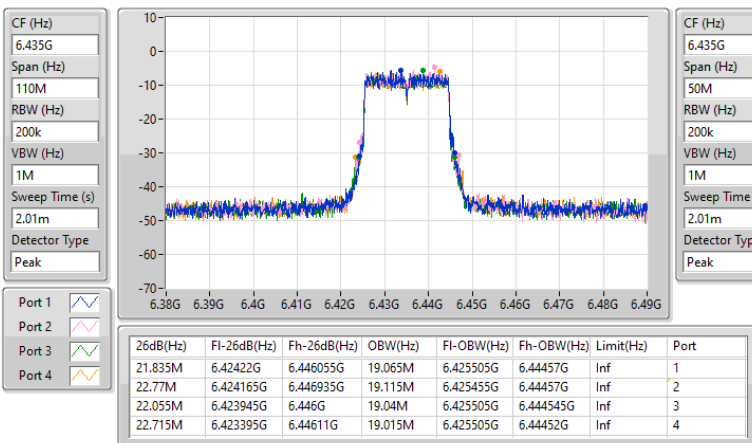


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6485MHz

05/11/2024

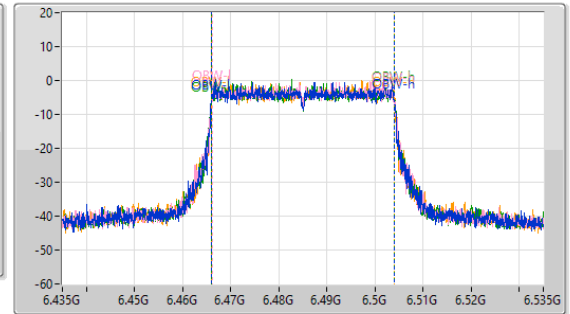
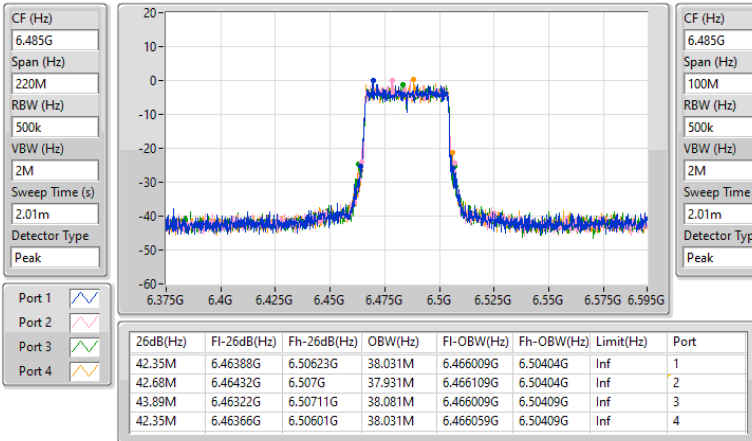


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6465MHz

05/11/2024

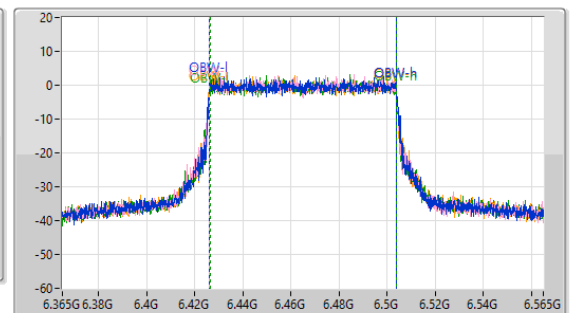
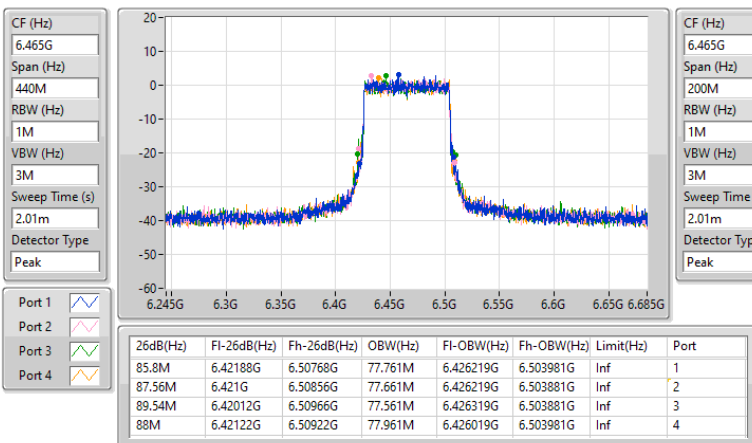


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6505MHz

05/11/2024

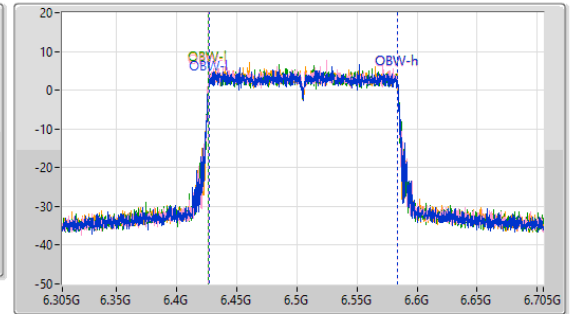
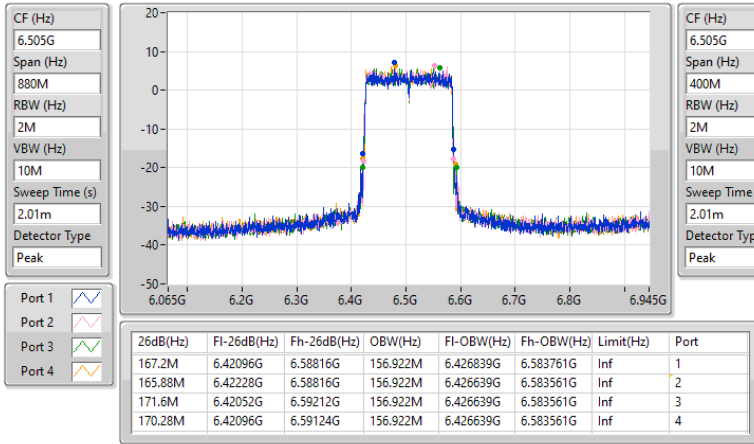


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6585MHz

05/11/2024

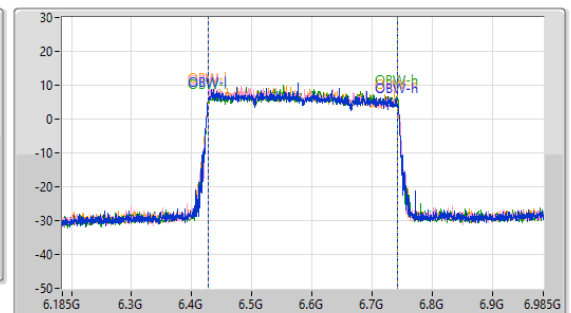
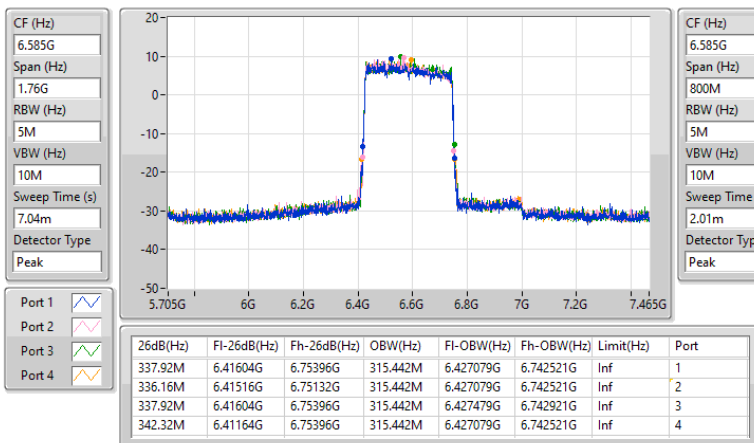


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6695MHz

05/11/2024

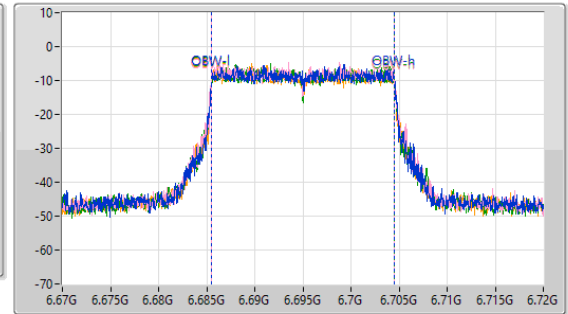
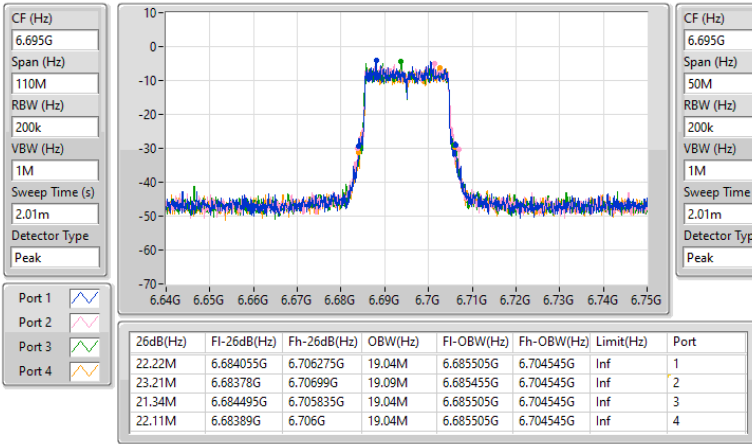


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6685MHz

05/11/2024

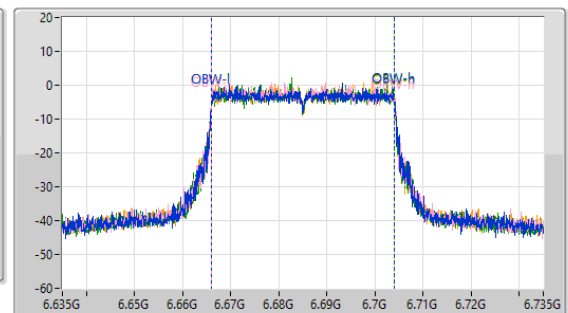
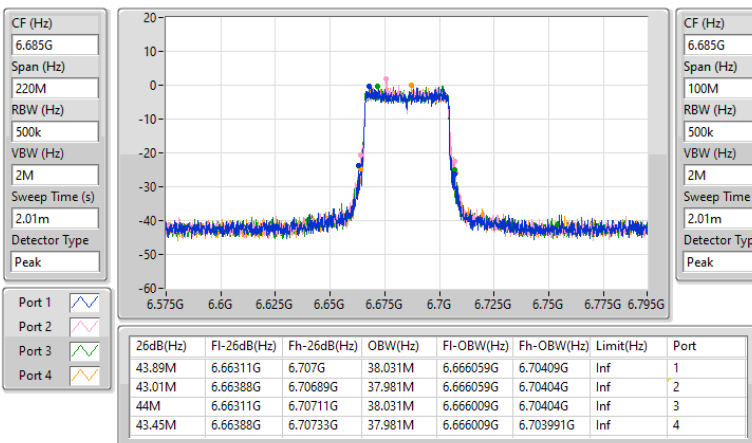


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6785MHz

05/11/2024

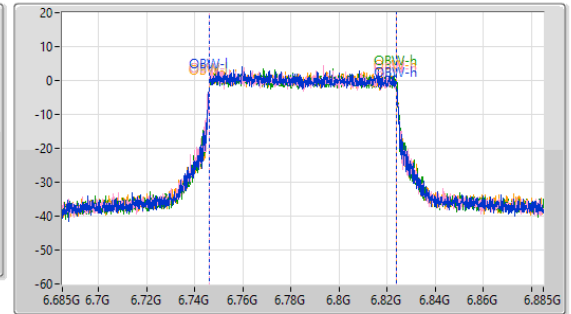
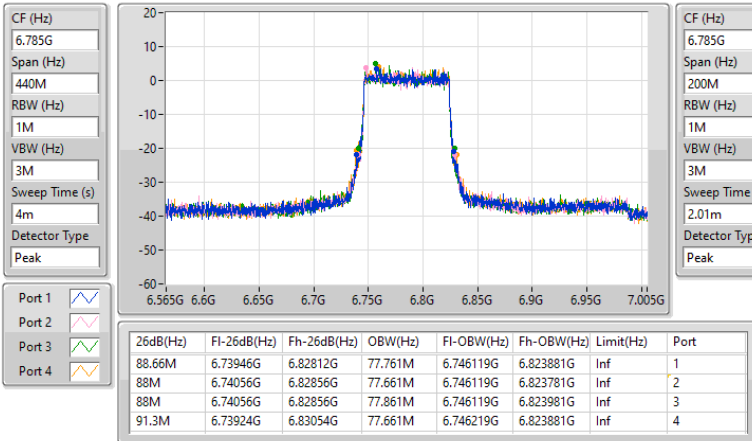


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6825MHz

05/11/2024

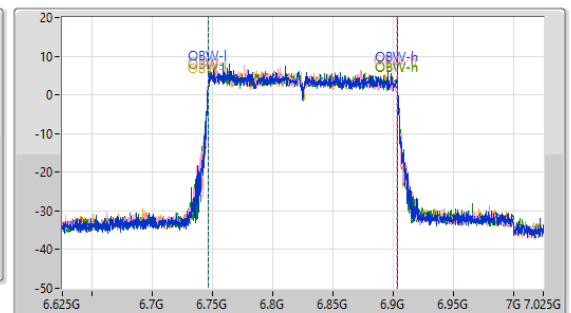
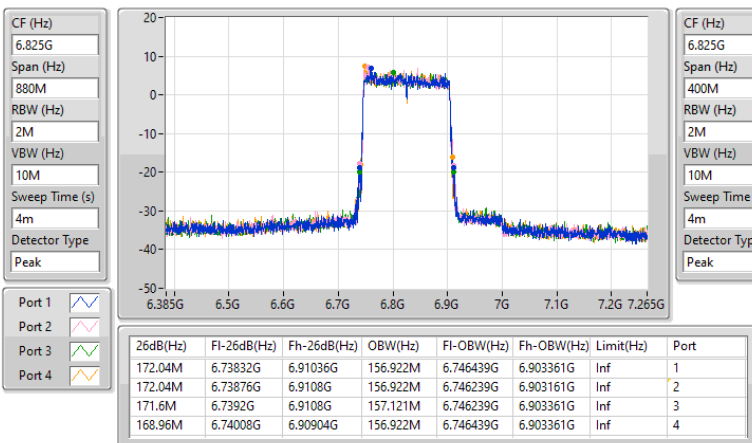


6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

EBW

6905MHz

05/11/2024

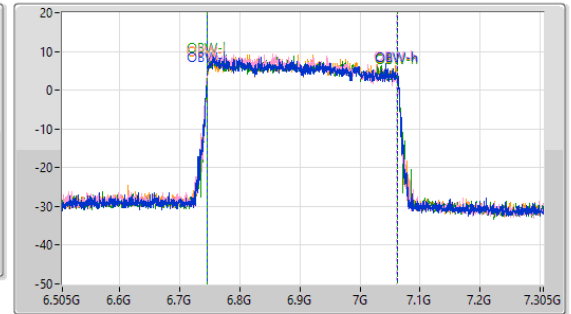
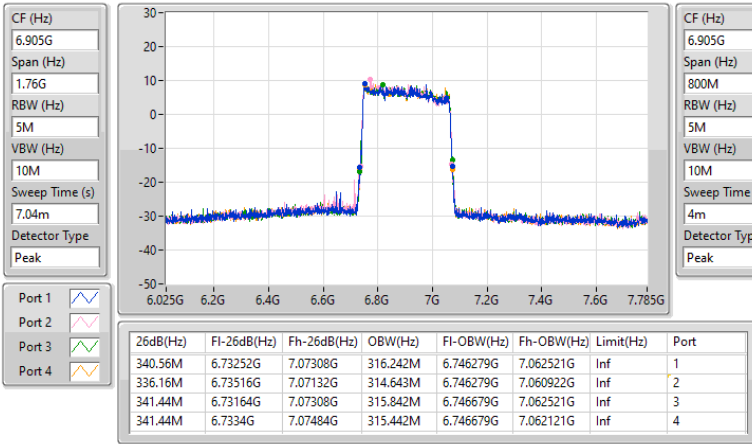


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

6895MHz

05/11/2024

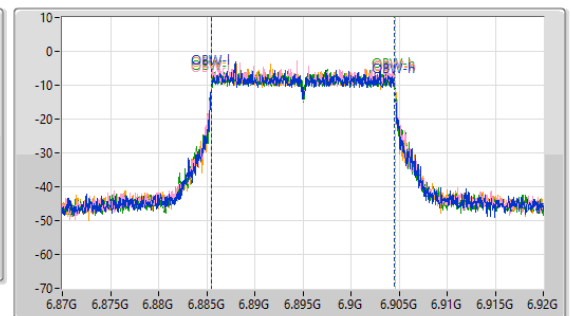
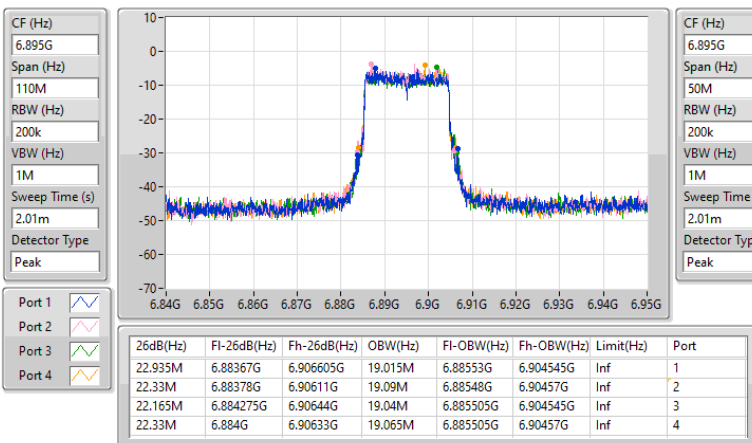


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

6925MHz

05/11/2024

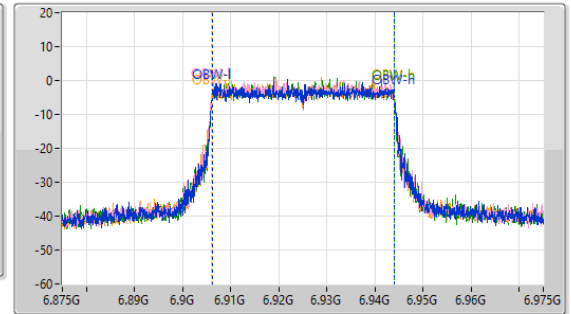
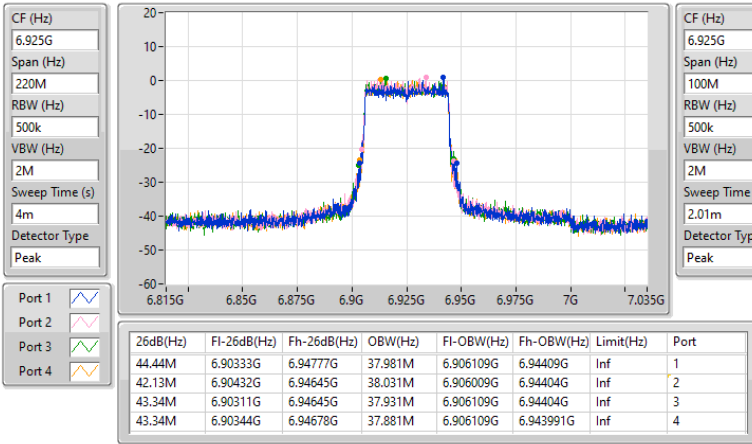


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

6945MHz

05/11/2024

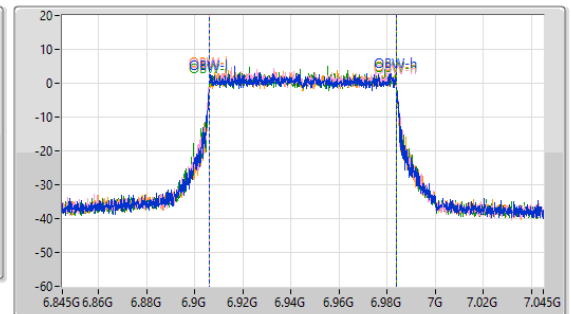
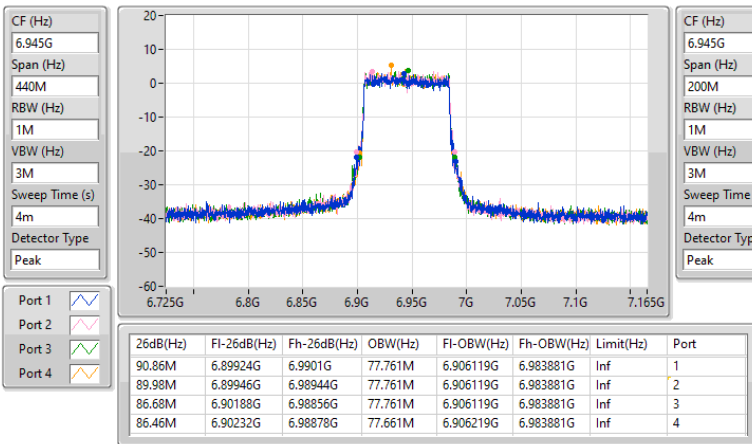


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

6985MHz

05/11/2024

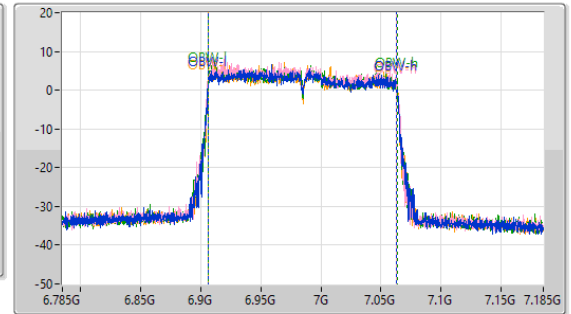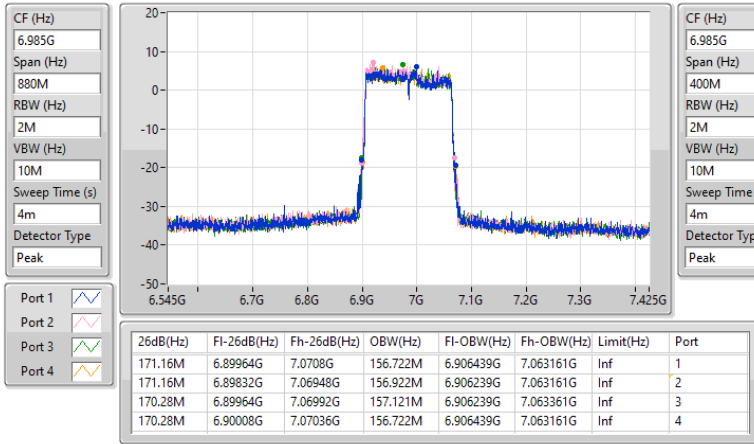

**Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	3.44	0.00221	9.94	0.00986
802.11ax HEW40_Nss1,(MCS0)_2TX	6.31	0.00428	12.81	0.01910
802.11ax HEW80_Nss1,(MCS0)_2TX	9.56	0.00904	16.06	0.04036
802.11ax HEW160_Nss1,(MCS0)_2TX	12.37	0.01726	18.87	0.07709
6.425-6.525GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	3.54	0.00226	10.04	0.01009
802.11ax HEW40_Nss1,(MCS0)_2TX	6.34	0.00431	12.84	0.01923
802.11ax HEW80_Nss1,(MCS0)_2TX	9.52	0.00895	16.02	0.03999
802.11ax HEW160_Nss1,(MCS0)_2TX	12.19	0.01656	18.69	0.07396
6.525-6.875GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	3.12	0.00205	9.62	0.00916
802.11ax HEW40_Nss1,(MCS0)_2TX	6.48	0.00445	12.98	0.01986
802.11ax HEW80_Nss1,(MCS0)_2TX	9.76	0.00946	16.26	0.04227
802.11ax HEW160_Nss1,(MCS0)_2TX	12.26	0.01683	18.76	0.07516
6.875-7.125GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	4.33	0.00271	10.83	0.01211
802.11ax HEW40_Nss1,(MCS0)_2TX	7.08	0.00511	13.58	0.02280
802.11ax HEW80_Nss1,(MCS0)_2TX	9.88	0.00973	16.38	0.04345
802.11ax HEW160_Nss1,(MCS0)_2TX	12.03	0.01596	18.53	0.07129

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	6.50	0.71	0.12	3.44	Inf	9.94	24.00
6195MHz	Pass	6.50	0.35	0.32	3.35	Inf	9.85	24.00
6415MHz	Pass	6.50	-0.07	0.37	3.17	Inf	9.67	24.00
6435MHz	Pass	6.50	-0.04	0.48	3.24	Inf	9.74	24.00
6475MHz	Pass	6.50	-0.42	0.56	3.11	Inf	9.61	24.00
6515MHz	Pass	6.50	0.34	0.71	3.54	Inf	10.04	24.00
6535MHz	Pass	6.50	0.06	-0.13	2.98	Inf	9.48	24.00
6695MHz	Pass	6.50	-0.10	-0.19	2.87	Inf	9.37	24.00
6875MHz	Pass	6.50	0.42	-0.23	3.12	Inf	9.62	24.00
6895MHz	Pass	6.50	-0.09	-0.31	2.81	Inf	9.31	24.00
6995MHz	Pass	6.50	-0.03	-0.11	2.94	Inf	9.44	24.00
7095MHz	Pass	6.50	1.11	1.52	4.33	Inf	10.83	24.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	6.50	3.64	2.94	6.31	Inf	12.81	24.00
6205MHz	Pass	6.50	3.06	3.17	6.13	Inf	12.63	24.00
6405MHz	Pass	6.50	2.83	3.14	6.00	Inf	12.50	24.00
6445MHz	Pass	6.50	2.73	3.39	6.08	Inf	12.58	24.00
6485MHz	Pass	6.50	2.77	3.44	6.13	Inf	12.63	24.00
6525MHz	Pass	6.50	3.29	3.37	6.34	Inf	12.84	24.00
6565MHz	Pass	6.50	3.04	2.80	5.93	Inf	12.43	24.00
6685MHz	Pass	6.50	3.17	2.99	6.09	Inf	12.59	24.00
6885MHz	Pass	6.50	3.78	3.13	6.48	Inf	12.98	24.00
6925MHz	Pass	6.50	2.92	2.89	5.92	Inf	12.42	24.00
7005MHz	Pass	6.50	3.20	3.15	6.19	Inf	12.69	24.00
7085MHz	Pass	6.50	3.87	4.27	7.08	Inf	13.58	24.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	6.50	6.69	6.14	9.43	Inf	15.93	24.00
6225MHz	Pass	6.50	6.08	6.60	9.36	Inf	15.86	24.00
6385MHz	Pass	6.50	6.36	6.74	9.56	Inf	16.06	24.00
6465MHz	Pass	6.50	6.05	6.93	9.52	Inf	16.02	24.00
6545MHz	Pass	6.50	6.00	5.98	9.00	Inf	15.50	24.00
6625MHz	Pass	6.50	6.83	6.13	9.50	Inf	16.00	24.00
6705MHz	Pass	6.50	6.28	6.19	9.25	Inf	15.75	24.00
6785MHz	Pass	6.50	6.81	6.55	9.69	Inf	16.19	24.00
6865MHz	Pass	6.50	6.86	6.63	9.76	Inf	16.26	24.00
6945MHz	Pass	6.50	6.18	6.33	9.27	Inf	15.77	24.00
7025MHz	Pass	6.50	6.89	6.84	9.88	Inf	16.38	24.00
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.50	9.10	8.78	11.95	Inf	18.45	24.00
6185MHz	Pass	6.50	9.31	9.41	12.37	Inf	18.87	24.00
6345MHz	Pass	6.50	8.95	9.24	12.11	Inf	18.61	24.00
6505MHz	Pass	6.50	9.01	9.35	12.19	Inf	18.69	24.00
6665MHz	Pass	6.50	9.08	9.02	12.06	Inf	18.56	24.00
6825MHz	Pass	6.50	9.35	9.14	12.26	Inf	18.76	24.00
6985MHz	Pass	6.50	9.00	9.03	12.03	Inf	18.53	24.00

DG = Directional Gain; Port X = Port X output power

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	11.07	0.01279	16.49	0.04457
802.11be EHT40_Nss1,(MCS0)_4TX	14.01	0.02518	19.43	0.08770
802.11be EHT80_Nss1,(MCS0)_4TX	16.91	0.04909	22.33	0.17100
802.11be EHT160_Nss1,(MCS0)_4TX	19.82	0.09594	25.24	0.33420
802.11be EHT320_Nss1,(MCS0)_4TX	21.31	0.13521	26.73	0.47098
6.425-6.525GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	11.20	0.01318	16.21	0.04178
802.11be EHT40_Nss1,(MCS0)_4TX	14.22	0.02642	19.72	0.09376
802.11be EHT80_Nss1,(MCS0)_4TX	17.19	0.05236	22.70	0.18621
802.11be EHT160_Nss1,(MCS0)_4TX	19.99	0.09977	25.60	0.36308
802.11be EHT320_Nss1,(MCS0)_4TX	21.27	0.13397	26.88	0.48753
6.525-6.875GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	11.63	0.01455	17.36	0.05445
802.11be EHT40_Nss1,(MCS0)_4TX	15.04	0.03192	20.65	0.11614
802.11be EHT80_Nss1,(MCS0)_4TX	18.00	0.06310	23.61	0.22961
802.11be EHT160_Nss1,(MCS0)_4TX	20.38	0.10914	26.01	0.39902
802.11be EHT320_Nss1,(MCS0)_4TX	21.57	0.14355	27.32	0.53951
6.875-7.125GHz	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	12.83	0.01919	18.58	0.07211
802.11be EHT40_Nss1,(MCS0)_4TX	16.03	0.04009	21.78	0.15066
802.11be EHT80_Nss1,(MCS0)_4TX	17.99	0.06295	23.74	0.23659
802.11be EHT160_Nss1,(MCS0)_4TX	20.43	0.11041	26.18	0.41495



Average Power_Non-Beamforming_Radio 2_Full RU

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	5.42	5.06	5.06	4.82	5.23	11.07	Inf	16.49	30.00
6195MHz	Pass	5.42	4.73	4.61	4.44	4.91	10.70	Inf	16.12	30.00
6415MHz	Pass	5.42	4.73	5.63	4.40	4.89	10.96	Inf	16.38	30.00
6435MHz	Pass	5.01	5.21	5.31	4.92	4.98	11.13	Inf	16.14	30.00
6475MHz	Pass	5.01	5.27	5.33	5.01	5.12	11.20	Inf	16.21	30.00
6515MHz	Pass	5.01	5.37	5.17	4.65	4.92	11.06	Inf	16.07	30.00
6535MHz	Pass	5.61	5.60	5.80	5.34	5.68	11.63	Inf	17.24	30.00
6695MHz	Pass	5.61	5.39	5.74	5.50	5.20	11.48	Inf	17.09	30.00
6875MHz	Pass	5.75	5.09	6.06	5.39	5.76	11.61	Inf	17.36	30.00
6895MHz	Pass	5.75	5.71	6.20	5.65	6.03	11.92	Inf	17.67	30.00
6995MHz	Pass	5.75	5.63	6.06	5.48	5.47	11.69	Inf	17.44	30.00
7095MHz	Pass	5.75	6.80	7.15	6.46	6.82	12.83	Inf	18.58	30.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	5.42	7.72	7.91	7.67	7.65	13.76	Inf	19.18	30.00
6205MHz	Pass	5.42	8.06	8.27	7.80	7.80	14.01	Inf	19.43	30.00
6405MHz	Pass	5.42	7.91	8.17	7.64	7.94	13.94	Inf	19.36	30.00
6445MHz	Pass	5.01	8.07	8.29	7.87	8.06	14.10	Inf	19.11	30.00
6485MHz	Pass	5.01	8.16	8.29	8.12	8.21	14.22	Inf	19.23	30.00
6525MHz	Pass	5.61	8.08	8.26	7.98	8.04	14.11	Inf	19.72	30.00
6565MHz	Pass	5.61	8.95	9.14	8.93	9.06	15.04	Inf	20.65	30.00
6685MHz	Pass	5.61	8.83	9.09	8.84	9.05	14.97	Inf	20.58	30.00
6885MHz	Pass	5.75	8.54	9.31	8.78	8.76	14.88	Inf	20.63	30.00
6925MHz	Pass	5.75	8.52	9.23	8.91	8.68	14.86	Inf	20.61	30.00
7005MHz	Pass	5.75	8.44	9.06	8.62	8.17	14.61	Inf	20.36	30.00
7085MHz	Pass	5.75	10.18	10.30	10.10	9.42	16.03	Inf	21.78	30.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	10.68	10.76	10.47	10.87	16.72	Inf	22.14	30.00
6225MHz	Pass	5.42	10.91	11.15	10.55	10.92	16.91	Inf	22.33	30.00
6385MHz	Pass	5.42	10.79	10.99	10.60	10.97	16.86	Inf	22.28	30.00
6465MHz	Pass	5.01	11.13	11.29	11.16	11.09	17.19	Inf	22.20	30.00
6545MHz	Pass	5.61	11.03	11.00	11.11	11.14	17.09	Inf	22.70	30.00
6625MHz	Pass	5.61	12.04	11.89	12.02	11.96	18.00	Inf	23.61	30.00
6705MHz	Pass	5.61	11.24	11.68	11.79	11.28	17.52	Inf	23.13	30.00
6785MHz	Pass	5.61	11.70	11.80	11.55	11.69	17.71	Inf	23.32	30.00
6865MHz	Pass	5.75	10.96	11.83	11.50	11.67	17.52	Inf	23.27	30.00
6945MHz	Pass	5.75	11.81	12.24	11.86	11.95	17.99	Inf	23.74	30.00
7025MHz	Pass	5.75	11.74	12.36	11.88	11.75	17.96	Inf	23.71	30.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	13.27	13.46	13.28	13.43	19.38	Inf	24.80	30.00
6185MHz	Pass	5.42	13.56	13.70	13.62	13.76	19.68	Inf	25.10	30.00
6345MHz	Pass	5.42	13.53	14.02	13.65	13.98	19.82	Inf	25.24	30.00
6505MHz	Pass	5.61	13.83	14.14	13.84	14.05	19.99	Inf	25.60	30.00
6665MHz	Pass	5.61	14.40	14.38	14.27	14.40	20.38	Inf	25.99	30.00
6825MHz	Pass	5.75	14.18	14.36	14.20	14.23	20.26	Inf	26.01	30.00
6985MHz	Pass	5.75	14.13	14.89	14.39	14.20	20.43	Inf	26.18	30.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	15.10	15.51	15.12	15.43	21.31	Inf	26.73	30.00
6265MHz	Pass	5.42	14.84	15.32	14.85	15.18	21.07	Inf	26.49	30.00
6425MHz	Pass	5.61	14.95	15.20	14.75	14.98	20.99	Inf	26.60	30.00
6585MHz	Pass	5.61	15.01	15.41	15.31	15.27	21.27	Inf	26.88	30.00
6745MHz	Pass	5.75	15.37	15.76	15.51	15.55	21.57	Inf	27.32	30.00
6905MHz	Pass	5.75	14.97	15.58	15.05	15.07	21.19	Inf	26.94	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	14.06	0.02547	19.48	0.08872
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	18.29	0.06745	23.71	0.23496
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	19.52	0.08954	24.97	0.31405
6.425-6.525GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	14.71	0.02958	20.22	0.10520
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	18.16	0.06546	23.77	0.23823
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	19.44	0.08790	25.05	0.31989
6.525-6.875GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	16.02	0.03999	21.63	0.14555
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	18.79	0.07568	24.54	0.28445
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	20.11	0.10257	25.86	0.38548
6.875-7.125GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	15.83	0.03828	21.58	0.14388
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	18.43	0.06966	24.18	0.26182

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	7.72	7.97	7.52	7.38	13.67	Inf	19.09	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	6.14	6.76	6.21	5.99	12.31	Inf	17.73	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	8.11	8.02	7.91	7.93	14.01	Inf	19.43	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	6.41	6.86	6.48	6.46	12.58	Inf	18.00	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	8.22	8.19	8.00	7.74	14.06	Inf	19.48	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	6.76	6.72	6.44	6.16	12.55	Inf	17.97	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	8.70	8.91	8.55	8.58	14.71	Inf	19.72	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	7.35	7.44	7.15	7.25	13.32	Inf	18.33	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	8.56	8.72	8.36	8.70	14.61	Inf	20.22	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	6.93	7.39	6.89	7.35	13.17	Inf	18.78	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	9.94	9.85	9.58	9.97	15.86	Inf	21.47	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	8.15	8.26	7.94	7.98	14.11	Inf	19.72	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	5.61	9.70	9.53	9.32	9.35	15.50	Inf	21.11	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	5.61	8.26	8.25	7.97	7.80	14.09	Inf	19.70	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	10.06	10.12	9.86	9.95	16.02	Inf	21.63	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	8.61	8.65	8.32	7.67	14.35	Inf	19.96	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	8.88	9.54	9.41	9.30	15.31	Inf	21.06	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	7.54	7.84	7.87	7.95	13.82	Inf	19.57	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	9.55	9.83	10.21	9.62	15.83	Inf	21.58	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	8.07	8.40	8.51	8.12	14.30	Inf	20.05	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	9.68	9.87	9.83	9.73	15.80	Inf	21.55	30.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	8.20	8.40	8.34	8.38	14.35	Inf	20.10	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	11.36	11.49	11.19	11.42	17.39	Inf	22.81	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	10.48	10.40	10.04	10.08	16.27	Inf	21.69	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	9.94	9.83	9.66	9.45	15.74	Inf	21.16	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	11.91	12.04	11.70	11.71	17.86	Inf	23.28	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	11.13	11.18	10.94	10.94	17.07	Inf	22.49	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6185MHz	Pass	5.42	10.45	10.53	10.35	10.25	16.42	Inf	21.84	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.12	12.05	12.59	12.30	18.29	Inf	23.71	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	11.08	11.16	11.03	10.85	17.05	Inf	22.47	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	10.34	10.56	10.35	10.41	16.44	Inf	21.86	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	12.37	12.26	11.72	12.17	18.16	Inf	23.77	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	11.19	11.30	10.89	11.11	17.15	Inf	22.76	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	11.17	11.14	10.67	11.08	17.04	Inf	22.65	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	12.79	12.25	12.85	12.56	18.64	Inf	24.25	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	11.81	11.62	11.88	11.67	17.77	Inf	23.38	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	11.02	10.94	11.01	10.79	16.96	Inf	22.57	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	12.77	12.94	12.41	12.92	18.79	Inf	24.54	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	12.09	12.19	12.01	12.03	18.10	Inf	23.85	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	10.58	11.09	10.72	10.85	16.83	Inf	22.58	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	12.31	12.37	12.51	12.45	18.43	Inf	24.18	30.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	11.50	11.82	11.87	11.70	17.75	Inf	23.50	30.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	10.18	10.43	10.84	10.57	16.53	Inf	22.28	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.65	13.58	13.45	13.33	19.52	Inf	24.94	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.85	12.95	12.74	12.93	18.89	Inf	24.31	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.25	11.86	11.79	12.09	18.02	Inf	23.44	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.25	11.89	11.70	12.01	17.99	Inf	23.41	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.03	12.76	12.97	13.23	19.02	Inf	24.44	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.25	12.10	12.11	12.42	18.24	Inf	23.66	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	11.71	12.18	12.01	12.42	18.11	Inf	23.53	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	11.78	11.87	11.73	12.20	17.92	Inf	23.34	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.35	13.39	13.37	13.23	19.36	Inf	24.97	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.54	12.82	12.79	12.57	18.70	Inf	24.31	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	11.70	11.82	12.17	11.76	17.89	Inf	23.50	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	11.64	12.02	12.10	11.92	17.94	Inf	23.55	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-



Average Power Non-Beamforming Radio 2 Multi-RU

Appendix C.3

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6585MHz	Pass	5.61	13.40	13.63	13.15	13.48	19.44	Inf	25.05	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	11.92	12.08	11.88	12.48	18.12	Inf	23.73	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.50	12.66	12.35	12.64	18.56	Inf	24.17	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	11.45	11.51	11.33	11.82	17.55	Inf	23.16	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.35	14.25	13.91	13.81	20.11	Inf	25.86	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.06	12.98	12.85	12.79	18.94	Inf	24.69	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.09	12.89	12.61	12.57	18.82	Inf	24.57	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	12.26	11.89	12.02	11.98	18.06	Inf	23.81	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.73	14.25	13.98	13.91	19.99	Inf	25.74	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	12.86	13.02	12.82	13.11	18.97	Inf	24.72	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	12.59	12.85	12.71	12.83	18.77	Inf	24.52	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	12.20	12.06	11.95	12.09	18.10	Inf	23.85	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

**Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	15.21	0.03319	20.63	0.11561
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	19.16	0.08241	24.58	0.28708
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	20.57	0.11402	25.99	0.39719
6.425-6.525GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	15.72	0.03733	20.86	0.12190
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	19.32	0.08551	24.93	0.31117
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	20.37	0.10889	25.98	0.39628
6.525-6.875GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	16.37	0.04335	21.98	0.15776
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	19.73	0.09397	25.48	0.35318
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	20.88	0.12246	26.63	0.46026
6.875-7.125GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	16.90	0.04898	22.65	0.18408
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	19.40	0.08710	25.15	0.32734

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	9.05	9.08	8.97	8.70	14.97	Inf	20.39	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	8.91	9.00	8.79	8.72	14.88	Inf	20.30	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	8.82	8.85	8.71	8.67	14.78	Inf	20.20	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	5.42	8.72	8.78	8.64	8.51	14.68	Inf	20.10	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	9.05	9.49	9.02	9.05	15.18	Inf	20.60	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	9.08	9.35	9.01	9.09	15.16	Inf	20.58	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	9.19	9.34	9.07	9.14	15.21	Inf	20.63	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	5.42	9.24	9.06	8.97	9.16	15.13	Inf	20.55	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	9.13	9.30	9.14	8.85	15.13	Inf	20.55	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	9.06	9.27	9.13	8.89	15.11	Inf	20.53	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	9.17	9.35	9.09	8.99	15.17	Inf	20.59	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	5.42	9.33	9.22	9.16	8.86	15.17	Inf	20.59	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	9.29	10.01	9.48	9.54	15.61	Inf	20.62	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	9.40	10.16	9.52	9.44	15.66	Inf	20.67	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	9.51	10.15	9.54	9.58	15.72	Inf	20.73	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	5.01	9.57	9.91	9.49	9.57	15.66	Inf	20.67	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	9.29	9.50	8.73	9.22	15.21	Inf	20.82	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	9.20	9.53	8.99	9.19	15.25	Inf	20.86	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	9.17	9.52	8.89	9.07	15.19	Inf	20.80	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	5.61	9.00	9.34	8.73	9.07	15.06	Inf	20.67	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	10.35	10.43	10.23	10.33	16.36	Inf	21.97	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	10.34	10.36	10.15	10.25	16.30	Inf	21.91	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	10.48	10.37	10.09	10.20	16.31	Inf	21.92	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	5.61	10.50	10.40	10.10	10.21	16.33	Inf	21.94	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	5.61	10.02	10.03	9.87	9.86	15.97	Inf	21.58	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	5.61	10.05	10.10	9.81	9.77	15.96	Inf	21.57	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	5.61	10.11	10.15	9.96	9.80	16.03	Inf	21.64	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-



Average Power Non-Beamforming Radio 2 Full RU

Appendix C.4

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6705MHz	Pass	5.61	10.11	10.18	9.84	9.78	16.00	Inf	21.61	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	10.19	10.40	10.16	10.26	16.27	Inf	21.88	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	10.26	10.50	10.15	10.31	16.33	Inf	21.94	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	10.38	10.47	10.17	10.38	16.37	Inf	21.98	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	5.61	10.40	10.51	10.10	10.24	16.34	Inf	21.95	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	9.42	10.07	9.81	9.89	15.82	Inf	21.57	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	9.51	10.10	9.83	10.06	15.90	Inf	21.65	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	9.50	10.23	9.91	9.96	15.93	Inf	21.68	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	5.75	9.61	10.30	9.98	9.95	15.99	Inf	21.74	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	10.30	10.74	10.93	10.86	16.73	Inf	22.48	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	10.35	10.70	10.92	10.79	16.72	Inf	22.47	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	10.35	10.83	11.00	10.71	16.75	Inf	22.50	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	5.75	10.23	10.90	11.02	10.76	16.76	Inf	22.51	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	10.68	10.77	10.68	10.90	16.78	Inf	22.53	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	10.81	10.96	10.70	10.91	16.87	Inf	22.62	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	10.89	10.98	10.68	10.88	16.88	Inf	22.63	30.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	5.75	10.83	11.03	10.81	10.83	16.90	Inf	22.65	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.37	12.45	12.14	12.48	18.38	Inf	23.80	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.17	12.26	12.07	12.36	18.24	Inf	23.66	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.35	12.33	12.06	12.43	18.32	Inf	23.74	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.31	12.25	12.03	12.24	18.23	Inf	23.65	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.29	12.20	12.10	12.31	18.25	Inf	23.67	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.11	12.26	12.08	12.36	18.22	Inf	23.64	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.23	12.15	11.99	12.27	18.18	Inf	23.60	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	12.08	11.81	11.85	12.06	17.97	Inf	23.39	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	11.96	11.95	11.66	11.92	17.89	Inf	23.31	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	11.89	11.95	11.49	11.86	17.82	Inf	23.24	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	5.42	11.63	11.65	11.40	11.73	17.62	Inf	23.04	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-



Average Power Non-Beamforming Radio 2 Full RU

Appendix C.4

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6025MHz	Pass	5.42	11.49	11.44	11.22	11.52	17.44	Inf	22.86	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.81	13.17	12.73	12.65	18.87	Inf	24.29	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.74	13.08	12.72	12.57	18.80	Inf	24.22	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.90	13.07	12.65	12.52	18.81	Inf	24.23	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.88	12.98	12.74	12.59	18.82	Inf	24.24	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.85	13.02	12.60	12.60	18.79	Inf	24.21	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.90	13.08	12.64	12.67	18.85	Inf	24.27	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.90	13.07	12.72	12.60	18.85	Inf	24.27	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.88	13.18	12.67	12.64	18.87	Inf	24.29	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.39	12.52	12.19	12.03	18.31	Inf	23.73	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.35	12.54	12.11	12.06	18.29	Inf	23.71	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.36	12.61	12.20	12.13	18.35	Inf	23.77	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	5.42	12.41	12.62	12.27	12.25	18.41	Inf	23.83	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	13.11	12.98	13.36	12.96	19.13	Inf	24.55	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.93	12.92	13.22	13.00	19.04	Inf	24.46	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.98	13.02	13.36	13.02	19.12	Inf	24.54	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.99	12.98	13.23	13.12	19.10	Inf	24.52	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	13.07	12.99	13.32	13.04	19.13	Inf	24.55	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.99	13.03	13.45	13.06	19.16	Inf	24.58	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	13.14	12.90	13.32	13.00	19.11	Inf	24.53	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.99	13.03	13.36	13.06	19.13	Inf	24.55	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.42	12.35	12.78	12.38	18.51	Inf	23.93	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.41	12.55	12.93	12.52	18.63	Inf	24.05	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.40	12.50	12.91	12.57	18.62	Inf	24.04	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	5.42	12.13	12.25	12.11	11.89	18.12	Inf	23.54	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.36	13.36	12.89	13.28	19.25	Inf	24.86	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.49	13.30	12.92	13.23	19.26	Inf	24.87	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.46	13.37	12.99	13.12	19.26	Inf	24.87	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-



Average Power Non-Beamforming Radio 2 Full RU

Appendix C.4

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6505MHz	Pass	5.61	13.45	13.39	12.93	13.18	19.26	Inf	24.87	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.48	13.38	13.03	13.31	19.32	Inf	24.93	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.47	13.43	13.04	13.19	19.31	Inf	24.92	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.49	13.39	13.01	13.27	19.31	Inf	24.92	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	13.42	13.42	13.00	13.20	19.28	Inf	24.89	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	12.48	12.55	11.81	12.41	18.34	Inf	23.95	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	12.54	12.59	11.88	12.46	18.40	Inf	24.01	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	12.66	12.70	12.05	12.56	18.52	Inf	24.13	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	5.61	12.47	12.52	11.98	12.47	18.39	Inf	24.00	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.50	13.24	13.64	13.47	19.49	Inf	25.10	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.49	13.19	13.72	13.48	19.49	Inf	25.10	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.51	13.17	13.64	13.52	19.48	Inf	25.09	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.48	13.28	13.66	13.46	19.49	Inf	25.10	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.60	13.27	13.61	13.51	19.52	Inf	25.13	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.60	13.15	13.73	13.47	19.51	Inf	25.12	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.55	13.18	13.61	13.48	19.48	Inf	25.09	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.53	13.30	13.61	13.48	19.50	Inf	25.11	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	12.99	12.72	13.24	13.07	19.03	Inf	24.64	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	12.99	12.73	13.21	12.95	18.99	Inf	24.60	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.17	12.74	13.25	13.05	19.08	Inf	24.69	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	5.61	13.17	12.64	13.21	12.90	19.01	Inf	24.62	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.37	13.73	13.34	13.68	19.55	Inf	25.30	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.57	13.76	13.50	13.65	19.64	Inf	25.39	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.45	13.84	13.42	13.66	19.62	Inf	25.37	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.59	13.82	13.48	13.61	19.65	Inf	25.40	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.60	13.91	13.48	13.70	19.70	Inf	25.45	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.66	13.83	13.53	13.72	19.71	Inf	25.46	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.61	13.87	13.53	13.72	19.70	Inf	25.45	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6825MHz	Pass	5.75	13.62	13.96	13.52	13.73	19.73	Inf	25.48	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	12.85	13.05	12.68	13.04	18.93	Inf	24.68	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	12.60	12.77	12.48	12.59	18.63	Inf	24.38	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.10	13.32	12.93	13.27	19.18	Inf	24.93	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	5.75	13.27	13.35	13.07	13.28	19.26	Inf	25.01	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.33	13.48	13.17	13.35	19.35	Inf	25.10	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.21	13.44	13.23	13.37	19.33	Inf	25.08	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.25	13.48	13.22	13.34	19.34	Inf	25.09	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.28	13.48	13.26	13.38	19.37	Inf	25.12	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.22	13.47	13.28	13.37	19.36	Inf	25.11	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.23	13.49	13.30	13.38	19.37	Inf	25.12	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.24	13.46	13.29	13.42	19.37	Inf	25.12	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	13.26	13.54	13.33	13.40	19.40	Inf	25.15	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	12.76	12.96	12.72	12.87	18.85	Inf	24.60	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	12.68	12.84	12.72	12.80	18.78	Inf	24.53	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	12.75	13.11	12.91	12.87	18.93	Inf	24.68	30.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	5.75	12.77	13.06	12.86	12.97	18.94	Inf	24.69	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.71	14.80	14.30	14.38	20.57	Inf	25.99	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.77	14.73	14.29	14.32	20.55	Inf	25.97	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.72	14.69	14.37	14.28	20.54	Inf	25.96	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.61	14.65	14.25	14.15	20.44	Inf	25.86	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.58	14.52	14.10	14.15	20.36	Inf	25.78	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.65	14.67	14.23	14.24	20.47	Inf	25.89	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.61	14.58	14.22	14.25	20.44	Inf	25.86	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	14.59	14.62	14.15	14.18	20.41	Inf	25.83	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.76	13.50	13.51	13.44	19.57	Inf	24.99	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.97	14.13	13.82	13.69	19.93	Inf	25.35	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.94	13.90	13.65	13.58	19.79	Inf	25.21	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6105MHz	Pass	5.42	13.93	13.94	13.68	13.69	19.83	Inf	25.25	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.22	13.02	12.82	13.08	19.06	Inf	24.48	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.26	13.10	12.83	12.99	19.07	Inf	24.49	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.10	12.94	12.76	13.05	18.99	Inf	24.41	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.95	12.92	12.66	12.78	18.85	Inf	24.27	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.90	12.81	12.65	12.81	18.81	Inf	24.23	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	12.88	12.74	12.57	12.88	18.79	Inf	24.21	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.47	13.50	13.14	13.37	19.39	Inf	24.81	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.41	13.35	13.13	13.19	19.29	Inf	24.71	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.40	13.17	13.03	13.28	19.24	Inf	24.66	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.38	13.27	13.11	13.27	19.28	Inf	24.70	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.51	13.26	13.00	13.34	19.30	Inf	24.72	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	5.42	13.46	13.22	13.04	13.38	19.30	Inf	24.72	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.04	14.09	13.96	14.10	20.07	Inf	25.49	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.14	14.14	14.01	14.19	20.14	Inf	25.56	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.12	14.17	14.09	14.20	20.17	Inf	25.59	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.20	14.20	13.97	14.33	20.20	Inf	25.62	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.11	14.26	13.96	14.32	20.19	Inf	25.61	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.23	13.97	14.13	14.43	20.21	Inf	25.63	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.23	14.39	14.13	14.37	20.30	Inf	25.72	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	14.18	14.31	14.05	14.41	20.26	Inf	25.68	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.59	13.64	13.37	13.61	19.57	Inf	24.99	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.65	13.63	13.46	13.70	19.63	Inf	25.05	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.84	13.81	13.58	13.91	19.81	Inf	25.23	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.79	13.90	13.62	13.85	19.81	Inf	25.23	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.81	12.73	12.73	13.04	18.85	Inf	24.27	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.79	12.77	12.68	13.10	18.86	Inf	24.28	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.75	12.82	12.80	13.13	18.90	Inf	24.32	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6265MHz	Pass	5.42	12.92	12.73	12.67	13.08	18.87	Inf	24.29	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.93	12.77	12.86	13.16	18.95	Inf	24.37	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.94	13.00	12.97	13.24	19.06	Inf	24.48	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	13.06	12.86	12.83	13.13	18.99	Inf	24.41	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.94	12.88	12.88	13.13	18.98	Inf	24.40	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.46	12.52	12.44	12.78	18.57	Inf	23.99	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.58	12.59	12.56	12.85	18.67	Inf	24.09	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.61	12.56	12.54	12.75	18.64	Inf	24.06	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	5.42	12.58	12.55	12.40	12.78	18.60	Inf	24.02	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.78	14.03	13.89	13.81	19.90	Inf	25.51	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.83	14.09	13.99	13.89	19.97	Inf	25.58	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.78	14.08	14.03	13.92	19.97	Inf	25.58	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.81	14.01	14.05	13.90	19.96	Inf	25.57	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.80	14.08	14.06	13.82	19.96	Inf	25.57	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.90	14.12	14.03	13.83	19.99	Inf	25.60	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.83	13.67	14.01	13.80	19.85	Inf	25.46	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.90	14.12	14.01	13.86	19.99	Inf	25.60	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.40	13.51	13.35	13.33	19.42	Inf	25.03	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.40	13.60	13.45	13.51	19.51	Inf	25.12	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.55	13.68	13.40	13.40	19.53	Inf	25.14	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	13.56	13.59	13.58	13.36	19.54	Inf	25.15	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.67	12.56	12.80	12.49	18.65	Inf	24.26	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.74	12.77	12.95	12.49	18.76	Inf	24.37	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.61	12.73	12.89	12.54	18.72	Inf	24.33	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.67	12.73	12.83	12.50	18.70	Inf	24.31	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.63	12.64	12.81	12.43	18.65	Inf	24.26	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.79	12.78	12.83	12.50	18.75	Inf	24.36	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.33	12.55	12.56	12.49	18.50	Inf	24.11	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6425MHz	Pass	5.61	12.35	12.61	12.66	12.47	18.54	Inf	24.15	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.37	12.59	12.56	12.43	18.51	Inf	24.12	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.60	12.69	12.64	12.51	18.63	Inf	24.24	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.53	12.65	12.73	12.49	18.62	Inf	24.23	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	5.61	12.49	12.61	12.56	12.45	18.55	Inf	24.16	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.13	14.59	13.99	14.37	20.30	Inf	25.91	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.21	14.73	13.99	14.42	20.37	Inf	25.98	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.21	14.64	14.07	14.44	20.37	Inf	25.98	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.11	14.61	14.04	14.31	20.29	Inf	25.90	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.07	14.56	13.97	14.29	20.25	Inf	25.86	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.07	14.54	14.03	14.30	20.26	Inf	25.87	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.20	14.47	14.04	14.25	20.26	Inf	25.87	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.20	14.52	13.99	14.25	20.26	Inf	25.87	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.57	14.08	13.46	13.88	19.78	Inf	25.39	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.68	14.13	13.52	13.94	19.84	Inf	25.45	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.39	13.95	13.52	13.70	19.67	Inf	25.28	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	14.05	14.47	13.87	14.18	20.17	Inf	25.78	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.20	13.56	12.95	13.46	19.32	Inf	24.93	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.35	13.64	13.18	13.42	19.42	Inf	25.03	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.32	13.65	13.20	13.39	19.41	Inf	25.02	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.18	13.51	13.08	13.39	19.31	Inf	24.92	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.18	13.55	13.10	13.26	19.30	Inf	24.91	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	13.26	13.55	13.07	13.37	19.34	Inf	24.95	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.90	13.29	12.74	13.24	19.07	Inf	24.68	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.73	13.18	12.61	13.16	18.95	Inf	24.56	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.64	13.17	12.64	13.08	18.91	Inf	24.52	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.72	13.15	12.61	13.04	18.91	Inf	24.52	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	5.61	12.81	13.16	12.59	13.05	18.93	Inf	24.54	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6585MHz	Pass	5.61	12.77	13.18	12.56	13.06	18.92	Inf	24.53	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.66	14.98	14.52	14.59	20.71	Inf	26.46	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.79	14.95	14.51	14.53	20.72	Inf	26.47	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.91	15.01	14.54	14.54	20.78	Inf	26.53	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.77	14.93	14.52	14.54	20.71	Inf	26.46	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.89	14.99	14.59	14.47	20.76	Inf	26.51	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.95	15.09	14.55	14.56	20.81	Inf	26.56	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.89	15.06	14.60	14.63	20.82	Inf	26.57	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	15.03	15.08	14.63	14.63	20.87	Inf	26.62	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.10	14.28	13.91	13.91	20.07	Inf	25.82	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.21	14.35	13.99	13.92	20.14	Inf	25.89	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.37	14.36	14.06	13.99	20.22	Inf	25.97	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.52	14.54	14.27	14.13	20.39	Inf	26.14	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	14.09	14.16	13.91	13.77	20.01	Inf	25.76	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.70	13.78	13.51	13.35	19.61	Inf	25.36	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.69	13.76	13.44	13.25	19.56	Inf	25.31	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.66	13.62	13.45	13.23	19.51	Inf	25.26	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.77	13.78	13.51	13.22	19.60	Inf	25.35	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.91	13.79	13.51	13.40	19.68	Inf	25.43	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.17	13.41	13.06	13.20	19.23	Inf	24.98	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.18	13.33	13.12	13.05	19.19	Inf	24.94	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.25	13.41	13.07	13.16	19.24	Inf	24.99	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.86	13.95	13.62	13.69	19.80	Inf	25.55	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.85	14.03	13.74	13.72	19.86	Inf	25.61	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	5.75	13.90	14.02	13.77	13.86	19.91	Inf	25.66	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.65	15.01	14.81	14.94	20.88	Inf	26.63	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.21	14.60	14.46	14.43	20.45	Inf	26.20	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.31	14.65	14.42	14.49	20.49	Inf	26.24	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-



Average Power Non-Beamforming Radio 2 Full RU

Appendix C.4

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6905MHz	Pass	5.75	14.33	14.75	14.44	14.60	20.55	Inf	26.30	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.40	14.73	14.54	14.64	20.60	Inf	26.35	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.28	14.77	14.57	14.62	20.58	Inf	26.33	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.33	14.81	14.61	14.61	20.61	Inf	26.36	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.40	14.89	14.59	14.63	20.65	Inf	26.40	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	14.42	14.82	14.60	14.76	20.67	Inf	26.42	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.81	14.09	13.87	14.11	19.99	Inf	25.74	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.90	14.32	14.02	14.11	20.11	Inf	25.86	30.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.85	14.52	14.16	14.27	20.23	Inf	25.98	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.35	13.87	13.66	13.76	19.68	Inf	25.43	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.12	13.56	13.32	13.36	19.36	Inf	25.11	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.16	13.55	13.27	13.41	19.37	Inf	25.12	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.23	13.56	13.32	13.42	19.40	Inf	25.15	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.24	13.64	13.42	13.40	19.45	Inf	25.20	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.24	13.74	13.49	13.44	19.50	Inf	25.25	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.55	13.78	13.65	13.96	19.76	Inf	25.51	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.59	13.87	13.59	13.95	19.77	Inf	25.52	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.66	13.96	13.72	13.96	19.85	Inf	25.60	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.70	14.03	13.74	13.99	19.89	Inf	25.64	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.65	14.14	13.81	14.03	19.93	Inf	25.68	30.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	5.75	13.69	14.14	13.89	14.03	19.96	Inf	25.71	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	3.32	0.00215	12.78	0.01897
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	6.19	0.00416	15.65	0.03673
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	9.44	0.00879	18.90	0.07762
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	12.24	0.01675	21.70	0.14791
6.425-6.525GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	3.43	0.00220	12.89	0.01945
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	6.21	0.00418	15.67	0.03690
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	9.42	0.00875	18.88	0.07727
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	12.05	0.01603	21.51	0.14158
6.525-6.875GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	2.99	0.00199	12.45	0.01758
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	6.37	0.00434	15.83	0.03828
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	9.64	0.00920	19.10	0.08128
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	12.14	0.01637	21.60	0.14454
6.875-7.125GHz	-	-	-	-
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	4.19	0.00262	13.65	0.02317
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	6.97	0.00498	16.43	0.04395
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	9.74	0.00942	19.20	0.08318
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	11.89	0.01545	21.35	0.13646

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	9.46	0.61	-0.02	3.32	Inf	12.78	24.00
6195MHz	Pass	9.46	0.20	0.18	3.20	Inf	12.66	24.00
6415MHz	Pass	9.46	-0.17	0.27	3.07	Inf	12.53	24.00
6435MHz	Pass	9.46	-0.18	0.36	3.11	Inf	12.57	24.00
6475MHz	Pass	9.46	-0.56	0.46	2.99	Inf	12.45	24.00
6515MHz	Pass	9.46	0.24	0.59	3.43	Inf	12.89	24.00
6535MHz	Pass	9.46	-0.08	-0.23	2.86	Inf	12.32	24.00
6695MHz	Pass	9.46	-0.25	-0.29	2.74	Inf	12.20	24.00
6875MHz	Pass	9.46	0.30	-0.36	2.99	Inf	12.45	24.00
6895MHz	Pass	9.46	-0.19	-0.42	2.71	Inf	12.17	24.00
6995MHz	Pass	9.46	-0.18	-0.24	2.80	Inf	12.26	24.00
7095MHz	Pass	9.46	0.96	1.38	4.19	Inf	13.65	24.00
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	9.46	3.51	2.83	6.19	Inf	15.65	24.00
6205MHz	Pass	9.46	2.94	3.05	6.01	Inf	15.47	24.00
6405MHz	Pass	9.46	2.68	3.00	5.85	Inf	15.31	24.00
6445MHz	Pass	9.46	2.59	3.29	5.96	Inf	15.42	24.00
6485MHz	Pass	9.46	2.65	3.31	6.00	Inf	15.46	24.00
6525MHz	Pass	9.46	3.17	3.22	6.21	Inf	15.67	24.00
6565MHz	Pass	9.46	2.89	2.69	5.80	Inf	15.26	24.00
6685MHz	Pass	9.46	3.04	2.88	5.97	Inf	15.43	24.00
6885MHz	Pass	9.46	3.68	3.02	6.37	Inf	15.83	24.00
6925MHz	Pass	9.46	2.81	2.79	5.81	Inf	15.27	24.00
7005MHz	Pass	9.46	3.10	3.01	6.07	Inf	15.53	24.00
7085MHz	Pass	9.46	3.76	4.16	6.97	Inf	16.43	24.00
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	9.46	6.55	6.00	9.29	Inf	18.75	24.00
6225MHz	Pass	9.46	5.94	6.49	9.23	Inf	18.69	24.00
6385MHz	Pass	9.46	6.26	6.59	9.44	Inf	18.90	24.00
6465MHz	Pass	9.46	5.94	6.83	9.42	Inf	18.88	24.00
6545MHz	Pass	9.46	5.87	5.88	8.89	Inf	18.35	24.00
6625MHz	Pass	9.46	6.72	6.00	9.39	Inf	18.85	24.00
6705MHz	Pass	9.46	6.17	6.09	9.14	Inf	18.60	24.00
6785MHz	Pass	9.46	6.66	6.44	9.56	Inf	19.02	24.00
6865MHz	Pass	9.46	6.75	6.50	9.64	Inf	19.10	24.00
6945MHz	Pass	9.46	6.04	6.22	9.14	Inf	18.60	24.00
7025MHz	Pass	9.46	6.77	6.69	9.74	Inf	19.20	24.00
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	9.46	8.98	8.66	11.83	Inf	21.29	24.00
6185MHz	Pass	9.46	9.17	9.29	12.24	Inf	21.70	24.00
6345MHz	Pass	9.46	8.81	9.11	11.97	Inf	21.43	24.00
6505MHz	Pass	9.46	8.87	9.21	12.05	Inf	21.51	24.00
6665MHz	Pass	9.46	8.93	8.87	11.91	Inf	21.37	24.00
6825MHz	Pass	9.46	9.22	9.03	12.14	Inf	21.60	24.00
6985MHz	Pass	9.46	8.86	8.89	11.89	Inf	21.35	24.00

DG = Directional Gain; Port X = Port X output power

**Summary**

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.07	0.01279	18.88	0.07727
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.01	0.02518	21.82	0.15205
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.91	0.04909	24.72	0.29648
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.82	0.09594	27.63	0.57943
802.11be EHT320-BF_Nss1,(MCS0)_4TX	21.31	0.13521	29.12	0.81658
6.425-6.525GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.20	0.01318	18.86	0.07691
802.11be EHT40-BF_Nss1,(MCS0)_4TX	14.22	0.02642	21.88	0.15417
802.11be EHT80-BF_Nss1,(MCS0)_4TX	17.19	0.05236	24.85	0.30549
802.11be EHT160-BF_Nss1,(MCS0)_4TX	19.99	0.09977	27.65	0.58210
802.11be EHT320-BF_Nss1,(MCS0)_4TX	21.27	0.13397	28.93	0.78163
6.525-6.875GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	11.63	0.01455	18.45	0.06998
802.11be EHT40-BF_Nss1,(MCS0)_4TX	15.04	0.03192	21.86	0.15346
802.11be EHT80-BF_Nss1,(MCS0)_4TX	18.00	0.06310	24.82	0.30339
802.11be EHT160-BF_Nss1,(MCS0)_4TX	20.38	0.10914	27.20	0.52481
802.11be EHT320-BF_Nss1,(MCS0)_4TX	21.57	0.14355	28.39	0.69024
6.875-7.125GHz	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	12.83	0.01919	19.48	0.08872
802.11be EHT40-BF_Nss1,(MCS0)_4TX	16.03	0.04009	22.68	0.18535
802.11be EHT80-BF_Nss1,(MCS0)_4TX	17.99	0.06295	24.64	0.29107
802.11be EHT160-BF_Nss1,(MCS0)_4TX	20.43	0.11041	27.08	0.51050

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	7.81	5.06	5.06	4.82	5.23	11.07	Inf	18.88	30.00
6195MHz	Pass	7.81	4.73	4.61	4.44	4.91	10.70	Inf	18.51	30.00
6415MHz	Pass	7.81	4.73	5.63	4.40	4.89	10.96	Inf	18.77	30.00
6435MHz	Pass	7.66	5.21	5.31	4.92	4.98	11.13	Inf	18.79	30.00
6475MHz	Pass	7.66	5.27	5.33	5.01	5.12	11.20	Inf	18.86	30.00
6515MHz	Pass	7.66	5.37	5.17	4.65	4.92	11.06	Inf	18.72	30.00
6535MHz	Pass	6.82	5.60	5.80	5.34	5.68	11.63	Inf	18.45	30.00
6695MHz	Pass	6.82	5.39	5.74	5.50	5.20	11.48	Inf	18.30	30.00
6875MHz	Pass	6.82	5.09	6.06	5.39	5.76	11.61	Inf	18.43	30.00
6895MHz	Pass	6.65	5.71	6.20	5.65	6.03	11.92	Inf	18.57	30.00
6995MHz	Pass	6.65	5.63	6.06	5.48	5.47	11.69	Inf	18.34	30.00
7095MHz	Pass	6.65	6.80	7.15	6.46	6.82	12.83	Inf	19.48	30.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	7.81	7.72	7.91	7.67	7.65	13.76	Inf	21.57	30.00
6205MHz	Pass	7.81	8.06	8.27	7.80	7.80	14.01	Inf	21.82	30.00
6405MHz	Pass	7.81	7.91	8.17	7.64	7.94	13.94	Inf	21.75	30.00
6445MHz	Pass	7.66	8.07	8.29	7.87	8.06	14.10	Inf	21.76	30.00
6485MHz	Pass	7.66	8.16	8.29	8.12	8.21	14.22	Inf	21.88	30.00
6525MHz	Pass	7.66	8.08	8.26	7.98	8.04	14.11	Inf	21.77	30.00
6565MHz	Pass	6.82	8.95	9.14	8.93	9.06	15.04	Inf	21.86	30.00
6685MHz	Pass	6.82	8.83	9.09	8.84	9.05	14.97	Inf	21.79	30.00
6885MHz	Pass	6.82	8.54	9.31	8.78	8.76	14.88	Inf	21.70	30.00
6925MHz	Pass	6.65	8.52	9.23	8.91	8.68	14.86	Inf	21.51	30.00
7005MHz	Pass	6.65	8.44	9.06	8.62	8.17	14.61	Inf	21.26	30.00
7085MHz	Pass	6.65	10.18	10.30	10.10	9.42	16.03	Inf	22.68	30.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	10.68	10.76	10.47	10.87	16.72	Inf	24.53	30.00
6225MHz	Pass	7.81	10.91	11.15	10.55	10.92	16.91	Inf	24.72	30.00
6385MHz	Pass	7.81	10.79	10.99	10.60	10.97	16.86	Inf	24.67	30.00
6465MHz	Pass	7.66	11.13	11.29	11.16	11.09	17.19	Inf	24.85	30.00
6545MHz	Pass	7.66	11.03	11.00	11.11	11.14	17.09	Inf	24.75	30.00
6625MHz	Pass	6.82	12.04	11.89	12.02	11.96	18.00	Inf	24.82	30.00
6705MHz	Pass	6.82	11.24	11.68	11.79	11.28	17.52	Inf	24.34	30.00
6785MHz	Pass	6.82	11.70	11.80	11.55	11.69	17.71	Inf	24.53	30.00
6865MHz	Pass	6.82	10.96	11.83	11.50	11.67	17.52	Inf	24.34	30.00
6945MHz	Pass	6.65	11.81	12.24	11.86	11.95	17.99	Inf	24.64	30.00
7025MHz	Pass	6.65	11.74	12.36	11.88	11.75	17.96	Inf	24.61	30.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	13.27	13.46	13.28	13.43	19.38	Inf	27.19	30.00
6185MHz	Pass	7.81	13.56	13.70	13.62	13.76	19.68	Inf	27.49	30.00
6345MHz	Pass	7.81	13.53	14.02	13.65	13.98	19.82	Inf	27.63	30.00
6505MHz	Pass	7.66	13.83	14.14	13.84	14.05	19.99	Inf	27.65	30.00
6665MHz	Pass	6.82	14.40	14.38	14.27	14.40	20.38	Inf	27.20	30.00
6825MHz	Pass	6.82	14.18	14.36	14.20	14.23	20.26	Inf	27.08	30.00
6985MHz	Pass	6.65	14.13	14.89	14.39	14.20	20.43	Inf	27.08	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	15.10	15.51	15.12	15.43	21.31	Inf	29.12	30.00
6265MHz	Pass	7.81	14.84	15.32	14.85	15.18	21.07	Inf	28.88	30.00
6425MHz	Pass	7.81	14.95	15.20	14.75	14.98	20.99	Inf	28.80	30.00
6585MHz	Pass	7.66	15.01	15.41	15.31	15.27	21.27	Inf	28.93	30.00
6745MHz	Pass	6.82	15.37	15.76	15.51	15.55	21.57	Inf	28.39	30.00
6905MHz	Pass	6.82	14.97	15.58	15.05	15.07	21.19	Inf	28.01	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-10.61	-1.15
802.11ax HEW40_Nss1,(MCS0)_2TX	-10.57	-1.11
802.11ax HEW80_Nss1,(MCS0)_2TX	-10.47	-1.01
802.11ax HEW160_Nss1,(MCS0)_2TX	-10.61	-1.15
6.425-6.525GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-10.58	-1.12
802.11ax HEW40_Nss1,(MCS0)_2TX	-10.58	-1.12
802.11ax HEW80_Nss1,(MCS0)_2TX	-10.67	-1.21
802.11ax HEW160_Nss1,(MCS0)_2TX	-10.84	-1.38
6.525-6.875GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-10.57	-1.11
802.11ax HEW40_Nss1,(MCS0)_2TX	-10.56	-1.10
802.11ax HEW80_Nss1,(MCS0)_2TX	-10.48	-1.02
802.11ax HEW160_Nss1,(MCS0)_2TX	-10.55	-1.09
6.875-7.125GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	-10.64	-1.18
802.11ax HEW40_Nss1,(MCS0)_2TX	-10.84	-1.38
802.11ax HEW80_Nss1,(MCS0)_2TX	-10.78	-1.32
802.11ax HEW160_Nss1,(MCS0)_2TX	-10.67	-1.21

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	9.46	-13.45	-14.02	-10.79	Inf	-1.33	-1.00
6195MHz	Pass	9.46	-13.60	-13.81	-10.75	Inf	-1.29	-1.00
6415MHz	Pass	9.46	-13.61	-13.23	-10.61	Inf	-1.15	-1.00
6435MHz	Pass	9.46	-13.75	-12.92	-10.61	Inf	-1.15	-1.00
6475MHz	Pass	9.46	-13.94	-13.26	-10.86	Inf	-1.40	-1.00
6515MHz	Pass	9.46	-13.52	-13.20	-10.58	Inf	-1.12	-1.00
6535MHz	Pass	9.46	-13.47	-13.48	-10.57	Inf	-1.11	-1.00
6695MHz	Pass	9.46	-13.71	-13.86	-10.86	Inf	-1.40	-1.00
6875MHz	Pass	9.46	-13.30	-13.57	-10.57	Inf	-1.11	-1.00
6895MHz	Pass	9.46	-13.34	-13.88	-10.64	Inf	-1.18	-1.00
6995MHz	Pass	9.46	-13.65	-13.98	-10.85	Inf	-1.39	-1.00
7095MHz	Pass	9.46	-13.82	-13.64	-10.75	Inf	-1.29	-1.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	9.46	-13.33	-13.96	-10.72	Inf	-1.26	-1.00
6205MHz	Pass	9.46	-13.82	-13.60	-10.78	Inf	-1.32	-1.00
6405MHz	Pass	9.46	-13.56	-13.39	-10.57	Inf	-1.11	-1.00
6445MHz	Pass	9.46	-13.67	-13.01	-10.79	Inf	-1.33	-1.00
6485MHz	Pass	9.46	-13.94	-13.32	-10.71	Inf	-1.25	-1.00
6525MHz	Pass	9.46	-13.40	-13.30	-10.58	Inf	-1.12	-1.00
6565MHz	Pass	9.46	-13.82	-13.72	-10.87	Inf	-1.41	-1.00
6685MHz	Pass	9.46	-13.56	-13.79	-10.72	Inf	-1.26	-1.00
6885MHz	Pass	9.46	-13.11	-13.80	-10.56	Inf	-1.10	-1.00
6925MHz	Pass	9.46	-13.86	-13.88	-10.94	Inf	-1.48	-1.00
7005MHz	Pass	9.46	-13.80	-13.85	-10.84	Inf	-1.38	-1.00
7085MHz	Pass	9.46	-14.27	-13.83	-11.15	Inf	-1.69	-1.00
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	9.46	-13.43	-13.78	-10.71	Inf	-1.25	-1.00
6225MHz	Pass	9.46	-14.07	-13.38	-10.78	Inf	-1.32	-1.00
6385MHz	Pass	9.46	-13.64	-12.96	-10.47	Inf	-1.01	-1.00
6465MHz	Pass	9.46	-13.98	-13.22	-10.67	Inf	-1.21	-1.00
6545MHz	Pass	9.46	-13.72	-13.83	-10.90	Inf	-1.44	-1.00
6625MHz	Pass	9.46	-13.36	-14.08	-10.78	Inf	-1.32	-1.00
6705MHz	Pass	9.46	-13.73	-13.74	-10.81	Inf	-1.35	-1.00
6785MHz	Pass	9.46	-13.41	-13.66	-10.57	Inf	-1.11	-1.00
6865MHz	Pass	9.46	-13.12	-13.48	-10.48	Inf	-1.02	-1.00
6945MHz	Pass	9.46	-13.83	-13.63	-10.83	Inf	-1.37	-1.00
7025MHz	Pass	9.46	-13.54	-13.43	-10.78	Inf	-1.32	-1.00
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	9.46	-13.77	-14.15	-10.96	Inf	-1.50	-1.00
6185MHz	Pass	9.46	-13.42	-13.54	-10.61	Inf	-1.15	-1.00
6345MHz	Pass	9.46	-13.95	-13.78	-10.91	Inf	-1.45	-1.00
6505MHz	Pass	9.46	-14.09	-13.33	-10.84	Inf	-1.38	-1.00
6665MHz	Pass	9.46	-13.36	-13.63	-10.55	Inf	-1.09	-1.00
6825MHz	Pass	9.46	-13.62	-13.93	-10.78	Inf	-1.32	-1.00
6985MHz	Pass	9.46	-13.70	-13.56	-10.67	Inf	-1.21	-1.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5955MHz

16/01/2024

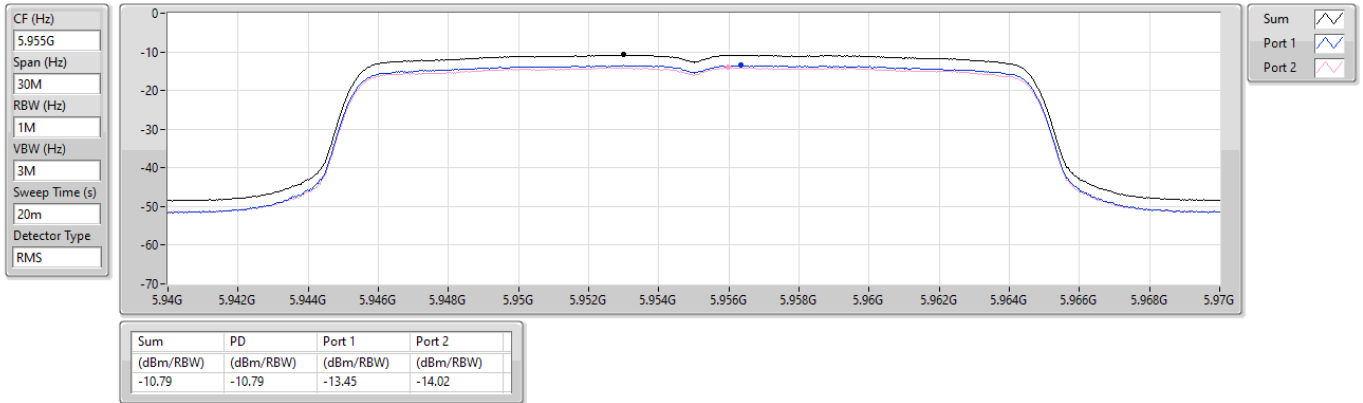


5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6195MHz

16/01/2024

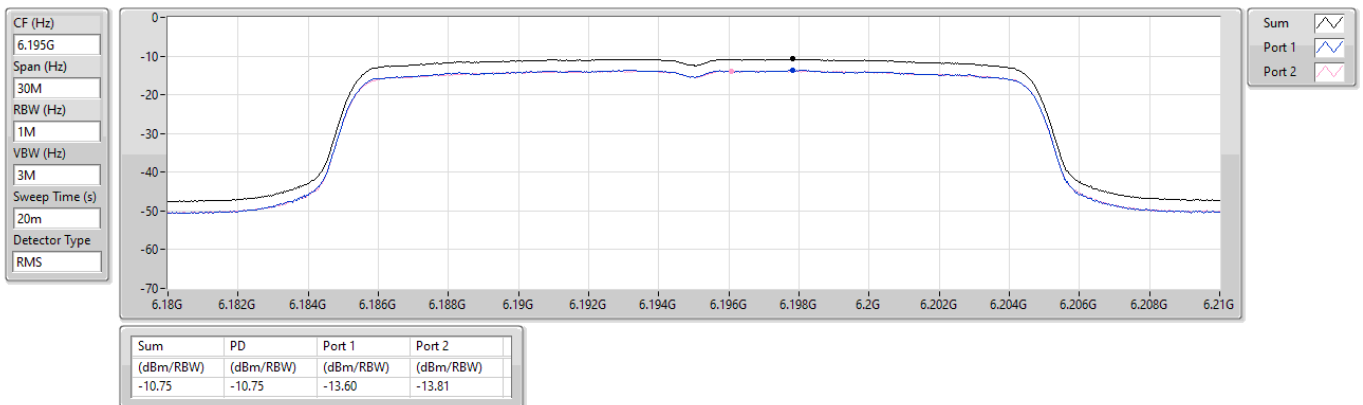

5.925-6.425GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6415MHz

17/01/2024

CF (Hz)
6.415G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

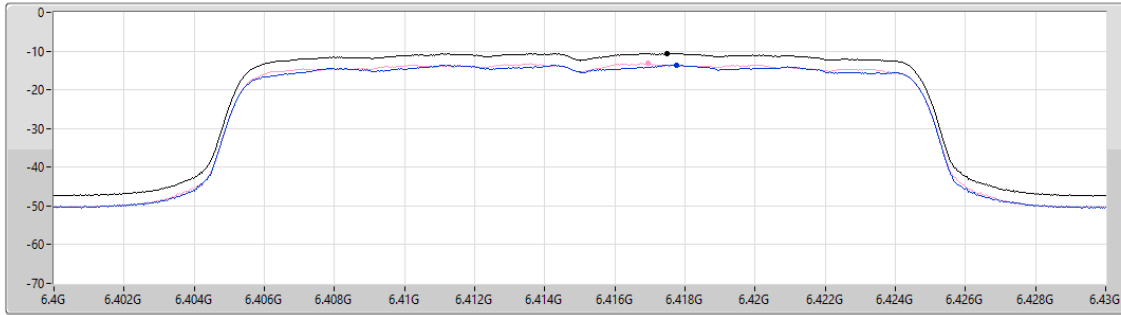

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.61	-10.61	-13.61	-13.23

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6435MHz

17/01/2024

CF (Hz)
6.435G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

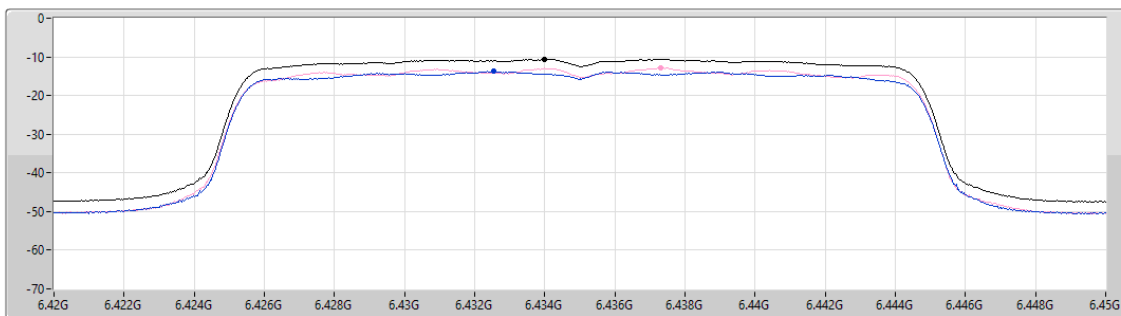

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.61	-10.61	-13.75	-12.92

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6475MHz

17/01/2024

CF (Hz)
6.475G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

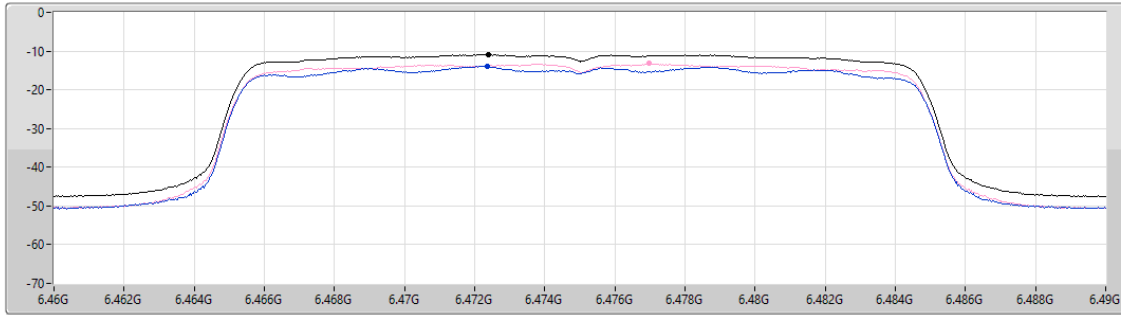

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.86	-10.86	-13.94	-13.26

6.425-6.525GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6515MHz

16/01/2024

CF (Hz)
6.515G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

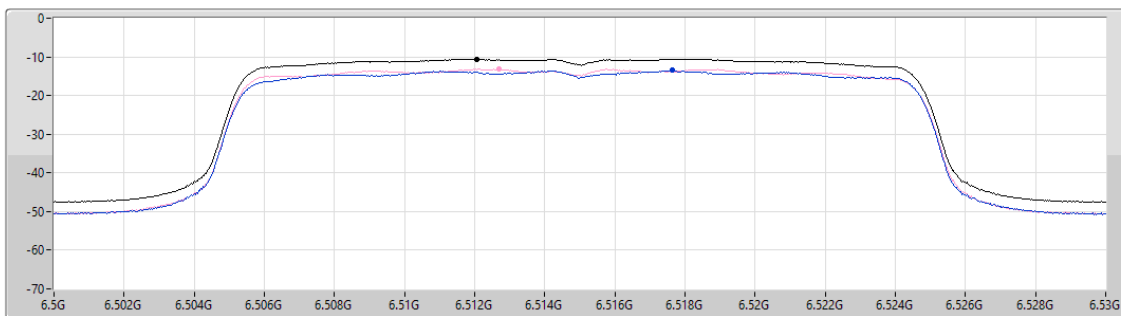

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.58	-10.58	-13.52	-13.20

6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6535MHz

17/01/2024

CF (Hz)
6.535G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

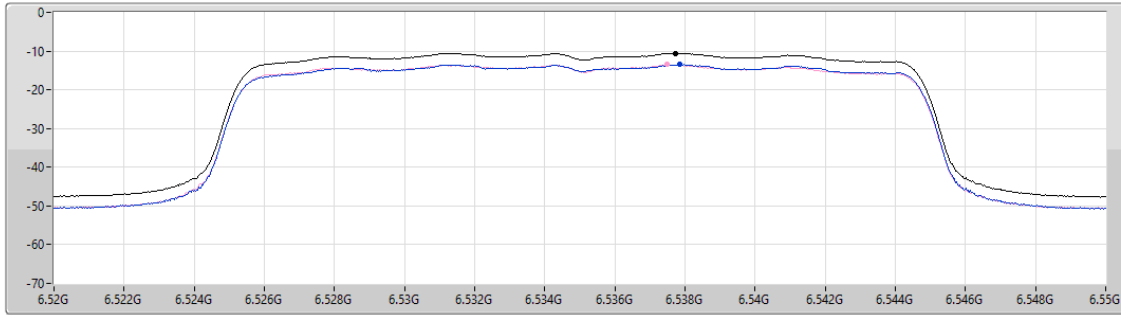

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.57	-10.57	-13.47	-13.48

6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6695MHz

17/01/2024

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

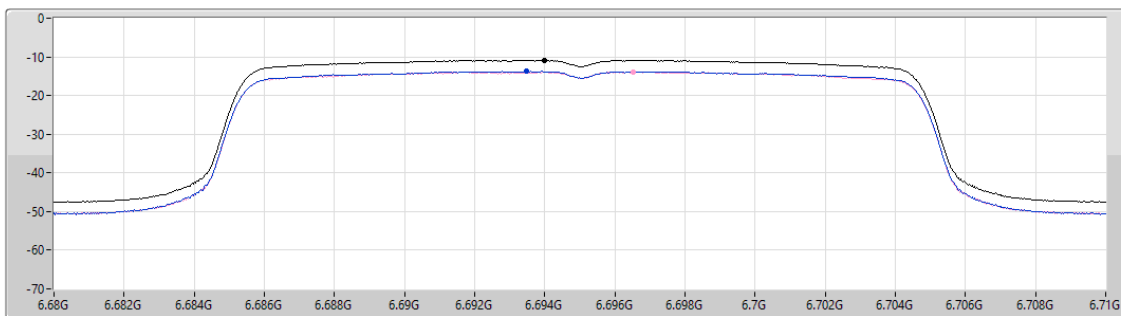

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.86	-10.86	-13.71	-13.86

6.525-6.875GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6875MHz

17/01/2024

CF (Hz)
6.875G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

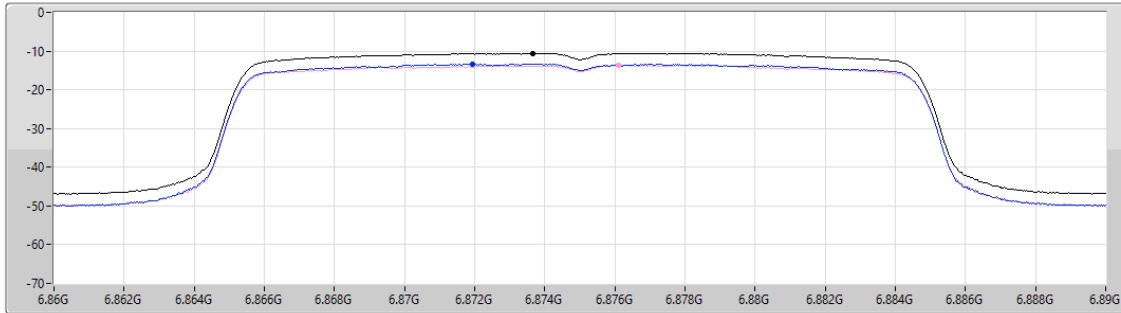

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.57	-10.57	-13.30	-13.57

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6895MHz

17/01/2024

CF (Hz)
6.895G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

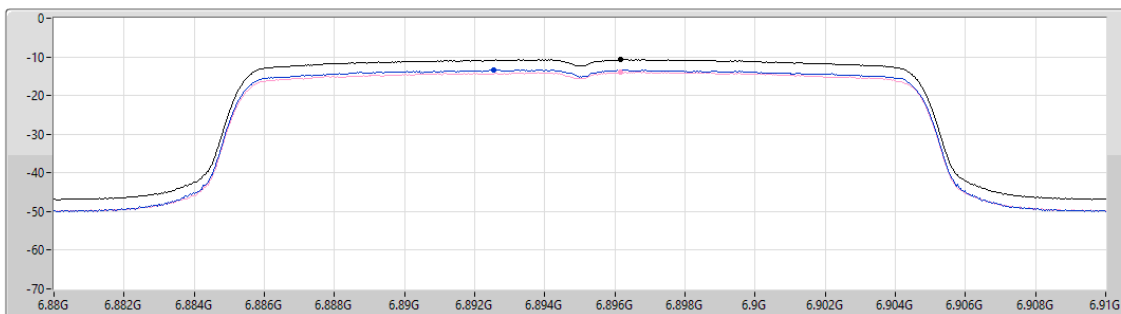

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.64	-10.64	-13.34	-13.88

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

6995MHz

17/01/2024

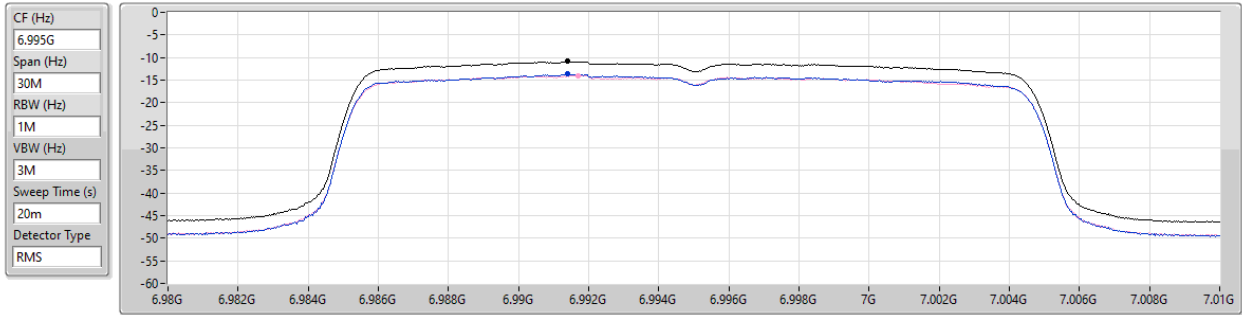


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.85	-10.85	-13.65	-13.98

6.875-7.125GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

7095MHz

17/01/2024

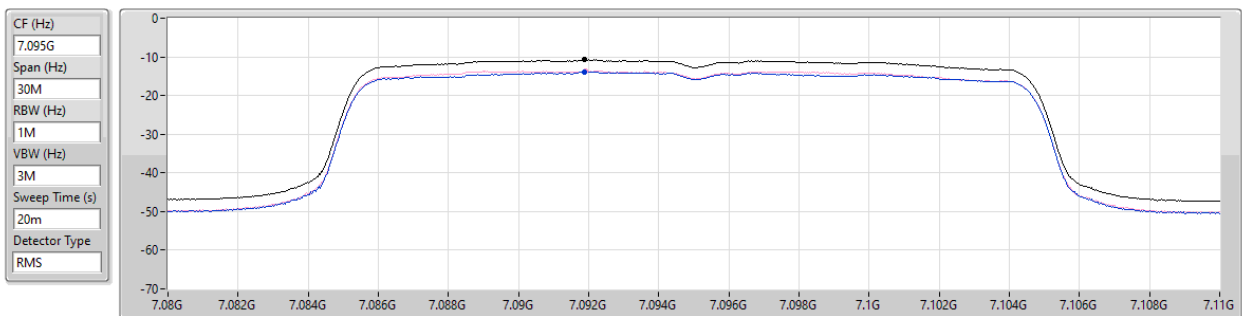

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.75	-10.75	-13.82	-13.64

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5965MHz

16/01/2024

CF (Hz)
5.965G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

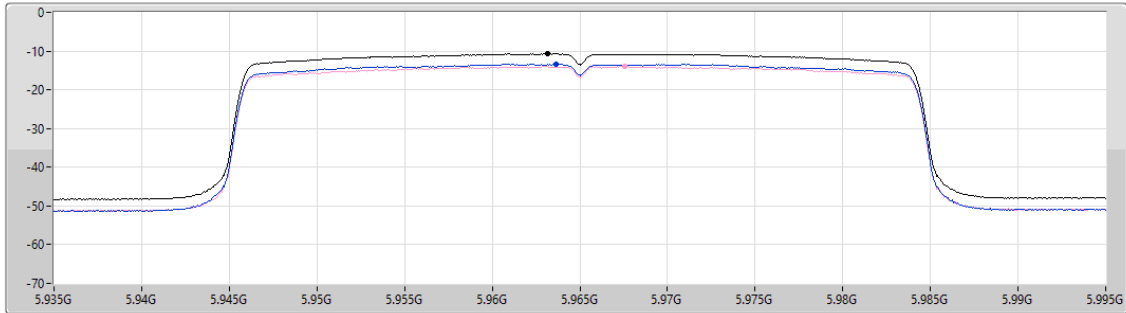

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.72	-10.72	-13.33	-13.96

5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6205MHz

16/01/2024

CF (Hz)
6.205G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

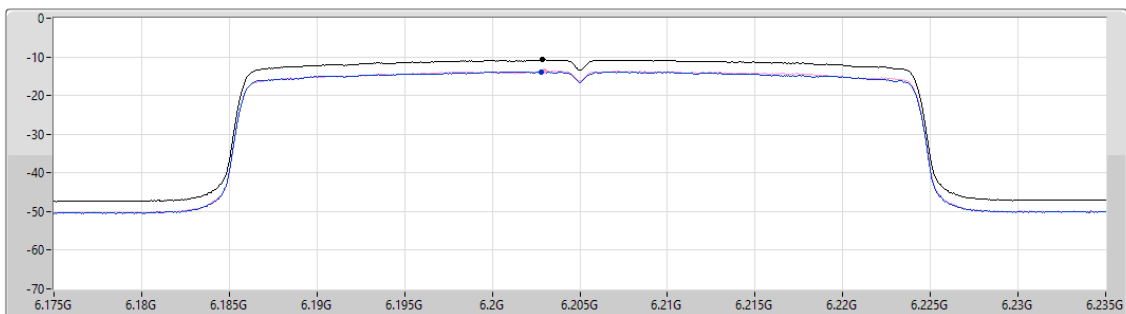

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.78	-10.78	-13.82	-13.60

5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

6405MHz

17/01/2024

CF (Hz)
6.405G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

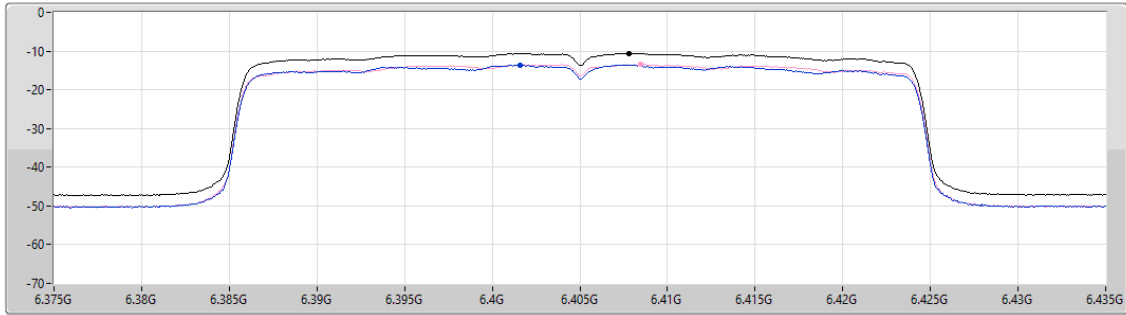

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.57	-10.57	-13.56	-13.39

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

6445MHz

17/01/2024

CF (Hz)
6.445G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

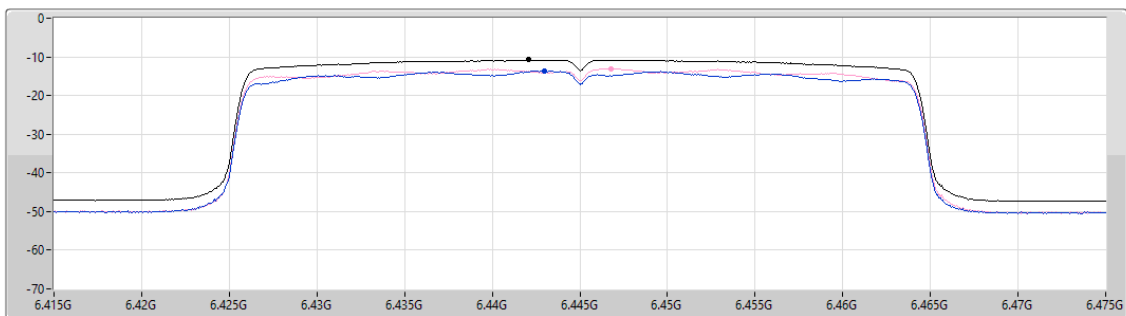

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.79	-10.79	-13.67	-13.01

6.425-6.525GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6485MHz

17/01/2024

CF (Hz)
6.485G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

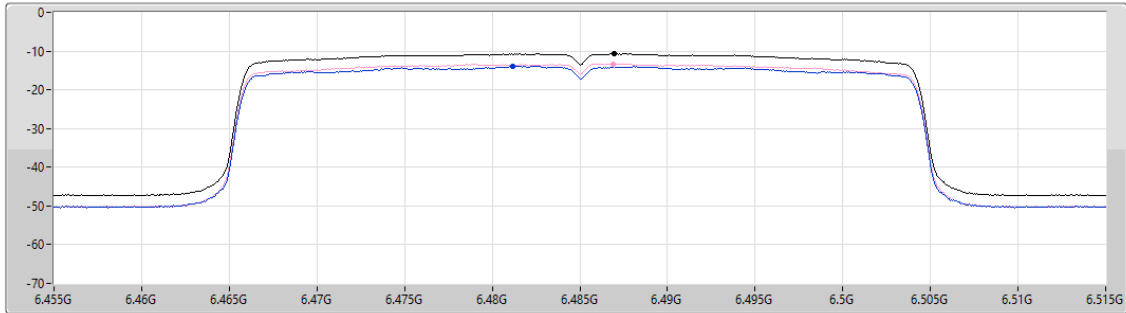

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.71	-10.71	-13.94	-13.32

6.425-6.525GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6525MHz

16/01/2024

CF (Hz)
6.525G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

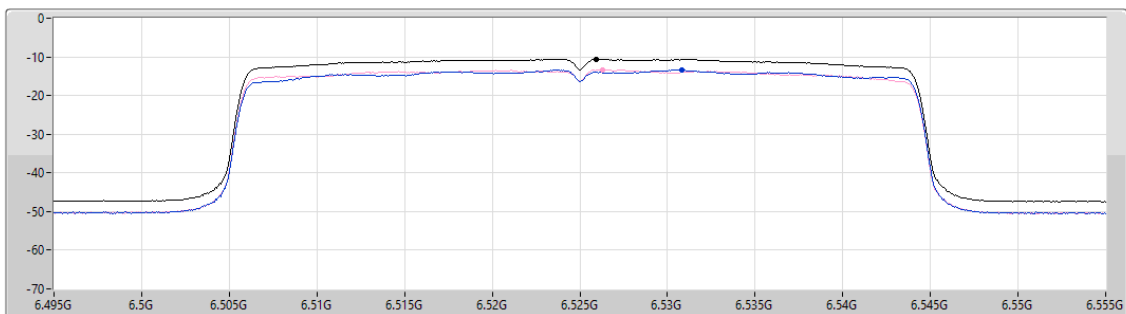

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.58	-10.58	-13.40	-13.30

6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6565MHz

17/01/2024

CF (Hz)
6.565G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

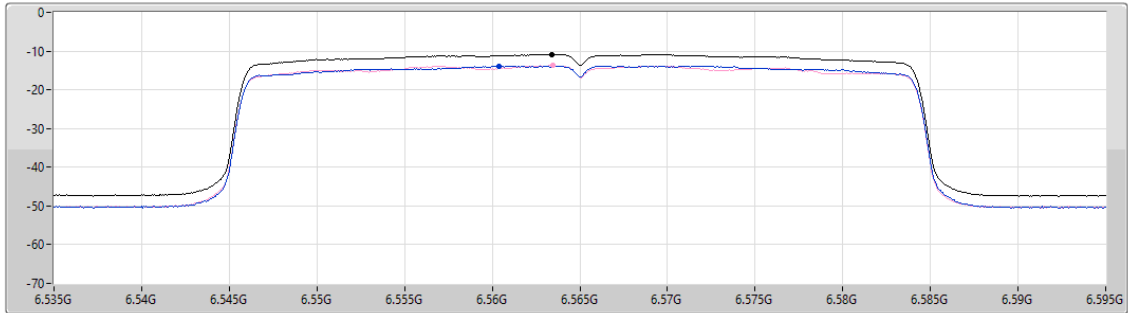

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.87	-10.87	-13.82	-13.72

6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6685MHz

17/01/2024

CF (Hz)
6.685G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

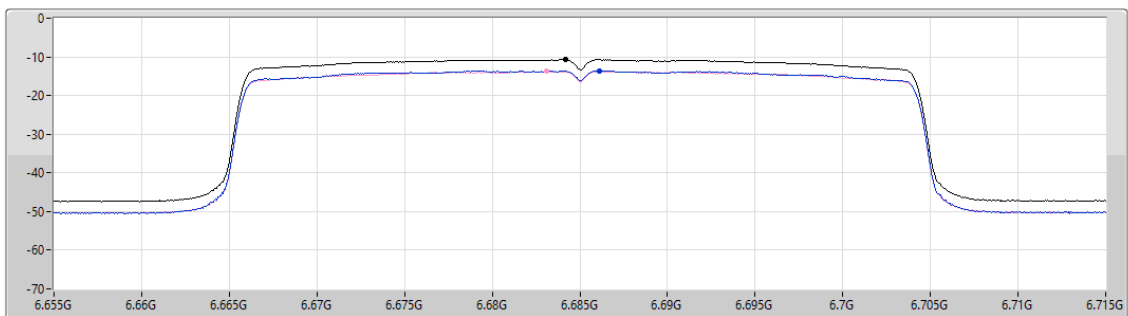

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.72	-10.72	-13.56	-13.79

6.525-6.875GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6885MHz

16/01/2024

CF (Hz)
6.885G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

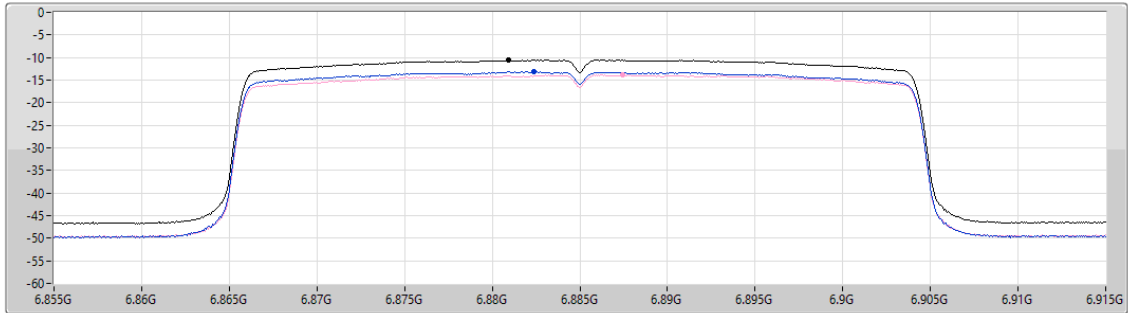

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.56	-10.56	-13.11	-13.80

6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

6925MHz

16/01/2024

CF (Hz)
6.925G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

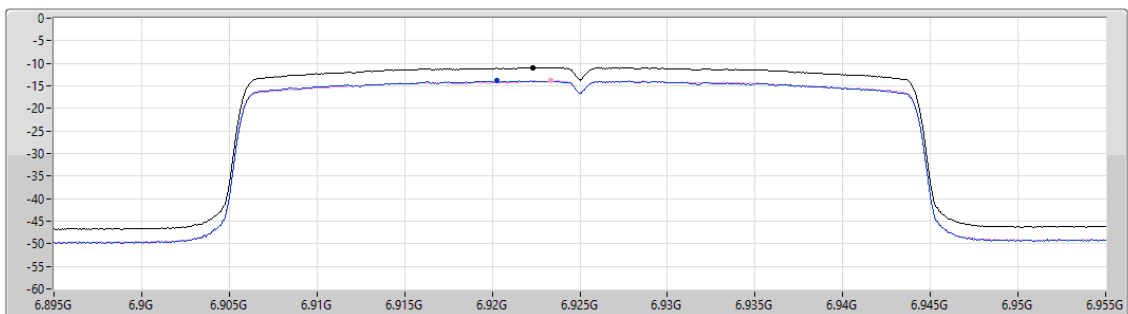

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.94	-10.94	-13.86	-13.88

6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

7005MHz

16/01/2024

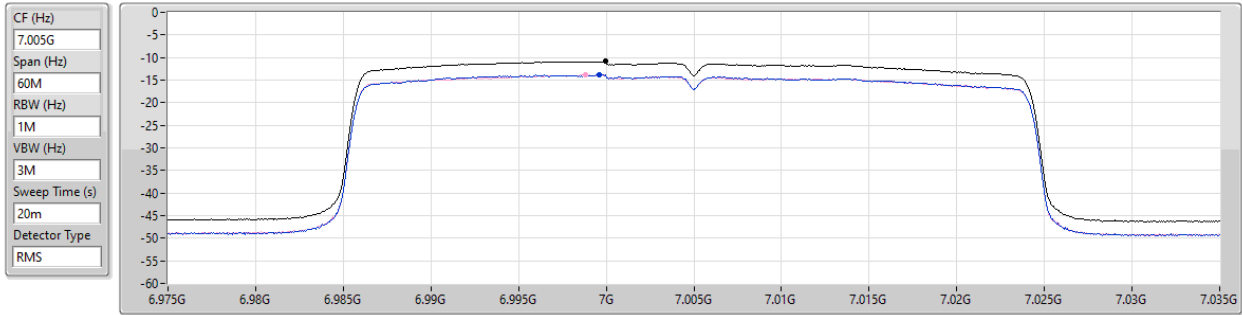


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.84	-10.84	-13.80	-13.85

6.875-7.125GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

7085MHz

16/01/2024

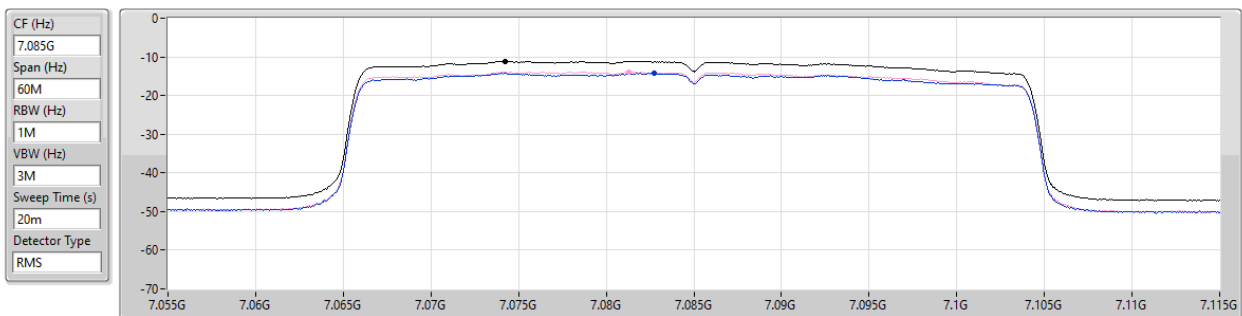


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.15	-11.15	-14.27	-13.83

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5985MHz

16/01/2024

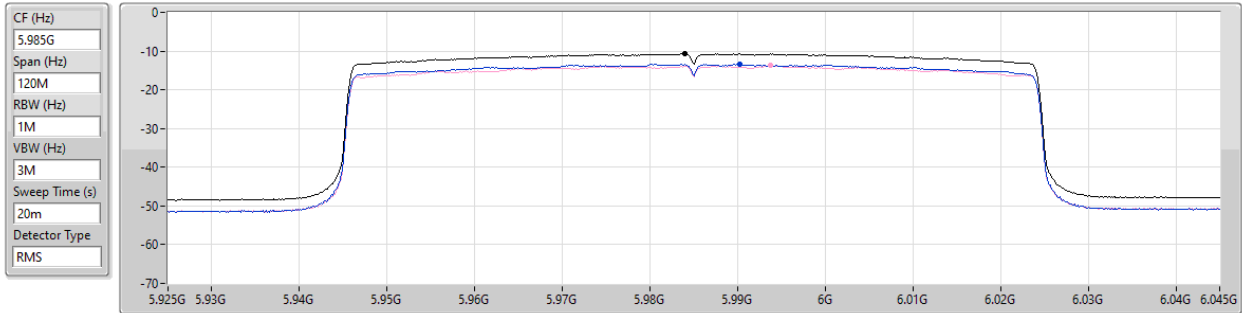


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.71	-10.71	-13.43	-13.78

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6225MHz

16/01/2024

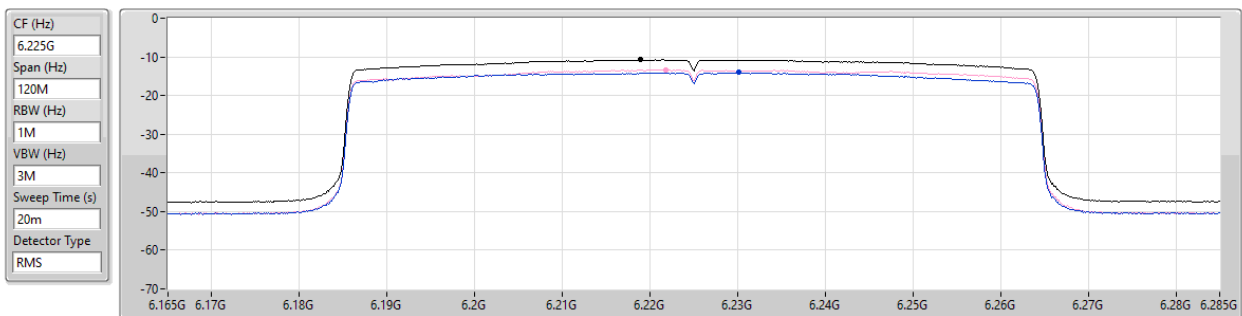


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.78	-10.78	-14.07	-13.38

5.925-6.425GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6385MHz

16/01/2024

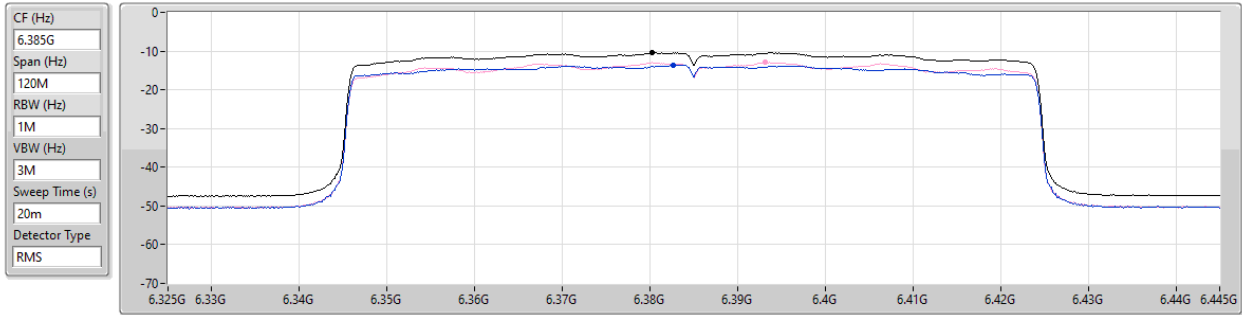


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.47	-10.47	-13.64	-12.96

6.425-6.525GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6465MHz

16/01/2024

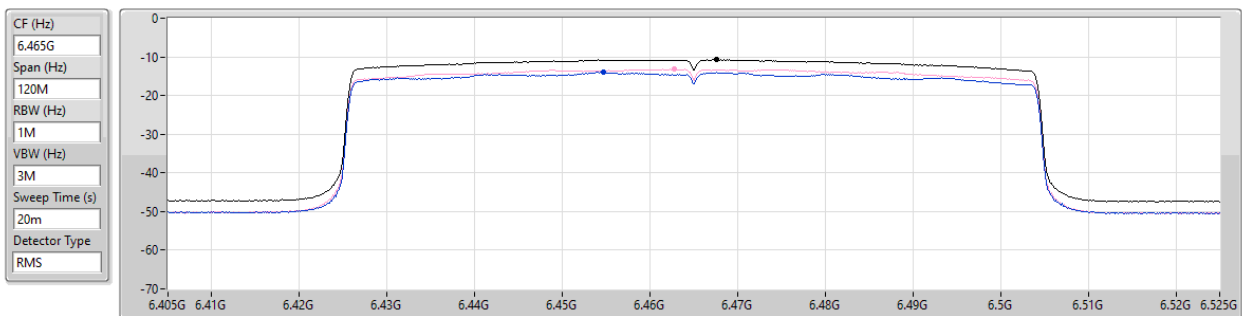

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.67	-10.67	-13.98	-13.22

6.425-6.525GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6545MHz

17/01/2024

CF (Hz)
6.545G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

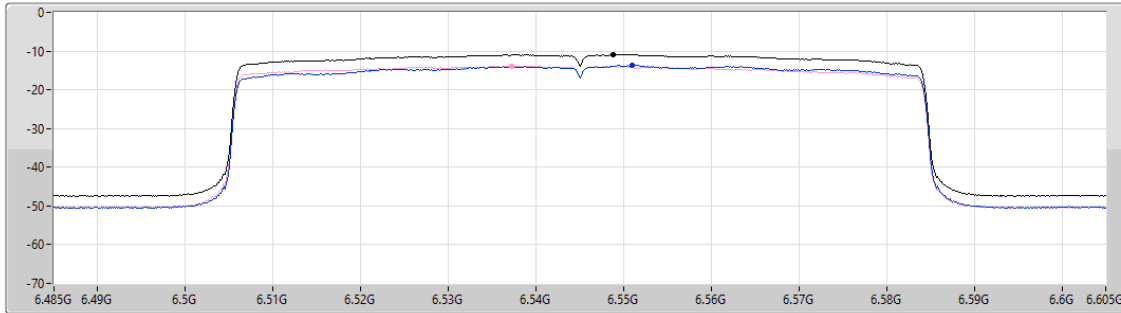

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.90	-10.90	-13.72	-13.83

6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6625MHz

16/01/2024

CF (Hz)
6.625G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

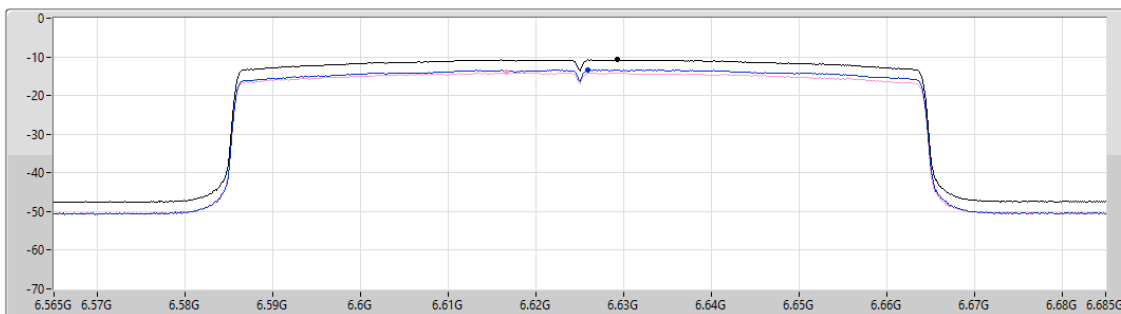

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.78	-10.78	-13.36	-14.08

6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6705MHz

16/01/2024

CF (Hz)
6.705G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

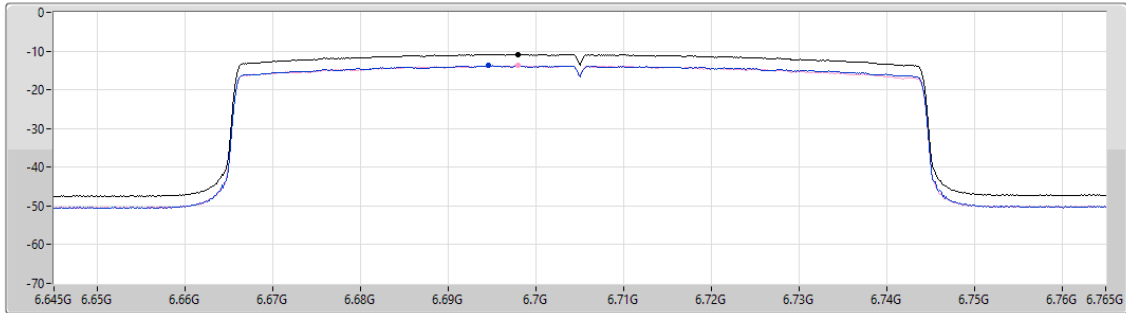

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.81	-10.81	-13.73	-13.74

6.525-6.875GHz_802.11ax_HEW80_Nss1,(MCS0)_2TX

PSD

6785MHz

16/01/2024

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

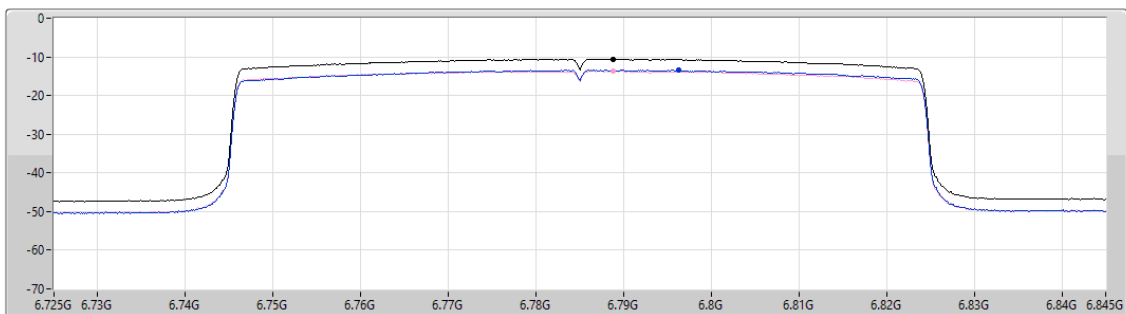

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.57	-10.57	-13.41	-13.66

6.525-6.875GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6865MHz

16/01/2024

CF (Hz)
6.865G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

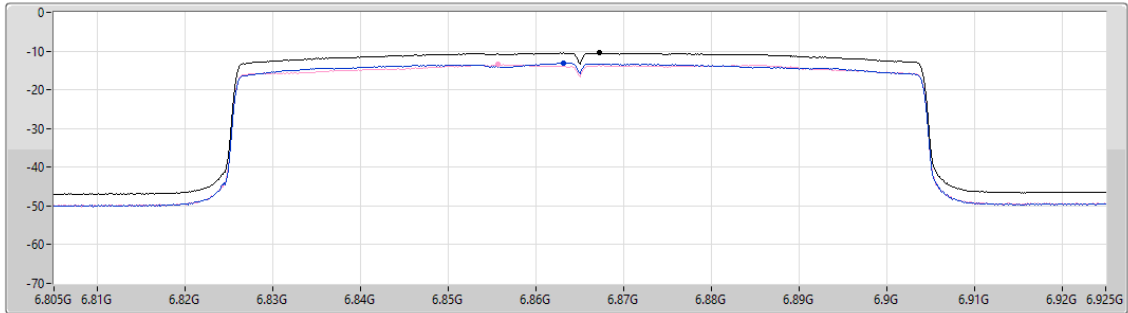

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.48	-10.48	-13.12	-13.48

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

6945MHz

16/01/2024

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

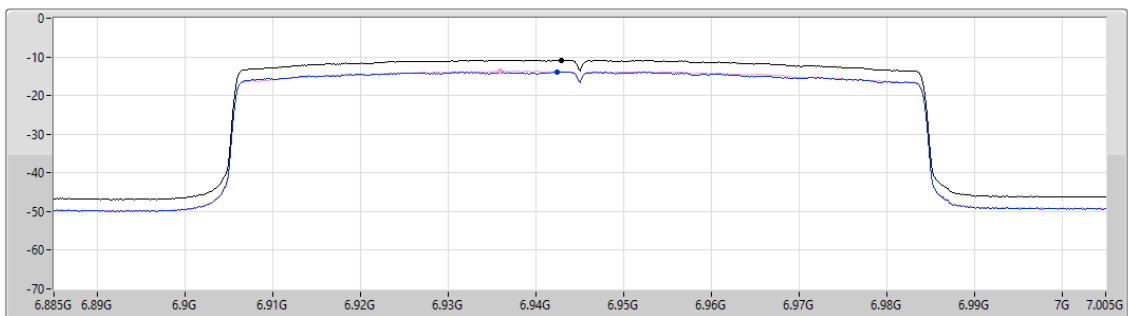

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.83	-10.83	-13.83	-13.63

6.875-7.125GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

7025MHz

16/01/2024

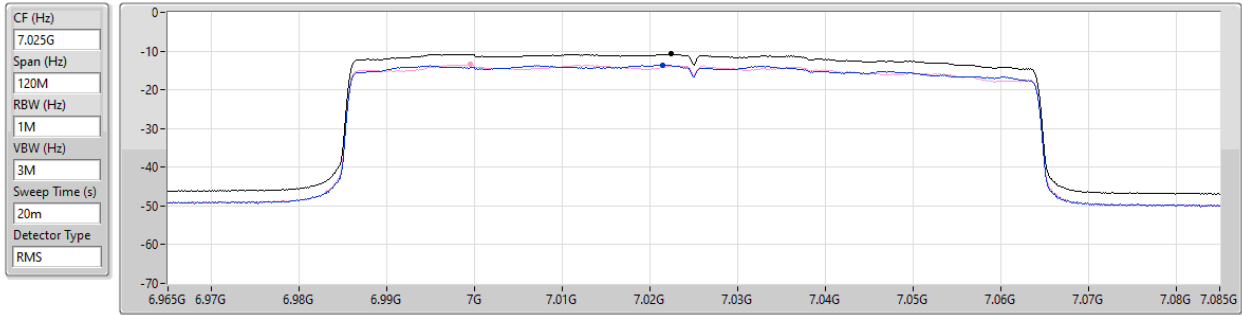


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.78	-10.78	-13.54	-13.43

5.925-6.425GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

6025MHz

17/01/2024

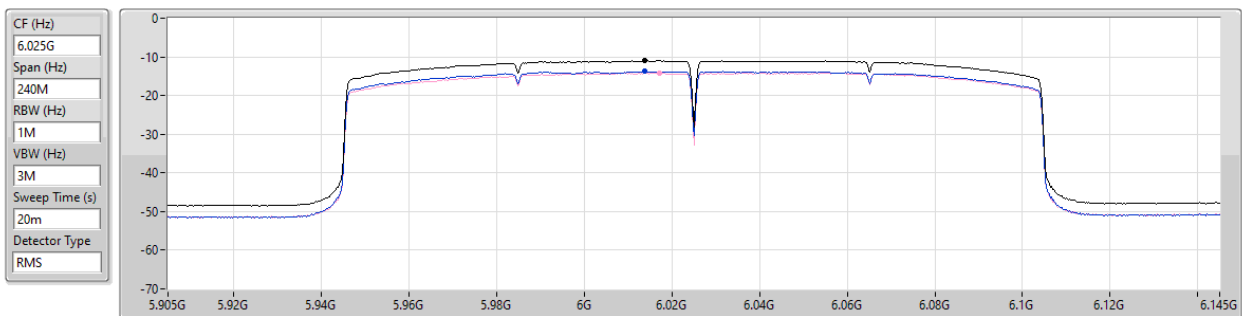


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.96	-10.96	-13.77	-14.15

5.925-6.425GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

PSD

6185MHz

17/01/2024

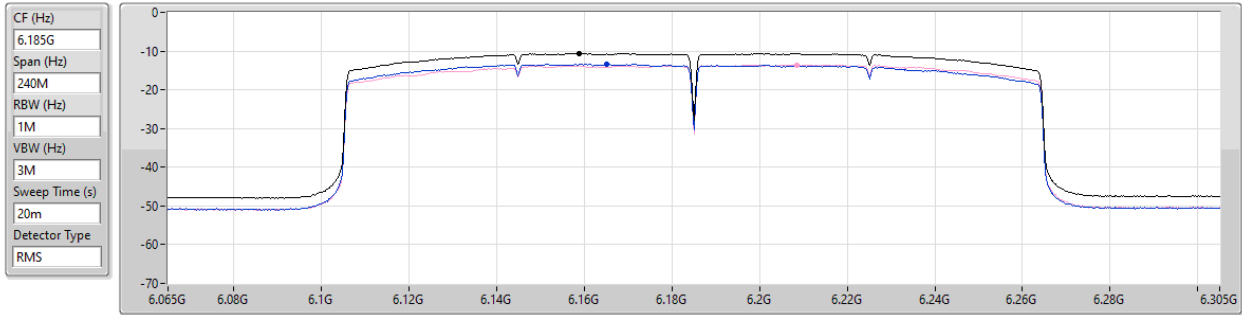


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.61	-10.61	-13.42	-13.54

5.925-6.425GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX

PSD

6345MHz

17/01/2024

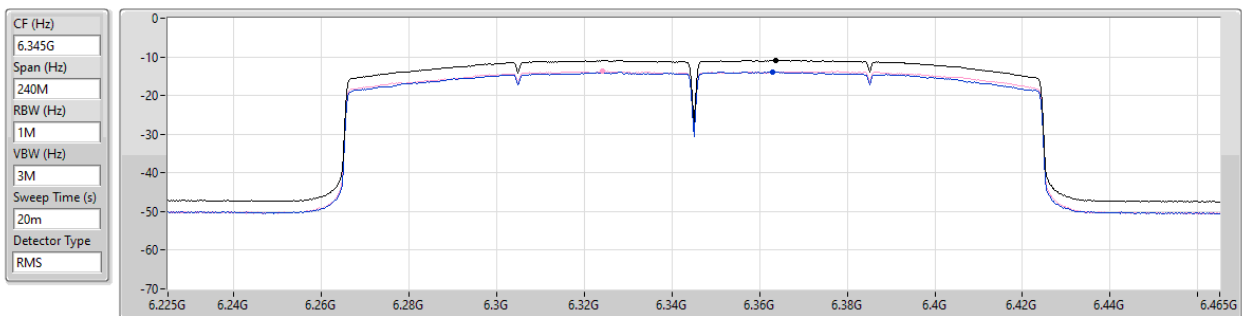

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.91	-10.91	-13.95	-13.78

6.425-6.525GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

6505MHz

17/01/2024

CF (Hz)
6.505G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

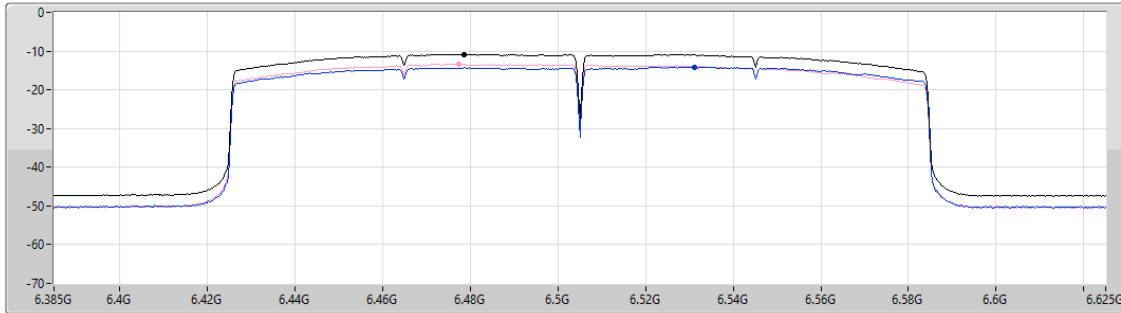

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.84	-10.84	-14.09	-13.33

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

6665MHz

17/01/2024

CF (Hz)
6.665G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

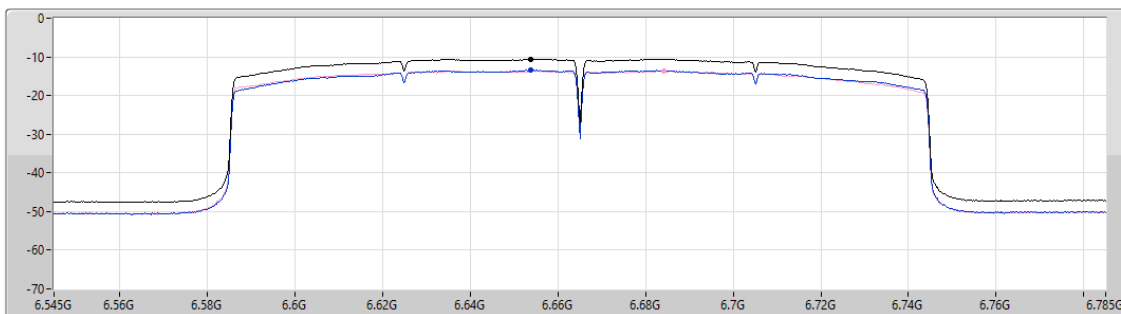

Sum ☒

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.55	-10.55	-13.36	-13.63

6.525-6.875GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

6825MHz

16/01/2024

CF (Hz)
6.825G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

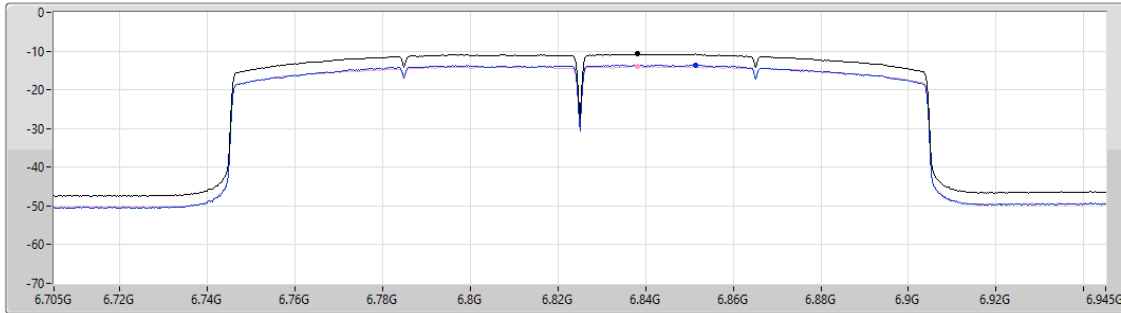

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.78	-10.78	-13.62	-13.93

6.875-7.125GHz_802.11ax HEW160_Nss1,(MCS0)_2TX

PSD

6985MHz

16/01/2024

CF (Hz)
6.985G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

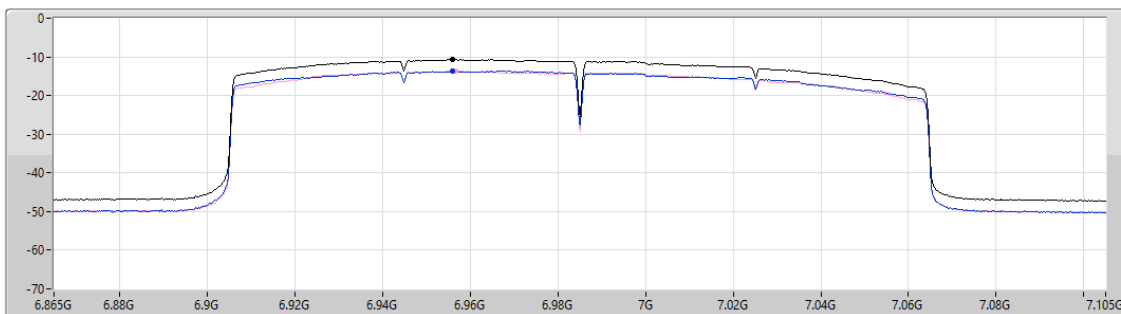

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.67	-10.67	-13.70	-13.56

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.83	4.98
802.11be EHT40_Nss1,(MCS0)_4TX	-2.88	4.93
802.11be EHT80_Nss1,(MCS0)_4TX	-3.20	4.61
802.11be EHT160_Nss1,(MCS0)_4TX	-3.10	4.71
802.11be EHT320_Nss1,(MCS0)_4TX	-4.40	3.41
6.425-6.525GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.67	4.99
802.11be EHT40_Nss1,(MCS0)_4TX	-2.71	4.95
802.11be EHT80_Nss1,(MCS0)_4TX	-2.95	4.71
802.11be EHT160_Nss1,(MCS0)_4TX	-2.87	4.79
802.11be EHT320_Nss1,(MCS0)_4TX	-4.29	3.37
6.525-6.875GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-2.25	4.57
802.11be EHT40_Nss1,(MCS0)_4TX	-1.84	4.98
802.11be EHT80_Nss1,(MCS0)_4TX	-1.88	4.94
802.11be EHT160_Nss1,(MCS0)_4TX	-1.93	4.89
802.11be EHT320_Nss1,(MCS0)_4TX	-3.23	3.59
6.875-7.125GHz	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	-1.82	4.83
802.11be EHT40_Nss1,(MCS0)_4TX	-2.02	4.63
802.11be EHT80_Nss1,(MCS0)_4TX	-1.83	4.82
802.11be EHT160_Nss1,(MCS0)_4TX	-2.39	4.26

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	7.81	-8.72	-8.88	-9.12	-8.64	-2.83	Inf	4.98	5.00
6195MHz	Pass	7.81	-9.06	-9.12	-9.12	-8.85	-3.12	Inf	4.69	5.00
6415MHz	Pass	7.81	-9.11	-8.13	-9.26	-8.84	-2.85	Inf	4.96	5.00
6435MHz	Pass	7.66	-8.55	-8.41	-8.87	-8.86	-2.71	Inf	4.95	5.00
6475MHz	Pass	7.66	-8.50	-8.48	-8.74	-8.74	-2.67	Inf	4.99	5.00
6515MHz	Pass	7.66	-8.57	-8.44	-9.11	-8.67	-2.69	Inf	4.97	5.00
6535MHz	Pass	6.82	-8.20	-8.11	-8.50	-8.05	-2.29	Inf	4.53	5.00
6695MHz	Pass	6.82	-8.37	-7.79	-8.23	-8.51	-2.25	Inf	4.57	5.00
6875MHz	Pass	6.82	-8.88	-7.81	-8.50	-7.98	-2.32	Inf	4.50	5.00
6895MHz	Pass	6.65	-8.07	-7.27	-8.02	-7.78	-1.82	Inf	4.83	5.00
6995MHz	Pass	6.65	-8.19	-7.24	-8.18	-7.84	-1.88	Inf	4.77	5.00
7095MHz	Pass	6.65	-8.11	-7.74	-8.50	-7.89	-2.09	Inf	4.56	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	7.81	-9.02	-8.77	-9.26	-9.16	-3.15	Inf	4.66	5.00
6205MHz	Pass	7.81	-8.67	-8.37	-8.92	-8.87	-2.88	Inf	4.93	5.00
6405MHz	Pass	7.81	-9.04	-8.68	-9.21	-8.95	-3.01	Inf	4.80	5.00
6445MHz	Pass	7.66	-8.80	-8.62	-9.01	-8.84	-2.86	Inf	4.80	5.00
6485MHz	Pass	7.66	-8.70	-8.46	-8.78	-8.62	-2.71	Inf	4.95	5.00
6525MHz	Pass	7.66	-8.76	-8.68	-8.98	-8.92	-2.88	Inf	4.78	5.00
6565MHz	Pass	6.82	-7.97	-7.80	-8.03	-7.90	-1.96	Inf	4.86	5.00
6685MHz	Pass	6.82	-7.84	-7.58	-7.83	-7.88	-1.85	Inf	4.97	5.00
6885MHz	Pass	6.82	-8.19	-7.28	-7.80	-8.00	-1.84	Inf	4.98	5.00
6925MHz	Pass	6.65	-8.29	-7.61	-7.76	-8.09	-2.02	Inf	4.63	5.00
7005MHz	Pass	6.65	-8.29	-7.48	-7.69	-8.49	-2.03	Inf	4.62	5.00
7085MHz	Pass	6.65	-7.72	-7.72	-7.87	-8.65	-2.05	Inf	4.60	5.00
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.55	-9.15	-9.72	-9.17	-3.51	Inf	4.30	5.00
6225MHz	Pass	7.81	-9.07	-8.83	-9.31	-8.97	-3.20	Inf	4.61	5.00
6385MHz	Pass	7.81	-9.17	-9.00	-9.28	-9.12	-3.26	Inf	4.55	5.00
6465MHz	Pass	7.66	-8.89	-8.74	-8.88	-9.03	-2.95	Inf	4.71	5.00
6545MHz	Pass	7.66	-9.01	-8.95	-8.96	-8.87	-3.00	Inf	4.66	5.00
6625MHz	Pass	6.82	-7.87	-7.82	-7.90	-7.85	-1.93	Inf	4.89	5.00
6705MHz	Pass	6.82	-8.45	-7.86	-7.94	-8.27	-2.19	Inf	4.63	5.00
6785MHz	Pass	6.82	-8.02	-7.70	-7.83	-7.87	-1.88	Inf	4.94	5.00
6865MHz	Pass	6.82	-8.91	-7.99	-8.21	-8.20	-2.45	Inf	4.37	5.00
6945MHz	Pass	6.65	-8.00	-7.49	-7.72	-7.83	-1.83	Inf	4.82	5.00
7025MHz	Pass	6.65	-8.05	-7.49	-7.77	-8.21	-1.92	Inf	4.73	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.83	-9.01	-9.79	-9.53	-3.65	Inf	4.16	5.00
6185MHz	Pass	7.81	-9.18	-8.95	-9.09	-8.90	-3.19	Inf	4.62	5.00
6345MHz	Pass	7.81	-9.32	-8.92	-9.15	-8.70	-3.10	Inf	4.71	5.00
6505MHz	Pass	7.66	-9.03	-8.61	-8.97	-8.73	-2.87	Inf	4.79	5.00
6665MHz	Pass	6.82	-7.97	-8.01	-8.24	-7.95	-2.10	Inf	4.72	5.00
6825MHz	Pass	6.82	-8.14	-7.50	-7.97	-8.09	-1.93	Inf	4.89	5.00
6985MHz	Pass	6.65	-8.63	-7.57	-8.25	-8.72	-2.39	Inf	4.26	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.48	-9.59	-10.38	-10.17	-4.40	Inf	3.41	5.00
6265MHz	Pass	7.81	-10.79	-10.24	-10.74	-10.31	-4.69	Inf	3.12	5.00
6425MHz	Pass	7.81	-10.88	-10.40	-11.10	-10.67	-4.81	Inf	3.00	5.00
6585MHz	Pass	7.66	-10.48	-9.83	-10.28	-10.18	-4.29	Inf	3.37	5.00
6745MHz	Pass	6.82	-9.43	-8.53	-9.47	-9.24	-3.23	Inf	3.59	5.00
6905MHz	Pass	6.82	-9.96	-8.58	-9.82	-10.15	-3.61	Inf	3.21	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5955MHz

05/11/2024

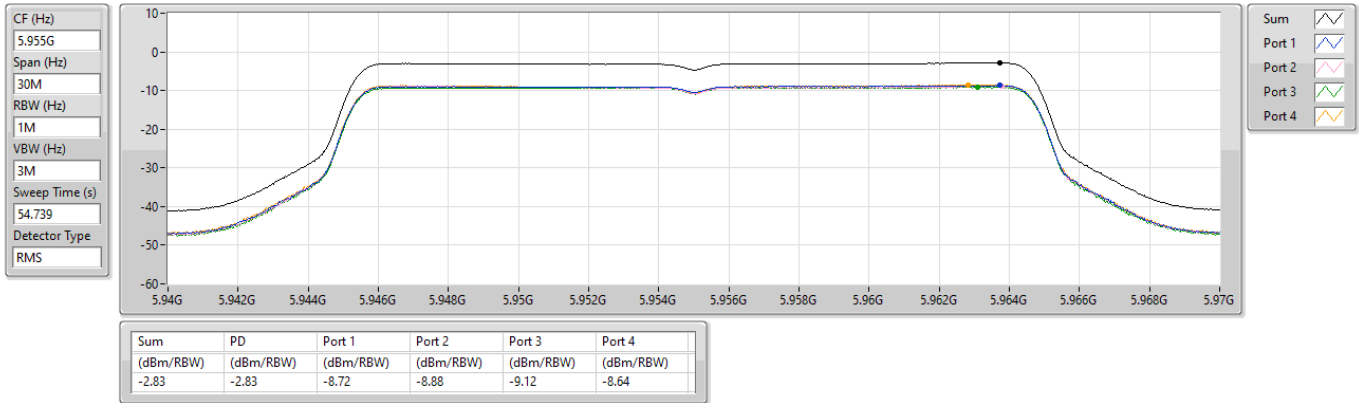


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6205MHz

05/11/2024

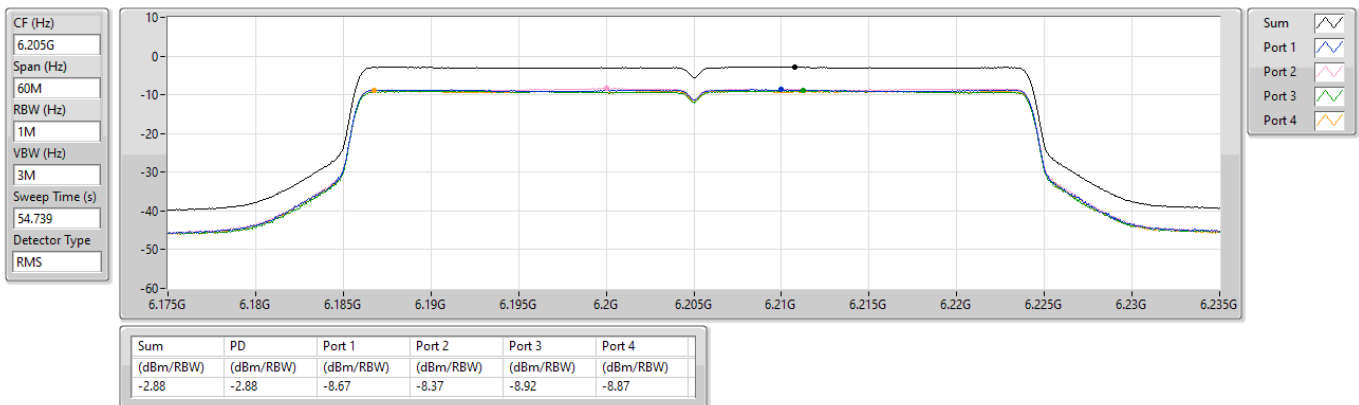

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6225MHz

05/11/2024

CF (Hz)
6.225G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

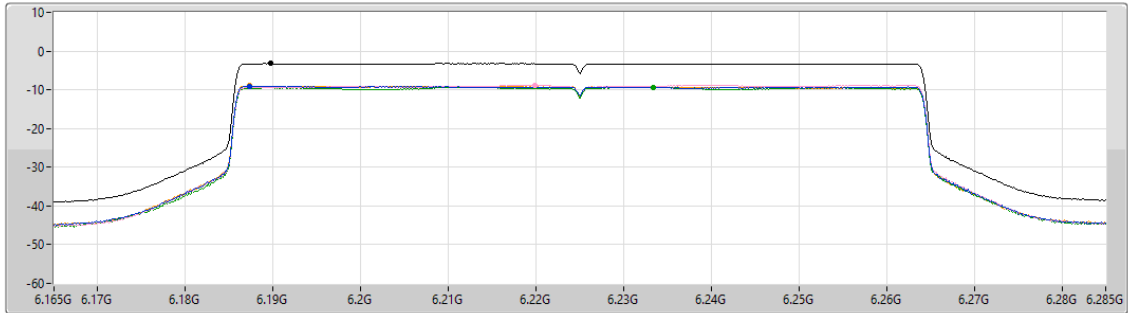

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.20	-3.20	-9.07	-8.83	-9.31	-8.97

5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6345MHz

05/11/2024

CF (Hz)
6.345G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

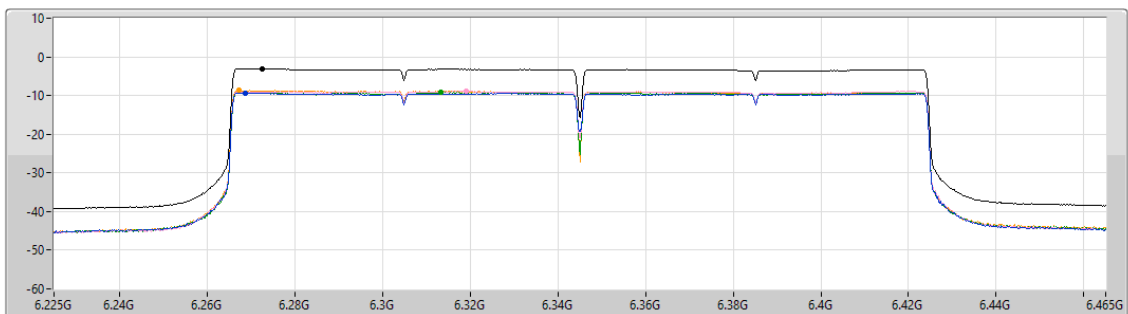

Sum 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.10	-3.10	-9.32	-8.92	-9.15	-8.70

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6105MHz

05/11/2024

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.809

Detector Type
RMS

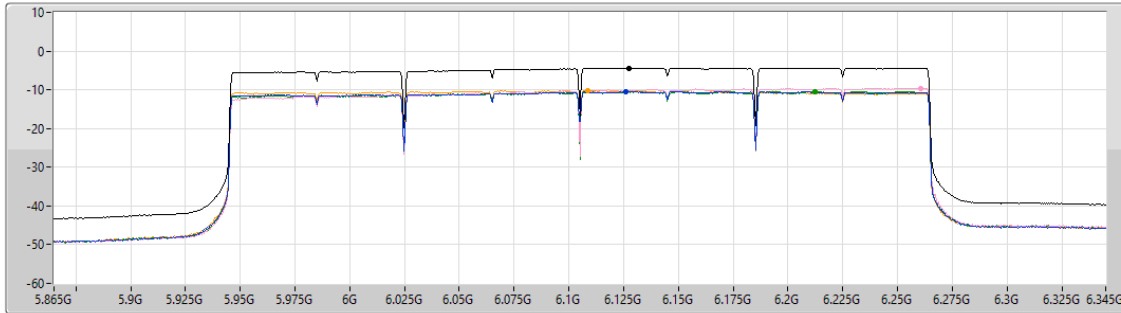

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.40	-4.40	-10.48	-9.59	-10.38	-10.17

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6475MHz

05/11/2024

CF (Hz)
6.475G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

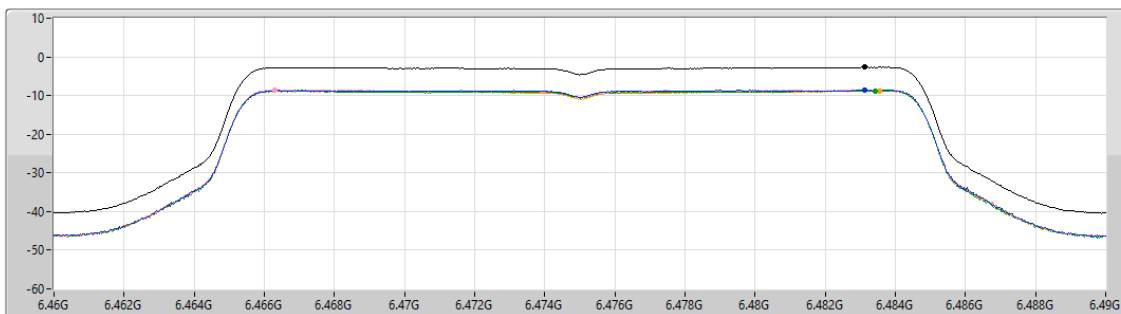

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.67	-2.67	-8.50	-8.48	-8.74	-8.74

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6485MHz

05/11/2024

CF (Hz)
6.485G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

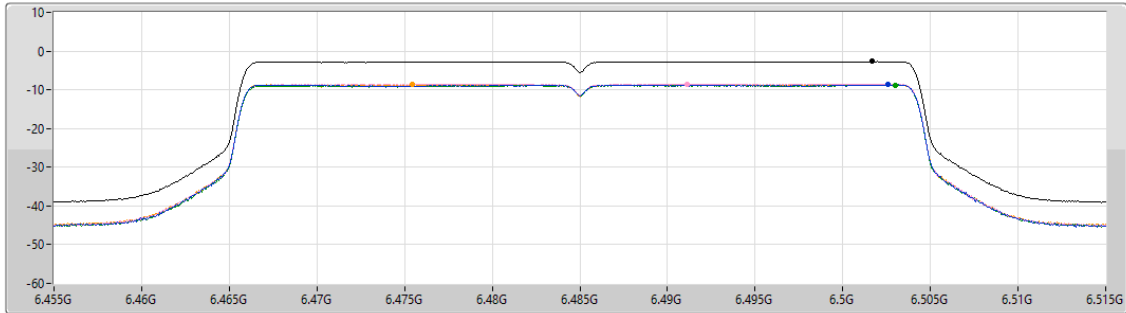

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.71	-2.71	-8.70	-8.46	-8.78	-8.62

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6465MHz

05/11/2024

CF (Hz)
6.465G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

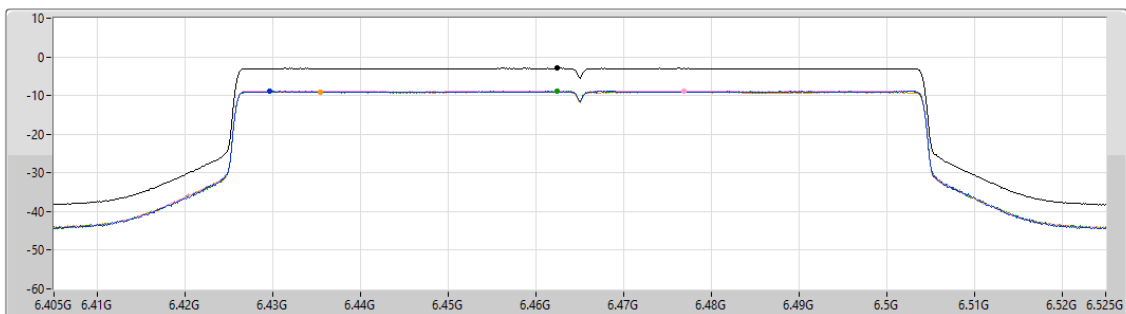

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.95	-2.95	-8.89	-8.74	-8.88	-9.03

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6505MHz

05/11/2024

CF (Hz)
6.505G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

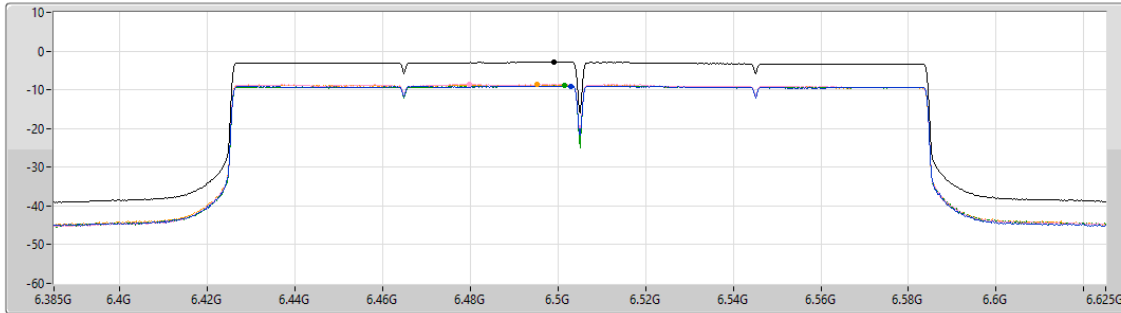

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.87	-2.87	-9.03	-8.61	-8.97	-8.73

6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6585MHz

05/11/2024

CF (Hz)
6.585G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.809

Detector Type
RMS

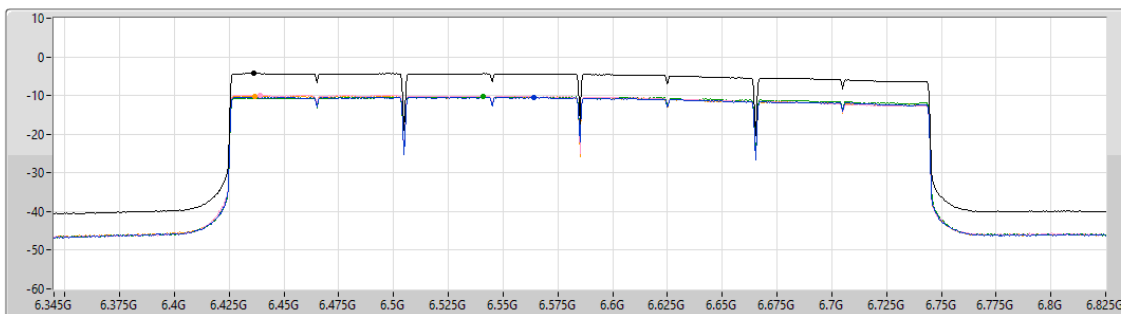

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.29	-4.29	-10.48	-9.83	-10.28	-10.18

6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6695MHz

05/11/2024

CF (Hz)
6.695G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

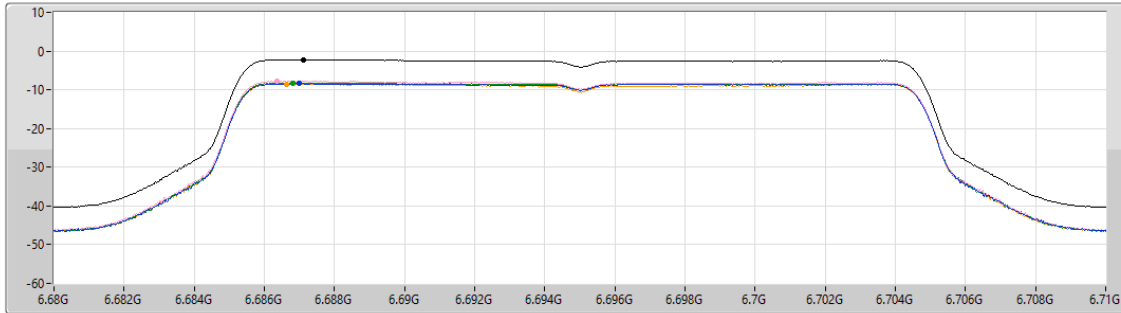

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.25	-2.25	-8.37	-7.79	-8.23	-8.51

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6885MHz

05/11/2024

CF (Hz)
6.885G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

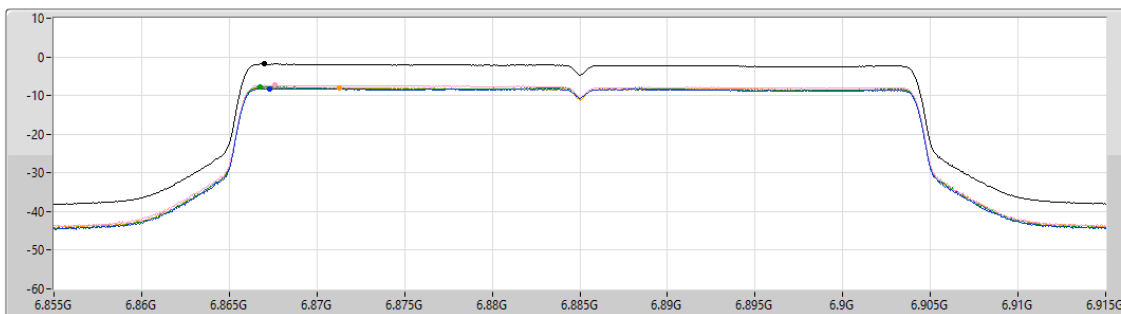

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.84	-1.84	-8.19	-7.28	-7.80	-8.00

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6785MHz

05/11/2024

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

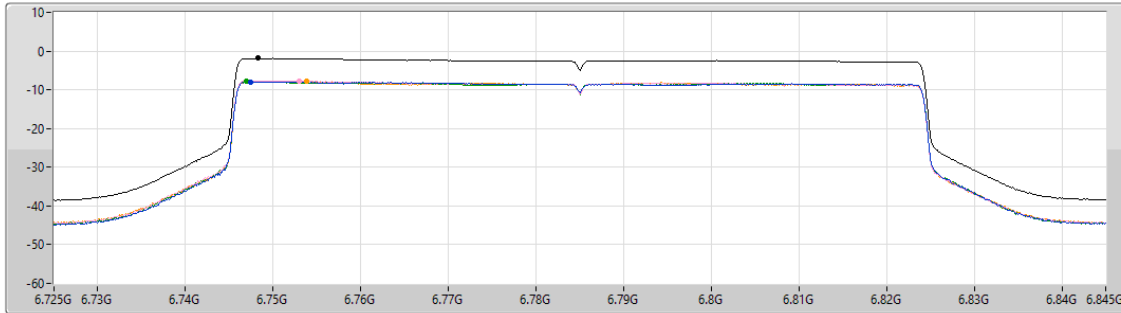

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.88	-1.88	-8.02	-7.70	-7.83	-7.87

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6825MHz

05/11/2024

CF (Hz)
6.825G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

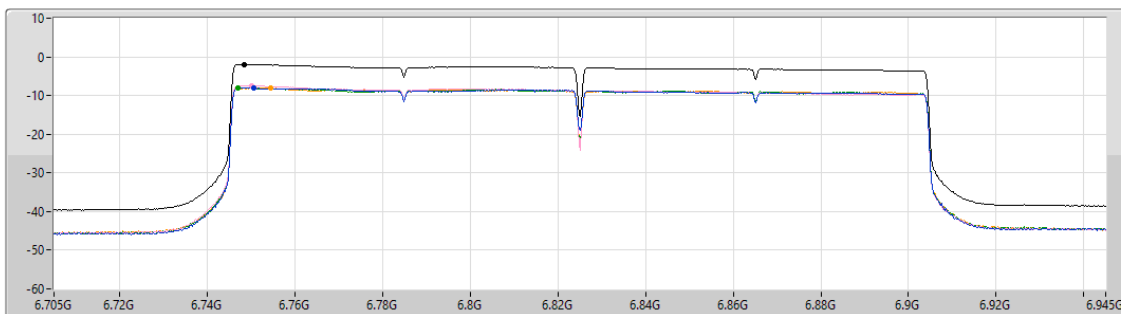

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.93	-1.93	-8.14	-7.50	-7.97	-8.09

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0)_4TX

PSD

6745MHz

05/11/2024

CF (Hz)
6.745G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.809

Detector Type
RMS

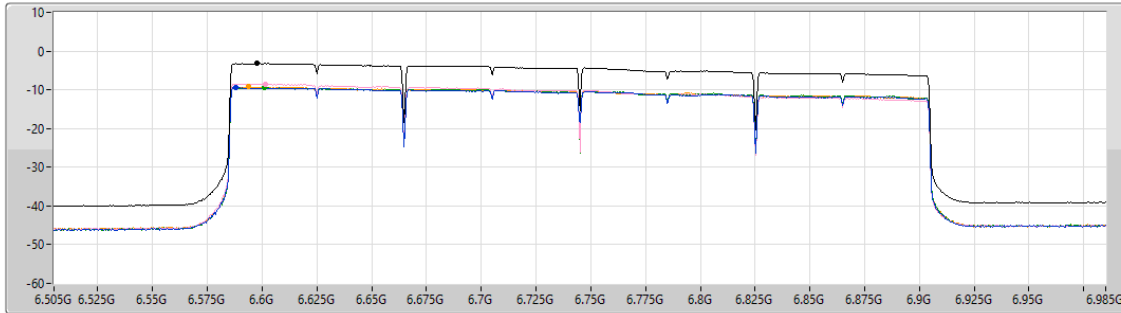

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.23	-3.23	-9.43	-8.53	-9.47	-9.24

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

6895MHz

05/11/2024

CF (Hz)
6.895G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

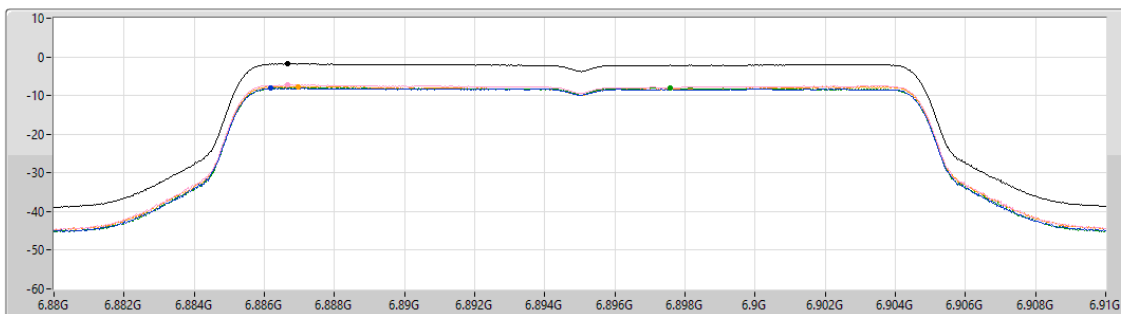

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.82	-1.82	-8.07	-7.27	-8.02	-7.78

6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

6925MHz

05/11/2024

CF (Hz)
6.925G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

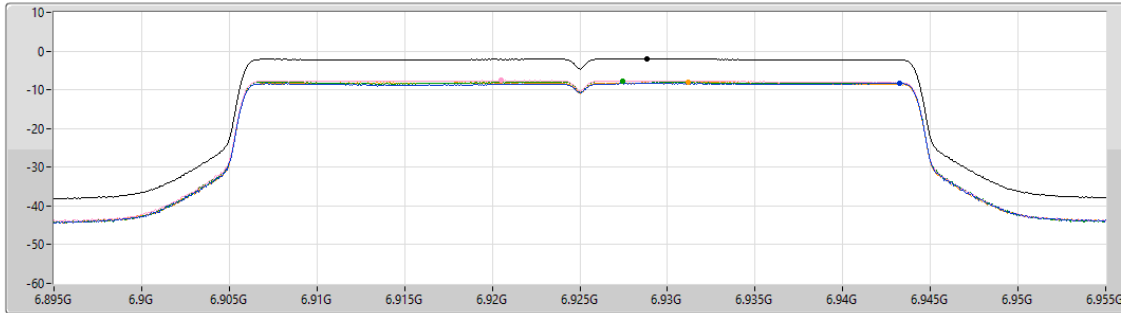

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.02	-2.02	-8.29	-7.61	-7.76	-8.09

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

6945MHz

05/11/2024

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

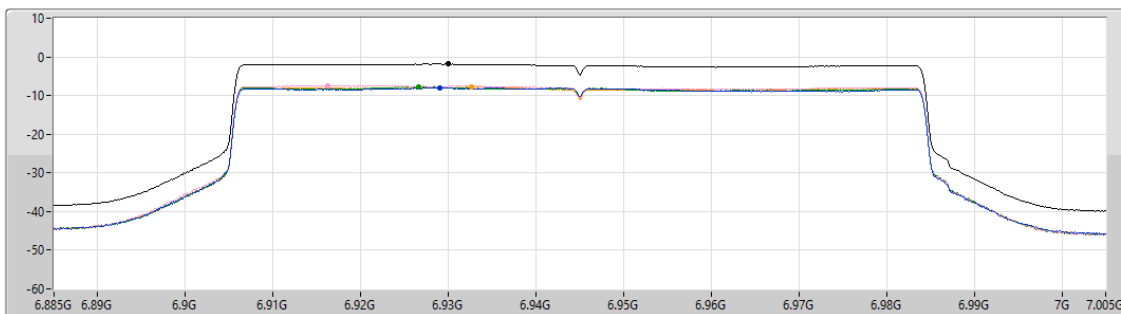

Sum ☐

Port 1 ☐

Port 2 ☐

Port 3 ☐

Port 4 ☐

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.83	-1.83	-8.00	-7.49	-7.72	-7.83


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

6985MHz

05/11/2024

CF (Hz)
6.985G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.739
Detector Type
RMS

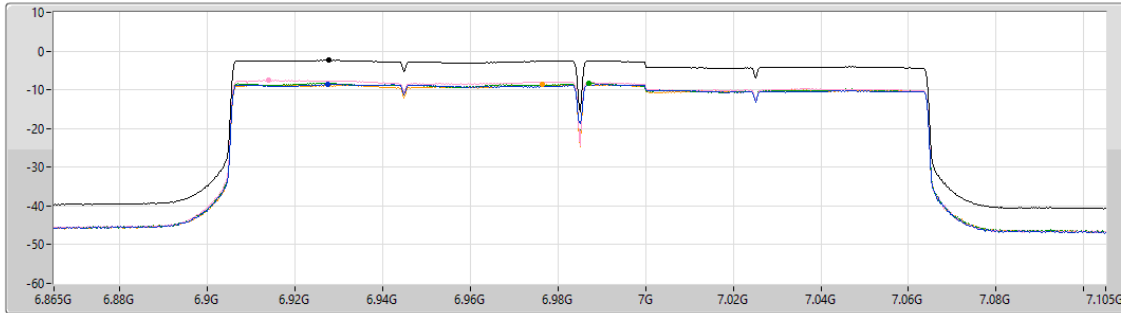

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.39	-2.39	-8.63	-7.57	-8.25	-8.72

**Summary**

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-3.51	4.30
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-3.13	4.68
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-4.47	3.34
6.425-6.525GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-3.30	4.36
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-3.09	4.57
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-4.41	3.25
6.525-6.875GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-1.95	4.87
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-2.05	4.77
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-3.41	3.41
6.875-7.125GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-2.23	4.42
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-2.29	4.36

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.60	-9.14	-9.74	-9.94	-3.83	Inf	3.98	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.76	-9.06	-9.64	-9.91	-3.66	Inf	4.15	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.40	-9.25	-9.44	-9.38	-3.51	Inf	4.30	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.45	-9.18	-9.59	-9.35	-3.63	Inf	4.18	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.31	-9.21	-9.50	-9.73	-3.54	Inf	4.27	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.18	-9.22	-9.42	-9.68	-3.65	Inf	4.16	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.25	-9.03	-9.28	-9.50	-3.45	Inf	4.21	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.08	-9.18	-9.25	-9.28	-3.33	Inf	4.33	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.40	-9.03	-9.44	-9.17	-3.35	Inf	4.31	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.52	-8.93	-9.44	-8.90	-3.30	Inf	4.36	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-7.92	-7.83	-7.90	-7.90	-2.16	Inf	4.66	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-8.33	-7.88	-8.35	-8.35	-2.40	Inf	4.42	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	6.82	-8.15	-7.99	-8.39	-8.32	-2.31	Inf	4.51	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	6.82	-8.11	-7.65	-8.19	-8.27	-2.26	Inf	4.56	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-7.62	-7.64	-8.07	-7.77	-1.98	Inf	4.84	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-7.51	-7.58	-8.03	-7.82	-1.95	Inf	4.87	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-9.13	-8.35	-8.60	-8.58	-2.83	Inf	3.99	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-9.02	-8.41	-8.68	-8.55	-2.75	Inf	4.07	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.36	-7.74	-7.50	-8.24	-2.25	Inf	4.40	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.28	-7.72	-7.83	-8.16	-2.23	Inf	4.42	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-8.25	-8.11	-7.95	-8.27	-2.45	Inf	4.20	5.00
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-8.25	-8.04	-8.13	-8.33	-2.41	Inf	4.24	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.79	-9.28	-9.99	-9.81	-3.92	Inf	3.89	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.79	-9.27	-10.05	-10.30	-4.07	Inf	3.74	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.59	-9.04	-9.69	-9.98	-3.77	Inf	4.04	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.44	-9.18	-9.43	-9.28	-3.52	Inf	4.29	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6185MHz	Pass	7.81	-9.12	-8.97	-9.35	-9.36	-3.60	Inf	4.21	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.10	-8.87	-9.00	-9.10	-3.22	Inf	4.59	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.26	-9.13	-8.73	-8.70	-3.13	Inf	4.68	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.19	-9.10	-9.26	-9.23	-3.32	Inf	4.49	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.21	-9.01	-9.20	-8.88	-3.19	Inf	4.62	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.76	-8.88	-9.28	-8.89	-3.13	Inf	4.53	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-9.07	-8.84	-9.37	-9.16	-3.36	Inf	4.30	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.86	-8.72	-9.16	-8.88	-3.09	Inf	4.57	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.39	-8.27	-8.20	-8.36	-2.51	Inf	4.31	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.30	-8.20	-8.17	-8.51	-2.56	Inf	4.26	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.31	-7.90	-8.20	-8.34	-2.37	Inf	4.45	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-7.98	-7.60	-8.34	-8.15	-2.11	Inf	4.71	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-7.89	-7.63	-8.08	-7.90	-2.05	Inf	4.77	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.28	-7.82	-8.69	-8.46	-2.40	Inf	4.42	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.35	-8.02	-8.27	-8.56	-2.47	Inf	4.18	5.00
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.40	-7.85	-8.07	-8.44	-2.29	Inf	4.36	5.00
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.95	-8.48	-8.46	-8.80	-2.85	Inf	3.80	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.19	-9.84	-10.39	-10.60	-4.47	Inf	3.34	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.22	-10.26	-10.57	-10.18	-4.61	Inf	3.20	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.43	-10.30	-10.76	-10.68	-4.85	Inf	2.96	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.41	-9.92	-10.49	-10.64	-4.52	Inf	3.29	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.90	-10.99	-10.92	-10.41	-5.05	Inf	2.76	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.06	-11.35	-11.17	-10.62	-5.15	Inf	2.66	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.81	-10.37	-10.59	-10.12	-4.80	Inf	3.01	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.84	-10.55	-10.97	-9.85	-4.80	Inf	3.01	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.79	-10.76	-10.70	-10.92	-4.96	Inf	2.85	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.90	-10.65	-10.59	-10.71	-4.84	Inf	2.97	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.33	-11.10	-10.69	-11.03	-5.27	Inf	2.54	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.01	-10.80	-10.46	-10.45	-4.84	Inf	2.97	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.52	-10.17	-10.75	-10.49	-4.59	Inf	3.07	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.87	-10.52	-11.07	-10.13	-4.74	Inf	2.92	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.22	-9.92	-10.42	-10.11	-4.41	Inf	3.25	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.75	-10.42	-10.90	-10.27	-4.68	Inf	2.98	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.06	-8.64	-9.59	-9.61	-3.41	Inf	3.41	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.60	-8.96	-9.87	-9.73	-3.62	Inf	3.20	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.28	-8.96	-9.84	-9.76	-3.70	Inf	3.12	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.42	-9.29	-9.89	-9.89	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.72	-8.65	-9.51	-9.60	-3.65	Inf	3.17	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.11	-9.31	-9.93	-10.08	-4.02	Inf	2.80	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.66	-9.08	-9.62	-9.70	-3.72	Inf	3.10	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.60	-9.09	-10.06	-10.13	-3.80	Inf	3.02	5.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

PSD

6225MHz

27/11/2024

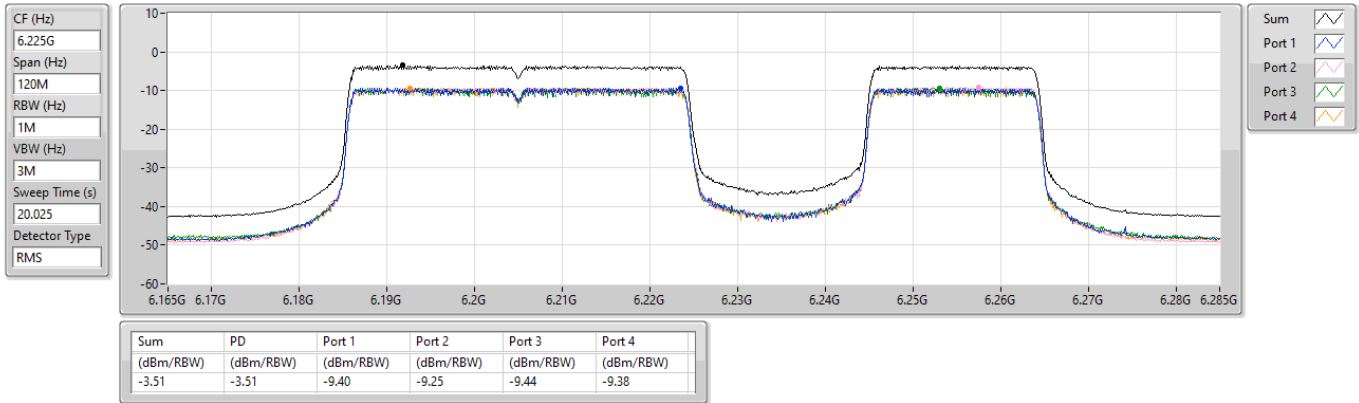


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

PSD

6345MHz

28/11/2024

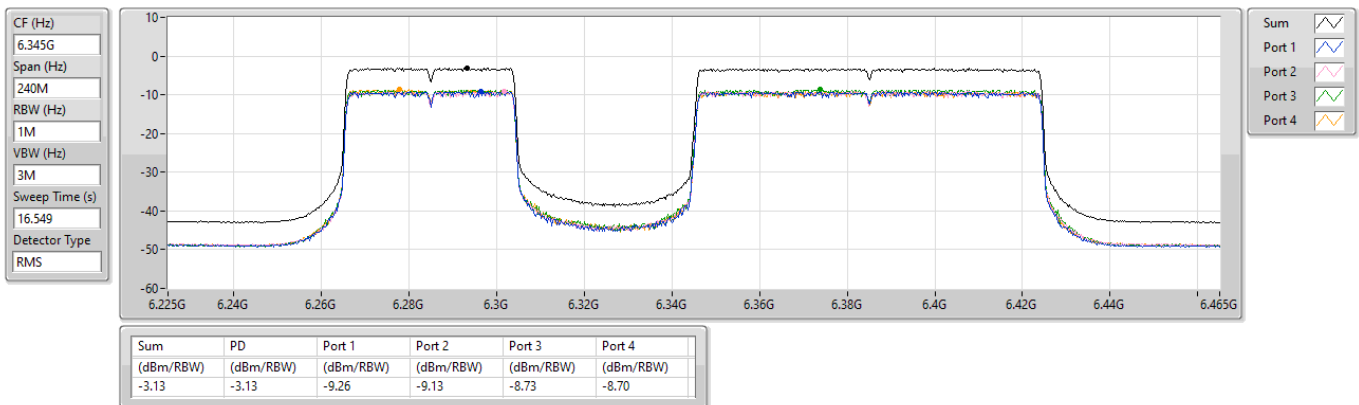

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

PSD

6105MHz

28/11/2024

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
26.811

Detector Type
RMS

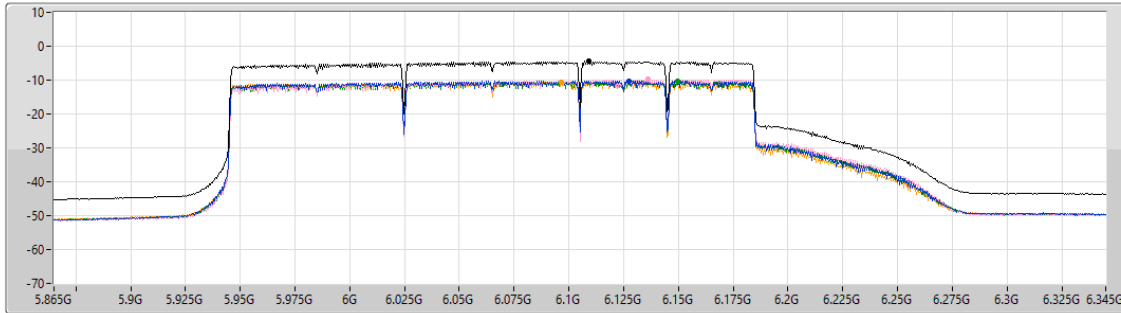

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.47	-4.47	-10.19	-9.84	-10.39	-10.60

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

PSD

6545MHz

28/11/2024

CF (Hz)
6.545G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
29.827

Detector Type
RMS

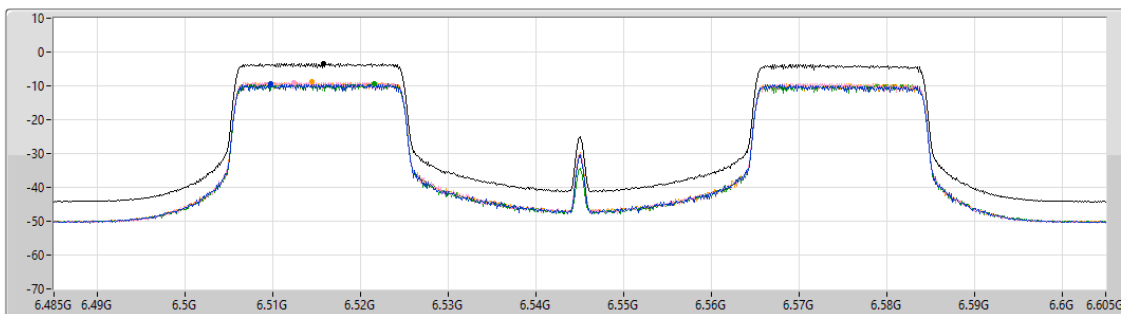

Sum 

Port 1 

Port 2 

Port 3 

Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.30	-3.30	-9.52	-8.93	-9.44	-8.90

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

PSD

6505MHz

28/11/2024

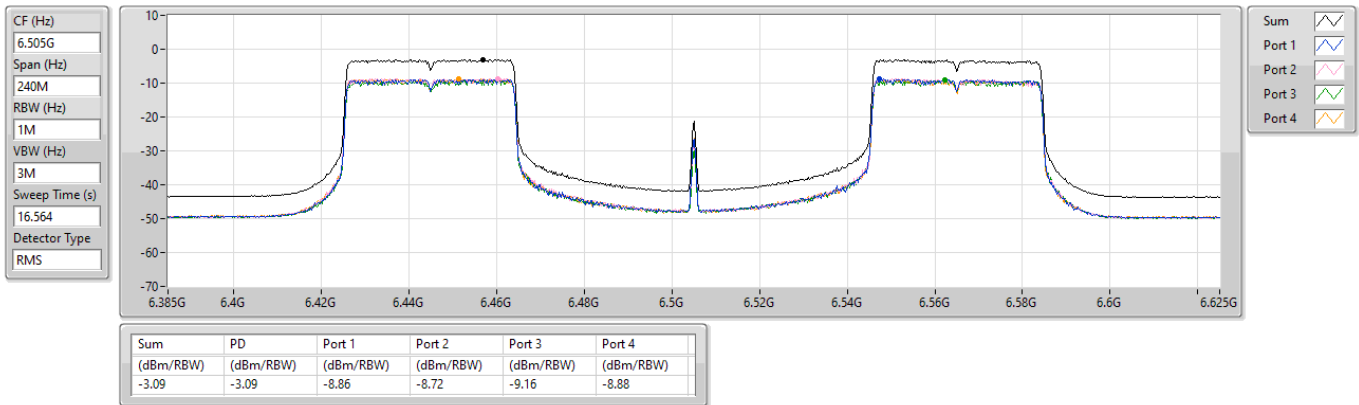


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 MRU 5_4TX

PSD

6585MHz

28/11/2024

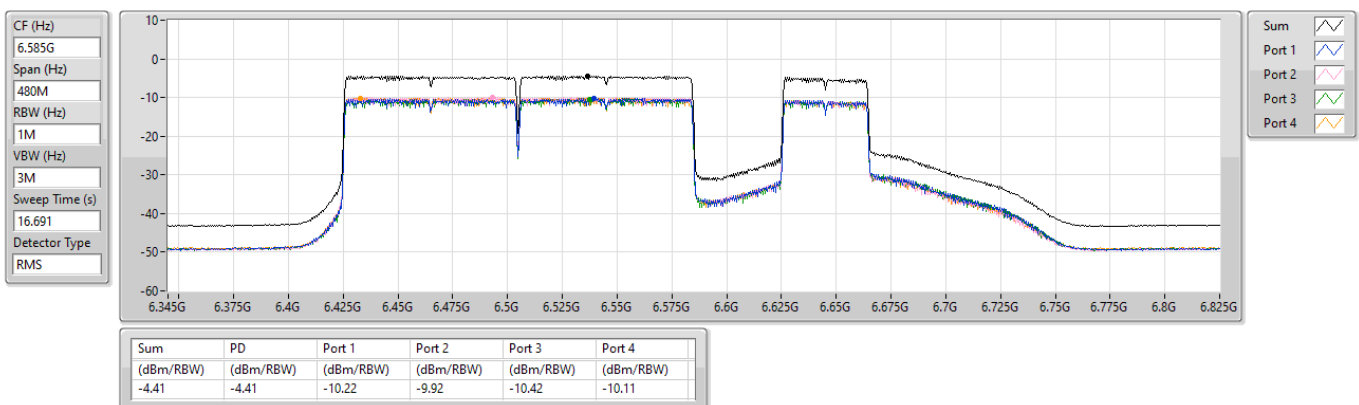

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

PSD

6785MHz

28/11/2024

CF (Hz)
6.785G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
29.827

Detector Type
RMS

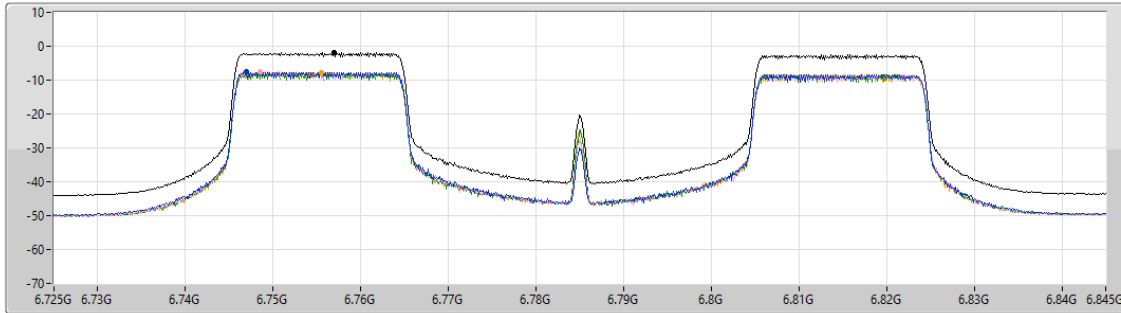

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.95	-1.95	-7.51	-7.58	-8.03	-7.82

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX

PSD

6825MHz

28/11/2024

CF (Hz)
6.825G


Span (Hz)
240M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
30.394

Detector Type
RMS

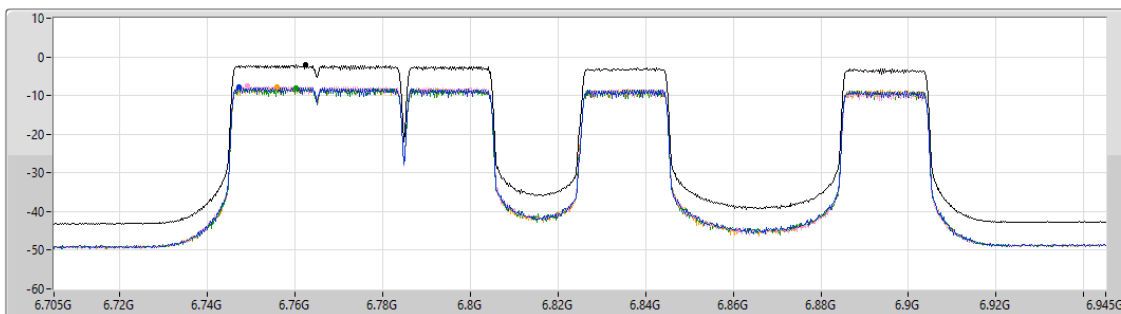

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.05	-2.05	-7.89	-7.63	-8.08	-7.90

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),3xRU996 MRU 4_4TX

PSD

6745MHz

28/11/2024

CF (Hz)
6.745G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
26.811

Detector Type
RMS

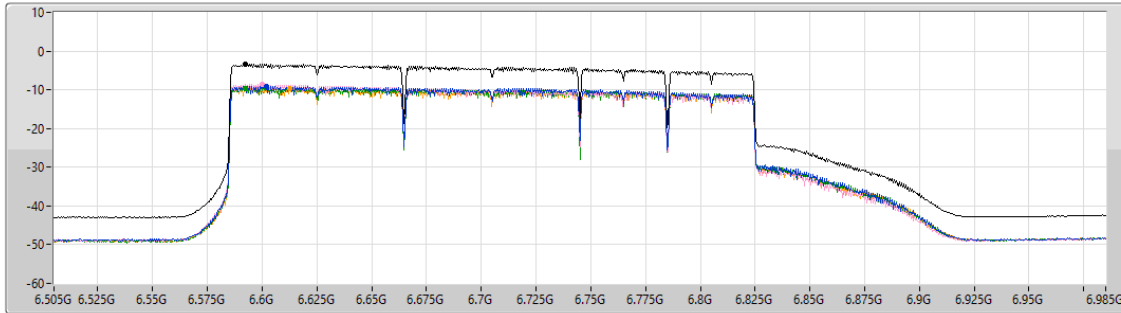

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.41	-3.41	-9.06	-8.64	-9.59	-9.61

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

PSD

6945MHz

28/11/2024

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
29.827

Detector Type
RMS

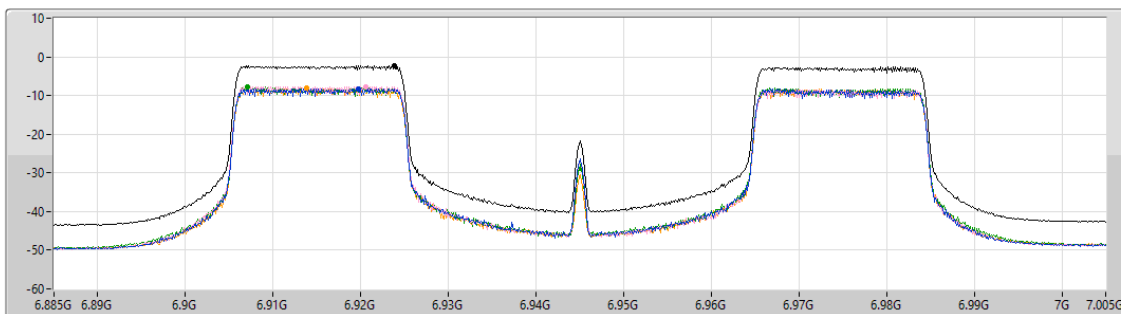

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.23	-2.23	-8.28	-7.72	-7.83	-8.16

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX

PSD

6985MHz

28/11/2024

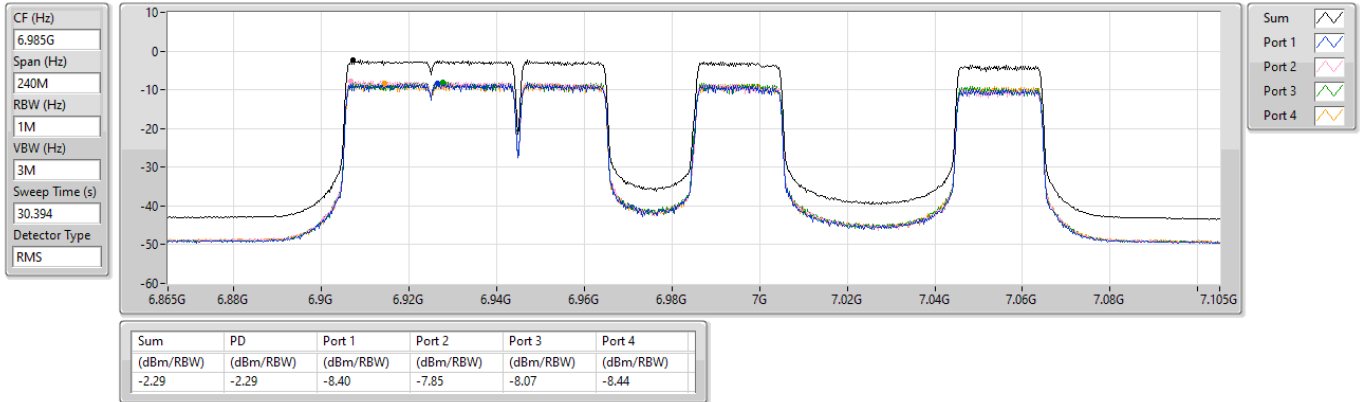

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-3.40	4.41
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-3.11	4.70
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-4.42	3.39
6.425-6.525GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-2.99	4.67
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-2.90	4.76
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-4.31	3.35
6.525-6.875GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-1.97	4.85
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-1.95	4.87
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-3.25	3.57
6.875-7.125GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-1.87	4.78
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-2.62	4.03

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.57	-9.35	-9.72	-9.96	-3.76	Inf	4.05	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.53	-9.49	-9.79	-9.96	-3.79	Inf	4.02	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.67	-9.29	-9.76	-10.03	-3.76	Inf	4.05	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	7.81	-9.86	-9.56	-9.98	-10.05	-3.95	Inf	3.86	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.51	-9.21	-9.55	-9.35	-3.49	Inf	4.32	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.51	-9.15	-9.49	-9.34	-3.50	Inf	4.31	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.46	-9.20	-9.50	-9.32	-3.47	Inf	4.34	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6225MHz	Pass	7.81	-9.41	-9.05	-9.44	-9.34	-3.40	Inf	4.41	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.54	-9.28	-9.43	-9.57	-3.55	Inf	4.26	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.59	-9.28	-9.44	-9.67	-3.60	Inf	4.21	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.50	-9.18	-9.46	-9.70	-3.58	Inf	4.23	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6385MHz	Pass	7.81	-9.49	-9.33	-9.55	-9.80	-3.63	Inf	4.18	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.31	-8.61	-9.08	-9.01	-3.14	Inf	4.52	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.28	-8.54	-9.04	-9.02	-3.05	Inf	4.61	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.14	-8.55	-9.10	-9.00	-3.05	Inf	4.61	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6465MHz	Pass	7.66	-9.13	-8.44	-8.93	-8.97	-2.99	Inf	4.67	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.27	-8.99	-9.60	-9.12	-3.38	Inf	4.28	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.33	-9.03	-9.60	-9.19	-3.36	Inf	4.30	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.37	-9.01	-9.47	-9.29	-3.36	Inf	4.30	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6545MHz	Pass	7.66	-9.41	-9.08	-9.57	-9.29	-3.42	Inf	4.24	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-8.11	-7.85	-8.18	-7.98	-2.10	Inf	4.72	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-8.06	-7.73	-8.40	-8.16	-2.14	Inf	4.68	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-7.92	-7.96	-8.37	-8.21	-2.21	Inf	4.61	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6625MHz	Pass	6.82	-8.00	-7.95	-8.37	-8.18	-2.22	Inf	4.60	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	6.82	-8.49	-8.35	-8.74	-8.76	-2.65	Inf	4.17	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	6.82	-8.40	-8.14	-8.72	-8.68	-2.52	Inf	4.30	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6705MHz	Pass	6.82	-8.37	-8.15	-8.65	-8.61	-2.50	Inf	4.32	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6705MHz	Pass	6.82	-8.43	-8.29	-8.65	-8.77	-2.56	Inf	4.26	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-8.15	-7.89	-8.29	-8.18	-2.16	Inf	4.66	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-7.96	-7.62	-8.16	-7.99	-1.97	Inf	4.85	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-8.00	-7.68	-8.15	-8.08	-2.00	Inf	4.82	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6785MHz	Pass	6.82	-7.99	-7.61	-8.08	-8.00	-1.97	Inf	4.85	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-9.10	-8.21	-8.44	-8.52	-2.62	Inf	4.20	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-9.11	-8.00	-8.33	-8.33	-2.47	Inf	4.35	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-9.04	-8.04	-8.32	-8.31	-2.49	Inf	4.33	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6865MHz	Pass	6.82	-8.91	-8.10	-8.36	-8.32	-2.49	Inf	4.33	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.08	-7.78	-7.31	-7.83	-1.87	Inf	4.78	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.07	-7.59	-7.46	-7.90	-1.88	Inf	4.77	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.32	-7.77	-7.50	-7.97	-1.98	Inf	4.67	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6945MHz	Pass	6.65	-8.26	-7.87	-7.54	-7.98	-2.01	Inf	4.64	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-7.96	-7.77	-7.97	-7.87	-1.99	Inf	4.66	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-7.90	-7.67	-7.98	-7.83	-1.98	Inf	4.67	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-7.88	-7.64	-7.94	-7.86	-1.96	Inf	4.69	5.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
7025MHz	Pass	6.65	-7.85	-7.66	-7.91	-7.82	-1.95	Inf	4.70	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.67	-9.45	-9.94	-9.63	-3.77	Inf	4.04	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.68	-9.43	-9.91	-9.62	-3.74	Inf	4.07	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.61	-9.35	-9.82	-9.67	-3.78	Inf	4.03	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.73	-9.35	-9.91	-9.68	-3.77	Inf	4.04	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.74	-9.34	-9.96	-9.75	-3.76	Inf	4.05	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.81	-9.38	-9.85	-9.77	-3.80	Inf	4.01	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.74	-9.38	-10.01	-9.83	-3.81	Inf	4.00	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.72	-9.43	-10.00	-9.83	-3.84	Inf	3.97	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6025MHz	Pass	7.81	-9.49	-9.27	-10.01	-9.69	-3.71	Inf	4.10	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.67	-9.21	-9.92	-9.72	-3.76	Inf	4.05	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.68	-9.18	-9.90	-9.78	-3.72	Inf	4.09	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	7.81	-9.86	-9.62	-10.22	-10.11	-4.01	Inf	3.80	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.34	-9.03	-9.41	-9.32	-3.46	Inf	4.35	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.33	-9.02	-9.45	-9.37	-3.49	Inf	4.32	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.32	-9.01	-9.36	-9.30	-3.45	Inf	4.36	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.33	-8.99	-9.46	-9.38	-3.46	Inf	4.35	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.29	-8.99	-9.30	-9.26	-3.36	Inf	4.45	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.38	-8.94	-9.41	-9.34	-3.44	Inf	4.37	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.38	-8.97	-9.36	-9.35	-3.42	Inf	4.39	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.32	-8.92	-9.35	-9.36	-3.40	Inf	4.41	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.16	-9.00	-9.33	-9.27	-3.36	Inf	4.45	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.27	-8.91	-9.27	-9.25	-3.33	Inf	4.48	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.33	-8.78	-9.23	-9.08	-3.33	Inf	4.48	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6185MHz	Pass	7.81	-9.19	-8.85	-9.26	-9.23	-3.34	Inf	4.47	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.16	-9.24	-8.82	-9.13	-3.22	Inf	4.59	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.12	-9.12	-8.86	-8.99	-3.18	Inf	4.63	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.16	-9.19	-8.77	-8.97	-3.18	Inf	4.63	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.10	-9.16	-8.80	-9.01	-3.17	Inf	4.64	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.21	-9.10	-8.73	-8.99	-3.15	Inf	4.66	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.21	-9.14	-8.82	-9.00	-3.20	Inf	4.61	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.14	-9.17	-8.71	-8.94	-3.14	Inf	4.67	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.16	-9.08	-8.74	-8.99	-3.15	Inf	4.66	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.21	-9.18	-8.84	-9.18	-3.23	Inf	4.58	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.12	-9.06	-8.66	-8.87	-3.11	Inf	4.70	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.16	-9.11	-8.68	-8.96	-3.12	Inf	4.69	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6345MHz	Pass	7.81	-9.40	-9.26	-9.54	-9.63	-3.59	Inf	4.22	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.69	-8.70	-9.09	-8.68	-2.99	Inf	4.67	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.66	-8.71	-9.03	-8.67	-2.92	Inf	4.74	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.66	-8.69	-9.10	-8.60	-2.90	Inf	4.76	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.65	-8.72	-9.03	-8.65	-2.94	Inf	4.72	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.68	-8.60	-9.04	-8.66	-2.90	Inf	4.76	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.72	-8.71	-8.96	-8.74	-2.95	Inf	4.71	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.73	-8.73	-9.08	-8.76	-3.01	Inf	4.65	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.78	-8.74	-9.05	-8.87	-3.01	Inf	4.65	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-9.05	-8.87	-9.54	-8.91	-3.24	Inf	4.42	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.87	-8.85	-9.41	-8.76	-3.12	Inf	4.54	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-8.97	-8.81	-9.46	-8.74	-3.11	Inf	4.55	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6505MHz	Pass	7.66	-9.05	-8.93	-9.46	-8.94	-3.25	Inf	4.41	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.38	-8.27	-8.19	-8.27	-2.36	Inf	4.46	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.32	-8.35	-8.28	-8.20	-2.34	Inf	4.48	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.29	-8.31	-8.22	-8.25	-2.29	Inf	4.53	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.28	-8.24	-8.31	-8.37	-2.33	Inf	4.49	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.27	-8.35	-8.31	-8.32	-2.34	Inf	4.48	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6665MHz	Pass	6.82	-8.36	-8.42	-8.29	-8.36	-2.40	Inf	4.42	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.31	-8.38	-8.30	-8.40	-2.40	Inf	4.42	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.39	-8.42	-8.32	-8.43	-2.42	Inf	4.40	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.37	-8.22	-8.05	-8.18	-2.25	Inf	4.57	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.18	-8.09	-8.00	-8.16	-2.16	Inf	4.66	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.11	-8.26	-8.08	-8.23	-2.23	Inf	4.59	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6665MHz	Pass	6.82	-8.30	-8.56	-8.25	-8.41	-2.41	Inf	4.41	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.46	-7.78	-8.31	-8.18	-2.20	Inf	4.62	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.20	-7.54	-8.24	-8.01	-2.02	Inf	4.80	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.21	-7.50	-8.16	-7.94	-1.98	Inf	4.84	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.22	-7.59	-8.12	-7.98	-1.99	Inf	4.83	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.12	-7.50	-8.16	-7.93	-2.00	Inf	4.82	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.13	-7.46	-8.16	-7.99	-1.95	Inf	4.87	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.11	-7.47	-8.14	-8.07	-1.97	Inf	4.85	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.16	-7.57	-8.13	-7.98	-2.00	Inf	4.82	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.48	-7.90	-8.48	-8.21	-2.32	Inf	4.50	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.59	-7.92	-8.59	-8.44	-2.40	Inf	4.42	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.12	-7.49	-8.12	-8.00	-1.95	Inf	4.87	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6825MHz	Pass	6.82	-8.07	-7.62	-8.11	-7.93	-1.98	Inf	4.84	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.63	-8.43	-8.69	-8.92	-2.76	Inf	3.89	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.72	-8.48	-8.59	-8.86	-2.72	Inf	3.93	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.65	-8.58	-8.62	-8.90	-2.78	Inf	3.87	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.70	-8.45	-8.65	-8.86	-2.75	Inf	3.90	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP	-	-	-	-	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5_4TX										
6985MHz	Pass	6.65	-8.73	-8.43	-8.63	-8.83	-2.74	Inf	3.91	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.62	-8.44	-8.59	-8.89	-2.74	Inf	3.91	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.78	-8.43	-8.58	-8.86	-2.77	Inf	3.88	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.63	-8.45	-8.68	-8.82	-2.73	Inf	3.92	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.58	-8.47	-8.59	-8.89	-2.68	Inf	3.97	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.40	-8.32	-8.48	-8.77	-2.62	Inf	4.03	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.56	-8.34	-8.49	-8.76	-2.65	Inf	4.00	5.00
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	6.65	-8.55	-8.39	-8.43	-8.72	-2.62	Inf	4.03	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.27	-9.99	-10.55	-10.37	-4.50	Inf	3.31	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.26	-9.98	-10.74	-10.50	-4.56	Inf	3.25	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.30	-9.95	-10.66	-10.43	-4.50	Inf	3.31	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.35	-10.01	-10.59	-10.54	-4.52	Inf	3.29	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.35	-9.94	-10.73	-10.59	-4.61	Inf	3.20	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.37	-9.98	-10.76	-10.56	-4.53	Inf	3.28	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.37	-9.86	-10.68	-10.65	-4.57	Inf	3.24	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.35	-10.06	-10.64	-10.61	-4.55	Inf	3.26	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.60	-10.70	-10.94	-10.60	-4.88	Inf	2.93	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.33	-9.95	-10.47	-10.52	-4.43	Inf	3.38	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.41	-9.91	-10.55	-10.60	-4.63	Inf	3.18	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.40	-9.87	-10.58	-10.63	-4.51	Inf	3.30	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.49	-10.18	-10.67	-10.44	-4.59	Inf	3.22	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.41	-10.10	-10.65	-10.40	-4.55	Inf	3.26	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.42	-10.04	-10.52	-10.56	-4.52	Inf	3.29	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.68	-10.11	-10.67	-10.67	-4.65	Inf	3.16	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.55	-10.16	-10.67	-10.64	-4.73	Inf	3.08	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.49	-10.08	-10.67	-10.67	-4.59	Inf	3.22	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.08	-10.24	-10.62	-9.91	-4.43	Inf	3.38	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.15	-10.27	-10.59	-10.07	-4.46	Inf	3.35	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.30	-10.22	-10.58	-10.10	-4.54	Inf	3.27	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.30	-10.13	-10.62	-10.13	-4.44	Inf	3.37	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.31	-10.17	-10.60	-10.07	-4.47	Inf	3.34	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	7.81	-10.22	-10.20	-10.53	-10.21	-4.42	Inf	3.39	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.12	-10.90	-11.09	-10.55	-5.03	Inf	2.78	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.07	-10.94	-11.12	-10.27	-5.02	Inf	2.79	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.06	-10.91	-11.06	-10.15	-4.99	Inf	2.82	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.06	-10.85	-11.17	-10.20	-5.02	Inf	2.79	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.03	-10.66	-11.03	-10.21	-4.91	Inf	2.90	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.98	-10.67	-10.93	-10.19	-4.85	Inf	2.96	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.93	-10.69	-10.91	-10.23	-4.86	Inf	2.95	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.89	-10.68	-10.92	-10.33	-4.85	Inf	2.96	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.03	-10.93	-11.16	-10.51	-4.99	Inf	2.82	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.02	-10.87	-11.08	-10.14	-5.04	Inf	2.77	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.70	-10.52	-10.73	-10.04	-4.72	Inf	3.09	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.81	-10.59	-10.78	-10.33	-4.77	Inf	3.04	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.91	-10.92	-10.91	-10.58	-4.89	Inf	2.92	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.02	-10.90	-10.80	-10.30	-4.88	Inf	2.93	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.98	-10.88	-10.89	-10.24	-4.91	Inf	2.90	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.03	-10.89	-10.94	-10.21	-4.95	Inf	2.86	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.80	-10.66	-10.72	-10.24	-4.73	Inf	3.08	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.80	-10.52	-10.63	-10.16	-4.71	Inf	3.10	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.83	-11.02	-10.75	-10.10	-4.74	Inf	3.07	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-10.75	-10.97	-10.84	-10.10	-4.76	Inf	3.05	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.15	-11.27	-11.27	-10.58	-5.15	Inf	2.66	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.20	-11.23	-11.19	-10.54	-5.10	Inf	2.71	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.17	-11.14	-11.13	-10.55	-5.07	Inf	2.74	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6265MHz	Pass	7.81	-11.27	-11.36	-11.18	-10.77	-5.20	Inf	2.61	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.20	-10.81	-10.99	-10.98	-5.10	Inf	2.71	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.24	-10.81	-10.98	-11.02	-5.13	Inf	2.68	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.10	-10.74	-10.94	-10.96	-5.06	Inf	2.75	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.18	-10.73	-10.81	-11.00	-5.05	Inf	2.76	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.15	-10.85	-10.97	-10.94	-5.08	Inf	2.73	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.15	-10.83	-10.84	-11.00	-5.07	Inf	2.74	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.12	-10.75	-10.90	-11.04	-5.11	Inf	2.70	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.24	-10.82	-10.85	-11.16	-5.13	Inf	2.68	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.19	-10.69	-10.93	-10.83	-5.01	Inf	2.80	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.02	-10.54	-10.82	-10.81	-4.87	Inf	2.94	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.82	-10.54	-10.87	-10.88	-4.87	Inf	2.94	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.93	-10.61	-10.68	-11.06	-4.96	Inf	2.85	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.08	-11.00	-10.82	-11.18	-5.15	Inf	2.66	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.07	-10.77	-10.62	-11.09	-5.03	Inf	2.78	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.94	-10.78	-10.70	-11.12	-5.01	Inf	2.80	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.95	-10.68	-10.62	-11.17	-4.96	Inf	2.85	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.95	-10.83	-10.73	-11.16	-4.97	Inf	2.84	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-10.95	-10.73	-10.54	-11.15	-4.98	Inf	2.83	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.25	-10.83	-10.97	-10.89	-5.09	Inf	2.72	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.30	-10.89	-11.03	-10.92	-5.14	Inf	2.67	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.09	-10.92	-10.97	-11.04	-5.11	Inf	2.70	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.06	-10.86	-10.94	-10.97	-5.07	Inf	2.74	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.15	-10.84	-10.89	-10.99	-5.08	Inf	2.73	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6425MHz	Pass	7.81	-11.23	-11.00	-10.95	-11.11	-5.18	Inf	2.63	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.68	-10.03	-10.77	-10.30	-4.60	Inf	3.06	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.63	-9.84	-10.79	-10.11	-4.47	Inf	3.19	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.64	-9.79	-10.76	-10.12	-4.45	Inf	3.21	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.60	-9.86	-10.82	-10.18	-4.52	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.75	-9.88	-10.81	-10.22	-4.55	Inf	3.11	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.69	-10.04	-10.83	-10.34	-4.63	Inf	3.03	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.79	-10.09	-10.97	-10.52	-4.71	Inf	2.95	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.76	-10.09	-10.94	-10.45	-4.72	Inf	2.94	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.66	-9.81	-10.79	-10.20	-4.56	Inf	3.10	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.69	-9.65	-10.69	-10.07	-4.35	Inf	3.31	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.74	-9.85	-10.82	-10.25	-4.54	Inf	3.12	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.45	-9.85	-10.62	-10.20	-4.38	Inf	3.28	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.42	-9.95	-10.66	-10.16	-4.47	Inf	3.19	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.49	-9.74	-10.64	-9.95	-4.32	Inf	3.34	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.29	-9.71	-10.50	-10.00	-4.31	Inf	3.35	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.46	-9.84	-10.57	-10.00	-4.36	Inf	3.30	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.42	-9.88	-10.53	-10.11	-4.40	Inf	3.26	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.45	-9.91	-10.68	-10.10	-4.48	Inf	3.18	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.59	-9.78	-10.76	-10.07	-4.42	Inf	3.24	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.53	-9.74	-10.71	-9.98	-4.32	Inf	3.34	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.56	-9.94	-10.74	-10.18	-4.39	Inf	3.27	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.61	-9.98	-10.75	-10.19	-4.48	Inf	3.18	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.62	-10.17	-10.78	-10.32	-4.58	Inf	3.08	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6585MHz	Pass	7.66	-10.74	-10.15	-10.87	-10.32	-4.64	Inf	3.02	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.55	-8.74	-9.87	-9.78	-3.50	Inf	3.32	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.35	-8.53	-9.89	-9.67	-3.38	Inf	3.44	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.18	-8.37	-9.77	-9.70	-3.26	Inf	3.56	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.35	-8.53	-9.77	-9.59	-3.33	Inf	3.49	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.34	-8.57	-9.87	-9.75	-3.37	Inf	3.45	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.36	-8.58	-9.82	-9.74	-3.36	Inf	3.46	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.33	-8.56	-9.88	-9.83	-3.42	Inf	3.40	5.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.37	-8.70	-9.90	-9.77	-3.44	Inf	3.38	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.52	-8.99	-9.84	-9.94	-3.63	Inf	3.19	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.36	-8.57	-9.69	-9.59	-3.31	Inf	3.51	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.46	-8.64	-9.82	-9.76	-3.46	Inf	3.36	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.42	-8.81	-9.84	-9.88	-3.50	Inf	3.32	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.32	-8.84	-9.60	-9.71	-3.38	Inf	3.44	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.36	-8.79	-9.84	-9.84	-3.46	Inf	3.36	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.29	-8.87	-9.88	-9.86	-3.53	Inf	3.29	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.38	-8.97	-9.94	-9.87	-3.57	Inf	3.25	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.54	-9.06	-9.89	-9.95	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.55	-9.08	-9.94	-9.94	-3.71	Inf	3.11	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.67	-9.02	-9.75	-9.76	-3.61	Inf	3.21	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.57	-9.05	-9.84	-10.00	-3.68	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.68	-9.12	-9.80	-9.98	-3.72	Inf	3.10	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.13	-8.64	-9.47	-9.50	-3.27	Inf	3.55	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.13	-8.62	-9.44	-9.46	-3.25	Inf	3.57	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6745MHz	Pass	6.82	-9.13	-8.75	-9.47	-9.57	-3.29	Inf	3.53	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.17	-9.07	-9.91	-10.05	-3.85	Inf	2.97	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.24	-8.76	-9.86	-9.90	-3.68	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.22	-8.83	-9.71	-9.89	-3.63	Inf	3.19	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.12	-8.79	-9.76	-9.92	-3.62	Inf	3.20	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.13	-9.10	-9.76	-9.94	-3.74	Inf	3.08	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.23	-8.93	-9.79	-9.92	-3.70	Inf	3.12	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.25	-8.87	-9.78	-9.92	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.25	-8.85	-9.77	-9.87	-3.70	Inf	3.12	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.89	-8.90	-9.59	-9.70	-3.65	Inf	3.17	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.09	-8.81	-9.91	-9.86	-3.66	Inf	3.16	5.00
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.07	-8.79	-9.82	-9.96	-3.64	Inf	3.18	5.00



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT320_Nss1,(MCS0),3xRU996 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.24	-8.88	-9.75	-9.84	-3.67	Inf	3.15	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.21	-9.22	-9.89	-9.89	-3.87	Inf	2.95	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.17	-8.89	-9.77	-9.86	-3.68	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.30	-8.95	-9.79	-9.79	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.14	-8.99	-9.92	-9.88	-3.72	Inf	3.10	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 5_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.18	-9.16	-9.80	-9.86	-3.76	Inf	3.06	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 6_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.13	-8.96	-9.75	-9.79	-3.68	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 7_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.70	-9.36	-9.76	-9.74	-3.76	Inf	3.06	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 8_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.63	-8.98	-9.65	-9.74	-3.66	Inf	3.16	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 9_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-10.00	-9.05	-9.63	-9.83	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 10_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.71	-9.09	-9.67	-9.72	-3.68	Inf	3.14	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.85	-9.04	-9.68	-9.74	-3.69	Inf	3.13	5.00
802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX	-	-	-	-	-	-	-	-	-	-
6905MHz	Pass	6.82	-9.72	-8.93	-9.68	-9.65	-3.64	Inf	3.18	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

PSD

6225MHz

26/11/2024

CF (Hz)
6.225G
Span (Hz)
120M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.745
Detector Type
RMS

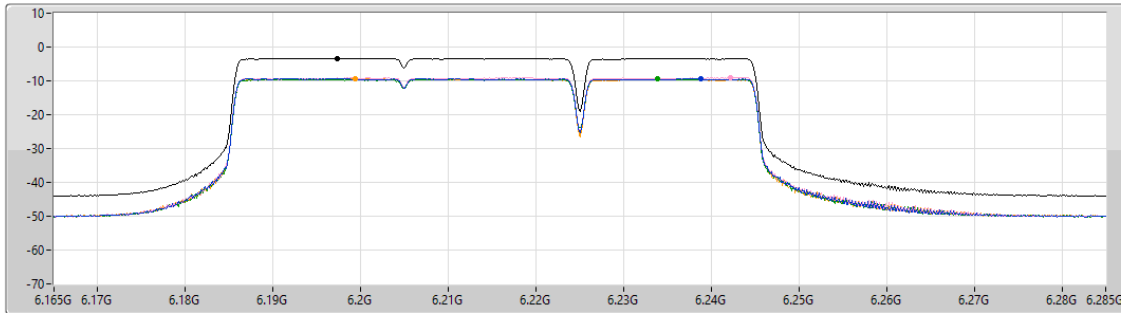

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.40	-3.40	-9.41	-9.05	-9.44	-9.34


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX

PSD

6345MHz

26/11/2024

CF (Hz)
6.345G
Span (Hz)
240M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
54.745
Detector Type
RMS

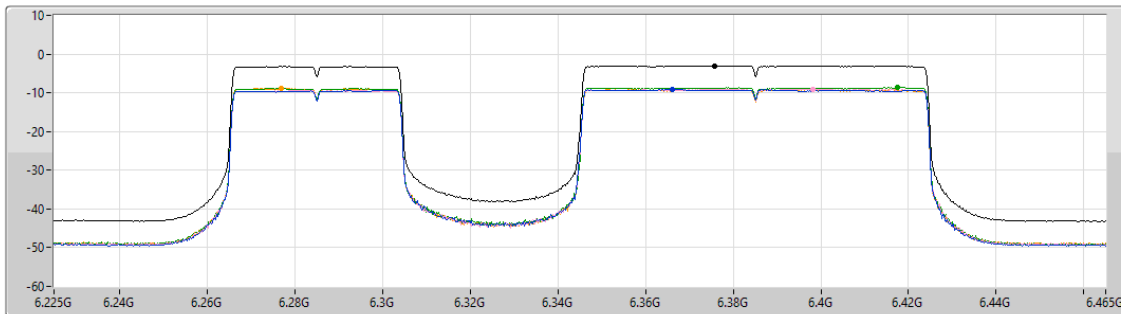

Sum
Port 1
Port 2
Port 3
Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.11	-3.11	-9.12	-9.06	-8.66	-8.87

5.925-6.425GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 12_4TX

PSD

6105MHz

26/11/2024

CF (Hz)
6.105G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.785

Detector Type
RMS

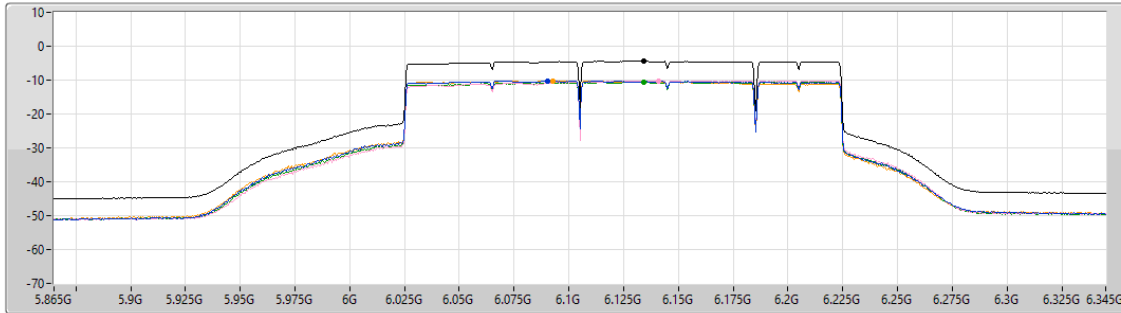

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.42	-4.42	-10.22	-10.20	-10.53	-10.21

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

PSD

6465MHz

26/11/2024

CF (Hz)
6.465G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

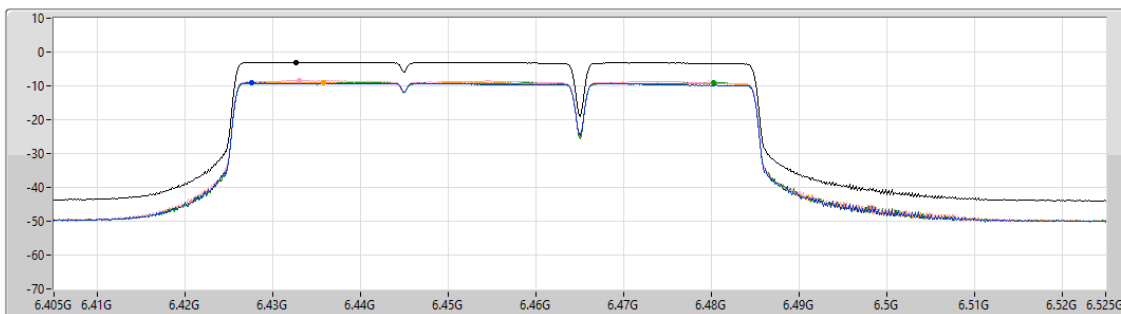

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.99	-2.99	-9.13	-8.44	-8.93	-8.97

6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 3_4TX

PSD

6505MHz

26/11/2024

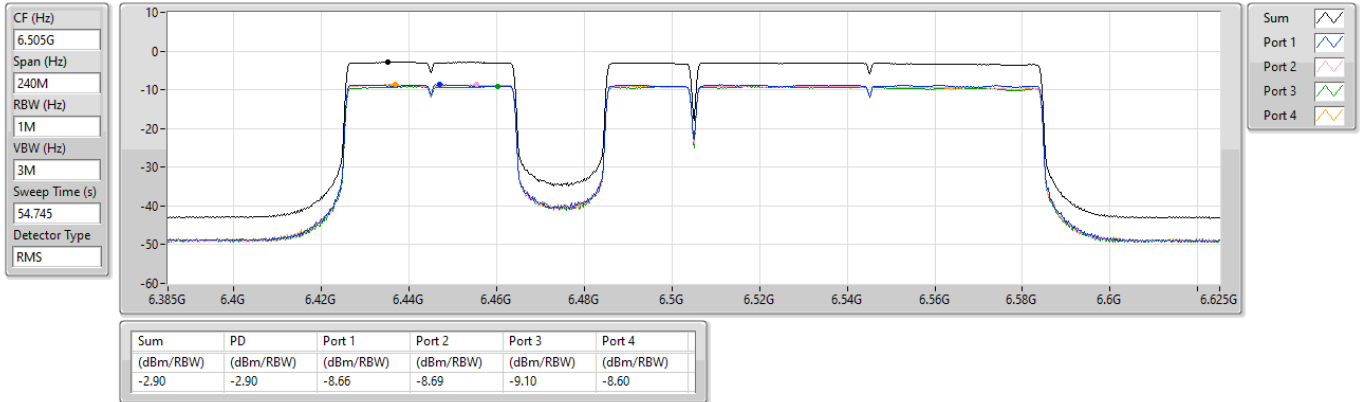


6.425-6.525GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 3_4TX

PSD

6585MHz

26/11/2024

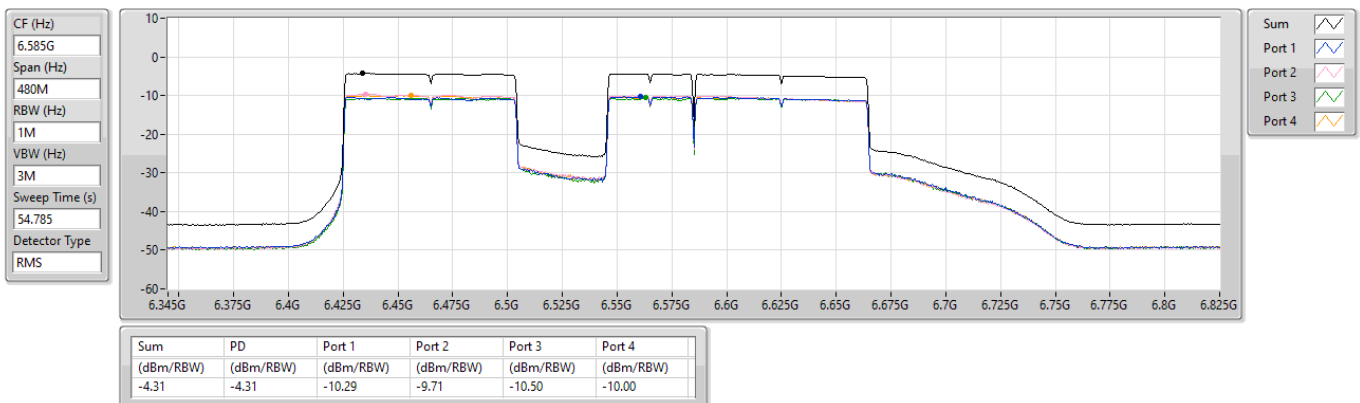


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP_2_4TX

PSD

6785MHz

26/11/2024

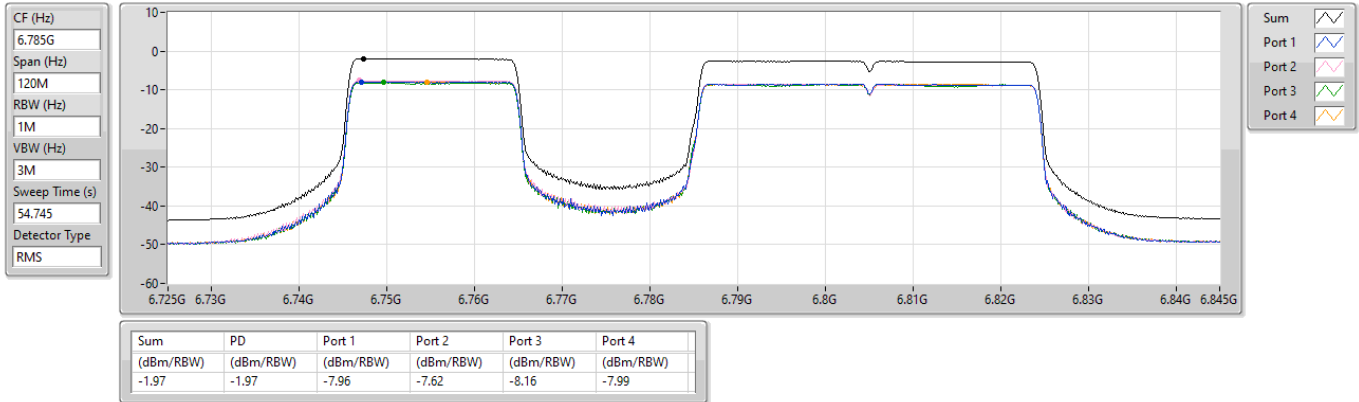


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP_6_4TX

PSD

6825MHz

26/11/2024

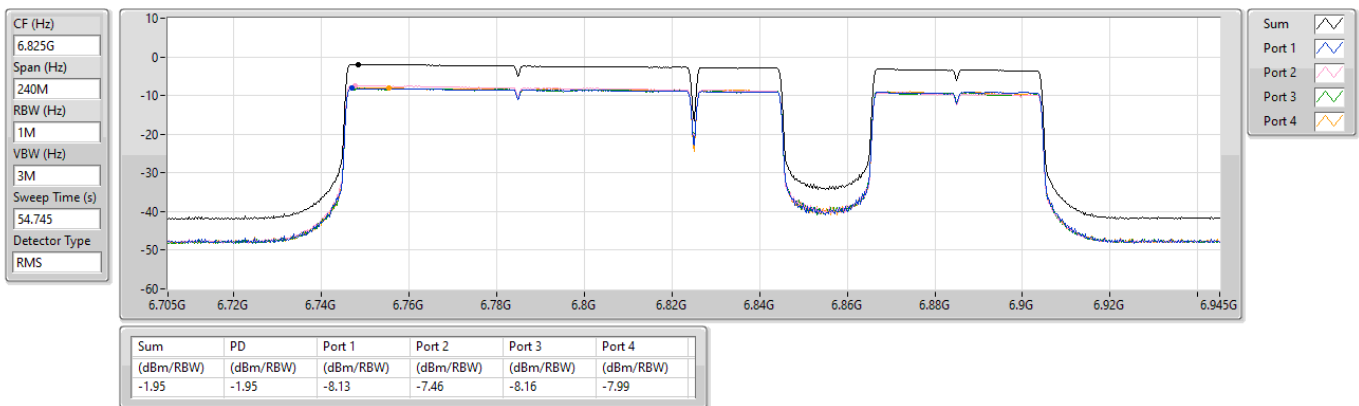

6.525-6.875GHz_802.11be EHT320_Nss1,(MCS0),2xRU996+RU484 CP 11_4TX

PSD

6745MHz

26/11/2024

CF (Hz)
6.745G


Span (Hz)
480M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.785

Detector Type
RMS

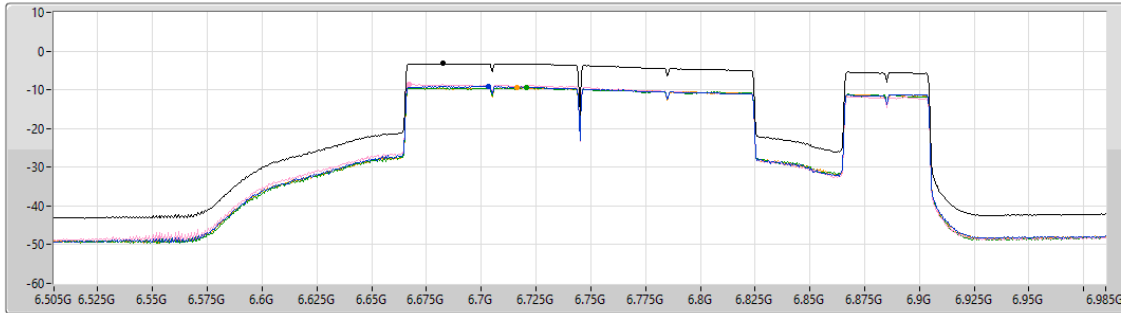

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.25	-3.25	-9.13	-8.62	-9.44	-9.46

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

PSD

6945MHz

26/11/2024

CF (Hz)
6.945G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.745

Detector Type
RMS

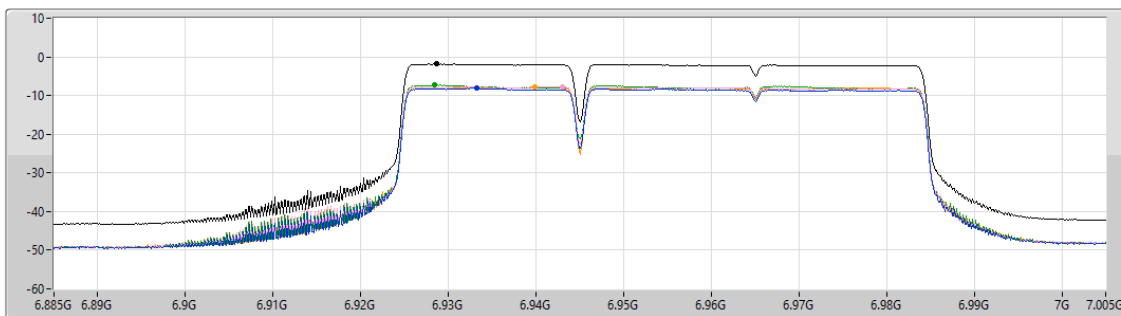


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.87	-1.87	-8.08	-7.78	-7.31	-7.83

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX

PSD

6985MHz

26/11/2024

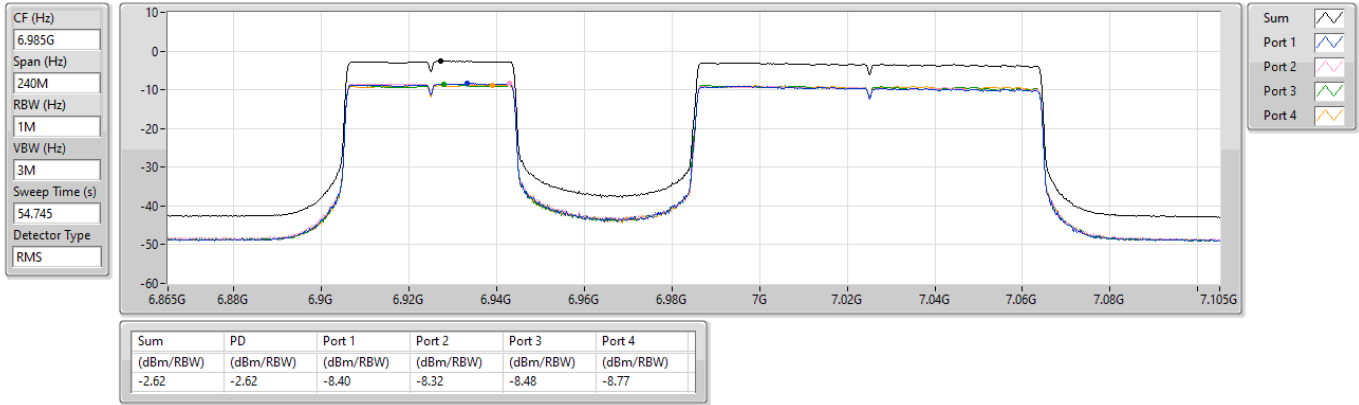

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	5.954175G	-18.71	5.9661G	-52.85	-38.72	-14.13	2
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.407699G	-16.86	6.336G	-70.08	-56.86	-13.22	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.2216G	-11.71	6.4242G	-66.69	-51.71	-14.98	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.3536G	-8.87	6.4272G	-42.63	-28.87	-13.76	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.472626G	-19.36	6.5213G	-73.68	-59.36	-14.32	1
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.448099G	-17.11	6.3486G	-71.80	-57.11	-14.69	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.5433G	-11.90	6.7201G	-65.42	-51.90	-13.52	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.47441G	-8.34	6.5868G	-40.19	-28.35	-11.84	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.8731G	-18.07	6.912025G	-70.32	-58.07	-12.25	1
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.8866G	-16.66	6.97045G	-70.76	-56.66	-14.10	2
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	6.6421G	-10.95	6.6667G	-44.25	-30.97	-13.28	1
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.63601G	-8.74	6.9122G	-62.20	-48.74	-13.46	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	6.996225G	-18.54	6.9599G	-72.55	-58.54	-14.01	2
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	6.999701G	-16.54	6.912G	-69.50	-56.54	-12.96	1
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	7.0107G	-11.84	6.8446G	-66.03	-51.84	-14.19	2
802.11ax HEW160_Nss1,(MCS0)_2TX	Pass	6.95521G	-8.52	6.6964G	-63.19	-48.52	-14.67	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.958074G	-17.89	5.966325G	-53.52	-37.95	-15.57	1
5955MHz	Pass	5.954175G	-18.71	5.9661G	-52.85	-38.72	-14.13	2
6195MHz	Pass	6.192751G	-18.61	6.226625G	-73.98	-58.61	-15.37	1
6195MHz	Pass	6.197174G	-18.37	6.206175G	-53.83	-38.44	-15.39	2
6415MHz	Pass	6.4163G	-18.63	6.426G	-53.22	-38.65	-14.57	1
6415MHz	Pass	6.413775G	-18.28	6.4262G	-53.45	-38.30	-15.15	2
6435MHz	Pass	6.433025G	-18.87	6.4018G	-73.84	-58.87	-14.97	1
6435MHz	Pass	6.438124G	-18.46	6.446275G	-53.59	-38.47	-15.12	2
6475MHz	Pass	6.472626G	-19.36	6.5213G	-73.68	-59.36	-14.32	1
6475MHz	Pass	6.477799G	-17.97	6.425125G	-73.48	-57.97	-15.51	2
6515MHz	Pass	6.513425G	-18.64	6.503725G	-53.39	-38.78	-14.61	1
6515MHz	Pass	6.5161G	-18.02	6.5489G	-73.82	-58.02	-15.80	2
6535MHz	Pass	6.538149G	-18.82	6.49775G	-74.05	-58.82	-15.23	1
6535MHz	Pass	6.534075G	-18.91	6.493875G	-73.56	-58.91	-14.65	2
6695MHz	Pass	6.694025G	-18.70	6.706075G	-52.00	-38.71	-13.29	1
6695MHz	Pass	6.692426G	-18.60	6.683975G	-53.22	-38.40	-14.82	2
6875MHz	Pass	6.8731G	-18.07	6.912025G	-70.32	-58.07	-12.25	1
6875MHz	Pass	6.87435G	-18.47	6.917275G	-73.16	-58.47	-14.69	2
6895MHz	Pass	6.892251G	-17.90	6.931225G	-73.19	-57.90	-15.29	1
6895MHz	Pass	6.896425G	-18.64	6.94345G	-73.08	-58.64	-14.44	2
6995MHz	Pass	6.991176G	-18.51	6.95865G	-72.97	-58.51	-14.46	1
6995MHz	Pass	6.996225G	-18.54	6.9599G	-72.55	-58.54	-14.01	2
7095MHz	Pass	7.091651G	-18.71	7.045G	-73.46	-58.71	-14.75	1
7095MHz	Pass	7.094G	-18.75	7.045475G	-73.29	-58.75	-14.54	2
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.973798G	-15.73	6.0624G	-71.94	-55.73	-16.21	1
5965MHz	Pass	5.9665G	-16.86	6.05885G	-72.10	-56.86	-15.24	2
6205MHz	Pass	6.2031G	-16.41	6.28495G	-72.06	-56.41	-15.65	1
6205MHz	Pass	6.208749G	-16.29	6.18455G	-51.31	-36.31	-15.00	2
6405MHz	Pass	6.407699G	-16.86	6.336G	-70.08	-56.86	-13.22	1
6405MHz	Pass	6.407649G	-16.60	6.4747G	-71.67	-56.60	-15.07	2
6445MHz	Pass	6.448099G	-17.11	6.3486G	-71.80	-57.11	-14.69	1
6445MHz	Pass	6.448799G	-16.48	6.352G	-71.58	-56.48	-15.10	2
6485MHz	Pass	6.4836G	-16.95	6.3927G	-71.84	-56.95	-14.89	1
6485MHz	Pass	6.477452G	-16.30	6.40195G	-71.48	-56.30	-15.18	2
6525MHz	Pass	6.530199G	-16.33	6.59455G	-71.80	-56.33	-15.47	1
6525MHz	Pass	6.517802G	-16.17	6.4283G	-71.86	-56.17	-15.69	2
6565MHz	Pass	6.568599G	-16.83	6.6413G	-71.68	-56.83	-14.85	1
6565MHz	Pass	6.559401G	-16.87	6.49565G	-71.60	-56.87	-14.73	2
6685MHz	Pass	6.690649G	-16.73	6.60935G	-71.26	-56.73	-14.53	1
6685MHz	Pass	6.679701G	-16.73	6.62145G	-71.67	-56.73	-14.94	2
6885MHz	Pass	6.879651G	-15.83	6.816G	-69.98	-55.83	-14.15	1
6885MHz	Pass	6.8866G	-16.66	6.97045G	-70.76	-56.66	-14.10	2
6925MHz	Pass	6.932848G	-16.00	6.98535G	-70.67	-56.00	-14.67	1
6925MHz	Pass	6.9239G	-16.18	7.0029G	-70.66	-56.18	-14.48	2
7005MHz	Pass	6.999701G	-16.54	6.912G	-69.50	-56.54	-12.96	1
7005MHz	Pass	6.999301G	-16.79	6.9333G	-70.93	-56.79	-14.14	2
7085MHz	Pass	7.081201G	-16.78	7.00805G	-70.39	-56.78	-13.61	1
7085MHz	Pass	7.081501G	-16.31	6.98825G	-70.24	-56.31	-13.93	2
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9816G	-10.99	6.1716G	-66.89	-50.99	-15.90	1
5985MHz	Pass	5.9944G	-11.39	6.1728G	-66.73	-51.39	-15.34	2
6225MHz	Pass	6.2216G	-11.71	6.4242G	-66.69	-51.71	-14.98	1
6225MHz	Pass	6.2207G	-10.90	6.3961G	-66.47	-50.90	-15.57	2


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6385MHz	Pass	6.3813G	-11.41	6.4264G	-46.59	-31.42	-15.17	1
6385MHz	Pass	6.374G	-11.20	6.4266G	-46.27	-31.20	-15.07	2
6465MHz	Pass	6.4625G	-11.97	6.3359G	-65.72	-51.97	-13.75	1
6465MHz	Pass	6.4579G	-11.00	6.5063G	-45.26	-31.03	-14.23	2
6545MHz	Pass	6.5433G	-11.90	6.7201G	-65.42	-51.90	-13.52	1
6545MHz	Pass	6.5379G	-11.90	6.415G	-66.53	-51.90	-14.63	2
6625MHz	Pass	6.6421G	-10.95	6.6667G	-44.25	-30.97	-13.28	1
6625MHz	Pass	6.6173G	-11.63	6.4332G	-66.44	-51.63	-14.81	2
6705MHz	Pass	6.6925G	-11.12	6.8843G	-66.09	-51.12	-14.97	1
6705MHz	Pass	6.7023G	-11.60	6.897G	-66.07	-51.60	-14.47	2
6785MHz	Pass	6.7954G	-11.04	6.9117G	-65.37	-51.04	-14.33	1
6785MHz	Pass	6.7812G	-11.26	6.9745G	-65.52	-51.26	-14.26	2
6865MHz	Pass	6.8669G	-11.12	6.9926G	-65.34	-51.12	-14.22	1
6865MHz	Pass	6.8662G	-10.91	6.9988G	-65.04	-50.91	-14.13	2
6945MHz	Pass	6.9332G	-11.71	6.8162G	-66.10	-51.71	-14.39	1
6945MHz	Pass	6.9427G	-11.47	6.8G	-66.17	-51.47	-14.70	2
7025MHz	Pass	6.99601G	-11.24	6.8565G	-65.69	-51.24	-14.45	1
7025MHz	Pass	7.0107G	-11.84	6.8446G	-66.03	-51.84	-14.19	2
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.05839G	-9.15	6.3366G	-63.37	-49.15	-14.22	1
6025MHz	Pass	6.04699G	-9.24	6.3986G	-63.54	-49.24	-14.30	2
6185MHz	Pass	6.15481G	-8.73	6.432G	-63.56	-48.73	-14.83	1
6185MHz	Pass	6.22119G	-8.62	5.786G	-62.59	-48.62	-13.97	2
6345MHz	Pass	6.3536G	-8.87	6.4272G	-42.63	-28.87	-13.76	1
6345MHz	Pass	6.37679G	-8.76	6.4274G	-42.65	-28.76	-13.89	2
6505MHz	Pass	6.53699G	-8.80	6.766G	-62.73	-48.80	-13.93	1
6505MHz	Pass	6.47441G	-8.34	6.5868G	-40.19	-28.35	-11.84	2
6665MHz	Pass	6.63601G	-8.74	6.9122G	-62.20	-48.74	-13.46	1
6665MHz	Pass	6.68759G	-8.65	6.9934G	-62.38	-48.65	-13.73	2
6825MHz	Pass	6.8082G	-8.39	6.5776G	-63.32	-48.39	-14.93	1
6825MHz	Pass	6.85459G	-8.93	6.5736G	-62.84	-48.93	-13.91	2
6985MHz	Pass	6.95281G	-8.28	6.7318G	-63.33	-48.28	-15.05	1
6985MHz	Pass	6.95521G	-8.52	6.6964G	-63.19	-48.52	-14.67	2

5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

17/01/2024

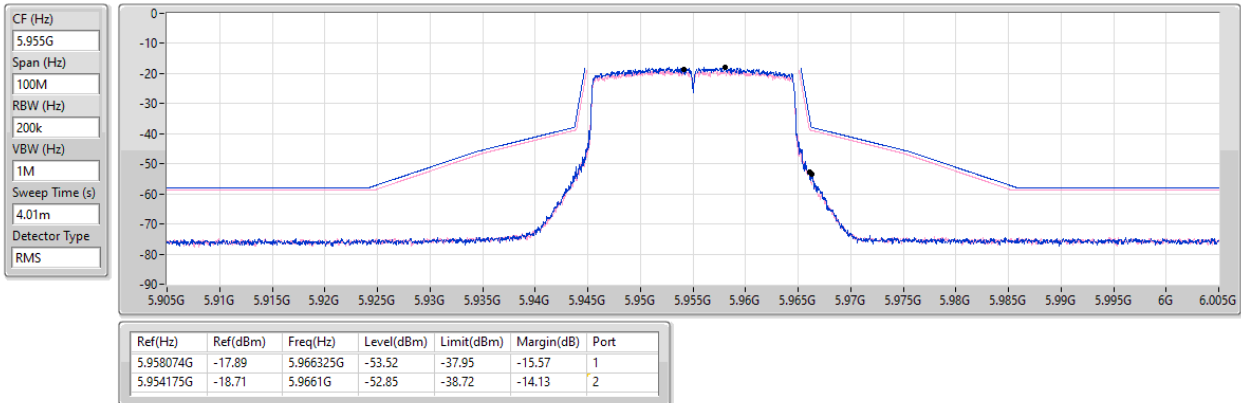


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6195MHz_TX

17/01/2024

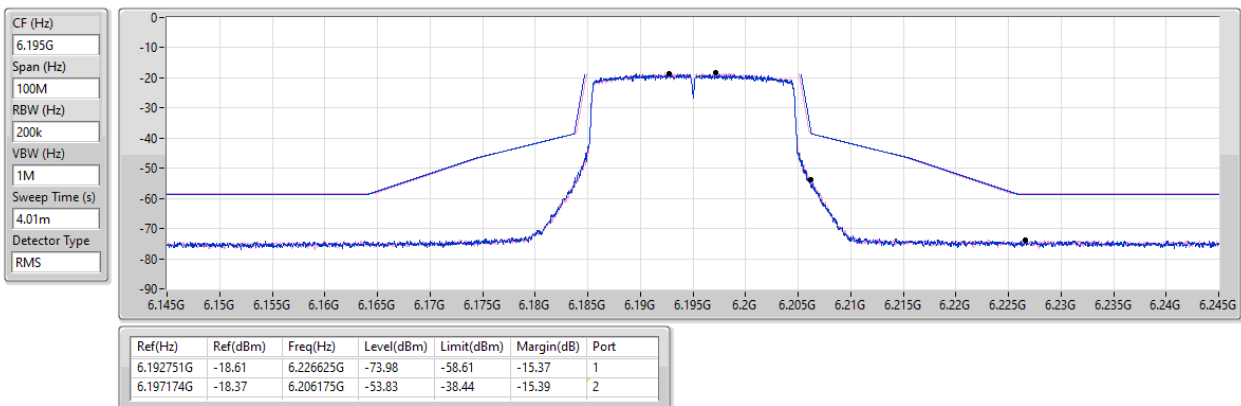


5.925-6.425GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

17/01/2024

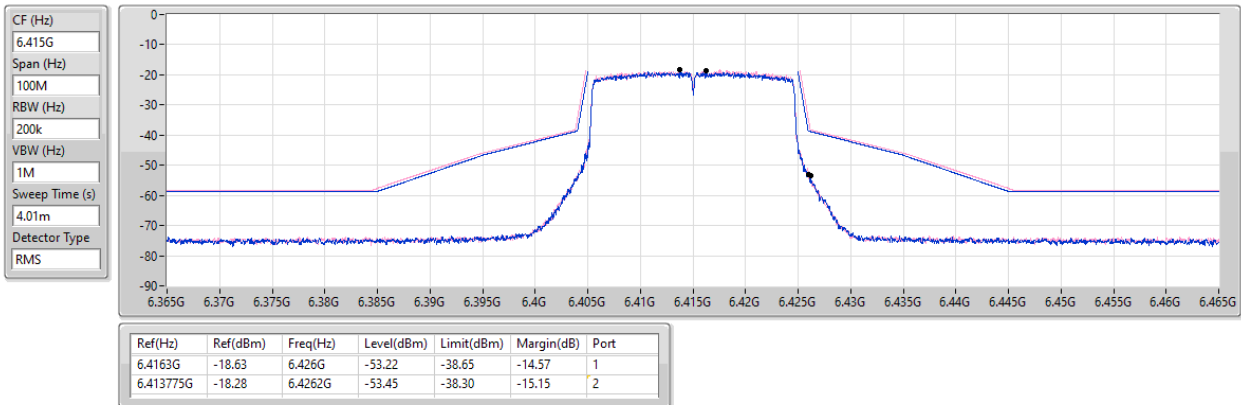


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6435MHz_TX

17/01/2024

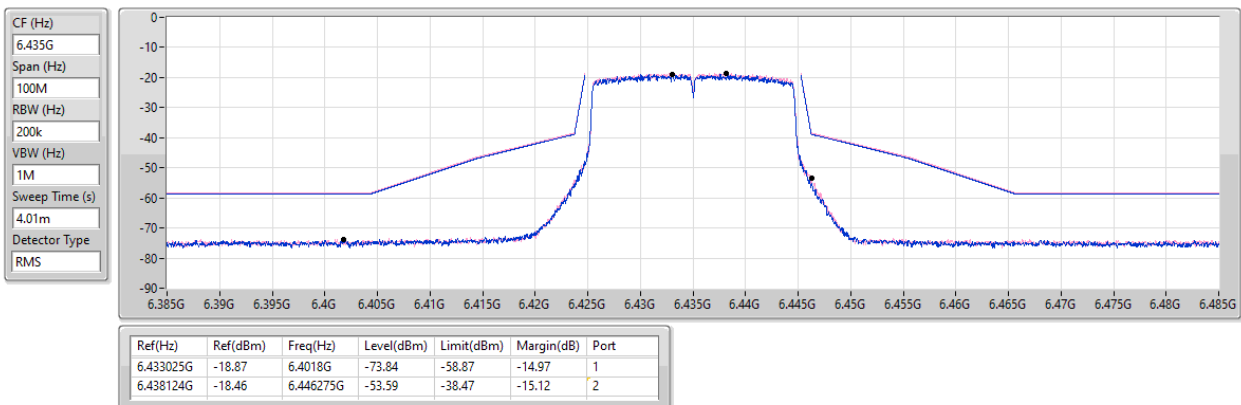


6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6475MHz_TX

17/01/2024

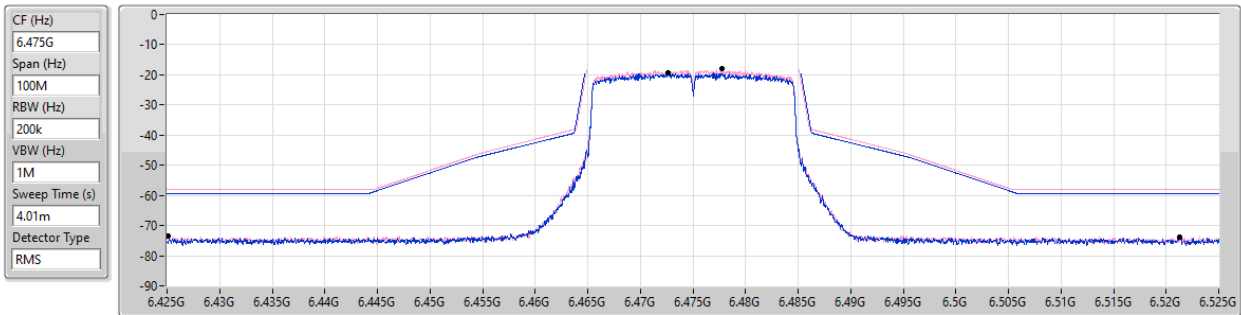


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.472626G	-19.36	6.5213G	-73.68	-59.36	-14.32	1
6.477799G	-17.97	6.425125G	-73.48	-57.97	-15.51	2

6.425-6.525GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6515MHz_TX

17/01/2024

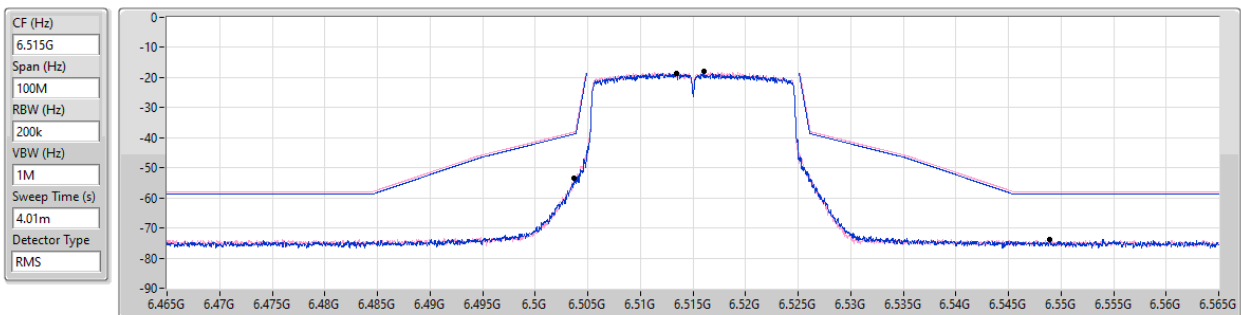


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.513425G	-18.64	6.503725G	-53.39	-38.78	-14.61	1
6.5161G	-18.02	6.5489G	-73.82	-58.02	-15.80	2

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6535MHz_TX

17/01/2024

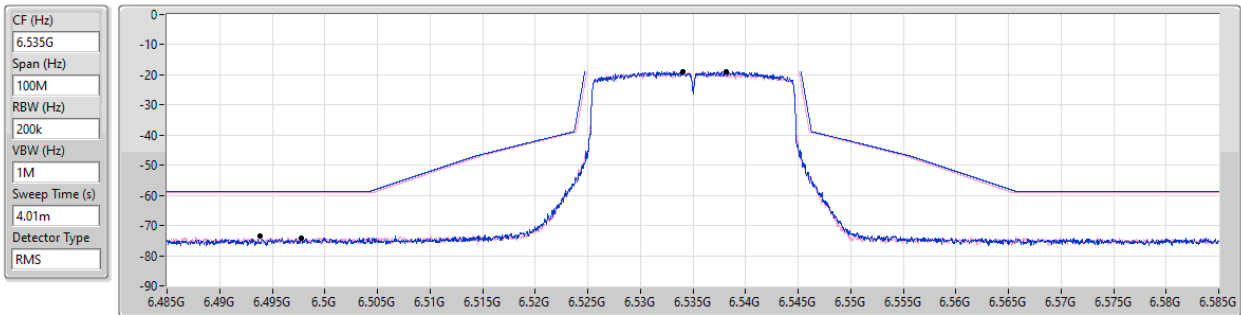


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.538149G	-18.82	6.49775G	-74.05	-58.82	-15.23	1
6.534075G	-18.91	6.493875G	-73.56	-58.91	-14.65	2

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6695MHz_TX

17/01/2024

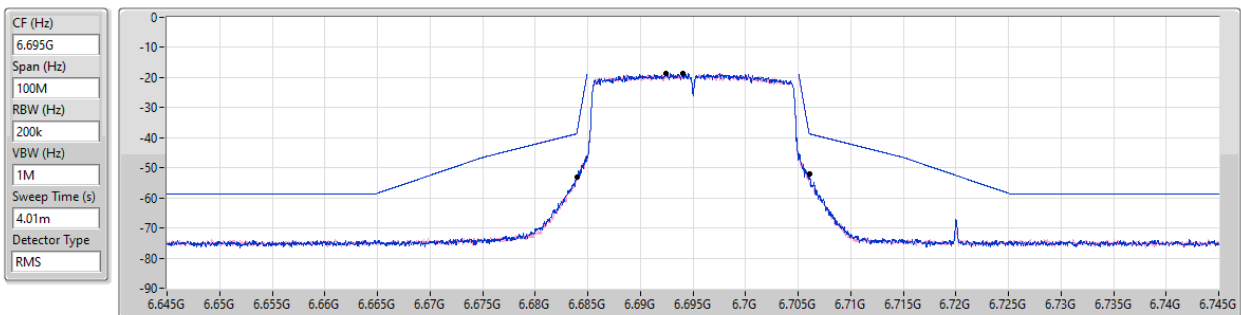


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.694025G	-18.70	6.706075G	-52.00	-38.71	-13.29	1
6.692426G	-18.60	6.683975G	-53.22	-38.40	-14.82	2

6.525-6.875GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6875MHz_TX

17/01/2024

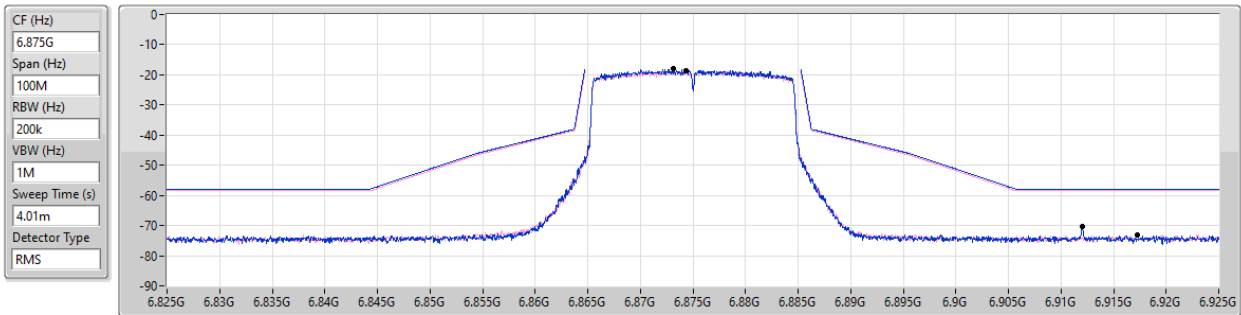


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.8731G	-18.07	6.912025G	-70.32	-58.07	-12.25	1
6.87435G	-18.47	6.917275G	-73.16	-58.47	-14.69	2

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6895MHz_TX

17/01/2024

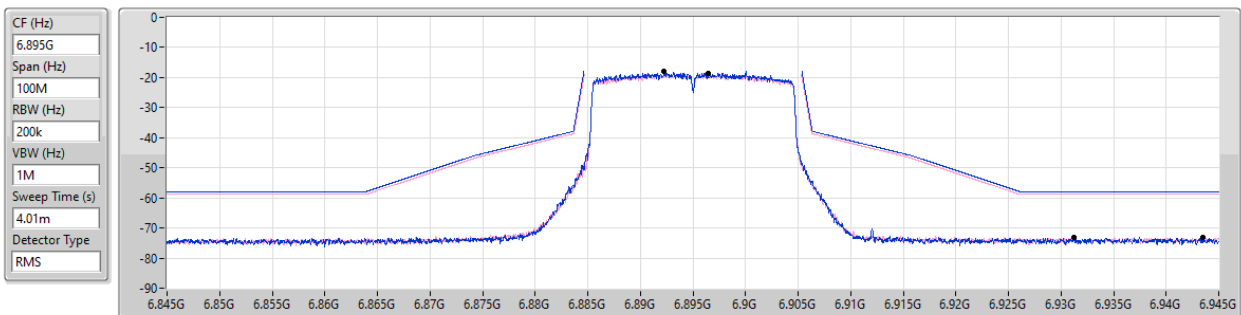


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.892251G	-17.90	6.931225G	-73.19	-57.90	-15.29	1
6.896425G	-18.64	6.94345G	-73.08	-58.64	-14.44	2

6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

6995MHz_TX

17/01/2024

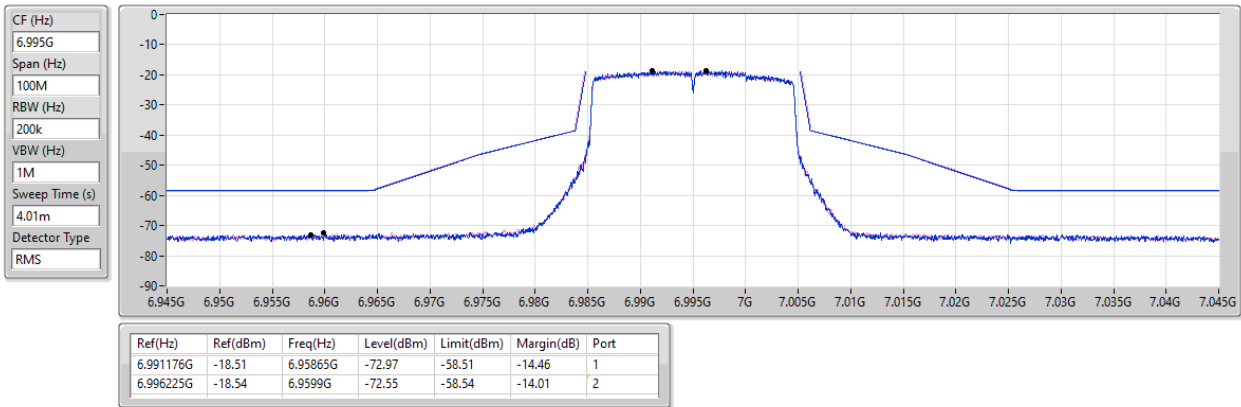


6.875-7.125GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

MASK

7095MHz_TX

17/01/2024

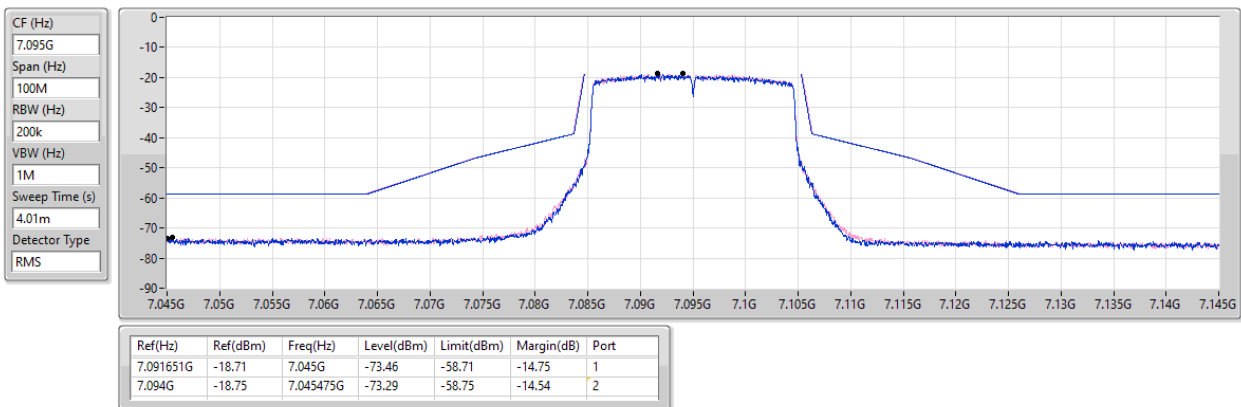


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

17/01/2024

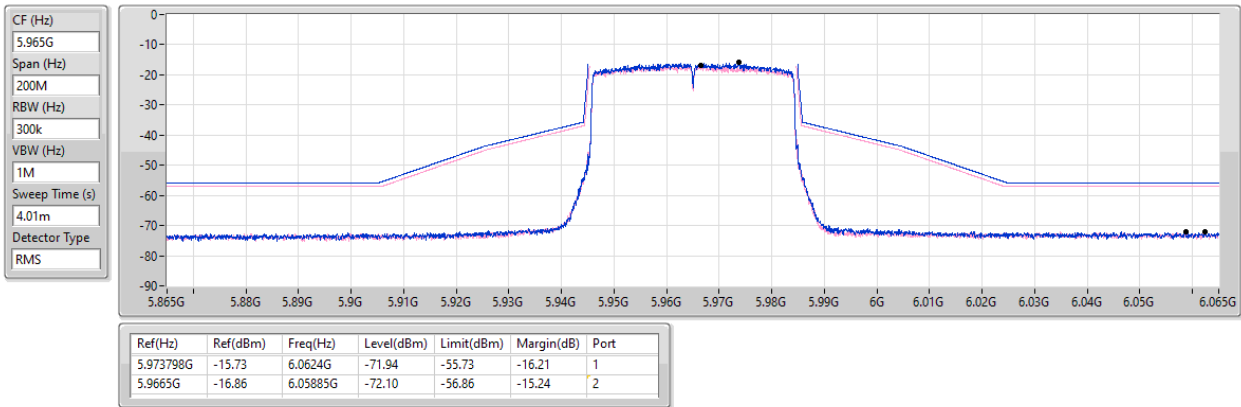


5.925-6.425GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

17/01/2024

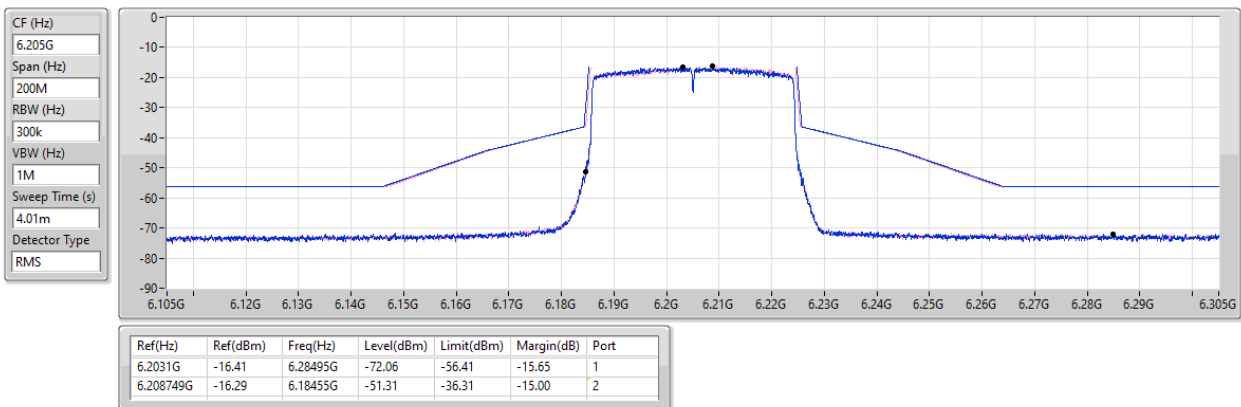


5.925-6.425GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6405MHz_TX

17/01/2024

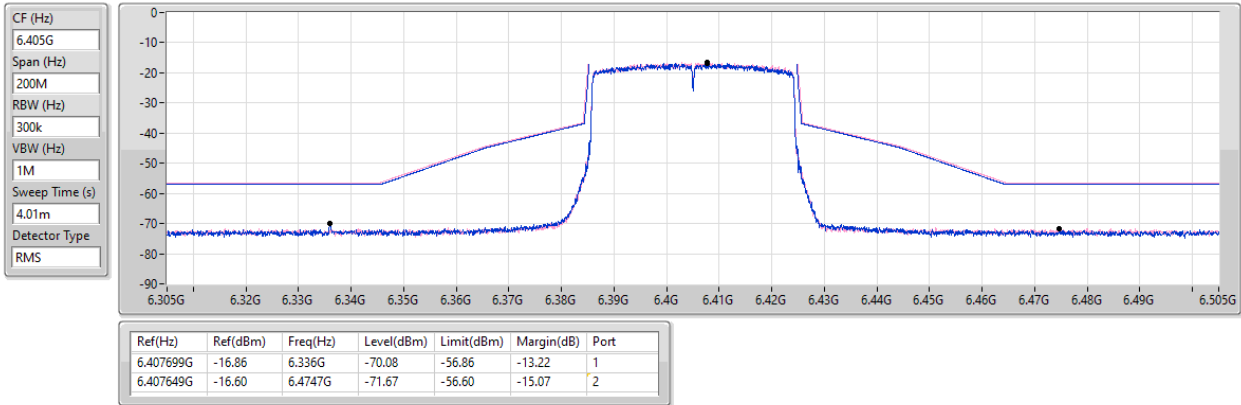


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6445MHz_TX

17/01/2024

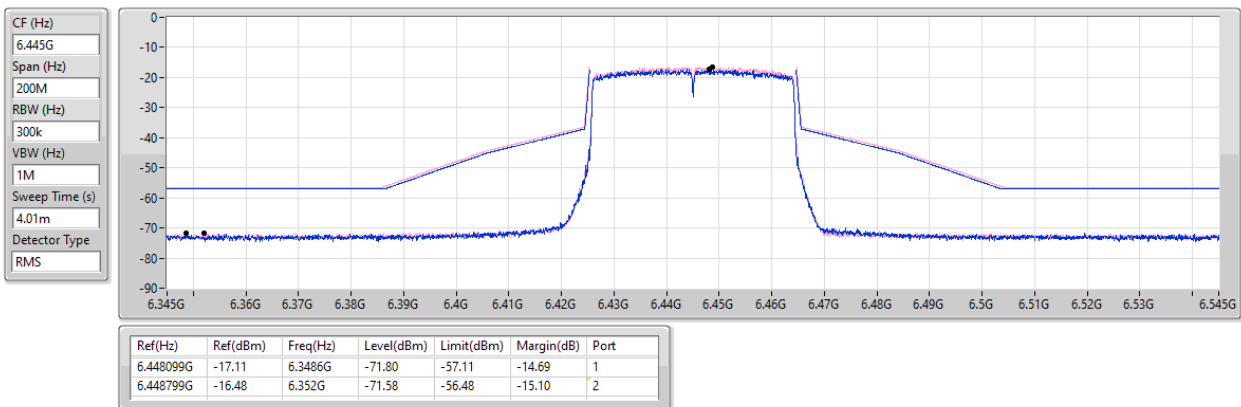


6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6485MHz_TX

17/01/2024

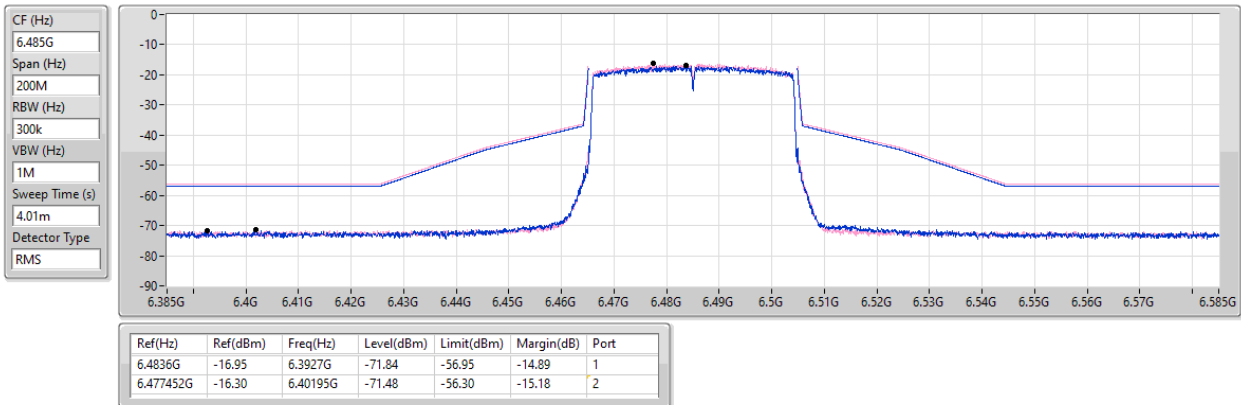

6.425-6.525GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

MASK

6525MHz_TX

17/01/2024

