

Regulatory WLAN Antenna Information

Platform information												
Brand	ODM	****End product model name			Intel platform (ex: Yes, No or NA)	Platform type (ex: regular NB, convertible PC, AIO...etc)			*SAR minimum separation (mm)			
Lenovo	Wistron	Lenovo 500w Yoga Gen 4			Yes	convertible NB						
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.												
Antenna information												
Vendor		Type			Antenna Part number (Main)			Antenna Part number (Aux)				
AWAN		PIFA			025.9026Y.0011 (AYF5Y-100009)			025.9026Z.0011 (AYF5Y-100010)				
Peak gain w/ cable loss (dBi)*												
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz		
Main	0.40	1.39	1.67	0.35	1.27	1.62	1.41	-1.06	-1.94	-1.56		
Aux	-0.45	-0.73	-0.48	0.22	-0.25	-0.82	0.00	-0.18	-0.59	-0.82		
Intel Reference Gain/Type/ Separation distance												
Antenna Type	Antenna Peak gain (In dBi)*										Distance to the end user (mm)	
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm	
	Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00		
	PIFA	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37		5.59
	Dipole	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49		5.34
Notes (marked with *)												
* SAR minimum separation (mm)												
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)												
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)												
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)												
* 3D Peak Antenna gain should be equal or greater than -2 dBi												
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.												

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list

3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)


1. Applicable test methods

[example] This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

Radiated Setup 0.6 GHz - 10 GHz

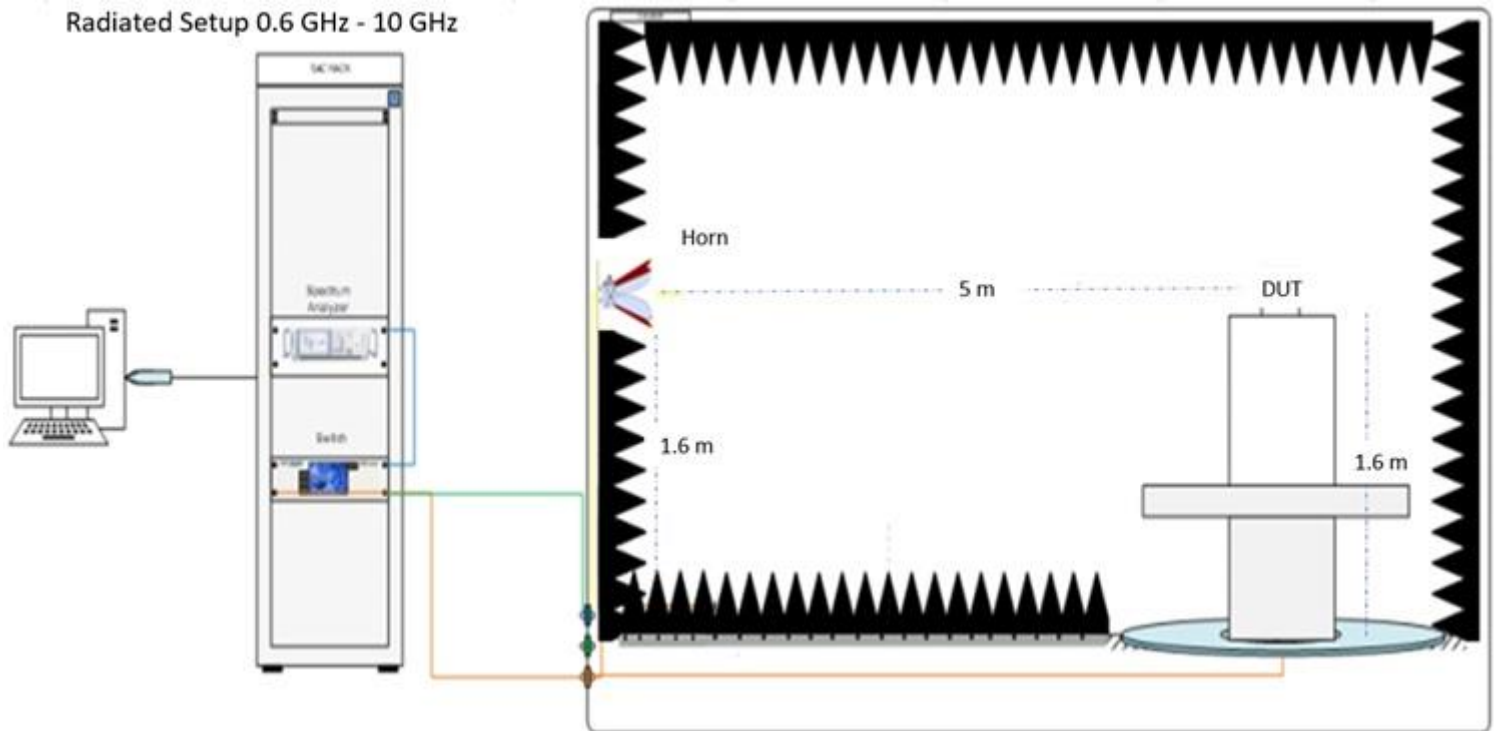

b. Equipment list

c.

Radiated Setup #1

ID#	Device	Type/Model	Serial #	Manufacturer	Cal. Date	Cal. Due Date
0135	Anechoic Chamber	FACT3	5720	ETS-Lindgren	2020-07-06	2022-01-07
0136	Turn Table	ETS	-	ETS-Lindgren	N/A	N/A
0147	Switch & Positioning systems	EMC Center	00159757	ETS-Lindgren	N/A	N/A
0530	Measurement SW	EMC32, v10.40.10	100623	Rohde & Schwarz	N/A	N/A
1033	Boresight antenna mast	BAM 4.0-P	P/278/2890.01	Maturo	N/A	N/A
1076	Spectrum Analyzer	FSW43	101847	Rohde & Schwarz	2020-11-02	2022-11-02
0993	Biconical antenna 30 MHz – 1 GHz	UBAA9115 BBVU9135 DGA9552N	+ + 0286 + CH 9044	Schwarzbeck	2019-11-22	2021-11-22
0325	Horn antenna	3117	00157734	ETS-Lindgren	2019-08-12	2021-08-12
0141	Horn Antenna + Amplifier + HPF6.4	3117	00157736	ETS-Lindgren	2020-04-02	2022-04-02
0334	Double-Ridged Waveguide Horn with Pre-Amplifier 18 GHz to 40 GHz	3116C+PA	00169308bis 00196308	+ ETS-Lindgren	2019-07-24	2021-07-24
0859	Cable 2.5m - 30MHz to 18GHz	0500990992500KE	19.23.395	Radiall	2020-11-27	2021-05-27
0206	Cable 1.2m – 18 to 40 GHz	UFA147A-0-0480- 200200	MFR 64639223720-003	Micro-coax	2020-08-25	2021-02-25
0263	Cable 1m - 1GHz to 18GHz	UFA147A	-	Utiliflex	2020-08-25	2021-02-25
0369	Cable 2m - 26.5GHz to 40GHz	794-9191-2000A	E00327	Atem	2020-08-25	2021-02-25
0371	Cable 1m – 30 MHz - 18GHz	UFB311A-0-0590- 50U50U	MFR 64639 223230-001	Micro-coax	2020-08-25	2021-02-25
1099	Cable 7m DC-18 GHz	0501051057000GX	19.35.850	Radiall	2020-11-27	2021-05-27
0809	Cable 7m - 18GHz to 40GHz	R286304009	-	Radiall	2020-08-25	2021-02-25
1098	Cable 1.5m - DC-18GHz	CBL-1.5M-SMSM+	202879	Mini-Circuits	2020-11-27	2021-05-27
0797	Temp & Humidity Logger	RA12E-TH1-RAS	RA12-D0EB1A	Avtech	2019-07-04	2021-07-04

N/A: Not Applicable

3. Setup photo



Antenna Information


Section 1. Antenna Assembly Specifications

1A	1B	1C	1D		1E	1F	1G	1H
Antenna Part Number	Manufacturer	Antenna Type	Cable Assembly Part Number and Information	Freq Range MHz	* Peak Gain W/ Cable loss (dBi)	Peak Gain w/o Cable Loss (dBi)	Max VSWR	Cable Loss (dB)
Customer P/N :025.9026Y.0011 (AWAN P/N:AYF5Y-100009) Main Antenna	AWAN	PIFA	1)Cable P/N: GBE/Shen-Yu/YFC/KAIBO 2) 50 ohm LL OD 0.81 coaxial cable 3) Length: 350 mm 4) Connector P/N: I-pex NGFF: 20572-001R-08	2400-2483.5	0.40	1.63	3.00	1.23
				5150-5250	1.39	3.24	3.00	1.85
				5250-5350	1.67	3.55	3.00	1.88
				5470-5725	0.35	2.32	3.00	1.97
				5725-5850	1.27	3.27	3.00	2.00
				5850-5895	1.62	3.68	3.00	2.06
				5925-6425	1.41	3.54	3.00	2.13
				6425-6525	-1.06	1.09	3.00	2.15
				6525-6875	-1.94	0.29	3.00	2.23
	AWAN	PIFA	1)Cable P/N: GBE/Shen-Yu/YFC/KAIBO 2) 50 ohm LL OD 0.81 coaxial cable 3) Length: 502 mm 4) Connector P/N: I-pex NGFF: 20572-001R-08	6875-7125	-1.56	0.72	3.00	2.28
				2400-2483.5	-0.45	1.32	3.00	1.77
				5150-5250	-0.73	1.92	3.00	2.65
				5250-5350	-0.48	2.22	3.00	2.70
				5470-5725	0.22	3.04	3.00	2.82
				5725-5850	-0.25	2.62	3.00	2.87
				5850-5895	-0.82	2.13	3.00	2.95
				5925-6425	0.00	3.05	3.00	3.05
				6425-6525	-0.18	2.91	3.00	3.09
Customer P/N : 025.9026Z.0011 (AWAN P/N:AYF5Y-100010) Aux Antenna	AWAN	PIFA	1)Cable P/N: GBE/Shen-Yu/YFC/KAIBO 2) 50 ohm LL OD 0.81 coaxial cable 3) Length: 502 mm 4) Connector P/N: I-pex NGFF: 20572-001R-08	6525-6875	-0.59	2.60	3.00	3.19
				6875-7125	-0.82	2.45	3.00	3.27





- 3D Antenna Peak Gain required being test in system basis.

Section 2. Dimensioned Photos and Drawings of Antennas


Main Antenna Drawing:

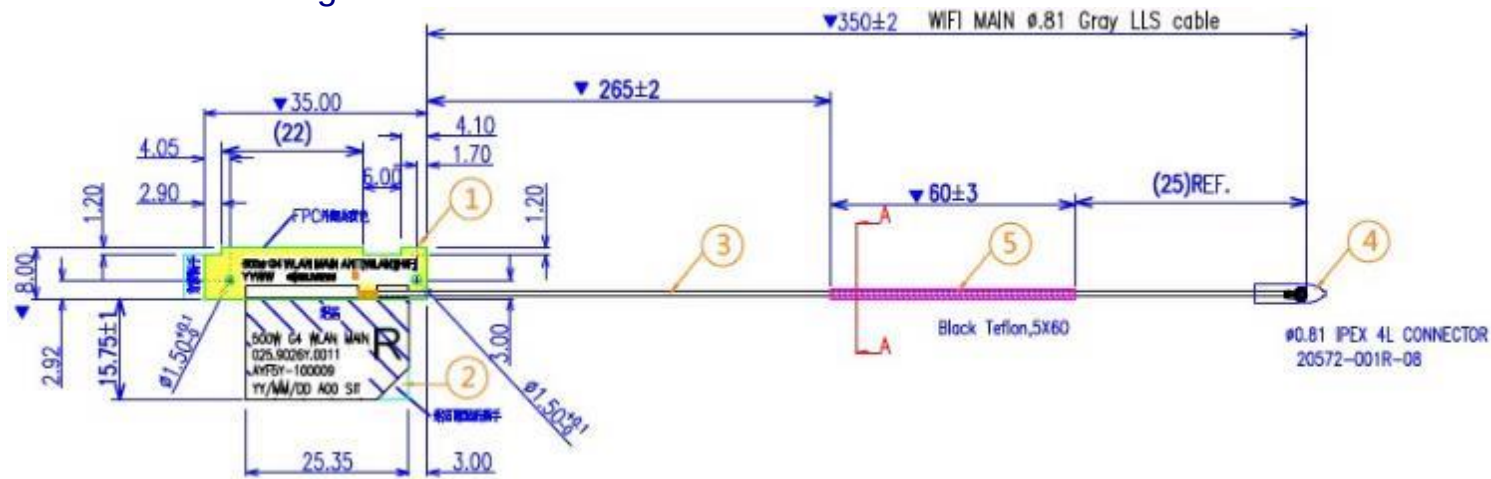


Main Antenna Photo:

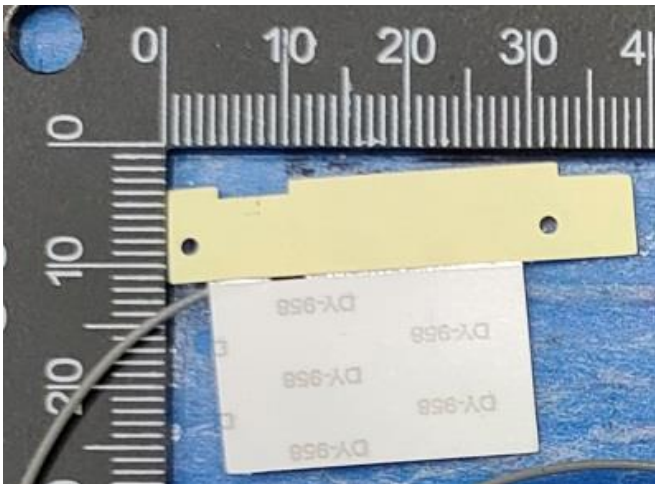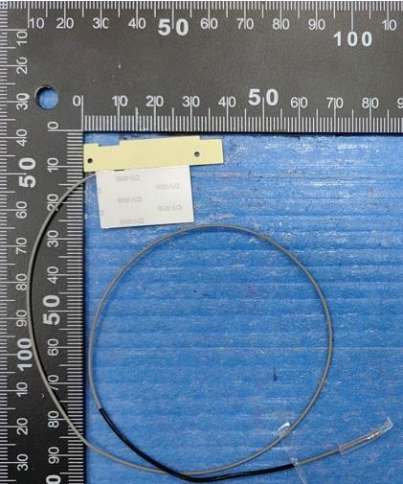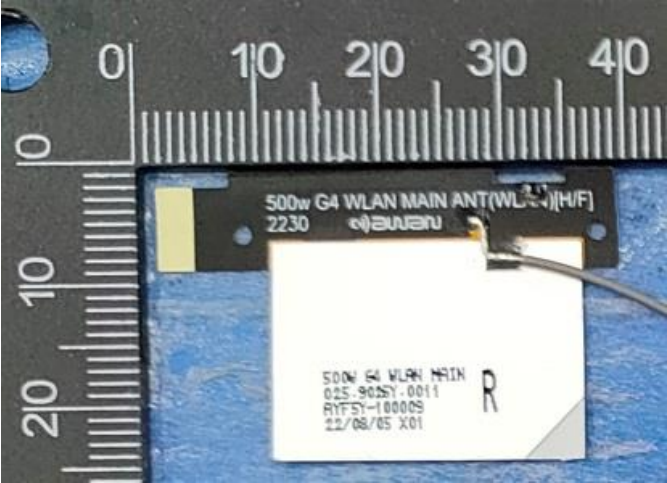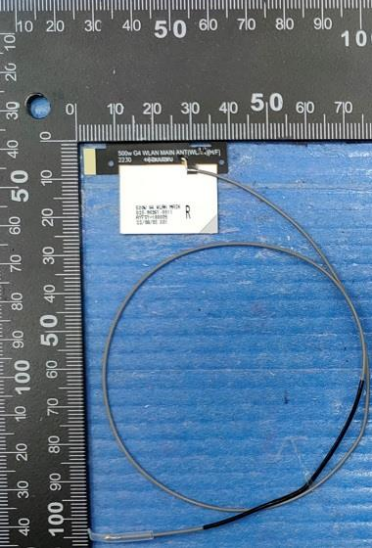

Aux Antenna Drawing:

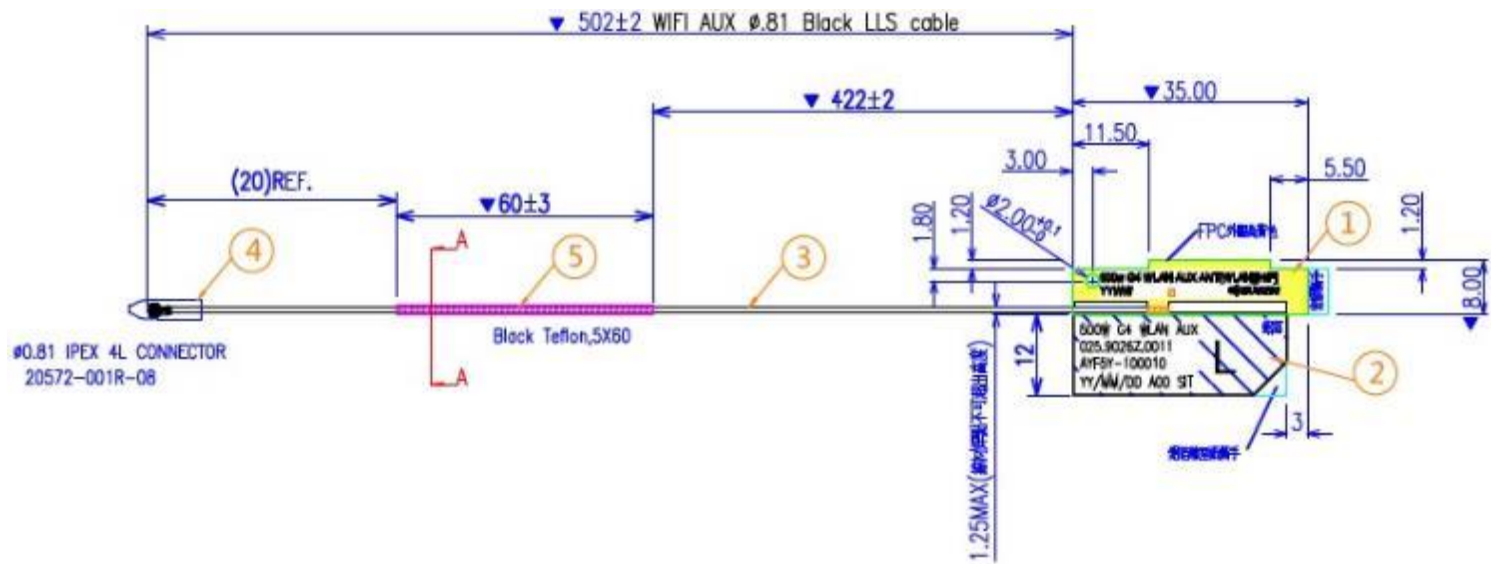

Aux Antenna Photo:

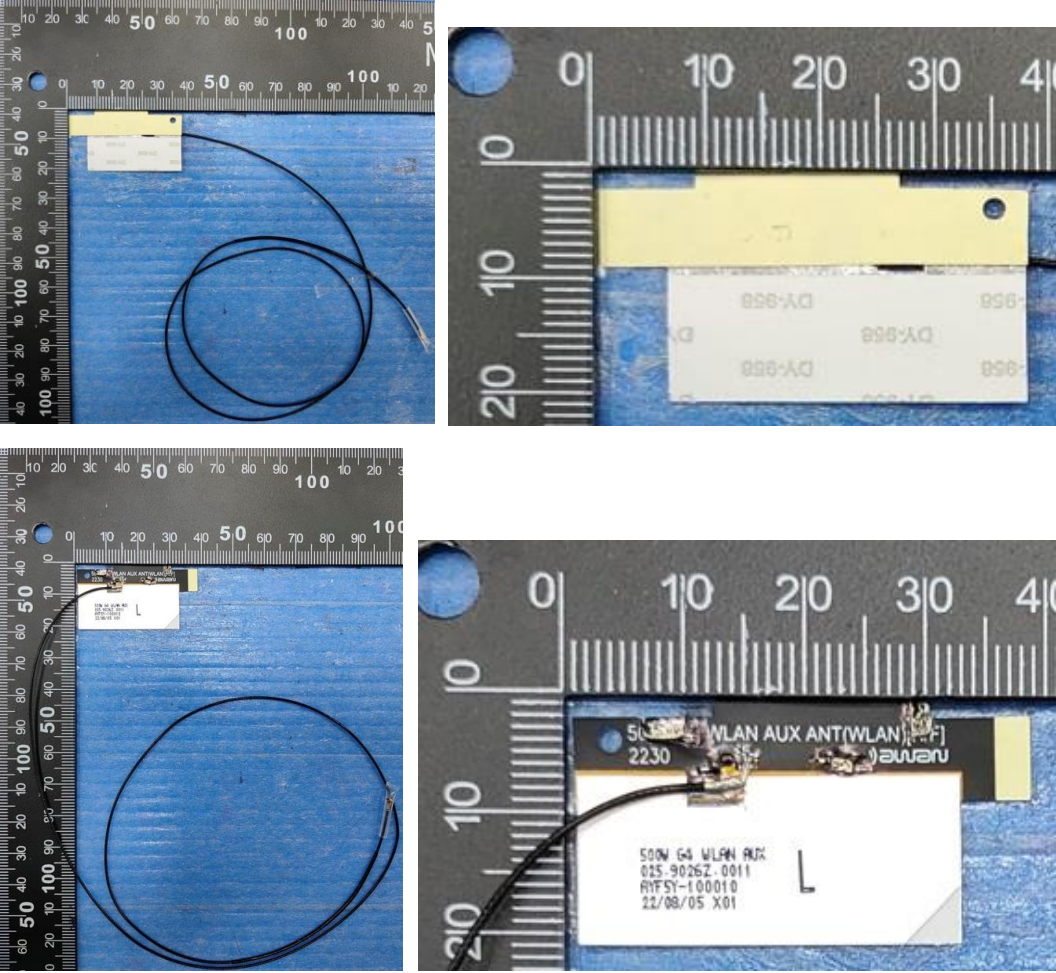


Section 3. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.40

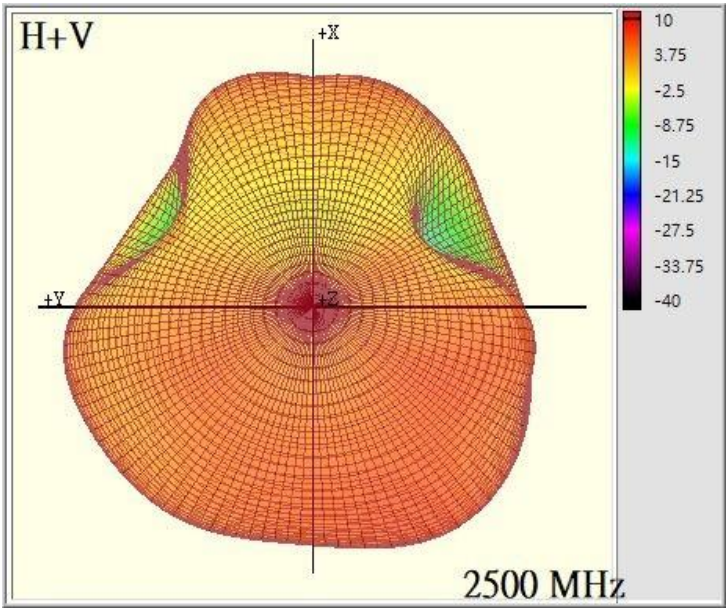


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.39

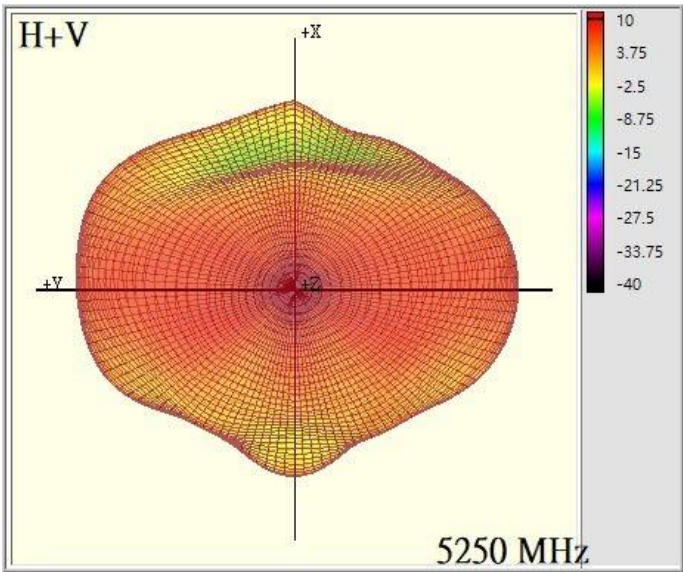


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.67

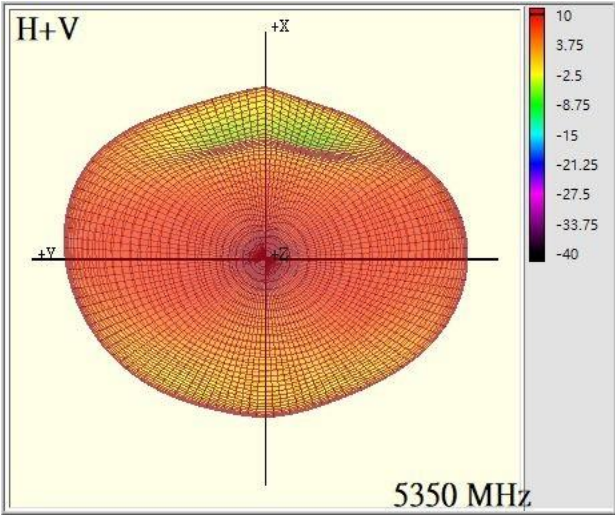


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.35

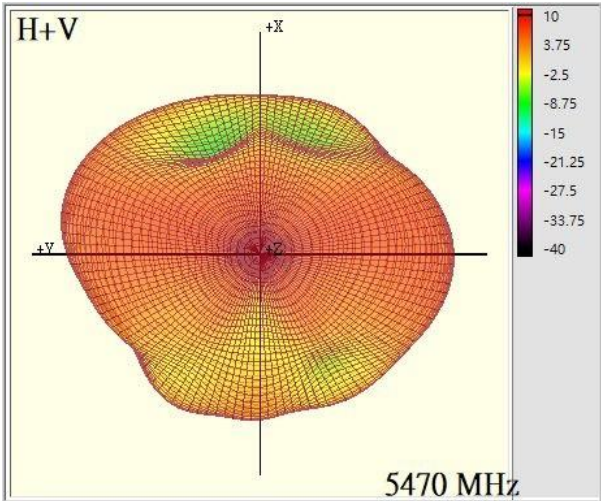


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.27

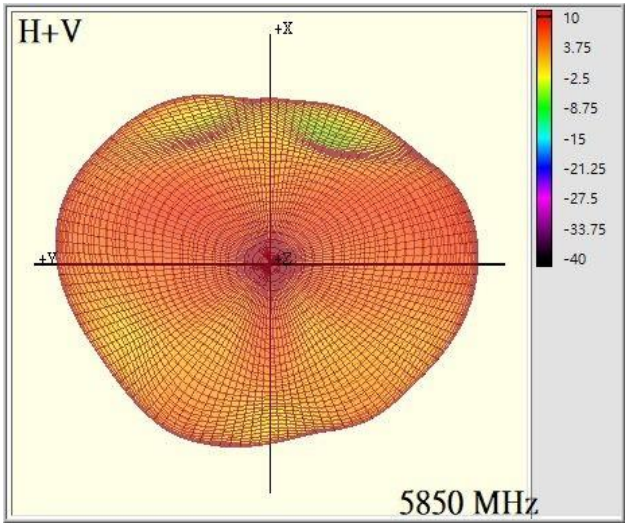


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.62

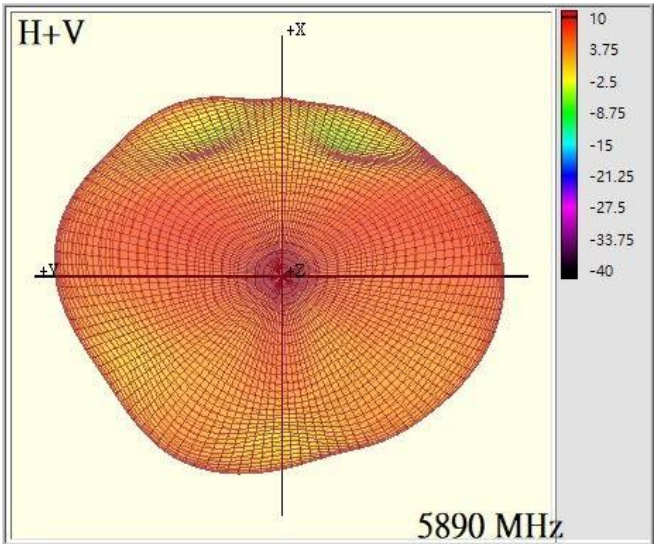


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	1.41

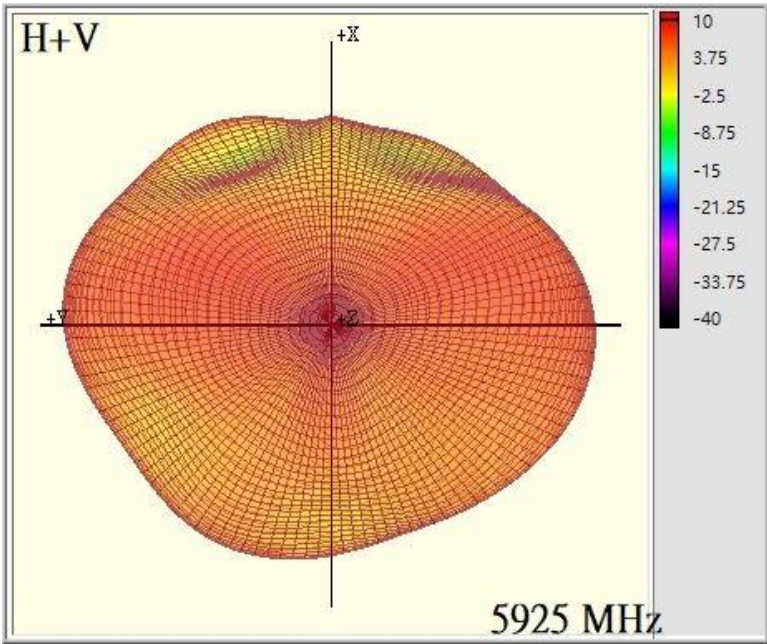


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	-1.06

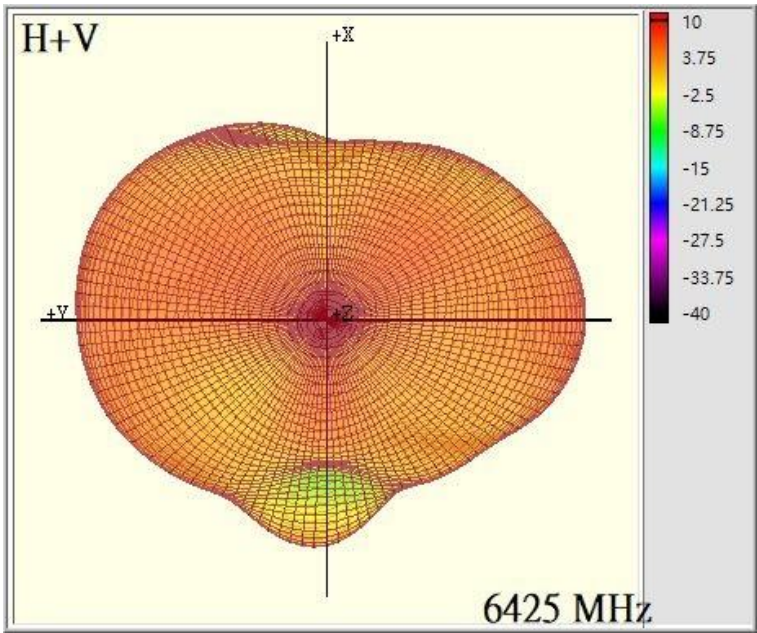


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	-1.94

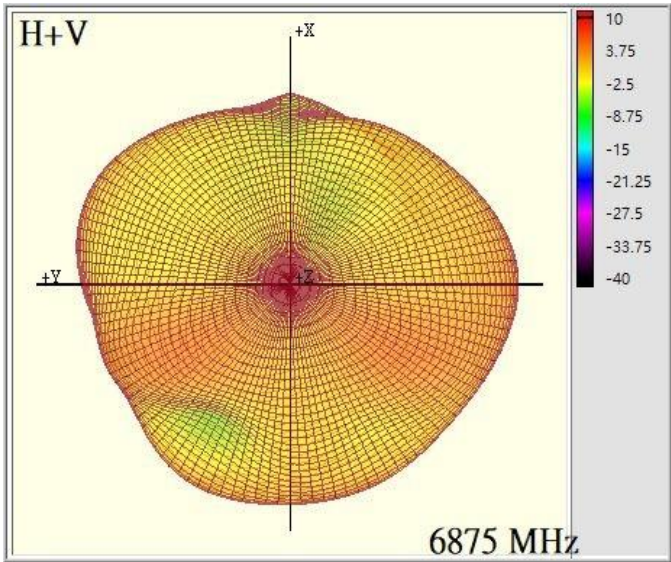

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-1.56

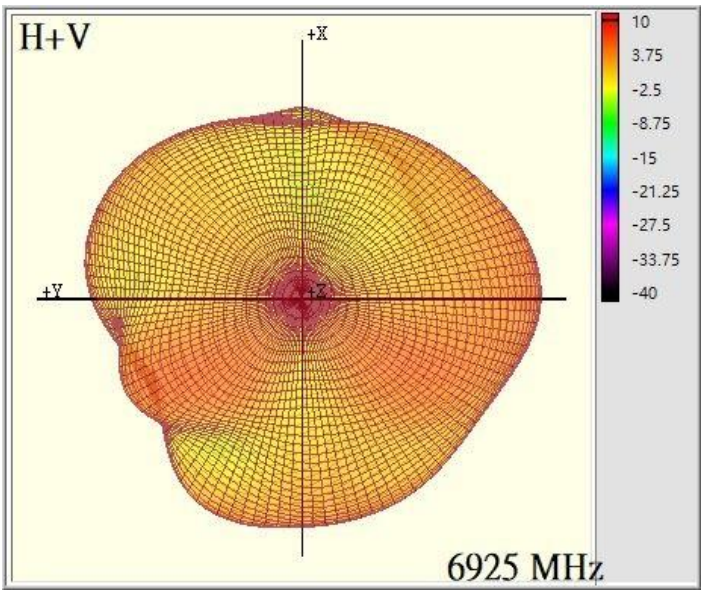

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	-0.45

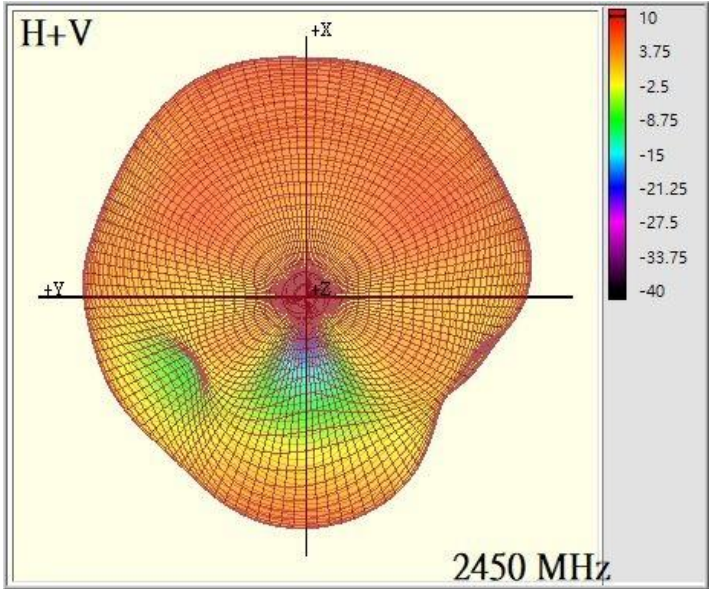


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	-0.73

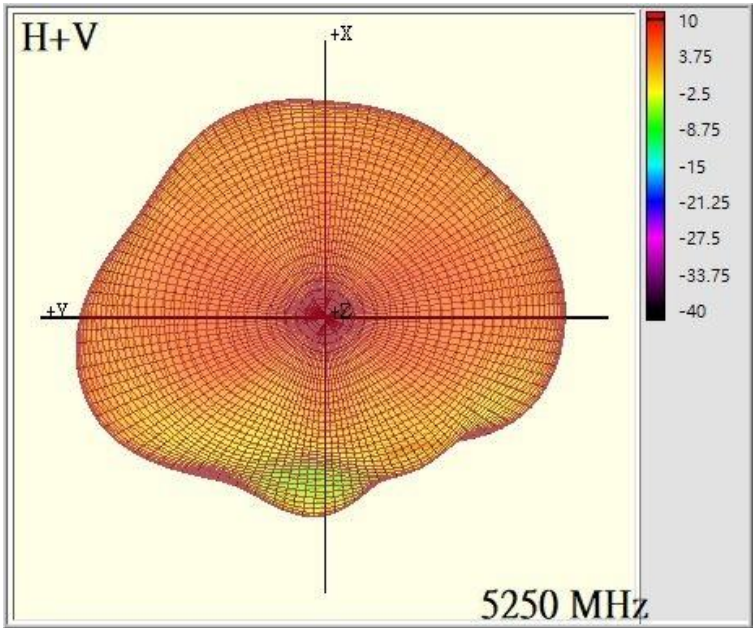


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	-0.48

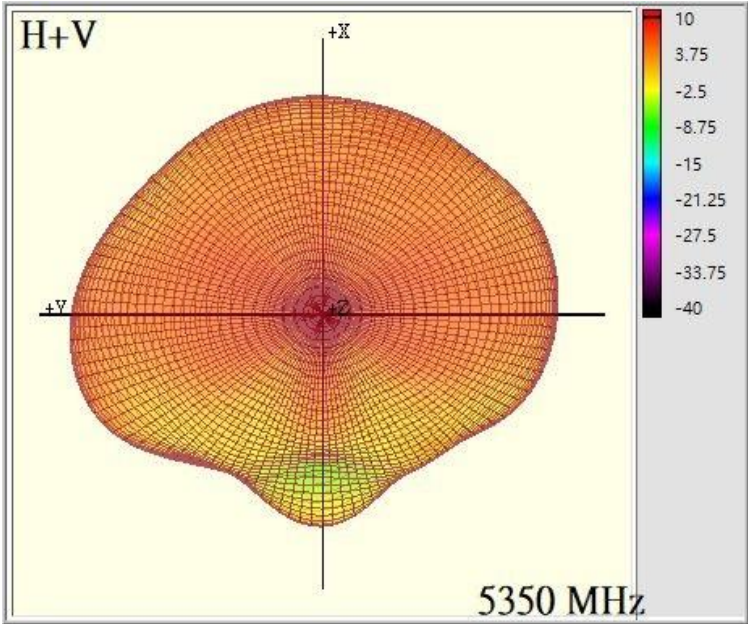


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	0.22

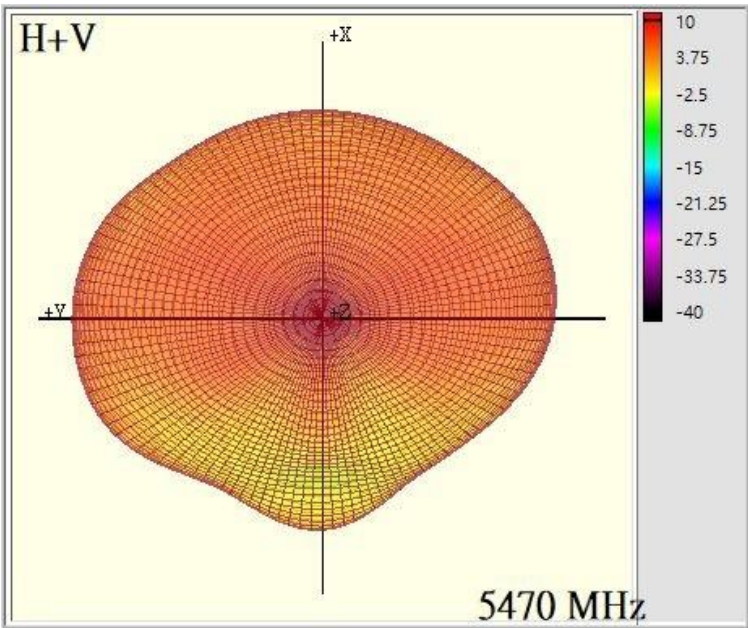


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	-0.25

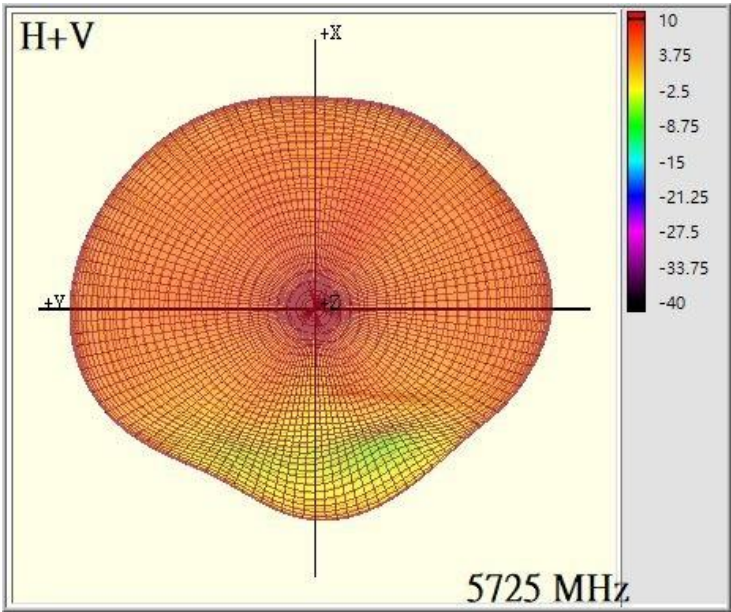


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	-0.82

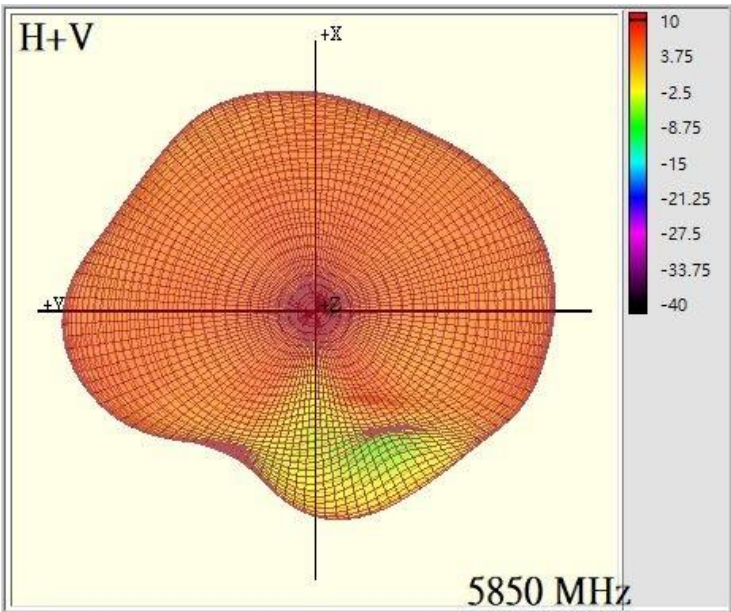


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	0.00

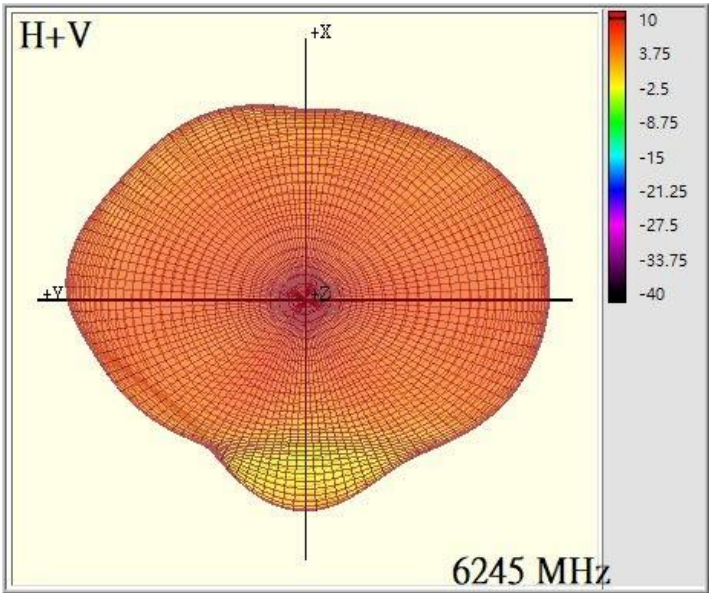


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	-0.18

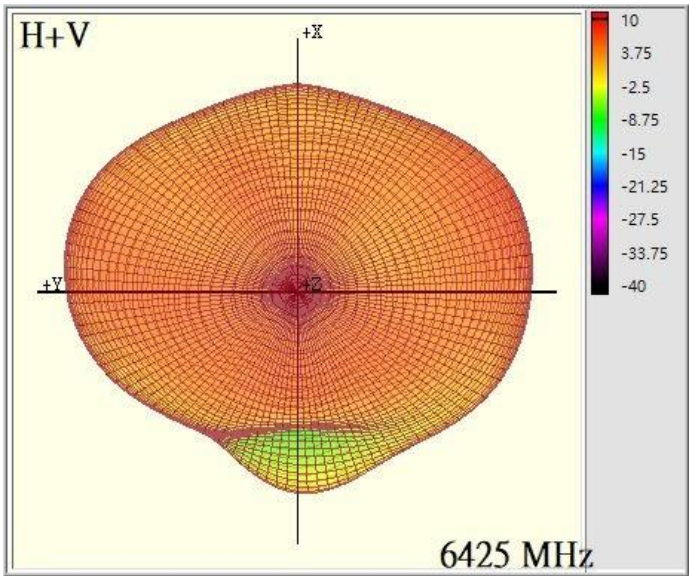


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	-0.59

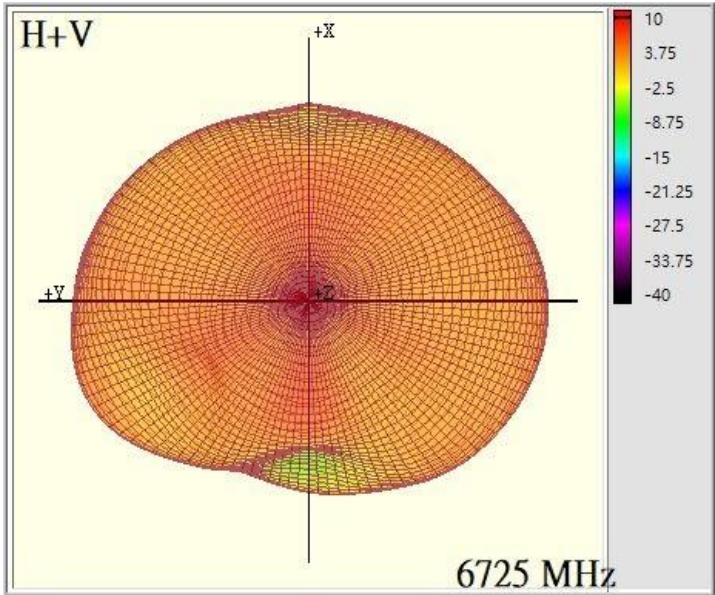


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	-0.82

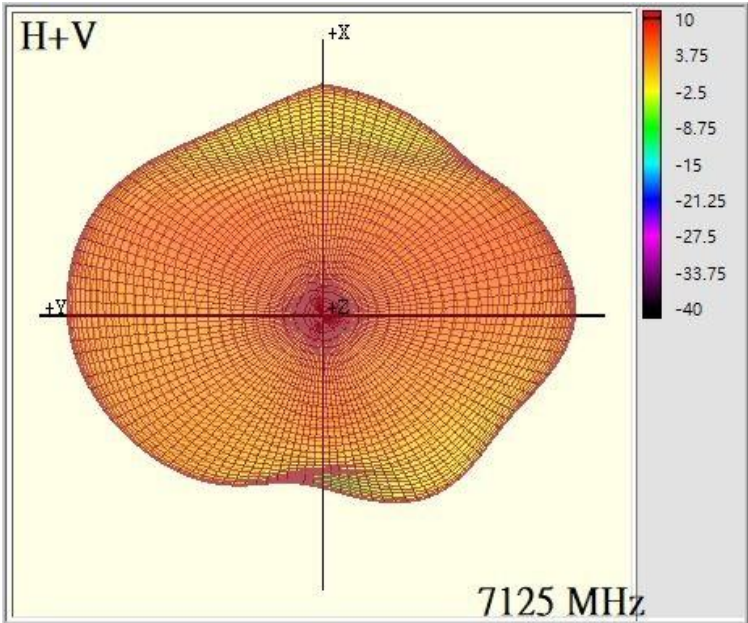


Section 4. Antenna Host Platform Location Information

Laptop mode:

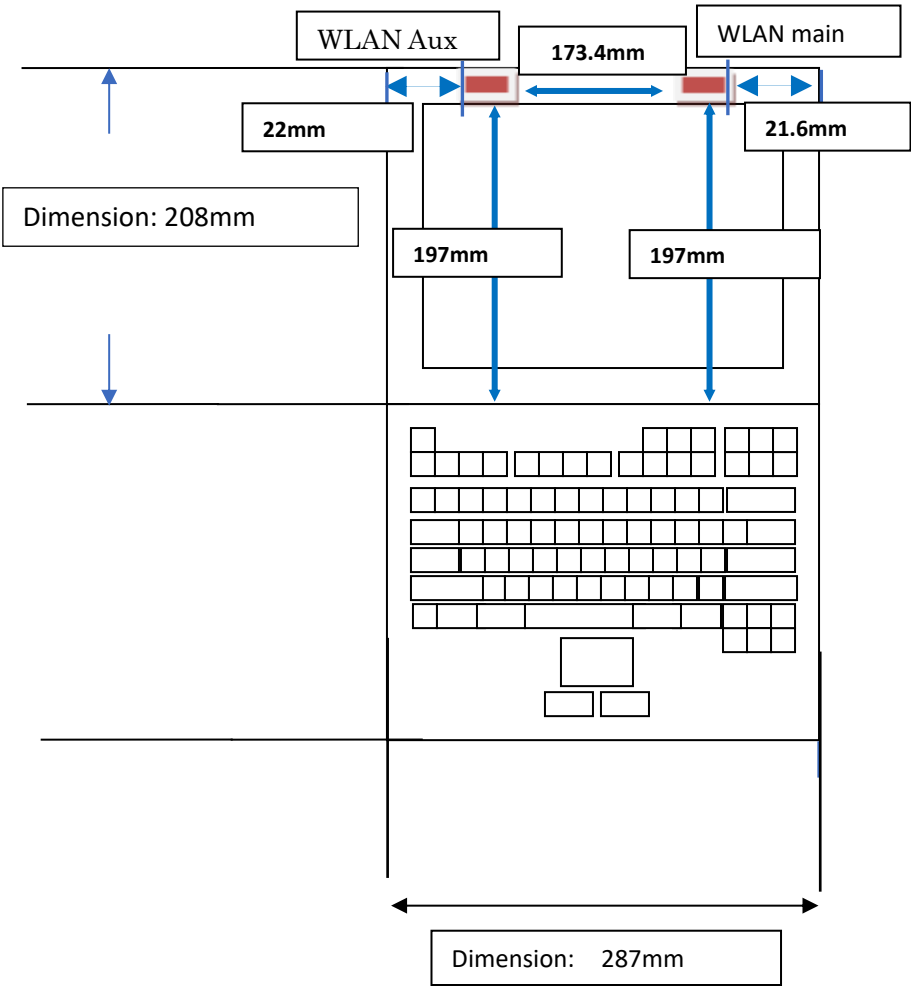


Tablet mode:

WLAN Main Tx1

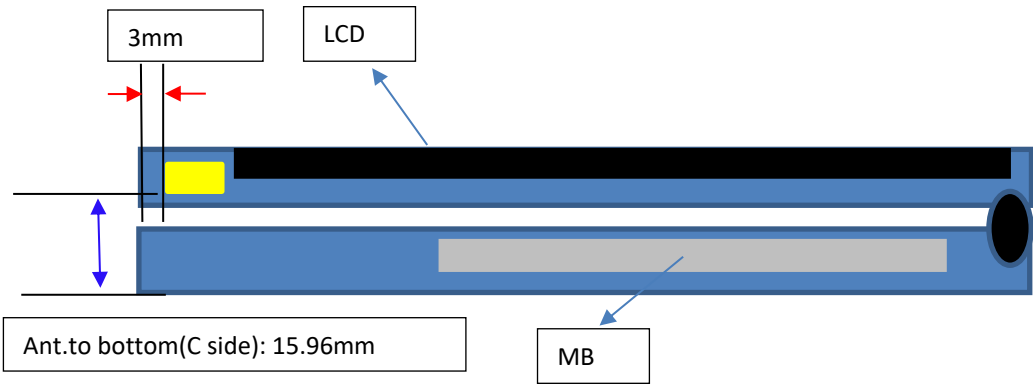


WLAN Aux Tx1

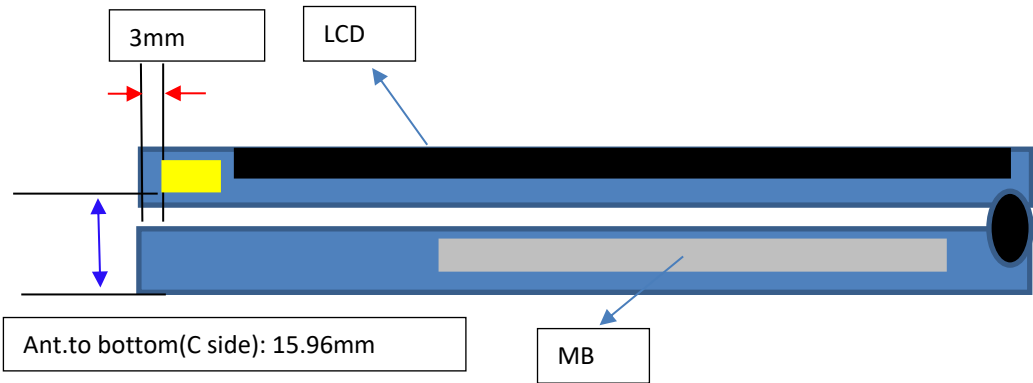


Section 5. Antenna dimensional information for SAR evaluation

Laptop mode:

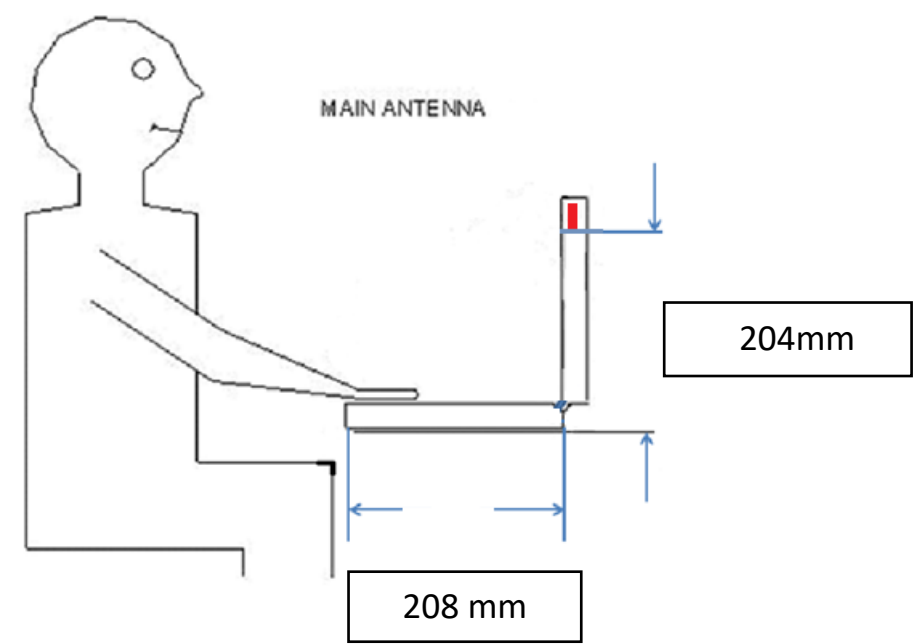

Tablet model:

WLAN Main Tx1

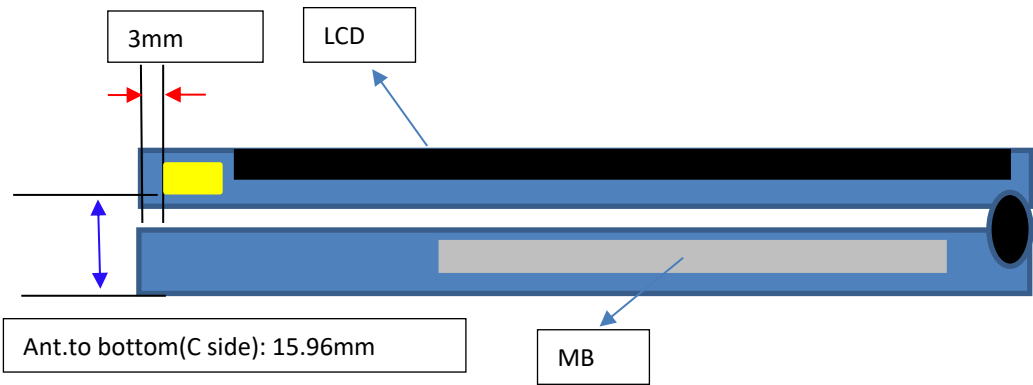

WLAN Aux Tx1

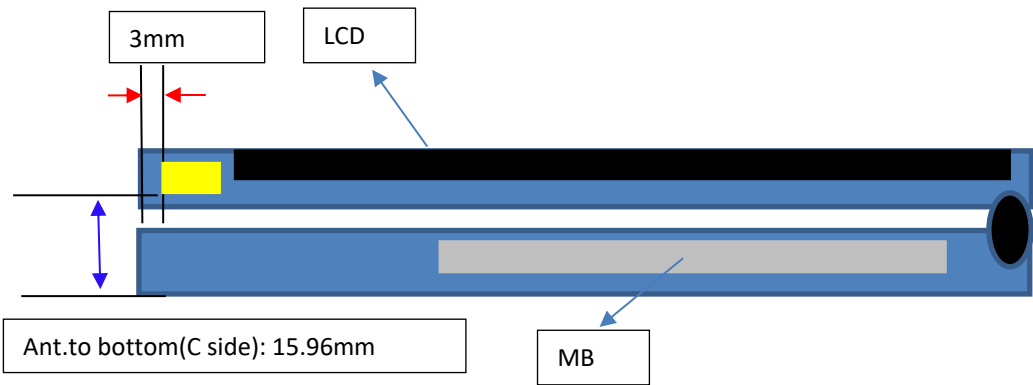


Figure-3:
Tablet PL (Primary Landscape)

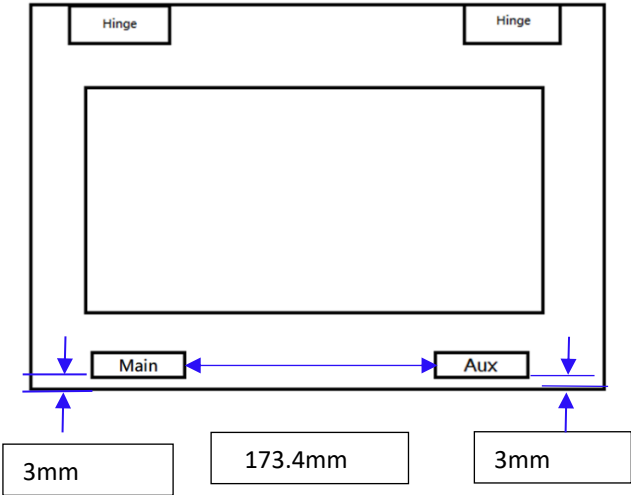


Figure-4:
Tablet PP (Primary Portrait)

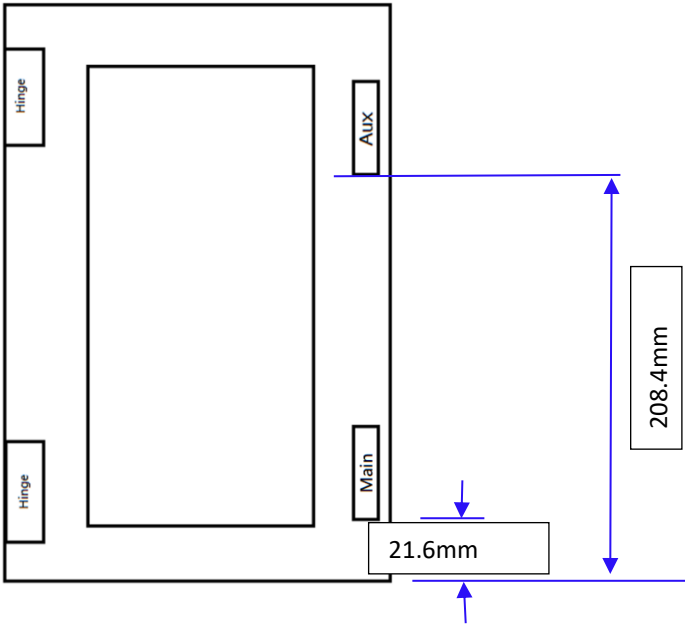


Figure-5:
Tablet SL (Secondary Landscape)


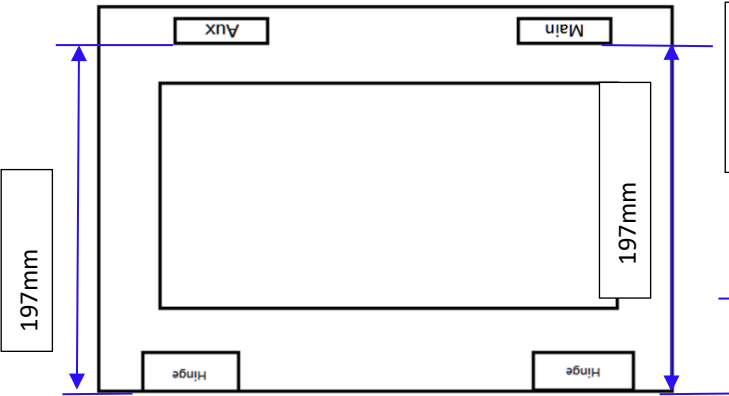


Figure-6:
Tablet SP (Secondary Portrait)

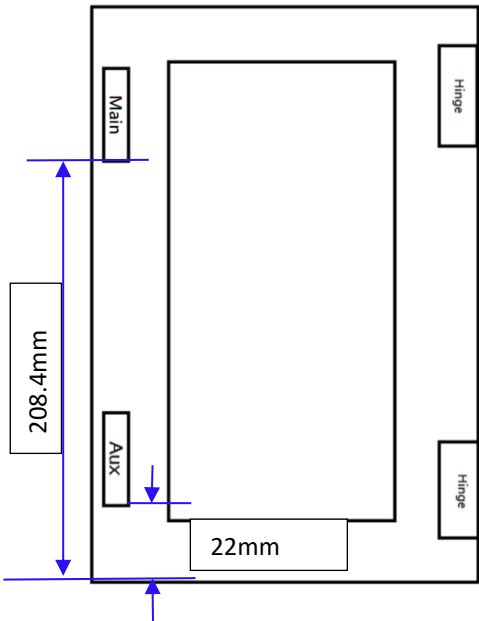

Section 6. Diagram Example of Co-Location Antenna Separation

Laptop mode:


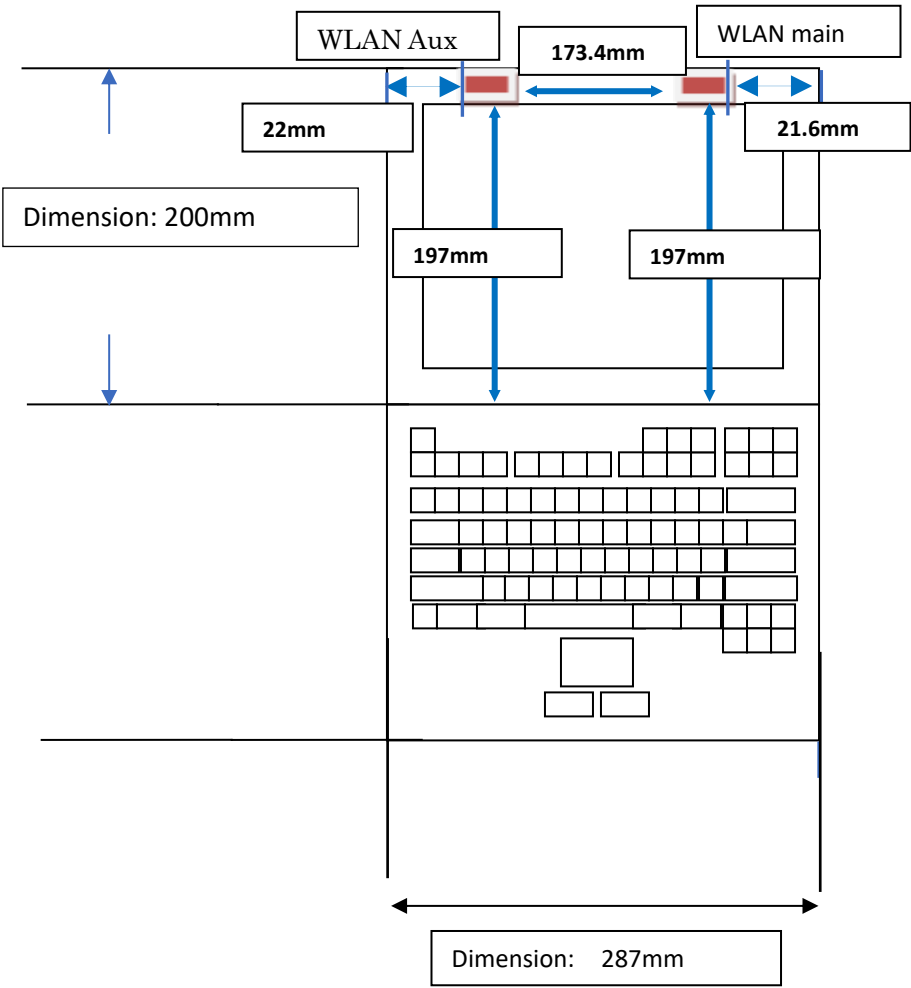


Figure-1: Tablet mode

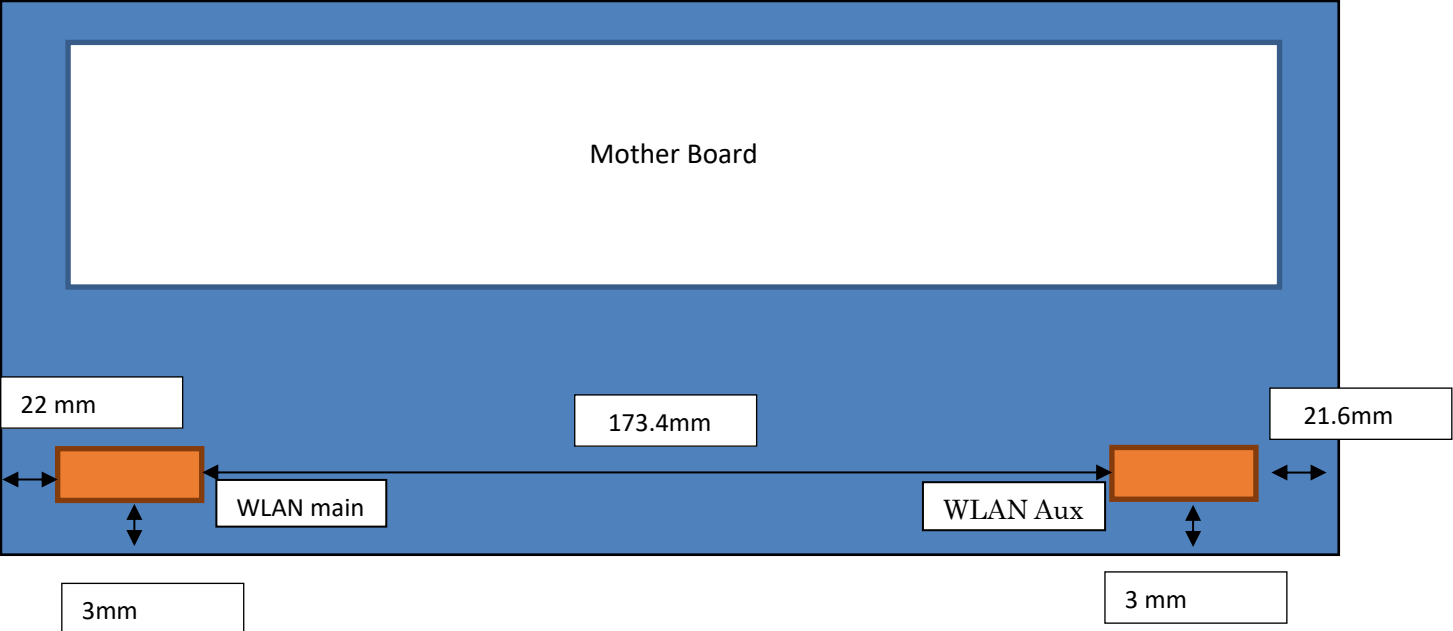

Revision History

Revision	Description	Date
10.3	<u>Page2-5</u> Add Applicable test method, Test & System Description and Setup photo	July 24, 2022
10.4	<u>Cover page</u> Add Intel 5.9GHz reference antenna gain <u>Cover page/Section1/Section3</u> Add 5.9GHz antenna gain information	September 15, 2022