

Regulatory WLAN Antenna Information (Template)

English Language Required for Intel Regulatory Review / Approval

(OEM/ODM or antenna vendor is required to complete this document with platform antenna information.

Remove Intel references and make this your own document)

Platform information										
Brand		ODM		****End product model name		Intel platform (ex: Yes, No or NA)		Platform type (ex: regular NB, convertible PC, AIO...etc)		*SAR minimum separation (mm)
Dell		Compal		P112F		Yes		Regular NB		11.89 mm
*****Please fill in exact product model name and make sure the model name is visible on product cover or any parts for end users recognize for authority inspection.										
Antenna information										
Vendor			Type			Antenna Part number (Main)		Antenna Part number (Aux)		
Hong Bo Co., Ltd..			PIFA			Antenna P/N:		Antenna P/N:		
						260-24388		260-24389		
						Compal P/N: DC33002N20L		Compal P/N: DC33002N21L		
Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz	
Main	2.983	2.618	2.526	2.901	2.925	NA	NA	NA	NA	
Aux	2.489	2.441	2.441	2.492	1.899	NA	NA	NA	NA	
Intel Reference Gain/Type/ Separation distance										
Antenna Type	Antenna Peak gain (In dBi)*									Distance to the end user (mm)
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0GHz 6875-7125MHz	Generic: refer to modular FCC SAR report Mid-power: ≥ 8 mm Low power: ≥ 5 mm
	Design	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	
	PIFA	3.24	3.64	3.73	4.77	4.97	4.83	4.30	5.37	
Dipole	2.89	2.92	3.19	4.41	4.22	4.83	4.30	4.49	5.34	
Notes (marked with *)										
* SAR minimum separation (mm)										
- Regular NB: Minimum antenna-to-body (from antenna bottom to the bottom of the device)										
- Tablet / Convertible PC: Minimum antenna-to-edge (5 sides of the device)										
- Mini-tablet: Minimum antenna-to-edge (6 sides of the device)										
* 3D Peak Antenna gain should be equal or greater than -2 dBi										
- If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.										

Table of contents

1. Applicable test method
2. Test & System Description
 - a. Test setup
 - b. Equipment list
3. Setup photo

[Section 1. Antenna Assembly Specifications](#)

[Section 2. Dimensioned Photos or Drawings of Antennas](#)

[Section 3. Radiation characteristics of antenna loaded in Host Platform](#)

[Section 4. Antenna Host Platform Location Information](#)

[Section 5. Antenna dimensional information for SAR evaluation](#)

[Section 6. Diagram Example of Co-Location Antenna Separation](#)


1. Applicable test methods

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

2. Test & System Description

a. Test setup

<insert test diagram here for test site utilized>

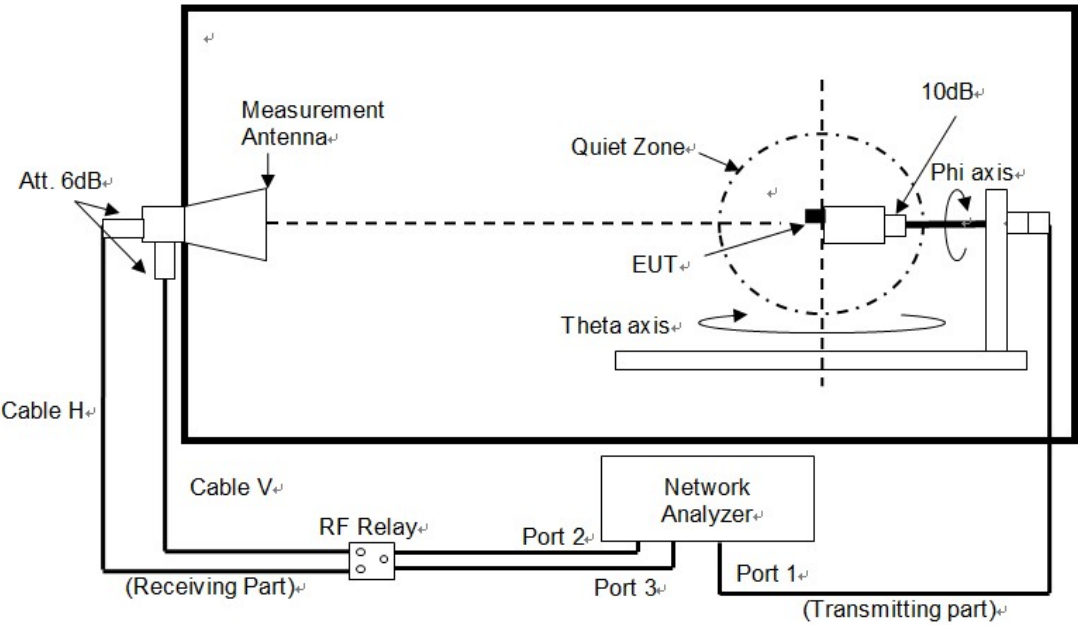

b. Equipment list

<insert test diagram here for test site utilized>

Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
ENA Series Network Analyzer	Keysight	E5071C	MY46900218	2022/8/4	2023/8/3
RF Switch	Keysight	3499A	N/A	N/A	N/A
Multi-Axis Positioner Controller	ETS-Lindgren	2090	N/A	N/A	N/A
Medium-Duty Positioner	ETS-Lindgren	2110	N/A	N/A	N/A
Measurement Horn Antenna	EMCO	3164-08	20241	N/A	N/A
Anechoic chamber	ETS-Lindgren	AMS-8500	N/A	2022/6/11	2023/6/10
Note:Chamber calibration included full set of implement					

Antenna Information


Section 1. Antenna Assembly Specifications

1A Antenna Part Number	1B Manufacturer	1C Antenna Type	1D Cable Assembly Part Number and Information	Freq Range MHz	1E * Peak Gain W/ Cable loss (dBi)	1F Peak Gain w/o Cable Loss (dBi)	1G Max VSWR	1H Cable Loss (dB)
P/N: DC33002N20L (260-24388) Main Antenna	Hong-BO Co., Ltd.	PIFA	50 ohm Coaxial length:288mm diameter: 1.13mm Connector: KangShuo (MHF)	2400-2483.5	2.983 dBi (peak)	3.615 dBi (peak)	3.00 max	0.632 dBi (peak)
				5150-5250	2.618 dBi (peak)	3.241 dBi (peak)	3.00 max	0.623 dBi (peak)
				5250-5350	2.526 dBi (peak)	3.651 dBi (peak)	3.00 max	1.125 dBi (peak)
				5470-5725	2.901 dBi (peak)	4.005 dBi (peak)	3.00 max	1.105 dBi (peak)
				5725-5850	2.925 dBi (peak)	4.059 dBi (peak)	3.00 max	1.134 dBi (peak)
				5925-6425	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6425-6525	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6525-6875	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6875-7125	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
P/N: DC33002N21L (260-24389) AUX Antenna	Hong-BO Co., Ltd.	PIFA	50 ohm Coaxial length:390mm diameter: 1.13mm Connector: KangShuo (MHF)	2400-2483.5	2.489 dBi (peak)	3.474 dBi (peak)	3.00 max	0.985 dBi (peak)
				5150-5250	2.441 dBi (peak)	3.752 dBi (peak)	3.00 max	1.311 dBi (peak)
				5250-5350	2.441 dBi (peak)	3.972 dBi (peak)	3.00 max	1.531 dBi (peak)
				5470-5725	2.492 dBi (peak)	4.130 dBi (peak)	3.00 max	1.637 dBi (peak)
				5725-5850	1.899 dBi (peak)	3.580 dBi (peak)	3.00 max	1.680 dBi (peak)
				5925-6425	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6425-6525	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6525-6875	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)
				6875-7125	0.000 dBi (peak)	0.000 dBi (peak)	0.00 max	0.000 dBi (peak)

- 3D Antenna Peak Gain required being test in system basis.


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.983

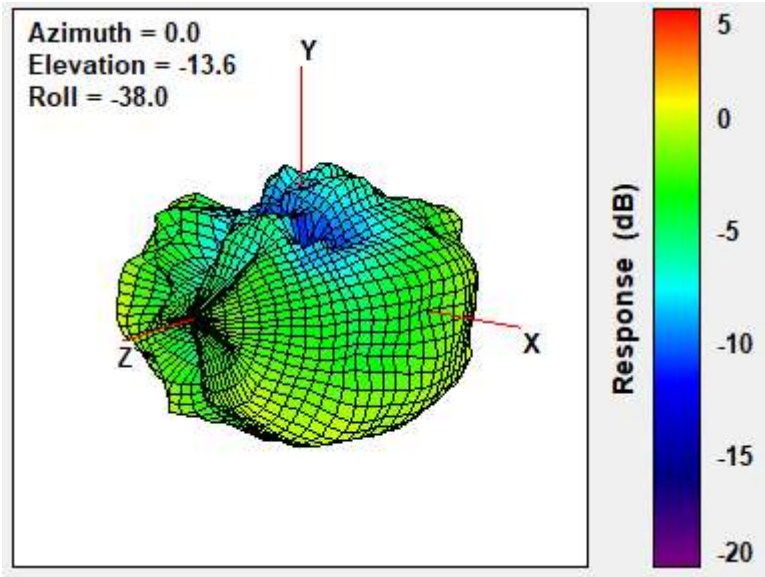


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.618

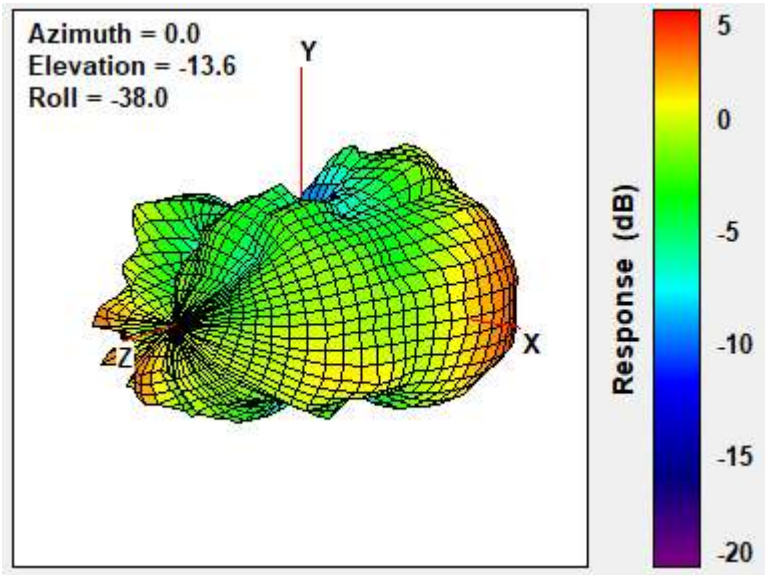


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.526

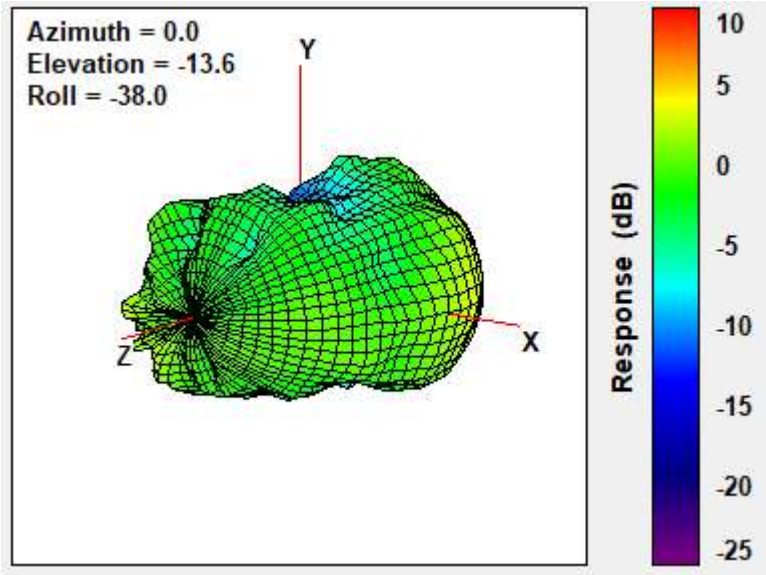


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.901

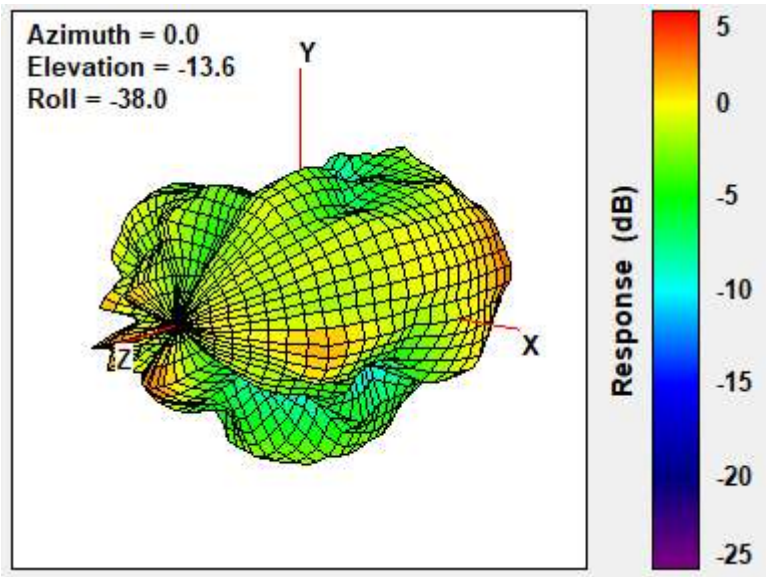

Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	2.925

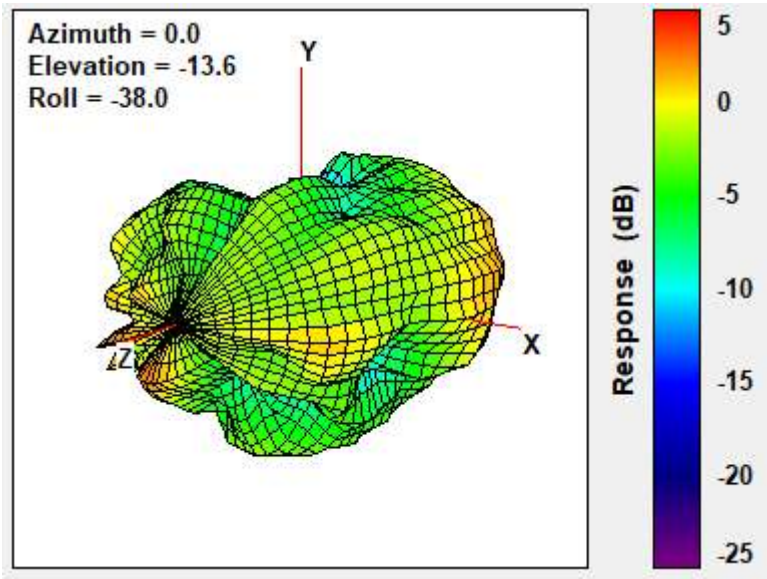

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.489

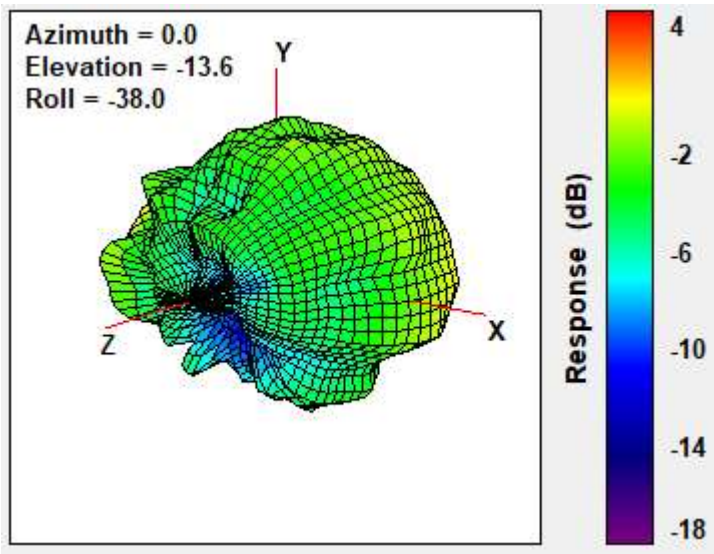


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.441

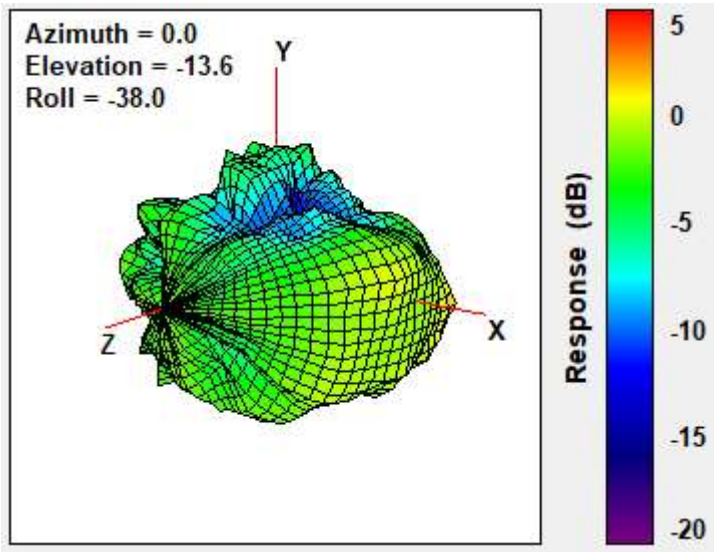


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.441

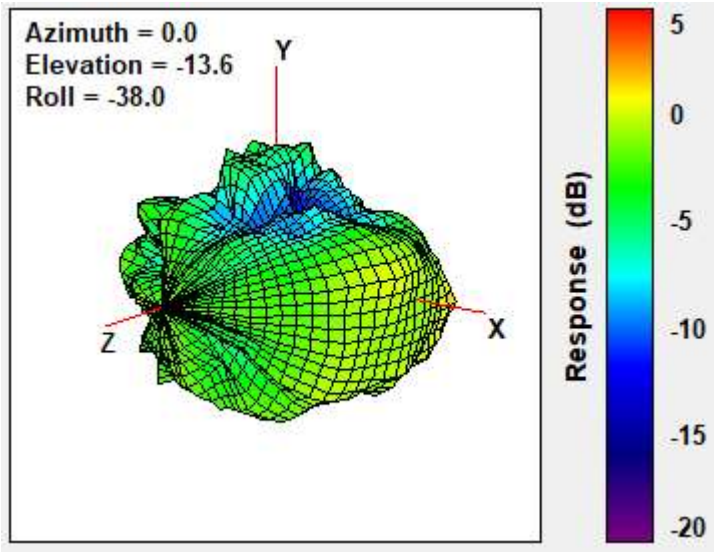


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.492

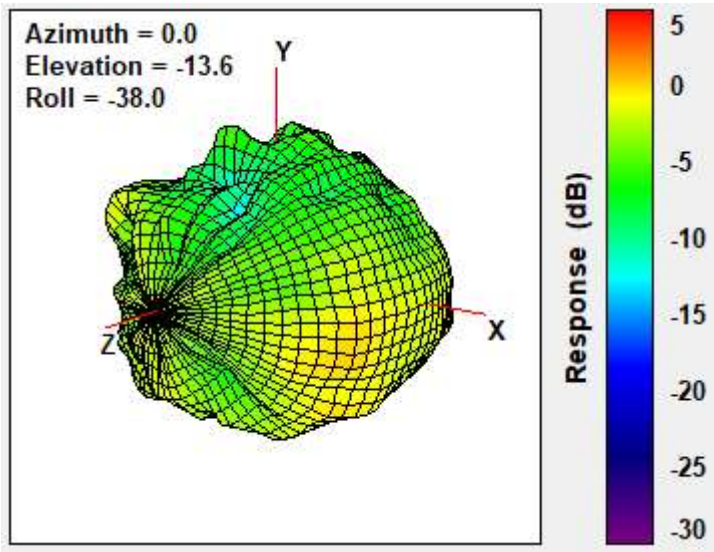

Max Antenna 3D Radiation Pattern 5725-5850 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.899

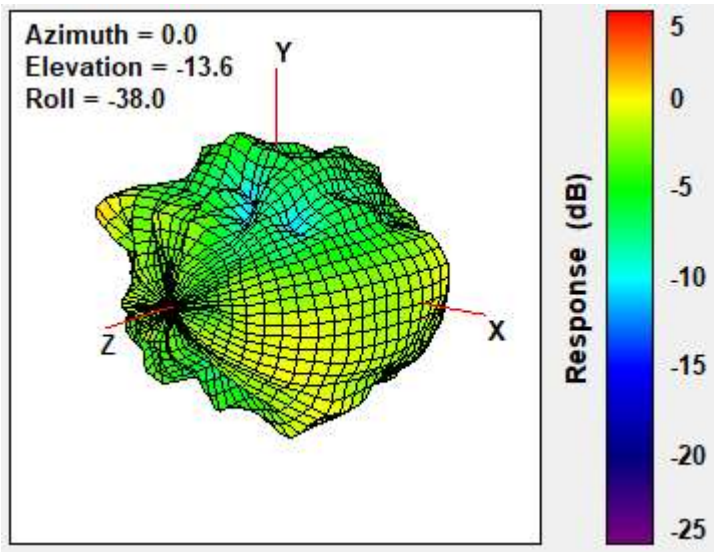

Section 4. Antenna Host Platform Location Information


Include a **dimensioned photo(s) or dimensioned drawing(s)** of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

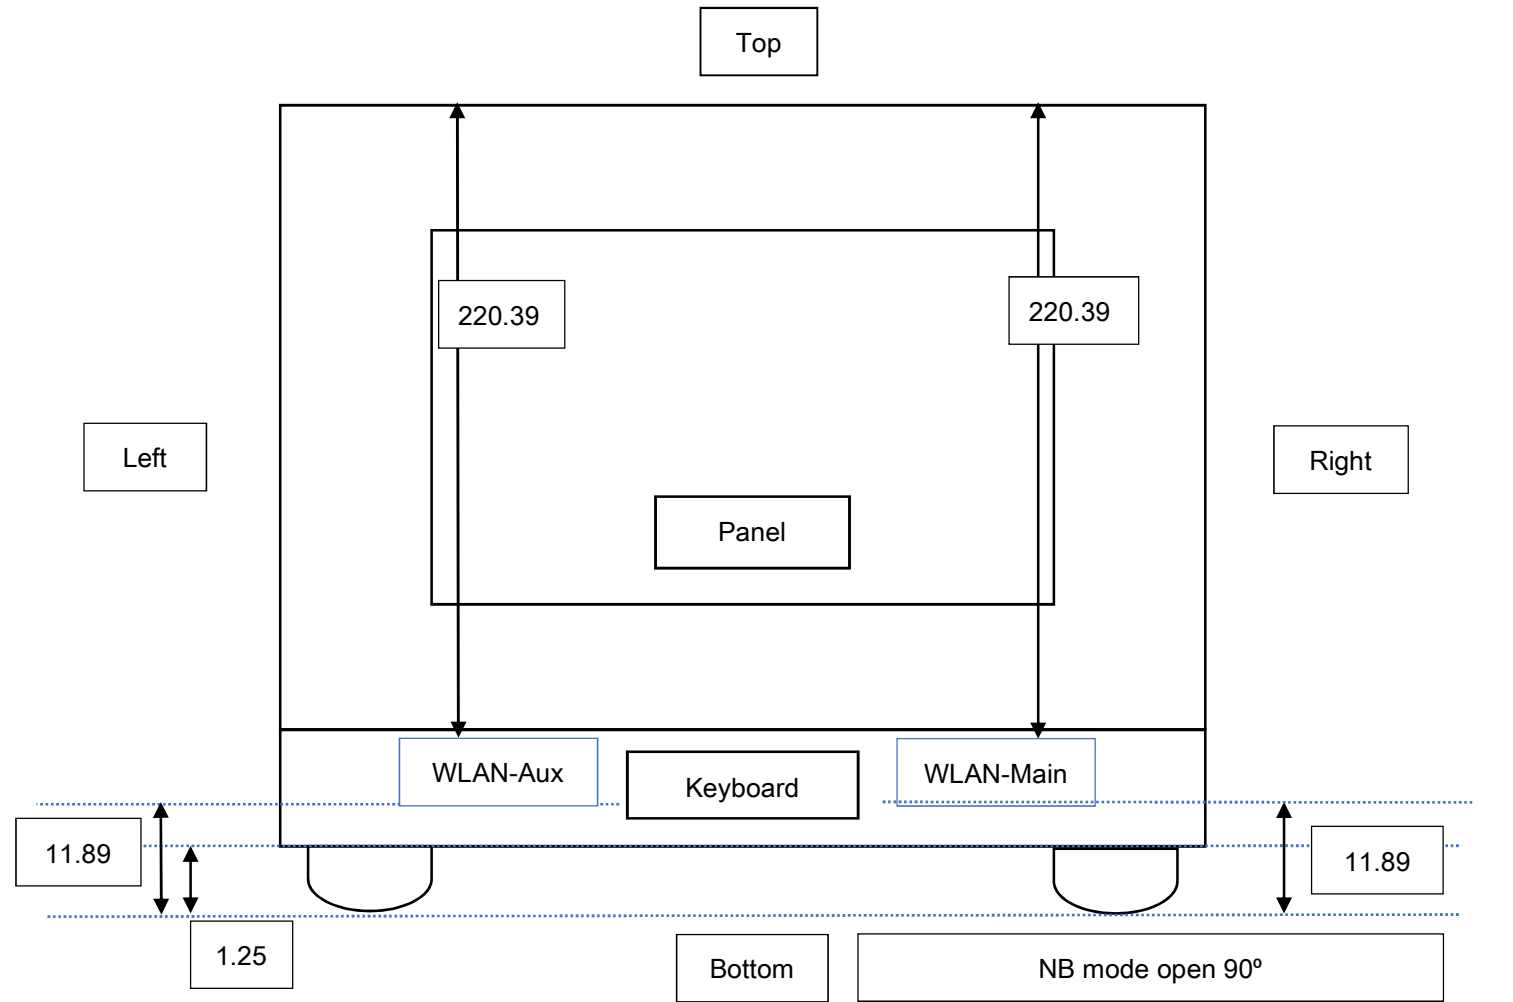

Section 5. Antenna dimensional information for SAR evaluation

Include a **dimensioned photo(s) or dimensioned drawing(s)** showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

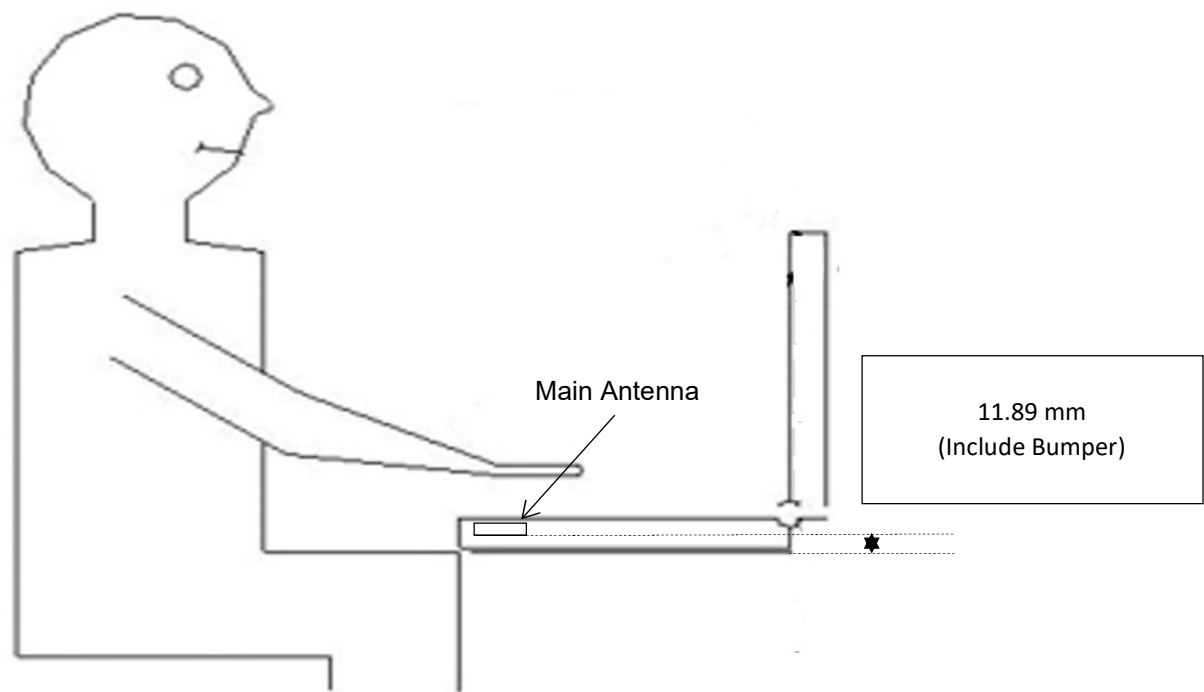

Section 6. Diagram Example of Co-Location Antenna Separation

Include a **dimensioned photo or dimensioned drawing** showing the distance (mm) between all WLAN transmit antennas and other co-located radiator transmit antenna such as Bluetooth, WWAN,..

(Note: Due to the evolving rules regarding co-location, each platform will need to be reviewed on a case by case basis)

