



6.10.2 Test setup


Below 1GHz:

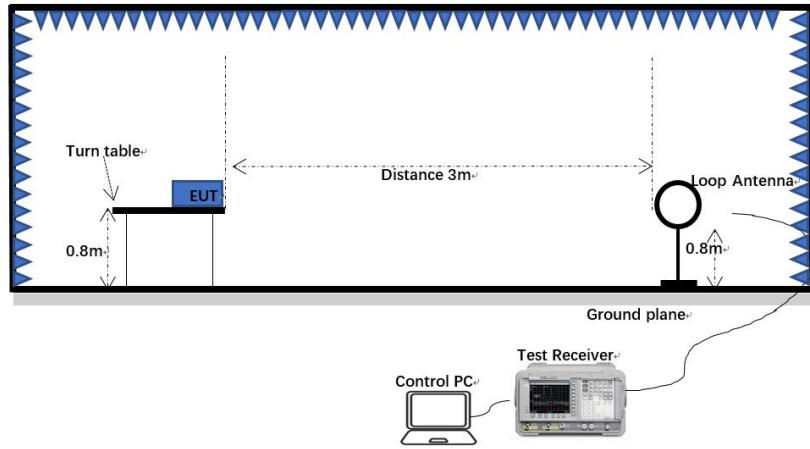

30MHz-1GHz:

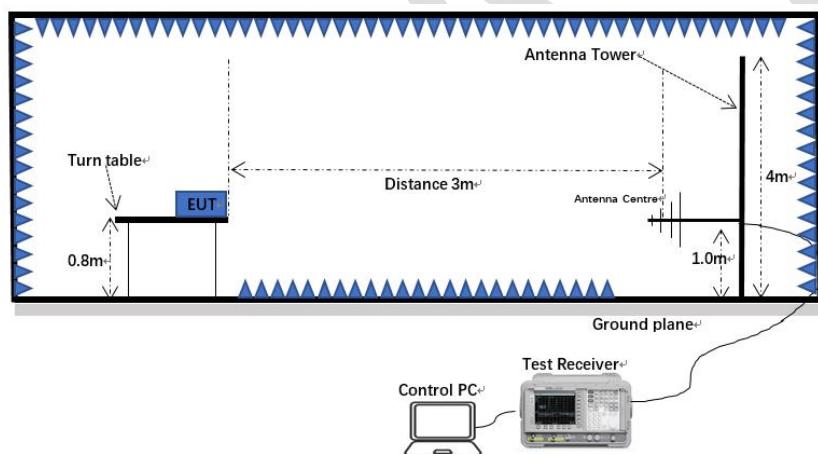

Above 1GHz:

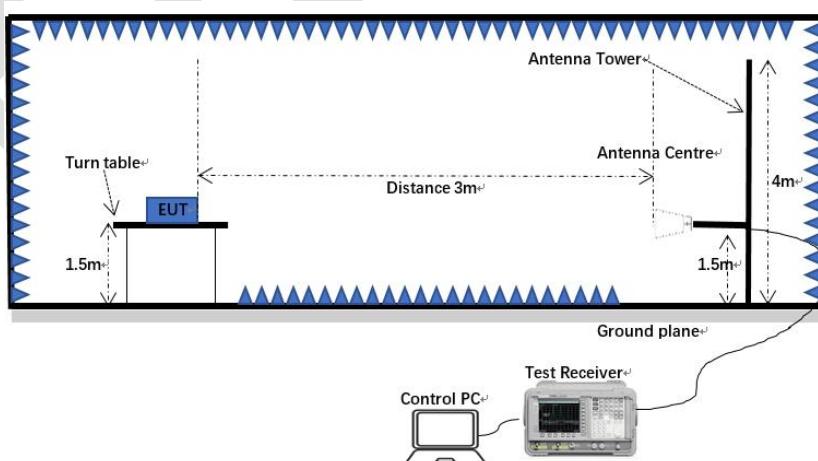

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.


Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data


Below 1GHz

[Test mode: TX]; [Polarity: Horizontal]

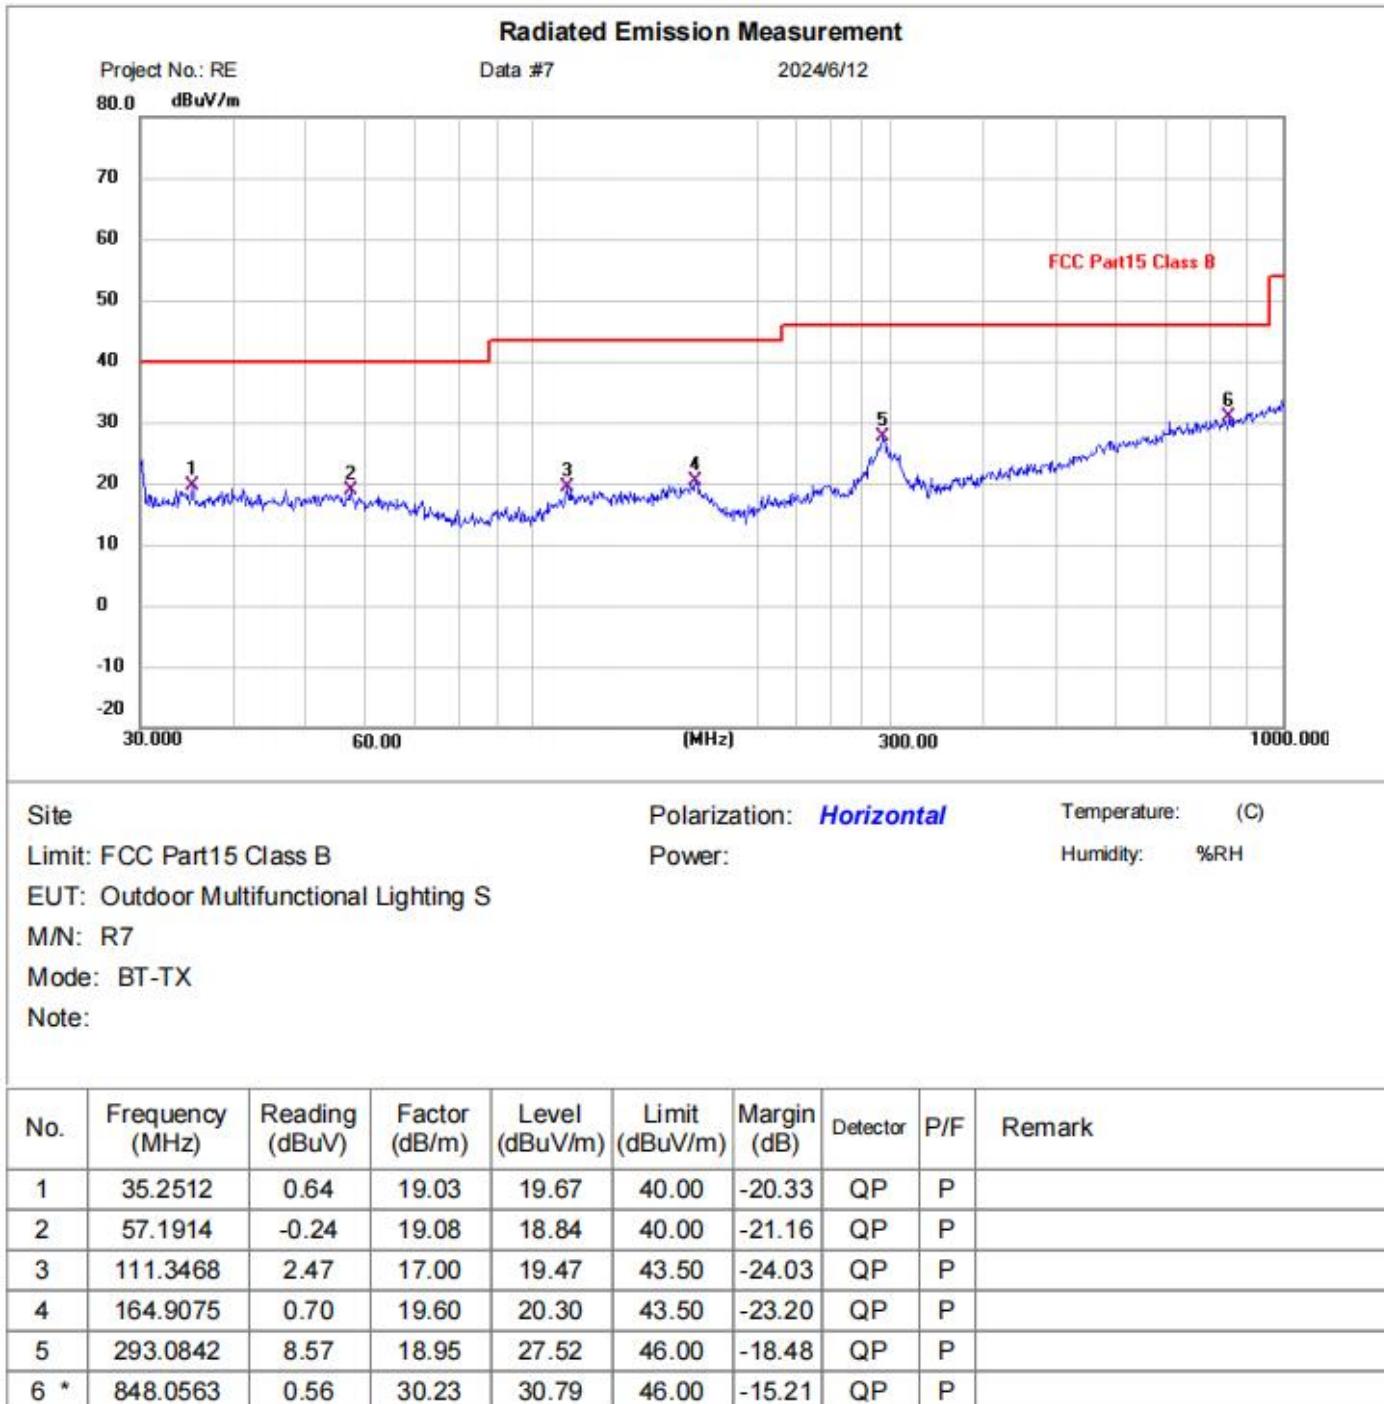

Test Result: Pass

[Test mode: TX]; [Polarity: Vertical]

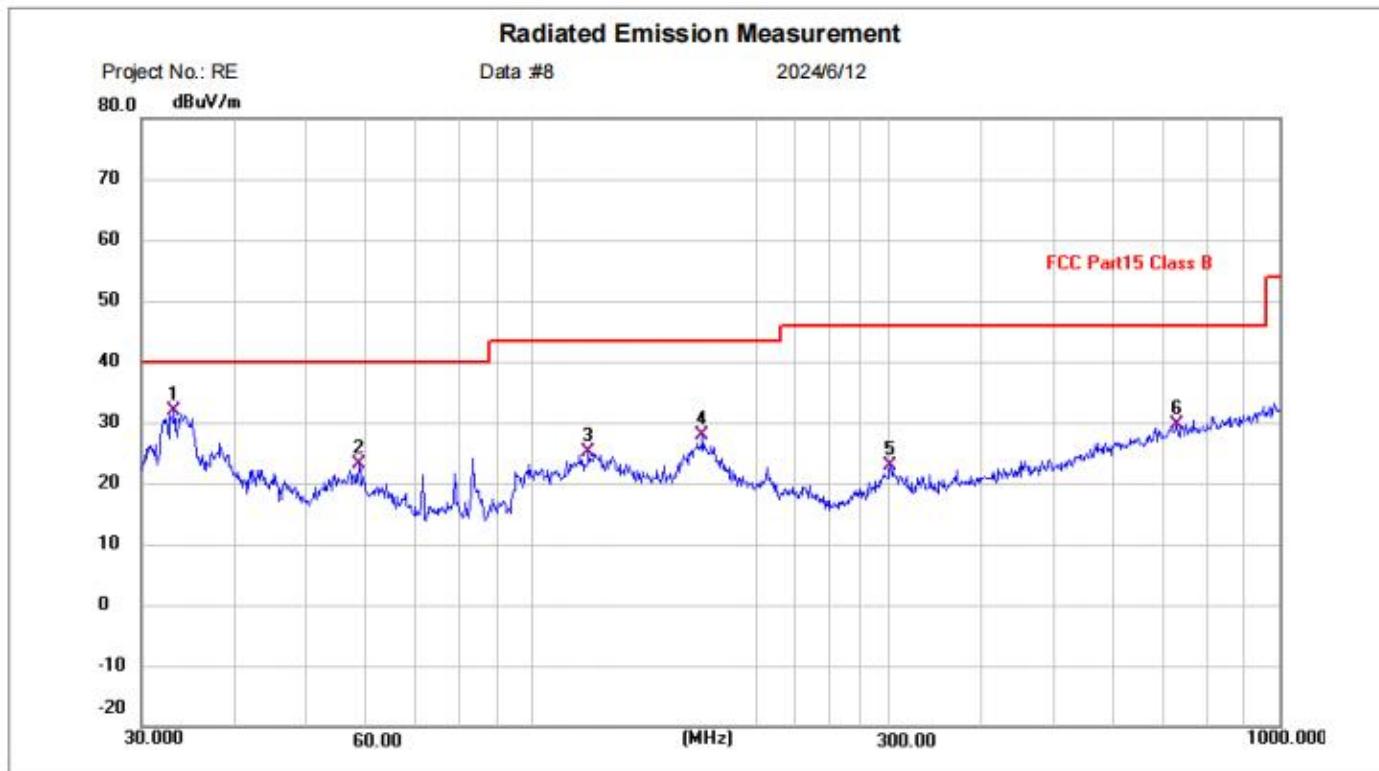

Site
Limit: FCC Part15 Class B
EUT: Outdoor Multifunctional Lighting S
M/N: R7
Mode: BT-TX
Note:

Polarization: **Vertical**

Power:

Temperature: (C)

Humidity: %RH

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	33.2112	13.02	18.78	31.80	40.00	-8.20	QP	P	
2	58.6126	4.46	18.65	23.11	40.00	-16.89	QP	P	
3	119.0180	7.78	17.27	25.05	43.50	-18.45	QP	P	
4	169.0054	8.90	19.03	27.93	43.50	-15.57	QP	P	
5	301.4224	3.47	19.44	22.91	46.00	-23.09	QP	P	
6	729.3583	1.04	28.51	29.55	46.00	-16.45	QP	P	

Test Result: Pass


BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

Above 1GHz:

[Test mode: TX low channel]; [Polarity: Horizontal]

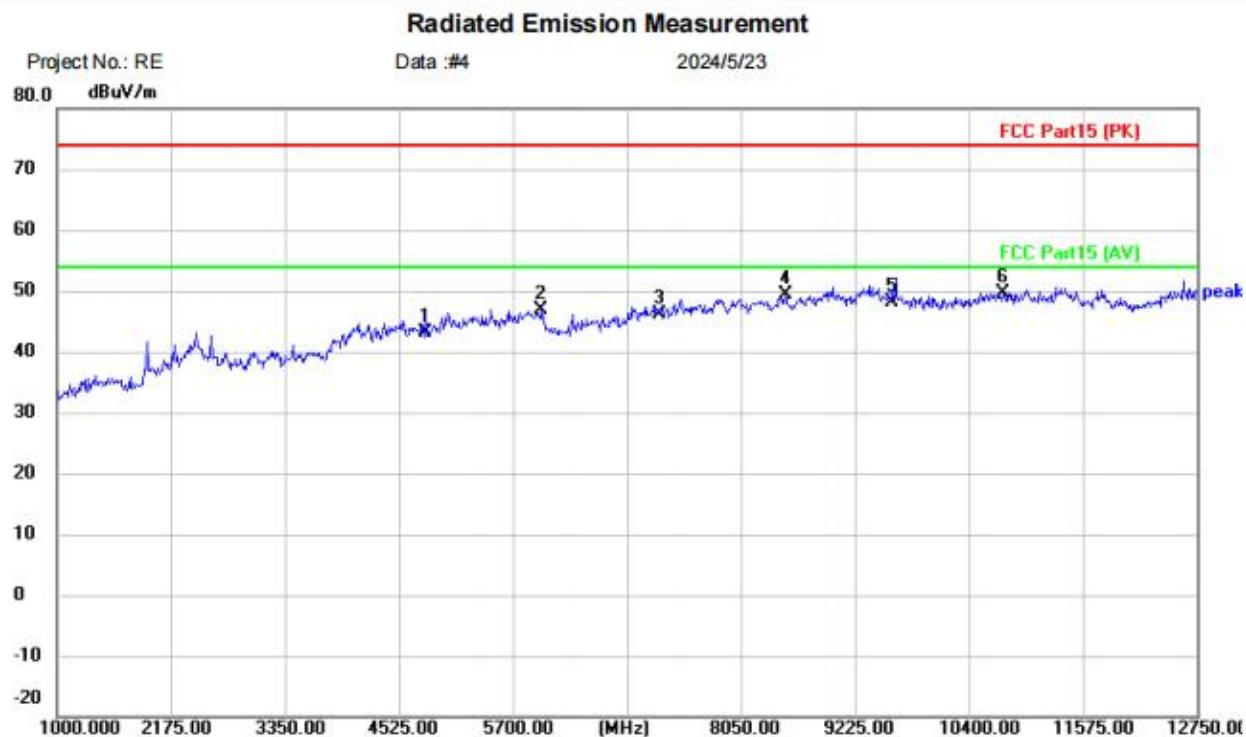

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	37.60	5.64	43.24	74.00	-30.76	peak	
2		5993.750	38.02	8.75	46.77	74.00	-27.23	peak	
3		7206.000	36.95	9.24	46.19	74.00	-27.81	peak	
4		8508.250	38.42	10.97	49.39	74.00	-24.61	peak	
5		9608.000	35.92	12.31	48.23	74.00	-25.77	peak	
6	*	10752.50	36.77	12.96	49.73	74.00	-24.27	peak	

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cbblueasia.com www.cbblueasia.com

[Test mode: TX low channel]; [Polarity: Vertical]

Radiated Emission Measurement

Project No.: RE

Data #3

2024/5/23



Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2402

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		4804.000	37.90	5.64	43.54	74.00	-30.46	peak	
2		6017.250	40.95	5.63	46.58	74.00	-27.42	peak	
3		7206.000	37.49	9.24	46.73	74.00	-27.27	peak	
4		8484.750	38.33	10.84	49.17	74.00	-24.83	peak	
5		9608.000	36.78	12.31	49.09	74.00	-24.91	peak	
6	*	11069.75	37.37	12.99	50.36	74.00	-23.64	peak	

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

[**Test mode: TX middle channel**]; [**Polarity: Horizontal**]

Radiated Emission Measurement

Project No.: RE

Data #: 6

2024/5/23


Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7


Mode: TX-2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment	
								Detector	
MHz		dBuV	dB	dBuV/m		dB			
1		4882.000	38.33	5.73	44.06	74.00	-29.94	peak	
2		5864.500	38.91	8.48	47.39	74.00	-26.61	peak	
3		7323.000	38.01	9.43	47.44	74.00	-26.56	peak	
4		8790.250	38.05	11.67	49.72	74.00	-24.28	peak	
5		9764.000	36.59	12.21	48.80	74.00	-25.20	peak	
6	*	11128.50	37.98	12.76	50.74	74.00	-23.26	peak	

Test Result: Pass

[Test mode: TX middle channel]; [Polarity: Vertical]

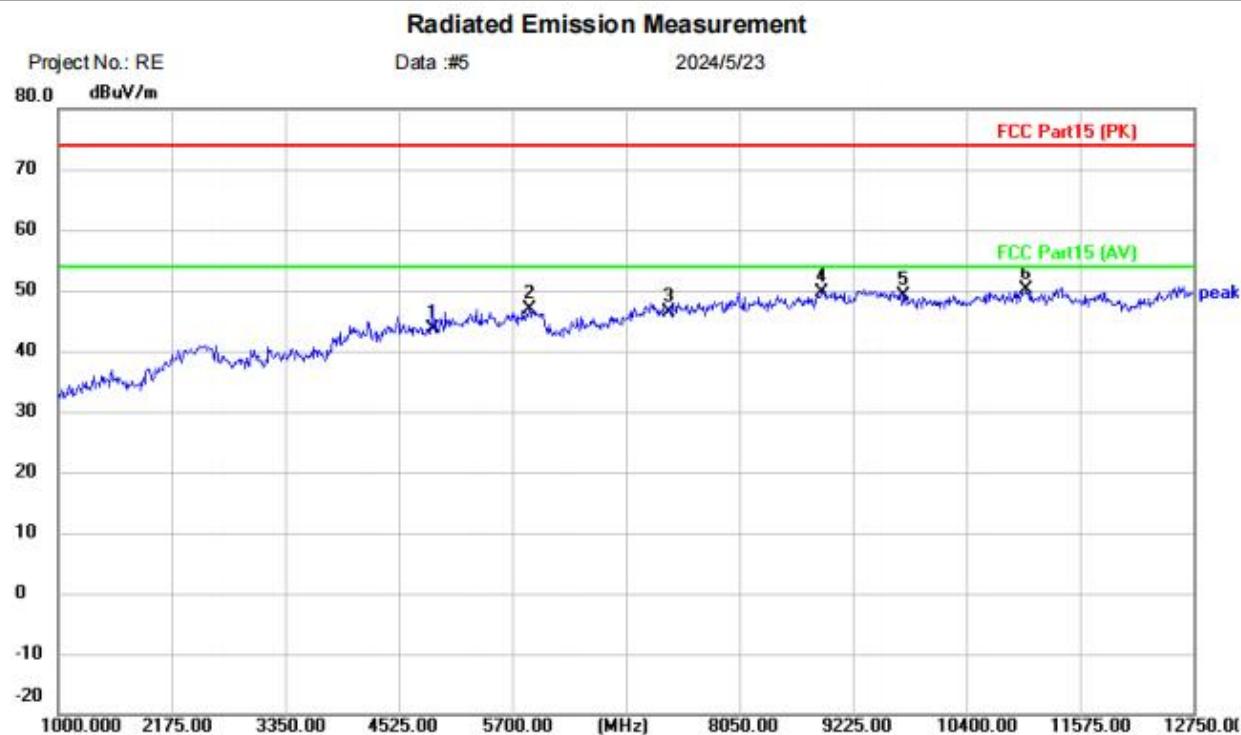


Site: Limit: FCC Part15 (PK) EUT: Outdoor Multifunctional Lighting S M/N: R7 Mode: TX-2441 Note: Polarization: **Vertical** Power: Temperature: (C) Humidity: %RH

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4882.000	37.87	5.73	43.60	74.00	-30.40	peak	
2		5876.250	38.29	8.54	46.83	74.00	-27.17	peak	
3		7323.000	36.91	9.43	46.34	74.00	-27.66	peak	
4		8896.000	37.60	12.03	49.63	74.00	-24.37	peak	
5		9764.000	36.82	12.21	49.03	74.00	-24.97	peak	
6	*	11022.75	36.89	13.32	50.21	74.00	-23.79	peak	

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Horizontal]

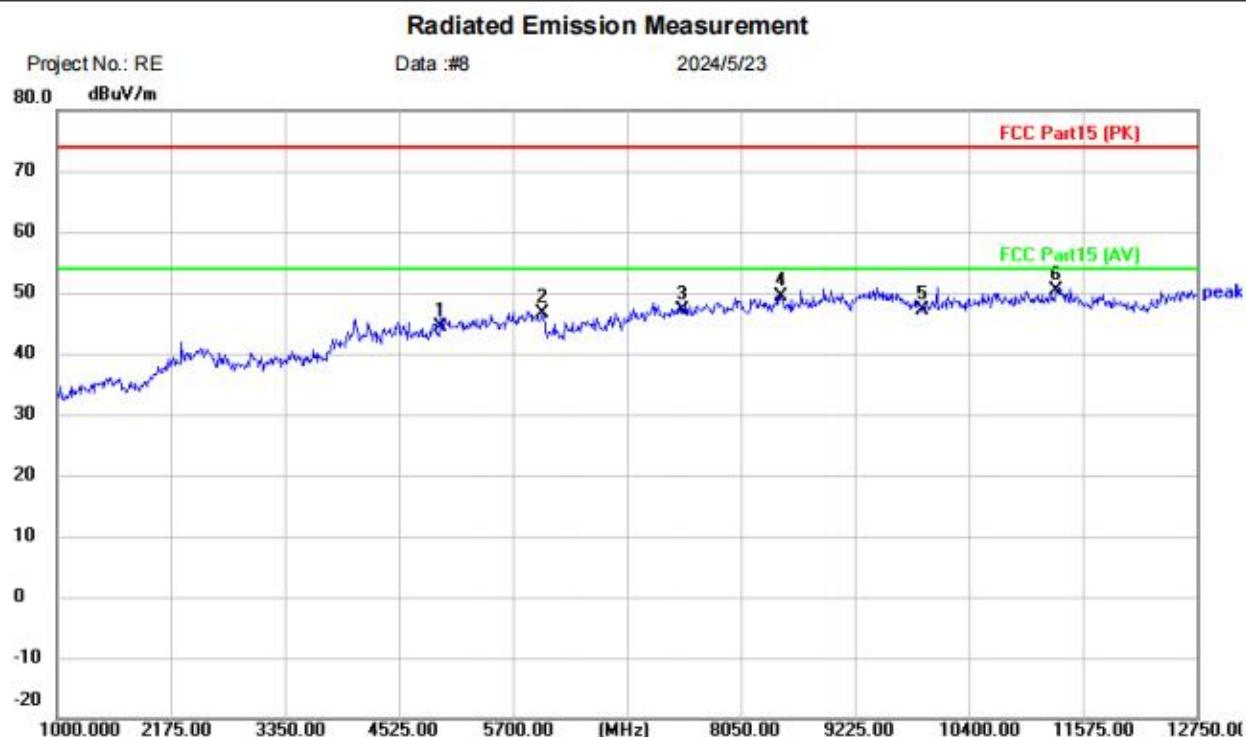

Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		Comment
			Level	Factor	ment		dB	dBuV/m	
1		4960.000	37.84	6.60	44.44	74.00	-29.56	peak	
2		6005.500	40.91	5.61	46.52	74.00	-27.48	peak	
3		7440.000	37.57	9.64	47.21	74.00	-26.79	peak	
4		8461.250	38.80	10.70	49.50	74.00	-24.50	peak	
5		9920.000	35.02	12.14	47.16	74.00	-26.84	peak	
6	*	11293.00	37.58	12.70	50.28	74.00	-23.72	peak	

Test Result: Pass

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

[Test mode: TX High channel]; [Polarity: Vertical]

Radiated Emission Measurement

Project No.: RE
80.0 dBuV/m

Data #:7

2024/5/23


Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m				
1		4960.000	37.31	6.60	43.91	74.00	-30.09	peak	
2		6017.250	41.18	5.63	46.81	74.00	-27.19	peak	
3		7440.000	38.05	9.64	47.69	74.00	-26.31	peak	
4		8696.250	37.94	11.47	49.41	74.00	-24.59	peak	
5		9920.000	36.05	12.14	48.19	74.00	-25.81	peak	
6	*	10940.50	37.45	13.25	50.70	74.00	-23.30	peak	

Test Result: Pass

DH1,DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK,modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

BlueAsia of Technical Services (Shenzhen) Co.,Ltd.

Tel: +86-755-23059481

Email: marketing@cblueasia.com www.cblueasia.com

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

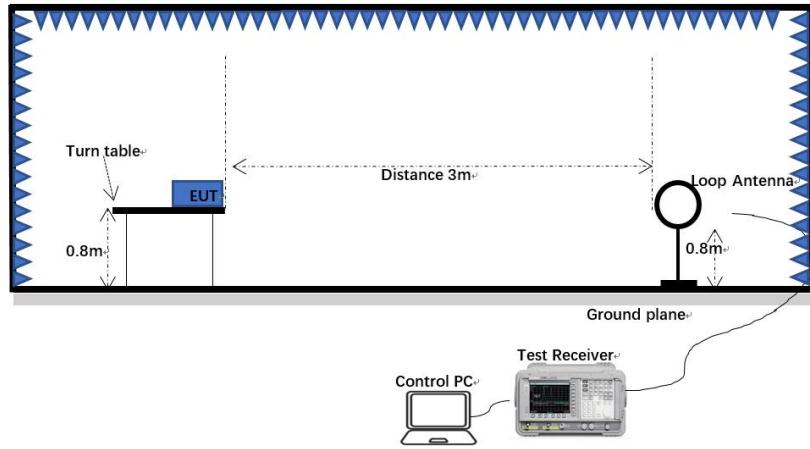

30MHz-1GHz:

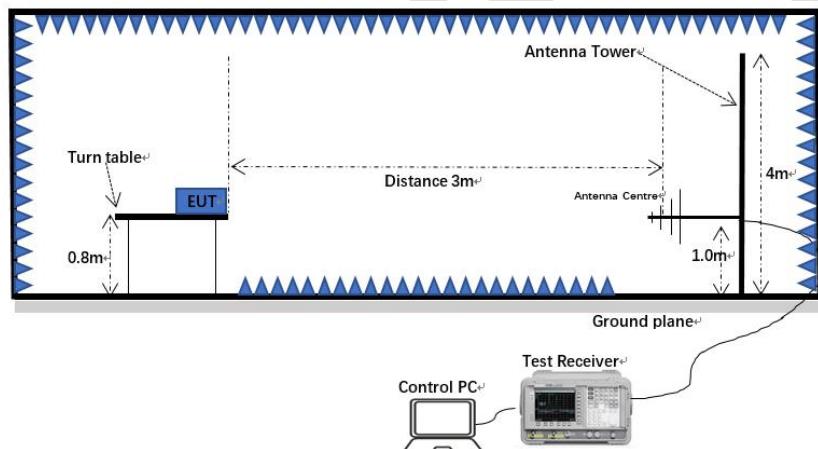

Above 1GHz:

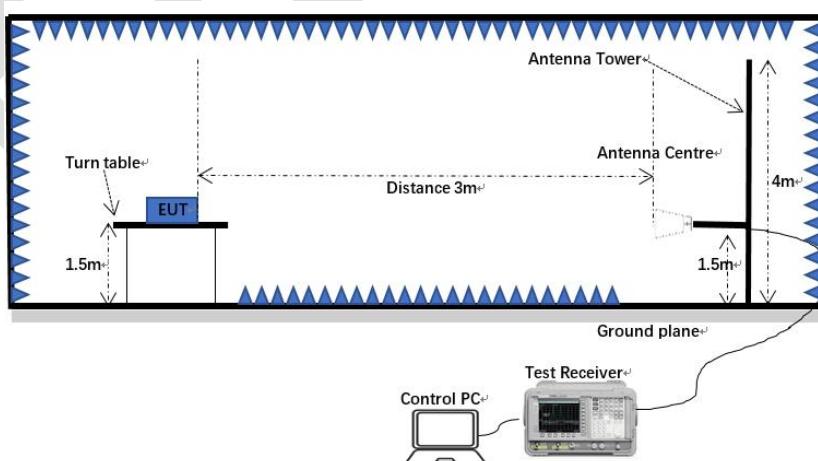

6.11.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data

[Test mode: TX low channel]; [Polarity: Horizontal]

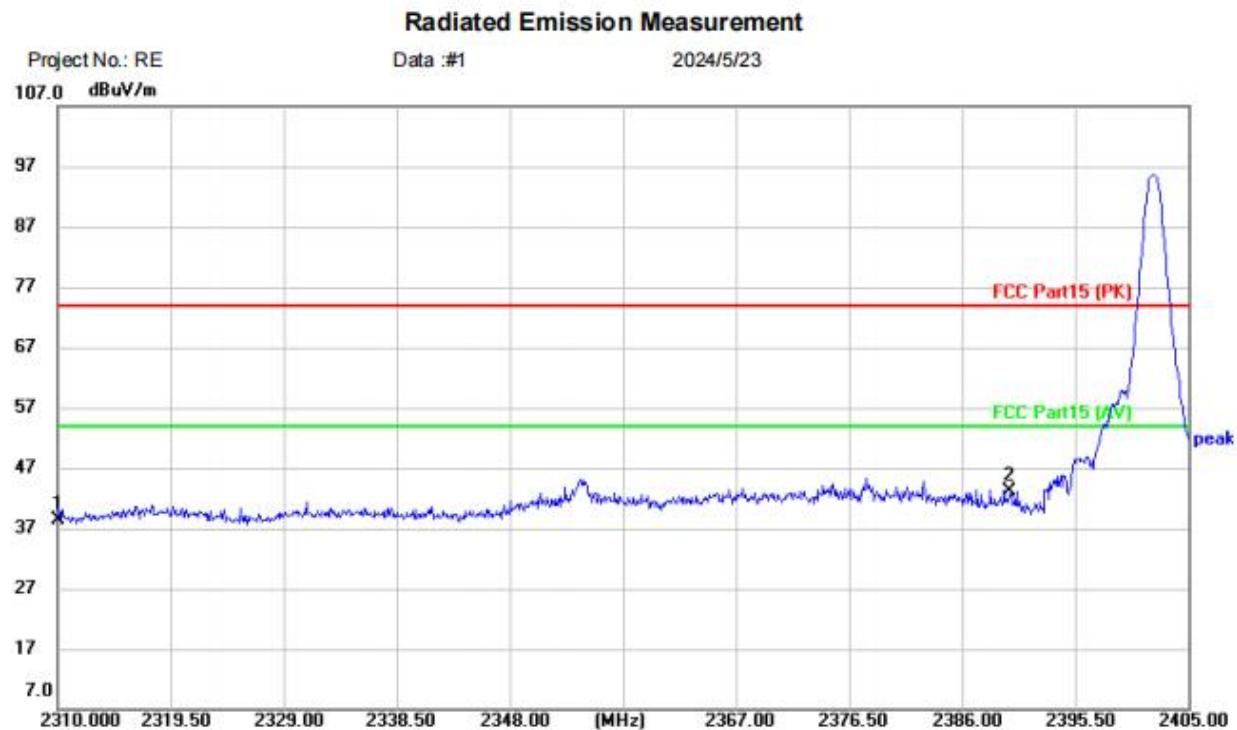


Site: Limit: FCC Part15 (PK) EUT: Outdoor Multifunctional Lighting S M/N: R7 Mode: TX-2402 Note: Polarization: **Horizontal** Power: Temperature: (C) Humidity: %RH

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
			Level	Factor	ment		dB	dBuV/m	dB
1		2310.000	41.34	-2.89	38.45	74.00	-35.55	peak	
2	*	2390.000	45.90	-2.70	43.20	74.00	-30.80	peak	

Test Result: Pass

[Test mode:TX low channel]; [Polarity: Vertical]

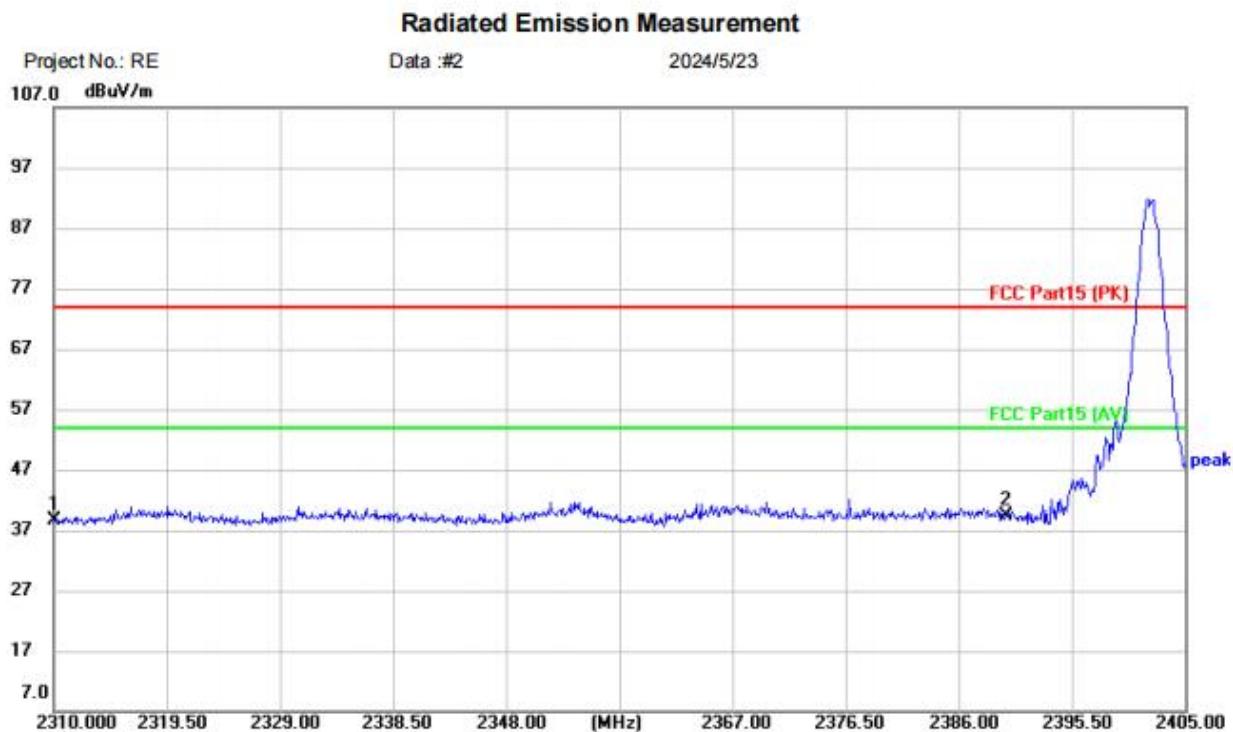

Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Over							
						MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2310.000	41.60	-2.89	38.71	74.00	-35.29	peak					
2	*	2390.000	42.17	-2.70	39.47	74.00	-34.53	peak					

Test Result: Pass

[**Test mode: TX High channel**]; [**Polarity: Horizontal**]


Radiated Emission Measurement

Project No.: RE

Data #: #10

2024/5/23

107.0 dBuV/m

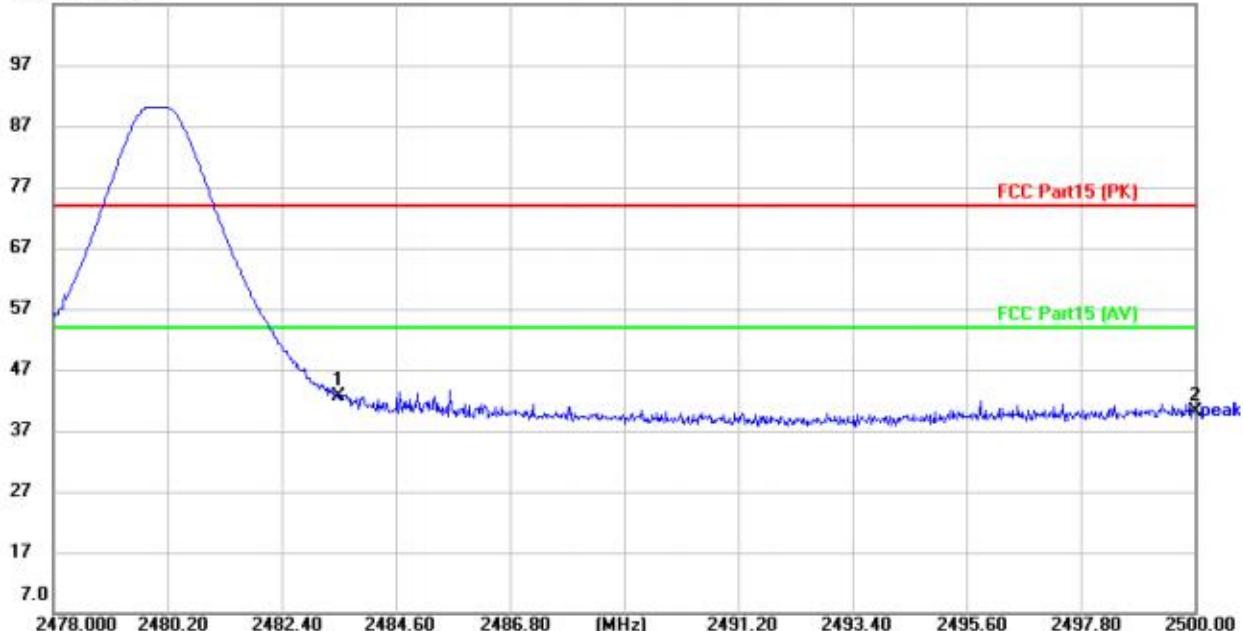
Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	45.46	-2.91	42.55	74.00	-31.45	peak	
2		2500.000	43.10	-3.00	40.10	74.00	-33.90	peak	

Test Result: Pass

[**Test mode:TX High channel]; [Polarity: Vertical]**
Radiated Emission Measurement

Project No.: RE

Data :#9

2024/5/23

107.0 dBuV/m


Site Polarization: **Vertical** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Outdoor Multifunctional Lighting S

M/N: R7

Mode: TX-2480

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2483.500	43.00	-2.91	40.09	74.00	-33.91	peak	
2		2500.000	42.46	-3.00	39.46	74.00	-34.54	peak	

Test Result: Pass


DH1,DH3, DH5 all have been tested, during the test, GFSK, pi/4DQPSK, 8DPSK,modulation were all pre-scanned Only the GFSK of the worst mode would be recorded in this report.

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-3.337	21	Pass
NVNT	1-DH1	2441	Ant1	-2.168	21	Pass
NVNT	1-DH1	2480	Ant1	-2.503	21	Pass
NVNT	2-DH1	2402	Ant1	-2.49	21	Pass
NVNT	2-DH1	2441	Ant1	-1.401	21	Pass
NVNT	2-DH1	2480	Ant1	-1.681	21	Pass
NVNT	3-DH1	2402	Ant1	-1.892	21	Pass
NVNT	3-DH1	2441	Ant1	-0.73	21	Pass
NVNT	3-DH1	2480	Ant1	-1.086	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

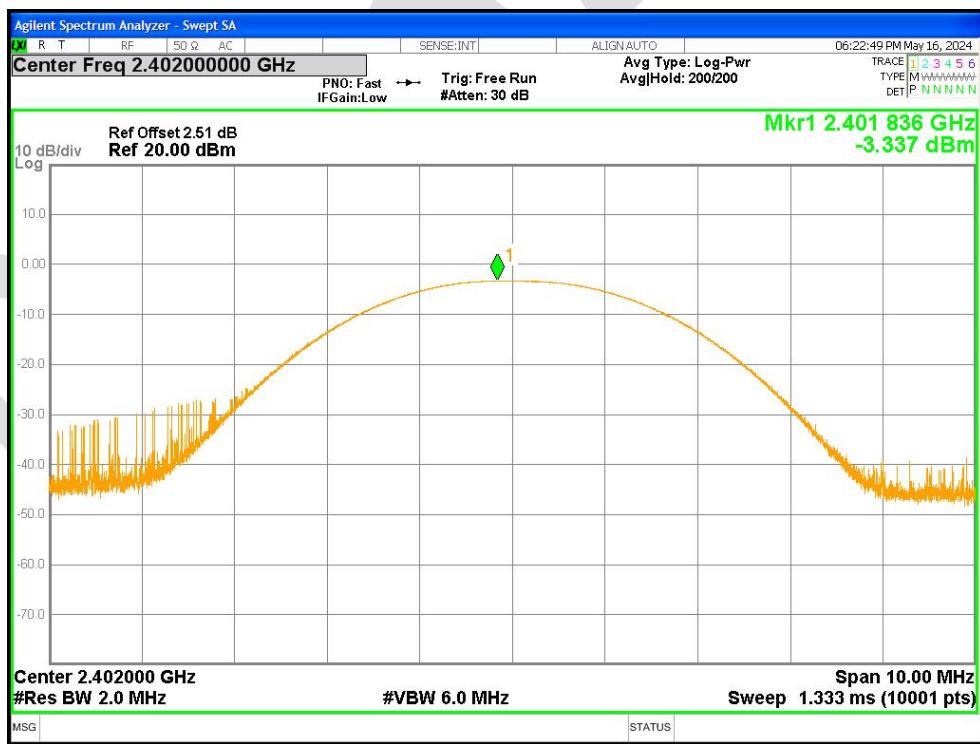


Power NVNT 1-DH1 2441MHz Ant1

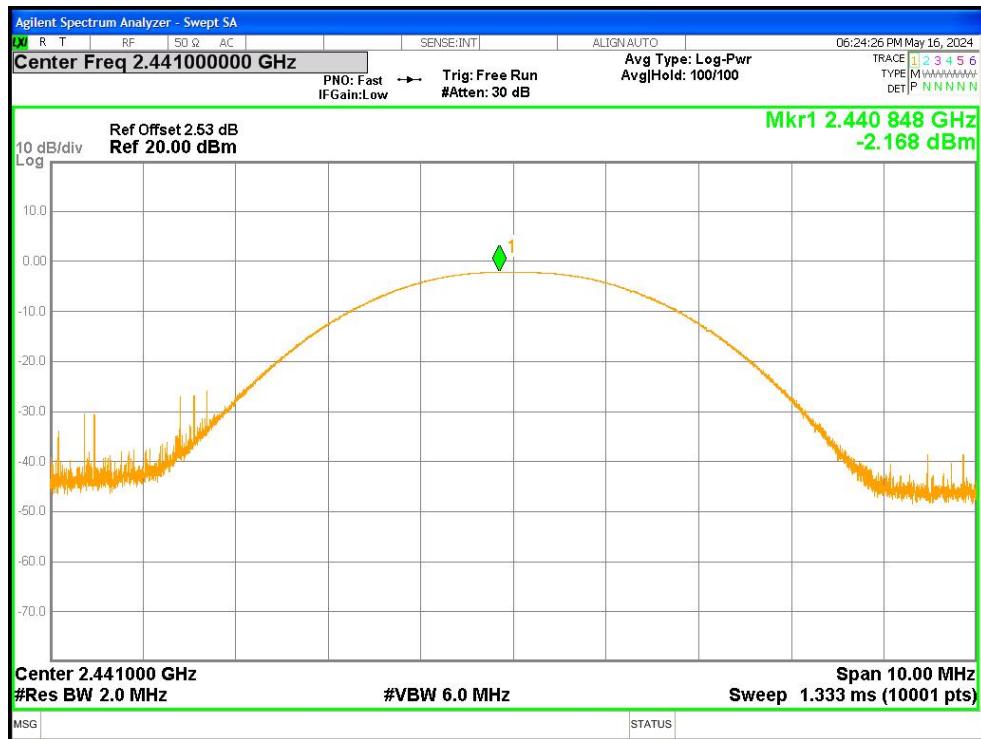


Power NVNT 1-DH1 2480MHz Ant1

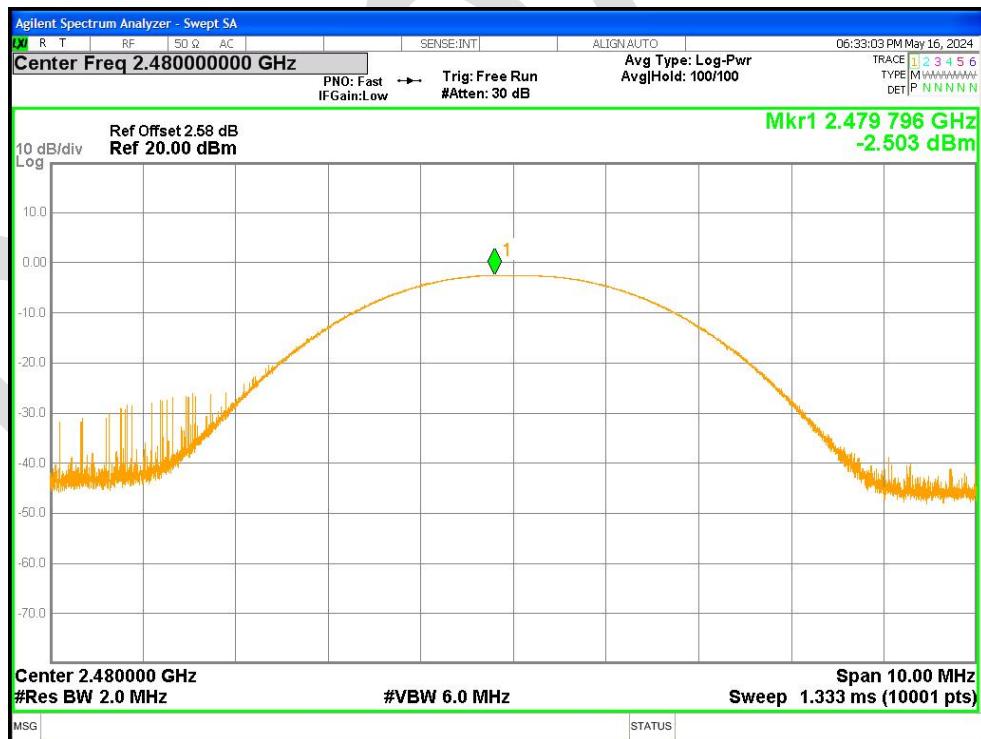


Power NVNT 2-DH1 2402MHz Ant1

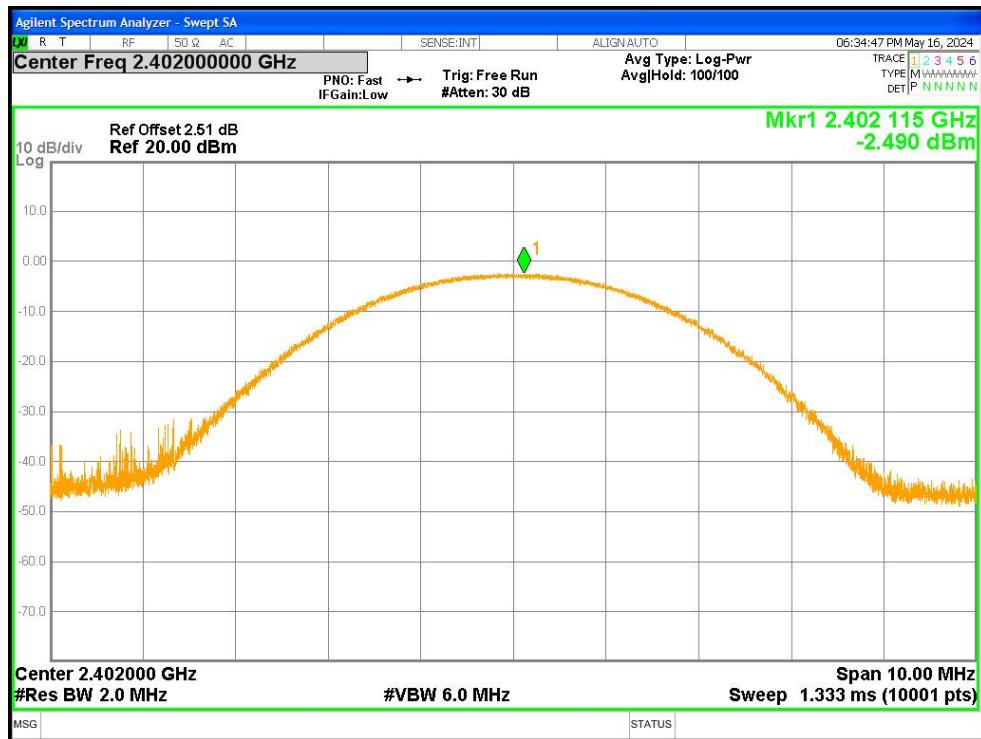


Power NVNT 2-DH1 2441MHz Ant1

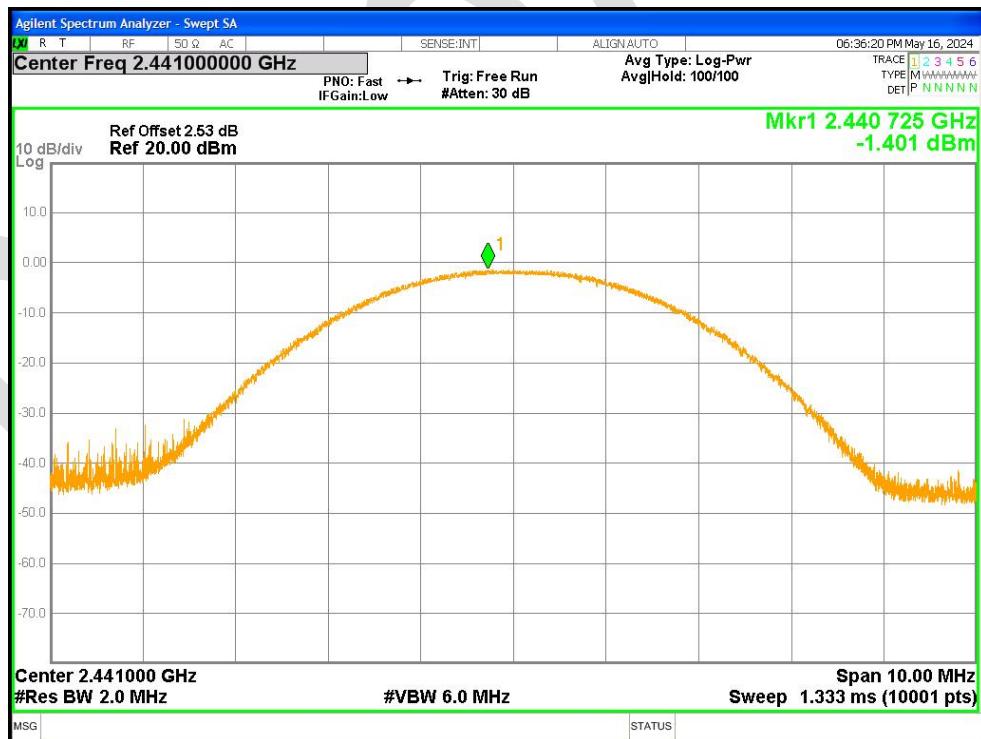


Power NVNT 2-DH1 2480MHz Ant1

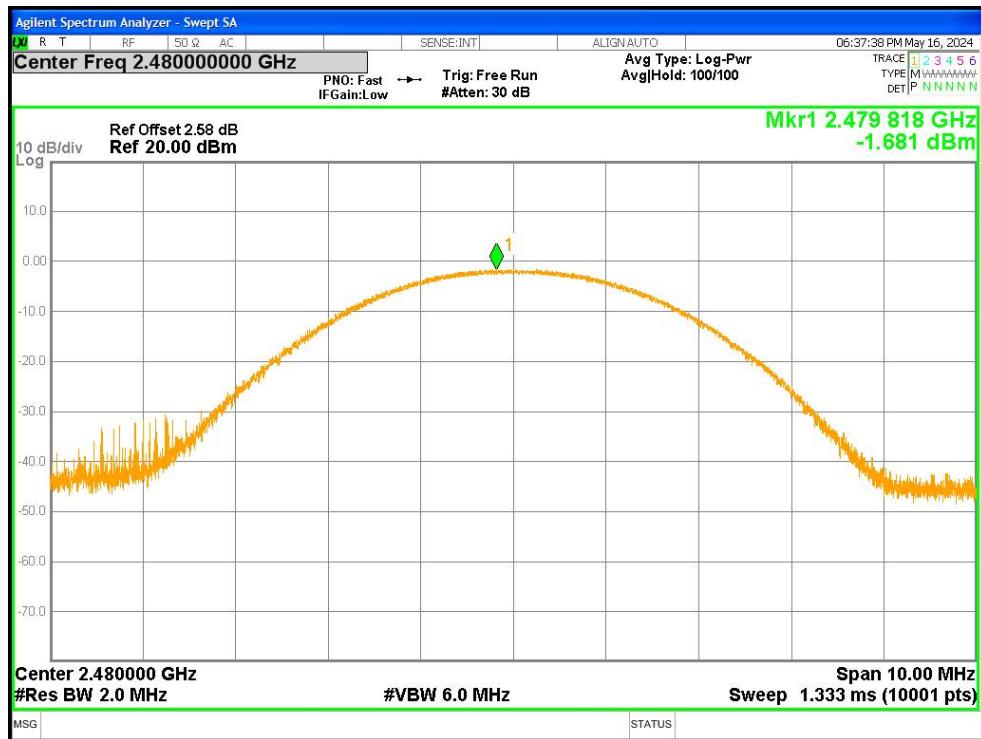


Power NVNT 3-DH1 2402MHz Ant1

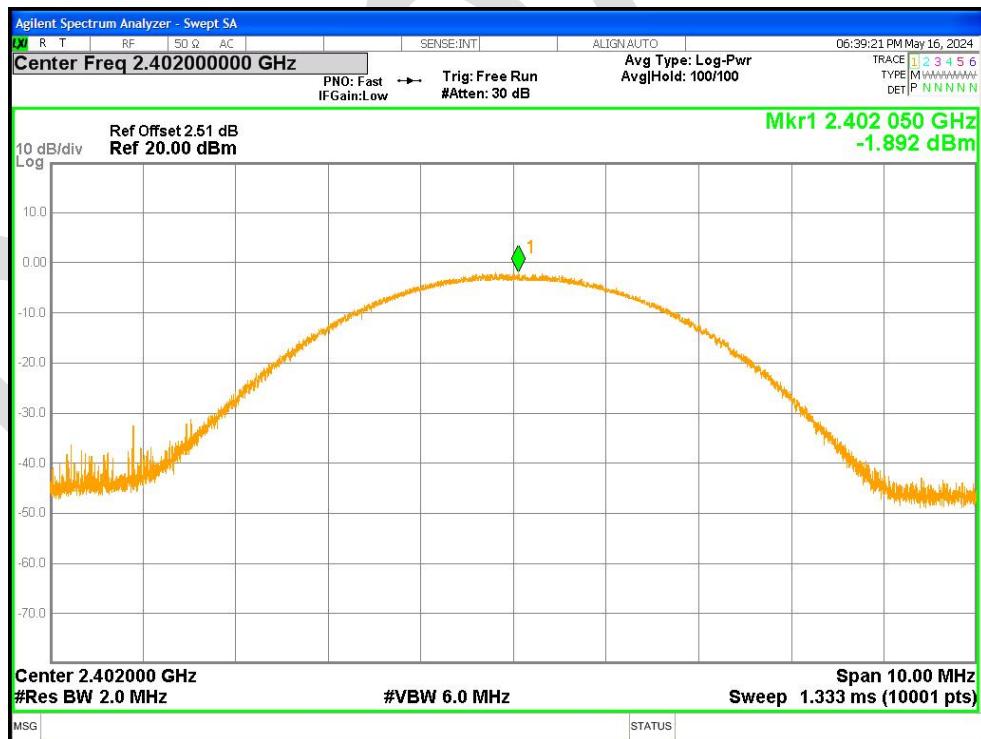

Power NVNT 3-DH1 2441MHz Ant1

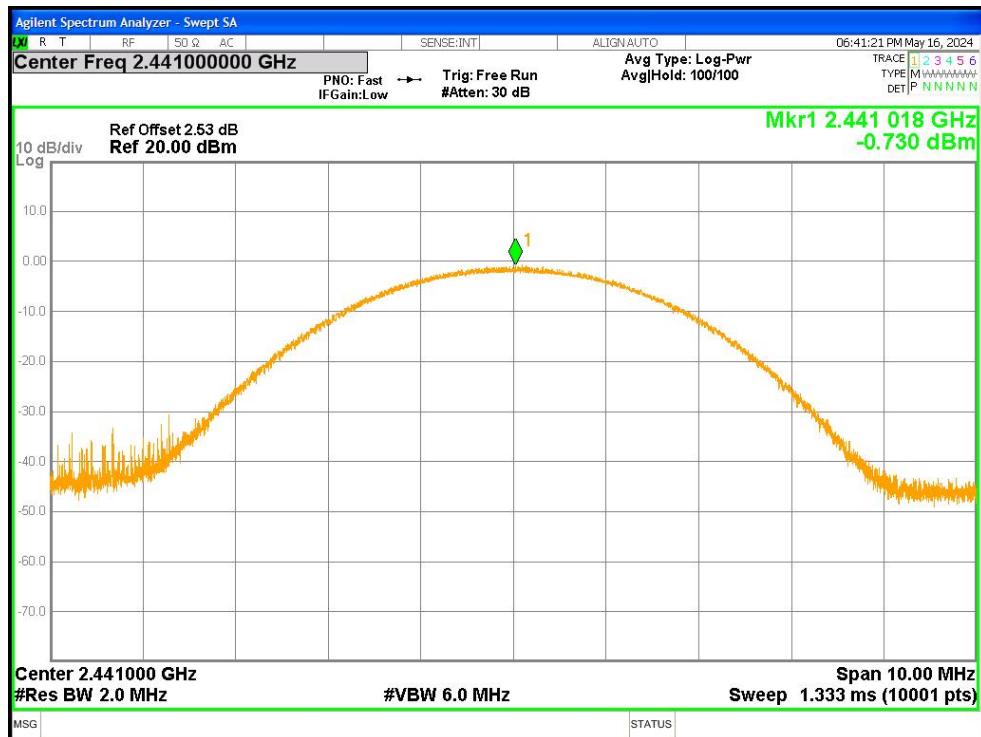


Power NVNT 3-DH1 2480MHz Ant1

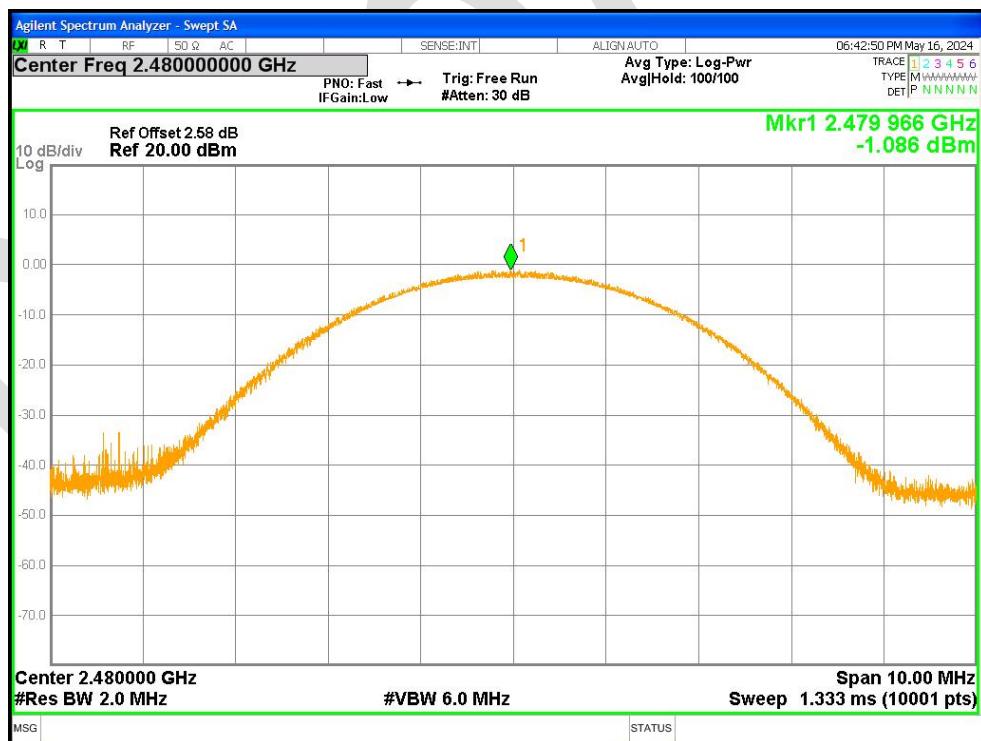


7.2-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.871	N/A	Pass
NVNT	1-DH1	2441	Ant1	0.88	N/A	Pass
NVNT	1-DH1	2480	Ant1	0.875	N/A	Pass
NVNT	2-DH1	2402	Ant1	1.255	N/A	Pass
NVNT	2-DH1	2441	Ant1	1.24	N/A	Pass
NVNT	2-DH1	2480	Ant1	1.245	N/A	Pass
NVNT	3-DH1	2402	Ant1	1.219	N/A	Pass
NVNT	3-DH1	2441	Ant1	1.246	N/A	Pass
NVNT	3-DH1	2480	Ant1	1.24	N/A	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

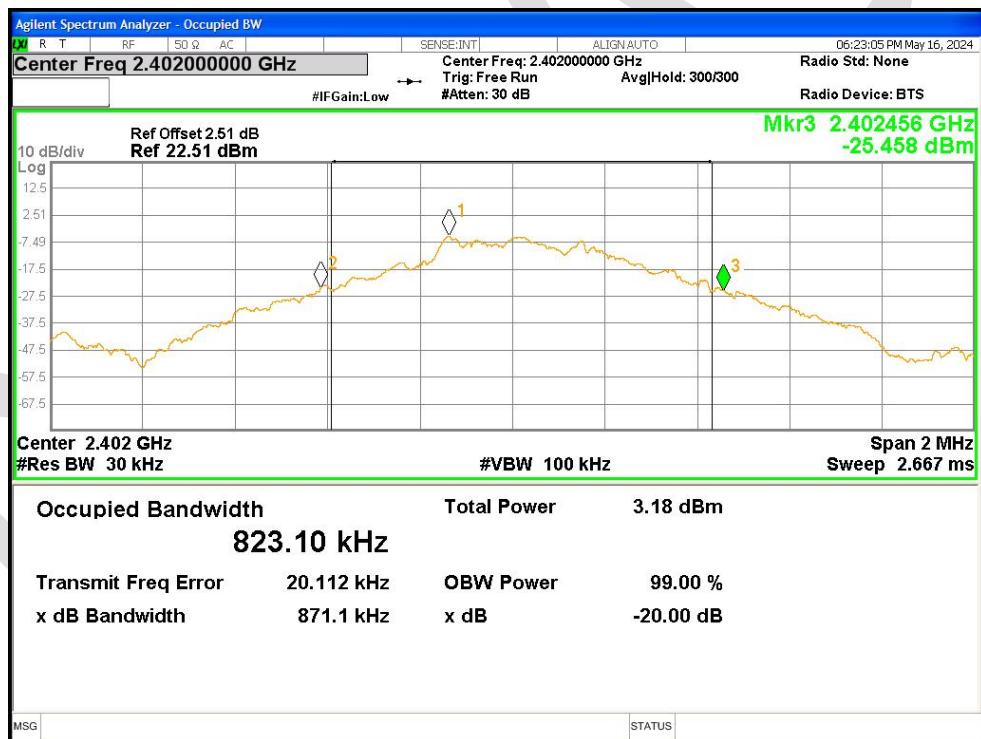


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

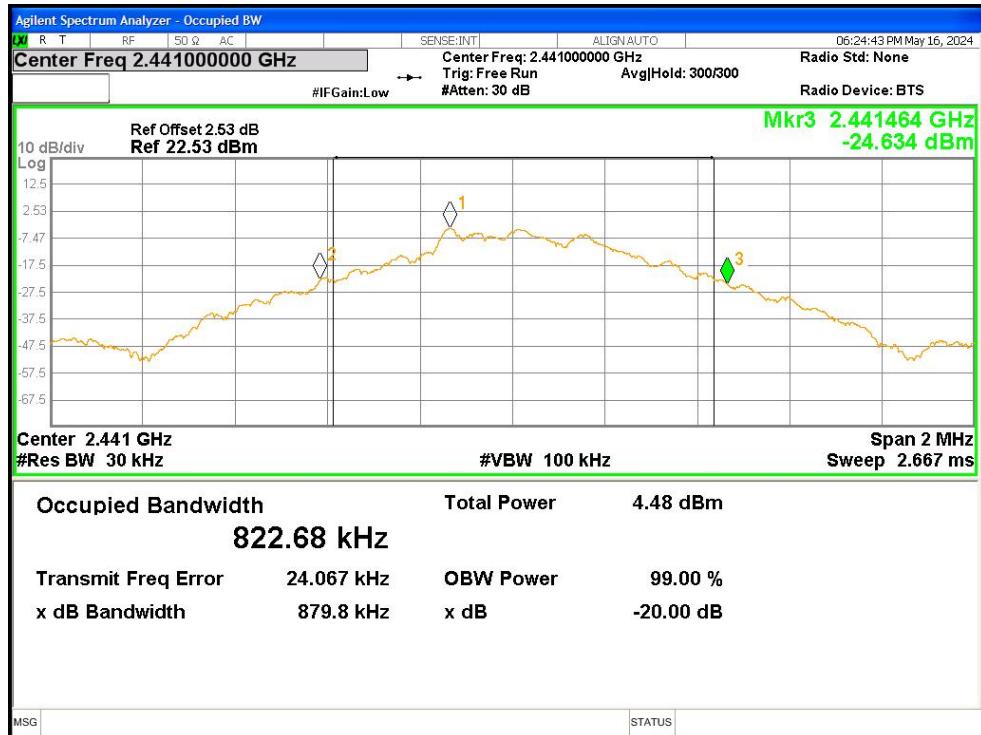


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

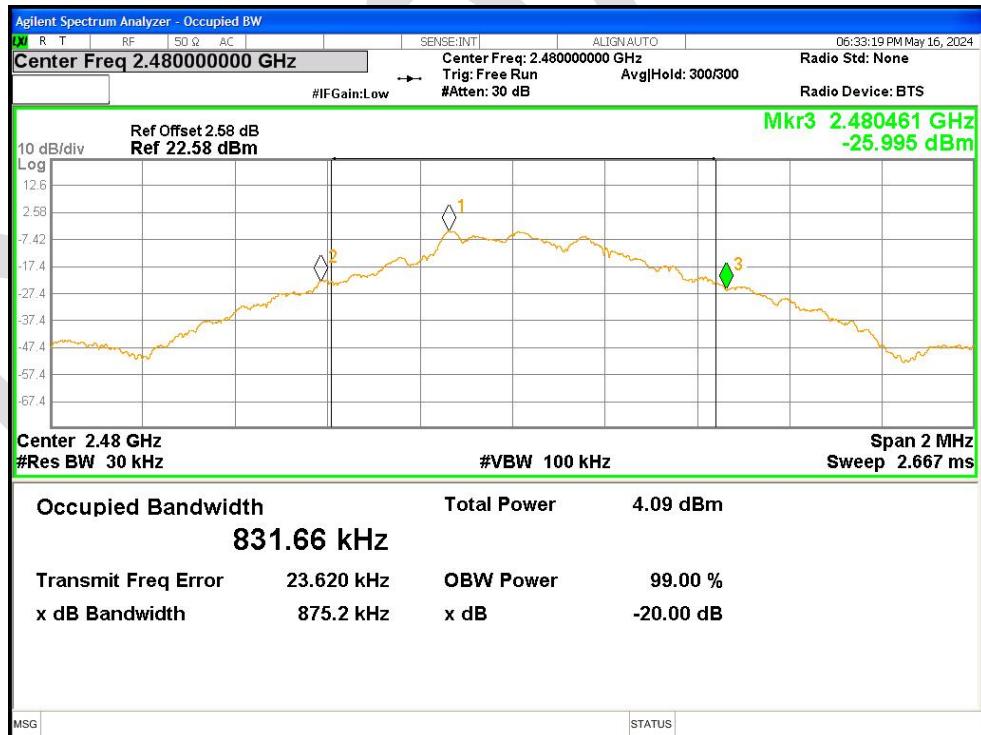

-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

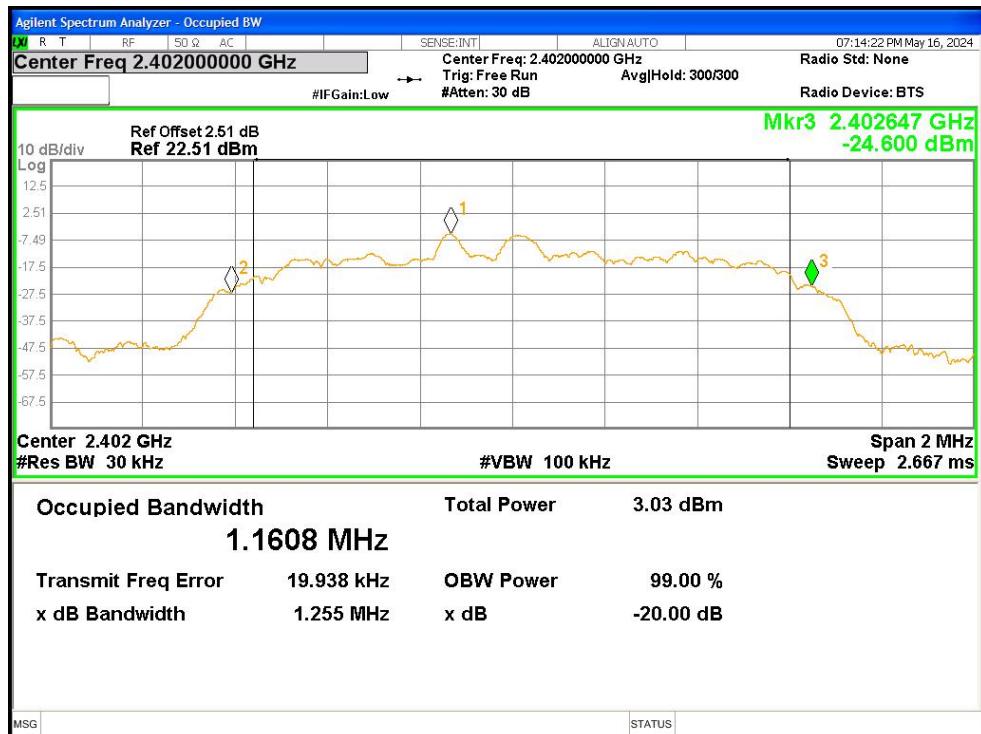

-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

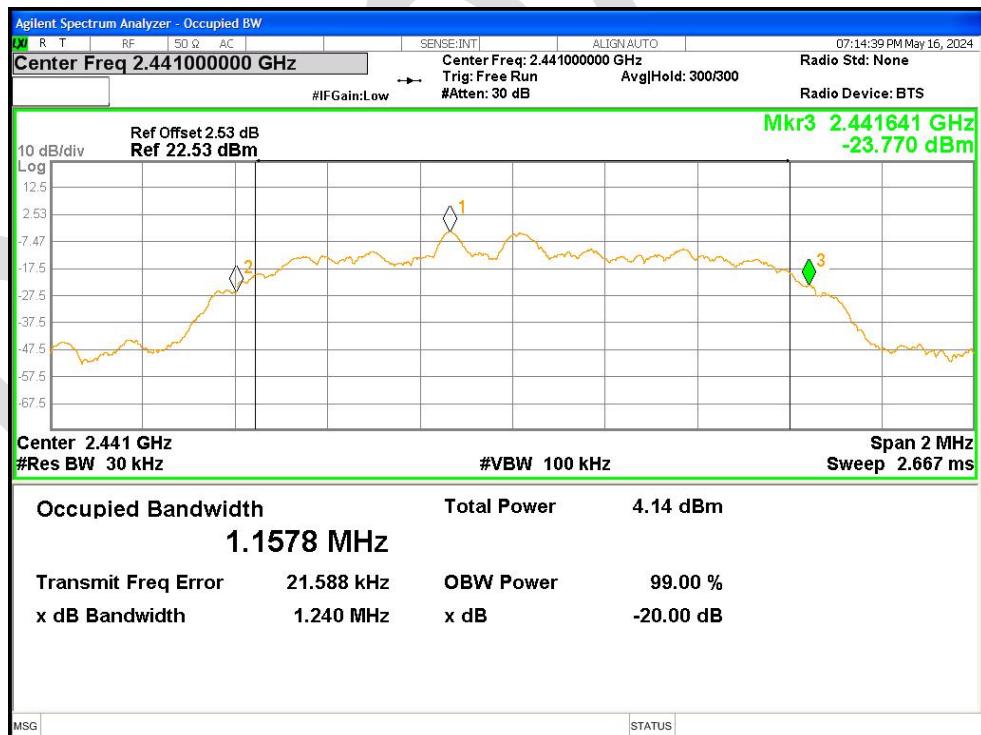

-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1