

ANTENNA INFORMATION

OEM	Lenovo
ODM	Huaqin Technology Co.,Ltd.
Platform model name	IdeaPad Slim 5 16IRH10
Intel platform (ex: Yes, No or NA)	Yes
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 11.23
	ISED (1g) N/A
	ISED (10g) N/A

Antenna manufacturer	Company name	Huizhou speed wireless technology co.,ltd.
	Address	No. 138 Huize Avenue, Dongjiang High tech Industrial Park, Zhongkai High tech Zone, Huizhou City, Guangdong Province
Test location	Company name	Huizhou speed wireless technology co.,ltd.
	Address	No. 138 Huize Avenue, Dongjiang High tech Industrial Park, Zhongkai High tech Zone, Huizhou City, Guangdong Province
Test Personnel	Name(Full name)	YuLei
	E-mail	yl@speed-hz.com
	Tel/Mobile	(+086) 18762864066
Testing date		2024/08/21

Antenna Part number	Main	F-0G-XZ-0387-000-K0
	Aux	F-0G-XZ-0387-000-K0
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	2.11	2.76	3.14	2.88	3.01	3.24	3.03	3.33	3.43	3.15
Aux	1.51	3.35	3.04	3.16	3.51	3.26	3.43	3.15	3.32	3.53

Cable Assembly Part Number and Information						
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type Brand/ Part Number	Connector type
Main	M-Z4-SD-0113-107-KA	292	1.13	50	Kangsuo NGFF: MHF-B13-N-01	MHF-4L
Aux	M-Z4-SD-0113-107-GA	383	1.13	50	Kangsuo NGFF: MHF-B13-N-01	MHF-4L

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)

Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History


Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

3. Test & System Description

3.1 Measurement Method and System

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

3.2 Test setup

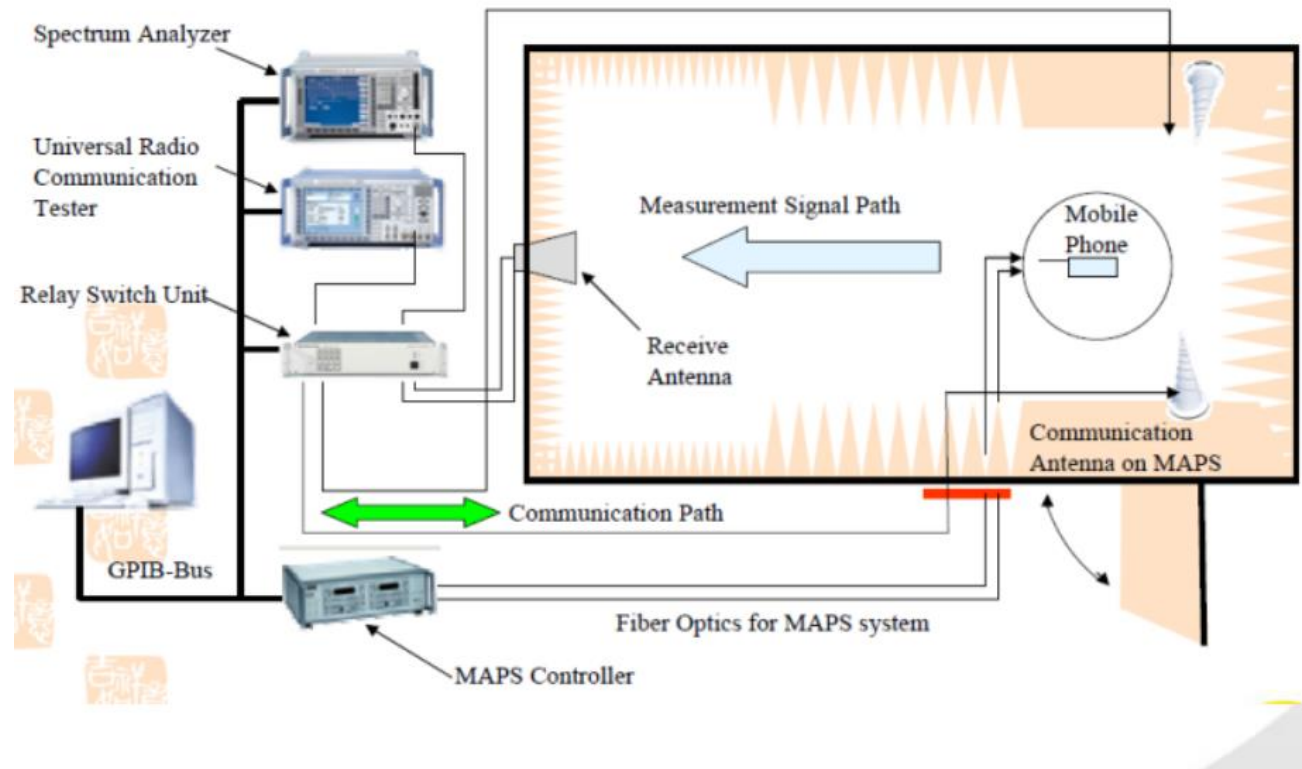

3.3 Equipment list


Number	Device	Manufacturer	Cal. Date	Cal. Due. Date
1	Chamber	ETS-Lindgren	2024/5/6	2025/5/5
2	Horn Antenna	ETS-Lindgren	2024/5/6	2025/5/5
3	VNA	Keysight	2024/8/2	2025/8/1
4	TR/RX Amplifier	ETS-Lindgren	2024/5/6	2025/5/5
5	Switch	Keysight	2024/8/2	2025/8/1
6	Turntable Controller	ETS-Lindgren	NA	NA
7	UPS	huawei	NA	NA
8	Test System	ETS-Lindgren	NA	NA

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.11

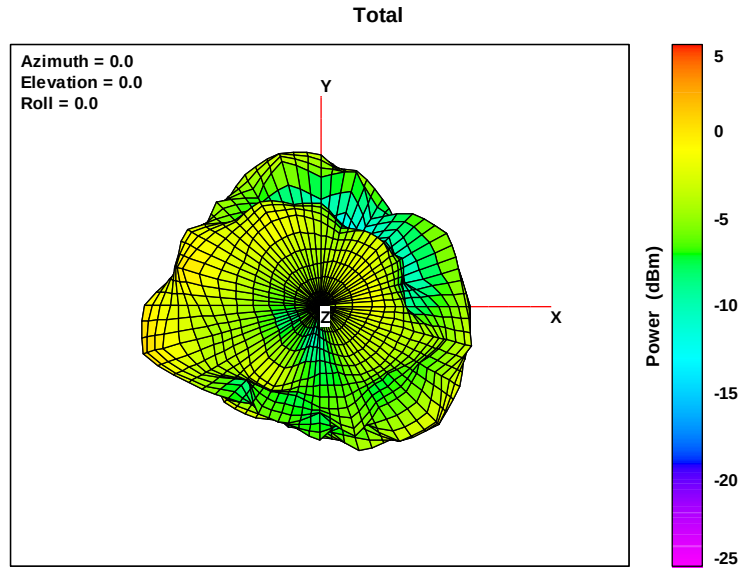


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.76

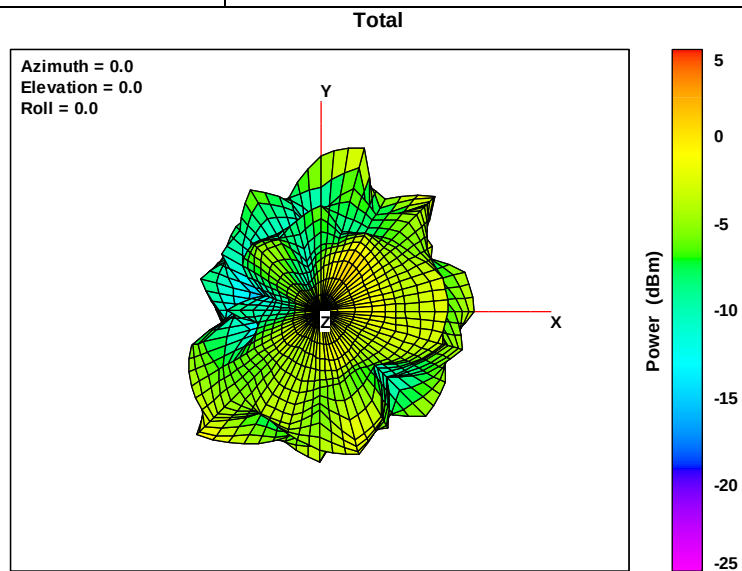


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.14

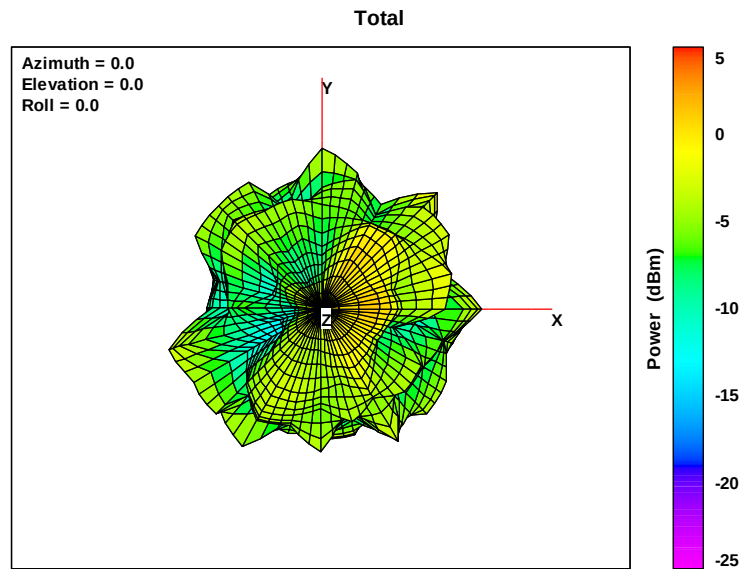


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.88

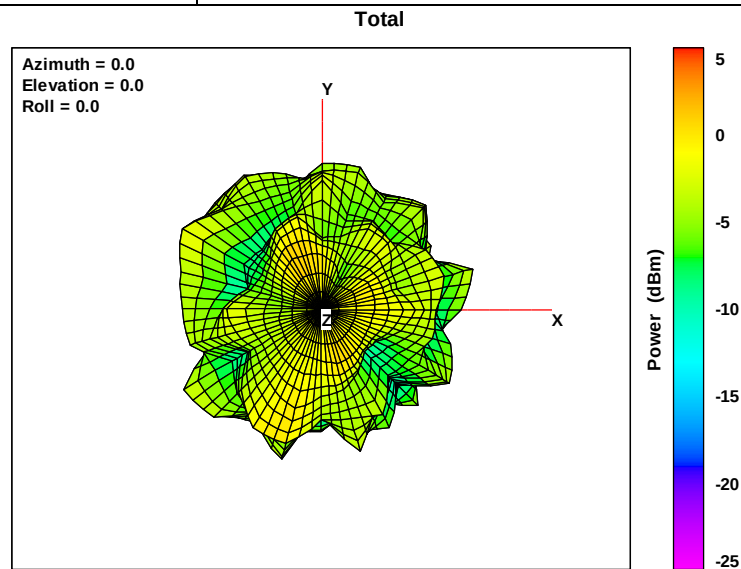


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.01

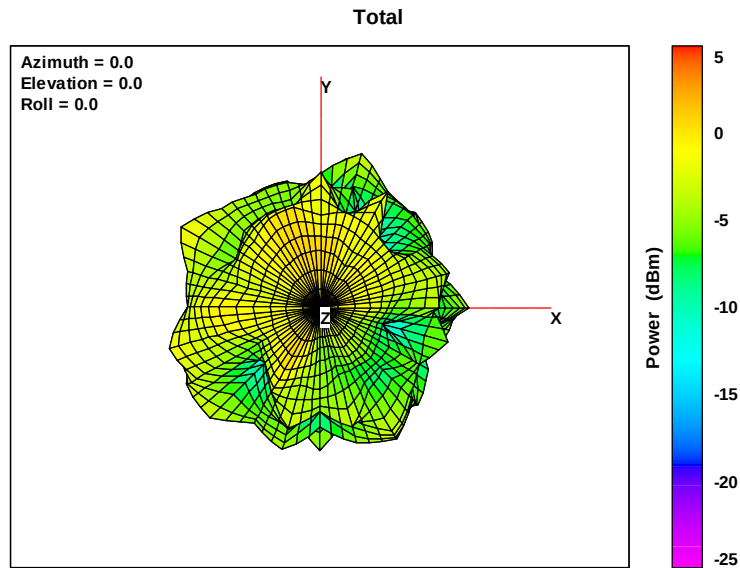

Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.24

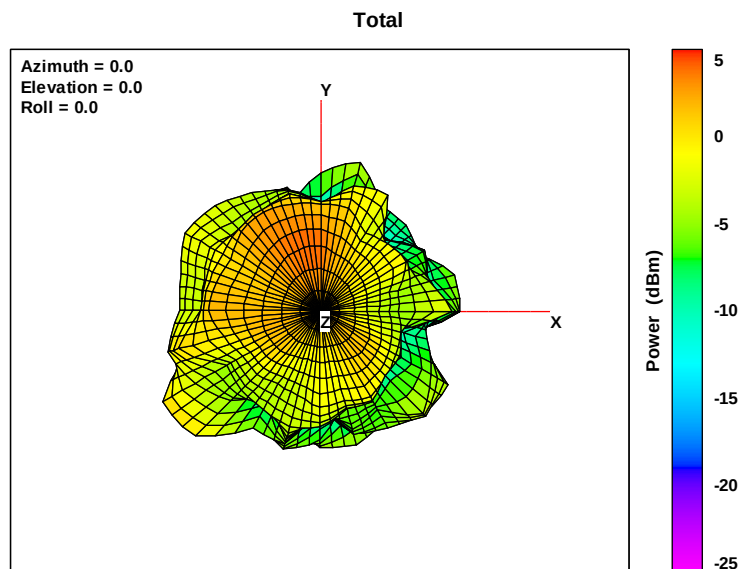

Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.03


Total

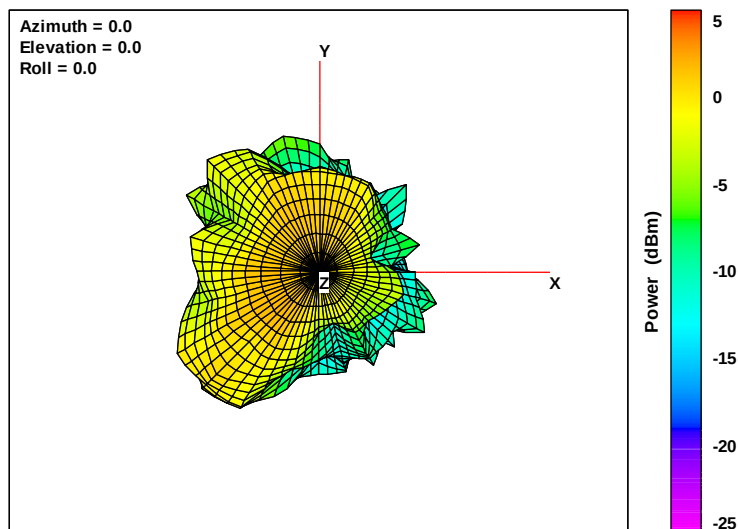

Max Antenna 3D Radiation Pattern 6425-6525 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.33

Total

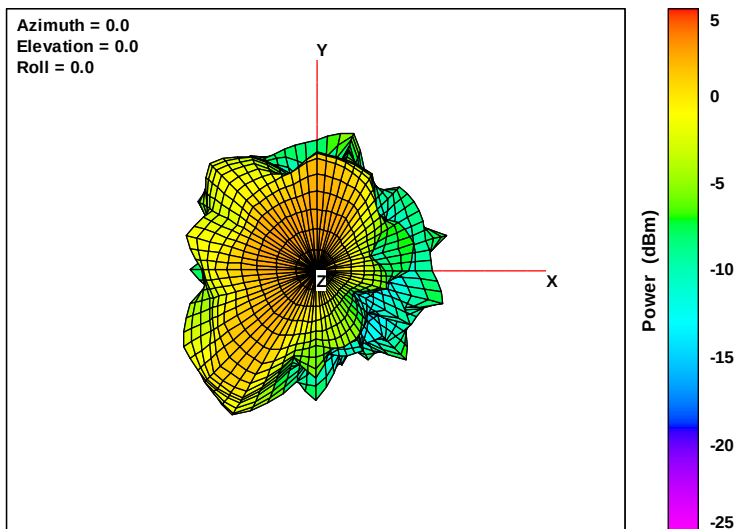


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.43

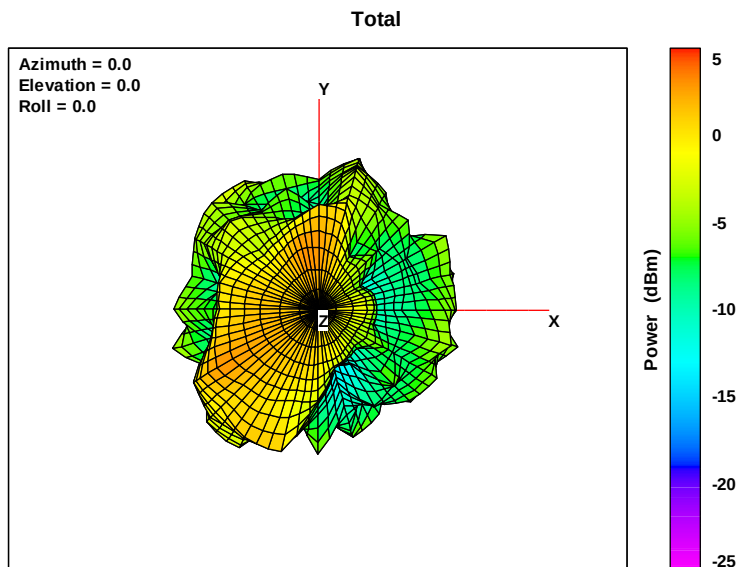

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.15

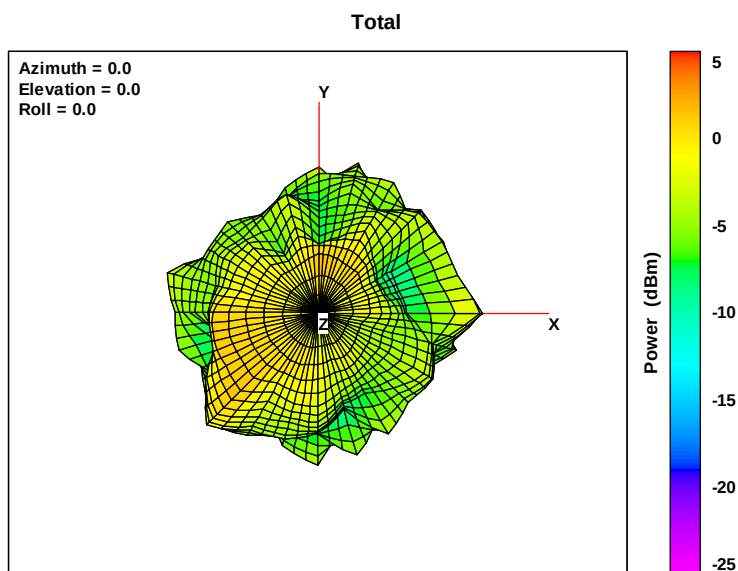

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.51

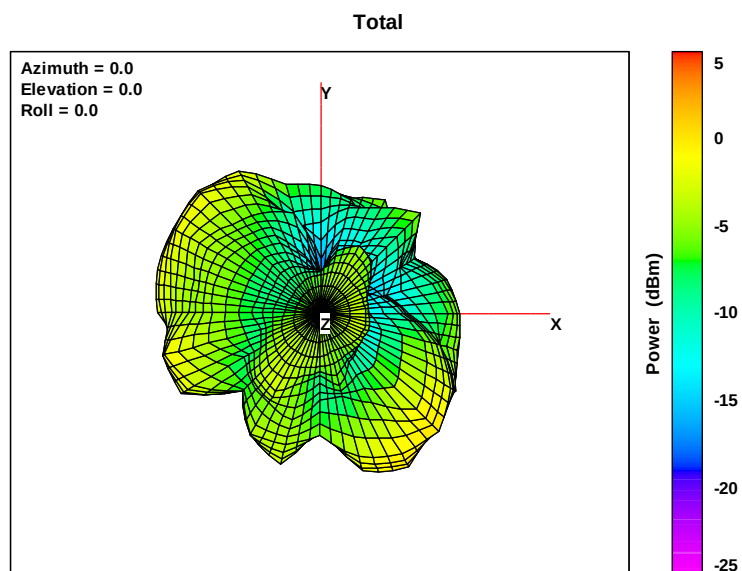


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	3.35

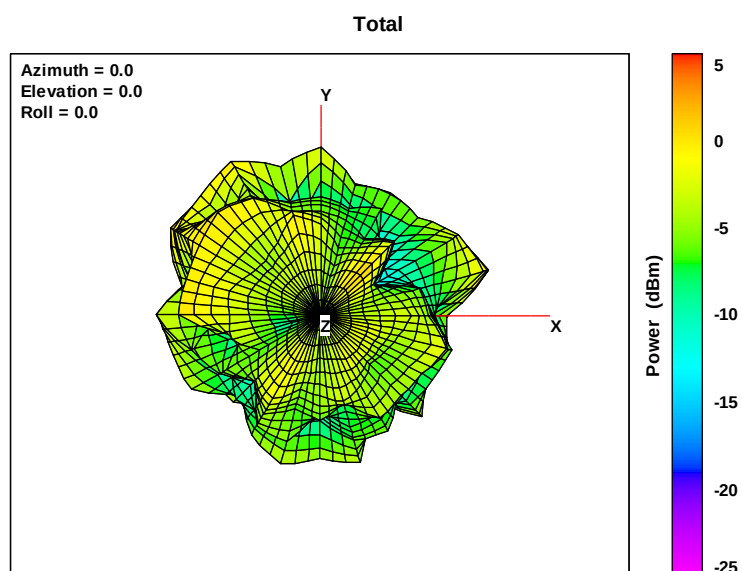


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.04

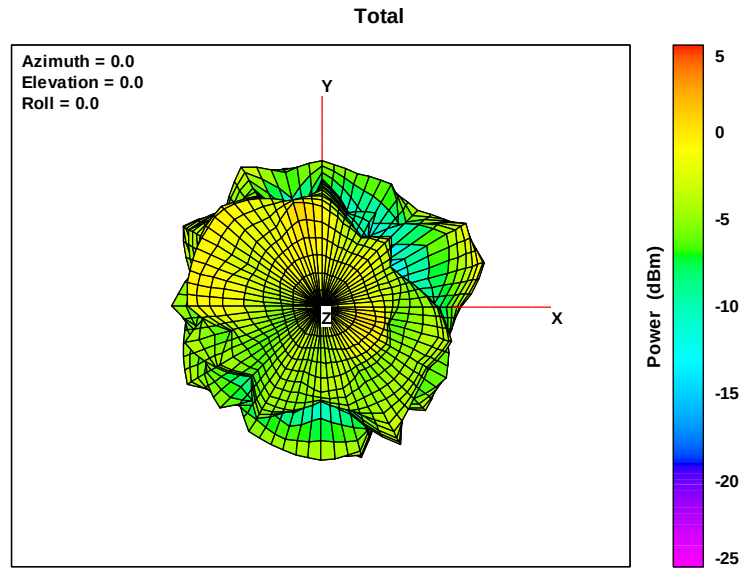


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	3.16

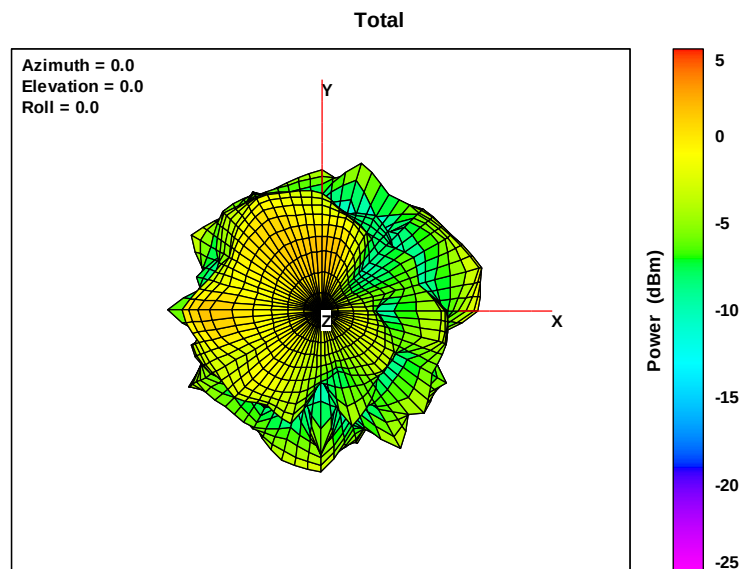


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.51

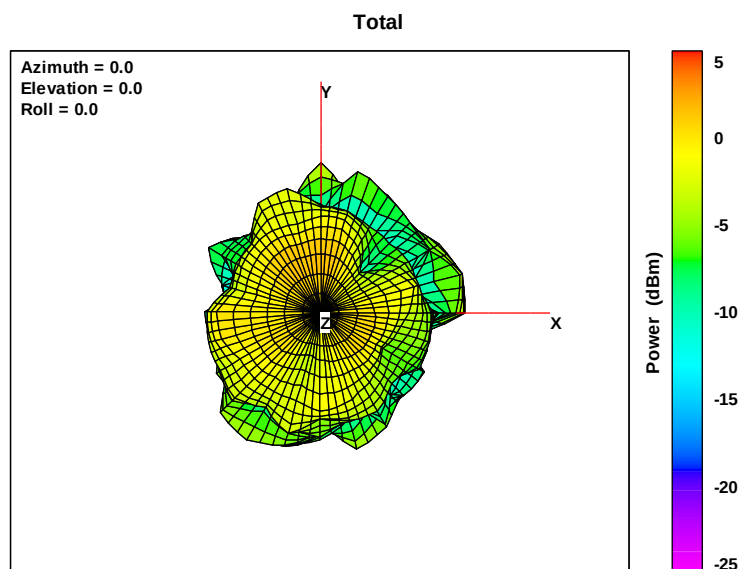


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.26

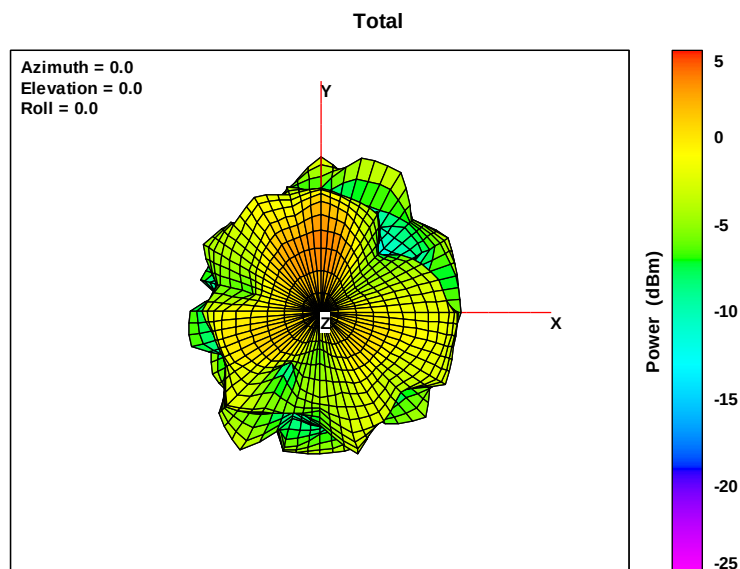


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	3.43

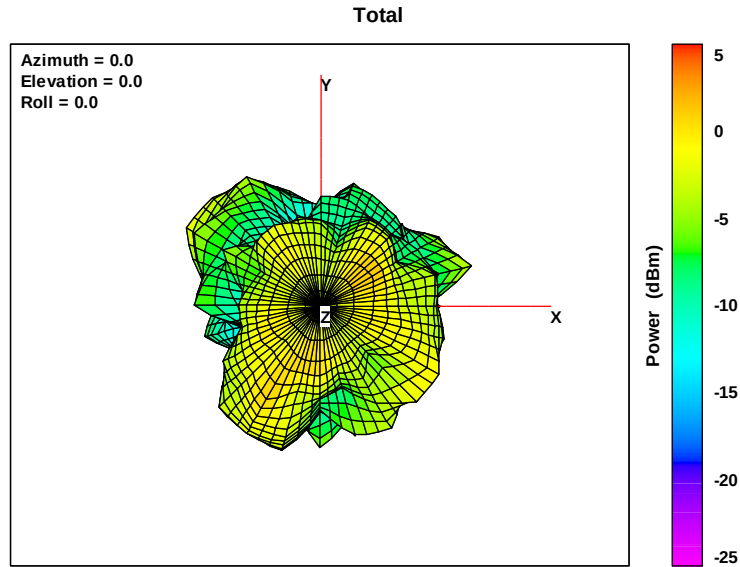


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.15

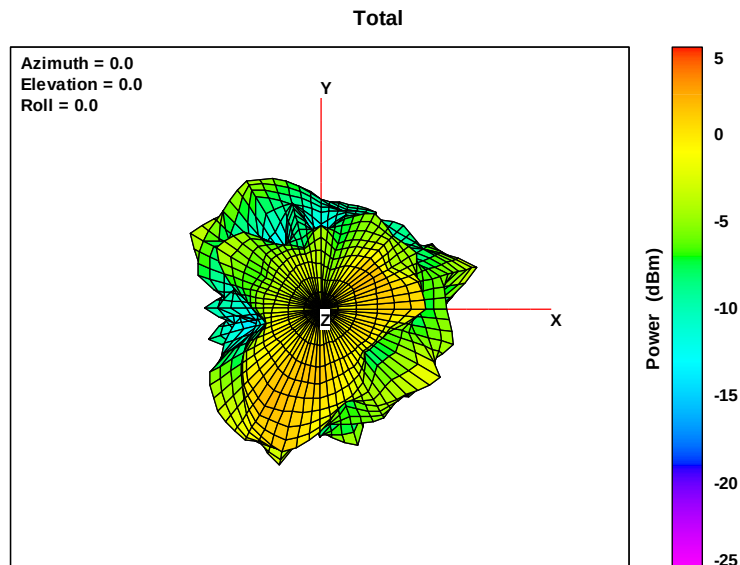


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.32

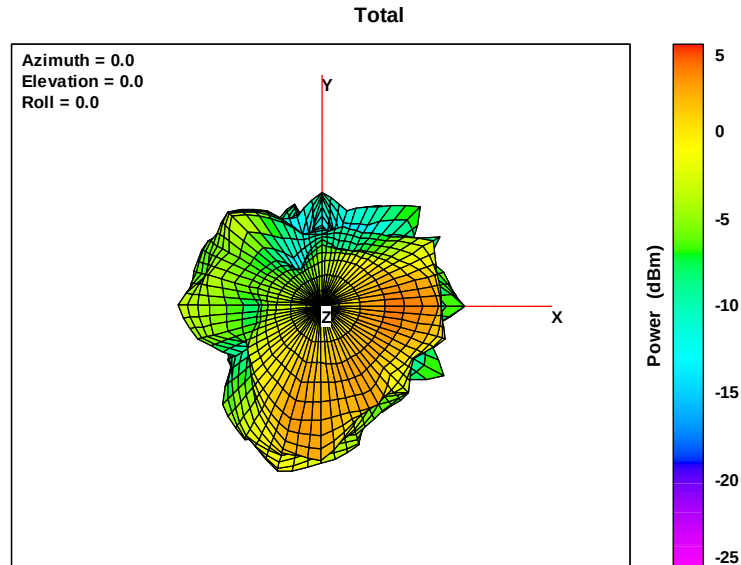


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.53

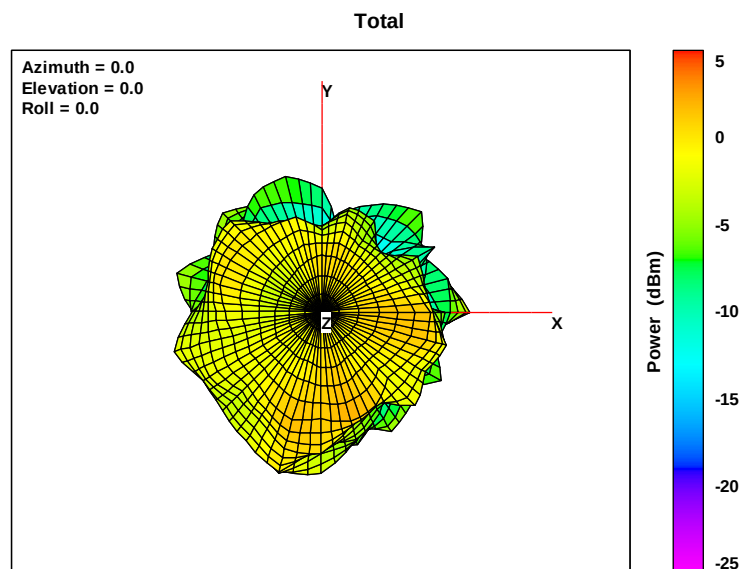

Annex A. Photographs


A.1 Setup Photo

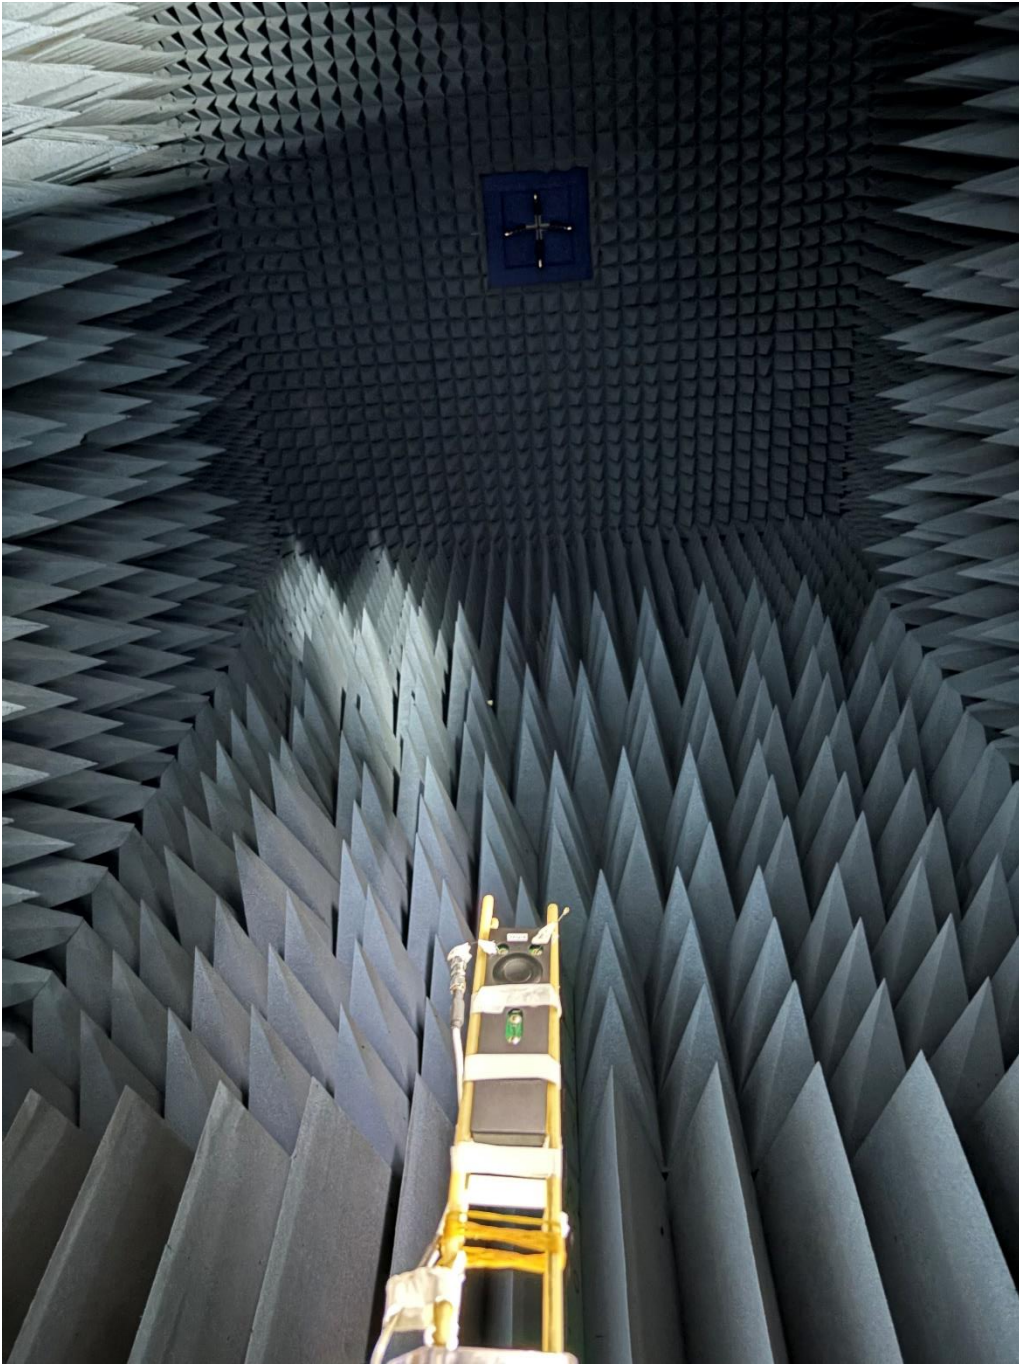

A.2 Test sample


Main Antenna

Antenna Drawing



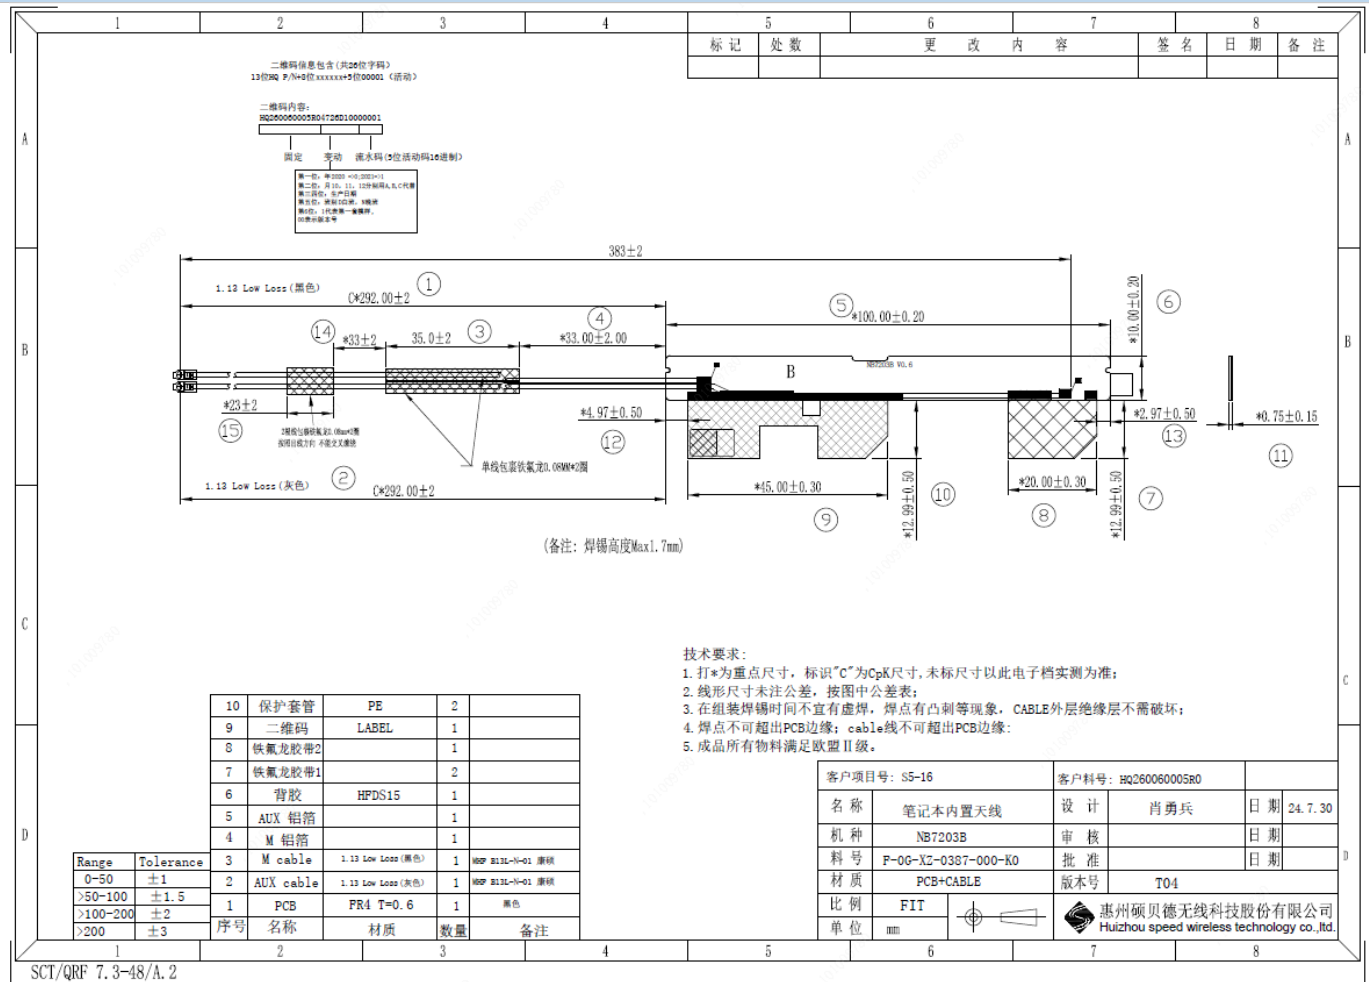


Antenna Photo

Front

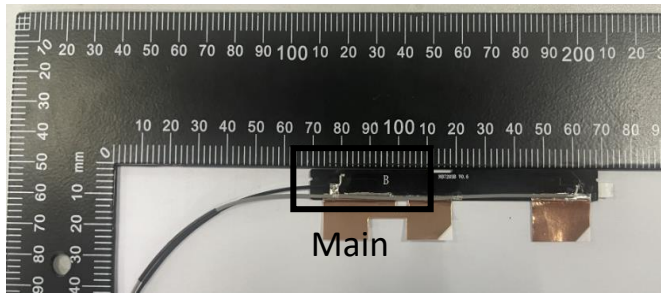

Back

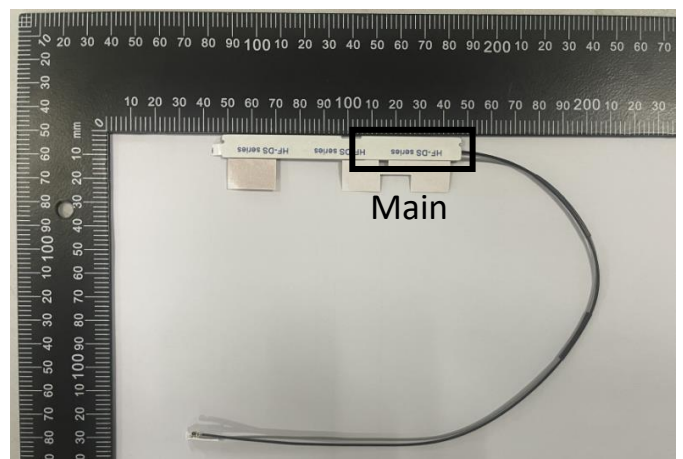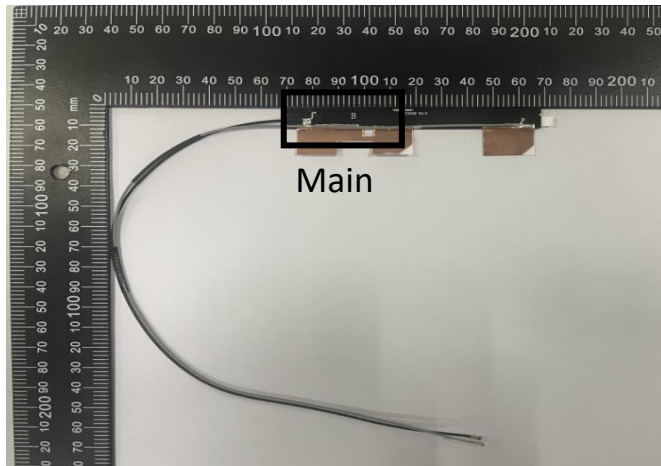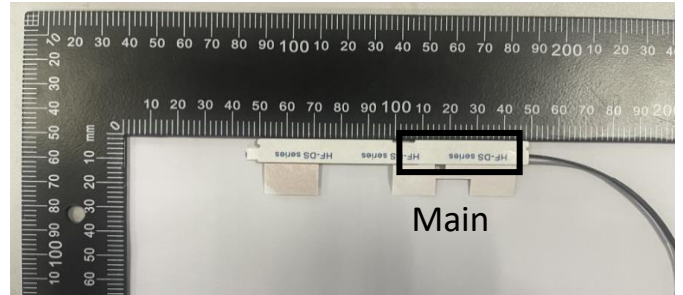

Note: antenna photo should include L type ruler

1	2	3	4	5	6	7	8
				标记	处数	更改内容	签名 日期 备注

二维码信息包含(共2位字符)

13位BQ P/N+8位XXXXXX+5位00001 (活动)

二维码内容:

固定 浮动 座标码(9位活动码16进制)

第一位: *为必填 *0-9或A-F
 第二位: 后10、11、12为预留 A、C、F 必需
 第三位: 必产且需
 第四位: 必须为0-9、A-F
 第五位: 1代表第一套操作
 10代表第二套

(备注: 焊锡高度Max1.7mm)

技术要求:



- 打*为重点尺寸, 标识“C”为CpK尺寸, 未标尺寸以此电子档实测为准;
- 线形尺寸未注公差, 按图中公差表;
- 在组装焊接时不宜有虚焊, 焊点有凸刺等现象。CABLE外层绝缘层不需破坏;
- 焊点不可超出PCB边缘; cable线不可超出PCB边缘;
- 成品所有物料满足欧盟II级。

序号	名称	材质	数量	备注
10	保护套管	PE	2	
9	二维码	LABEL	1	
8	铁氟龙胶带2		1	
7	铁氟龙胶带1		2	
6	背胶	HFDS15	1	
5	AUX 铝箔		1	
4	M 铝箔		1	
3	M cable	1.13 Low Loss (灰色)	1	NOP B13L-V-01 康硕
2	AUX cable	1.13 Low Loss (灰色)	1	NOP B13L-V-01 康硕
1	PCB	FR4 T=0.6	1	黑色



客户项目号:	S5-16	客户料号:	HQ260060005R0	
名称	笔记本内置天线	设计	肖勇兵	日期 24.7.30
机种	NB7203B	审核		日期
料号	F-0G-XZ-0387-000-K0	批准		日期
材质	PCB+CABLE	版本号	T04	
比例	FIT	惠州硕贝德无线科技股份有限公司 Huizhou speed wireless technology co.,ltd.		
单位	mm			

Antenna Photo

Front

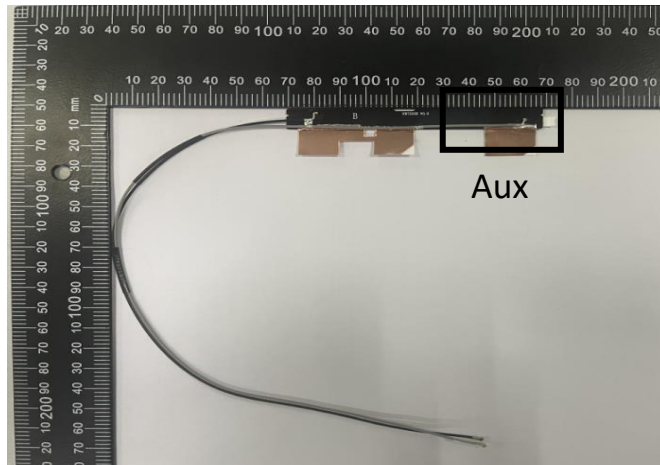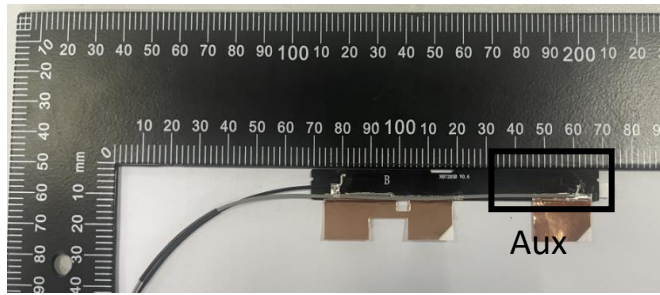

Back

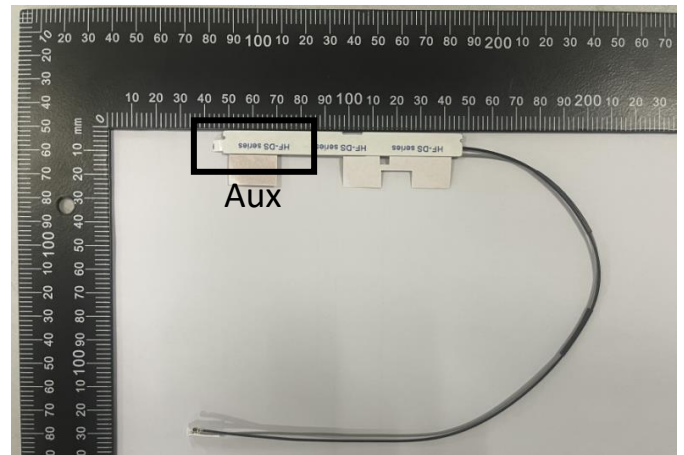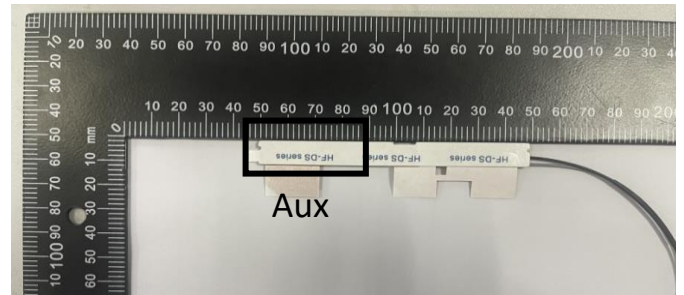


Note: antenna photo should include L type ruler

Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

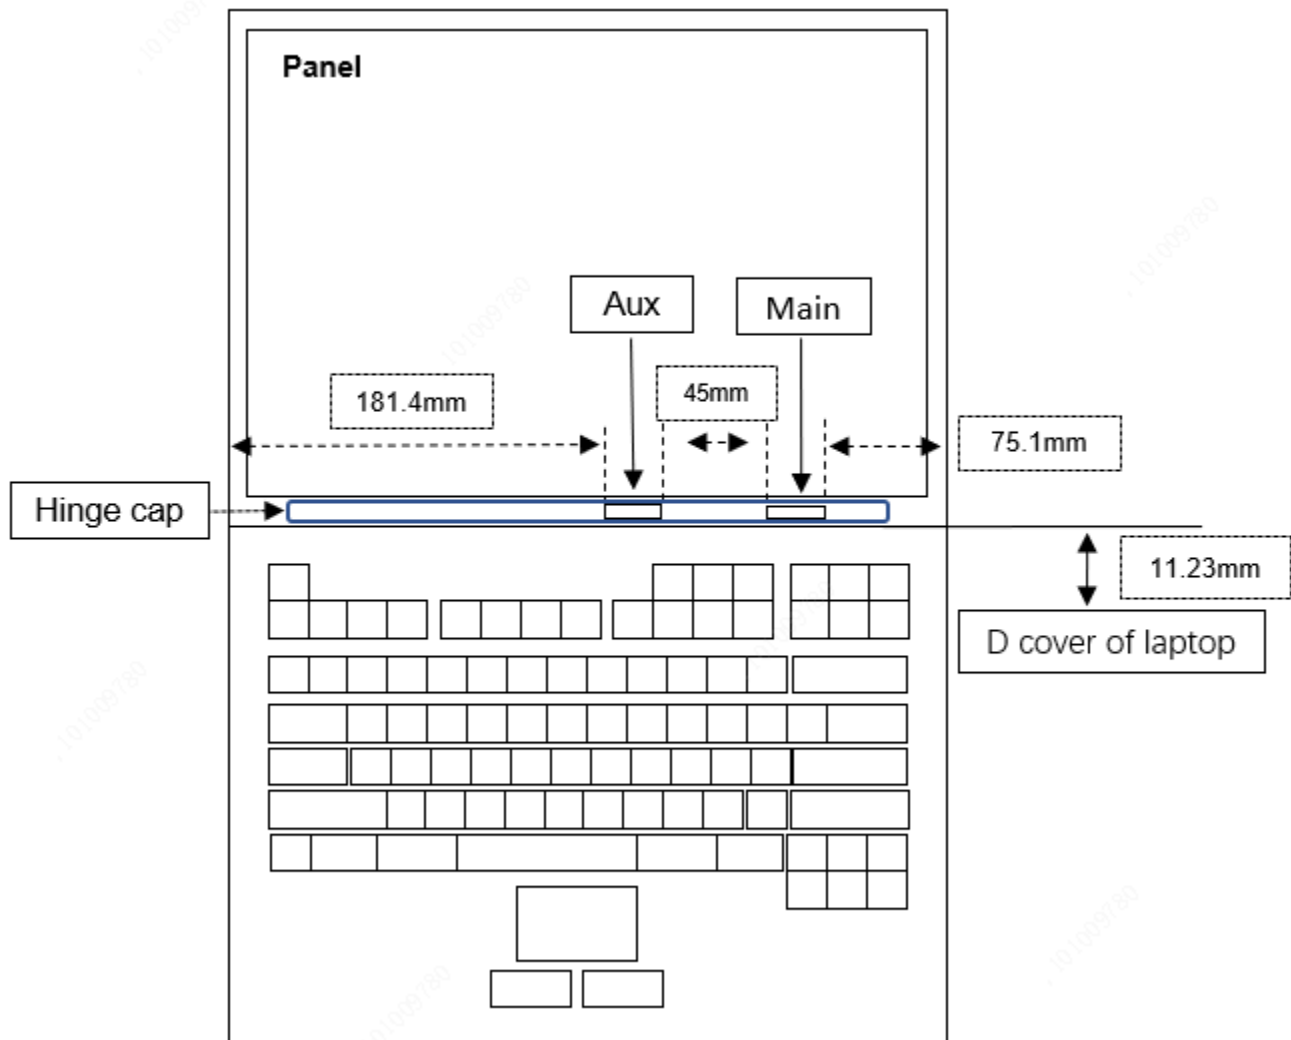

B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

