

ANTENNA INFORMATION

OEM	Lenovo
ODM	Huaqin
Platform model name	IdeaPad Slim 5 14ARP10 IdeaPad Slim 5 14AHP10 IdeaPad Slim 5 14AKP10
Intel platform (ex: Yes, No or NA)	NA
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB
SAR minimum separation (mm)	FCC (1g) 11.22 ISED (1g) 11.22 ISED (10g)

Antenna manufacturer	Company name	Huizhou speed wireless technology co.,ltd.
	Address	No. 138 Huize Avenue, Dongjiang High tech Industrial Park, hongkai High tech Zone, Huizhou City, Guangdong Province
Test location	Company name	Huizhou speed wireless technology co.,ltd.
	Address	No. 138 Huize Avenue, Dongjiang High tech Industrial Park, Zhongkai High tech Zone, Huizhou City, Guangdong Province
Test Personnel	Name(Full name)	YuLei
	E-mail	yl@speed-hz.com
	Tel/Mobile	(+086) 18762864066
Testing date		2024/08/21

Antenna Part number	Main	F-0G-XZ-0386-000-K0
	Aux	F-0G-XZ-0386-000-K0
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss*											
		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Main	Peak gain(dBi)	1.96	2.81	3.12	2.76	3.15	3.04	3.16	3.34	2.64	3.17
	cable loss (dB)	0.73	1.16	1.16	1.16	1.16	1.16	1.2	1.3	1.3	1.3
Aux	Peak gain(dBi)	2.46	1.19	1.97	1.87	3.21	2.76	2.72	3.25	3.12	3.06
	cable loss (dB)	0.85	1.3	1.3	1.3	1.3	1.3	1.3	1.4	1.4	1.4
Cable Assembly Part Number and Information											
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type Brand/ Part Number		Connector type				
Main	M-Z4-SD-0113-107-KA	247	1.13	50	Kangsuo NGFF: MHF-B13-N-01		MHF-4L				
Aux	M-Z4-SD-0113-107-GA	339	1.13	50	Kangsuo NGFF: MHF-B13-N-01		MHF-4L				

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

N/A

Revision #	Revision Details	Issued Date
------------	------------------	-------------


2. Document Revision History

3. Test & System Description

3.1 Measurement Method and System

This test report is prepared for host antenna testing under a Full Anechoic Chamber.

3.2 Test setup

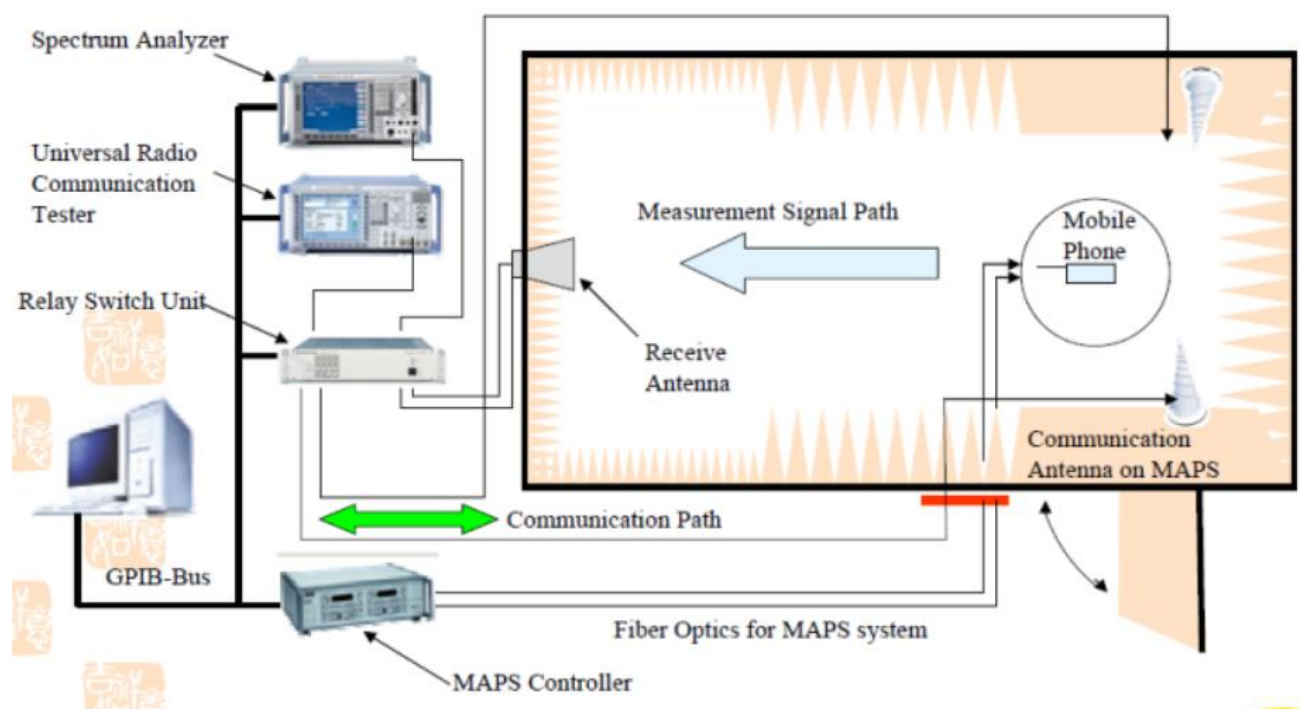

3.3 Equipment list


Number	Device	Manufacturer	Cal.Date	Cal.Due.Date
1	Chamber	ETS-Lindgren	2024/5/6	2025/5/5
2	Horn Antenna	ETS-Lindgren	2024/5/6	2025/5/5
3	VNA	Keysight	2024/8/2	2025/8/1
4	TR/RX Amplifier	ETS-Lindgren	2024/5/6	2025/5/5
5	Switch	Keysight	2024/8/2	2025/8/1
6	Turntable Controller	ETS-Lindgren	NA	NA
7	UPS	huawei	NA	NA
8	Test System	ETS-Lindgren	NA	NA

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	1.96

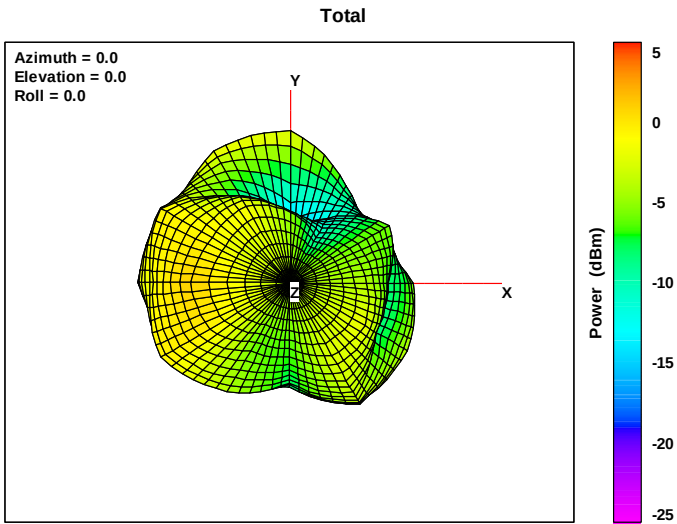


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.81

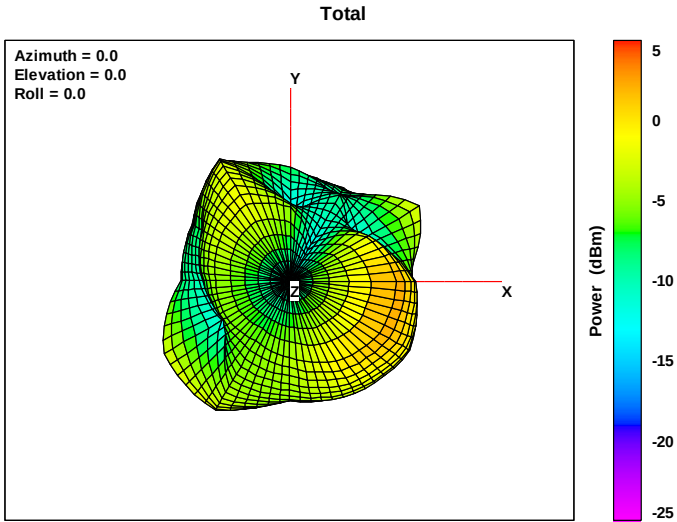


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	3.12

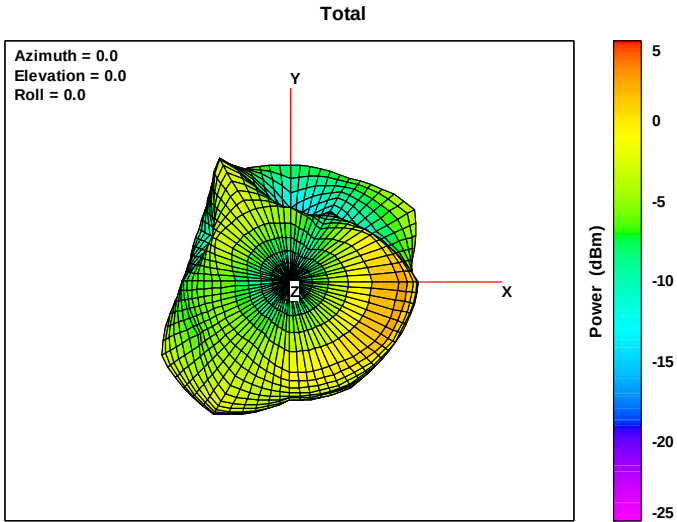


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	2.76

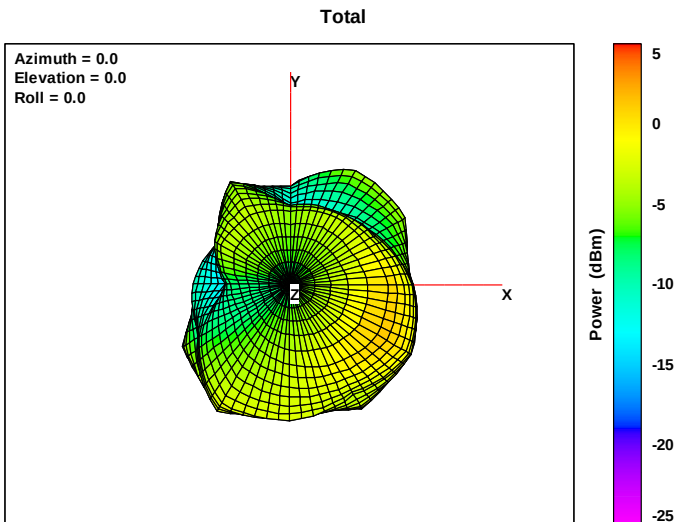


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.15

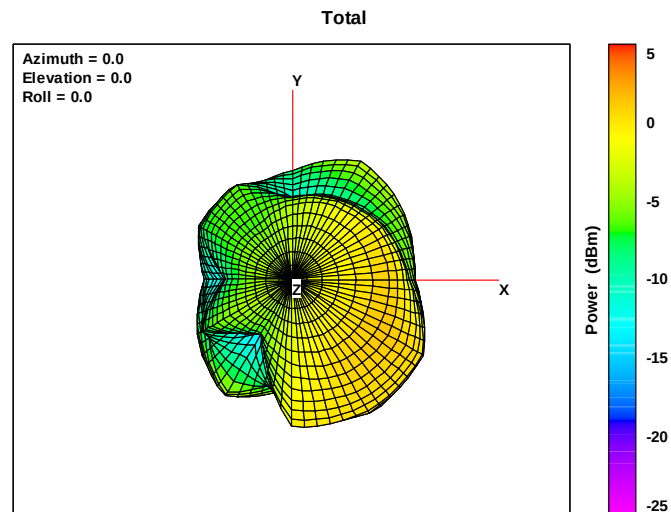

Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	3.04

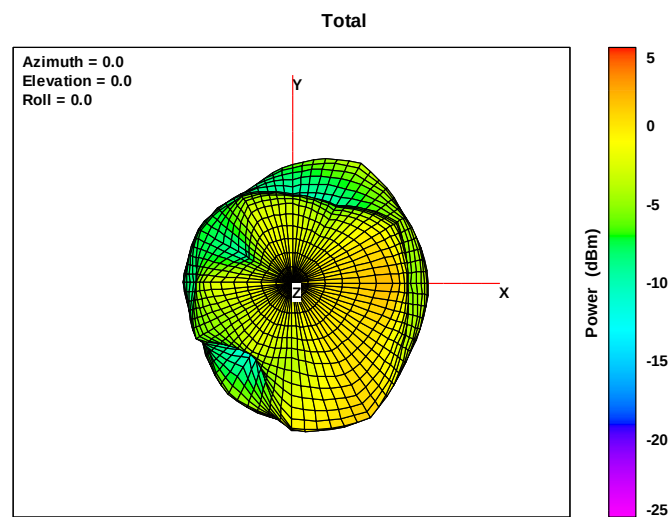

Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
-----------------	-------------------------------

5925-6425	3.16
-----------	------

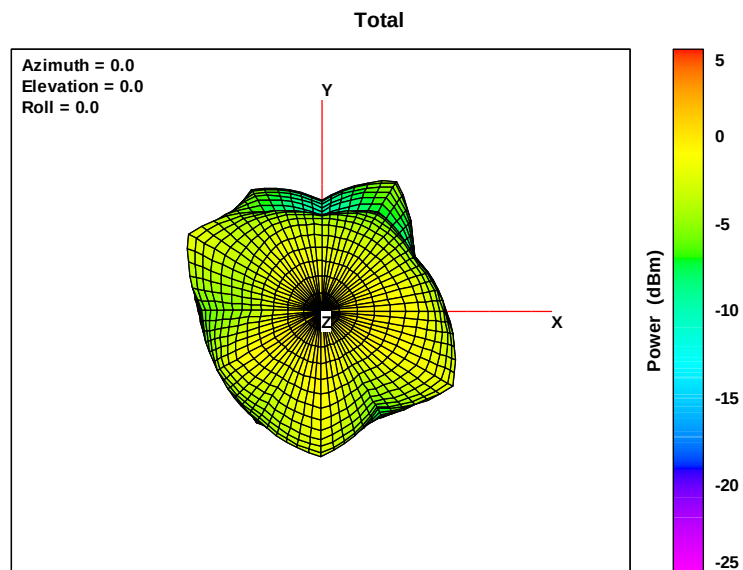


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.34

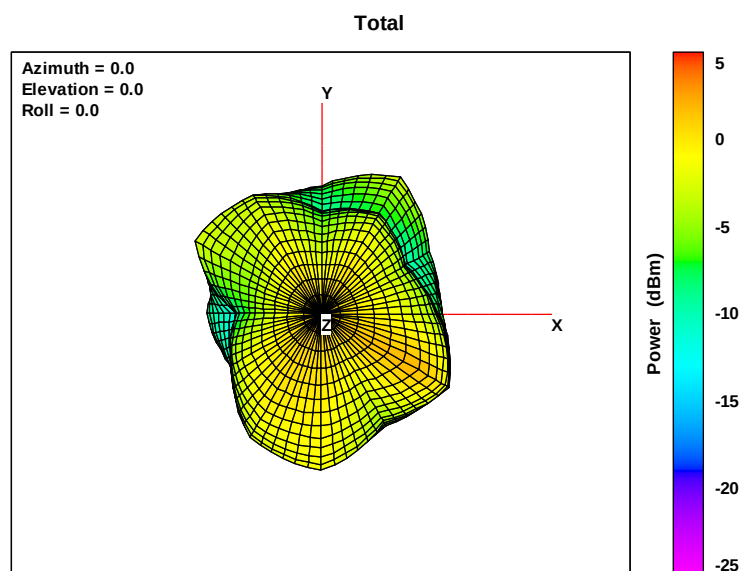


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	2.64

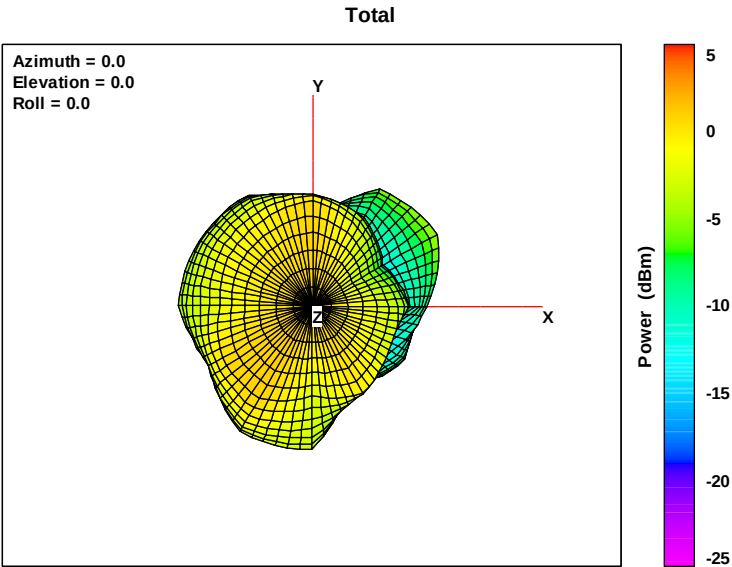

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.17

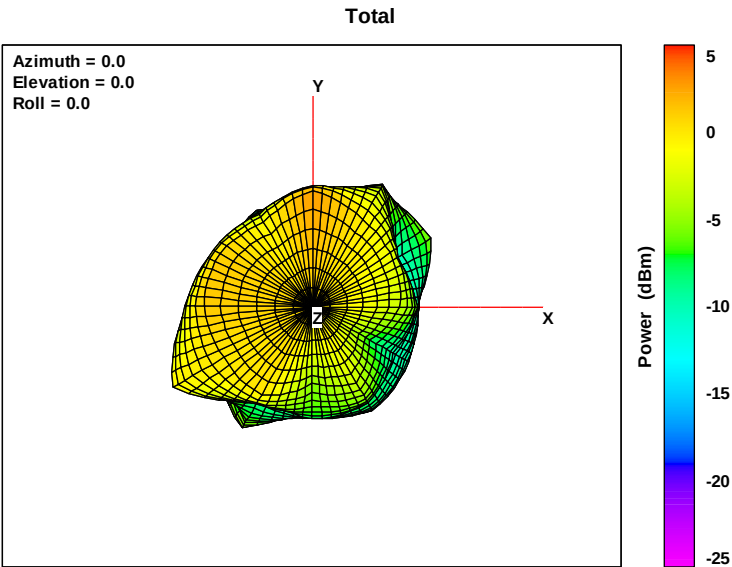

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	2.46

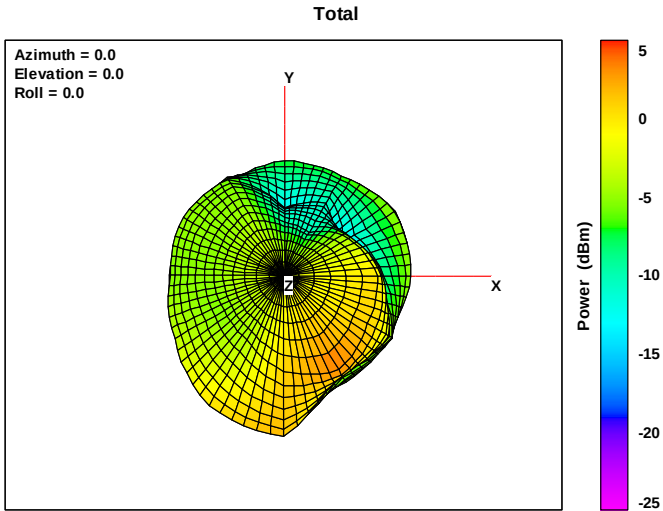


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	1.19

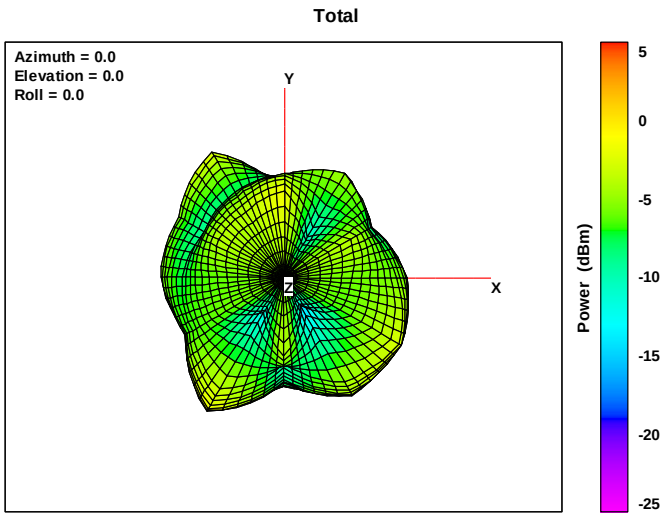


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	1.97

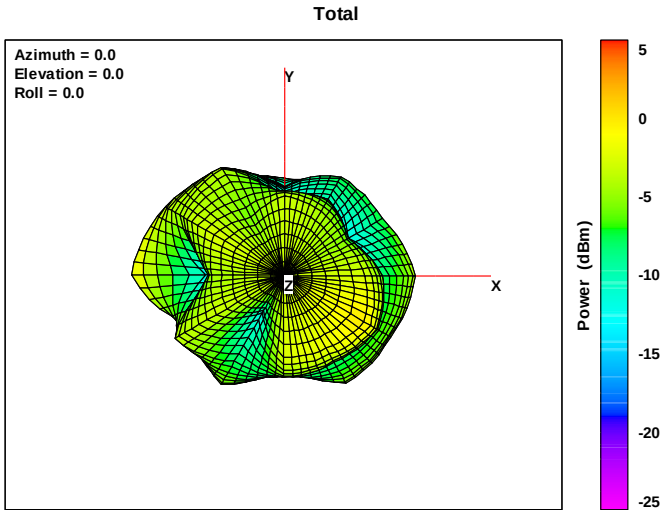


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.87

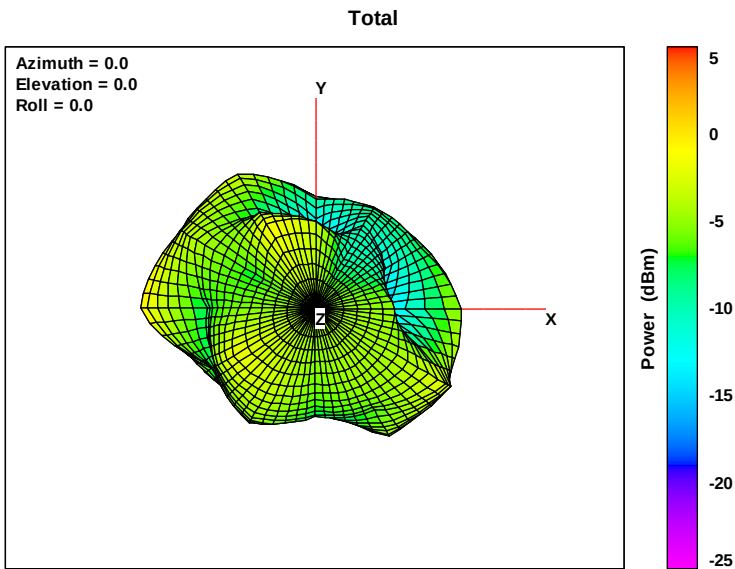


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	3.21

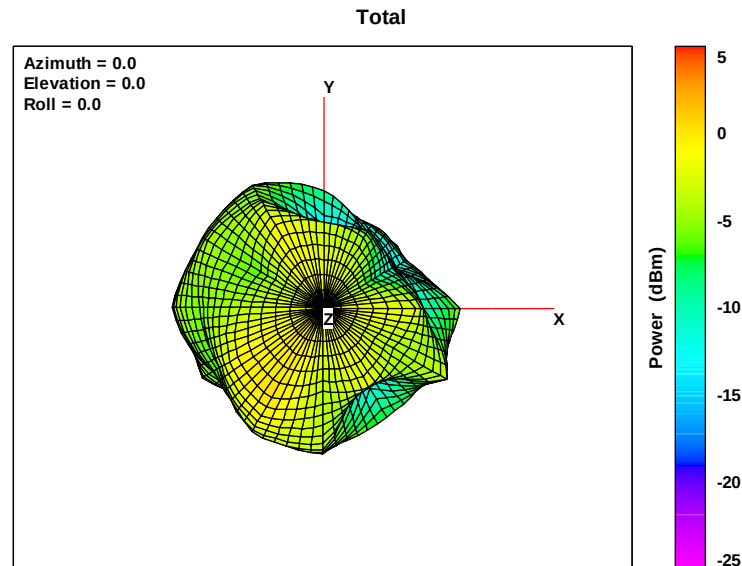

Max Antenna 3D Radiation Pattern 5850-5895 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	2.76

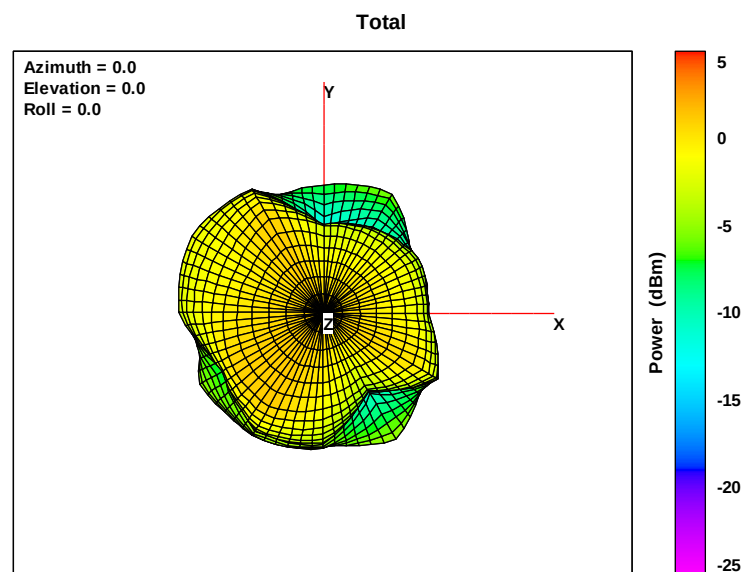

Max Antenna 3D Radiation Pattern 5925-6425 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
-----------------	-------------------------------

5925-6425	2.72
-----------	------

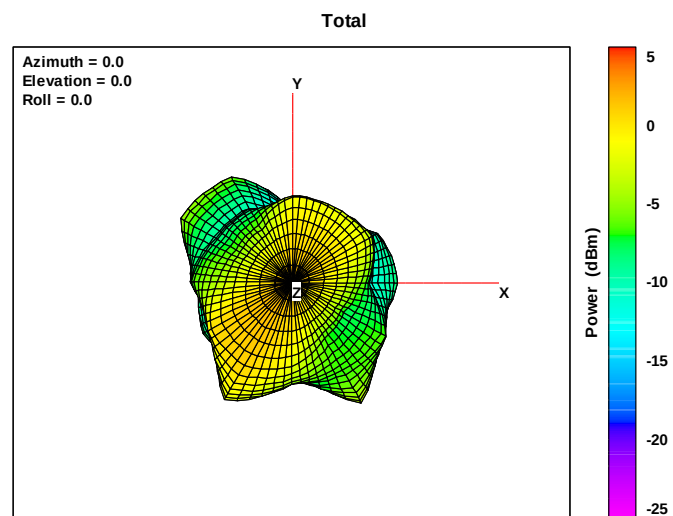


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	3.25

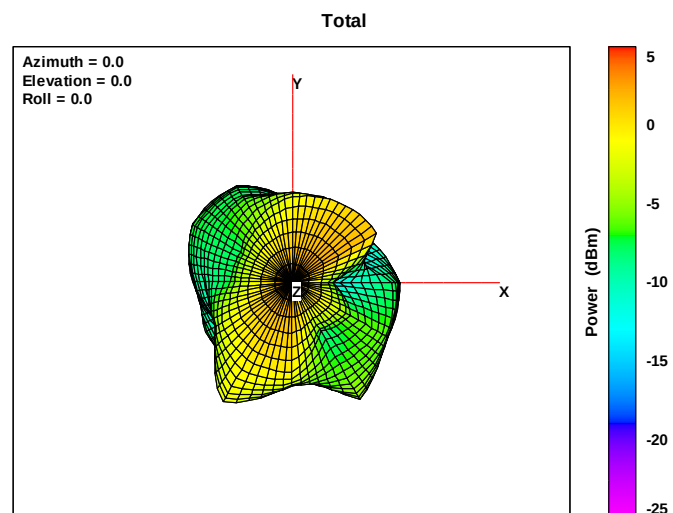


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	3.12

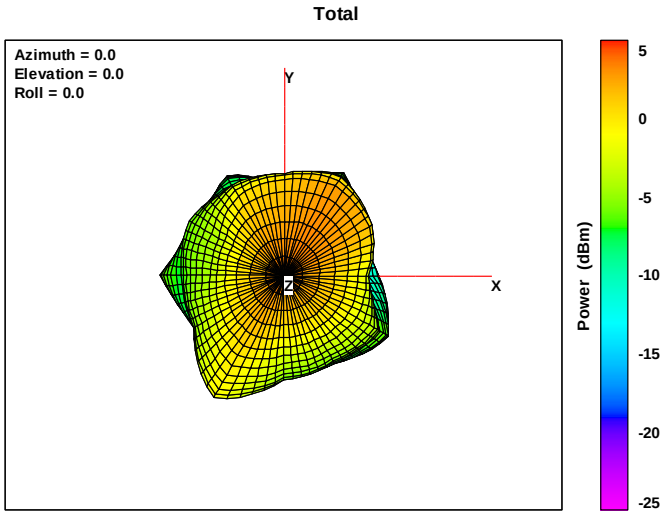


Max Antenna 3D Radiation Pattern 6875-7125 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	3.06

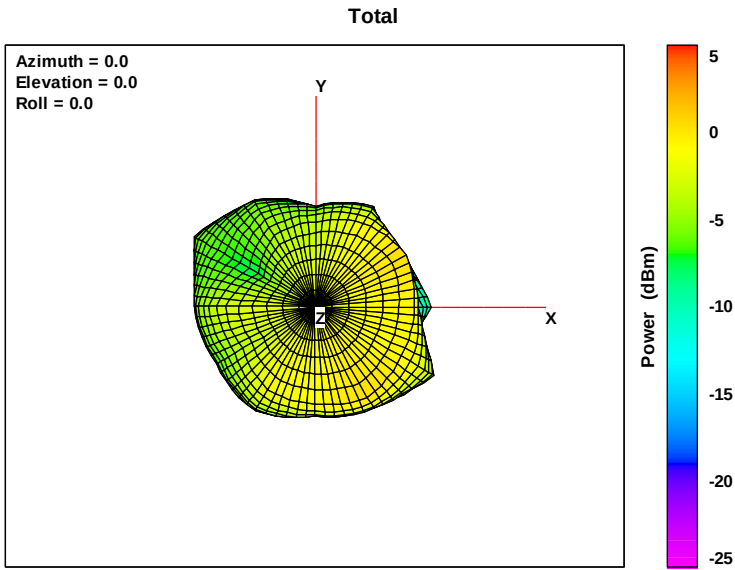

Annex A. Photographs


A.1 Setup Photo

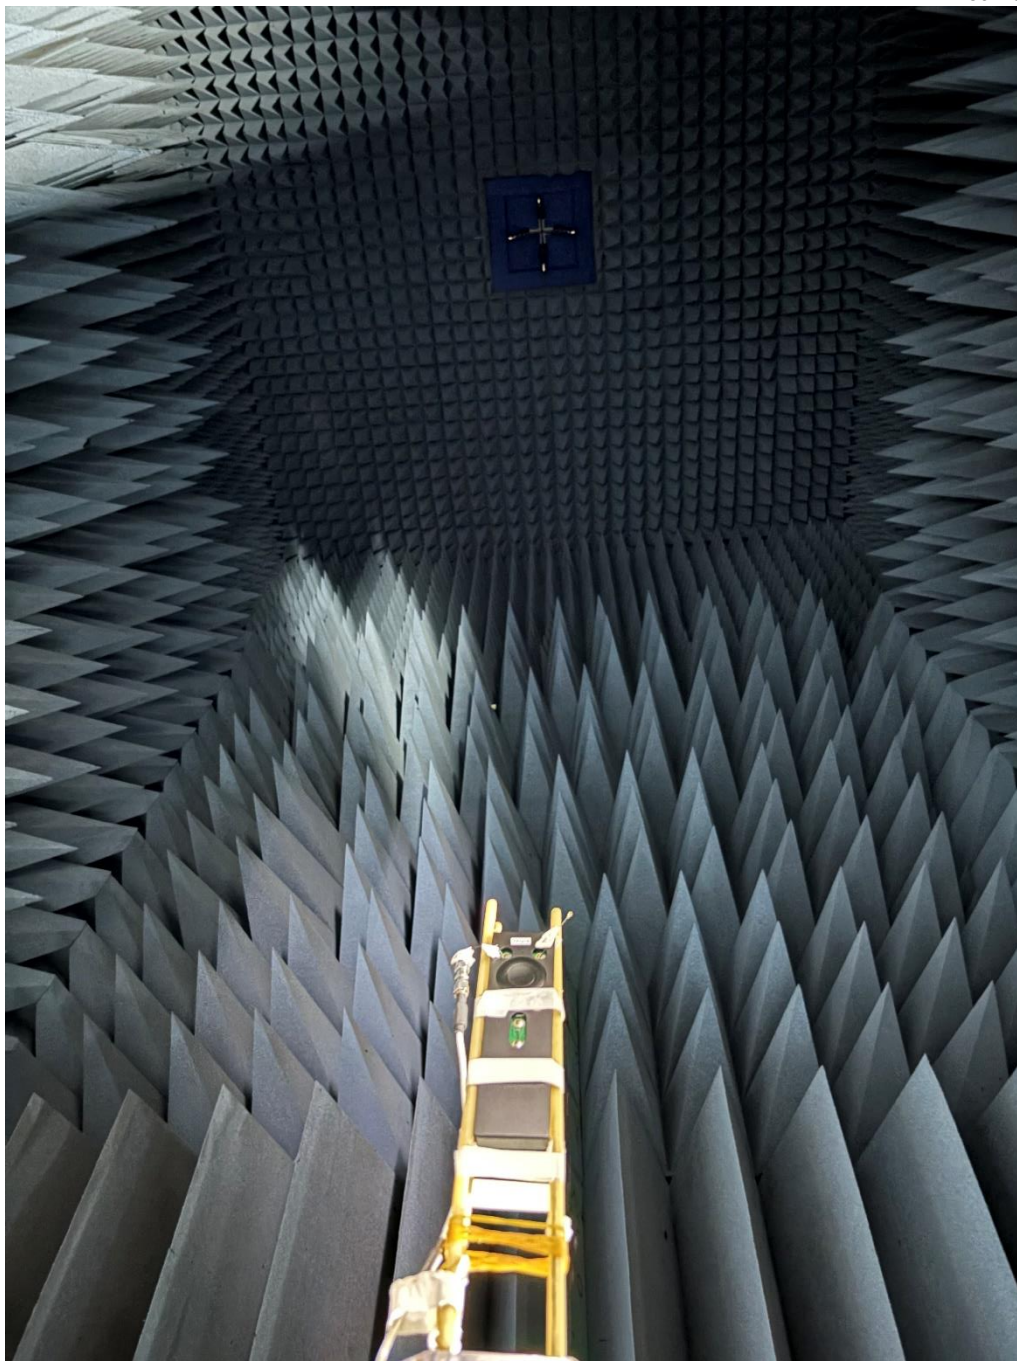

A.2 Test sample

Main Antenna





Antenna Drawing

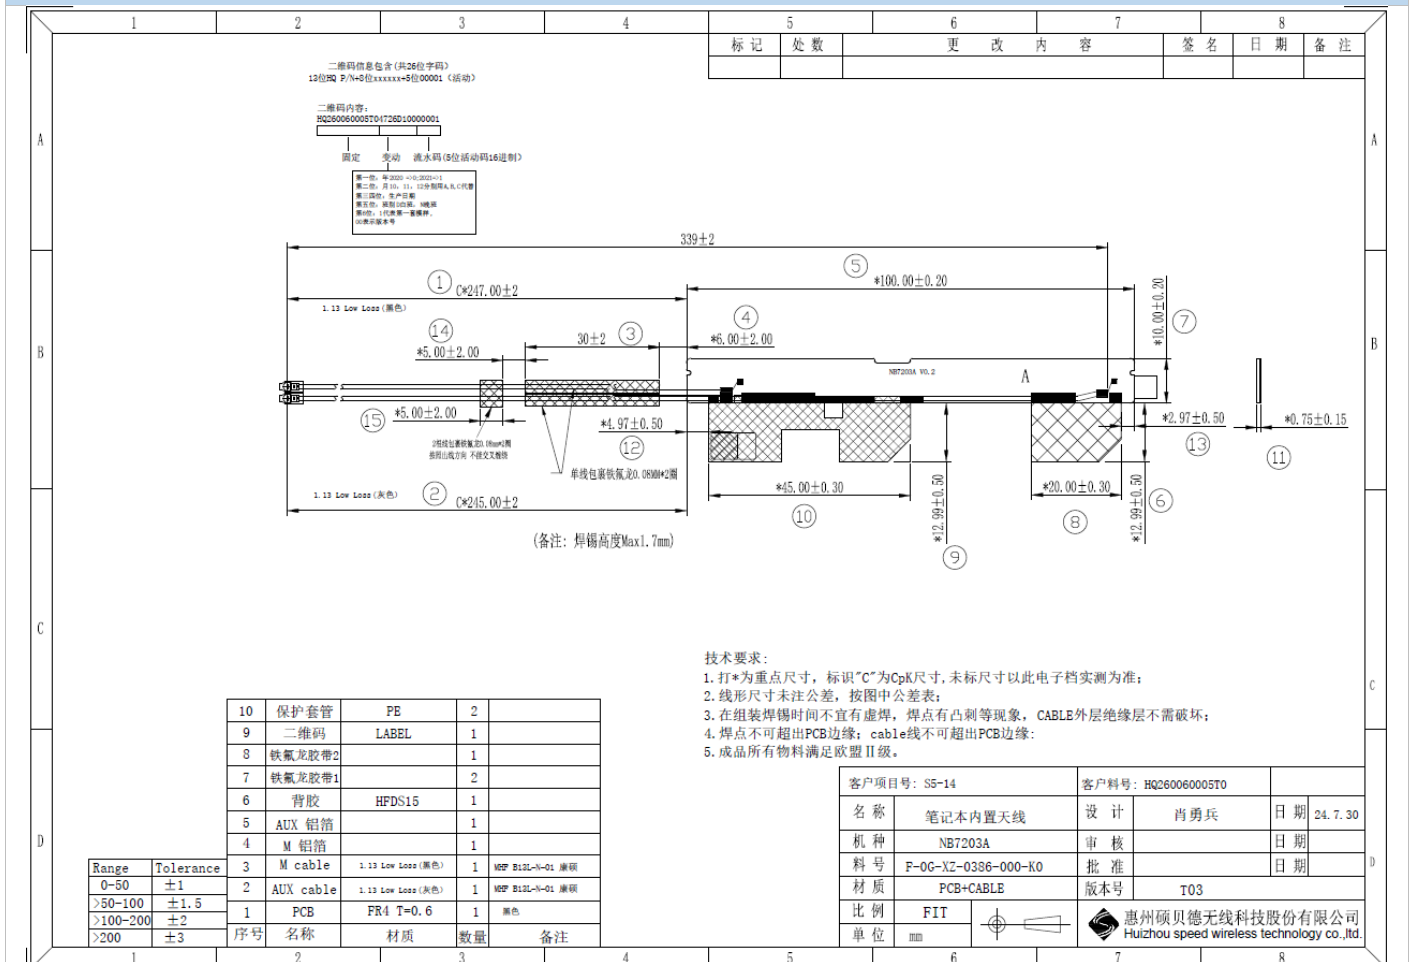

Antenna Photo

Front


[Back](#)

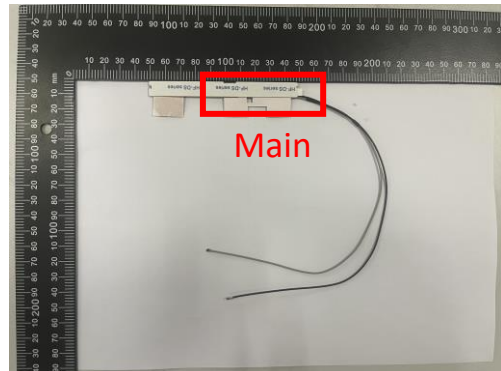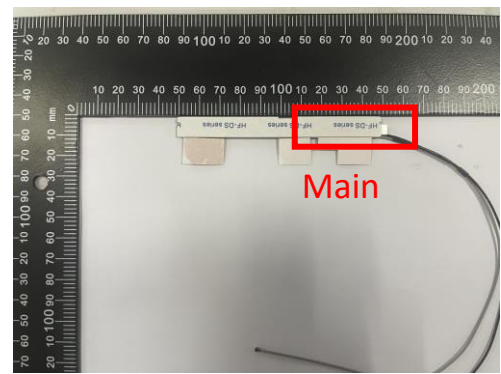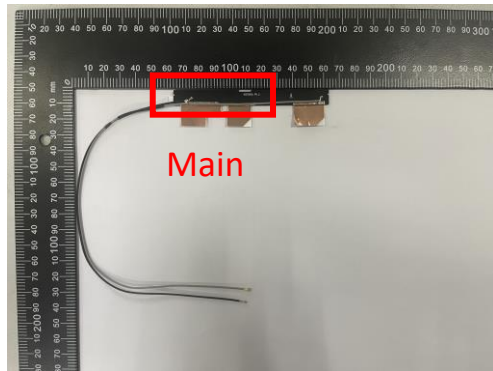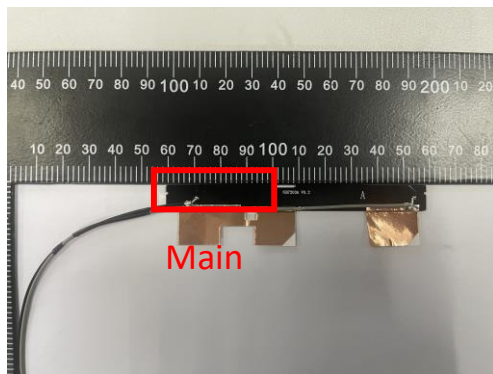

Note: antenna photo should include L type ruler

Aux Antenna





Antenna Drawing

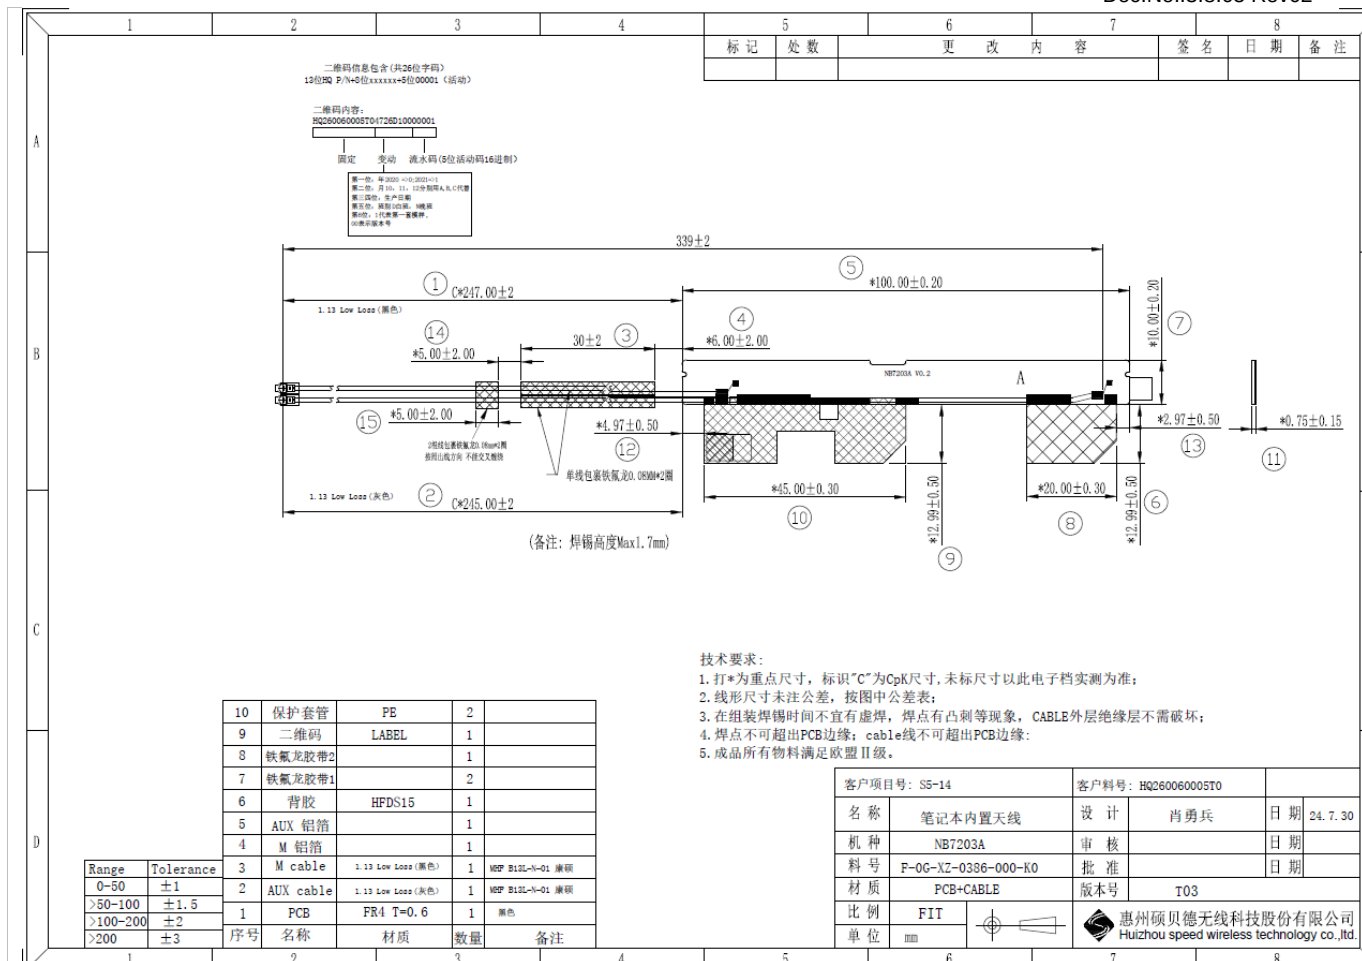

Antenna Photo

Front

Back

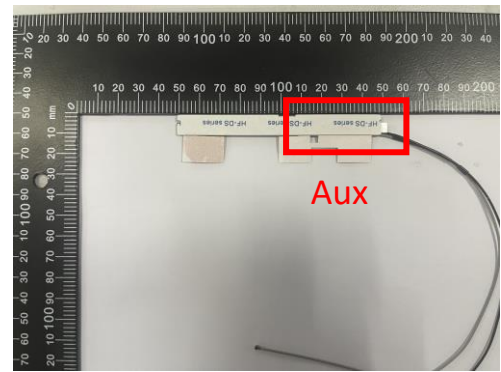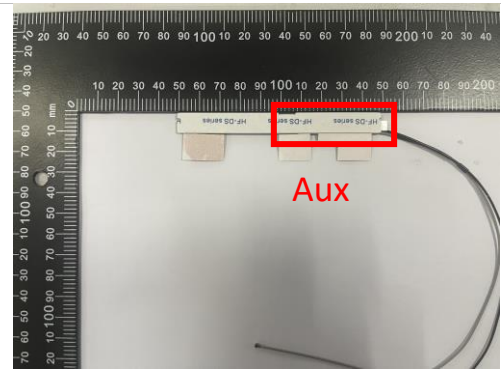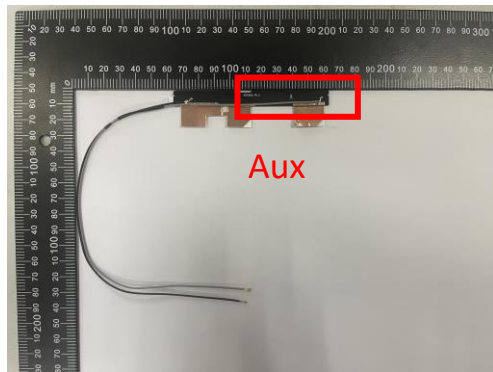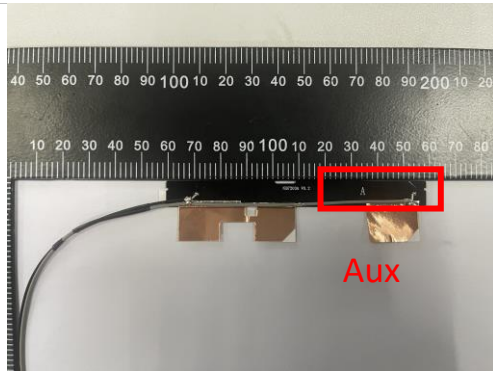


Note: antenna photo should include L type ruler

Annex B. Antenna Location

B.1 Antenna Host Platform Location Information

Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

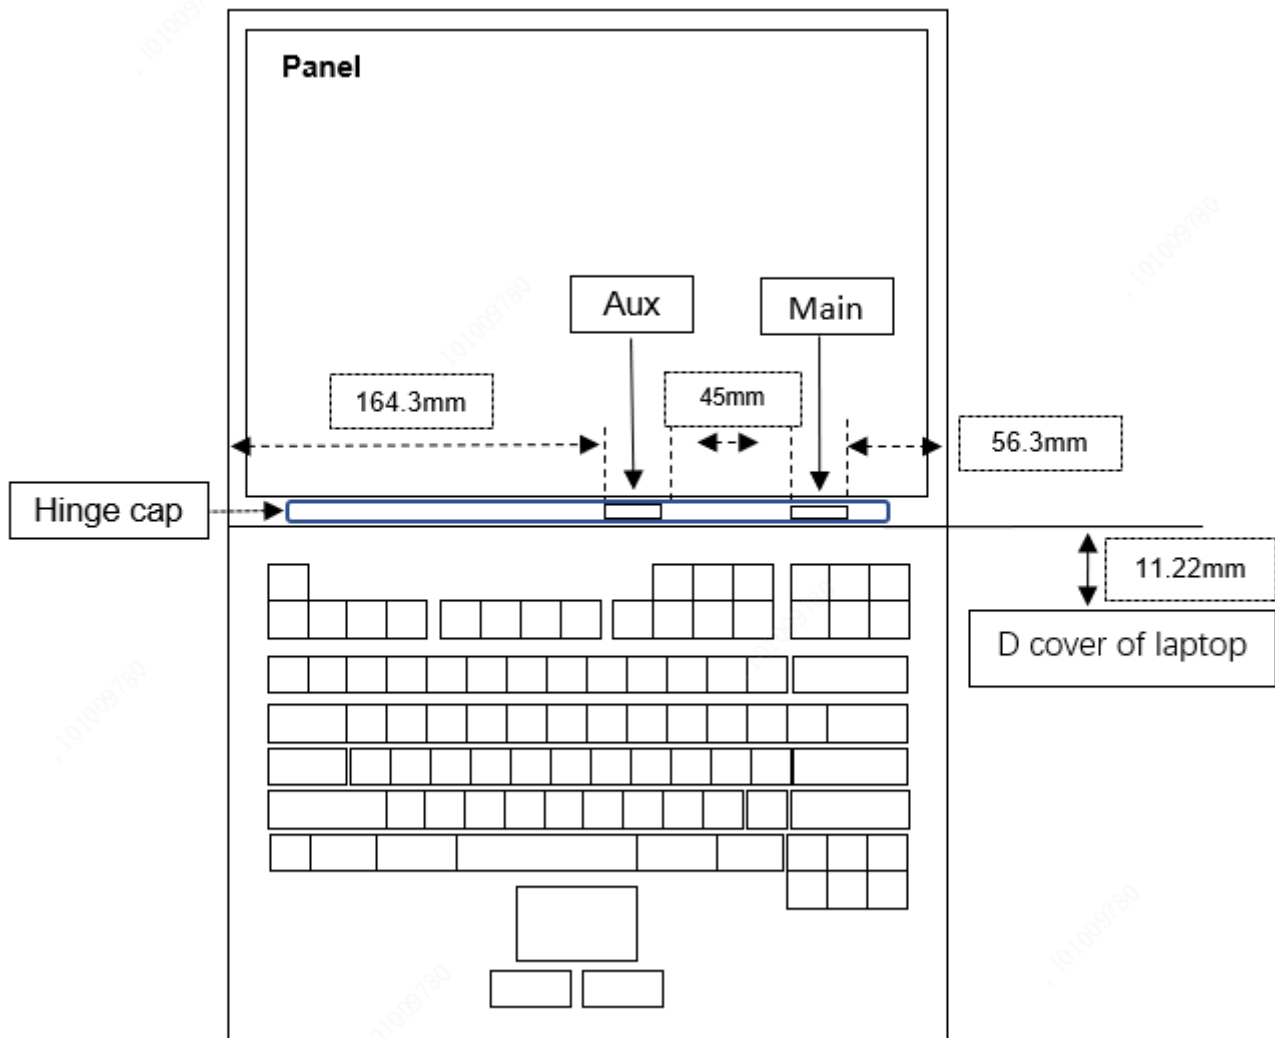

B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait,

primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

Antennas on the panel section

