



Compliance Certification Services Inc.

Report No. : T110107404-RP1

FCC ID: U6A-BR081N

Reference No.: T100909406-RP1

Date of Issue: January 28, 2011

FCC 47 CFR PART 15 SUBPART C: 2009 AND ANSI C63.4: 2003

TEST REPORT

For

11n Mini Router

Model Number : BR081n

Data Applies To : BR080n

Brand: ETOP

Issued for

E-Top Network Technology Inc.

No. 82 ,Gongye 2nd Rd.,Tainan City 70955,Taiwan,R.O.C.

Issued by

**Compliance Certification Services Inc.
Tainan Lab.**

**No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua
Township, Tainan Hsien 712, Taiwan R.O.C.**

TEL: 886-6-580-2201

FAX: 886-6-580-2202



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document

Total Page: 118



REVISION HISTORY

Rev.		Issue Date		Revisions	Effect Page	Revised By
00		January 28, 2010		Initial Issue	ALL	Kate Shi



TABLE OF CONTENTS

1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
2.1 DESCRIPTION OF EUT & POWER.....	5-7
3. DESCRIPTION OF TEST MODES.....	7
4. TEST METHODOLOGY.....	8
5. FACILITIES AND ACCREDITATIONS.....	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
5.3 LABORATORY ACCREDITATIONS LISTINGS	8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	9
6. CALIBRATION AND UNCERTAINTY	10
6.1 MEASURING INSTRUMENT CALIBRATION	10
6.2 MEASUREMENT UNCERTAINTY	10
7. SETUP OF EQUIPMENT UNDER TEST	11
7.1 SETUP CONFIGURATION OF EUT	11
Above 1GHz Test Setup:	11
Below 1GHz Test Setup:	11
7.2 SUPPORT EQUIPMENT	12
7.3 EUT OPERATING CONDITION	13
8. APPLICABLE LIMITS AND TEST RESULTS.....	14
8.1 6DB BANDWIDTH	14-25
8.2 MAXIMUM PEAK OUTPUT POWER.....	25-28
IEEE 802.11b mode	28-37
8.3 MAXIMUM PERMISSIBLE EXPOSURE.....	37
8.3 MAXIMUM PERMISSIBLE EXPOSURE.....	37-39
8.4 POWER SPECTRAL DENSITY.....	39-49
8.5 CONDUCTED SPURIOUS EMISSION.....	49-62
8.6 RADIATED EMISSIONS	62
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS	62-66
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz.....	66
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz.....	67-91
8.6.4 RESTRICTED BAND EDGES	91-109
8.7 POWERLINE CONDUCTED EMISSIONS	109-113
9. ANTENNA REQUIREMENT	113
9.1 STANDARD APPLICABLE.....	113
9.2 ANTENNA CONNECTED CONSTRUCTION	113
APPENDIX SETUP PHOTOS.....	114-118



1. TEST REPORT CERTIFICATION

Applicant : E-Top Network Technology Inc.
Address : No. 82 ,Gongye 2nd Rd.,Tainan City 70955,Taiwan,R.O.C.
Manufacture : Amigo Technology Inc.
Address : 5F., No. 63, Ln. 77, Xing'ai Rd., Neihu Dist., Taipei City 114, Taiwan
Equipment Under Test : 11n Mini Router
Model Number : BR081n
Data Applies To : BR080n
Brand Name : ETOP
Date of Test : December 14, 2010-January 26, 2011

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C : 2009 AND ANSI C63.4 : 2003	No non-compliance noted

Approved by:

Jeter Wu
Assistant Manager

Reviewed by:

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

2.1 DESCRIPTION OF EUT & POWER

Product Name	11n Mini Router
Model Number	BR081n
Data Applies To	BR080n
Brand	E-Top Network Technology Inc.
Frequency Range	IEEE 802.11b/g, 802.11n HT20 (DTS Band):2412MHz~2462MHz IEEE 802.11n HT40 (DTS Band):2422MHz~2452MHz
Transmit Power	IEEE 802.11b Mode : 16.39dBm (DTS Band) (43.5512 mW) IEEE 802.11g Mode : 19.01dBm (DTS Band) (79.6159 mW) IEEE 802.11n HT20 Mode : 18.28dBm (DTS Band) (67.2977 mW) IEEE 802.11n HT40 Mode : 17.64dBm (DTS Band) (58.0764 mW)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40: 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20:11 Channels IEEE 802.11n HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b :11, 5.5, 2, 1Mbps IEEE 802.11g : 54, 48 ,36, 24, 18, 12, 9, 6Mbps IEEE 802.11n HT20 : 130, 117 ,104, 78, 65, 58.5, 52, 39, 26, 19.5, 3, 6.5Mbps IEEE 802.11n HT40 : 300, 270, 243 ,216, 162, 135, 121.5, 108, 81, 54, 40.5, 27, 13.5Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Frequency Selection	By software / firmware
Antenna Type	This is a 1TX1RX device with one antenna PIFA antenna *1 (1TX1RX) Manufacture: BRITO TECHNOLOGY Model: EM-15 Gain: 1.27dBi Type: PIFA Connector: Printed
Power Source	Manufacture: Keen Ocean Industrial Ltd Model: S01-005-0050-01000 SWP-80189-00 Input:100-240Vac, 50/60Hz, 0.15A max Output:5.0Vdc, 1A
Temperature Range	0 ~ +40°C

REMARK:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: U6A-BR081N filing to comply with Section 15.207,15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the user manual.
4. The showed series model as the same except for different the marketing purpose.

**Multiple Listing:**

Company Name / Address	Brand Name	Model Name	Product Name
E-Top Network Technology Inc. No. 82 ,Gongye 2nd Rd.,Tainan City 70955,Taiwan,R.O.C.	ETOP	BR080n, BR081n	11n Mini Router
Amigo Technology Inc. 5F., No. 63, Ln. 77, Xing'ai Rd., Neihu Dist., Taipei City 114, Taiwan	Amigo	BR080n, BR081n	11n Mini Broadband Router
CNet Technology Inc. 1F, No.30, Industry E.RD.IX, Science-Based Industrial Park, Hsin-Chu, Taiwan, R.O.C.	CNet	CQR-980, CQR-981, CQR-982, CQR-983, CQR-984, CQR-985, CQR-986, CQR-987, CQR-988, CQR-989	Wireless-N Pico Mobil Router
Sapido Technology Inc. No. 383., Sec. 2, Minsheng Rd., West Central District, Tainan 700, Taiwan, R.O.C.	SAPIDO	RB-1602 RB-1632	Light N+ Broadband Router Light N+ Broadband Router - All Boradbands



3. DESCRIPTION OF TEST MODES

The EUT is a 11n Mini Router

The RF chipset is manufactured by Realtek Semiconductor Corp.

The antenna peak gain 1.27 dBi (highest gain) were chosen for full testing.

IEEE 802.11 b ,802.11g ,802.11n HT20 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rates (worst case) were chosen for full testing.

IEEE 802.11g mode: 6Mbps data rates (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode: 6.5Mbps data rates (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode (DTS Band)

The EUT had been tested under operating condition.

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode: 13.5Mbps data rates (worst case) were chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD, peak power and average power across all the data rates, bandwidths, modulations and spatial stream modes.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua Township, Tainan Hsien 712, Taiwan R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.7:1992, ANSI C63.4: 2003 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by Taiwan Accreditation Foundation for the specific scope of accreditation under Lab Code: 1109 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by TAF or any agency of the Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037 and 455173).



5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 455173 TW-1037
Taiwan	TAF	CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, EN 60601-1-2, CISPR 22, CNS 13438, EN 55022, EN 55024, AS/NZS CISPR 22 CISPR 14, EN 55014-1, EN 55014-2, CNS 13783-1, CISPR 22, CNS 13439, EN 55013, FCC Method-47 CFR Part 15 Subpart B, IC ICES-003, VCCI V-3 & V-4 FCC Method-47 CFR Part 15 Subpart C and ANSI C63.4, LP 0002 EN / IEC 61000-4-2 / -3 / -4 / -5 / -6 / -8 / -11 EN 61000-3-2, EN 61000-3-3 EN 61000-6-3, EN 61000-6-1, AS/NZS 4251.1, EN 61000-6-4, EN 61000-6-2, AS/NZS 4251.2, EN 61204-3, EN 50130-4, EN 62040-2, EN 50371, EN 50385, AS/NZS 4268, ETSI EN 300 386 ETSI EN 300 328, ETSI EN 301 489-1/-3/-9/-17 ETSI EN 301 893, ETSI EN 300 220-2/-1 ETSI EN 300 440-2/-1 ETSI EN 301 357-2/-1 RSS-310, RSS-210 Issue 7, RSS-Gen Issue 2	
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS13439	 SL2-IN-E-0039 SL2-R1/R2-0039 SL2-A1-E-0039
Canada	Industry Canada	RSS210, Issue 8	

* No part of this report may be used to claim or imply product endorsement by TAF or any agency of the US Government.



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	$\pm 3.38\text{dB}$
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	$\pm 3.04\text{dB}$
Radiated Emission, 1 to 26.5 GHz	$\pm 2.38 \text{ dB}$
Power Line Conducted Emission	$\pm 2.01\text{dB}$
Band Edge MU	0.302dBuV
Band Width	136.49kHz
Channel Separation MU	361.69Hz
Duty Cycle MU	0.064ms
Peak Output Power MU	1.904dB
Frequency Stability MU	0.223kHz

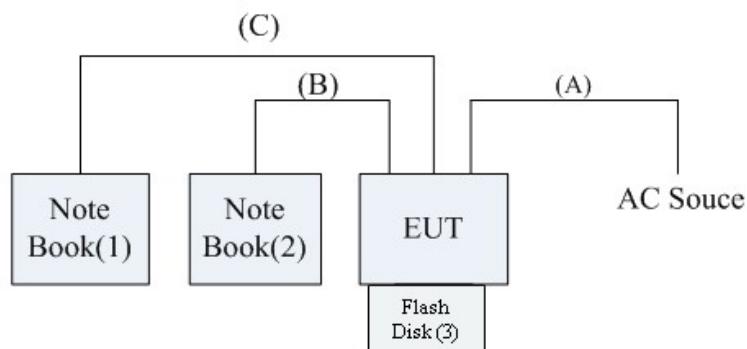
This measurement uncertainty is confidence of approximately 95%, k=2



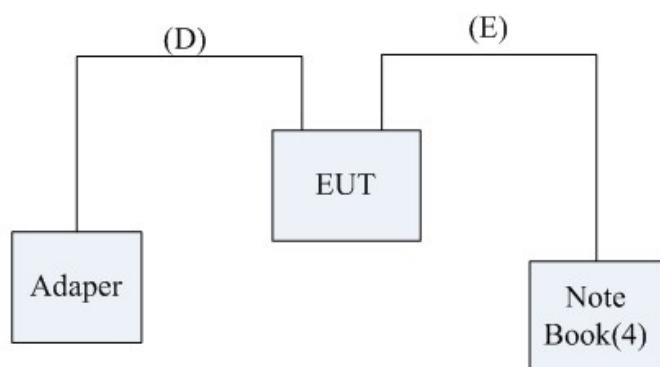
7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

Above 1GHz Test Setup:



Below 1GHz Test Setup:





7.2 SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	FCC ID	Signal Cable
1	Note Book	IBM	R51	R33026	Power cable, unshd, 1.6m
2	Note Book	MIS	MS-1452	N/A	Power cable, unshd, 1.6m
3.	Flash Disk	Kingston	DTI/512	DoC	N/A
4	Note Book	IBM	T43	DoC	Power cable, unshd, 1.6m

No.	Signal cable description	
A	Adapter cable	Unshielded, 1.4m, 1pcs., with a core.
B	LAN cable	Unshielded, 4m, 1pcs.
C	LAN cable	Unshielded, 4m, 1pcs.
D	DC power	Unshielded, 1.5m, 1pcs.
E	LAN cable	Unshielded, 10m, 1pcs.

REMARK:

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7.3 EUT OPERATING CONDITION

RF Setup

1. Set up all computers like the setup diagram.
2. The “Realtek QA Test Program for RTL8188RE” software was used for testing
The EUT driver software installed in the host support equipment during testing was
Realtek QA Test Program for RTL8188RE Drive

(1) TX Mode:

- ⇒ **Tx Mode:CCK 、OFDM 、 HT MixMode** (Bandwidth: 20 、 40)
- ⇒ **Tx Data Rate: 11Mbps long** (IEEE 802.11b mode ,chain 0 TX)
6Mbps (IEEE 802.11g mode ,chain 0 TX)
6.5Mbps (IEEE 802.11n HT20 mode ,chain 0 TX)
13.5Mbps (IEEE 802.11n HT40 mode, chain 0 TX)

Power control mode

Target Power: IEEE 802.11b Channel Low (2412MHz) = **34**
IEEE 802.11b Channel Middle (2437MHz) = **34**
IEEE 802.11b Channel High (2462MHz) = **34**

Target Power: IEEE 802.11g Channel Low (2412MHz) = **34**
IEEE 802.11g Channel Middle (2437MHz) = **34**
IEEE 802.11g Channel High (2462MHz) = **34**

Target Power: IEEE 802.11n HT20 Channel Low (2412MHz) = **34**
IEEE 802.11 n HT20 Channel Middle (2437MHz) = **34**
IEEE 802.11 n HT20 Channel High (2462MHz) = **34**

Target Power: IEEE 802.11n HT40 Channel Low (2422MHz) = **34**
IEEE 802.11 n HT40 Channel Middle (2437MHz) = **34**
IEEE 802.11 n HT40 Channel High (2452MHz) = **34**

(2) RX Mode :

MAC Address: FFFFFFFFFF)

Start RX

3. All of the function are under run.
4. Start test.

Normal Link Setup

1. Set up all computers like the setup diagram.
2. All of the function are under run.
3. Notebook PC (2) ping 192.168.0.10 –t to Notebook PC (1).
4. Notebook PC (1) ping 192.168.0.20 –t to Notebook PC (2).
5. Notebook PC (1) ping 192.168.0.50 –t to Wireless Access Point (3).

Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 6DB BANDWIDTH

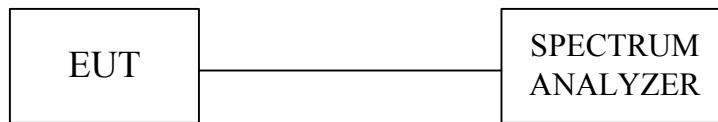
LIMIT

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.



TEST RESULTS

No non-compliance noted.

IEEE 802.11b mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10321	500	PASS
Middle	2437	10321	500	PASS
High	2462	10321	500	PASS

NOTE :

1. At final test to get the worst-case emission at 11Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16733	500	PASS
Middle	2437	16733	500	PASS
High	2462	16733	500	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	17936	500	PASS
Middle	2437	17936	500	PASS
High	2462	17936	500	PASS

NOTE :

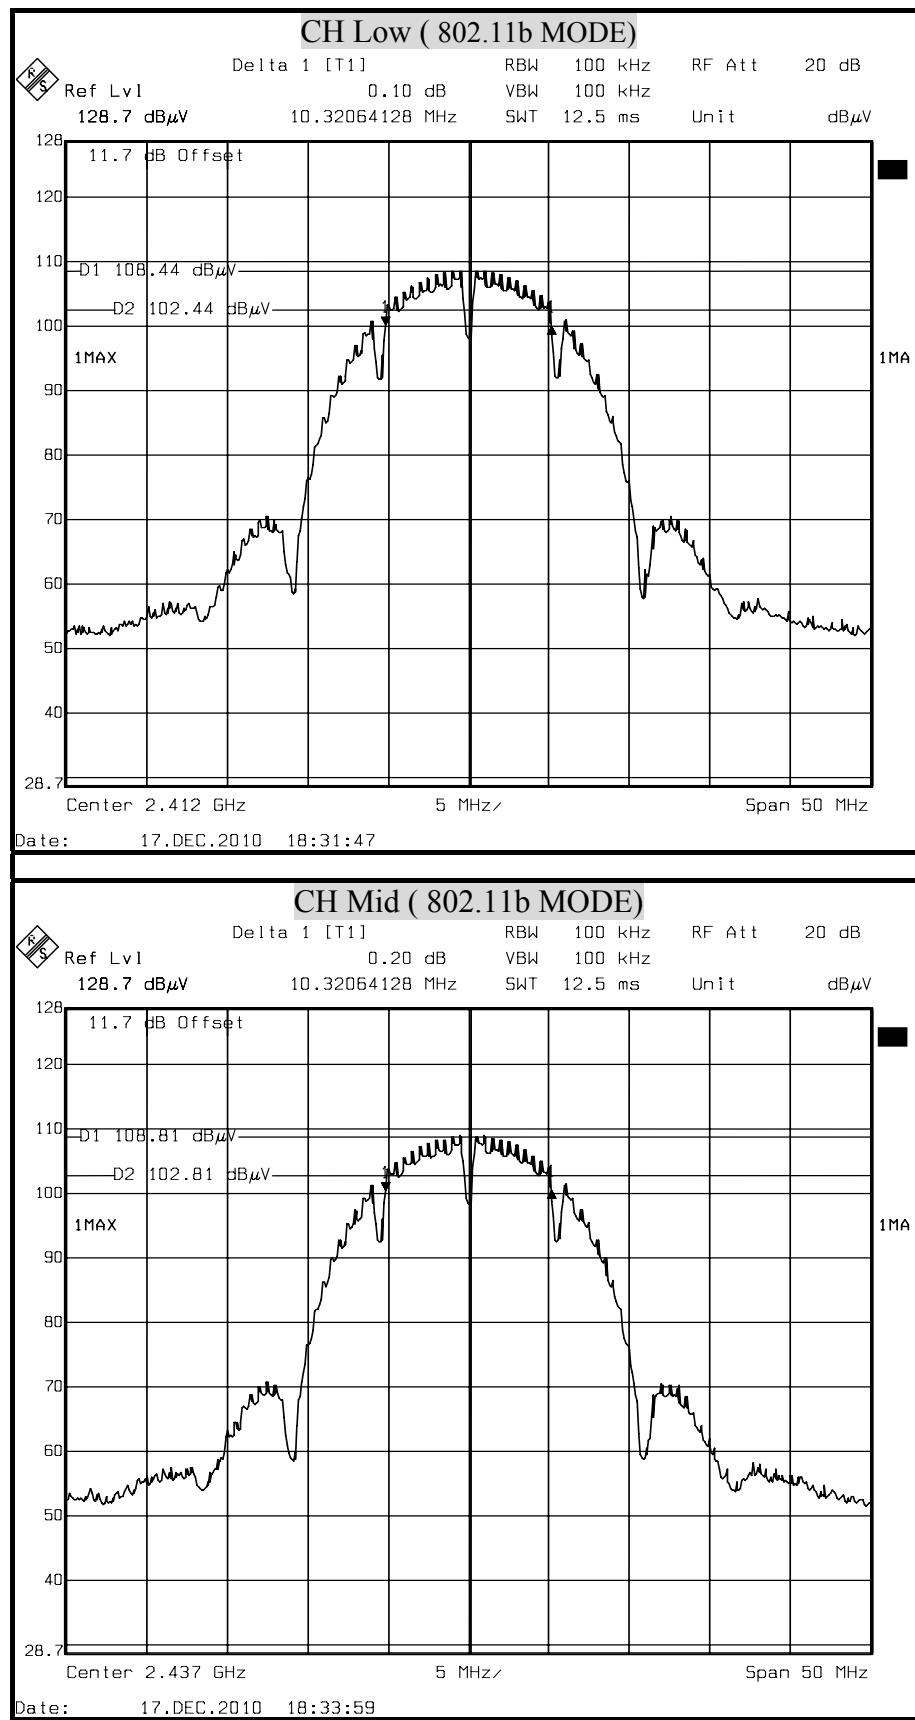
1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

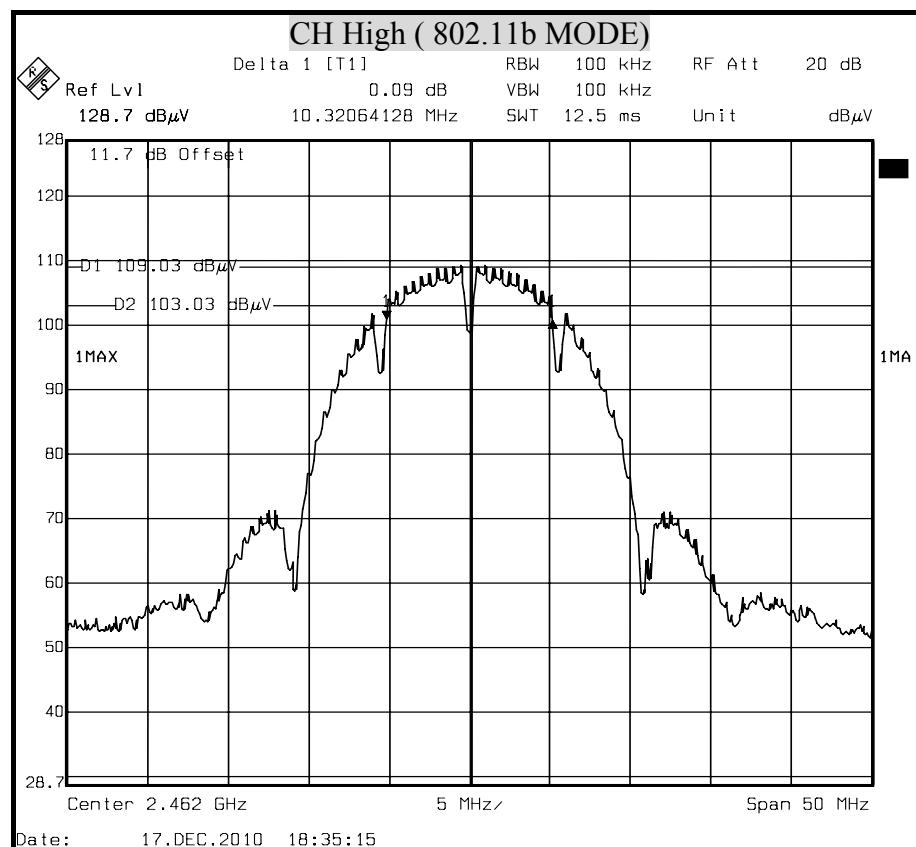
IEEE 802.11n HT40 mode

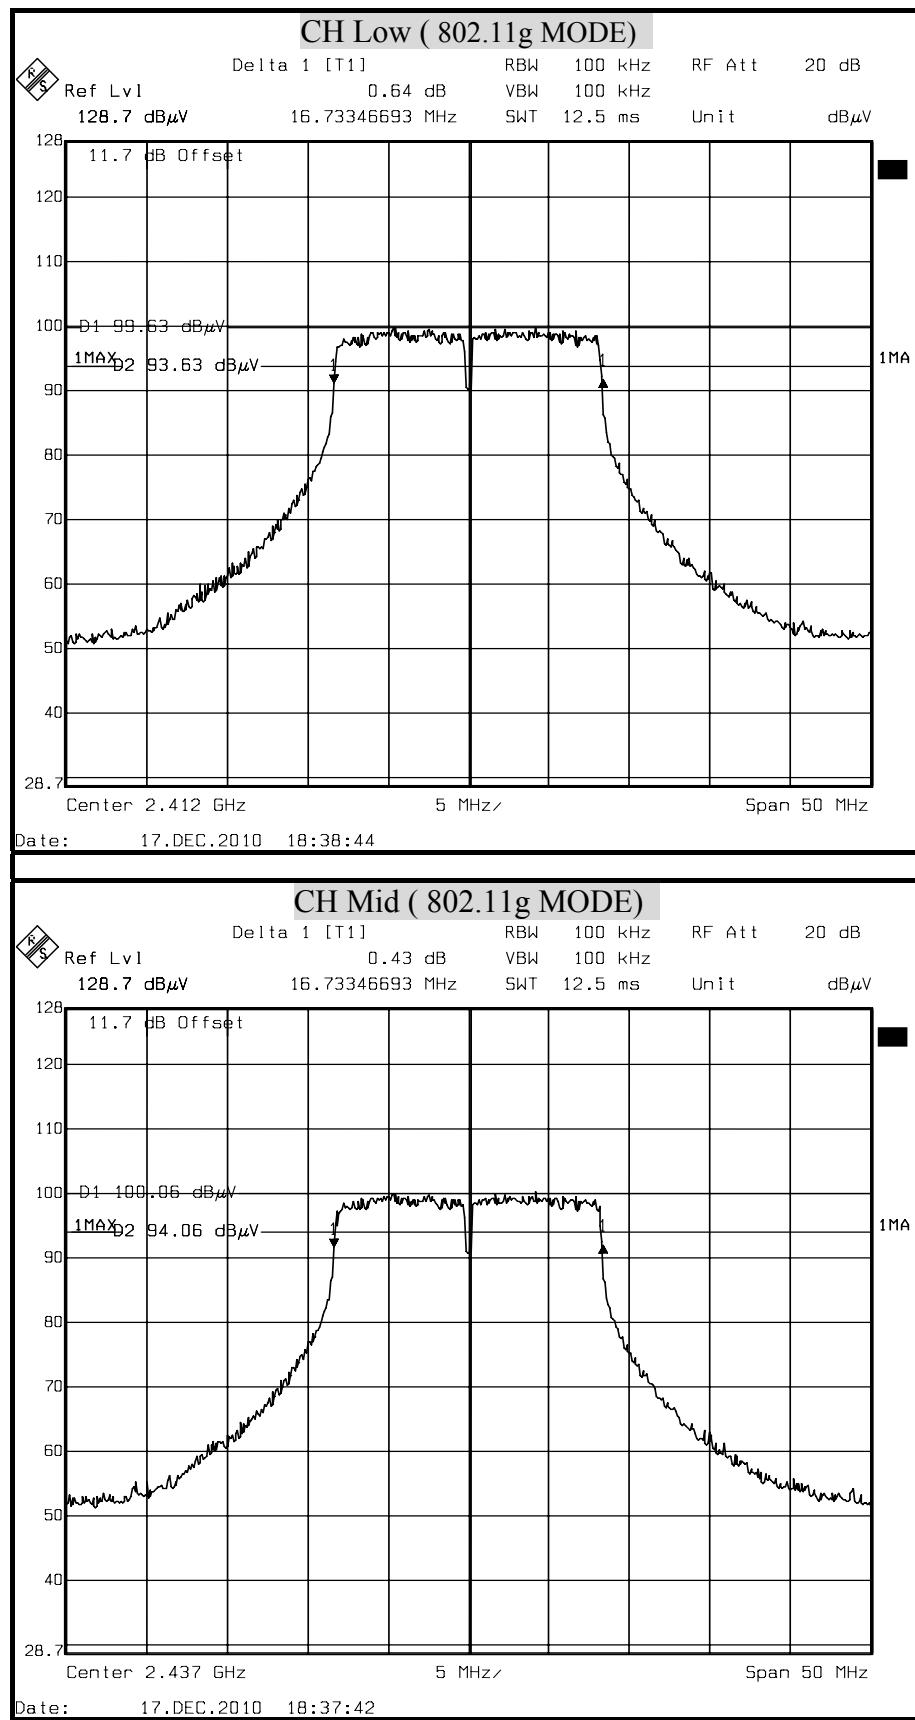
Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2422	36673	500	PASS
Middle	2437	36673	500	PASS
High	2452	36673	500	PASS

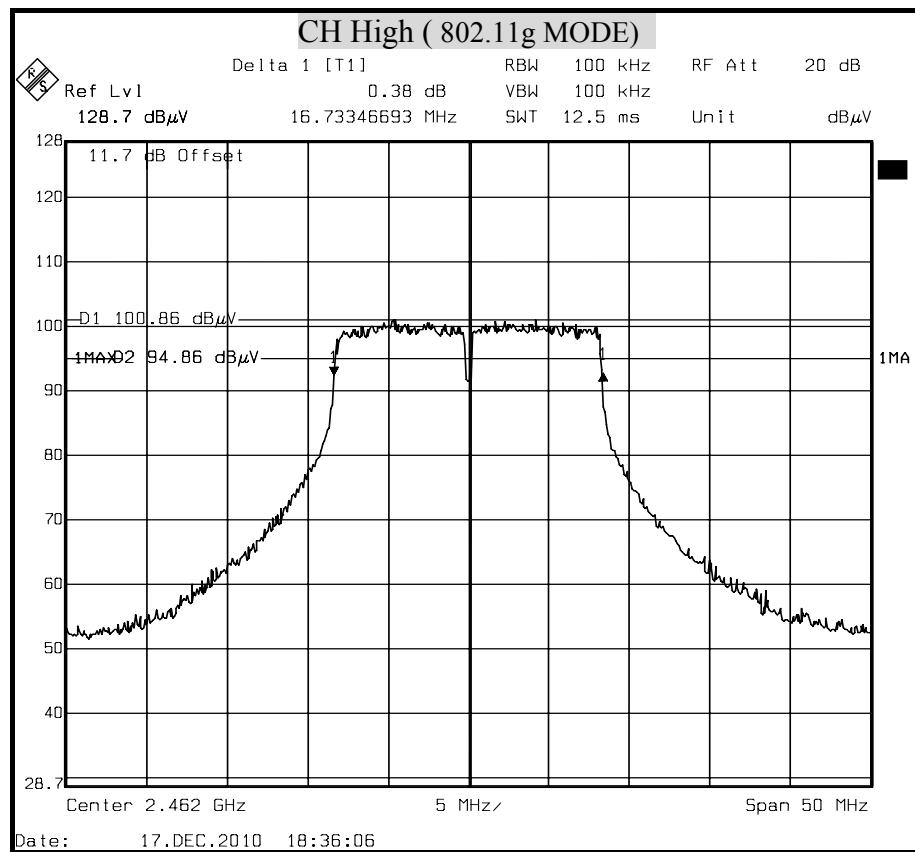
NOTE :

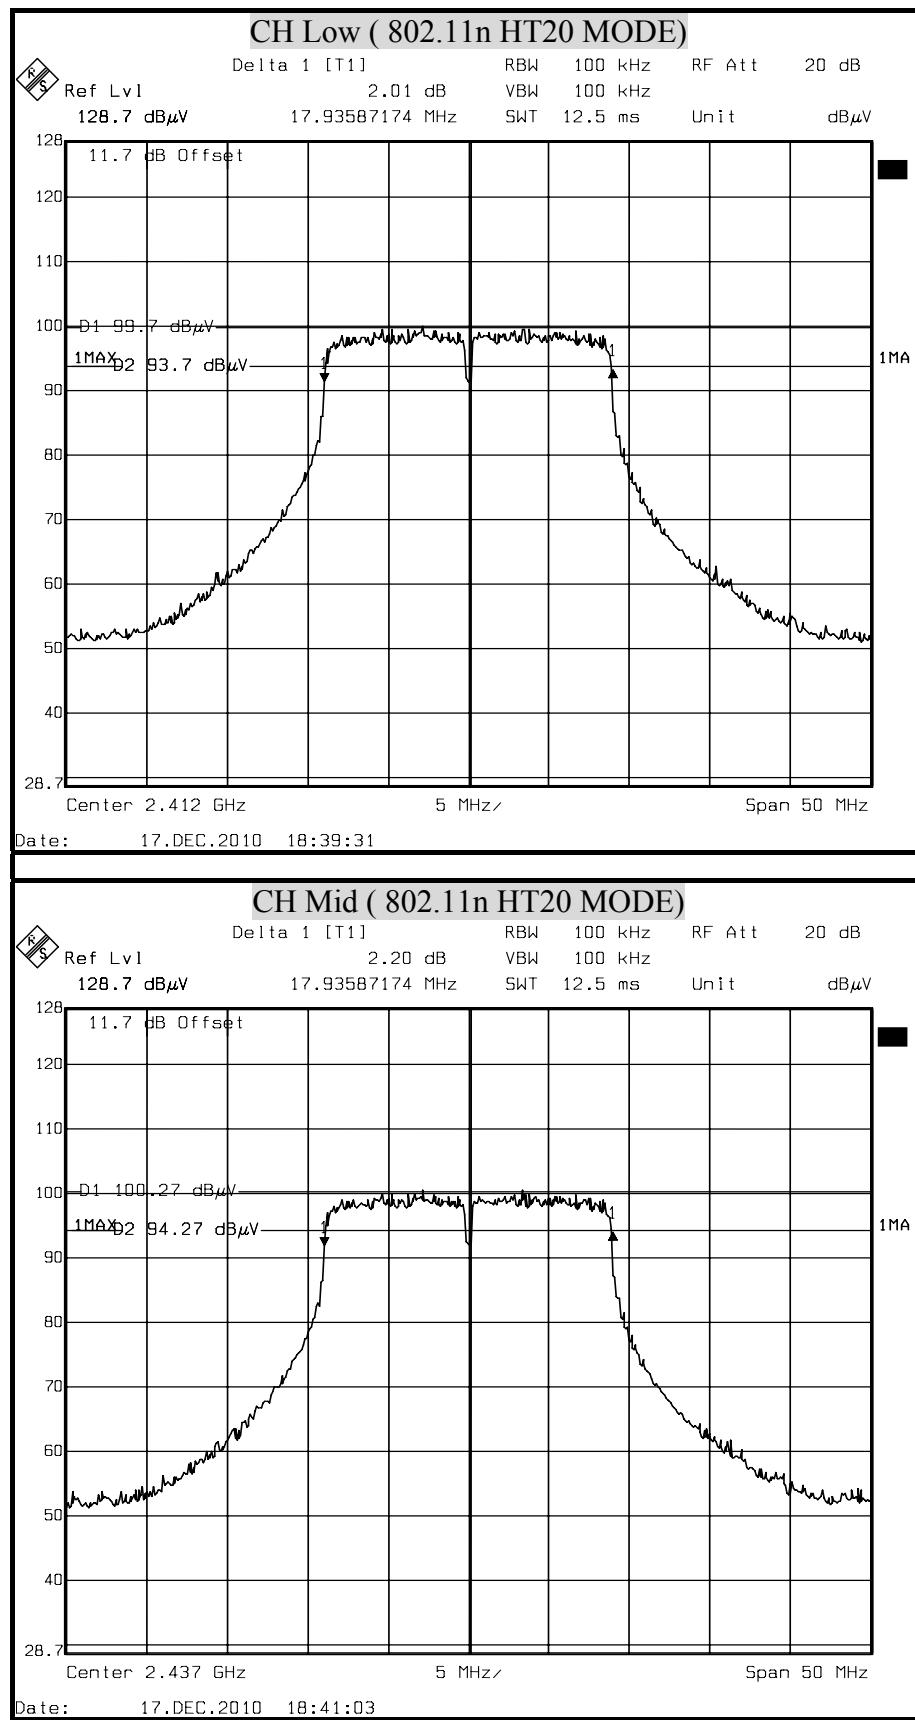
1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

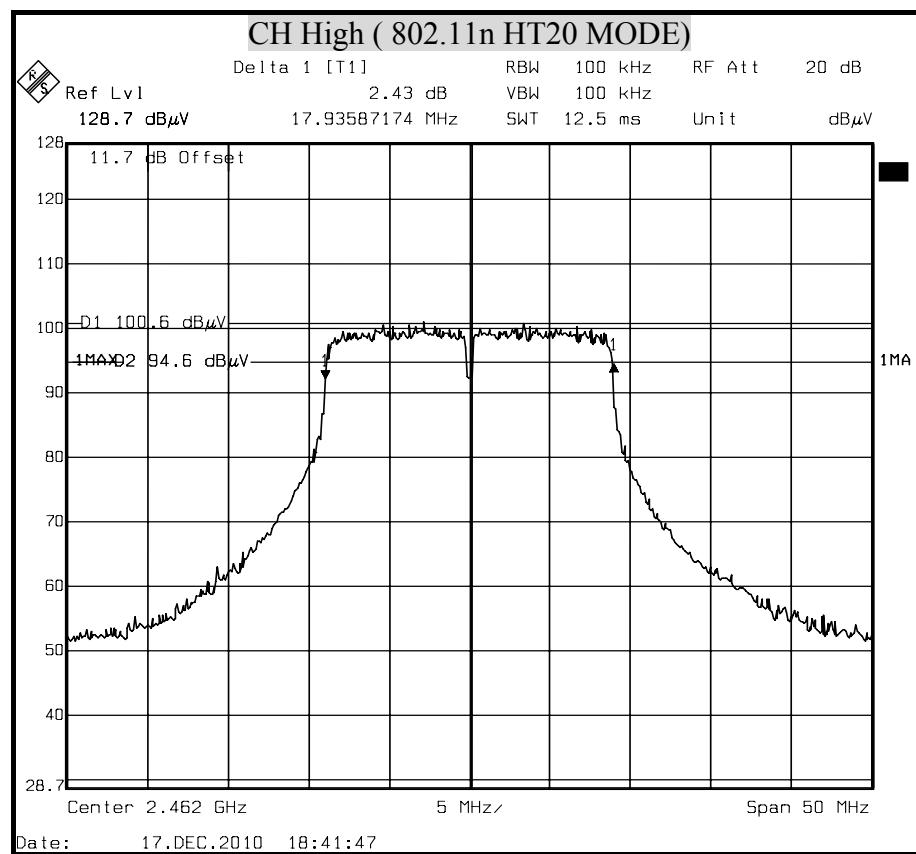
**6dB BANDWIDTH (802.11b MODE)**

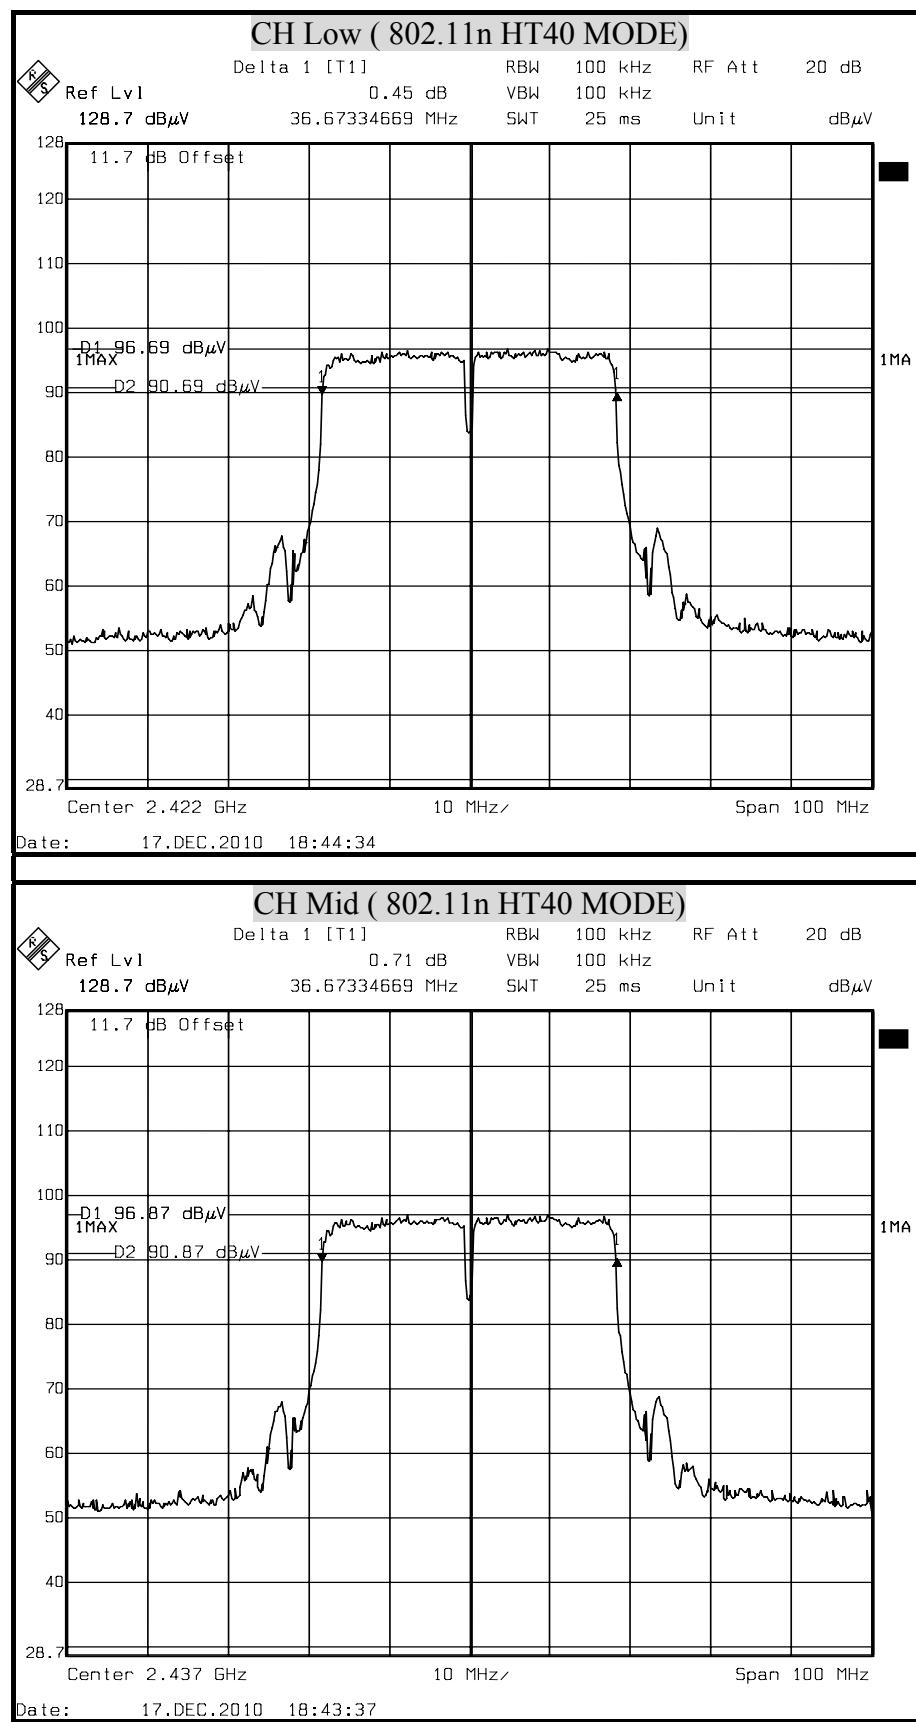


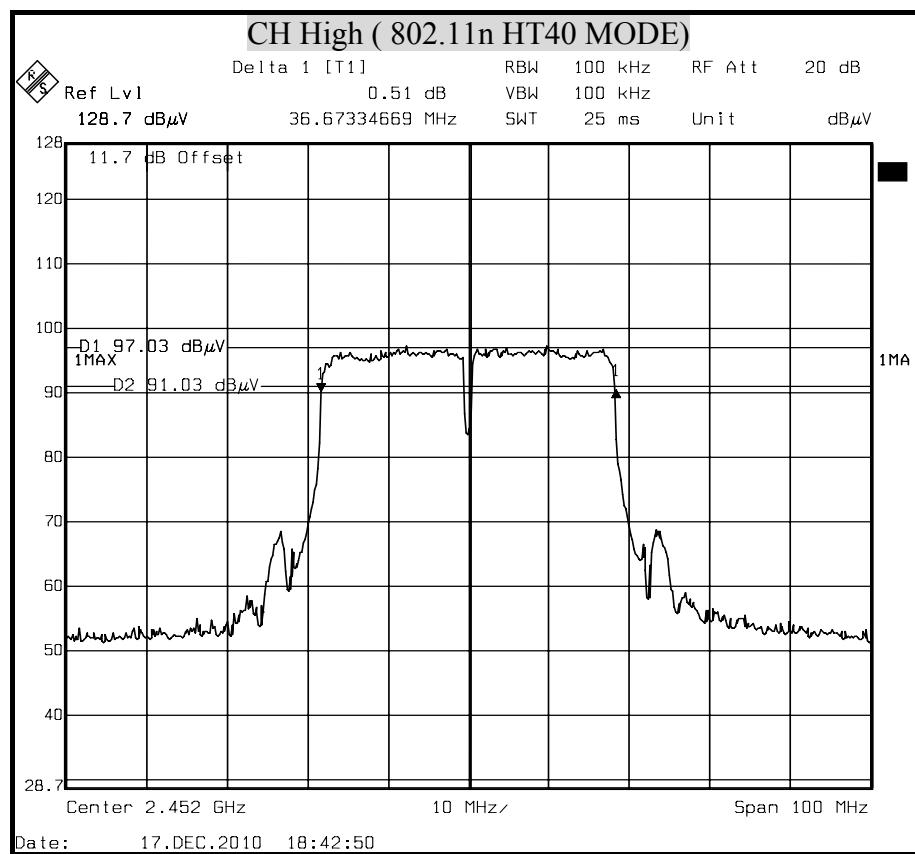
**6dB BANDWIDTH (802.11g MODE)**



**6dB BANDWIDTH (802.11n HT20 MODE)**



**6dB BANDWIDTH (802.11n HT40 MODE)**





8.2 MAXIMUM PEAK OUTPUT POWER

LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :


§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2487A	6K00003888	MAY 11, 2011

TEST SETUP



TEST PROCEDURE

Connect the EUT to spectrum analyzer, set the center frequency of the spectrum analyzer to the channel center frequency. Set the RBW to 1MHz and VBW to 3MHz.

TEST RESULTS

No non-compliance noted

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	15.51	30	PASS
Middle	2437	15.96	30	PASS
High	2462	16.39	30	PASS

NOTE :

1. At final test to get the worst-case emission at 11Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	18.28	30	PASS
Middle	2437	18.58	30	PASS
High	2462	19.01	30	PASS

NOTE :

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 mode**

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	17.64	30	PASS
Middle	2437	18.17	30	PASS
High	2462	18.28	30	PASS

NOTE :

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2422	17.23	30	PASS
Middle	2437	17.40	30	PASS
High	2452	17.64	30	PASS

NOTE :

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11b mode

Average Power Data

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	13.25
Middle	2437	13.65
High	2462	14.05

IEEE 802.11g mode

Average Power Data

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	8.59
Middle	2437	9.03
High	2462	9.49

IEEE 802.11n HT20 mode

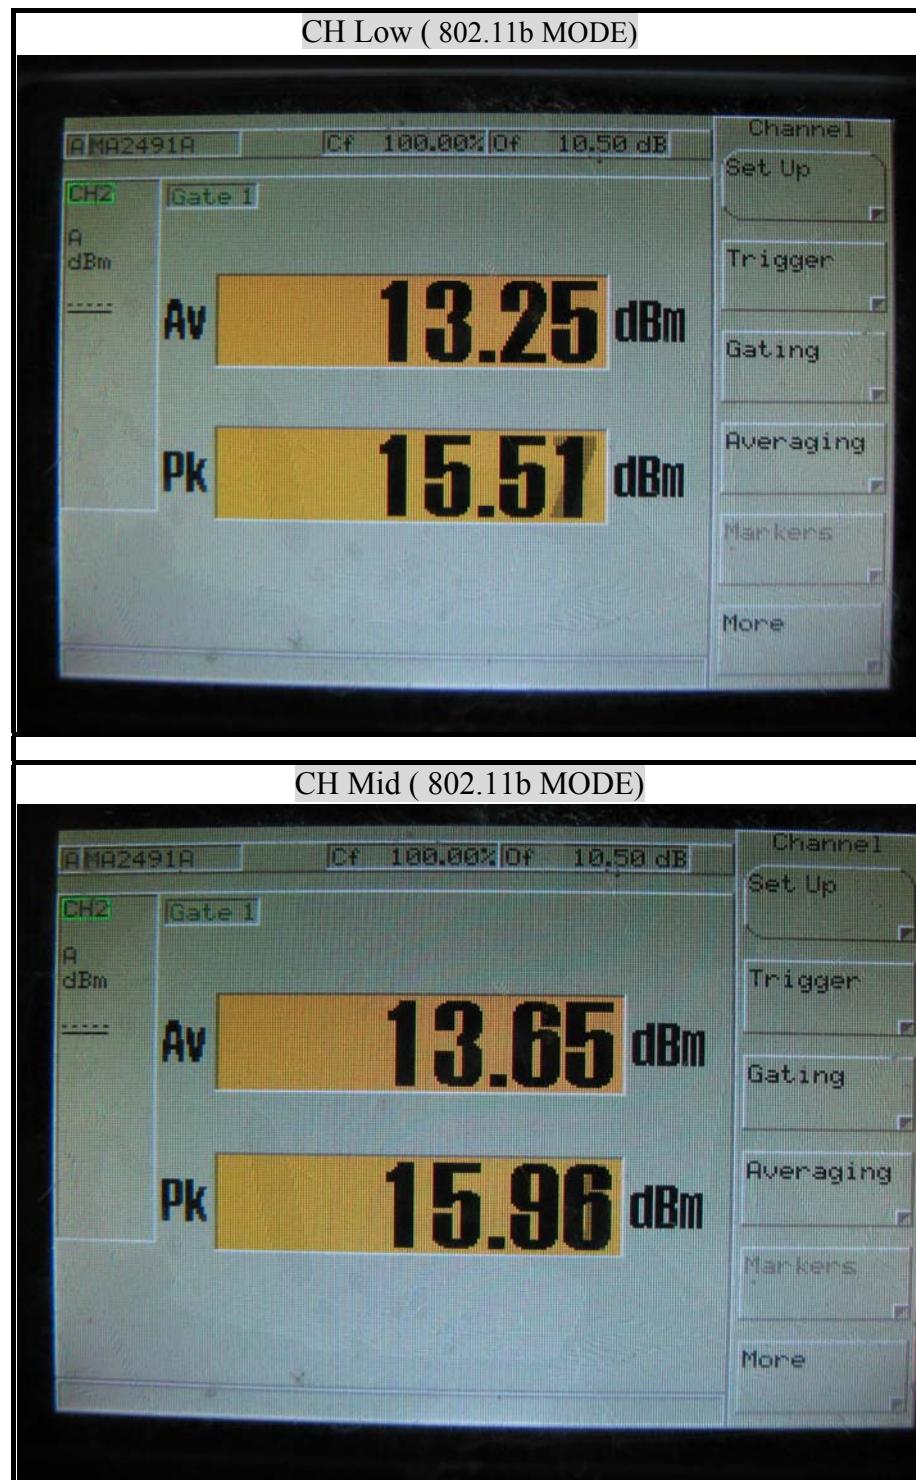
Average Power Data

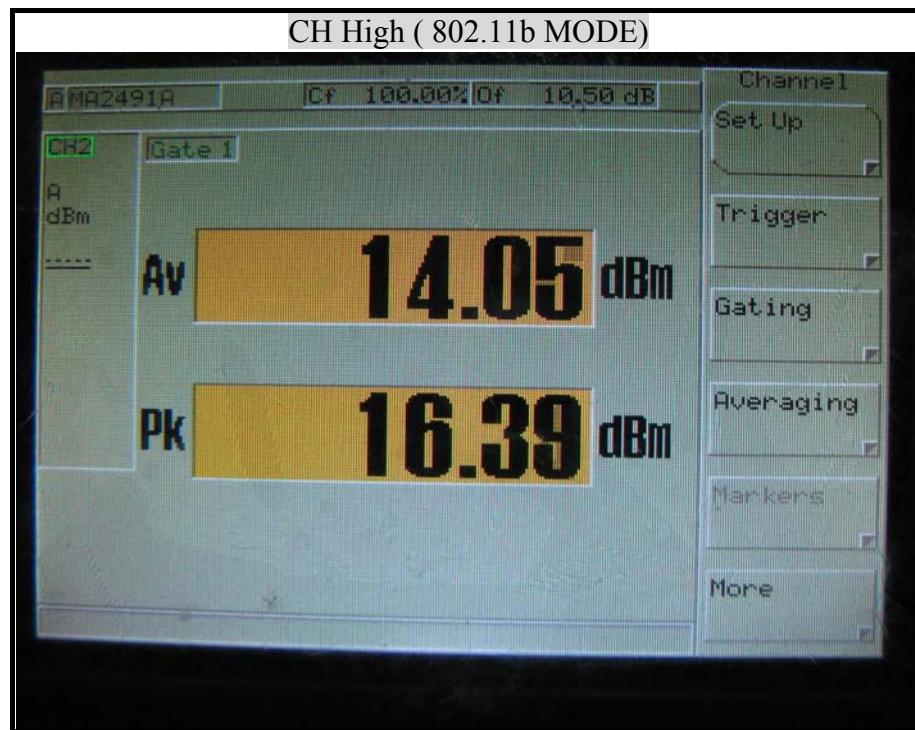
Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2412	8.50
Middle	2437	8.94
High	2462	9.33

IEEE 802.11n HT40 mode

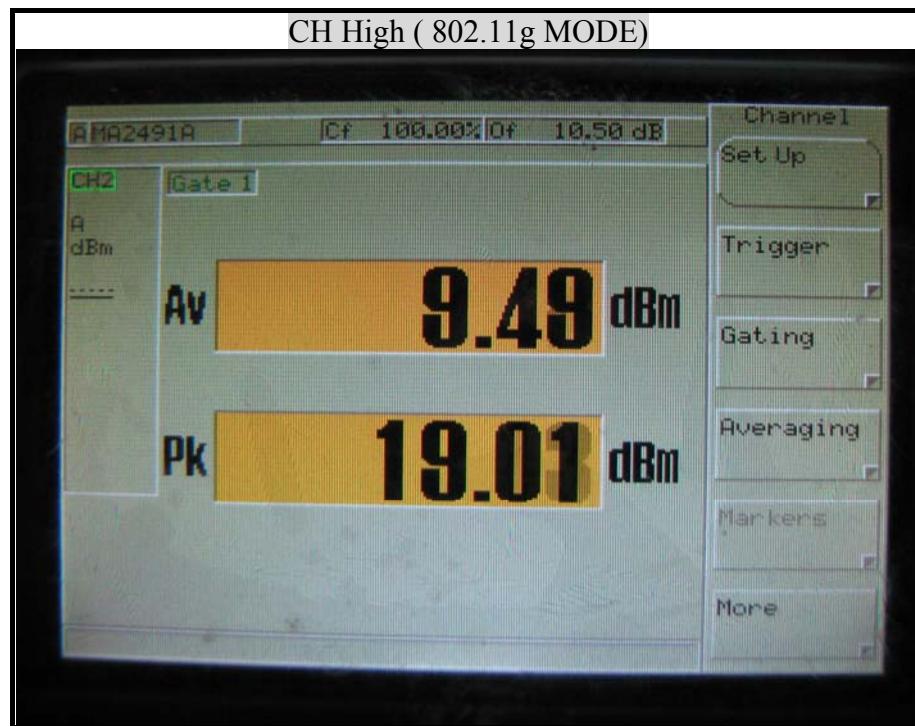
Average Power Data

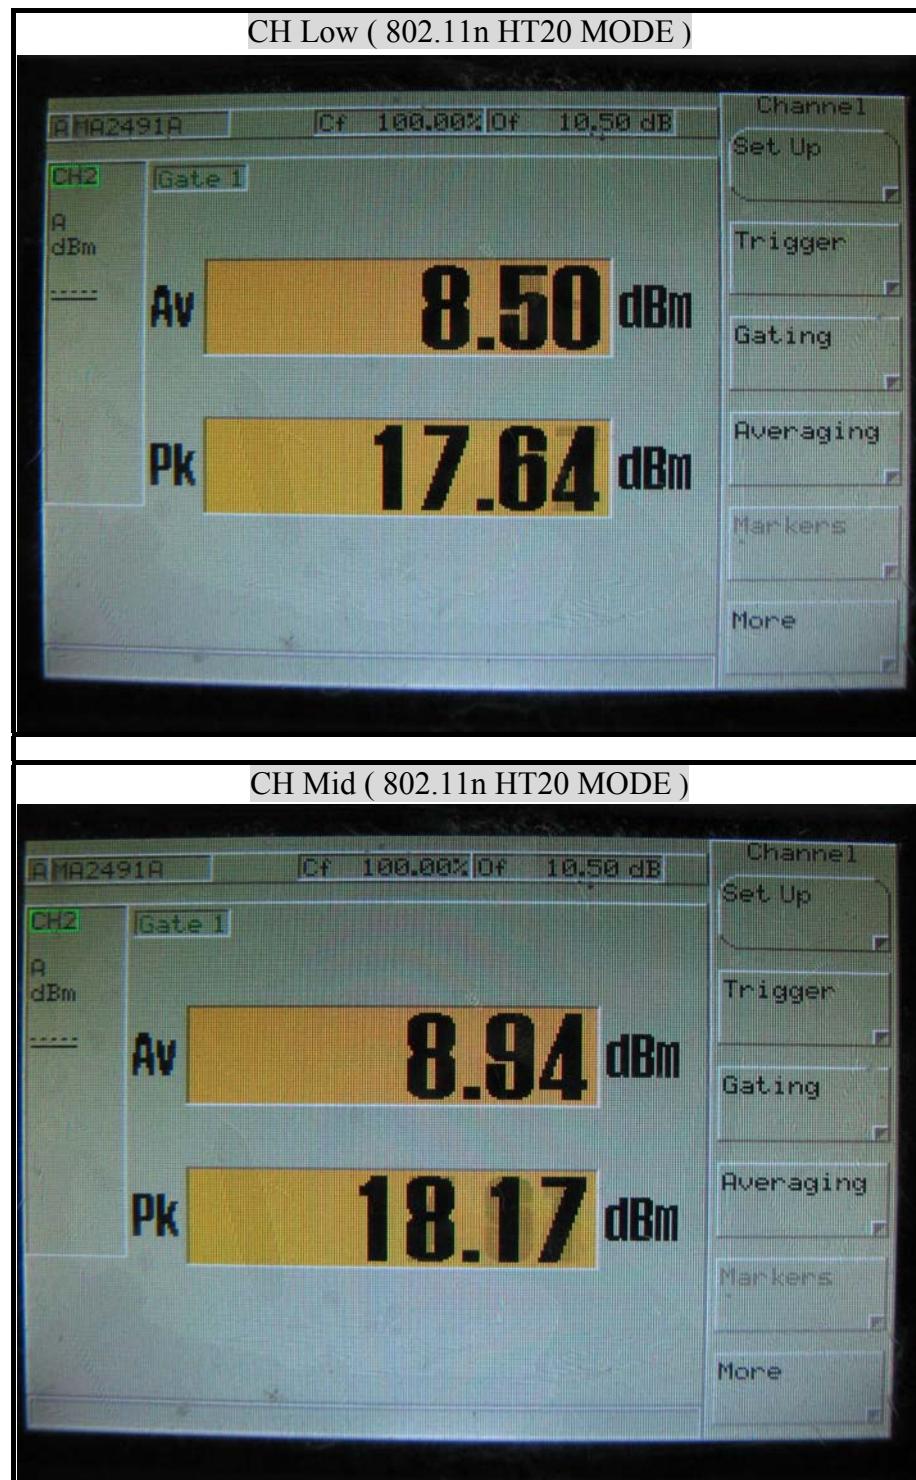
Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2422	8.49
Middle	2437	8.74
High	2452	9.11

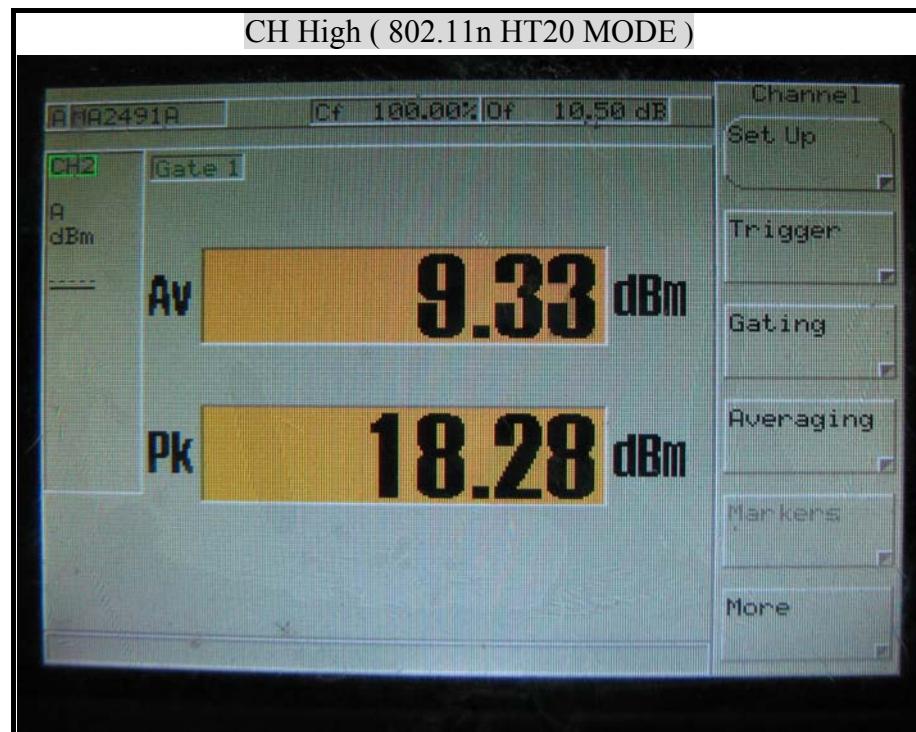
**MAXIMUM PEAK OUTPUT POWER (802.11b MODE)**

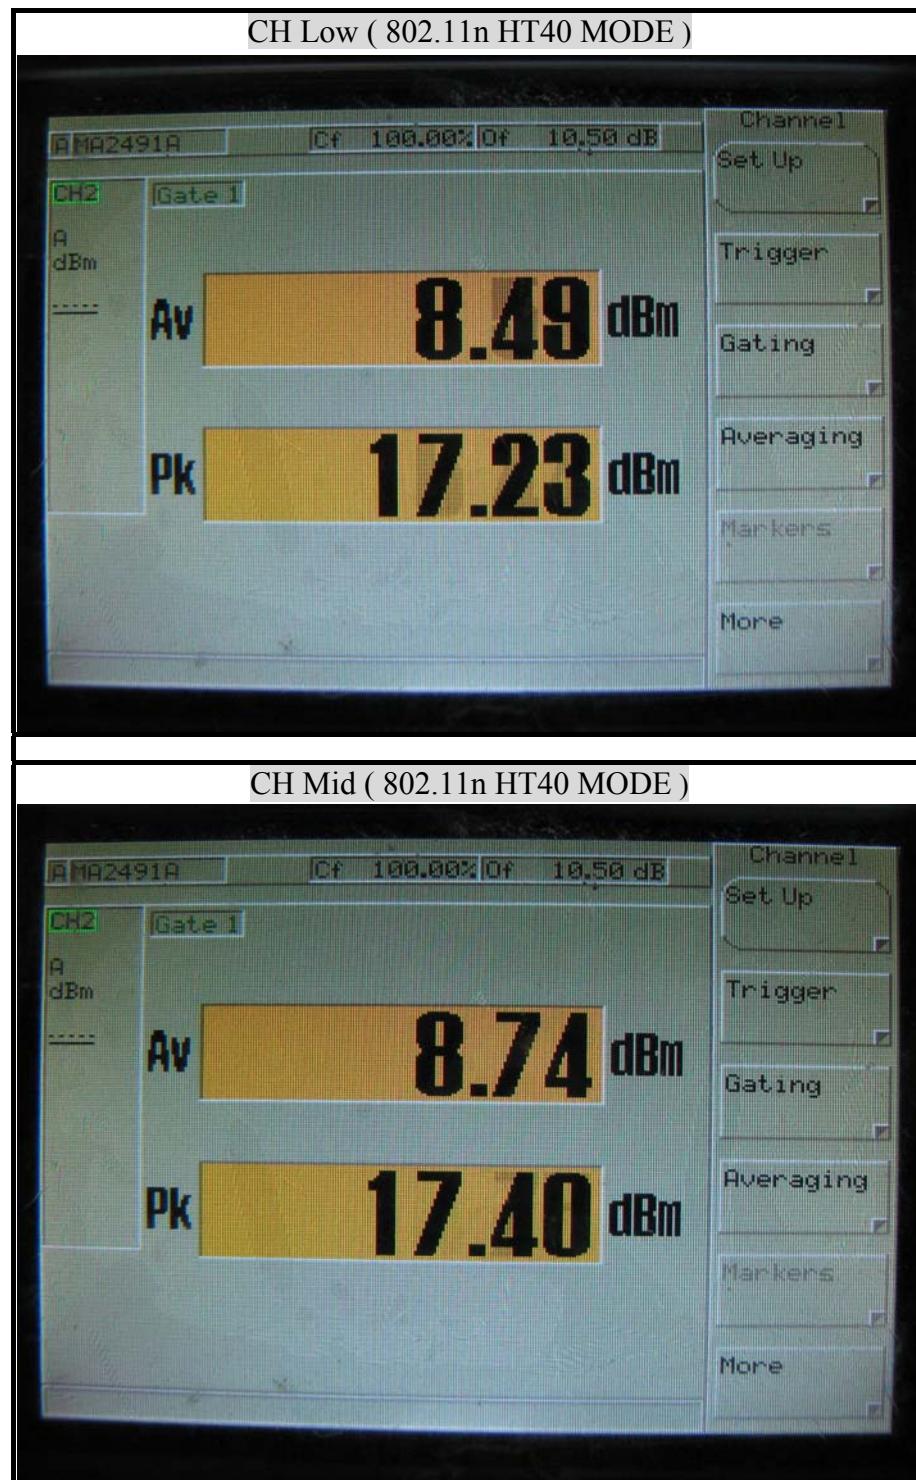


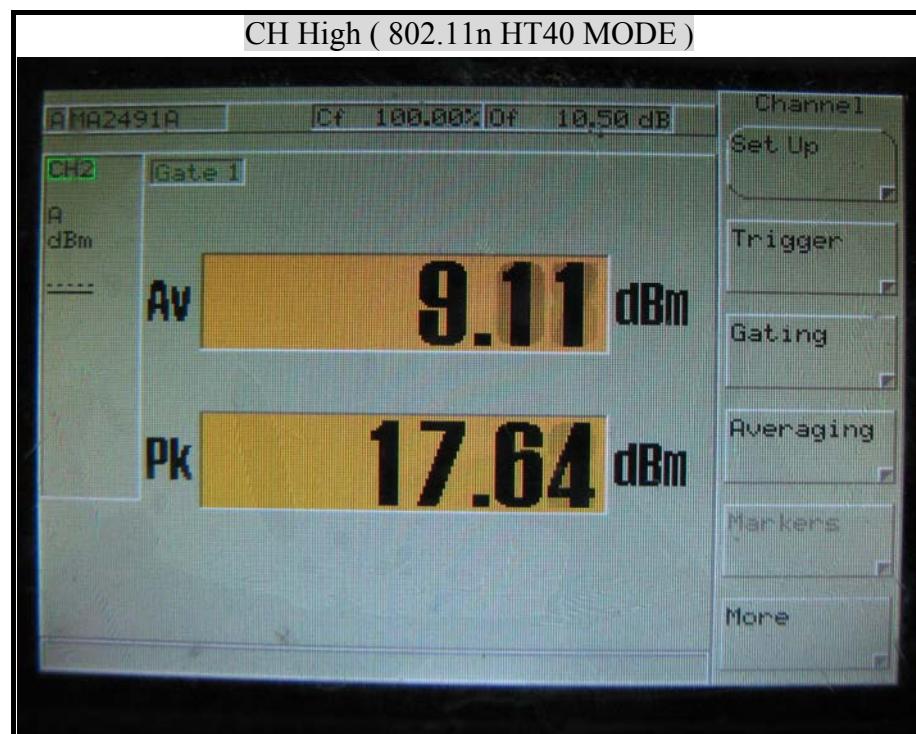
**MAXIMUM PEAK OUTPUT POWER (802.11g MODE)**



**MAXIMUM PEAK OUTPUT POWER (802.11n HT20 MODE)**



**MAXIMUM PEAK OUTPUT POWER (802.11n HT40 MODE)**





8.3 MAXIMUM PERMISSIBLE EXPOSURE

According to FCC 1.1310 : The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational / Control Exposures				
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300-1,500	--	--	F/1500	6
1,500-100,000	--	--	1	30

CALCULATIONS

Given
$$E = \frac{\sqrt{30 \times P \times G}}{d} \quad \& \quad S = \frac{E^2}{3770}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = d \text{ (m)} / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power density in mW / cm²

**LIMIT**

Power Density Limit, $S=1.0\text{mW/cm}^2$

TEST RESULTS

No non-compliance noted.

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$

$$G=1.276\text{dBi}=1.34047895 \text{ dB}$$

$$\text{IEEE 802.11b}=0.0796*40.17908*1.58489319/400=0.011618$$

$$\text{IEEE 802.11g}=0.0796*111.6863*1.58489319/400=0.021238$$

$$\text{IEEE 802.11n HT20}=0.0796*102.8016*1.58489319/400=0.017952$$

$$\text{IEEE 802.11n HT40}=0.0796*77.09035*1.58489319/400=0.015492$$

Mode	Minimum separation distance (cm)	Output Power (dBm)	Output Power (mw)	Antenna Gain (dBi)	Power Density Limit (mW/cm ²)	Power Density at 20cm (mW/cm ²)
IEEE 802.11b	20	16.39	43.55	1.27	1.00	0.011618
IEEE 802.11g	20	19.01	79.62	1.27	1.00	0.021238
IEEE 802.11n HT20	20	18.28	67.30	1.27	1.00	0.017952
IEEE 802.11n HT40	20	17.64	58.08	1.27	1.00	0.015492

REMARK: For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.



8.4 POWER SPECTRAL DENSITY

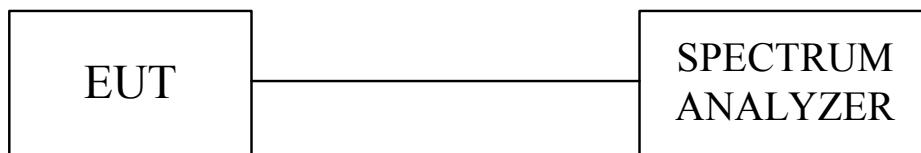
LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using $RBW=3\text{KHz}$ and $VBW \geq RBW$, set sweep time=span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.

TEST RESULTS

No non-compliance noted.

**IEEE 802.11b mode**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-17.53	8	PASS
Middle	2437	-16.97	8	PASS
High	2462	-16.83	8	PASS

NOTE : 1. At finial test to get the worst-case emission at 11Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
 Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-21.22	8	PASS
Middle	2437	-20.80	8	PASS
High	2462	-20.44	8	PASS

NOTE : 1. At finial test to get the worst-case emission at 6Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
 Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 mode

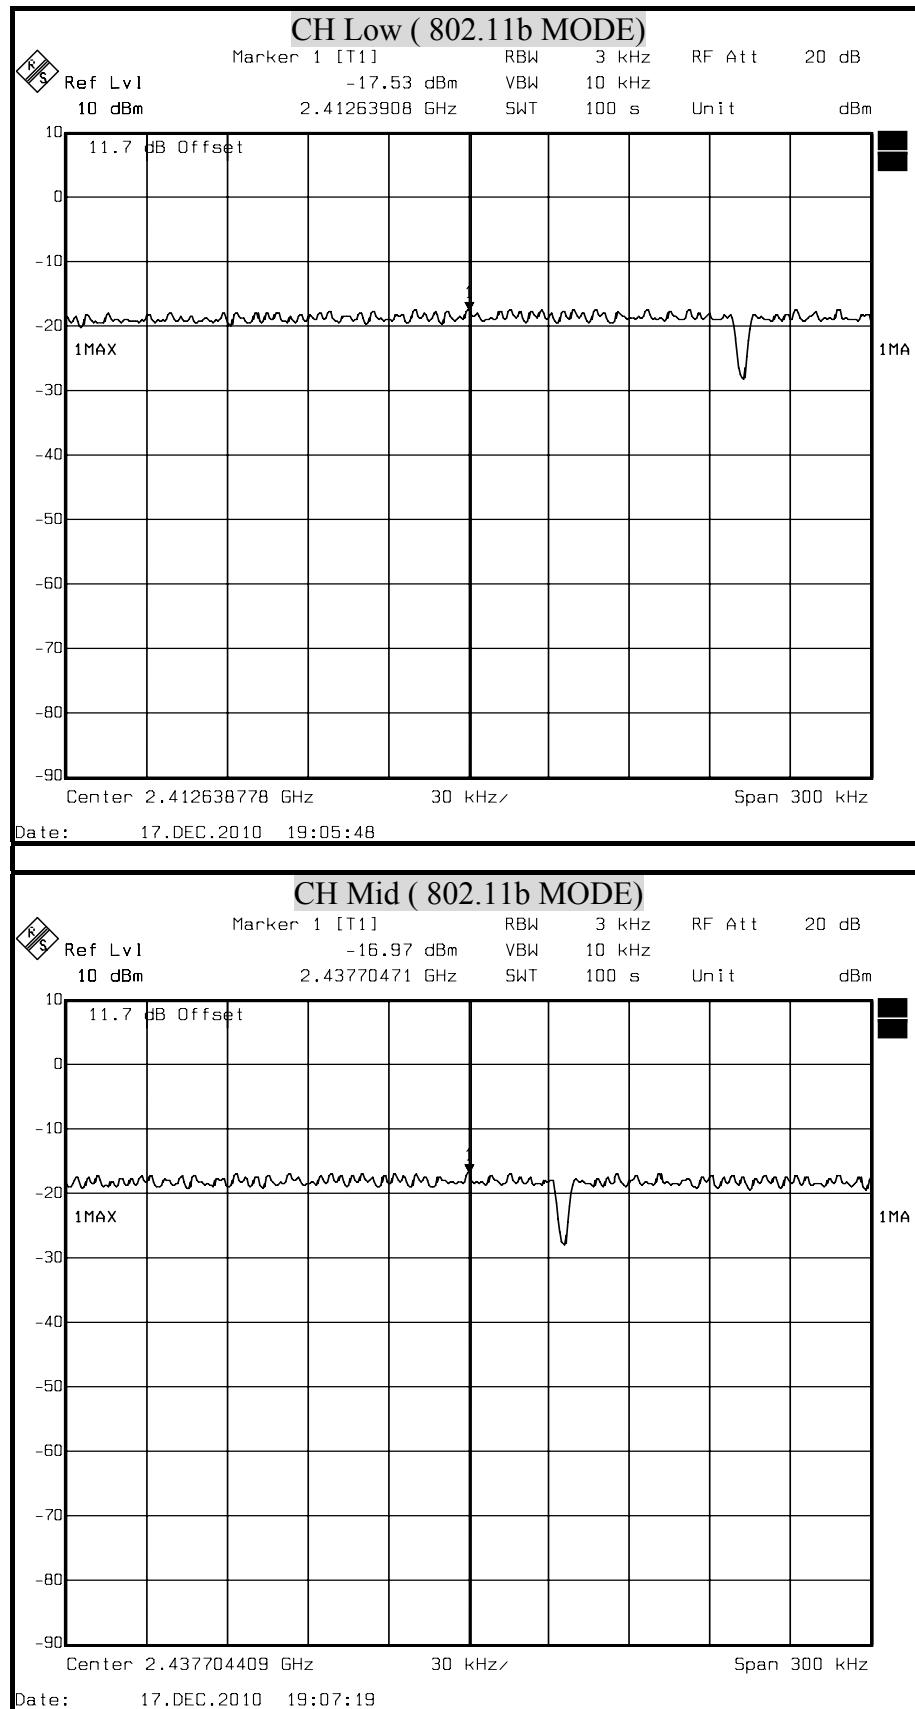
Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2412	-20.74	8	PASS
Middle	2437	-20.43	8	PASS
High	2462	-20.06	8	PASS

NOTE : 1. At finial test to get the worst-case emission at 6.5Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
 Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Maximum Limit (dBm)	Pass / Fail
Low	2422	-23.85	8	PASS
Middle	2437	-23.81	8	PASS
High	2452	-23.37	8	PASS

NOTE : 1. At finial test to get the worst-case emission at 13.5Mbps.
 2. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was
 Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**POWER SPECTRAL DENSITY (IEEE 802.11b MODE)**



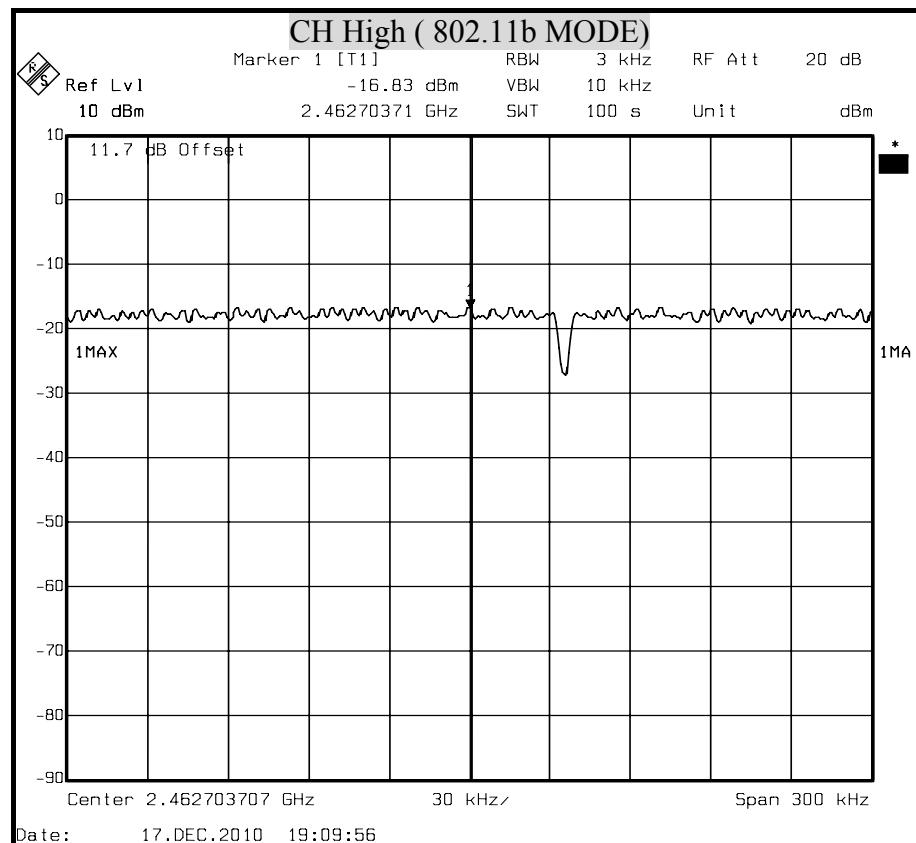
Compliance Certification Services Inc.

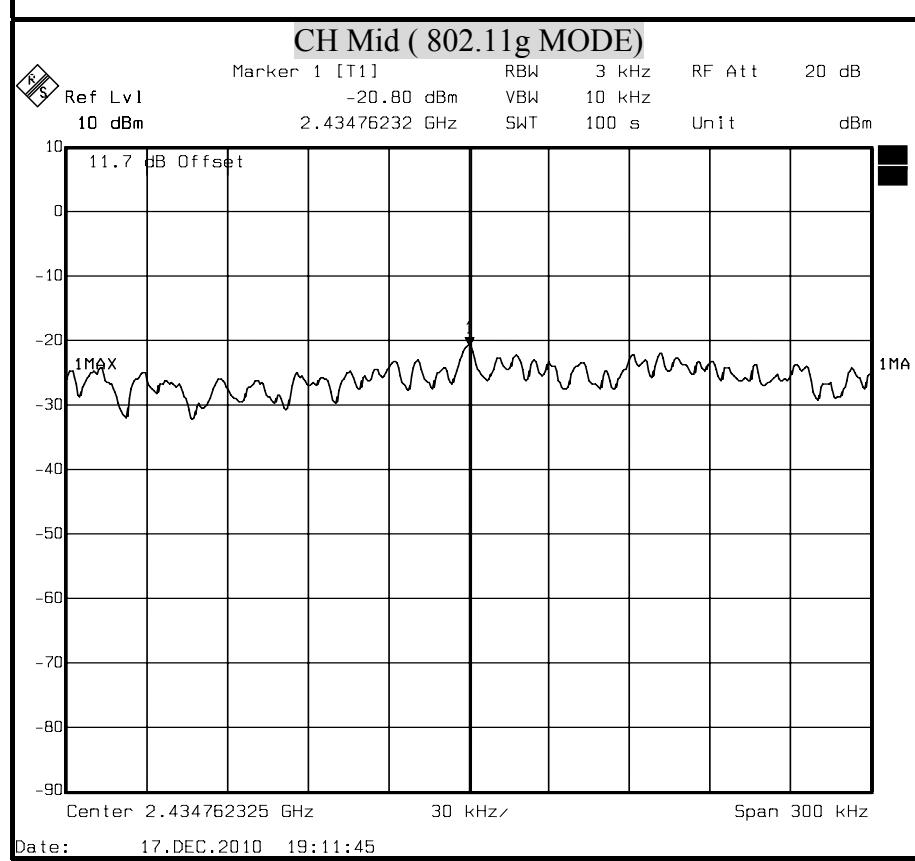
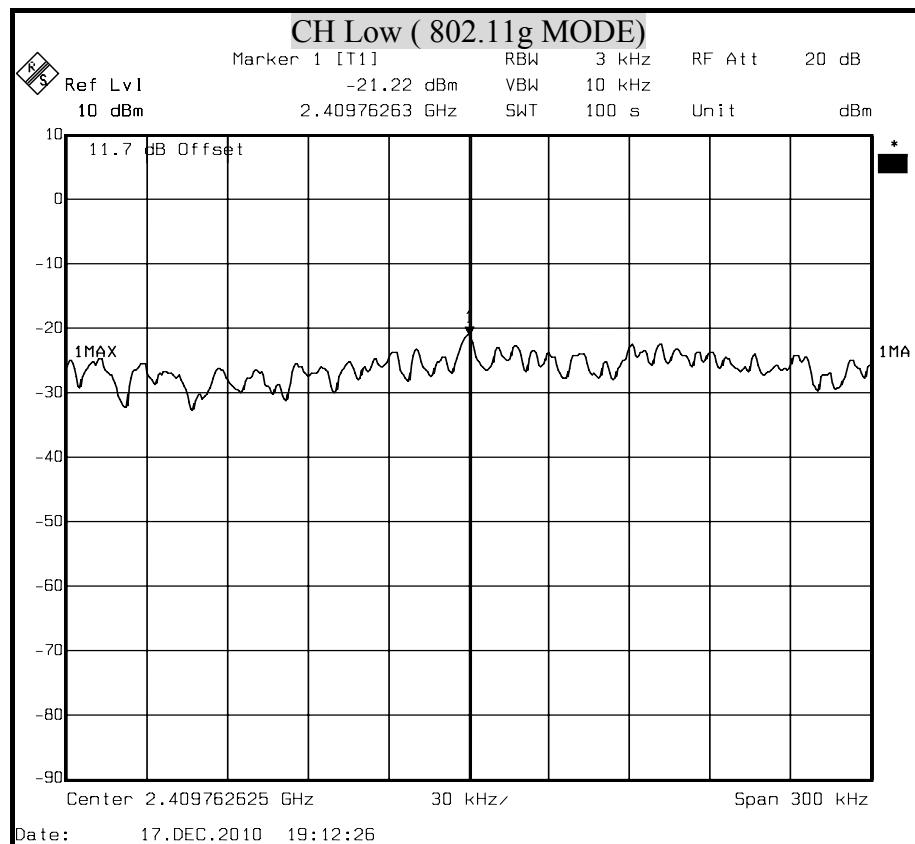
Report No. : T110107404-RP1

FCC ID: U6A-BR081N

Reference No.: T100909406-RP1

Date of Issue: January 28, 2011



**POWER SPECTRAL DENSITY (IEEE 802.11g MODE)**



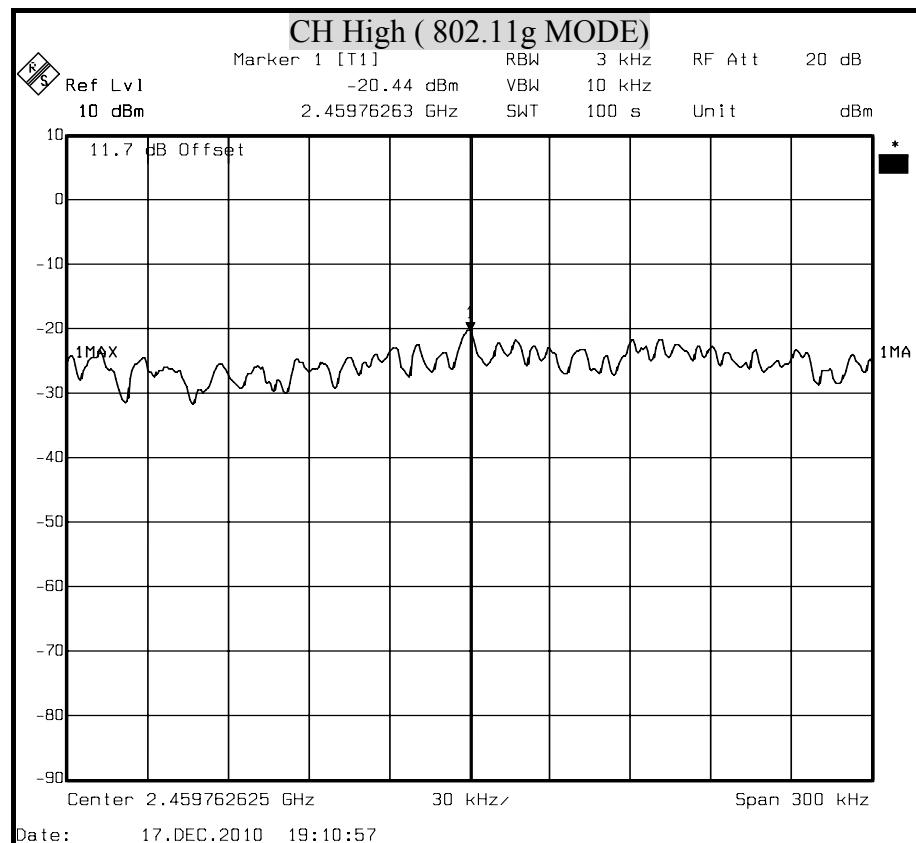
Compliance Certification Services Inc.

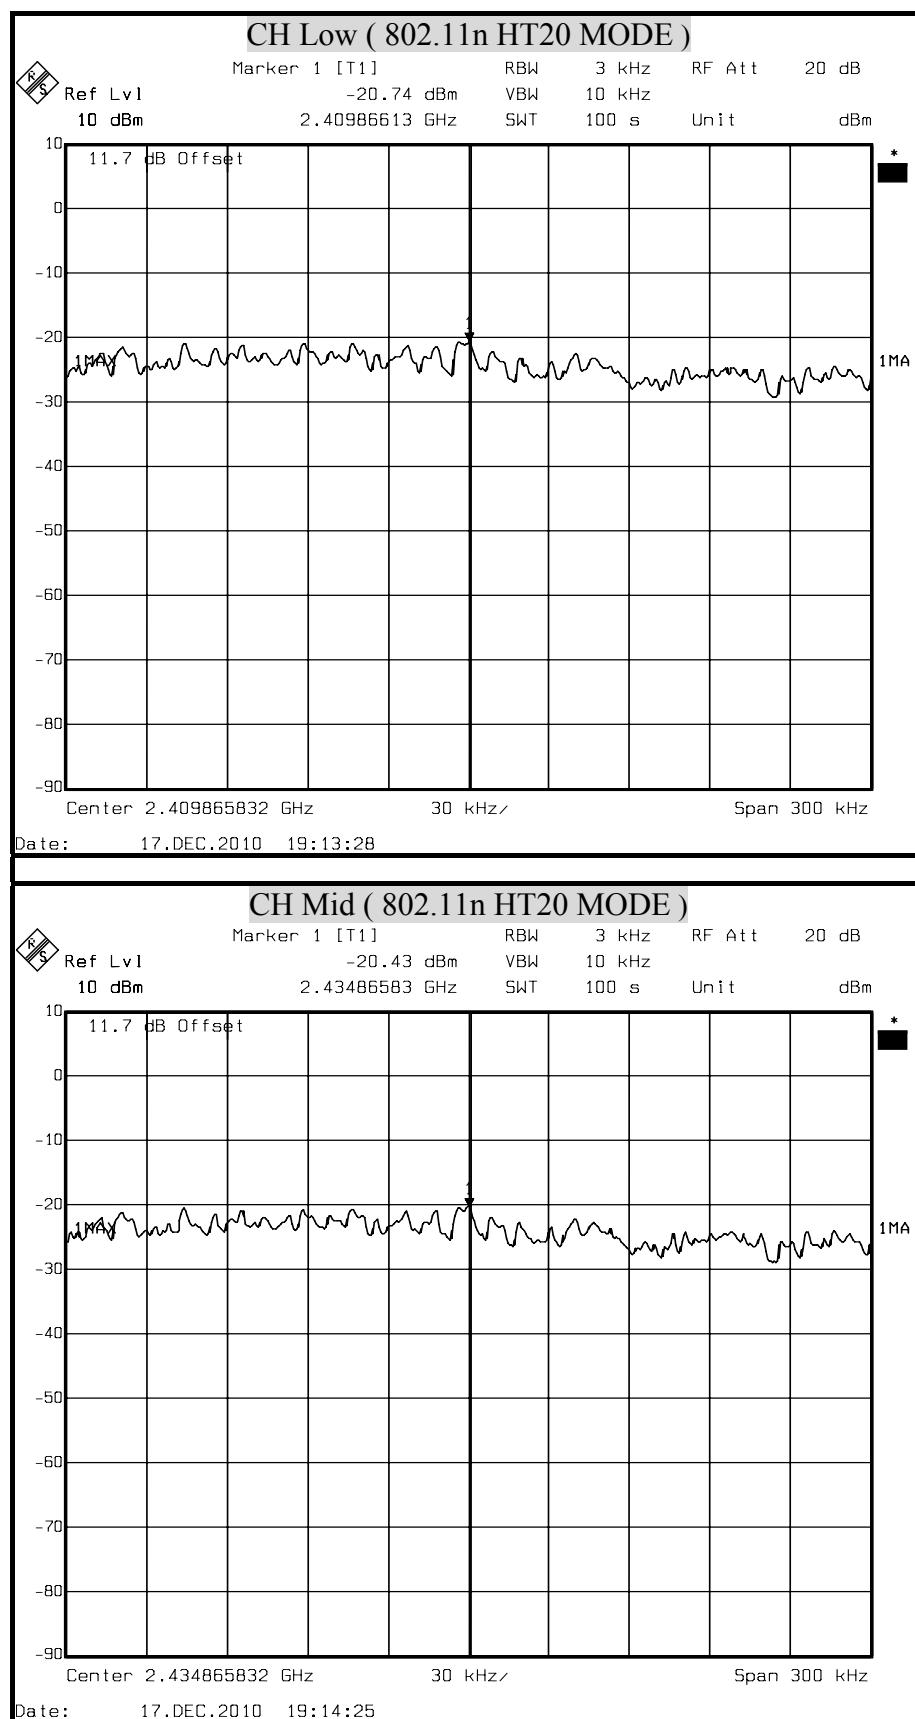
Report No. : T110107404-RP1

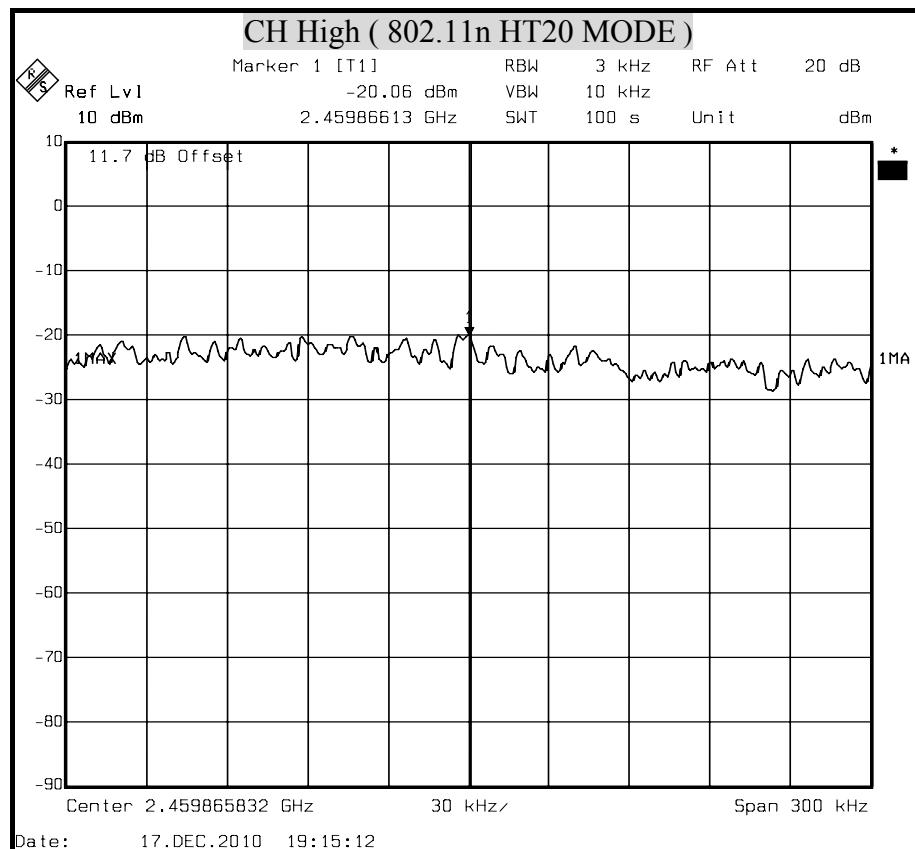
FCC ID: U6A-BR081N

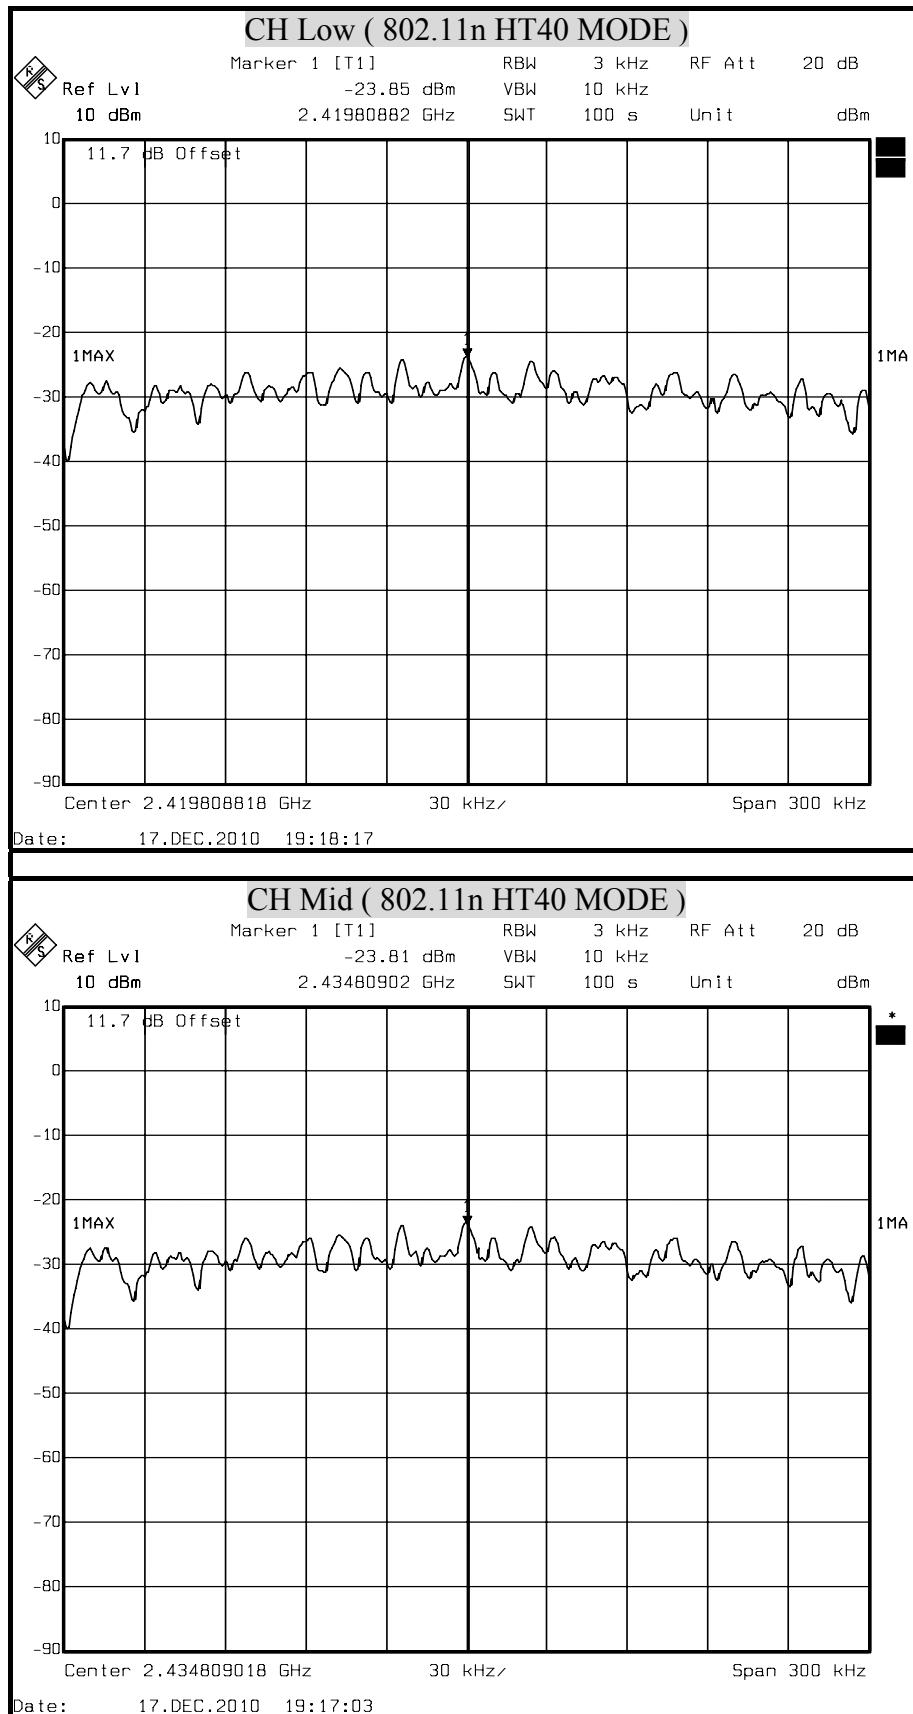
Reference No.: T100909406-RP1

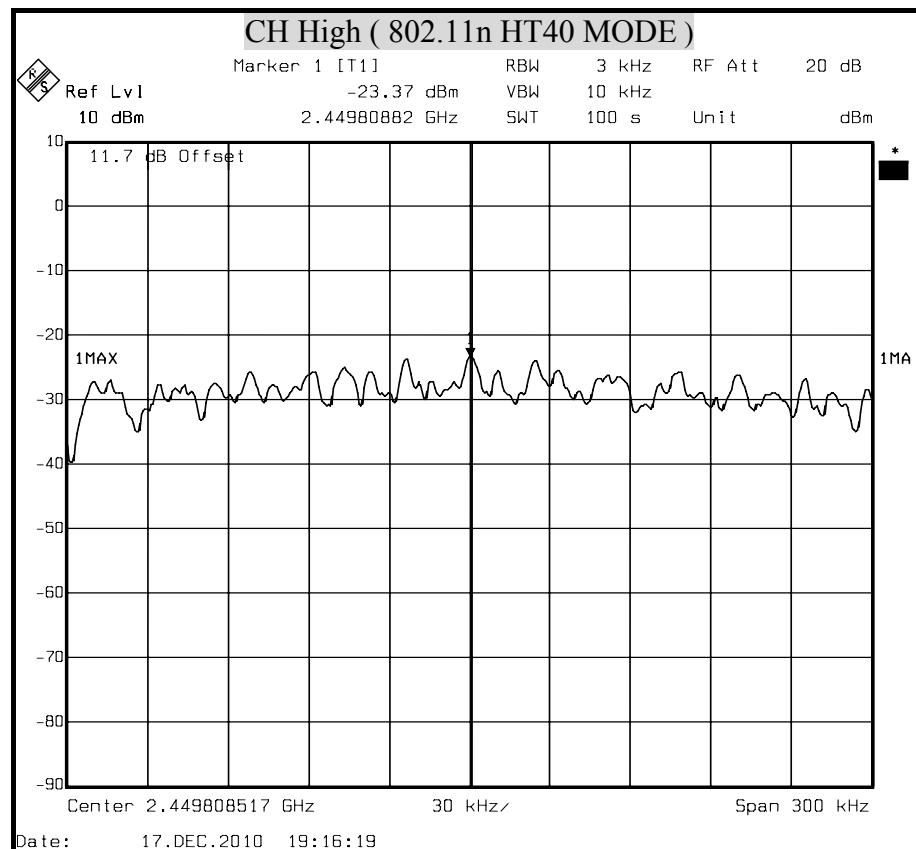
Date of Issue: January 28, 2011



**POWER SPECTRAL DENSITY (802.11n HT20 MODE)**



**POWER SPECTRAL DENSITY (802.11n HT40 MODE)**





8.5 CONDUCTED SPURIOUS EMISSION

LIMITS

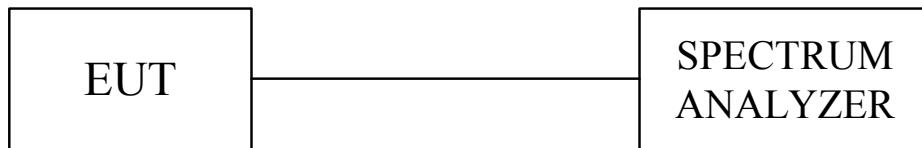
§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26.5 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

TEST SETUP



TEST RESULTS

No non-compliance noted.



TEST DATA

IEEE 802.11b mode

Low

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2412	11.7	96.47	108.17	N/A	N/A	---
6925.99198	11.7	44.48	56.18	88.17	-31.99	Pass
13821.98397	11.7	44.00	55.7	88.17	-32.47	Pass

Mid

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2437	11.7	96.87	108.57	N/A	N/A	---
6607.71543	11.7	44.84	56.54	88.57	-32.03	Pass
14140.26052	11.7	43.76	55.46	88.57	-33.11	Pass

High

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2462	11.7	95.32	107.02	N/A	N/A	---
6713.80762	11.7	43.94	55.64	87.02	-31.38	Pass
12814.10822	11.7	43.33	55.03	87.02	-31.99	Pass

**IEEE 802.11g mode****Low**

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2412	11.7	88.14	99.84	N/A	N/A	---
6766.85371	11.7	44.58	56.28	79.84	-23.56	Pass
9047.83567	11.7	43.06	54.76	79.84	-25.08	Pass

Mid

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2437	11.7	88.52	100.22	N/A	N/A	---
6925.99198	11.7	44.49	56.19	80.22	-24.03	Pass
13397.61523	11.7	44.07	55.77	80.22	-24.45	Pass

High

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2462	11.7	89.26	100.96	N/A	N/A	---
6925.99198	11.7	46.15	57.85	80.96	-23.11	Pass
12389.73948	11.7	43.83	55.53	80.96	-25.43	Pass

**IEEE 802.1120 mode****Low**

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2412	11.7	87.87	99.57	N/A	N/A	---
6979.03808	11.7	45.90	57.6	79.57	-21.97	Pass
8517.37475	11.7	44.60	56.3	79.57	-23.27	Pass

Mid

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2437	11.7	87.90	99.6	N/A	N/A	---
6979.03808	11.7	44.21	55.91	79.60	-23.69	Pass
8305.19038	11.7	42.02	53.72	79.60	-25.88	Pass

High

Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2462	11.7	89.04	100.74	N/A	N/A	---
6979.03808	11.7	44.73	56.43	80.74	-24.31	Pass
10427.03407	11.7	41.75	53.45	80.74	-27.29	Pass

**IEEE 802.1140 mode****Low**

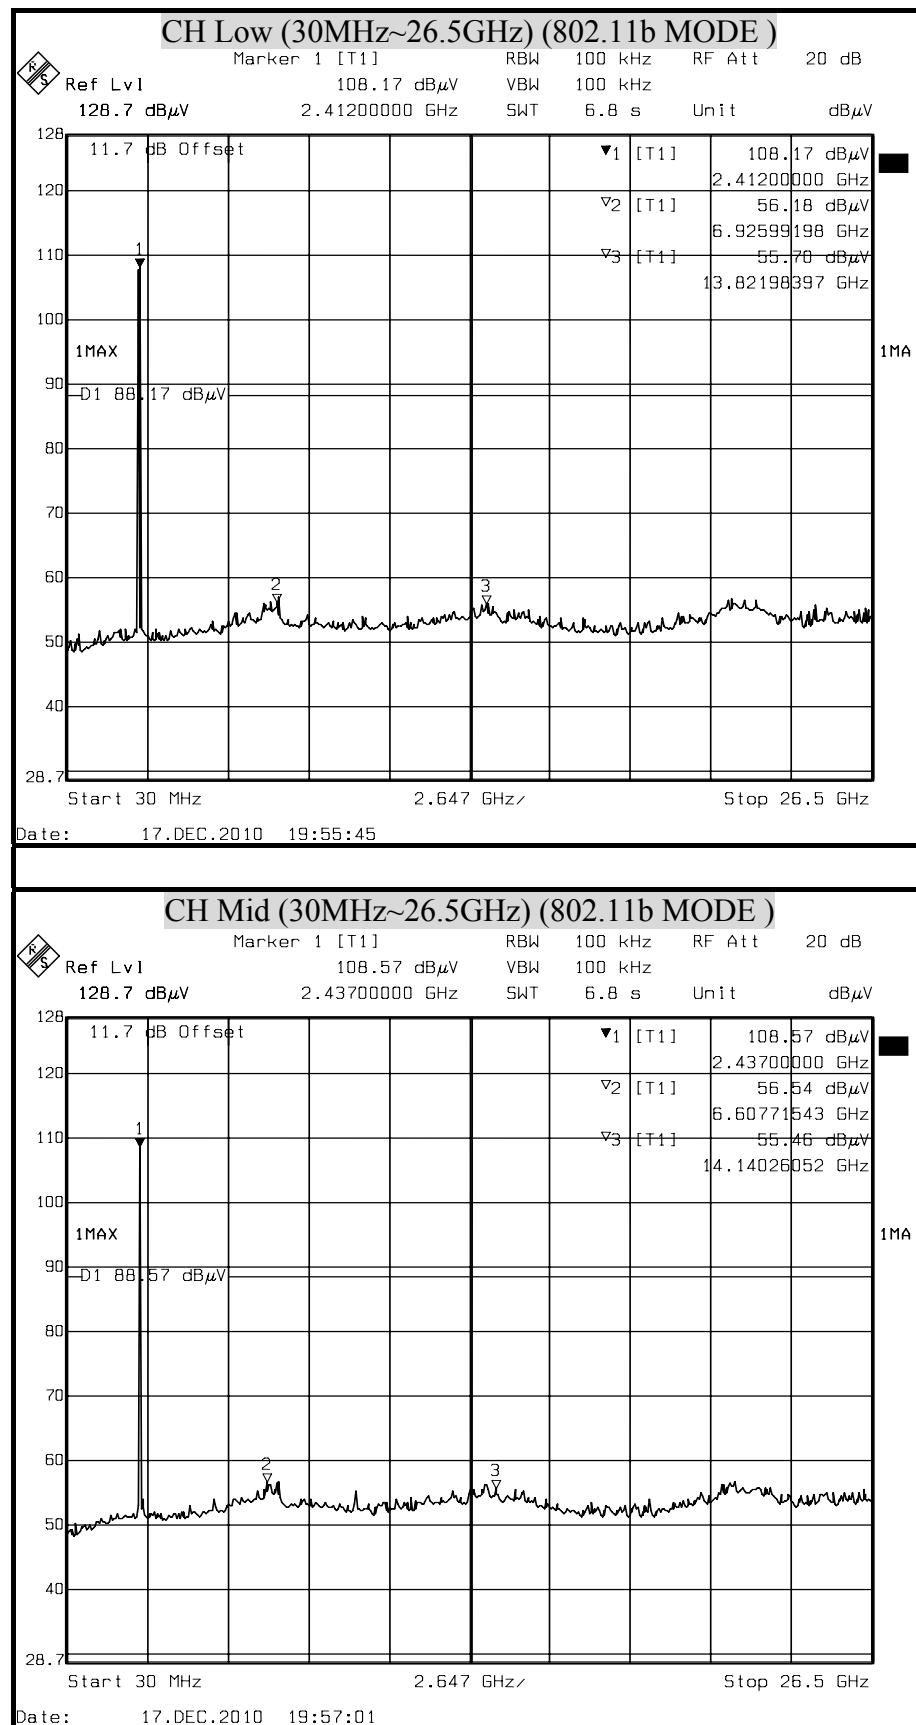
Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2422	11.7	84.30	96	N/A	N/A	---
6979.03808	11.7	44.46	56.16	76.00	-19.84	Pass
11275.77154	11.7	42.30	54	76.00	-22.00	Pass

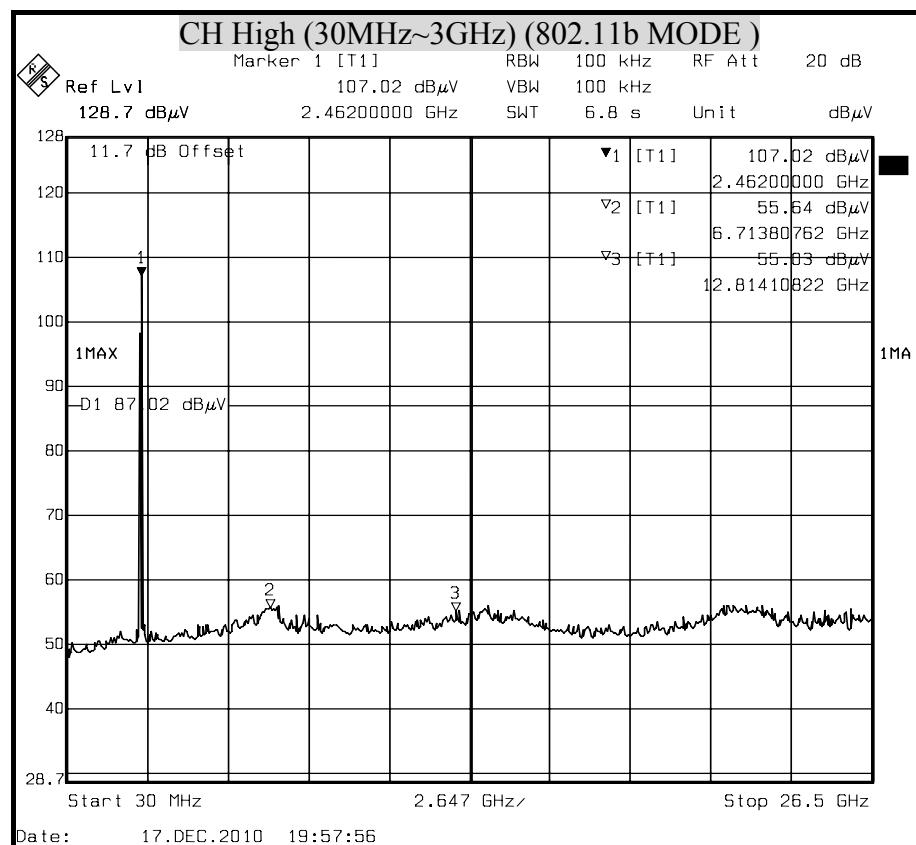
Mid

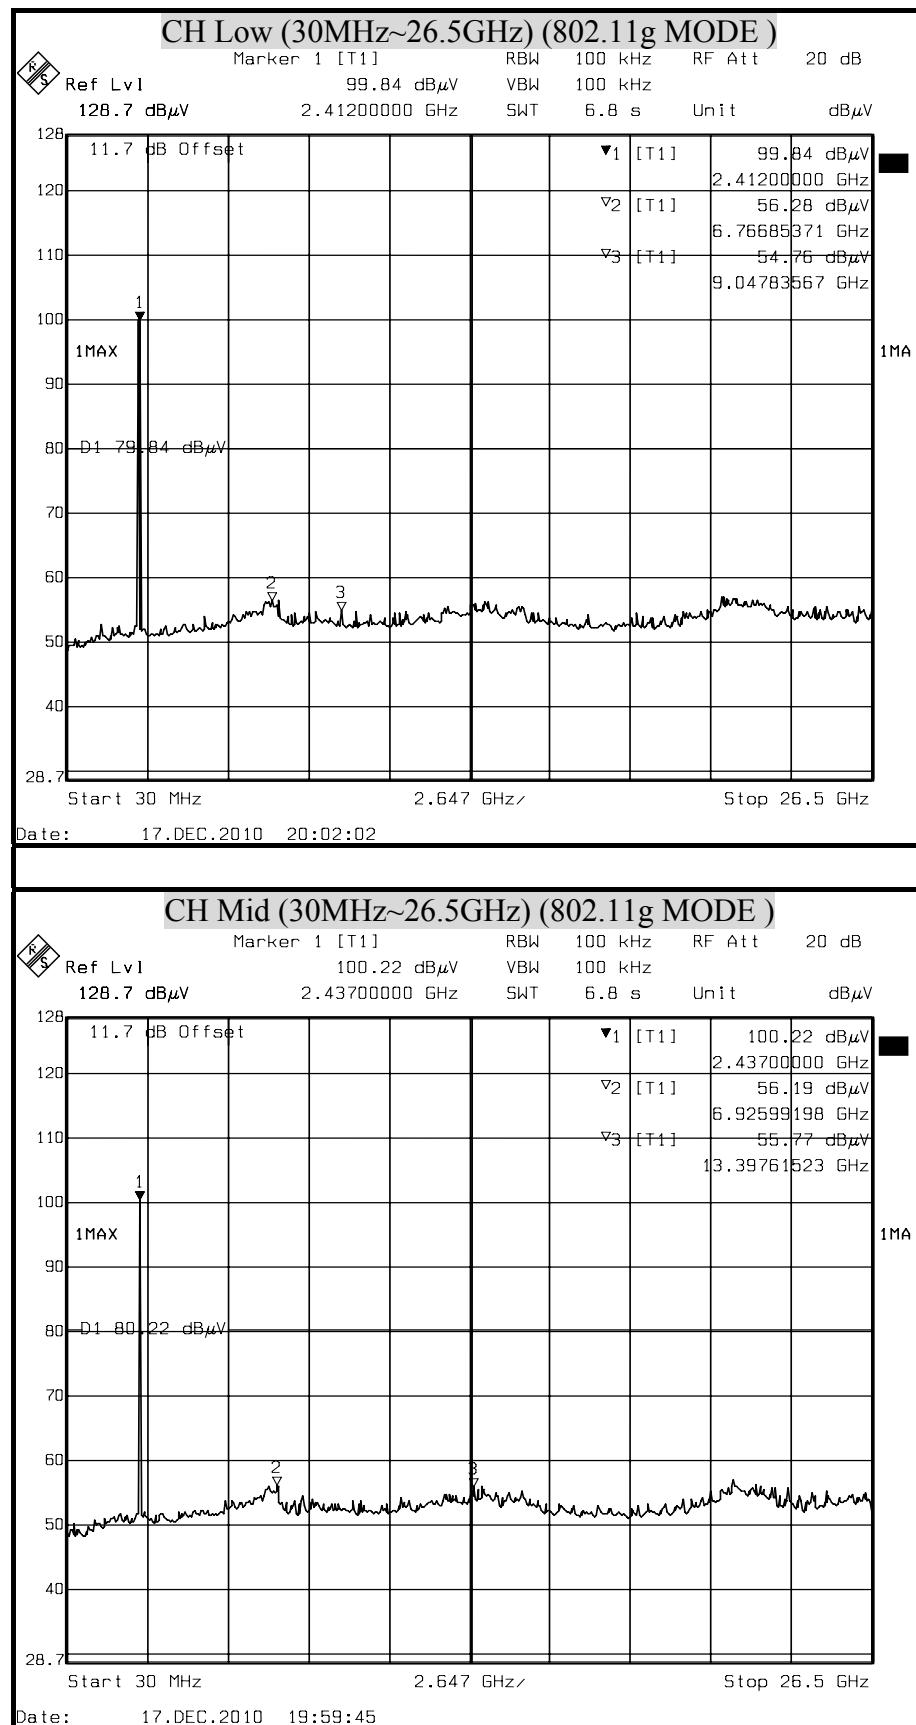
Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2437	11.7	84.93	96.63	N/A	N/A	---
6979.03808	11.7	43.70	55.4	76.63	-21.23	Pass
14140.26052	11.7	43.51	55.21	76.63	-21.42	Pass

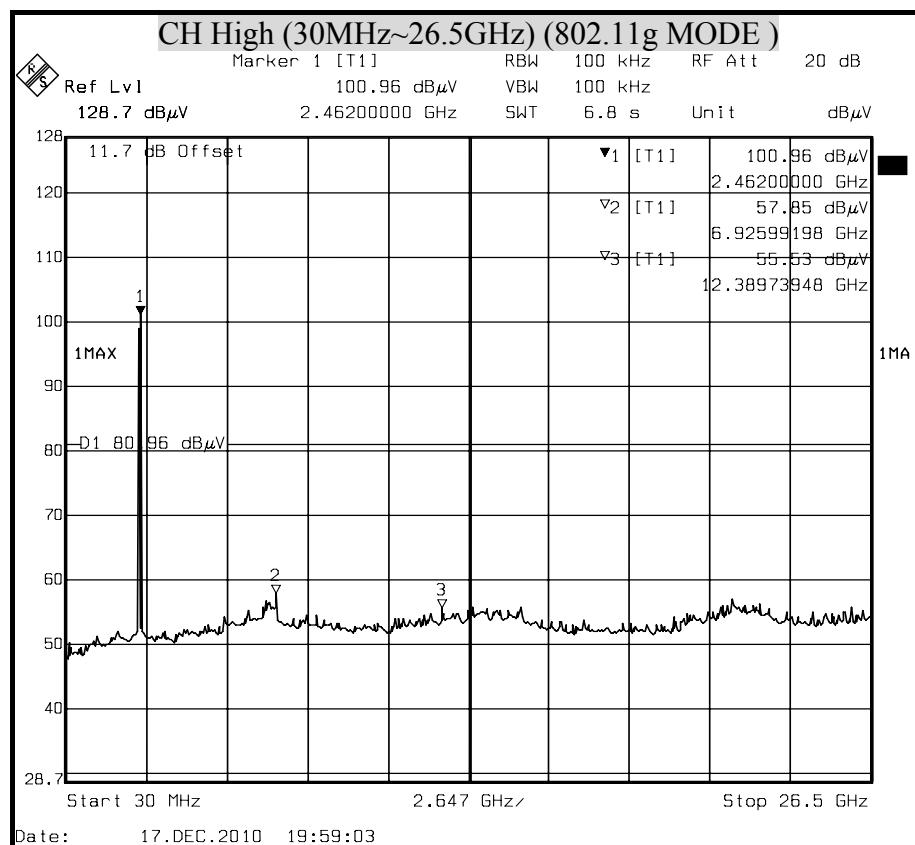
High

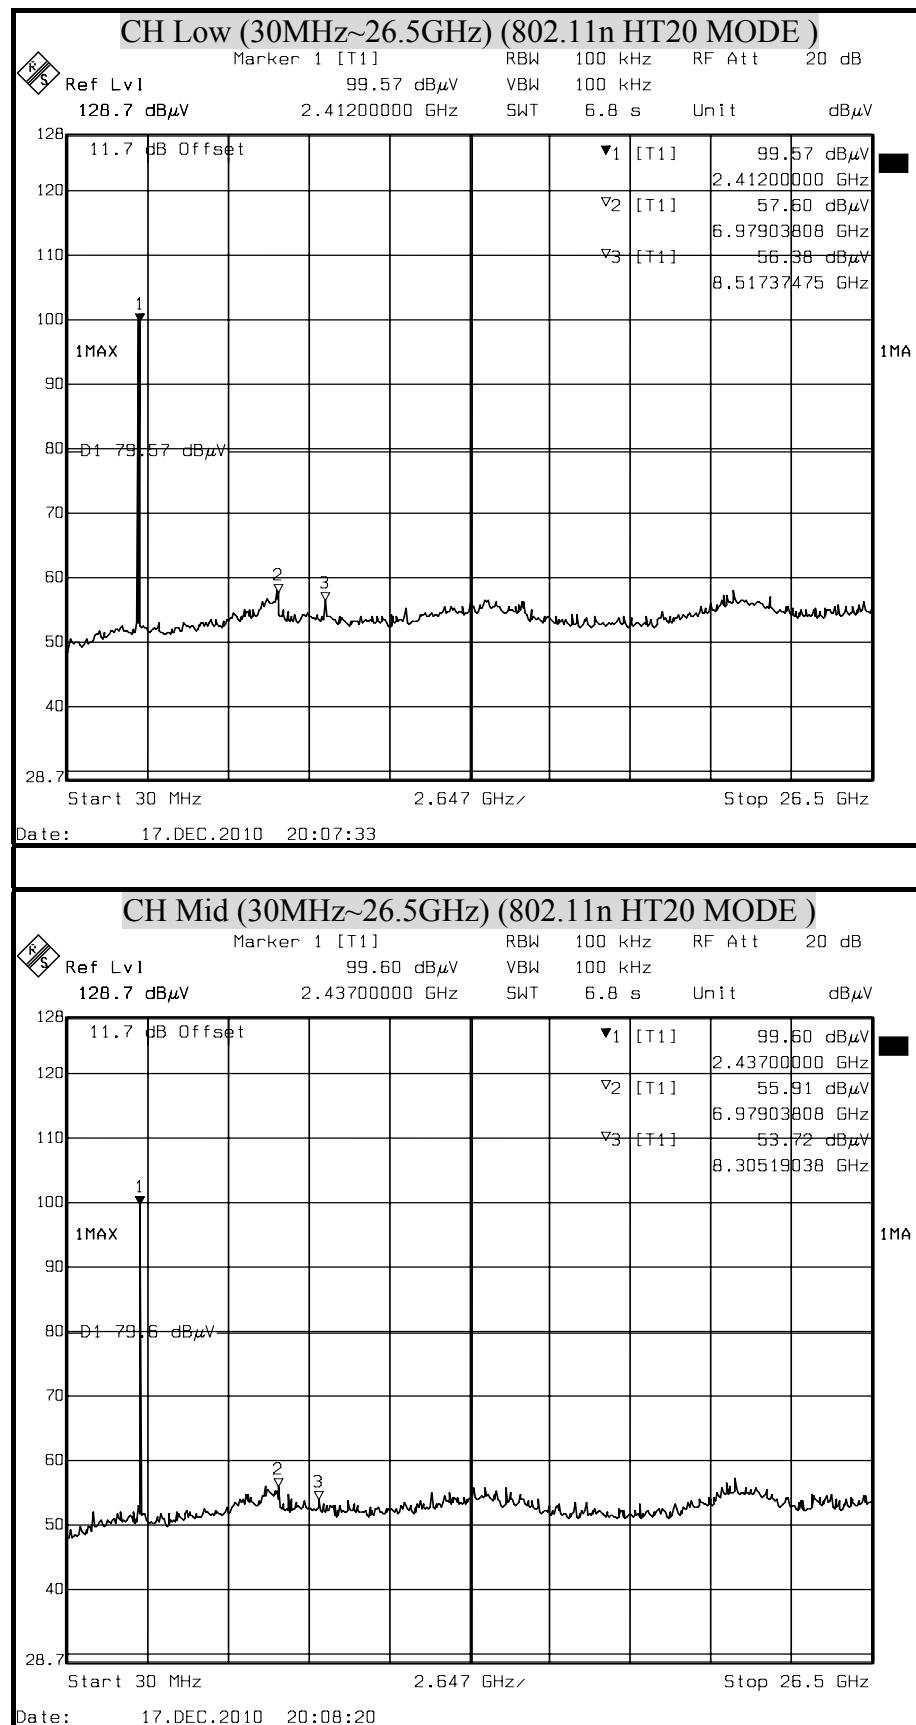
Frequency (MHz)	Offset (dB)	Reading (dB μ V)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Pass/Fail
2452	11.7	84.68	96.38	N/A	N/A	---
6979.03808	11.7	44.02	55.72	76.38	-20.66	Pass
13928.07615	11.7	44.53	56.23	76.38	-20.15	Pass

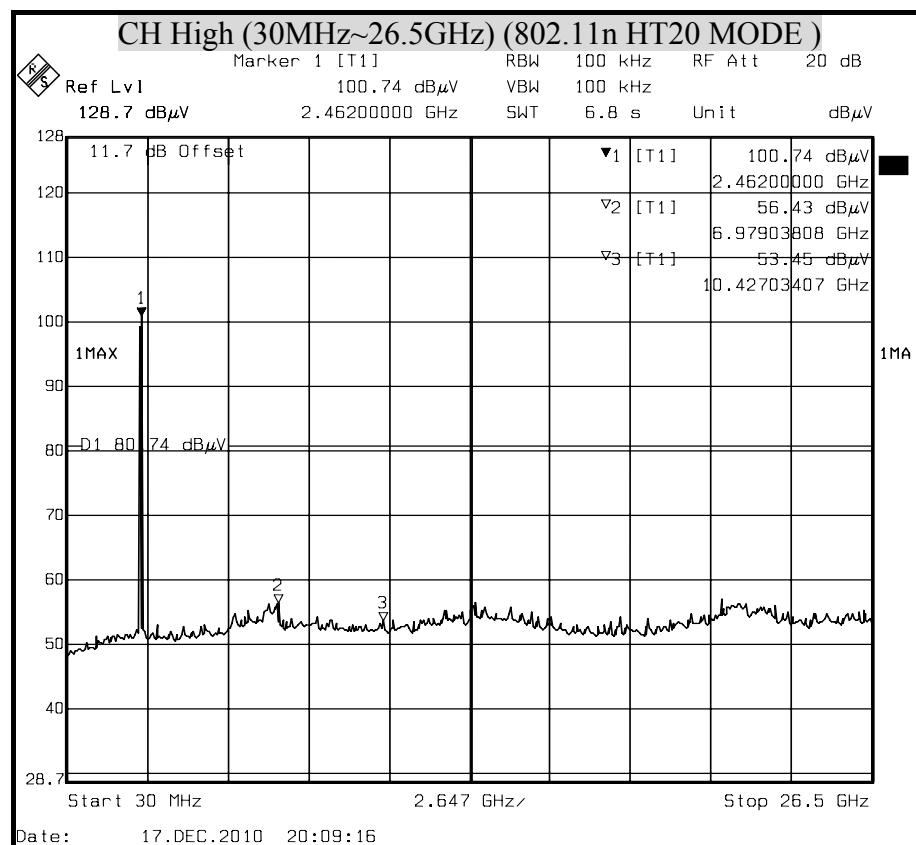
**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT****(IEEE 802.11b MODE)**

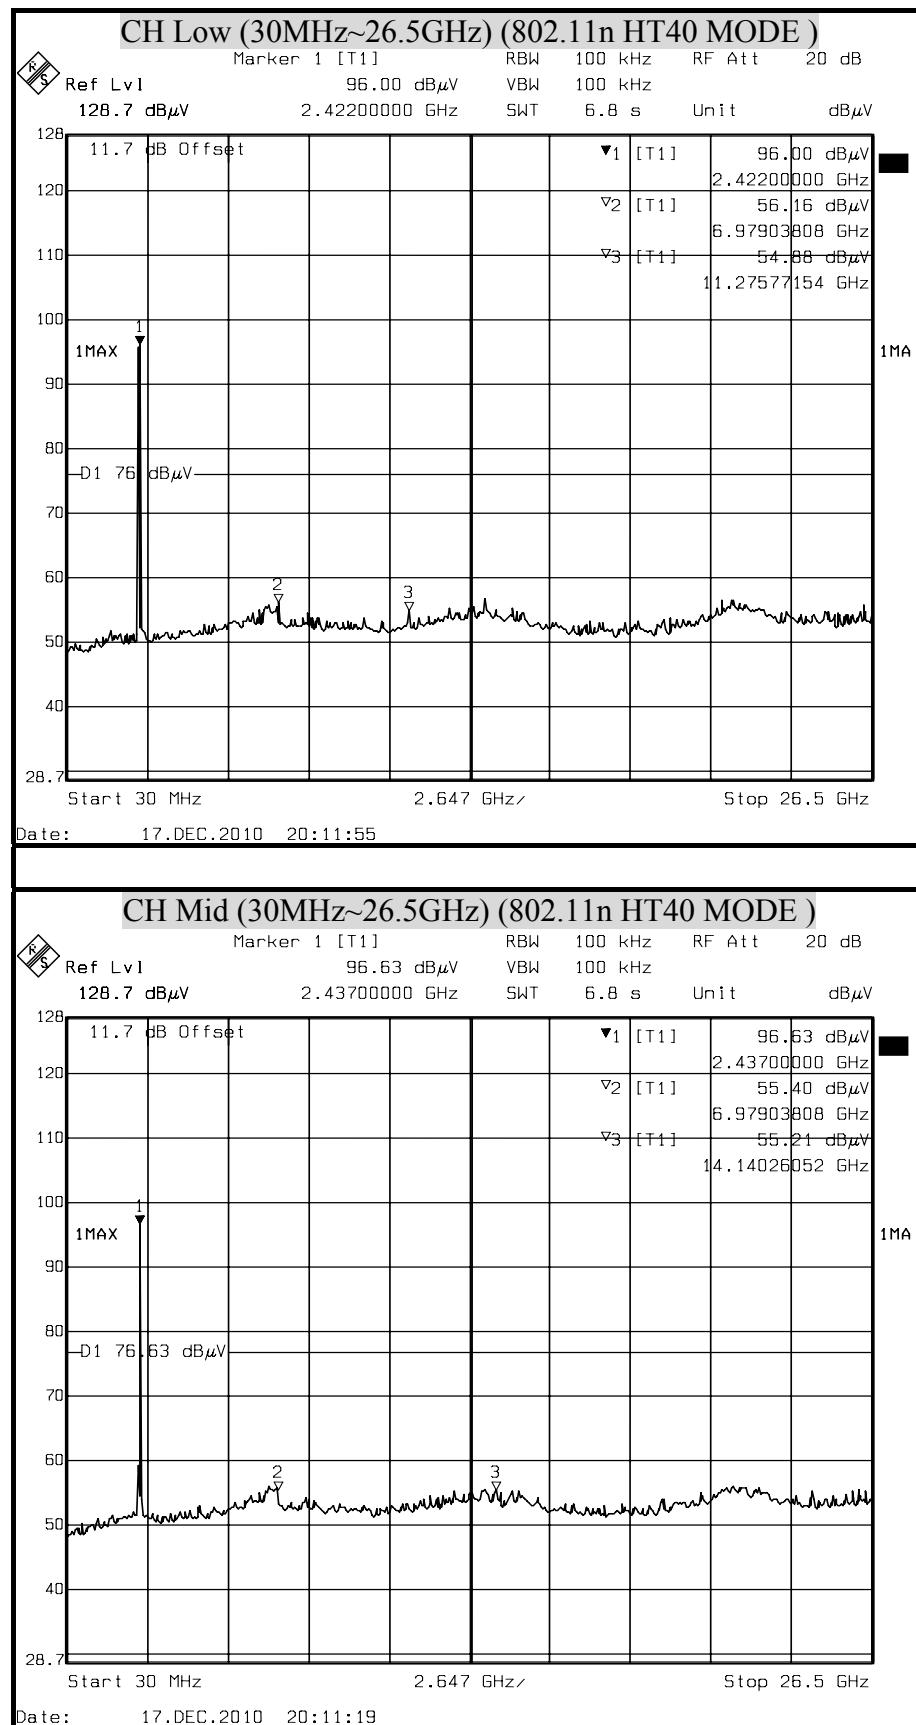


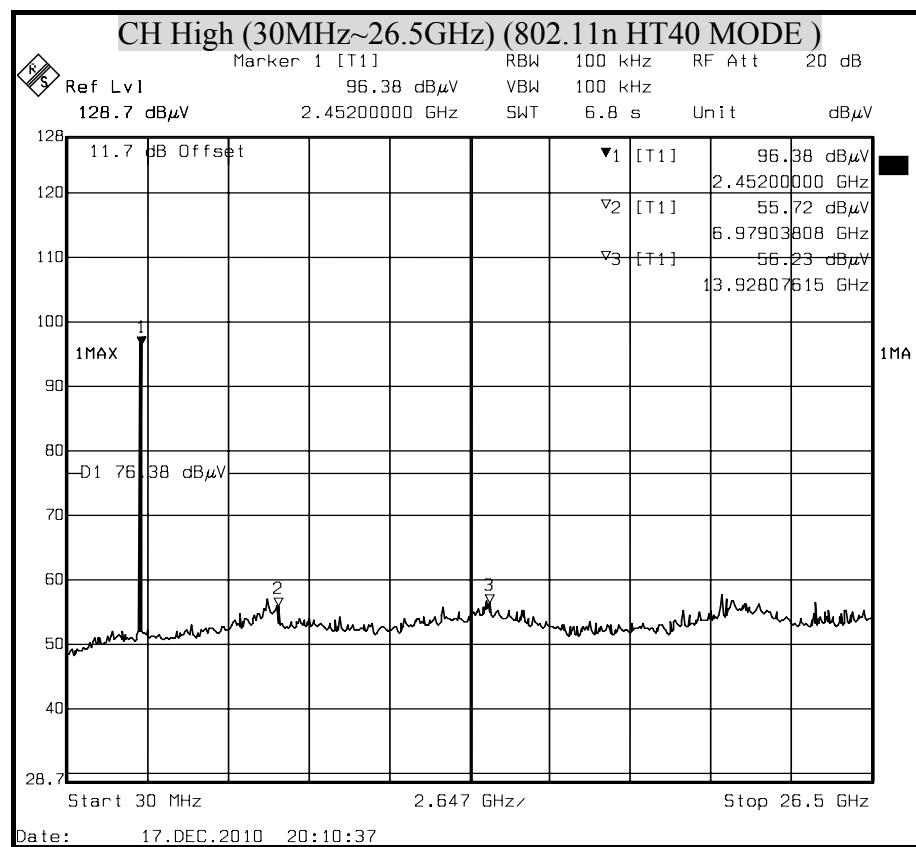
**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT****(802.11g MODE)**



**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT****(802.11n HT20 MODE)**



**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT****(802.11n HT40 MODE)**





8.6 RADIATED EMISSIONS

8.6.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

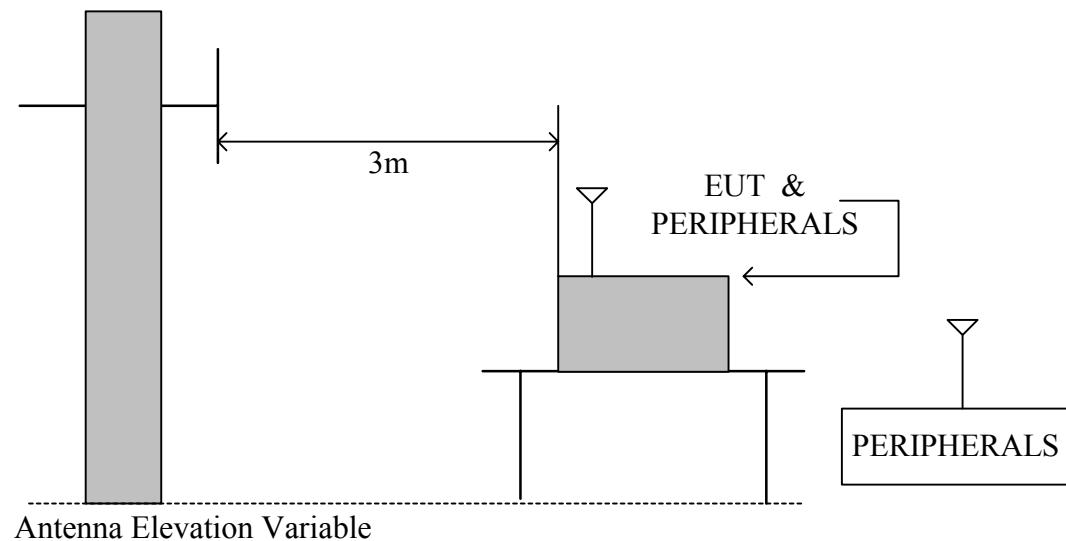
TEST EQUIPMENTS

The following test equipments are utilized in making the measurements contained in this report.

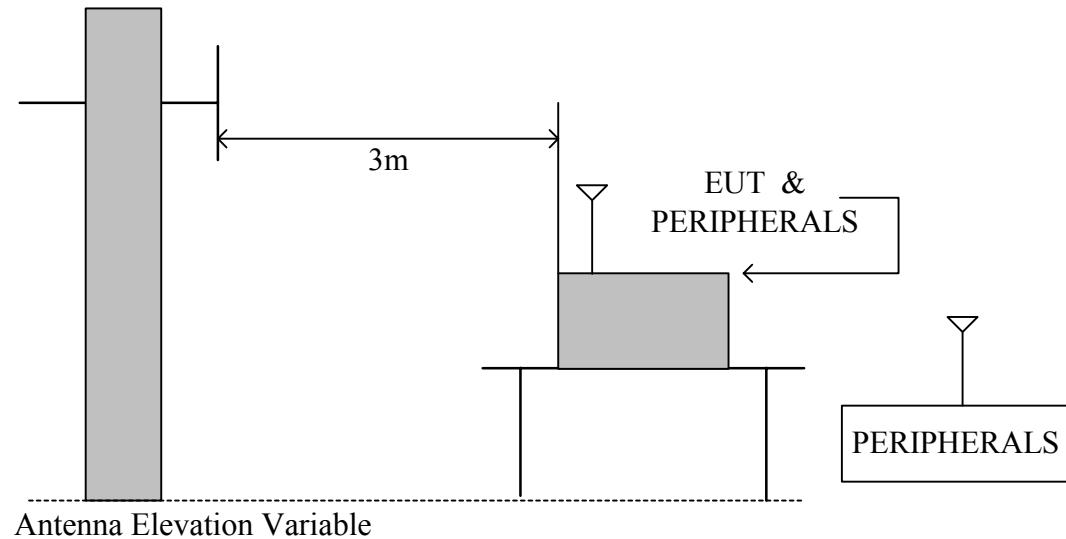
Open Area Test Site # 6				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
TYPE N COAXIAL CABLE	SUHNER	CHA9513	6	NOV. 17, 2011
BI-LOG Antenna	Sunol	JB1	A070506-2	OCT. 4, 2011
LOOP ANTENNA	EMCO	6502	8905-2356	JUN. 10, 2011
Pre-Amplifier	HP	8447F	2944A03817	NOV. 23, 2011
EMI Receiver	R&S	ESVS10	833206/012	MAY 10, 2011
RF Cable	SUHNER	SUCOFLEX104PEA	20520/4PEA	NOV. 10, 2011
Horn Antenna	Com-Power	AH-118	071032	DEC. 27, 2011
Spectrum Analyzer	R&S	FSEK 30	835253/002	JUL. 14, 2011
Pre-Amplifier	MITEQ	AFS44-00108650-42-10P-44	1205908	NOV. 23, 2011
Turn Table	Yo Chen	001	-----	N.C.R.
Antenna Tower	AR	TP1000A	309874	N.C.R.
Controller	CT	SC101	-----	N.C.R.
Test S/W	e-3 (5.04303e)			

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.



The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.





TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. **No emission is found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)**

TEST RESULTS

No non-compliance noted.



8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	11n Mini Router	Test Date	2010/12/27
Model	BR081n	Test By	John Chen
Test Mode	Normal operating / worst case	TEMP& Humidity	17.2°C, 47%

Horizontal

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Level	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
70.52	13.62	8.71	1.29	23.61	40.00	-16.39	QP
156.25	19.42	13.41	2.15	34.98	43.50	-8.53	QP
312.50	14.85	14.44	3.42	32.71	46.00	-13.29	QP
468.75	11.62	17.58	4.53	33.73	46.00	-12.27	QP
781.25	10.93	21.73	5.94	38.60	46.00	-7.40	QP
811.94	11.59	22.07	6.04	39.70	46.00	-6.30	QP
N/A	-----	-----	-----	-----	-----	-----	-----

Vertical

Frequency	Meter Reading	Antenna Factor	Cable Loss	Emission Level	Limits	Margin	Detector Mode
(MHz)	(dB μ V)	(dB/M)	(dB)	(dB μ V/M)	(dB μ V/M)	(dB)	PK/QP
68.42	26.37	9.09	1.27	36.73	40.00	-3.27	QP
113.51	19.54	8.85	1.70	30.10	43.50	-13.40	QP
156.25	20.31	13.41	2.15	35.87	43.50	-7.64	QP
312.50	18.54	14.44	3.42	36.40	46.00	-9.60	QP
468.75	9.77	17.58	4.53	31.88	46.00	-14.12	QP
781.25	10.65	21.73	5.94	38.32	46.00	-7.68	QP
N/A	-----	-----	-----	-----	-----	-----	-----

REMARK: Emission level (dB μ V/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB μ V).



8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.00	52.78	25.55	2.10	41.76	0.74	39.42	74.00	-34.59	P
*	1250.00	42.65	25.55	2.10	41.76	0.74	29.29	54.00	-24.72	A
*	4824.06	53.05	33.17	3.73	42.38	0.69	48.26	74.00	-25.74	P
*	4824.06	43.84	33.17	3.73	42.38	0.69	39.05	54.00	-14.95	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11b mode / CH Low				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.98	54.36	25.55	2.10	41.76	0.74	40.99	74.00	-33.01	P
*	1249.98	44.67	25.55	2.10	41.76	0.74	31.30	54.00	-22.70	A
*	4824.03	52.17	33.17	3.73	42.38	0.69	47.38	74.00	-26.62	P
*	4824.03	43.09	33.17	3.73	42.38	0.69	38.30	54.00	-15.70	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Horizontal

TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m			Horizontal polarity			
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)	
*	1250.03	52.41	25.55	2.10	41.75	0.74	39.05	74.00	-34.95	P
*	1250.03	42.63	25.55	2.10	41.75	0.74	29.27	54.00	-24.73	A
*	4873.98	52.47	33.32	3.74	42.43	0.71	47.81	74.00	-26.19	P
*	4873.98	43.08	33.32	3.74	42.43	0.71	38.42	54.00	-15.58	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11b mode / CH Middle				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.02	54.78	25.55	2.10	41.75	0.74	41.42	74.00	-32.58	P
*	1250.02	44.23	25.55	2.10	41.75	0.74	30.87	54.00	-23.13	A
*	4874.02	52.98	33.32	3.74	42.43	0.71	48.32	74.00	-25.68	P
*	4874.02	43.29	33.32	3.74	42.43	0.71	38.63	54.00	-15.37	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.96	53.62	25.55	2.10	41.76	0.74	40.25	74.00	-33.75	P
*	1249.96	42.18	25.55	2.10	41.76	0.74	28.81	54.00	-25.19	A
*	4924.07	53.84	33.47	3.76	42.48	0.73	49.32	74.00	-24.68	P
*	4924.07	43.58	33.47	3.76	42.48	0.73	39.06	54.00	-14.94	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11b TX (CH High)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11b mode / CH High				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.98	54.74	25.55	2.10	41.76	0.74	41.37	74.00	-32.63	P
*	1249.98	44.68	25.55	2.10	41.76	0.74	31.31	54.00	-22.69	A
*	4924.04	52.79	33.47	3.76	42.48	0.73	48.27	74.00	-25.73	P
*	4924.04	44.36	33.47	3.76	42.48	0.73	39.84	54.00	-14.16	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.97	53.74	25.55	2.10	41.76	0.74	40.37	74.00	-33.63	P
*	1249.97	42.65	25.55	2.10	41.76	0.74	29.28	54.00	-24.72	A
*	4824.05	52.49	33.17	3.73	42.38	0.69	47.70	74.00	-26.30	P
*	4824.05	42.58	33.17	3.73	42.38	0.69	37.79	54.00	-16.21	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11g mode / CH Low				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.99	54.68	25.55	2.10	41.76	0.74	41.31	74.00	-32.69	P
*	1249.99	43.22	25.55	2.10	41.76	0.74	29.85	54.00	-24.15	A
*	4824.03	52.76	33.17	3.73	42.38	0.69	47.97	74.00	-26.03	P
*	4824.03	42.33	33.17	3.73	42.38	0.69	37.54	54.00	-16.46	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.02	51.63	25.55	2.10	41.75	0.74	38.27	74.00	-35.73	P
*	1250.02	42.38	25.55	2.10	41.75	0.74	29.02	54.00	-24.98	A
*	4874.05	53.69	33.32	3.74	42.43	0.71	49.03	74.00	-24.97	P
*	4874.05	43.54	33.32	3.74	42.43	0.71	38.88	54.00	-15.12	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11g mode / CH Middle				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.99	53.00	25.55	2.10	41.76	0.74	39.63	74.00	-34.37	P
*	1249.99	43.28	25.55	2.10	41.76	0.74	29.91	54.00	-24.09	A
*	4874.04	53.23	33.32	3.74	42.43	0.71	48.57	74.00	-25.43	P
*	4874.04	42.58	33.32	3.74	42.43	0.71	37.92	54.00	-16.08	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m				Horizontal polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.07	52.16	25.55	2.10	41.75	0.74	38.80	74.00	-35.20	P
*	1250.07	42.63	25.55	2.10	41.75	0.74	29.27	54.00	-24.73	A
*	4924.04	53.57	33.47	3.76	42.48	0.73	49.05	74.00	-24.95	P
*	4924.04	42.65	33.47	3.76	42.48	0.73	38.13	54.00	-15.87	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11g TX (CH High)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11g mode / CH High				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.99	53.73	25.55	2.10	41.76	0.74	40.36	74.00	-33.64	P
*	1249.99	43.99	25.55	2.10	41.76	0.74	30.62	54.00	-23.38	A
*	4924.06	52.85	33.47	3.76	42.48	0.73	48.33	74.00	-25.67	P
*	4924.06	42.46	33.47	3.76	42.48	0.73	37.94	54.00	-16.06	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.00	53.32	25.55	2.10	41.76	0.74	39.96	74.00	-34.05	P
*	1250.00	42.66	25.55	2.10	41.76	0.74	29.30	54.00	-24.71	A
*	4824.03	52.15	33.17	3.73	42.38	0.69	47.36	74.00	-26.64	P
*	4824.03	42.85	33.17	3.73	42.38	0.69	38.06	54.00	-15.94	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT20 mode / CH Low				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.02	53.63	25.55	2.10	41.75	0.74	40.27	74.00	-33.73	P
*	1250.02	43.81	25.55	2.10	41.75	0.74	30.45	54.00	-23.55	A
*	4824.04	53.63	33.17	3.73	42.38	0.69	48.84	74.00	-25.16	P
*	4824.04	42.46	33.17	3.73	42.38	0.69	37.67	54.00	-16.33	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.98	53.63	25.55	2.10	41.76	0.74	40.26	74.00	-33.74	P
*	1249.98	43.96	25.55	2.10	41.76	0.74	30.59	54.00	-23.41	A
*	4874.04	54.12	33.32	3.74	42.43	0.71	49.46	74.00	-24.54	P
*	4874.04	43.08	33.32	3.74	42.43	0.71	38.42	54.00	-15.58	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT20 mode / CH Middle				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.06	53.14	25.55	2.10	41.75	0.74	39.78	74.00	-34.22	P
*	1250.06	42.85	25.55	2.10	41.75	0.74	29.49	54.00	-24.51	A
*	4874.05	53.33	33.32	3.74	42.43	0.71	48.67	74.00	-25.33	P
*	4874.05	42.74	33.32	3.74	42.43	0.71	38.08	54.00	-15.92	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.08	52.60	25.55	2.10	41.75	0.74	39.24	74.00	-34.76	P
*	1250.08	42.48	25.55	2.10	41.75	0.74	29.12	54.00	-24.88	A
*	4924.08	52.69	33.47	3.76	42.48	0.73	48.17	74.00	-25.83	P
*	4924.08	42.79	33.47	3.76	42.48	0.73	38.27	54.00	-15.73	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT20 TX (CH High)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT20 mode / CH High				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.04	53.98	25.55	2.10	41.75	0.74	40.62	74.00	-33.38	P
*	1250.04	43.54	25.55	2.10	41.75	0.74	30.18	54.00	-23.82	A
*	4924.06	52.73	33.47	3.76	42.48	0.73	48.21	74.00	-25.79	P
*	4924.06	42.85	33.47	3.76	42.48	0.73	38.33	54.00	-15.67	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.97	53.12	25.55	2.10	41.76	0.74	39.75	74.00	-34.25	P
*	1249.97	42.49	25.55	2.10	41.76	0.74	29.12	54.00	-24.88	A
*	4844.02	52.21	33.23	3.74	42.40	0.70	47.48	74.00	-26.52	P
*	4844.02	42.08	33.23	3.74	42.40	0.70	37.35	54.00	-16.65	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Low)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT40 mode / CH Low				Measurement Distance at 3m				Vertical	polarity
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.00	53.49	25.55	2.10	41.76	0.74	40.13	74.00	-33.88	P
*	1250.00	43.52	25.55	2.10	41.76	0.74	30.16	54.00	-23.85	A
*	4844.06	51.63	33.23	3.74	42.40	0.70	46.90	74.00	-27.10	P
*	4844.06	42.25	33.23	3.74	42.40	0.70	37.52	54.00	-16.48	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1249.97	52.93	25.55	2.10	41.76	0.74	39.56	74.00	-34.44	P
*	1249.97	43.20	25.55	2.10	41.76	0.74	29.83	54.00	-24.17	A
*	4874.08	53.09	33.32	3.74	42.43	0.71	48.44	74.00	-25.56	P
*	4874.08	42.71	33.32	3.74	42.43	0.71	38.06	54.00	-15.94	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH Middle)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT40 mode / CH Middle				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.06	53.16	25.55	2.10	41.75	0.74	39.80	74.00	-34.20	P
*	1250.06	43.22	25.55	2.10	41.75	0.74	29.86	54.00	-24.14	A
*	4874.06	52.96	33.32	3.74	42.43	0.71	48.30	74.00	-25.70	P
*	4874.06	42.18	33.32	3.74	42.43	0.71	37.52	54.00	-16.48	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP& Humidity	19.3°C, 48%

Horizontal

	TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m			Horizontal polarity		
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.05	52.74	25.55	2.10	41.75	0.74	39.38	74.00	-34.62	P
*	1250.05	41.52	25.55	2.10	41.75	0.74	28.16	54.00	-25.84	A
*	4904.09	52.03	33.41	3.75	42.46	0.72	47.45	74.00	-26.55	P
*	4904.09	41.28	33.41	3.75	42.46	0.72	36.70	54.00	-17.30	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	11n Mini Router	Test Date	2010/12/17
Model	BR081n	Test By	John Chen
Test Mode	IEEE 802.11n HT40 TX (CH High)	TEMP& Humidity	19.3°C, 48%

Vertical

	TX / IEEE 802.11n HT40 mode / CH High				Measurement Distance at 3m			Vertical	polarity	
	Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
	(MHz)	(dB μ V)	(dB/m)	(dB)	(dB)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	(P/Q/A)
*	1250.06	53.63	25.55	2.10	41.75	0.74	40.27	74.00	-33.73	P
*	1250.06	43.70	25.55	2.10	41.75	0.74	30.34	54.00	-23.66	A
*	4904.11	52.66	33.41	3.75	42.46	0.72	48.08	74.00	-25.92	P
*	4904.11	42.41	33.41	3.75	42.46	0.72	37.83	54.00	-16.17	A
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
	N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

REMARK:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



8.6.4 RESTRICTED BAND EDGES

IEEE 802.11b mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
LOW	H	2390.00	59.36	74	-14.64	Peak
	H	2390.00	46.16	54	-7.84	Average
	V	2390.00	59.10	74	-14.90	Peak
	V	2390.00	45.22	54	-8.78	Average
HIGH	H	2483.50	58.29	74	-15.71	Peak
	H	2483.50	45.98	54	-8.02	Average
	V	2483.50	56	74	-18.00	Peak
	V	2483.50	44.79	54	-9.21	Average

IEEE 802.11g mode

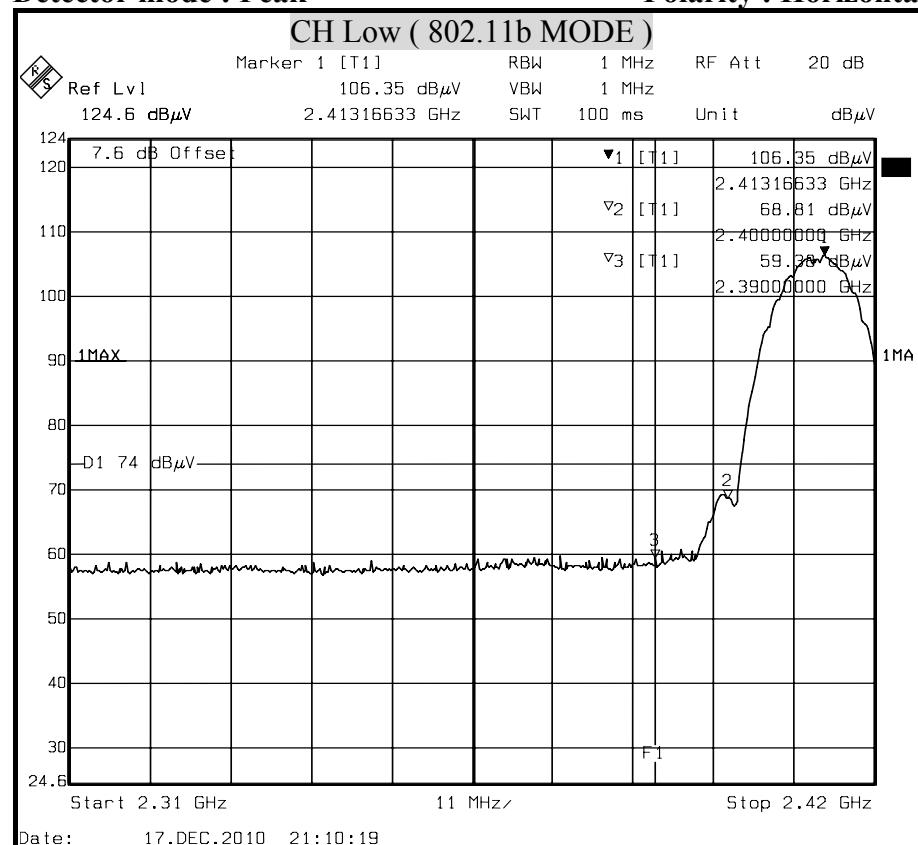
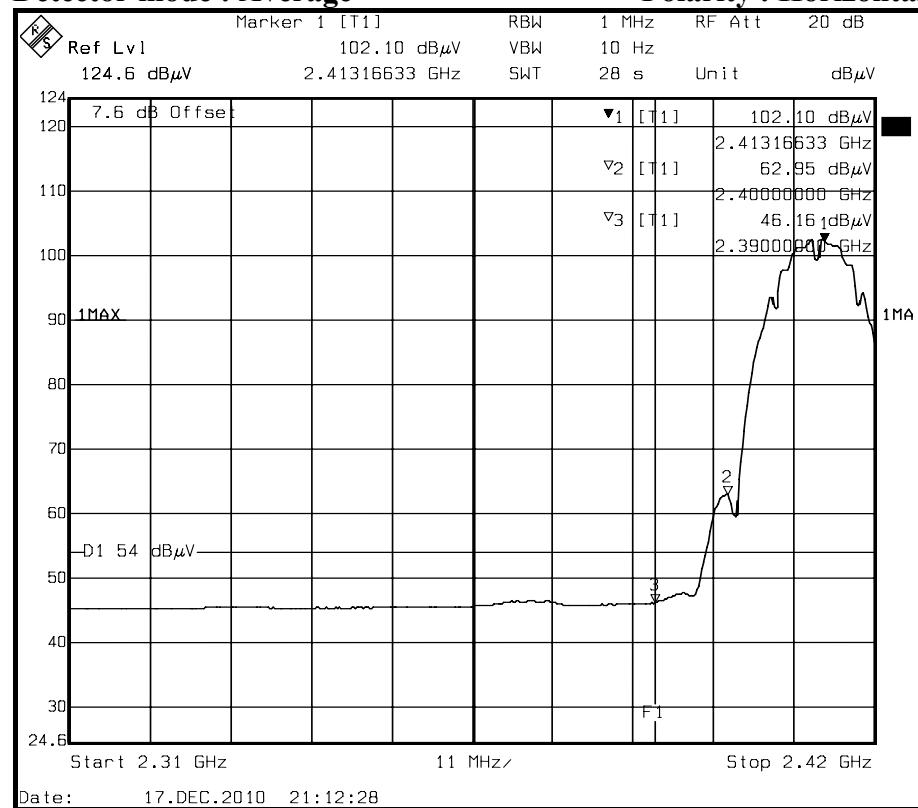
Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
LOW	H	2390.00	57.9	74	-16.10	Peak
	H	2390.00	45.8	54	-8.20	Average
	V	2390.00	57.92	74	-16.08	Peak
	V	2390.00	45.1	54	-8.90	Average
HIGH	H	2483.50	59.54	74	-14.46	Peak
	H	2483.50	46.23	54	-7.77	Average
	V	2483.50	57.78	74	-16.22	Peak
	V	2483.50	44.75	54	-9.25	Average

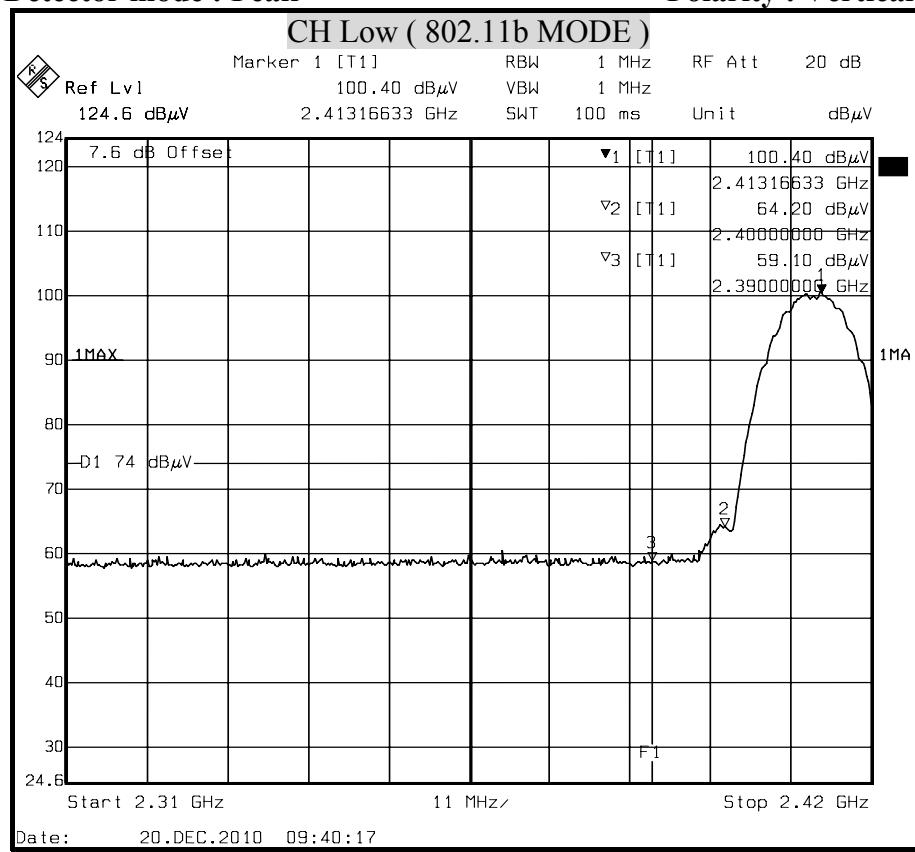
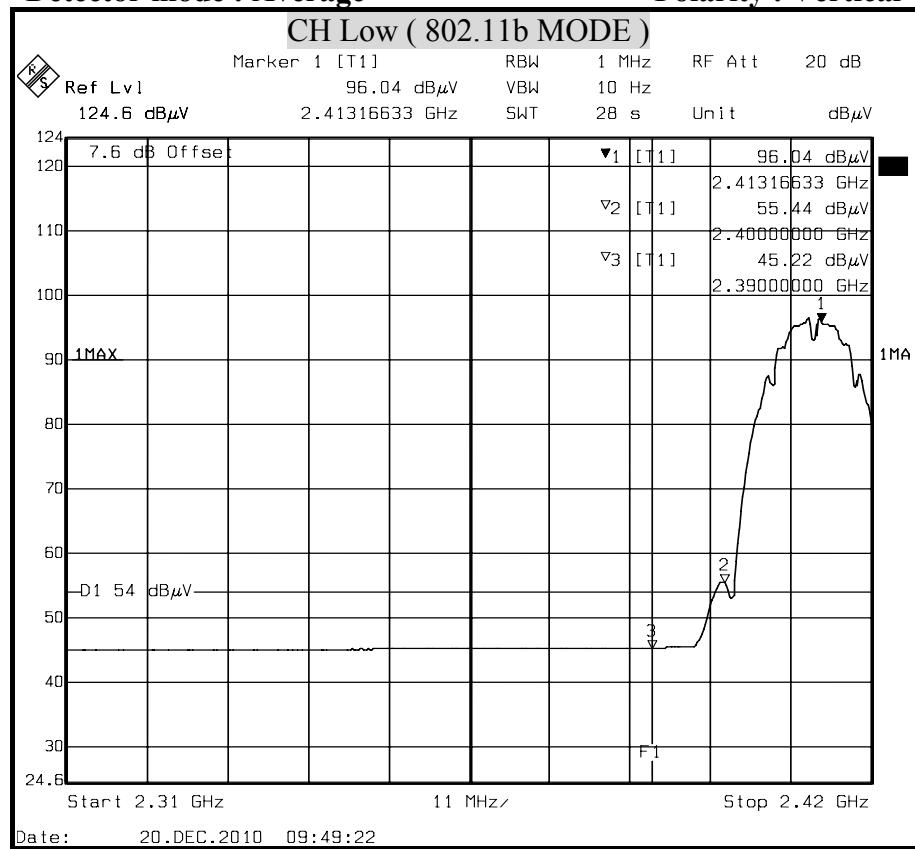
**IEEE 802.11n HT20 mode**

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
LOW	H	2390.00	58.24	74	-15.76	Peak
	H	2390.00	45.71	54	-8.29	Average
	V	2390.00	57.18	74	-16.82	Peak
	V	2390.00	45.09	54	-8.91	Average
HIGH	H	2483.50	60.85	74	-13.15	Peak
	H	2483.50	46.09	54	-7.91	Average
	V	2483.50	56.78	74	-17.22	Peak
	V	2483.50	44.82	54	-9.18	Average

IEEE 802.11n HT40 mode

Channel	Polarity	Freq.(MHz)	Level(dBuV)	Limit(dBuV)	Margin(dB)	Detector
LOW	H	2390.00	57.7	74	-16.30	Peak
	H	2390.00	45.73	54	-8.27	Average
	V	2390.00	57.25	74	-16.75	Peak
	V	2390.00	45.07	54	-8.93	Average
HIGH	H	2483.50	59.72	74	-14.28	Peak
	H	2483.50	46.17	54	-7.83	Average
	V	2483.50	57.27	74	-16.73	Peak
	V	2483.50	44.77	54	-9.23	Average

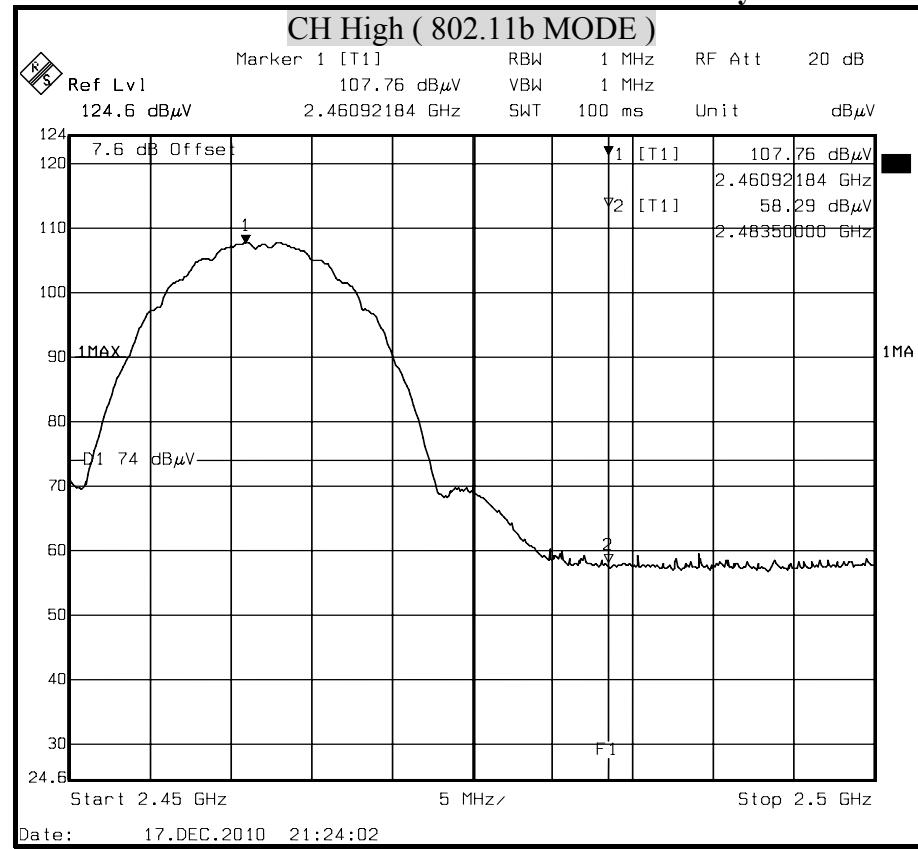
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**



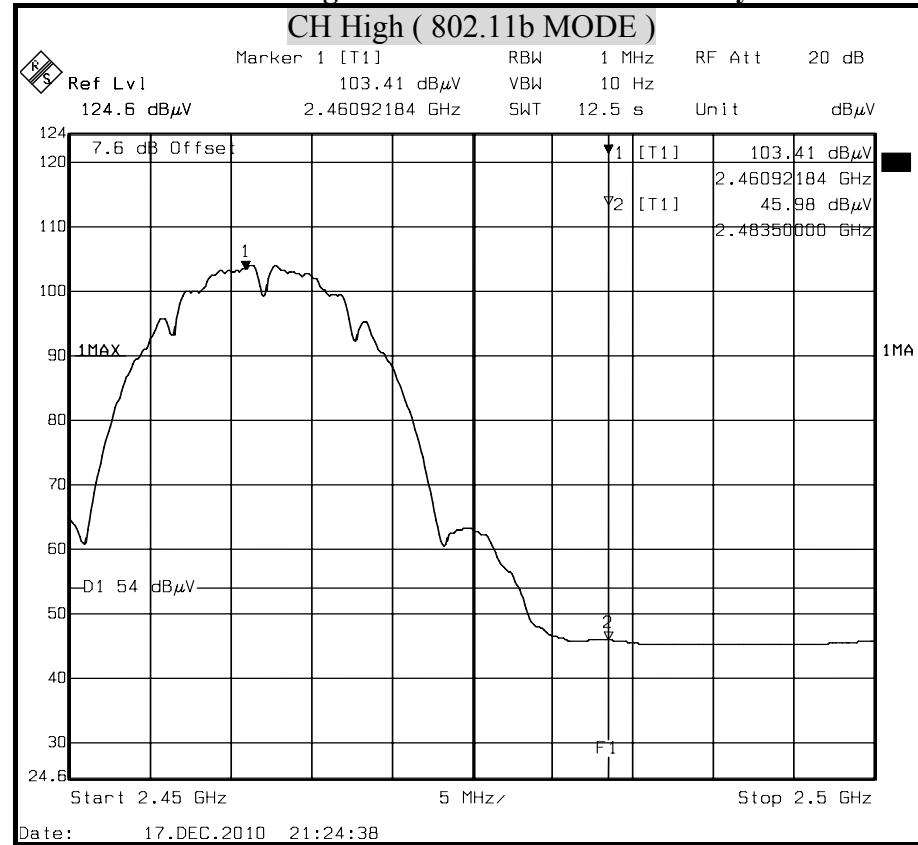
Detector mode : Peak

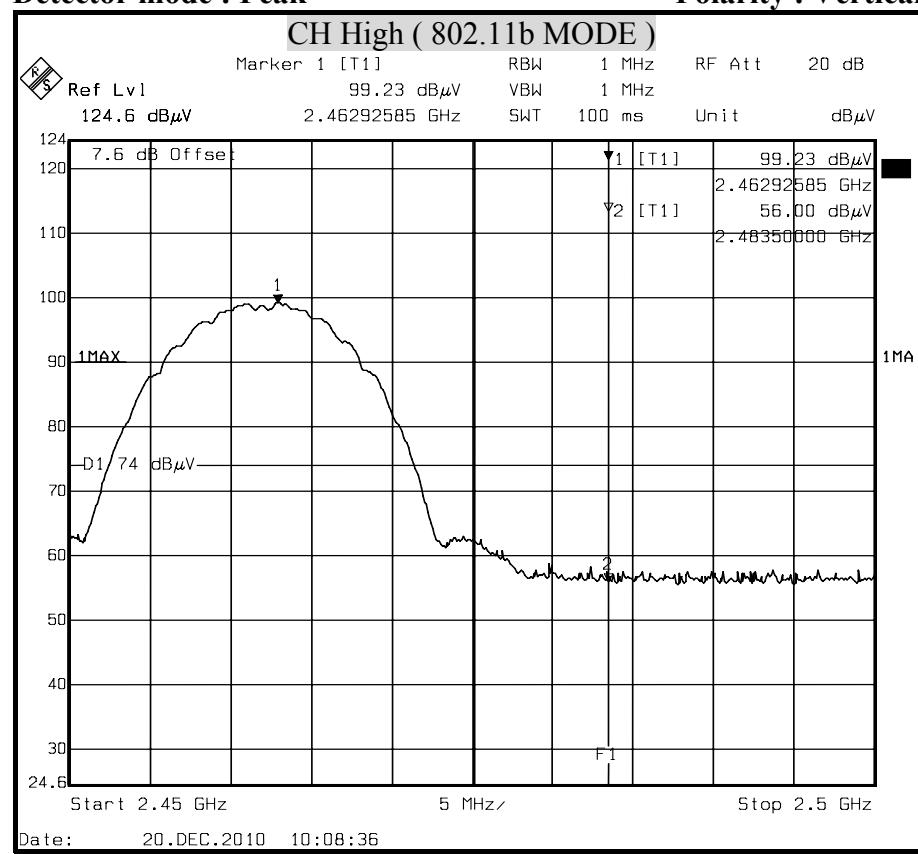
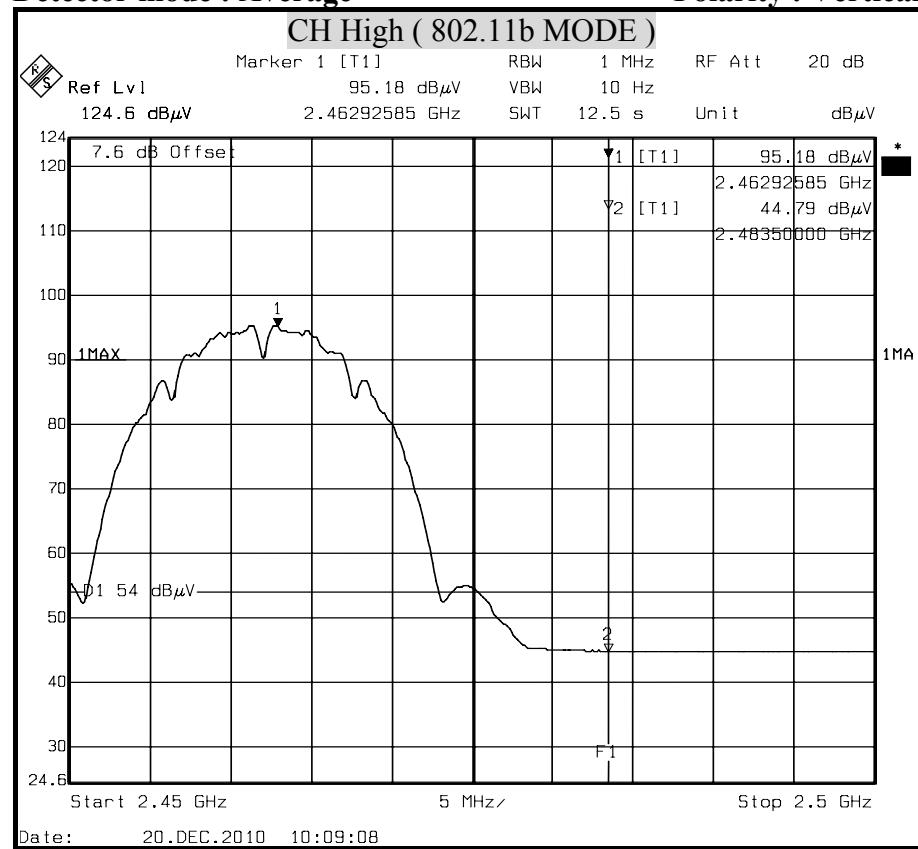
Polarity : Horizontal

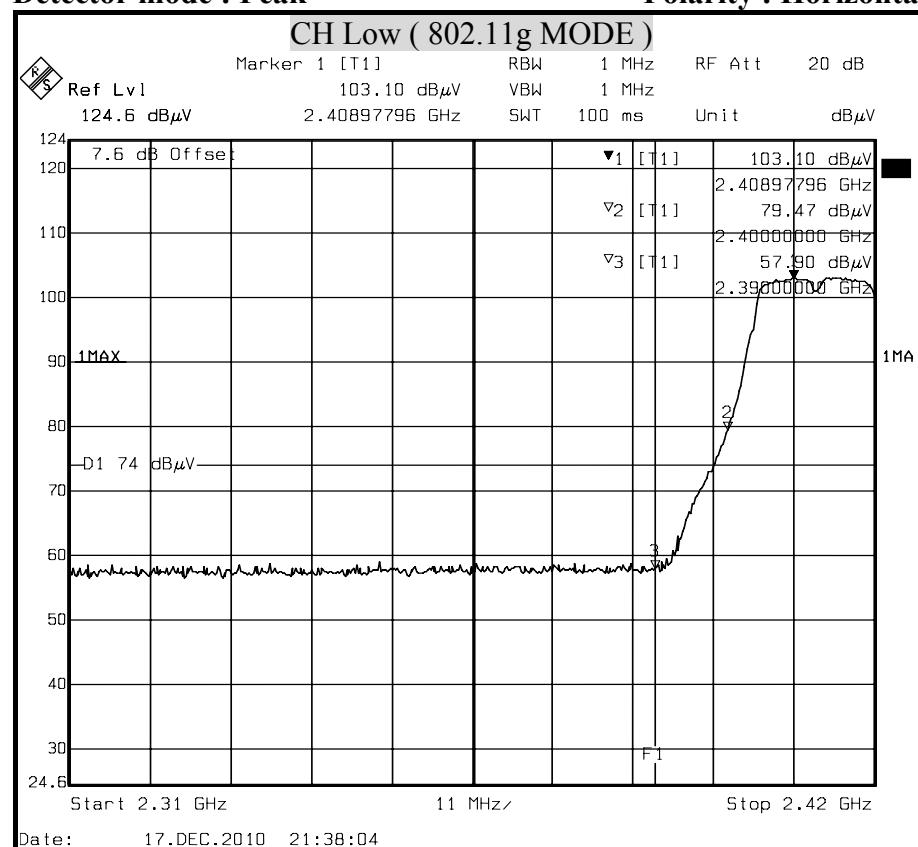
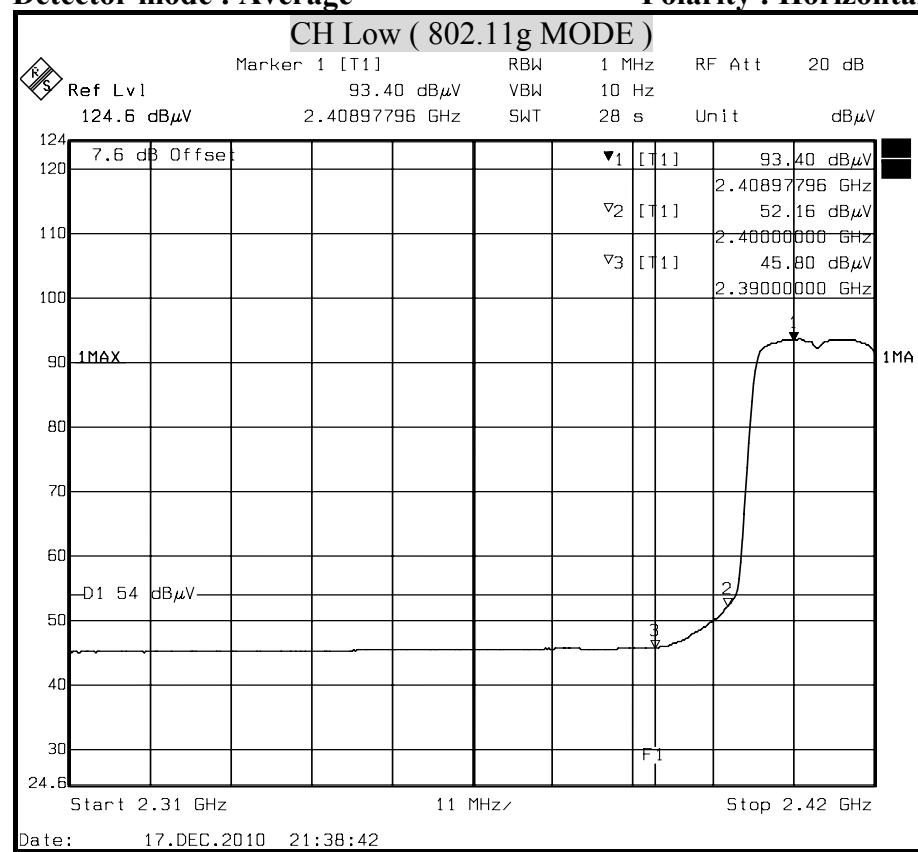


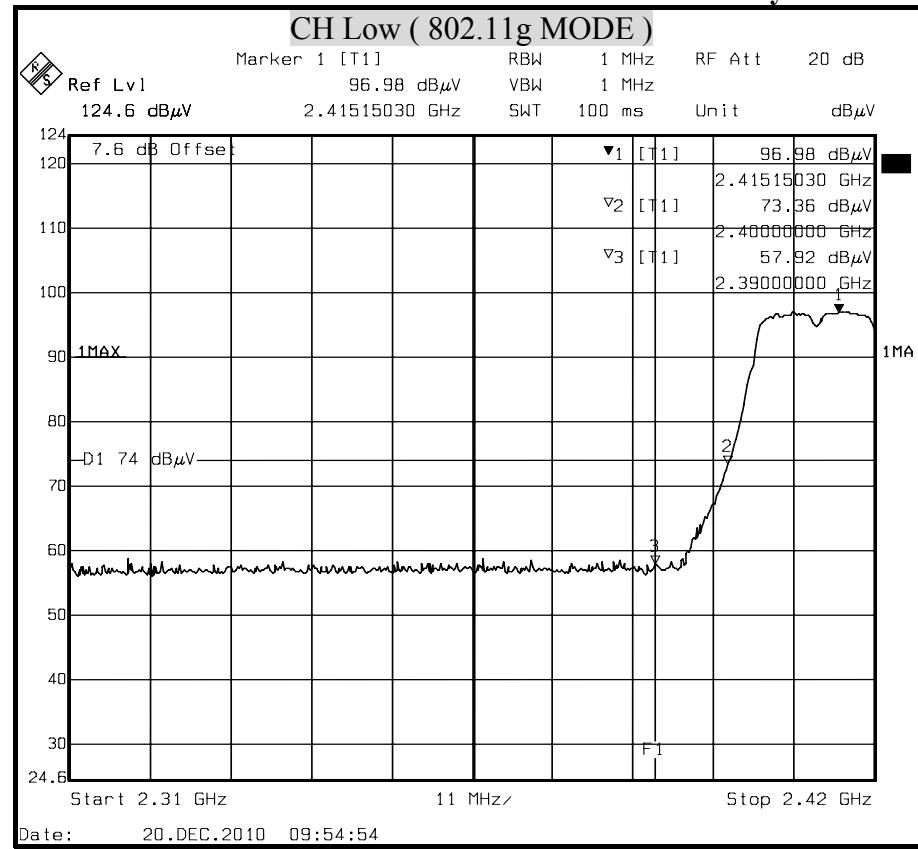
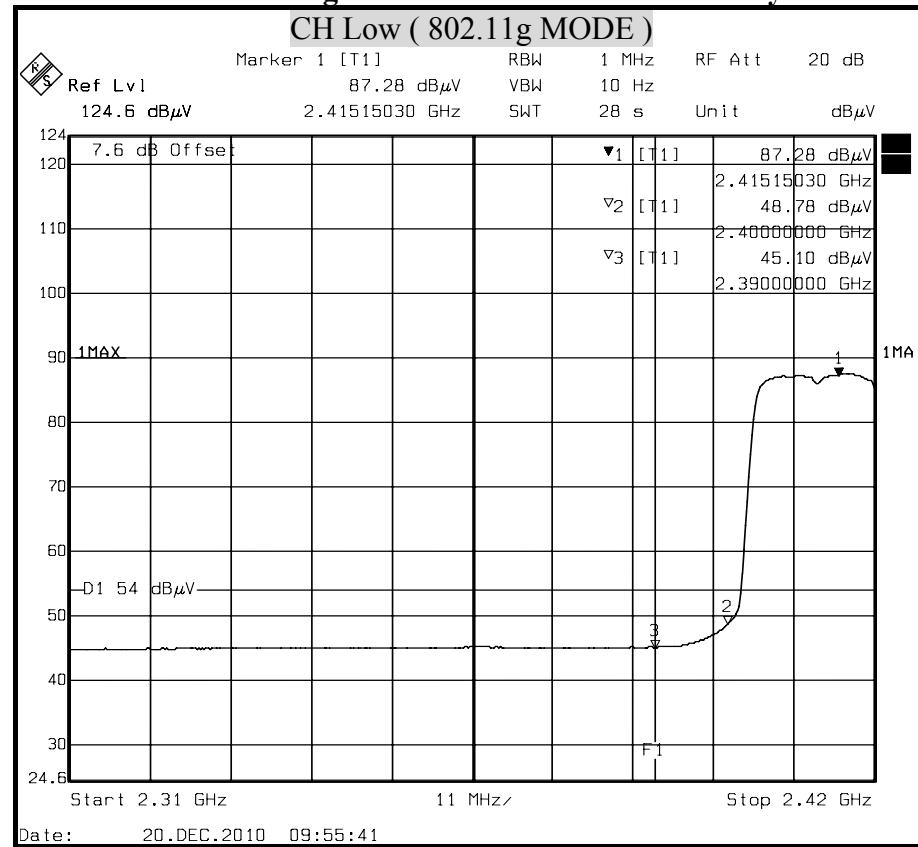
Detector mode : Average

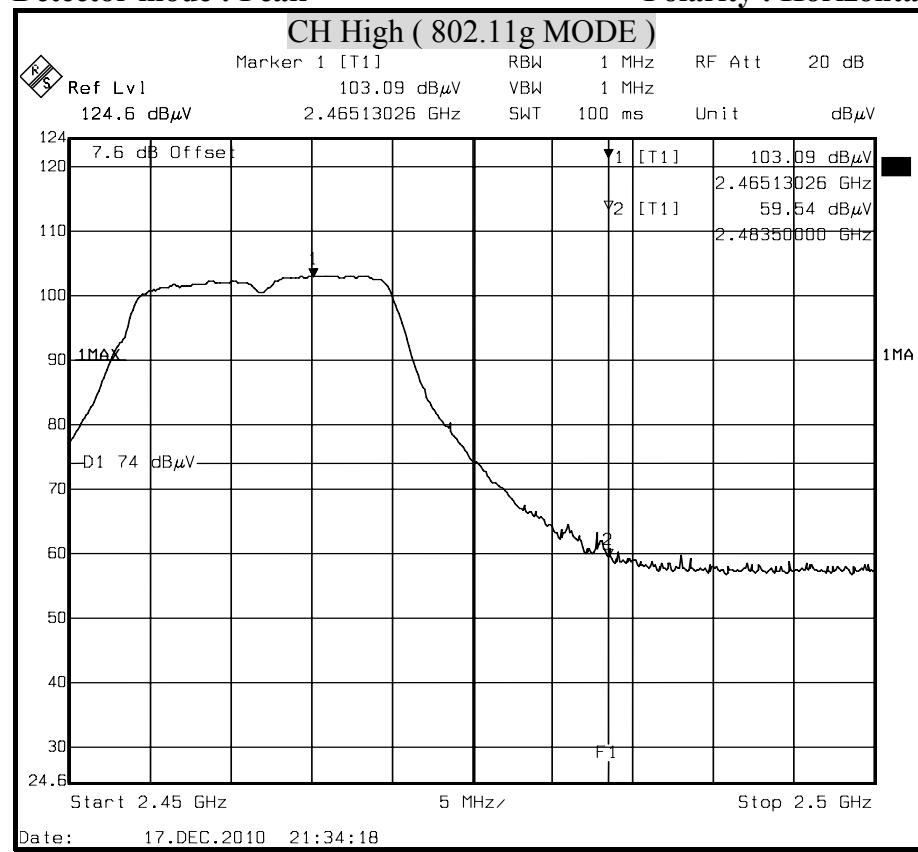
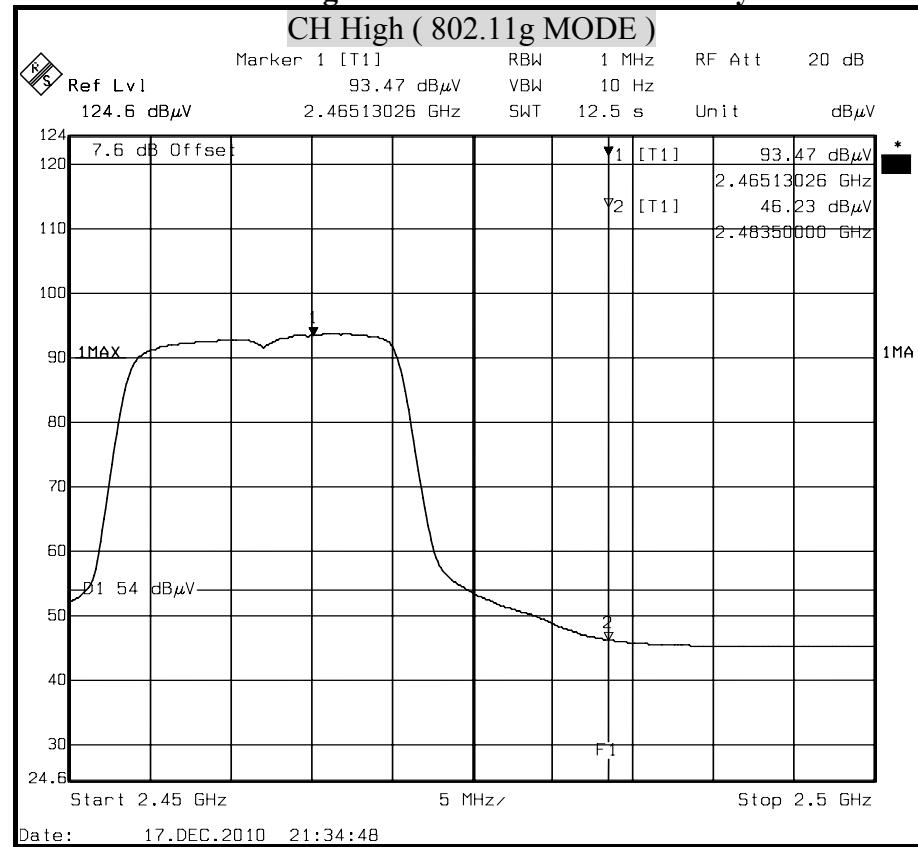
Polarity : Horizontal

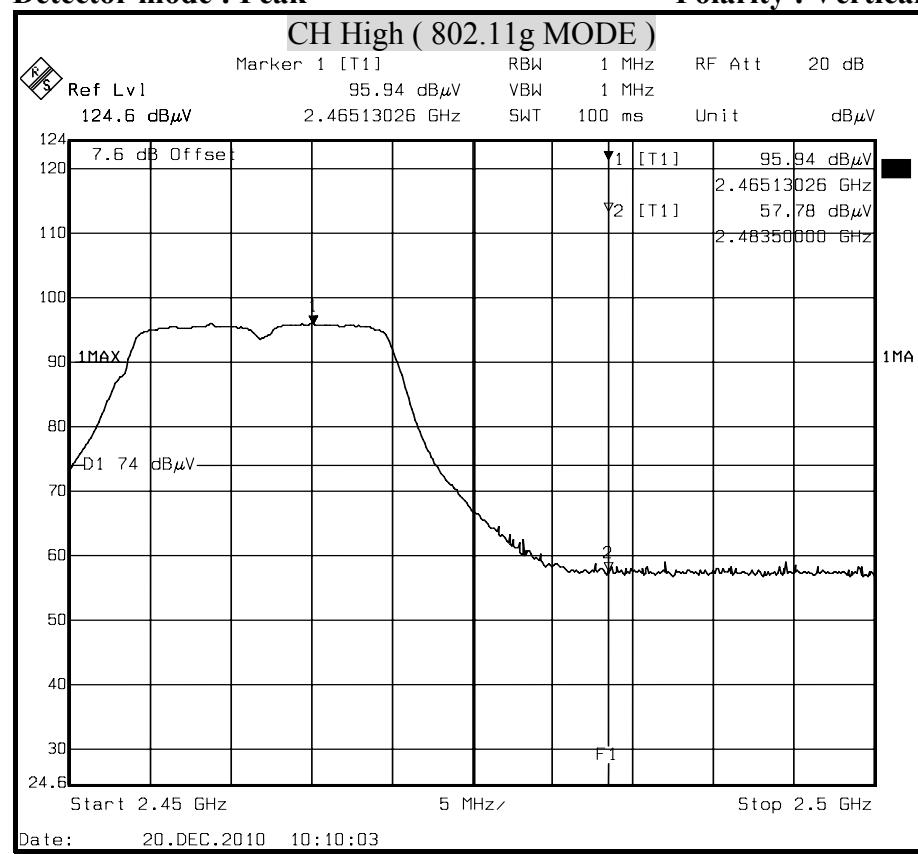
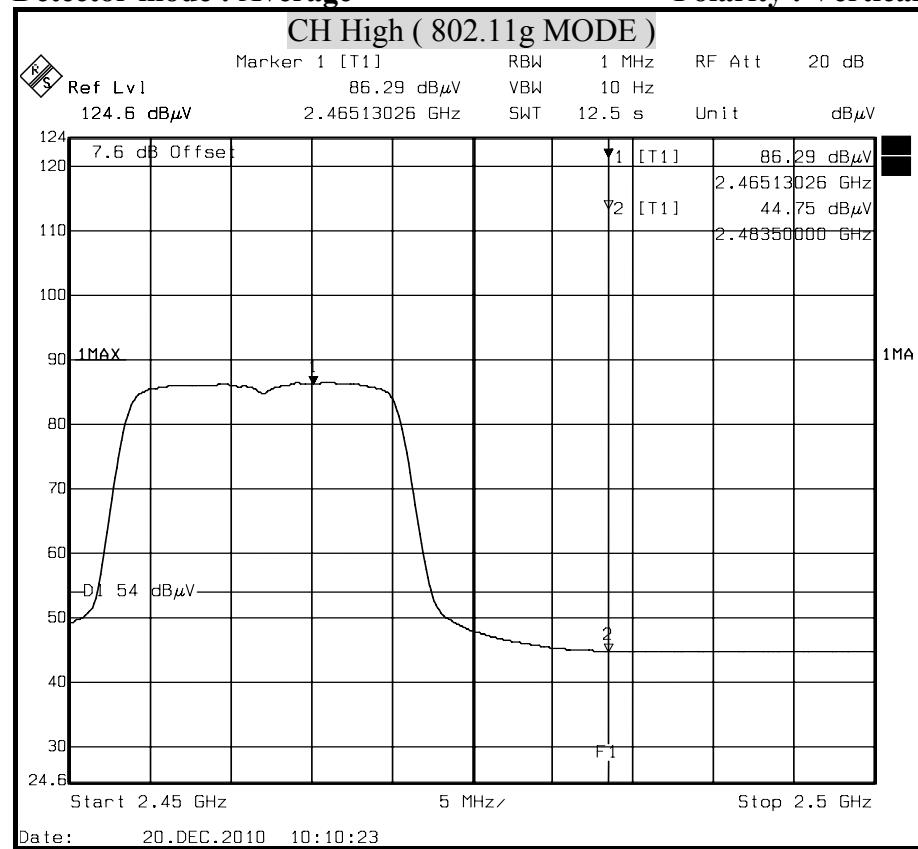


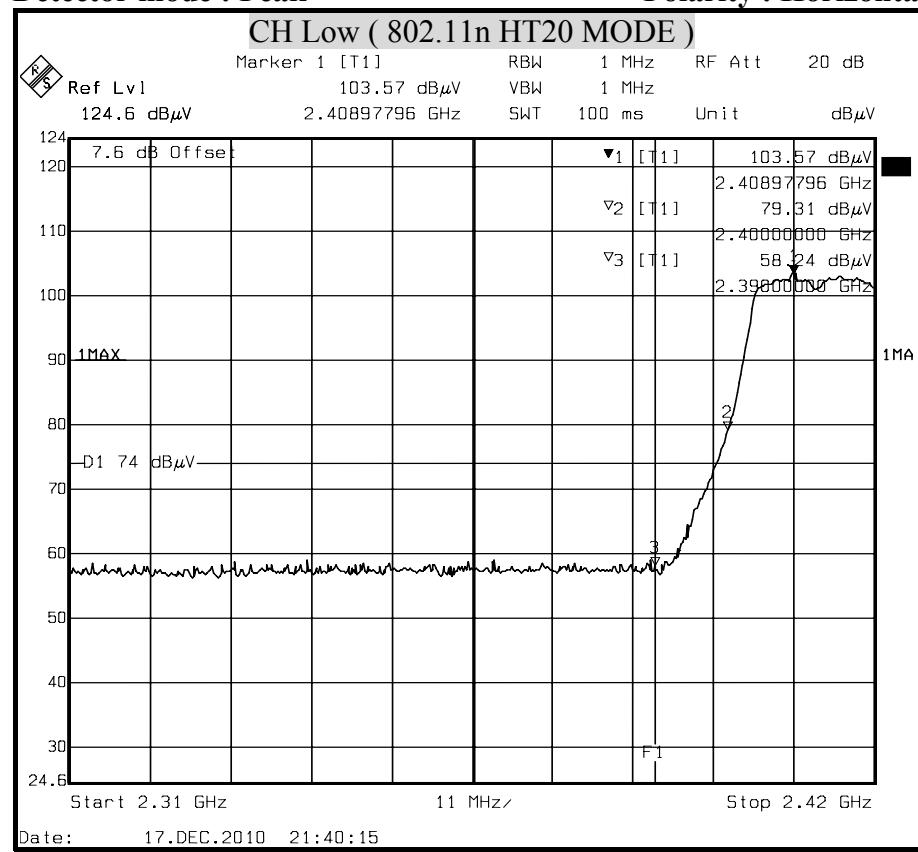
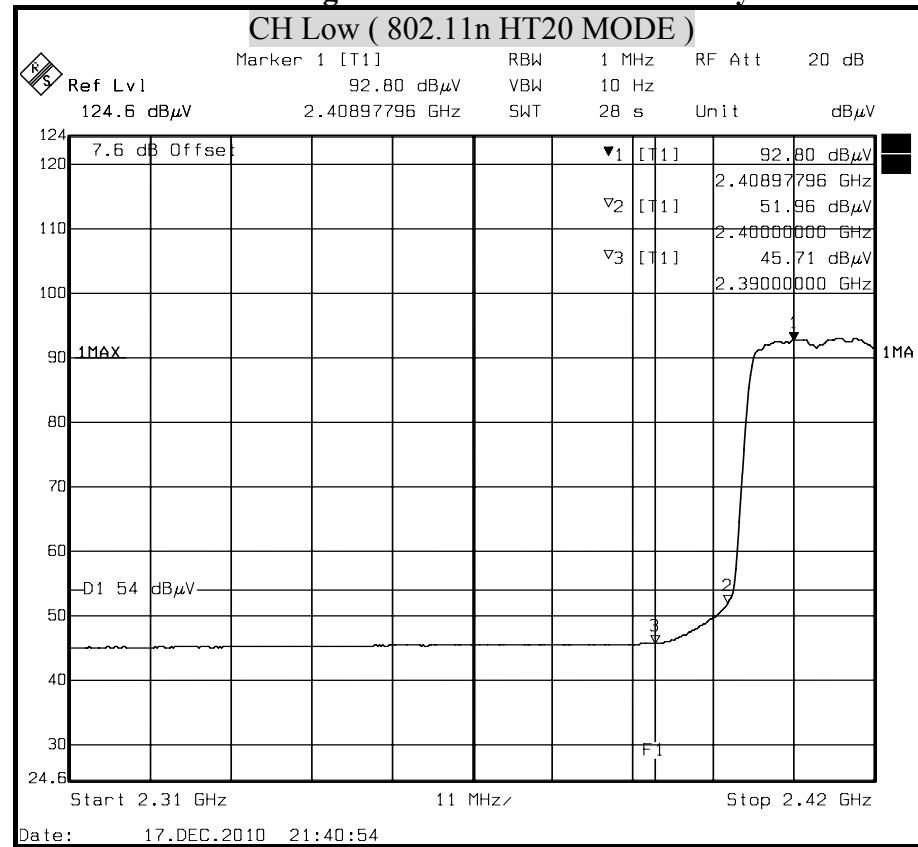
**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

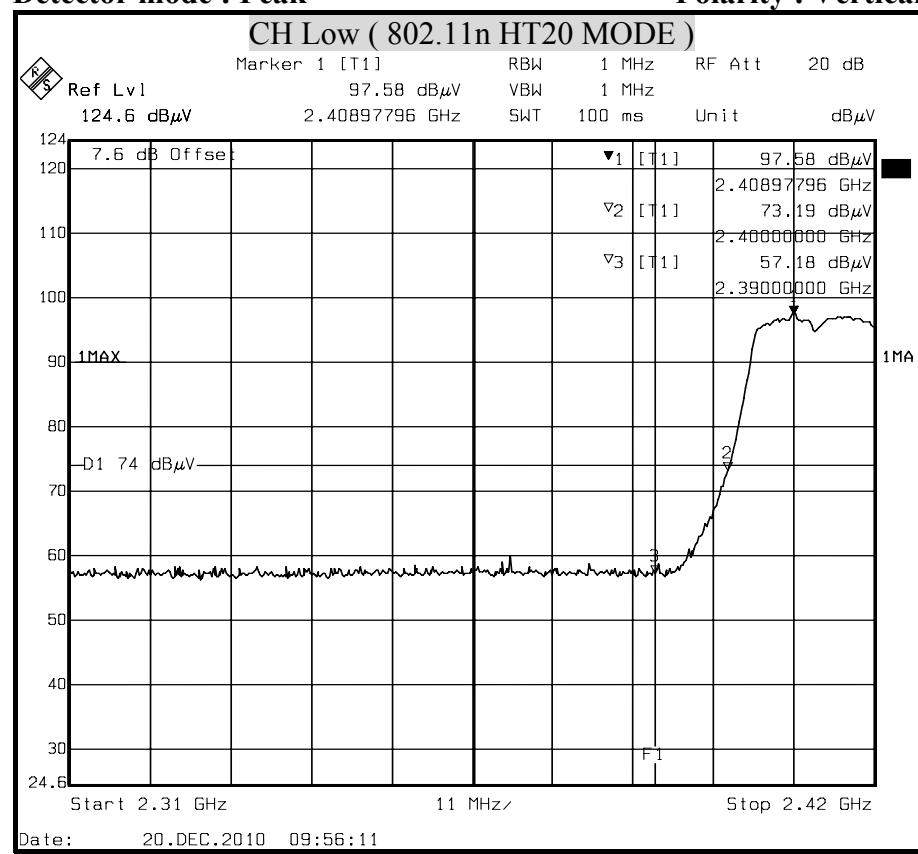
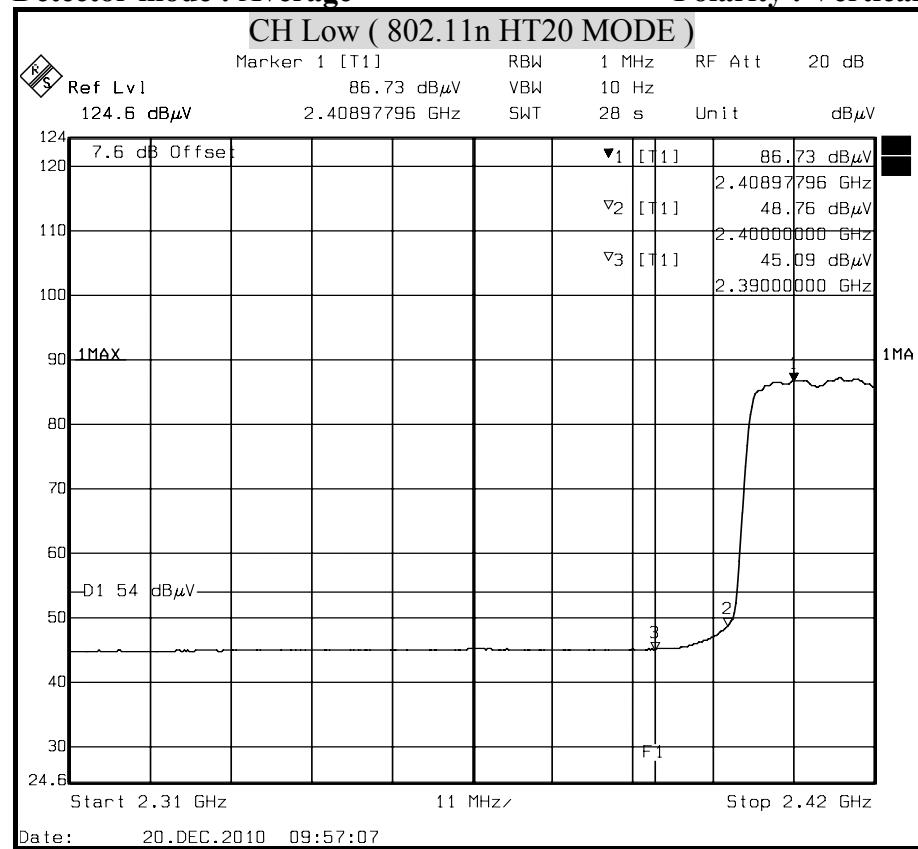
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

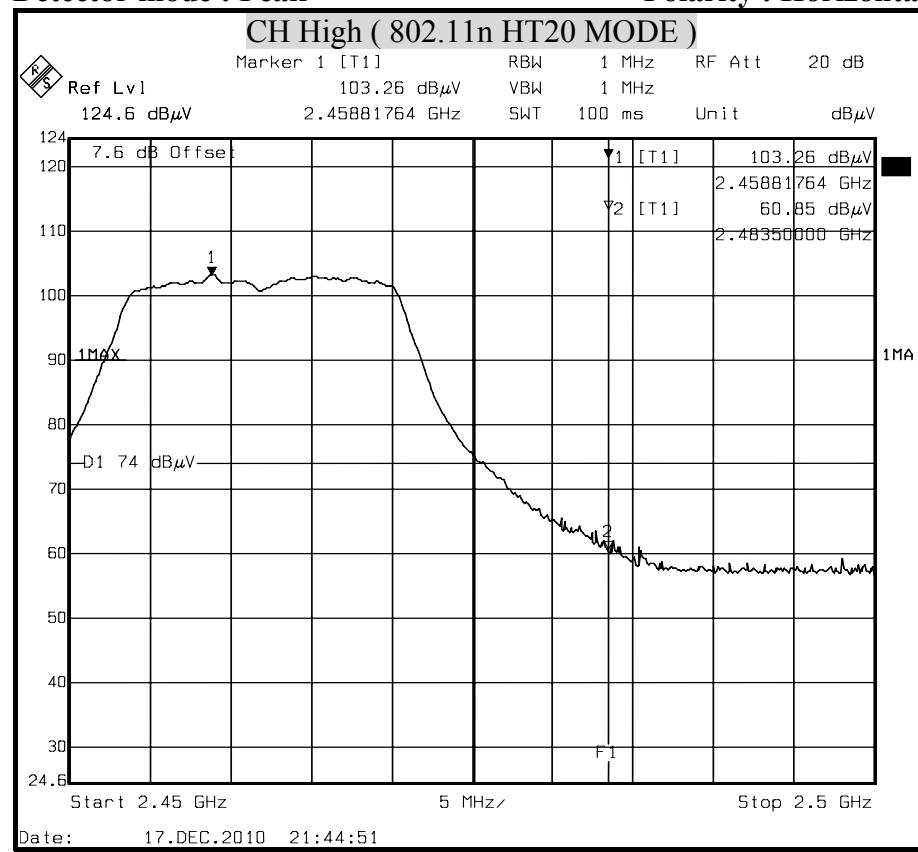
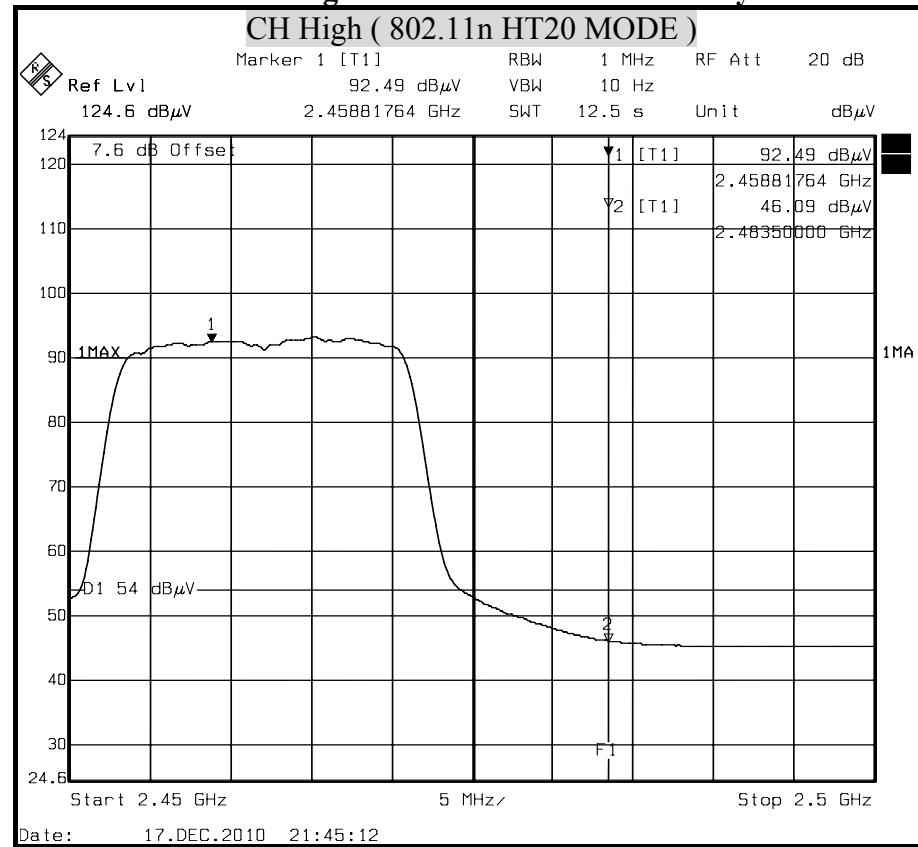
**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

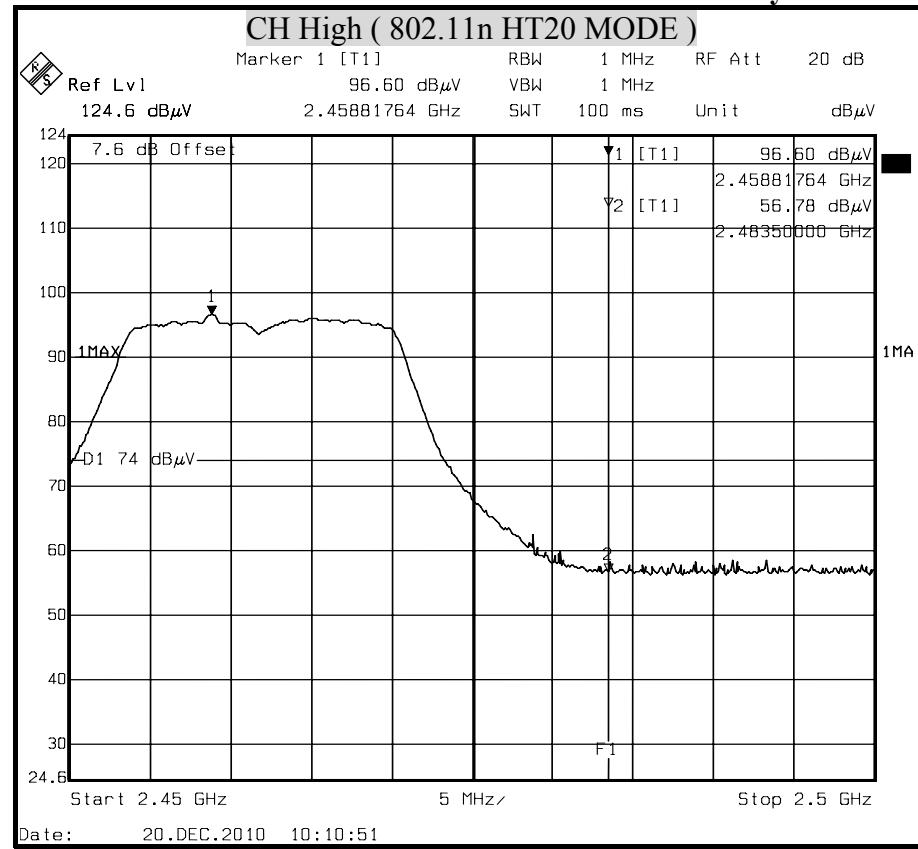
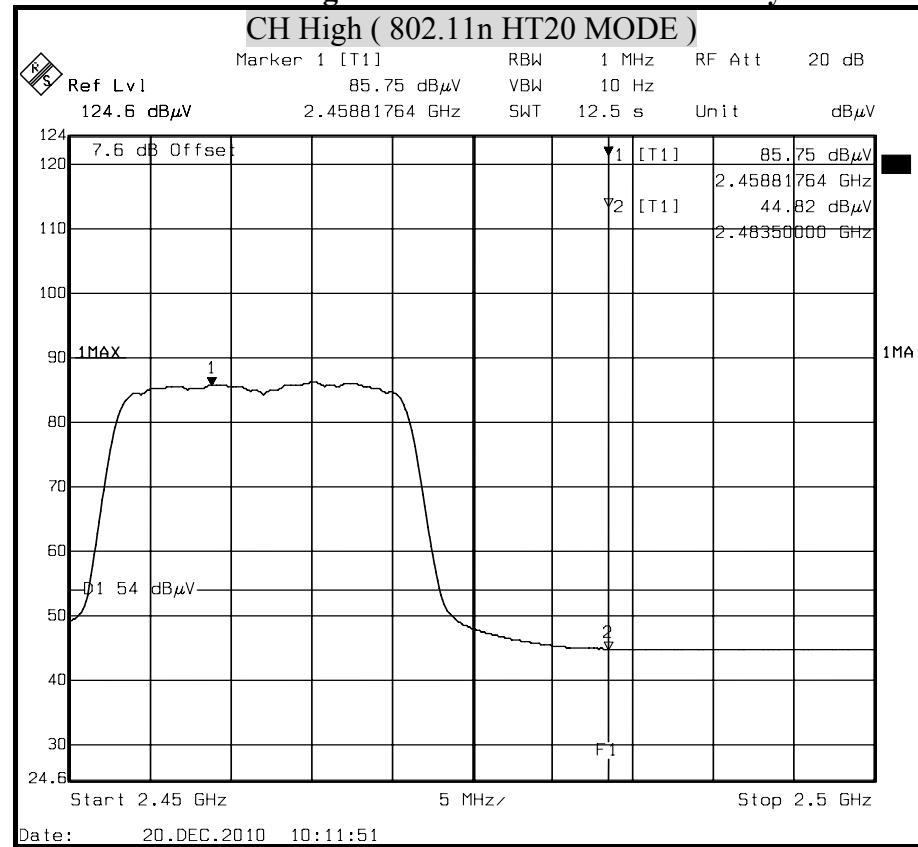
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

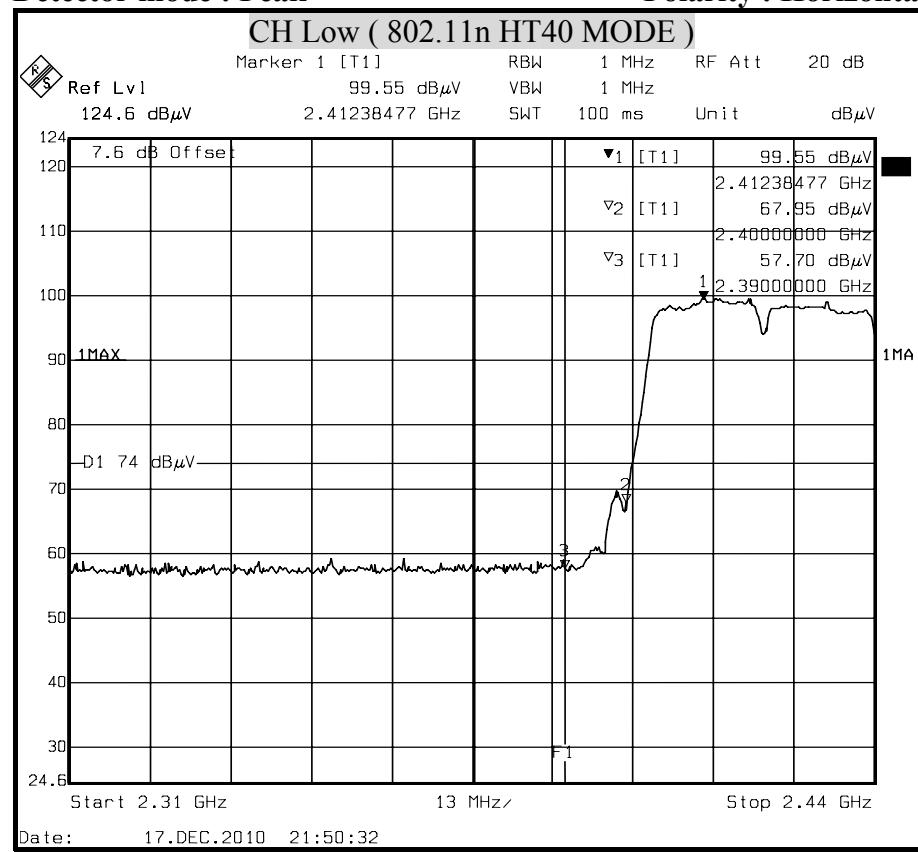
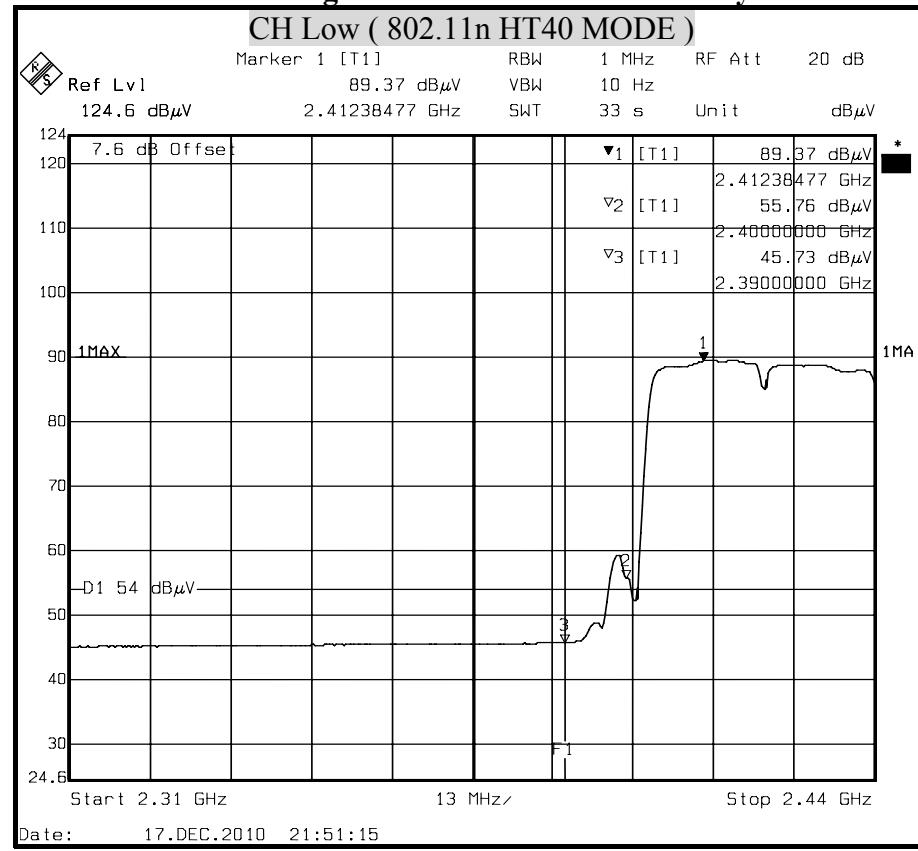
**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

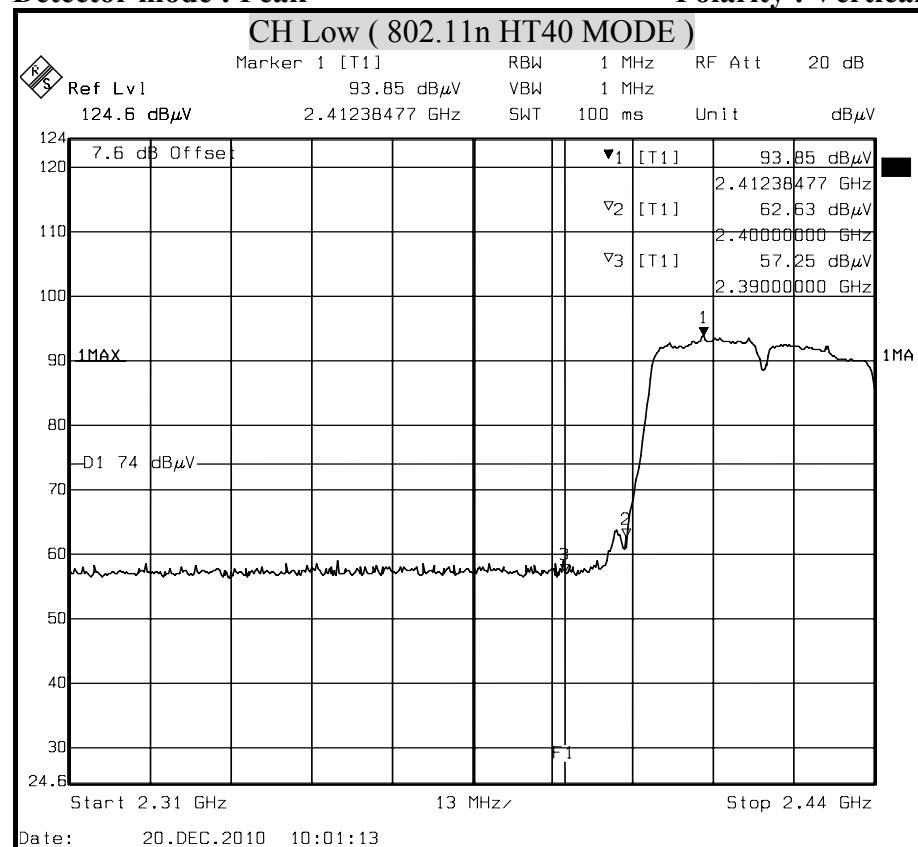
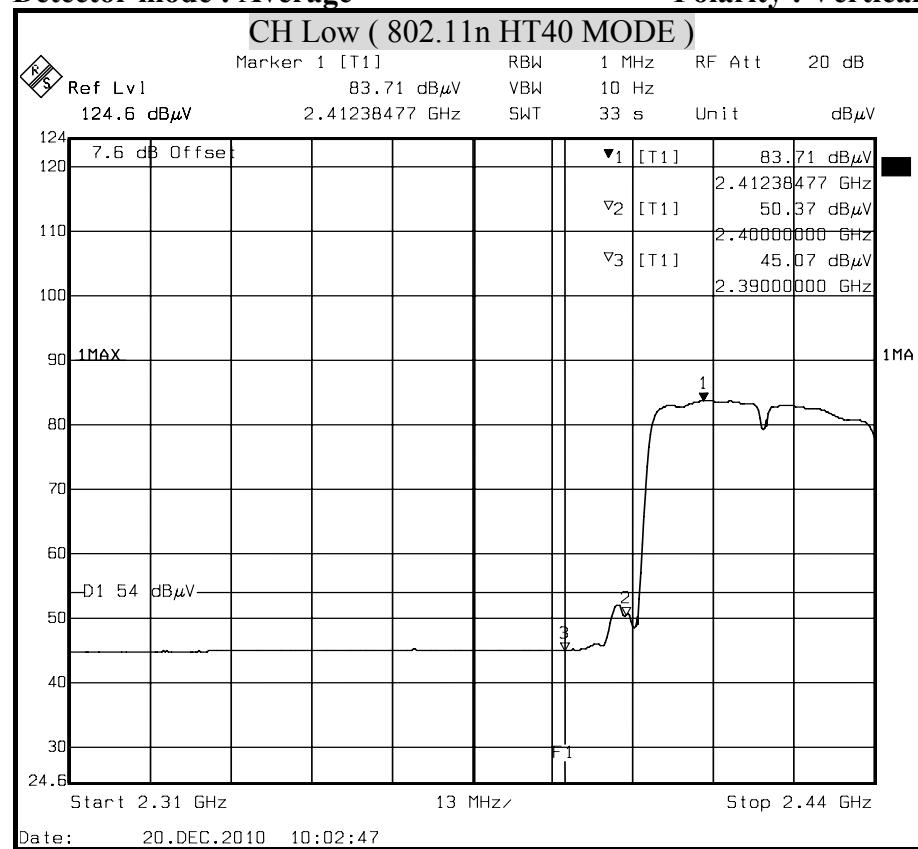
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

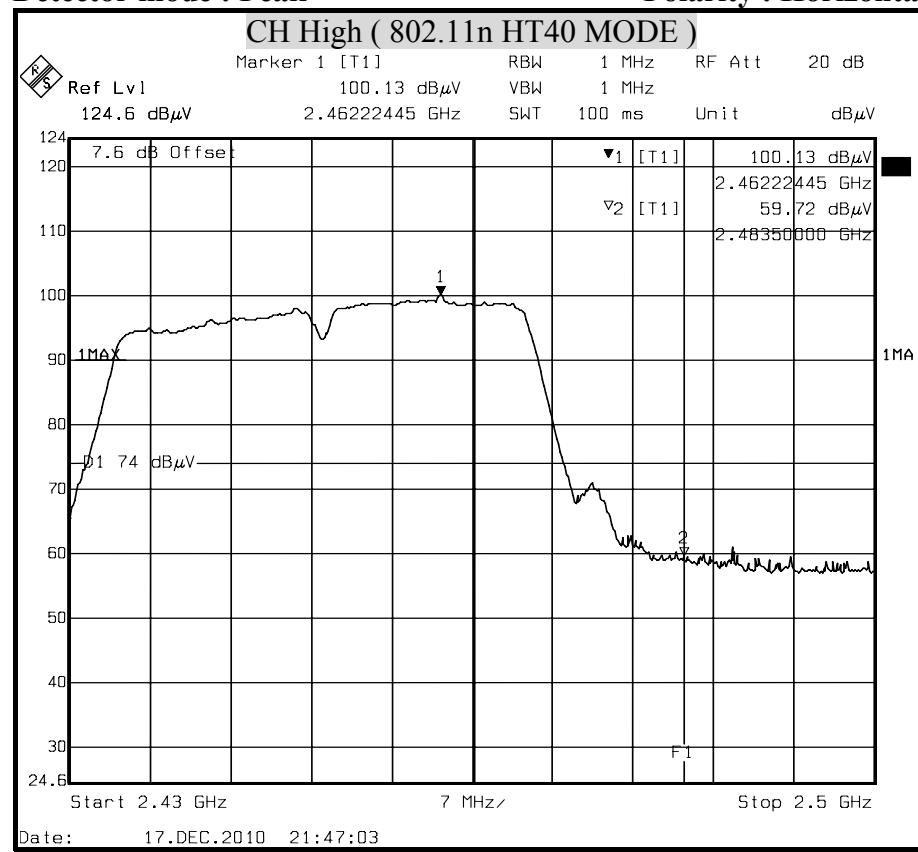
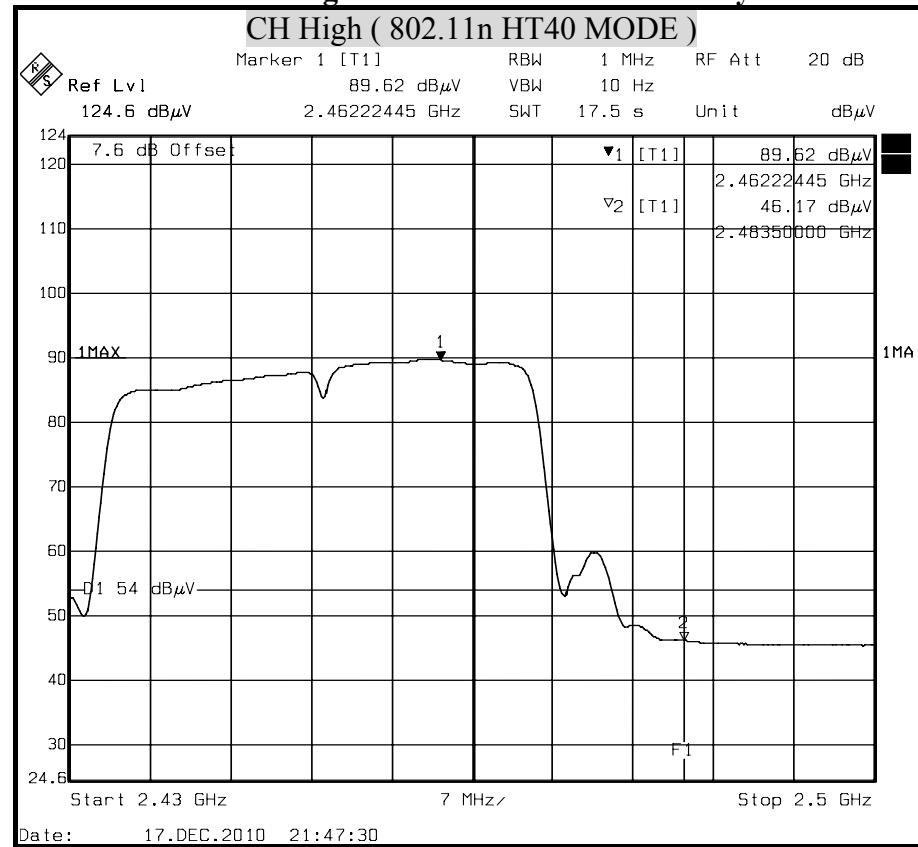
**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

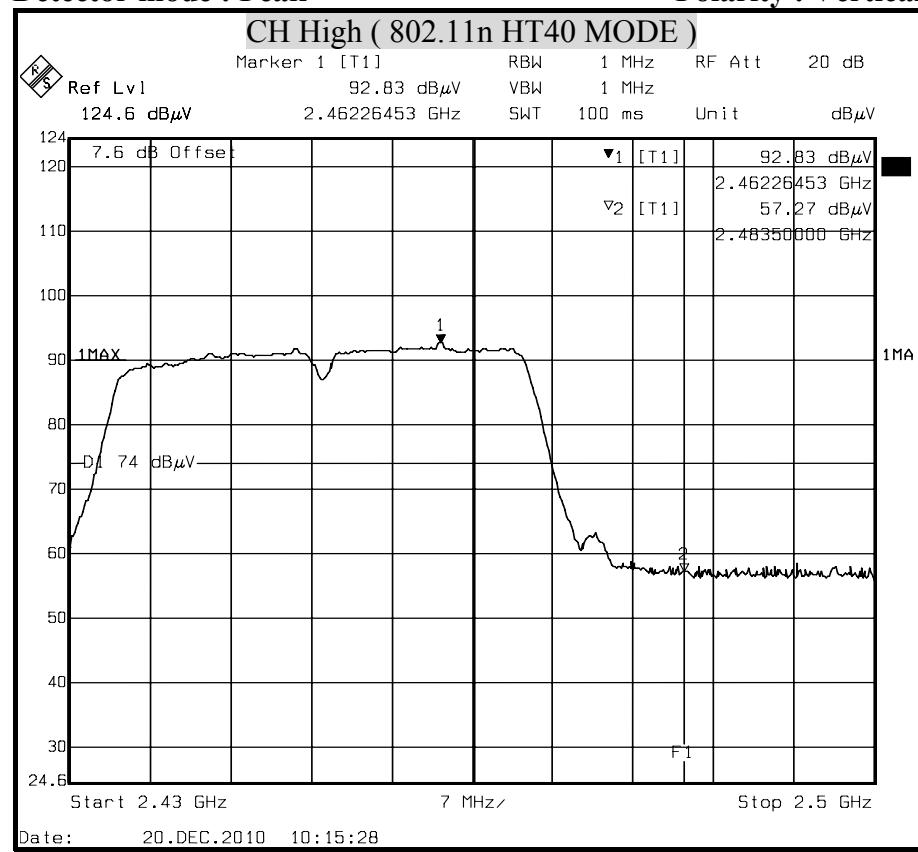
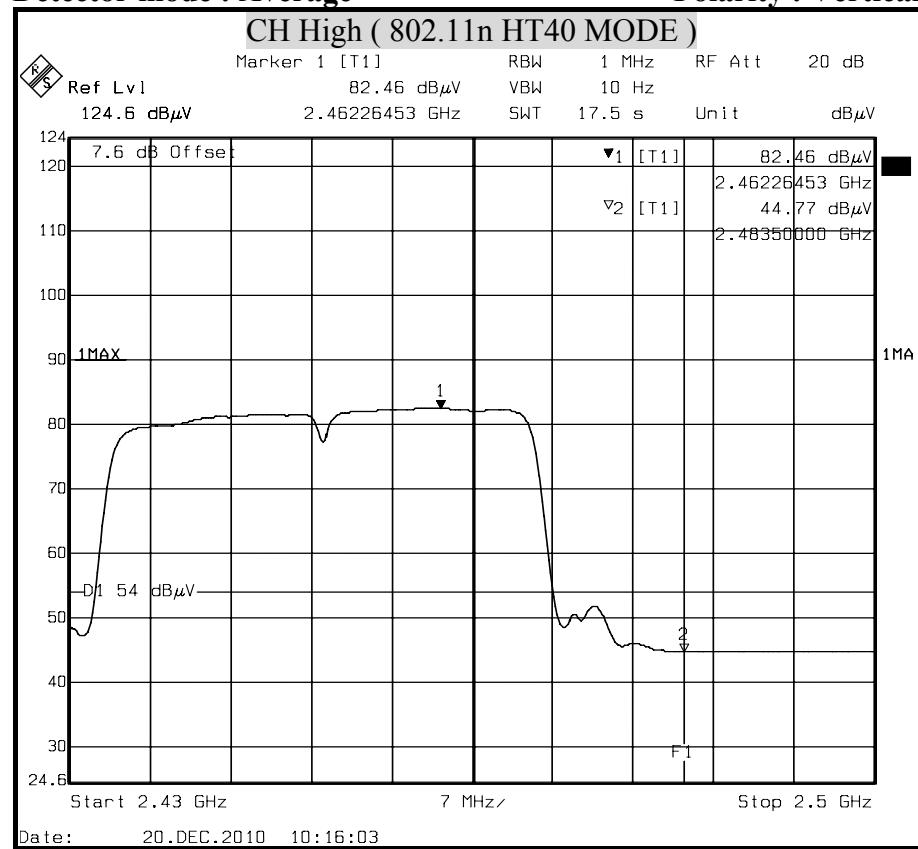
**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**

**Detector mode : Peak****Polarity : Horizontal****Detector mode : Average****Polarity : Horizontal**

**Detector mode : Peak****Polarity : Vertical****Detector mode : Average****Polarity : Vertical**



8.7 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

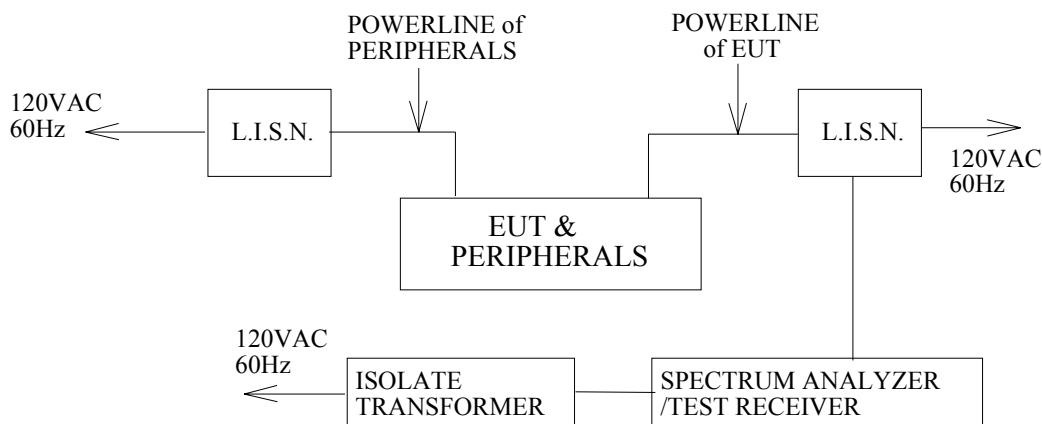
TEST EQUIPMENTS

The following test equipments are used during the conducted power line tests:

Conducted Emission room #1				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8121	8121-446	MAR. 09, 2011 For Insertion loss
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 13, 2011
TYPE N COAXIAL CABLE	CCS	BNC50	11	OCT. 04, 2011
Test S/W		e-3 (5.04211c) R&S (2.27)		



TEST SETUP



TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

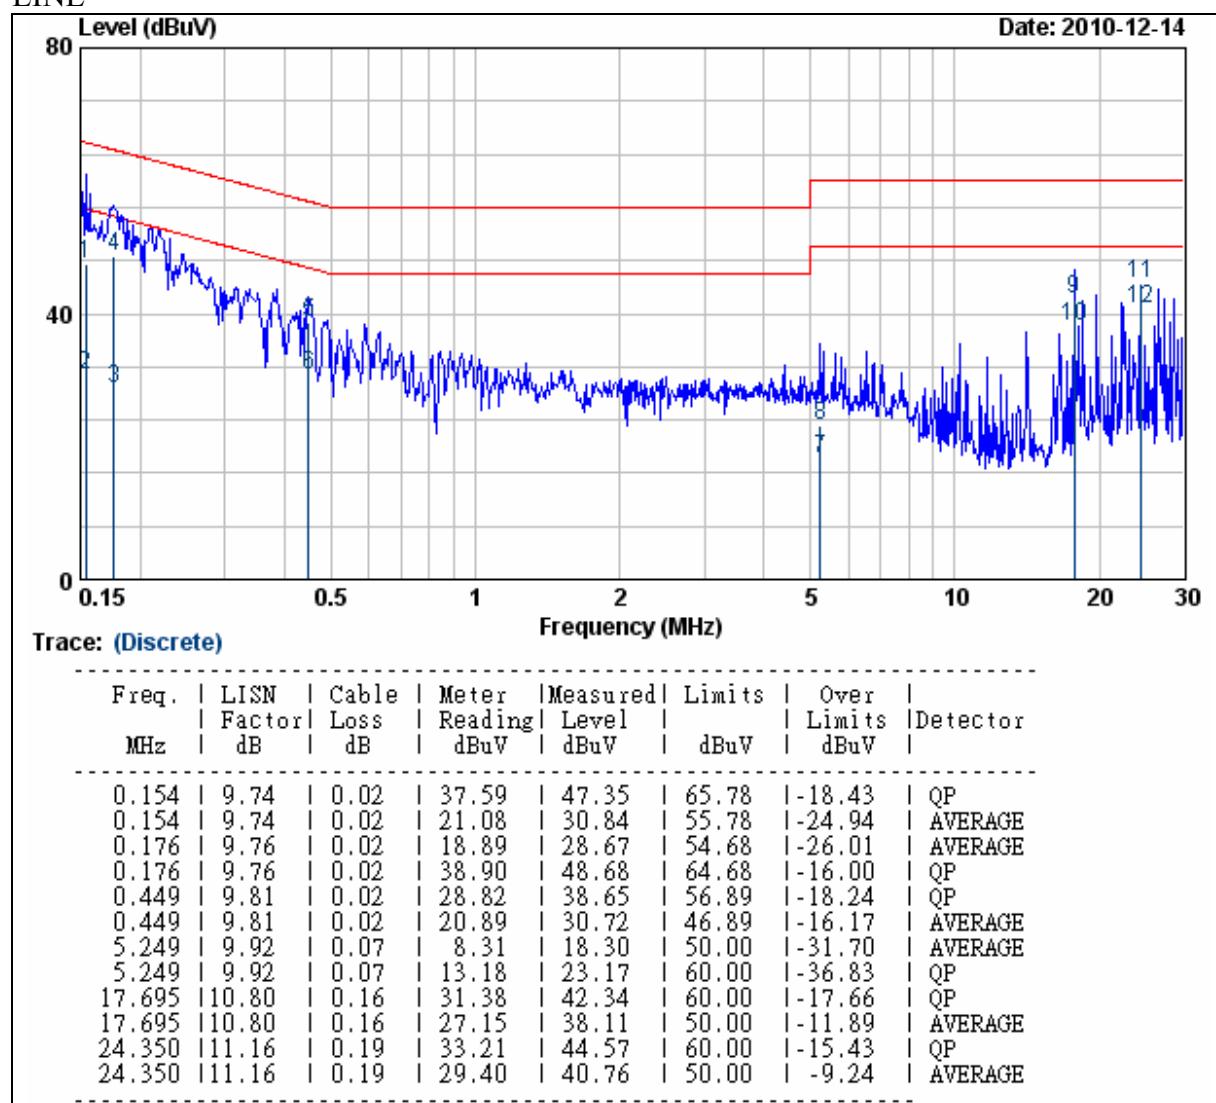
TEST RESULTS

No non-compliance noted.

**CONDUCTED RF VOLTAGE MEASUREMENT**

Product Name	11n Mini Router	Test Date	2010/12/24
Model	BR081n	Test By	Shiang Su
Test Mode	Normal operating / worst case	TEMP& Humidity	24.4°C, 59%

LINE

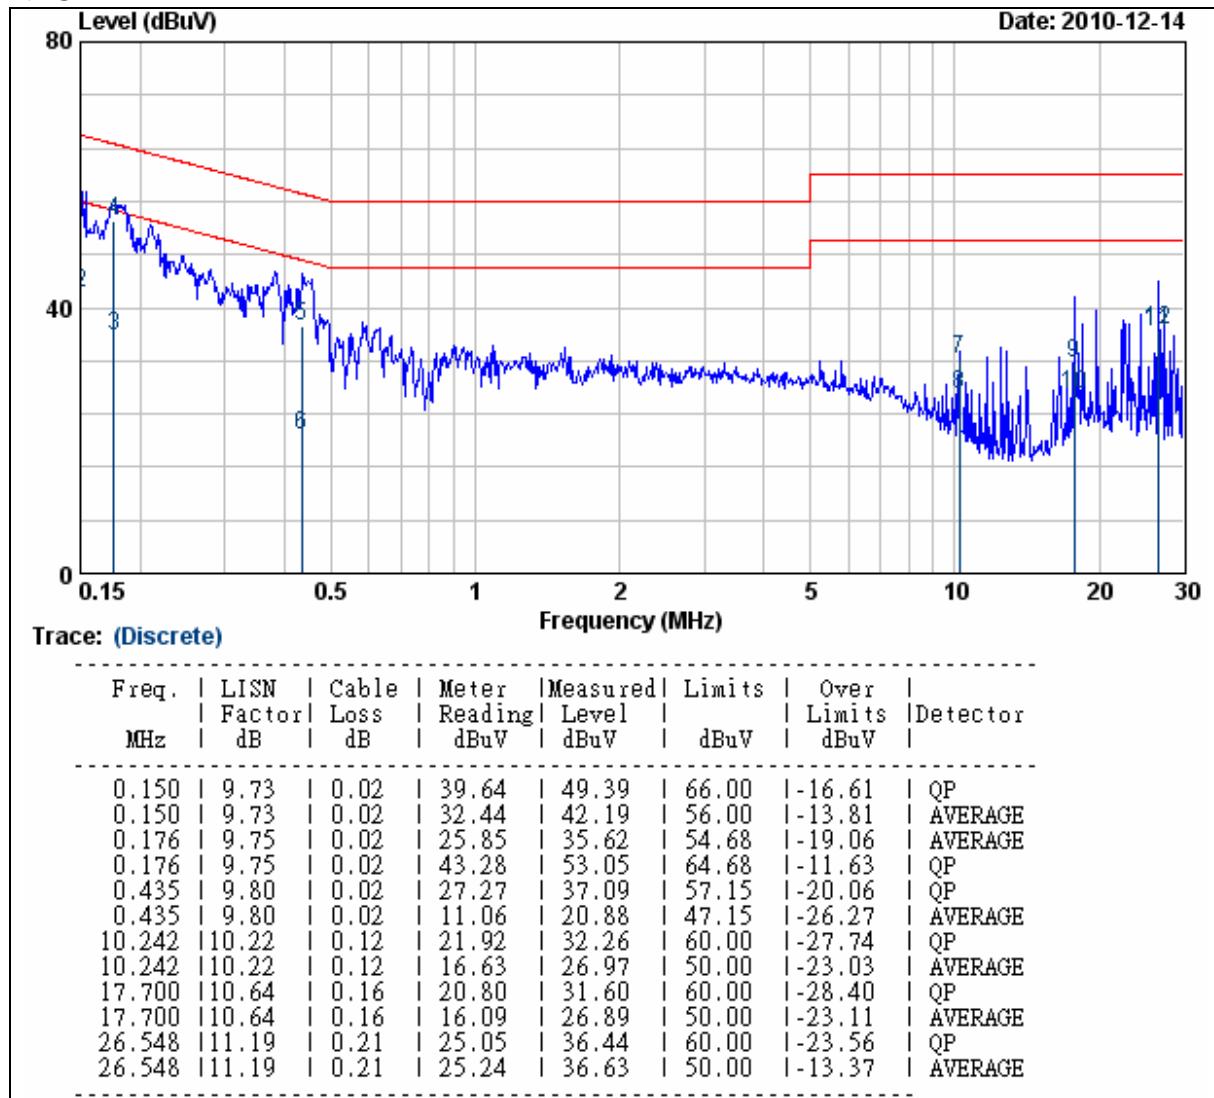
**REMARK:**

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



Product Name	11n Mini Router	Test Date	2010/12/24
Model	BR081n	Test By	Shiang Su
Test Mode	Normal operating / worst case	TEMP& Humidity	24.4°C, 59%

NEUTRAL



REMARK:

1. Correction Factor = Insertion loss + cable loss
2. Margin value = Emission level – Limit value



9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

This is a **1TX1RX** device with one antenna

PIFA antenna *1 (1TX1RX)

Manufacture: BRITO TECHNOLOGY

Model: EM-15

Gain: 1.27dBi

Type: PIFA

Connector: Printed