



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2003
TEST REPORT

For

Smart 300N Broadband Router

Model : BR485d

Trade Name : E-TOP

Issued for

E-Top Network Technology Inc.

No. 82 , Gongye 2nd Rd., Tainan City 70955, Taiwan, R.O.C.

Issued by

Compliance Certification Services Inc.

Tainan Lab.

No.8,Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

TEL: 886-6-580-2201

FAX: 886-6-580-2202

Issued Date: January 07, 2012



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 07, 2012	Initial Issue	ALL	Sunny Chang

**TABLE OF CONTENTS**

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	7
4. TEST METHODOLOGY	9
5. FACILITIES AND ACCREDITATION	9
5.1 FACILITIES	9
5.2 ACCREDITATIONS.....	9
5.3 MEASUREMENT UNCERTAINTY	10
6. SETUP OF EQUIPMENT UNDER TEST.....	11
7. FCC PART 15.247 REQUIREMENTS	15
7.1 6dB BANDWIDTH	15
7.2 MAXIMUM PEAK OUTPUT POWER	40
7.3 POWER SPECTRAL DENSITY	46
7.4 CONDUCTED SPURIOUS EMISSION	72
7.6 RADIATED EMISSION.....	101
7.7 CONDUCTED EMISSION	144
APPENDIX I MAXIMUM PERMISSIBLE EXPOSURE	149
APPENDIX II SETUP PHOTOS	151



1. TEST REPORT CERTIFICATION

Applicant : E-Top Network Technology Inc.
Address : No. 82 , Gongye 2nd Rd., Tainan City 70955, Taiwan, R.O.C.
Manufacturer : E-Top Network Technology Inc.
Address : No. 82 , Gongye 2nd Rd., Tainan City 70955, Taiwan, R.O.C.
Equipment Under Test : Smart 300N Broadband Router
Model Number : BR485d
Brand Name : E-TOP
Date of Test : November 23, 2011 ~ December 23, 2011

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2003	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Jeter Wu
Assistant Manager

Reviewed by:

Eric Huang
Assistant Section Manager



2. EUT DESCRIPTION

Product Name	Smart 300N Broadband Router
Model Number	BR485d
Brand Name	E-TOP
Identify Number	T11112830801
Received Date	December 28, 2011
Frequency Range	IEEE 802.11b/g, 802.11n HT20 : 2412MHz ~ 2462MHz IEEE 802.11n HT40 : 2422MHz ~ 2452MHz IEEE 802.11a, IEEE 802.11n HT20 : 5745MHz ~ 5825MHz IEEE 802.11n HT40 : 5755MHz ~ 5815MHz
Transmit Power	IEEE 802.11b (2412MHz ~ 2462MHz) : 21.63 dBm IEEE 802.11g (2412MHz ~ 2462MHz) : 25.02 dBm IEEE 802.11n HT20 (2412MHz ~ 2462MHz) : 26.99 dBm IEEE 802.11n HT40 (2422MHz ~ 2452MHz) : 24.37 dBm IEEE 802.11a (5745MHz ~ 5825MHz) : 15.42 dBm IEEE 802.11n HT20 (5745MHz ~ 5825MHz) : 17.41 dBm IEEE 802.11n HT40 (5755MHz ~ 5815MHz) : 15.70 dBm
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40 : 5MHz IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40 : 40MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 7 Channels IEEE 802.11a, 802.11n HT20 : 5 Channels IEEE 802.11n HT40 : 6 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48 ,36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 130,117,104,78, 65, 58.5, 52, 39, 26, 19.5, 13, 6.5 Mbps IEEE 802.11n HT40 : 300, 270,243, 216,162 ,135, 121.5, 108, 81, 54, 40.5, 27, 13.5 Mbps IEEE 802.11a : 54, 48 ,36, 24, 18, 12, 9, 6 Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11a : OFDM (64QAM, 16QAM, QPSK, BPSK)



Antenna Type	Two antennas (2TX2RX) Manufacture: YONG-SHUN TECH. CO., LTD. Type: Co-linear dipole structure Model: AN-152RRSU00 Gain: 3dBi for 2.4GHz, 4dBi for 5GHz Connector: Reverse SMA PLUG
Power Rating	12Vdc; 1A(Powered from Adapter)
Power Source	Powered from adapter Model: JKY36-SP1201000 Input: 100-240Vac, 50/60Hz, 0.5A Output: 12Vdc, 1000mA
Test Voltage	120Vac, 60Hz

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: **U6A-BR485D** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.
4. To add a series model is for business necessary. The different of the each model is shown as bellows:

Company Name/Address	Brand name	Model	Product Name
E-Top Network Technology Inc. No. 82, Gongye 2nd Rd., Tainan City 70955, Taiwan, R.O.C.	E-TOP	BR485d	Smart 300N Broadband Router
Amigo Technology Inc. 5F., No.63, Lane 77, Xing-Ai Road, Neihu Dist., Taipei City 114, Taiwan (R.O.C.)	Amigo	BR485d	Smart 300N Broadband Router
Sapido Technology Inc. No. 383., Sec. 2, Minsheng Rd., West Central District, Tainan 700, Taiwan, R.O.C.	SAPIDO	RB-1830	Smart 300Mbps Dualband Router - All Broadbands



3. DESCRIPTION OF TEST MODES

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	TX Mode

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode		
Emission	Radiated Emission	TX Mode
	Conducted Emission	TX Mode

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b, 802.11g, 802.11n HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : 6.5Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode : 13.5Mbps data rate (worst case) were chosen for full testing.



IEEE 802.11a, 802.11n HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	5745
Middle	5785
High	5825

IEEE 802.11a mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : 13Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	5755
Middle	5795
High	5815

IEEE 802.11n HT40 mode : 27Mbps data rate (worst case) were chosen for full testing.

While all conducted test the spectrum / power meter was connected to the Booster RF-out for 2.4GHz and the chain 1 of WiFi module for 5GHz.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.8, Jiucengling, Xinhua Dist., Tainan City 712, Taiwan (R.O.C.)

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	Industry Canada
Germany	TUV NORD
Taiwan	BSMI
USA	FCC

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz Test Site : OATS-6	±3.38dB
Radiated Emission, 200 to 1000 MHz Test Site : OATS-6	±3.04dB
Radiated Emission, 1 to 26.5 GHz	± 3.20dB
Power Line Conducted Emission	± 2.01dB

Uncertainty figures are valid to a confidence level of 95%, K=2



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

For RF test

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Note Book	IBM	T43	DoC	Power cable, unshd, 1.6m

No.	Signal cable description				
A	DC Power	Unshielded, 1.2m, 1pcs			
B	LAN Cable	Unshielded, 1.0m, 1pcs			

For EMI test


No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	Note Book	IBM	R51	R33026	Power cable, unshd, 1.6m
2	Note Book	IBM	T43	DoC	Power cable, unshd, 1.6m
3	Note Book	IBM	R50E	DoC	Power cable, unshd, 1.6m
4	3G Modem	NOVATEL	Qualcomm 3G CDMA	PKRNWMC7 27	N/A
5	HUB	BARRICAD	SMC7008BR	DoC	Power cable, unshd, 1.6m

No.	Signal cable description					
A	DC Power	Unshielded, 1.8m, 1pcs				
B	LAN	Unshielded, 10m, 1pcs				
C	LAN	Unshielded, 2.0m, 3pcs				
D	LAN	Unshielded, 10m, 1pcs				




SETUP DIAGRAM FOR TESTS

For RF test

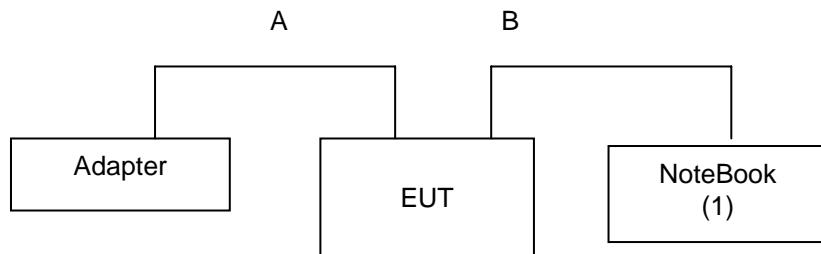

For EMI test

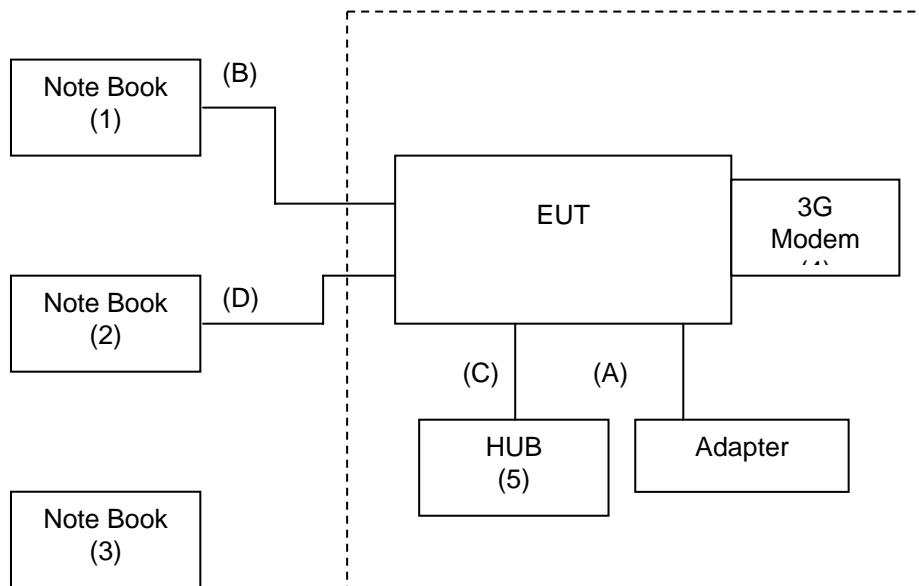



EUT OPERATING CONDITION

RF Setup (2.4G)

1. Set up all computers like the setup diagram.
2. Reset equipment and burn in the test program "MP_Test".
3. The "Realtek Test Program for "RTL819x" software was used for testing
The EUT driver software installed in the host support equipment during testing was
Realtek Test Program for RTL819x Drive

(1)TX Mode:

- ⇒ **IC Type: RTL_8192D**
- ⇒ **Mode:2.4G/SingleMac**
- ⇒ **Dev:WLAN0**
- ⇒ **Test Item :Continuous TX**
- ⇒ **Channel:1(2412MHz)、3(2422MHz)、6(2437MHz)、9(2452MHz)、11(2462MHz)**
- ⇒ **TX POWER: follow "Power Control"**
- ⇒ **Antenna: B、G Mode A, HT20、 HT40 Mode AB**
- ⇒ **Tx Data : 1Mbps long (IEEE 802.11b mode , TX)
6Mbps (IEEE 802.11g mode , TX)
13Mbps (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
27Mbps (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)**
- ⇒ **Bandwidth: B、G、 HT20 20MHz, HT40 40MHz**
- ⇒ **Start**

Power control

Target Power:

IEEE 802.11b Channel Low (2412MHz) = 52

IEEE 802.11b Channel Middle (2437MHz) =50

IEEE 802.11b Channel High (2462MHz) = 50

Target Power:

IEEE 802.11g Channel Low (2412MHz) = 54

IEEE 802.11g Channel Middle (2437MHz) = 52

IEEE 802.11g Channel High (2462MHz) = 52

Target Power:

IEEE 802.11n HT20 Channel Low (2412MHz) = 52 **(Chain 0)**

IEEE 802.11 n HT20 Channel Middle (2437MHz) = 50 **(Chain 0)**

IEEE 802.11 n HT20 Channel High (2462MHz) = 50 **(Chain 0)**

IEEE 802.11n HT20 Channel Low (2412MHz) = 52 **(Chain 1)**

IEEE 802.11 n HT20 Channel Middle (2437MHz) = 50 **(Chain 1)**

IEEE 802.11 n HT20 Channel High (2462MHz) = 50 **(Chain 1)**

Target Power:

IEEE 802.11n HT40 Channel Low (2422MHz) = 47 **(Chain 0)**

IEEE 802.11 n HT40 Channel Middle (2437MHz) = 46 **(Chain 0)**

IEEE 802.11 n HT40 Channel High (2452MHz) = 46 **(Chain 0)**

IEEE 802.11n HT40 Channel Low (2422MHz) = 47 **(Chain 1)**

IEEE 802.11 n HT40 Channel Middle (2437MHz) = 46 **(Chain 1)**

IEEE 802.11 n HT40 Channel High (2452MHz) = 46 **(Chain 1)**

IEEE 802.11 n HT40 Channel Low (2422MHz) = 46 **(Chain 1)**

IEEE 802.11 n HT40 Channel Middle (2437MHz) = 46 **(Chain 1)**

IEEE 802.11 n HT40 Channel High (2452MHz) = 46 **(Chain 1)**

(2) RX Mode :

Test Item packets RX

Start RX

(3).Normal Link Setup

1. Set up all computers like the setup diagram.
2. All of the function are under run.
3. Notebook PC (2) ping 192.168.0.10 –t to Notebook PC (1).
4. Notebook PC (1) ping 192.168.0.20 –t to Notebook PC (2).
5. Notebook PC (1) ping 192.168.0.50 –t to Wireless Access Point (3).

Start test.



RF Setup (5G)

1. Set up all computers like the setup diagram.
2. Reset equipment and burn in the test program “MP_Test”.
3. The “Realtek Test Program for “RTL819x” software was used for testing
The EUT driver software installed in the host support equipment during testing was
Realtek Test Program for RTL819x Drive

(1) TX Mode:

- ⇒ **IC Type: RTL_8192D**
- ⇒ **Mode:5G/SingleMac**
- ⇒ **Dev:WLAN0**
- ⇒ **Test Item :Continuous TX**
- ⇒ **TX POWER: follow “Power Control”**
- ⇒ **Antenna: A Mode A, HT20、 HT40 Mode AB**
- ⇒ **Tx Data : 6Mbps (IEEE 802.11a mode , TX)
13Mbps (IEEE 802.11n HT20 mode ,chain 0, chain 1 TX)
27Mbps (IEEE 802.11n HT40 mode, chain 0, chain 1 TX)**
- ⇒ **Bandwidth: A、 HT20 20MHz, HT40 40MHz**
- ⇒ **Start**

Target Power: IEEE 802.11a Channel Low (5745MHz) = **40**

IEEE 802.11a Channel Middle (5785MHz) = **40**

IEEE 802.11a Channel High (5825MHz) = **40**

Target Power: IEEE 802.11n HT20 Channel Low (5745MHz) = **40 (Chain 0)**

IEEE 802.11 n HT20 Channel Middle (5785MHz) = **40 (Chain 0)**

IEEE 802.11 n HT20 Channel High (5825MHz) = **40 (Chain 0)**

IEEE 802.11n HT20 Channel Low (5745MHz) = **40 (Chain 1)**

IEEE 802.11 n HT20 Channel Middle (5785MHz) = **40 (Chain 1)**

IEEE 802.11 n HT20 Channel High (5825MHz) = **40 (Chain 1)**

Target Power: IEEE 802.11n HT40 Channel Low (5755MHz) = **40 (Chain 0)**

IEEE 802.11 n HT40 Channel Middle (5795MHz) = **40 (Chain 0)**

IEEE 802.11n HT40 Channel High (5815MHz) = **40 (Chain 0)**

IEEE 802.11 n HT40 Channel Low (5755MHz) = **40 (Chain 1)**

IEEE 802.11n HT40 Channel Middle (5795MHz) = **40 (Chain 1)**

IEEE 802.11 n HT40 Channel High (5815MHz) = **40 (Chain 1)**

(2) RX Mode :

Test Item packets RX

Start RX

(3).Normal Link Setup

1. Set up all computers like the setup diagram.
2. All of the function are under run.
3. Notebook PC (2) ping 192.168.0.10 -t to Notebook PC (1).
4. Notebook PC (1) ping 192.168.0.20 -t to Notebook PC (2).
5. Notebook PC (1) ping 192.168.0.50 -t to Wireless Access Point (3).

Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

**TEST RESULTS****IEEE 802.11b Mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	10120	500	PASS
Middle	2437	10220	500	PASS
High	2462	10220	500	PASS

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	2412	16633	500	PASS
Middle	2437	16583	500	PASS
High	2462	16633	500	PASS

IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2412	17836	17836	500	PASS
Middle	2437	17836	17886	500	PASS
High	2462	17836	17836	500	PASS

IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	2422	36743	36643	500	PASS
Middle	2437	36774	36673	500	PASS
High	2452	36603	36603	500	PASS

**IEEE 802.11a Mode**


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass / Fail
Low	5745	16633	500	PASS
Middle	5785	16633	500	PASS
High	5825	16633	500	PASS


IEEE 802.11n HT20 Mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	5745	17836	17836	500	PASS
Middle	5785	17836	17836	500	PASS
High	5825	17836	17836	500	PASS


IEEE 802.11n HT40 Mode


Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain1		
Low	5755	36673	36673	500	PASS
Middle	5795	36673	36673	500	PASS
High	5815	36673	36673	500	PASS

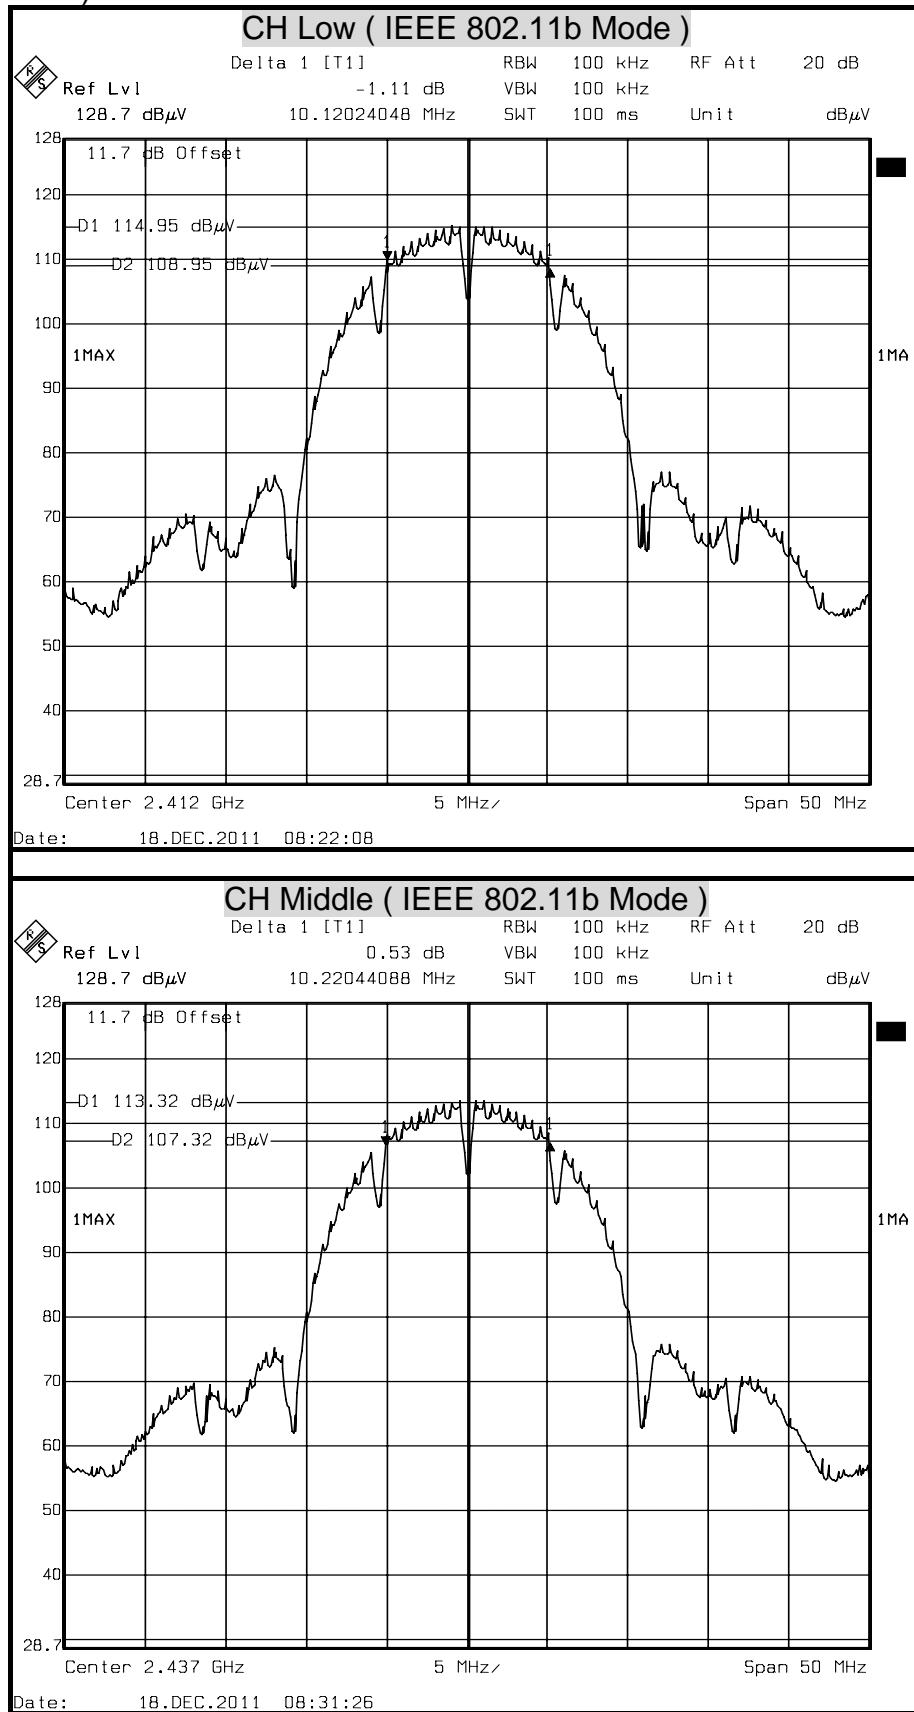
**6dB BANDWIDTH**
(2.4GHz)

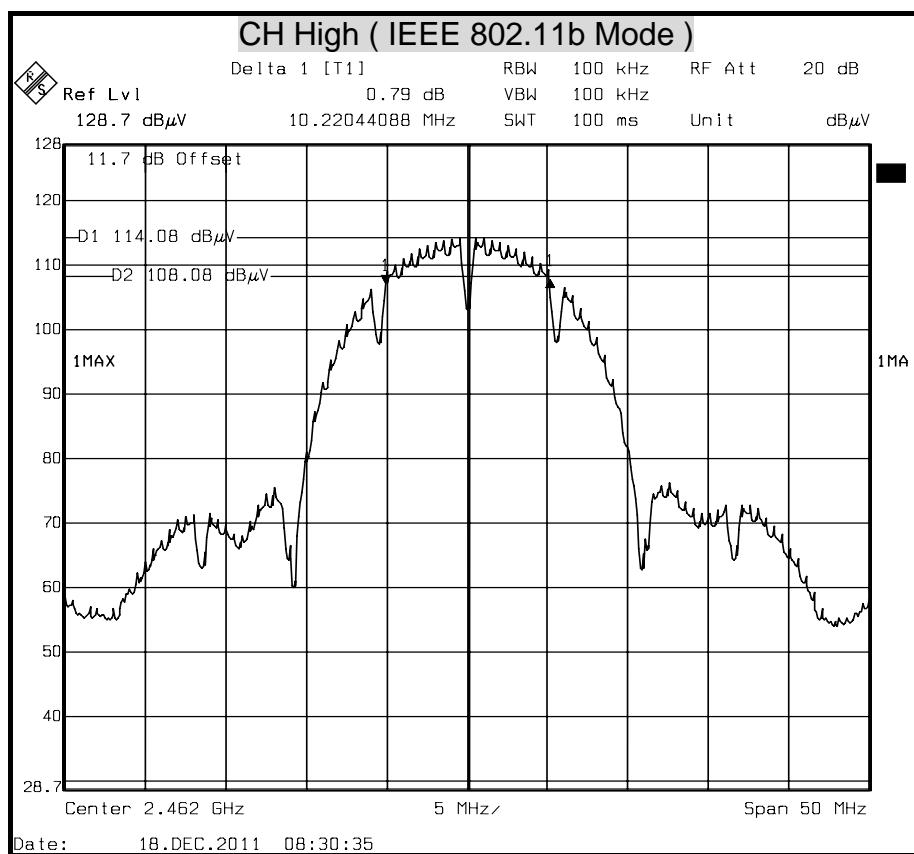


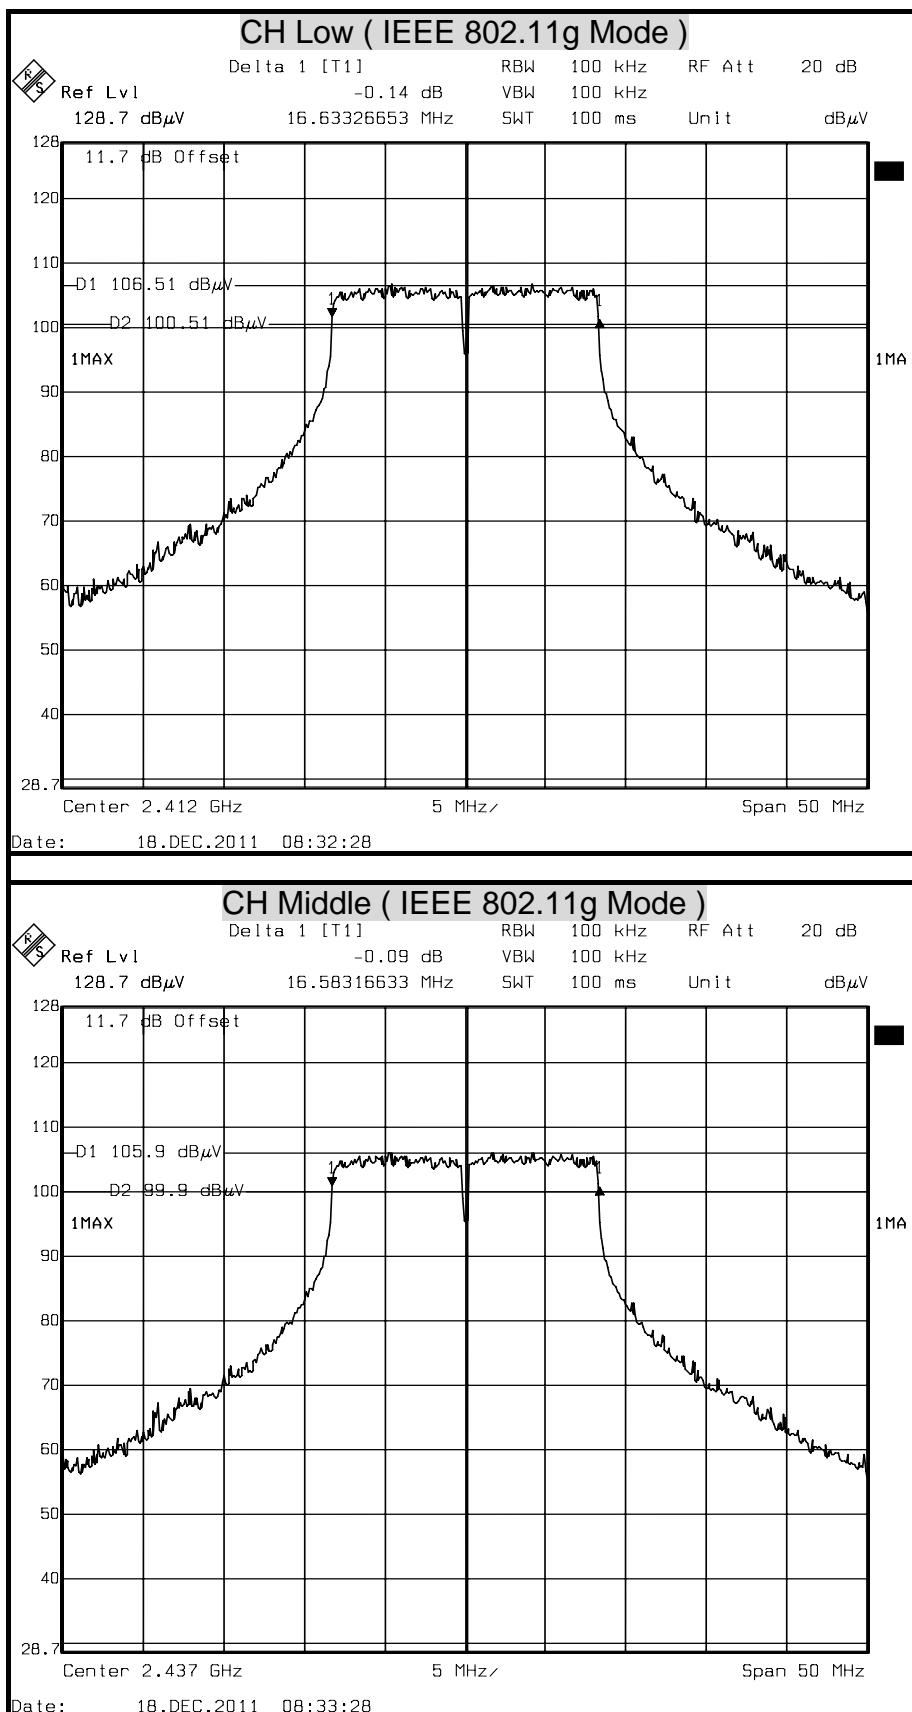


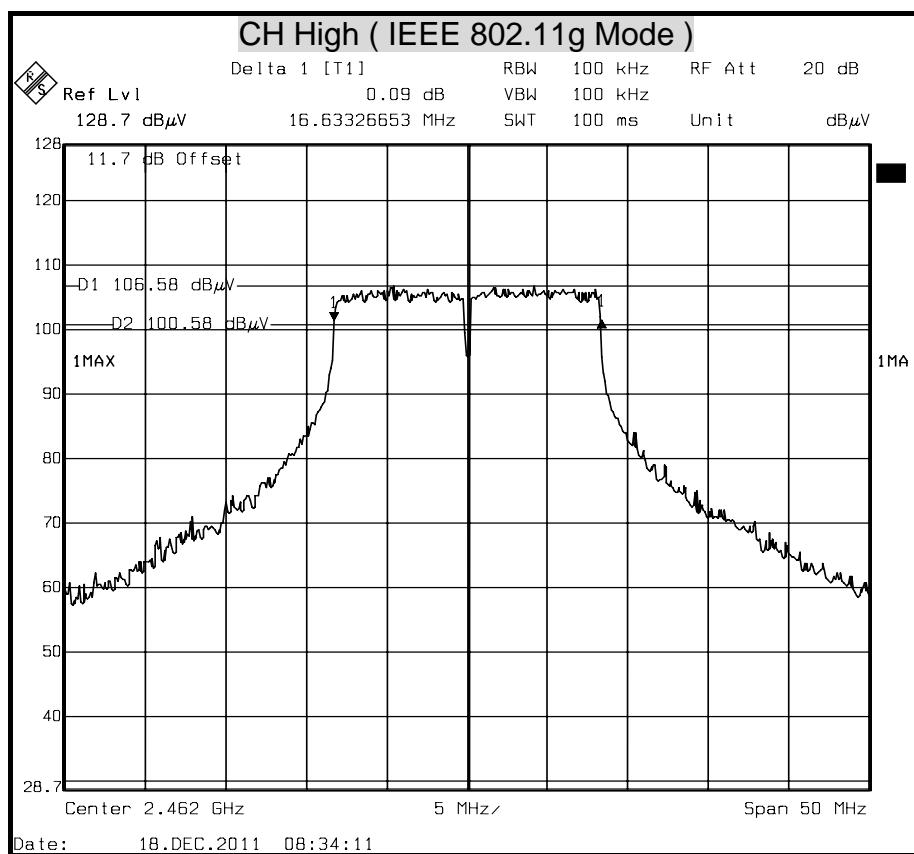


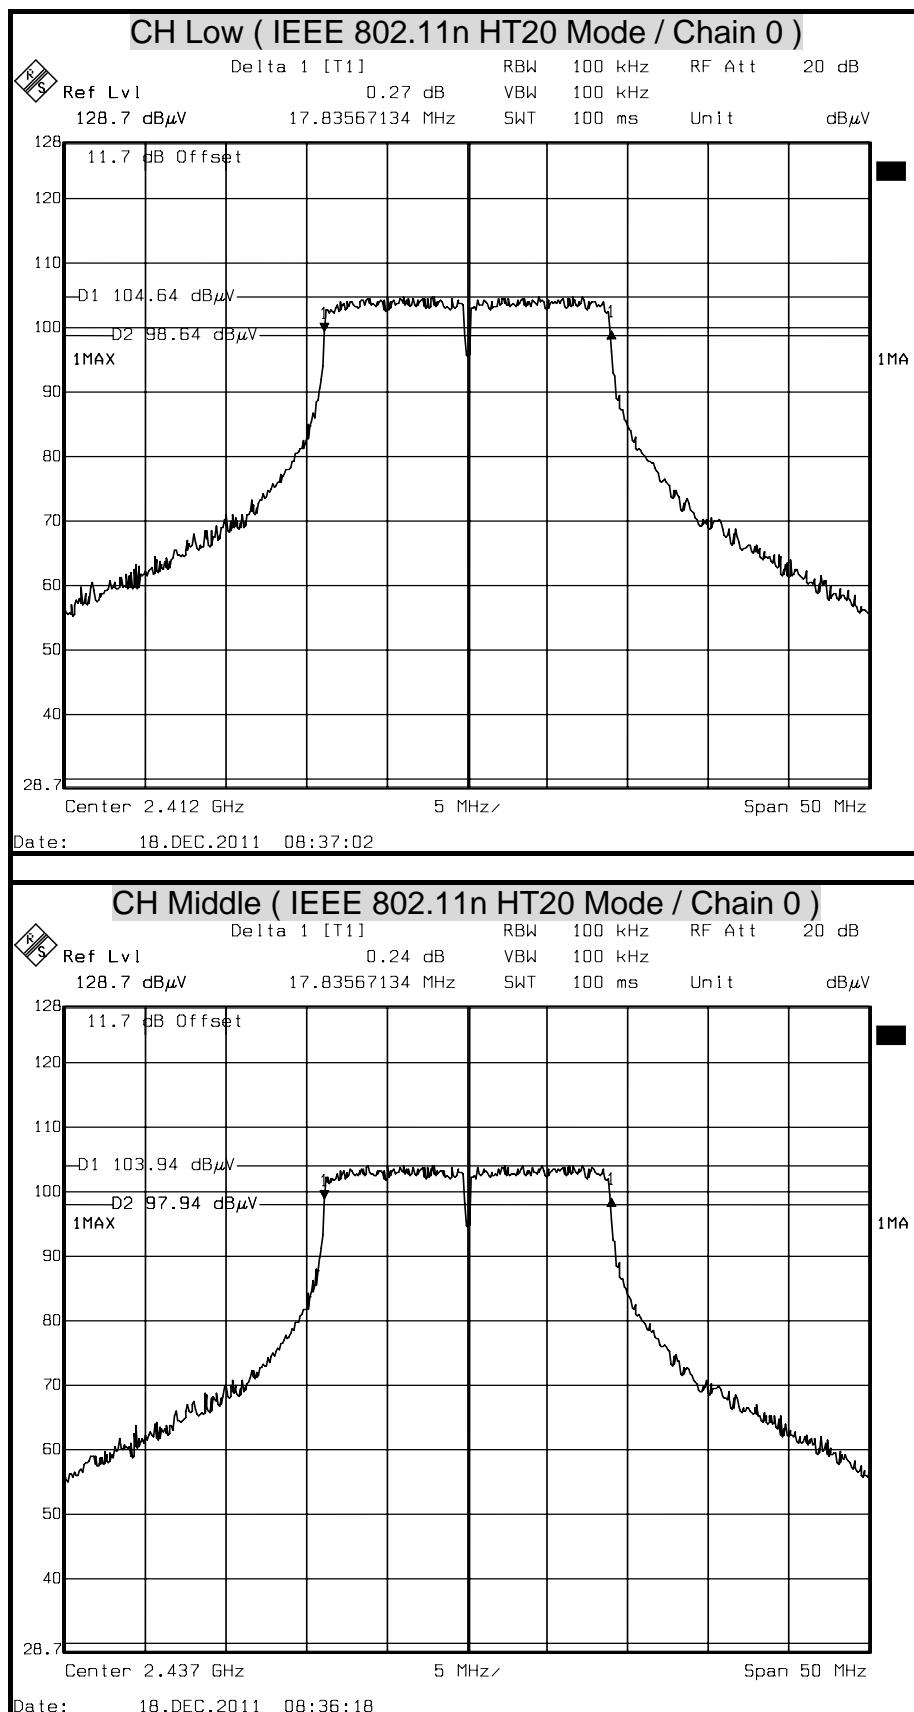


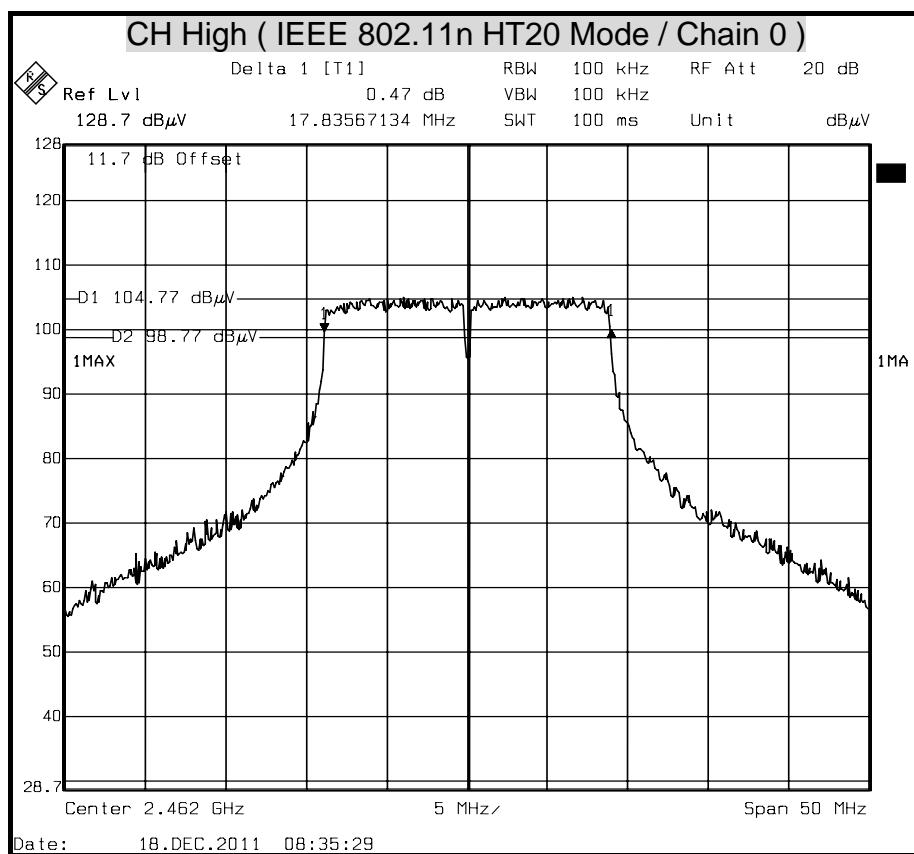


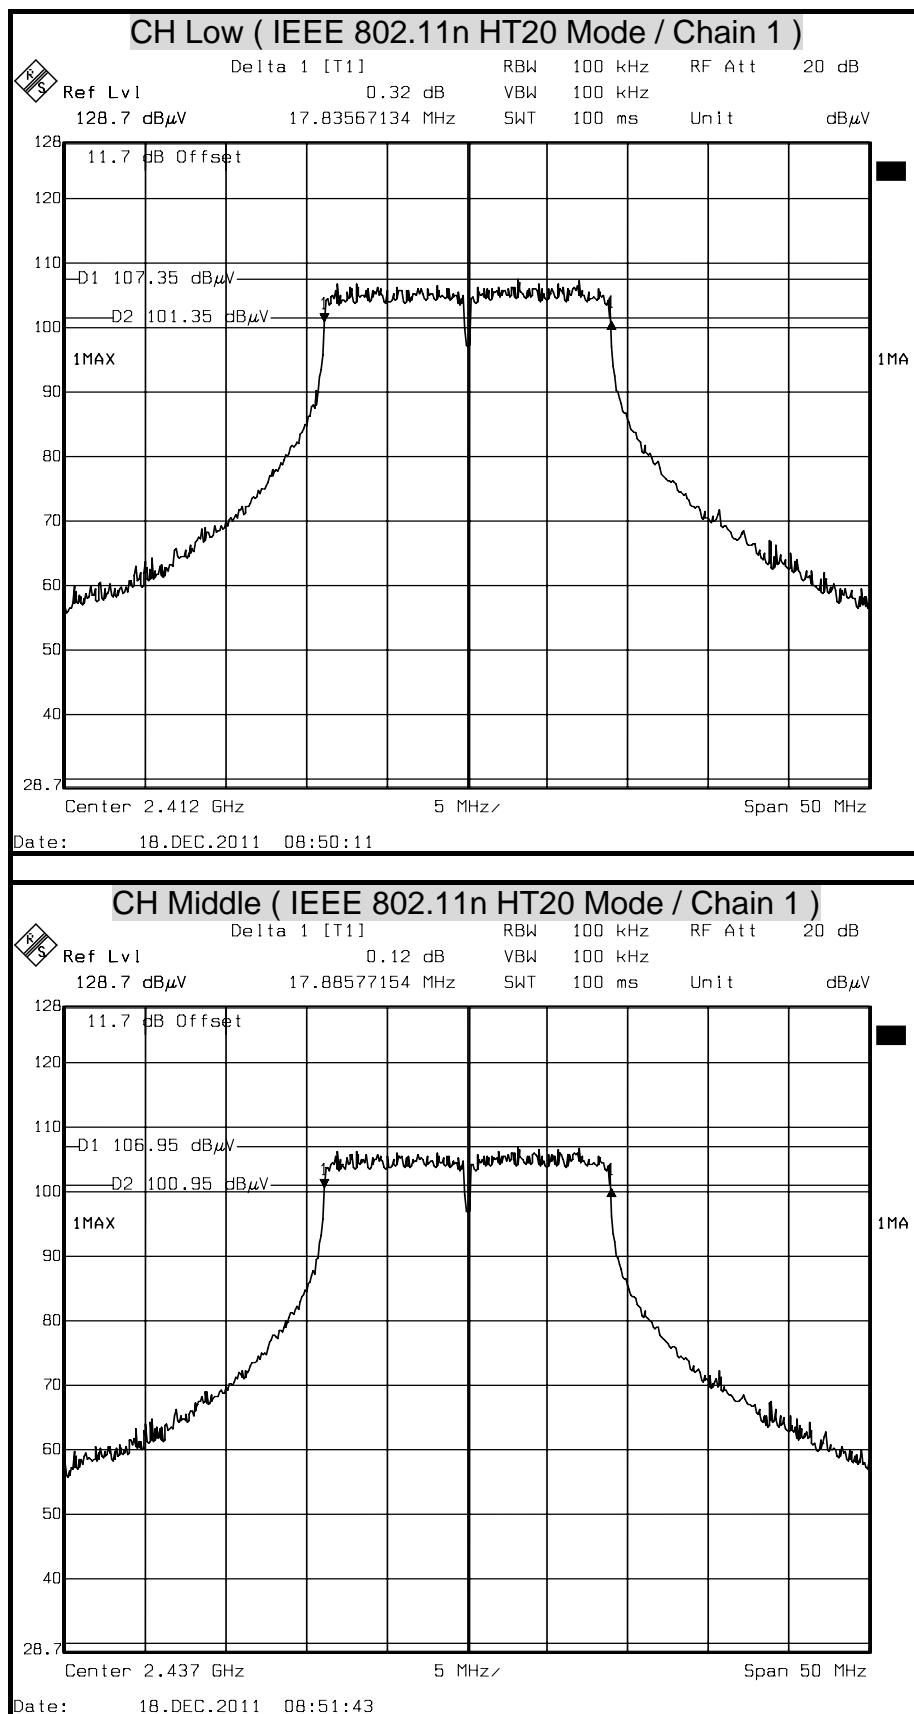


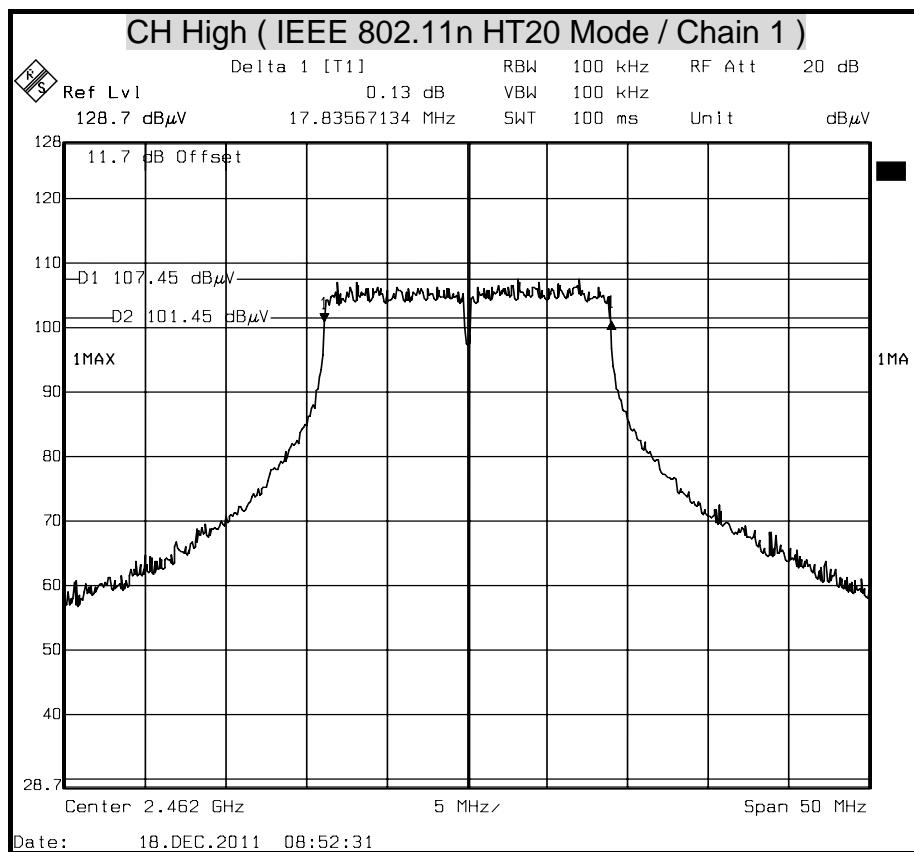

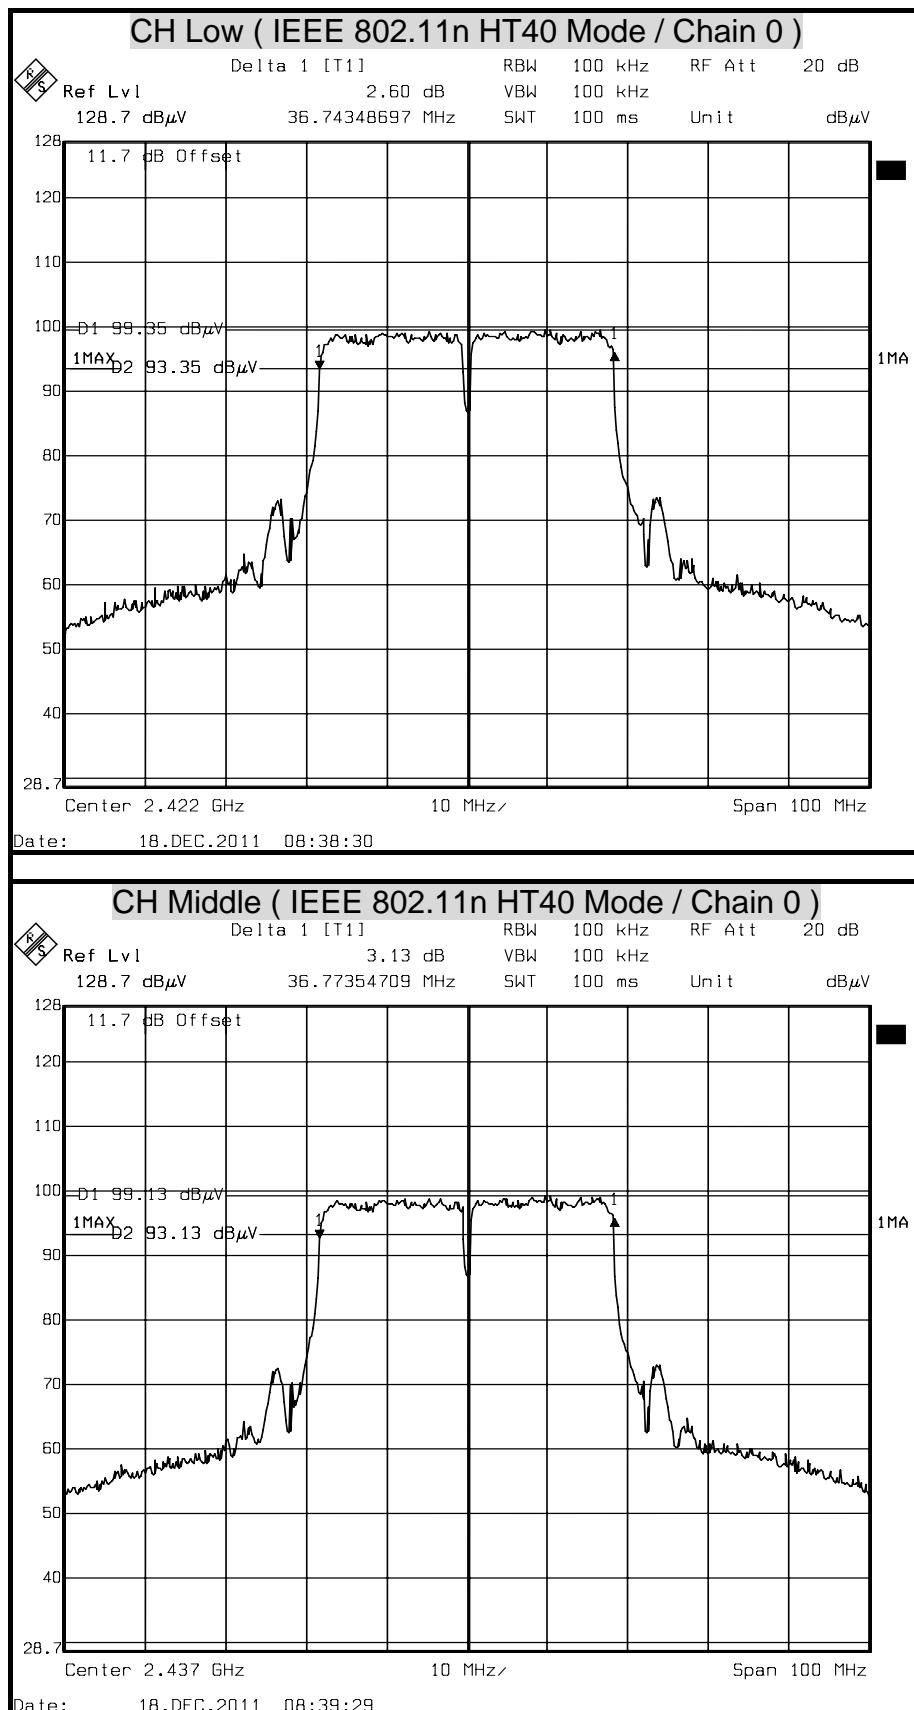

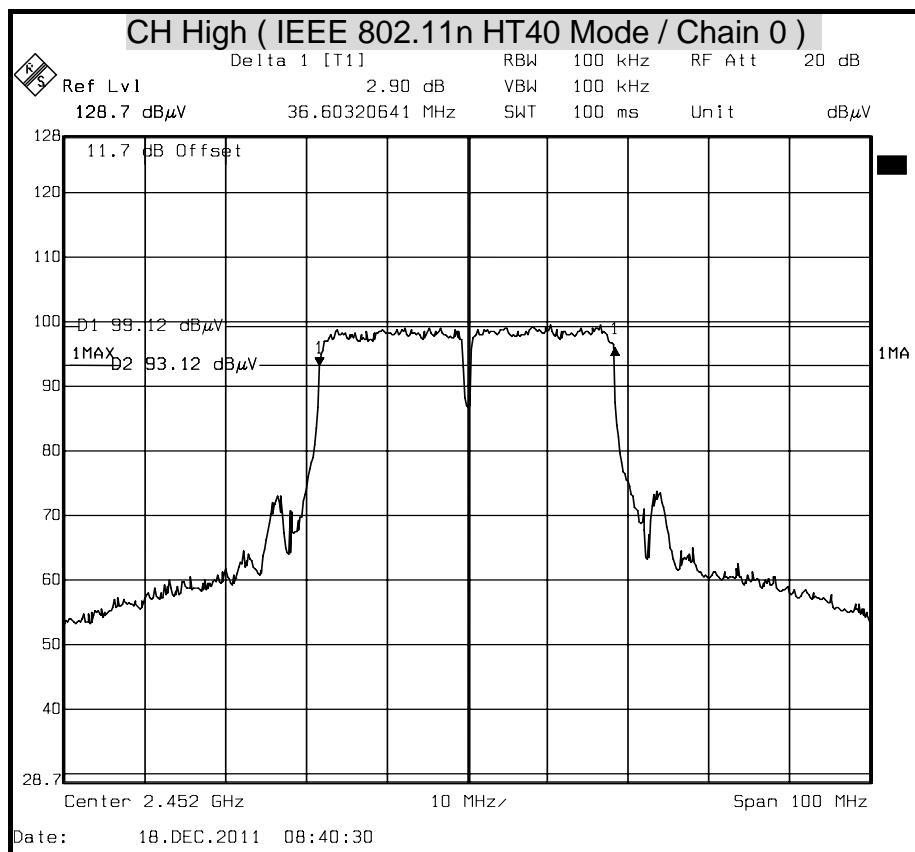


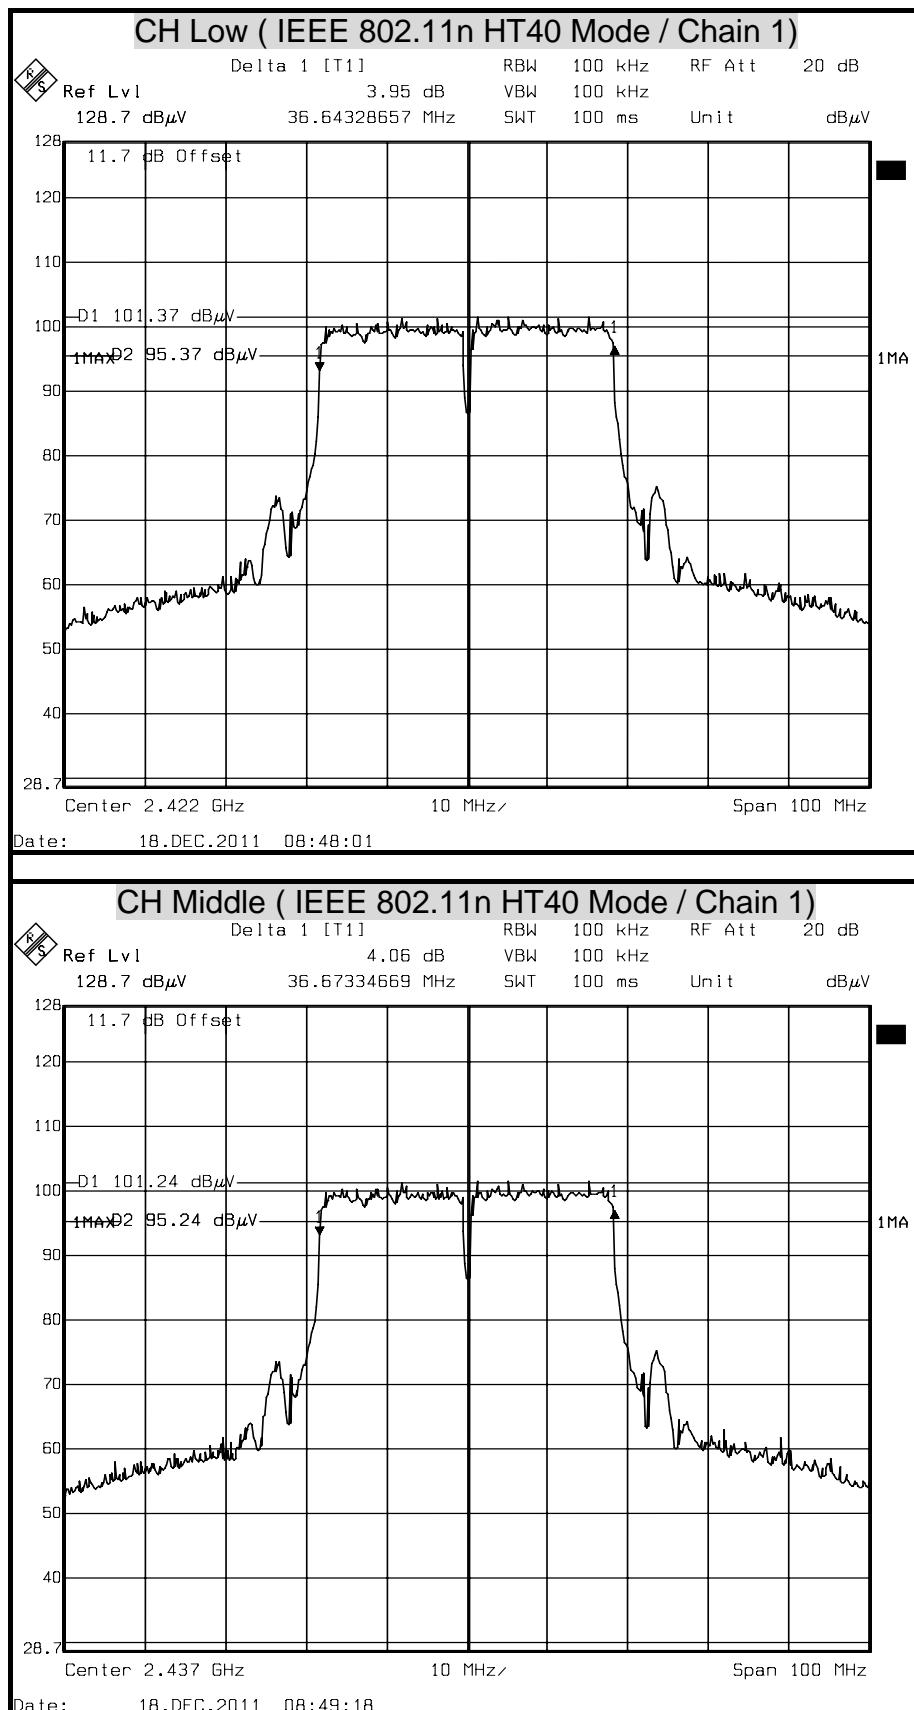


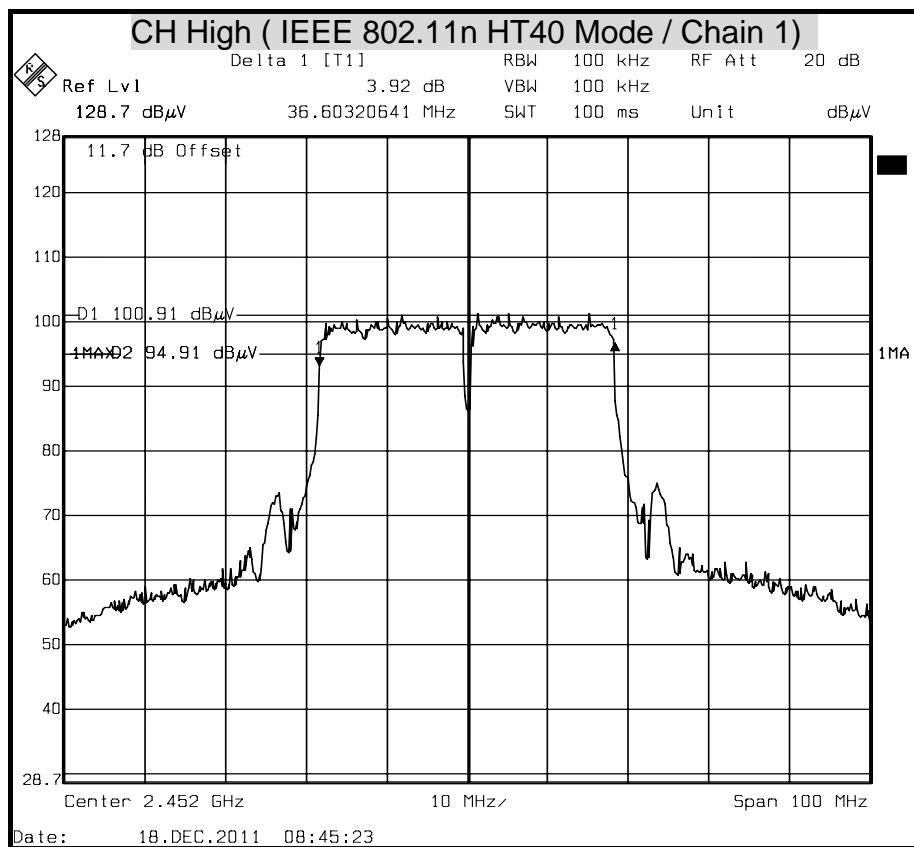






(5GHz)

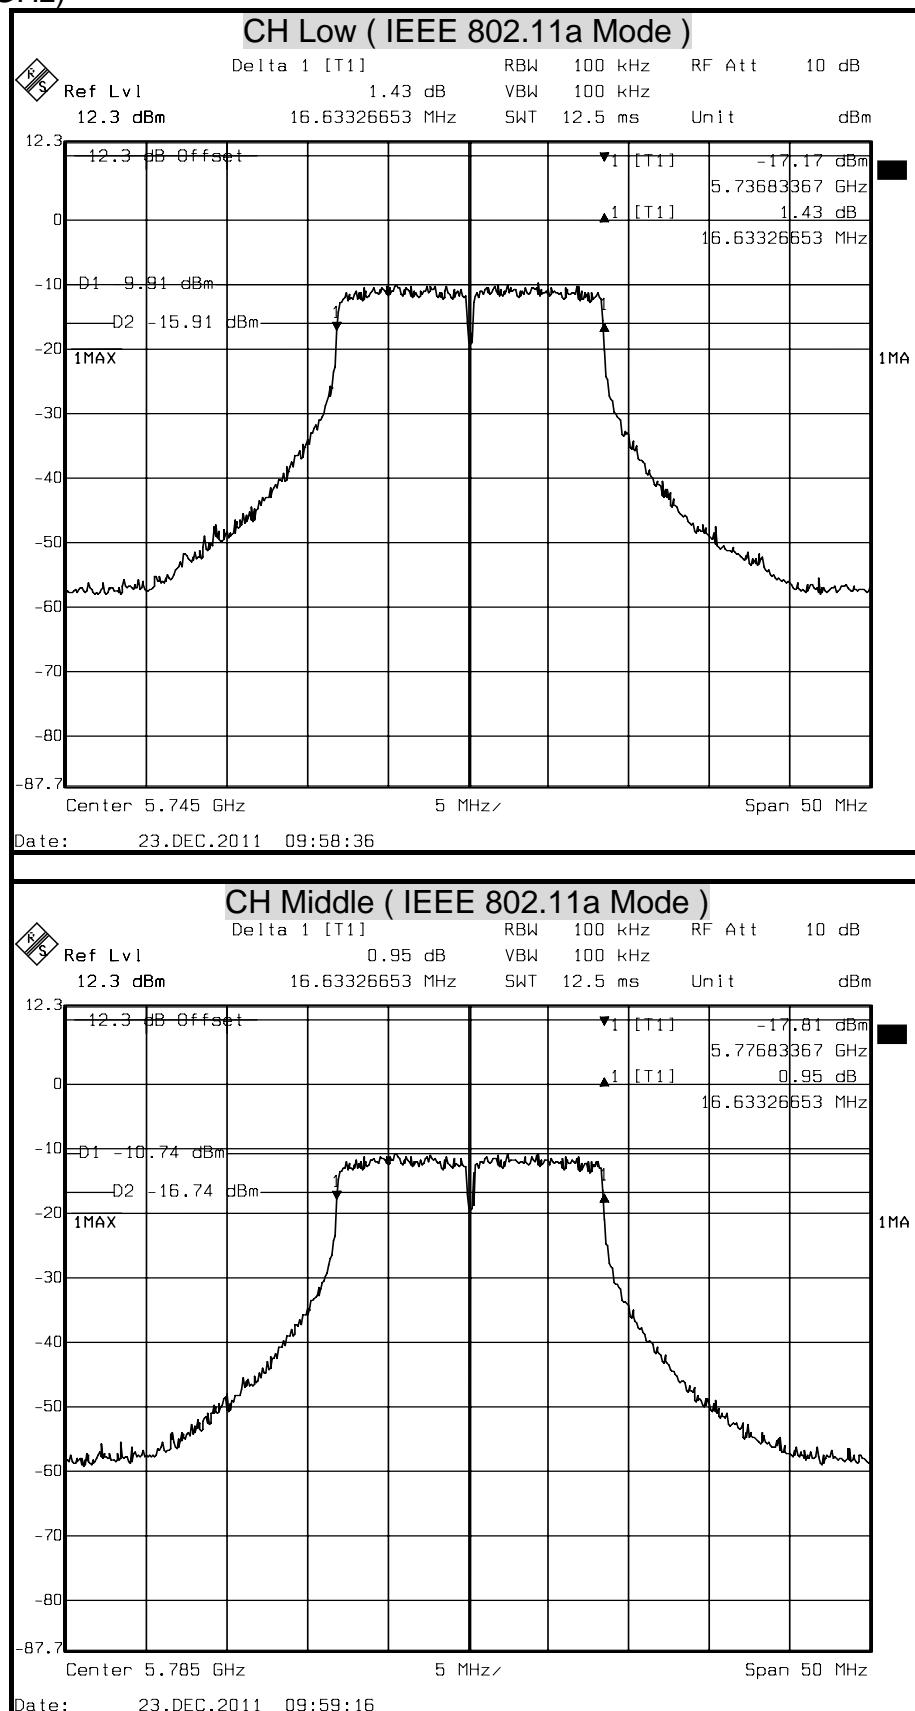


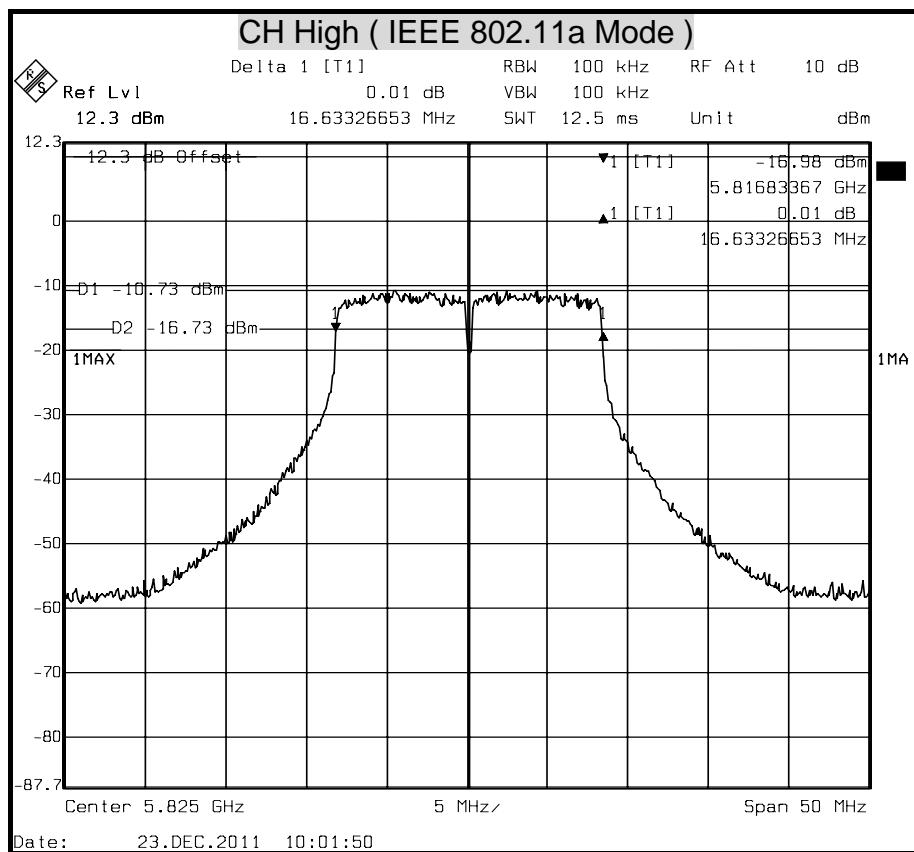


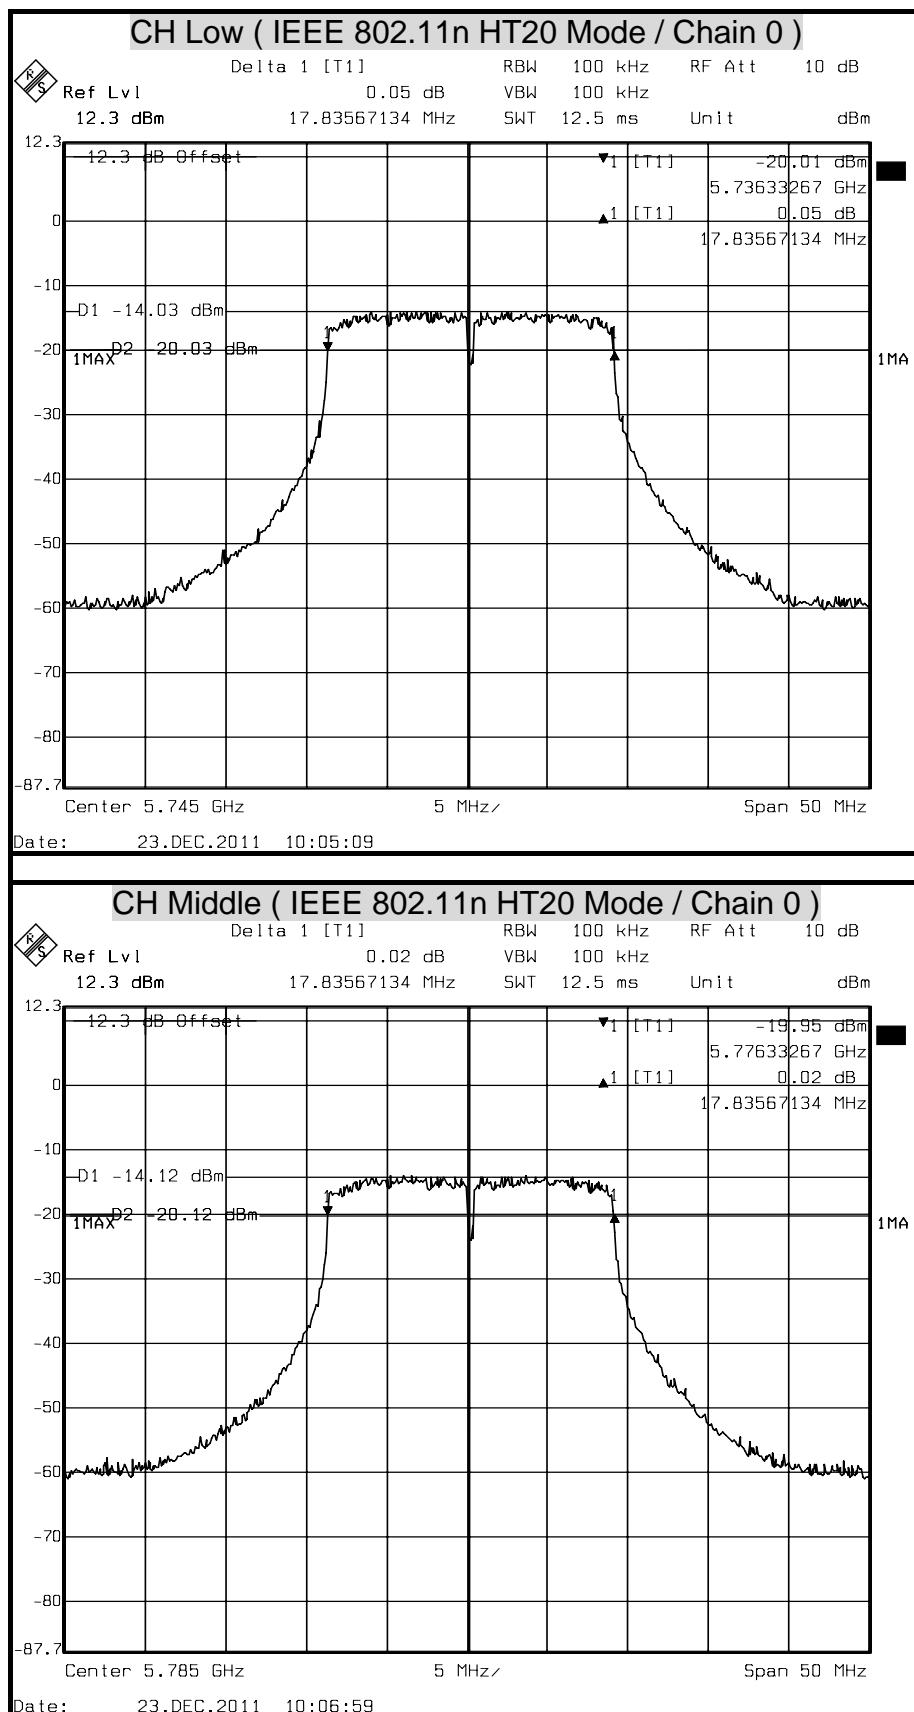


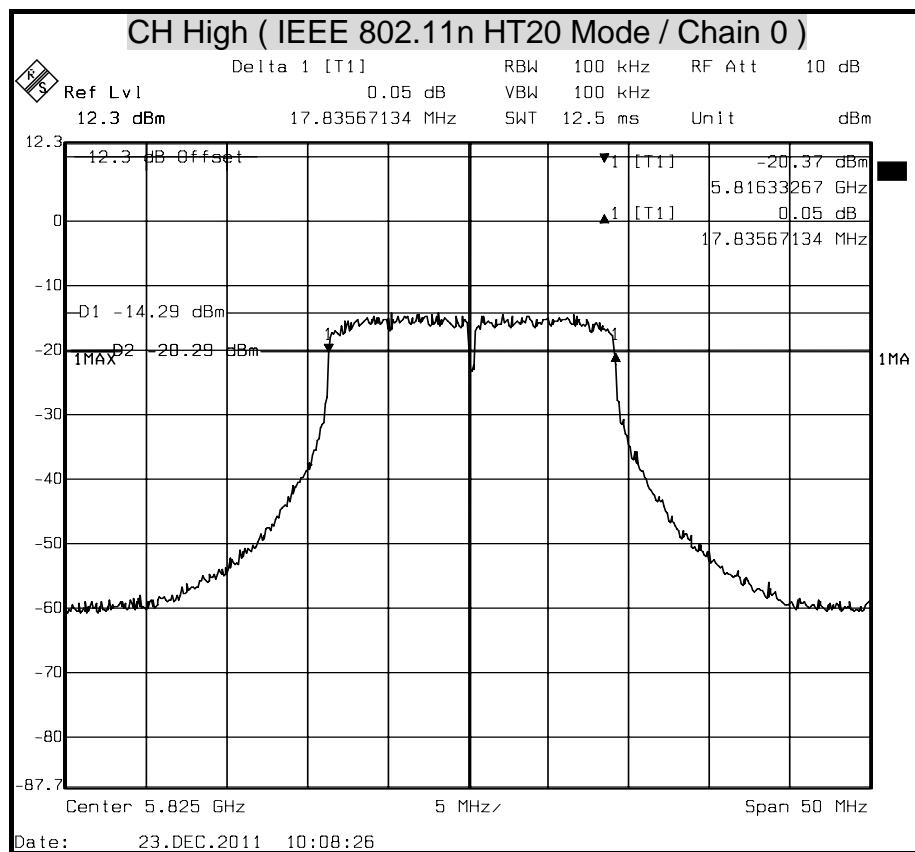


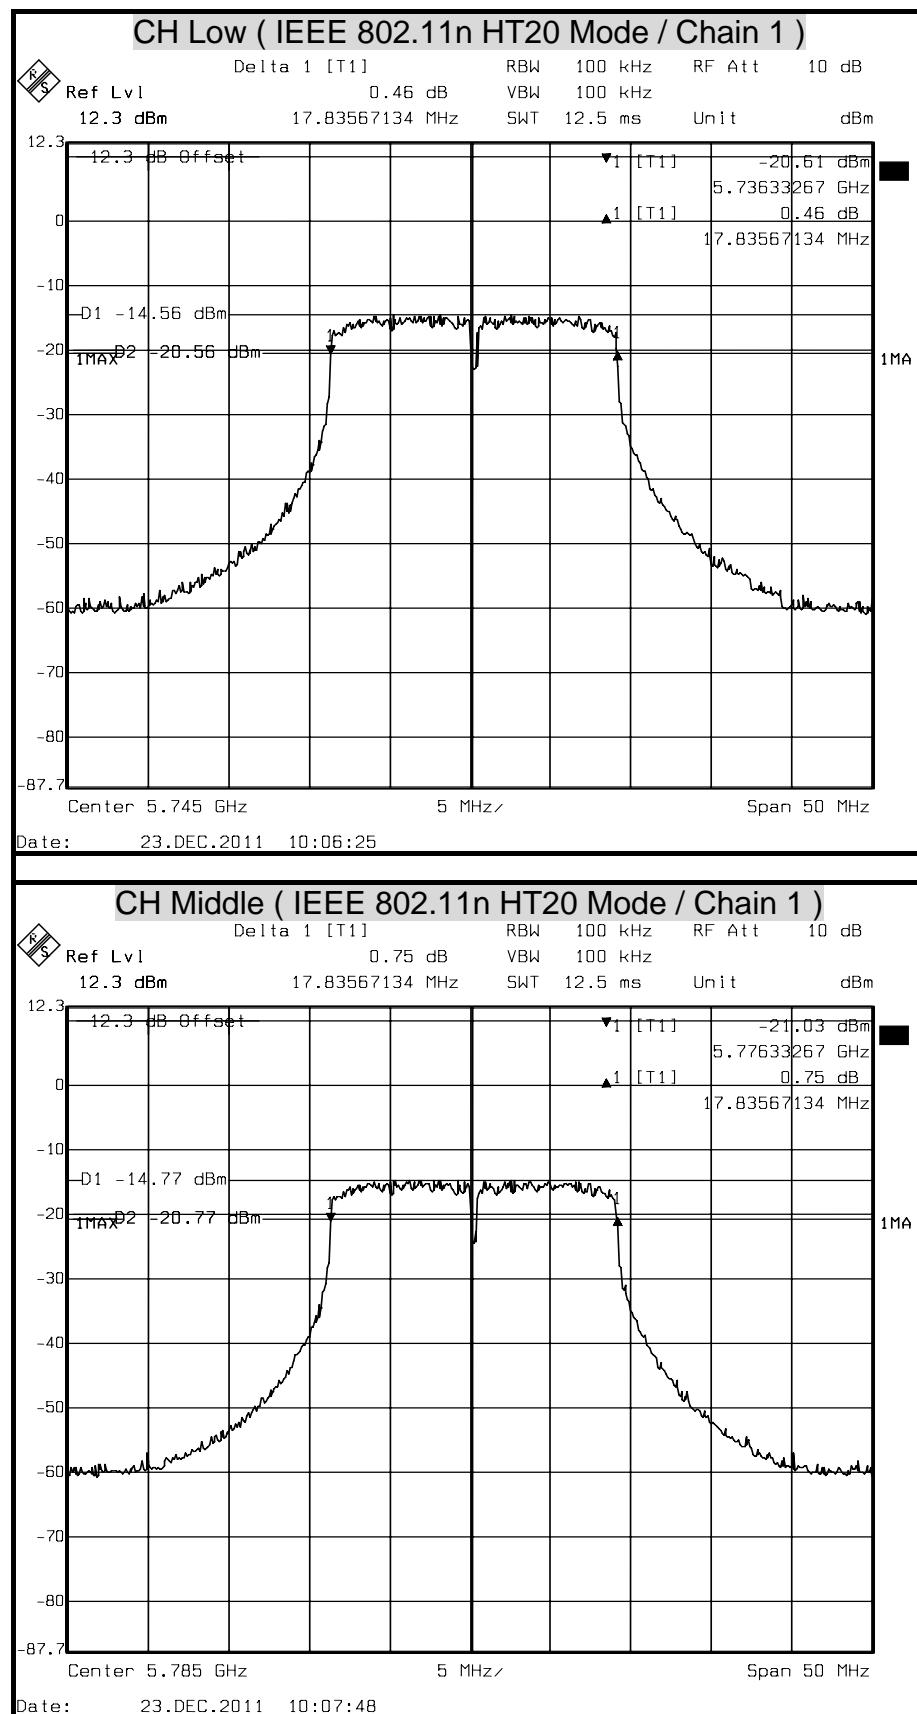


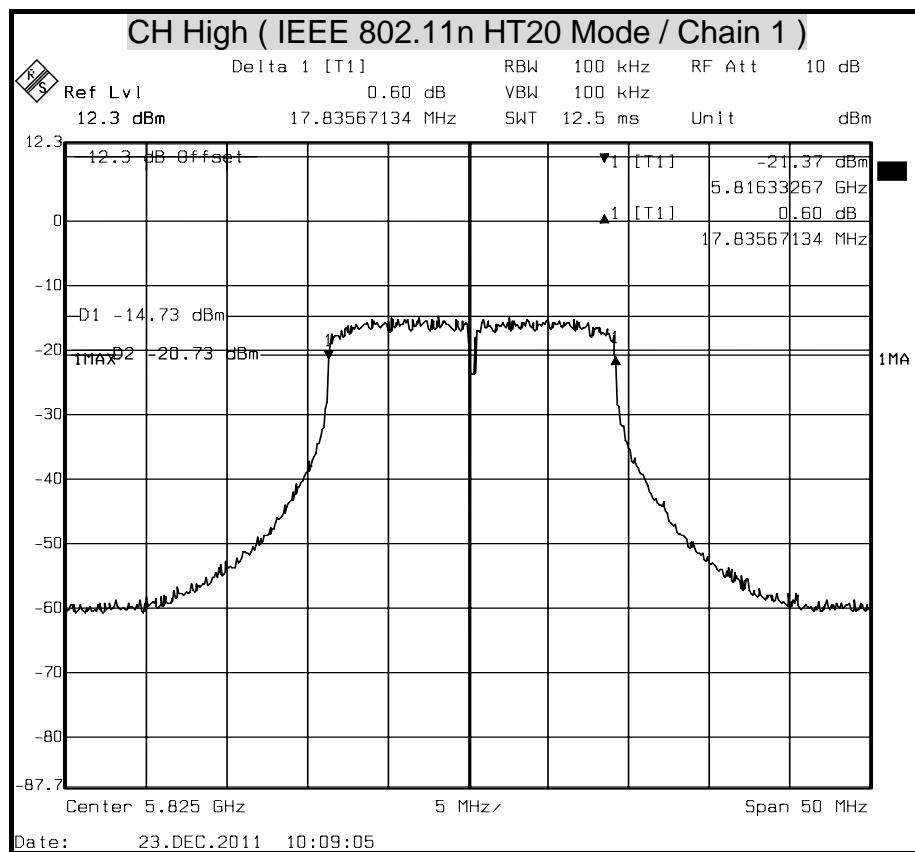

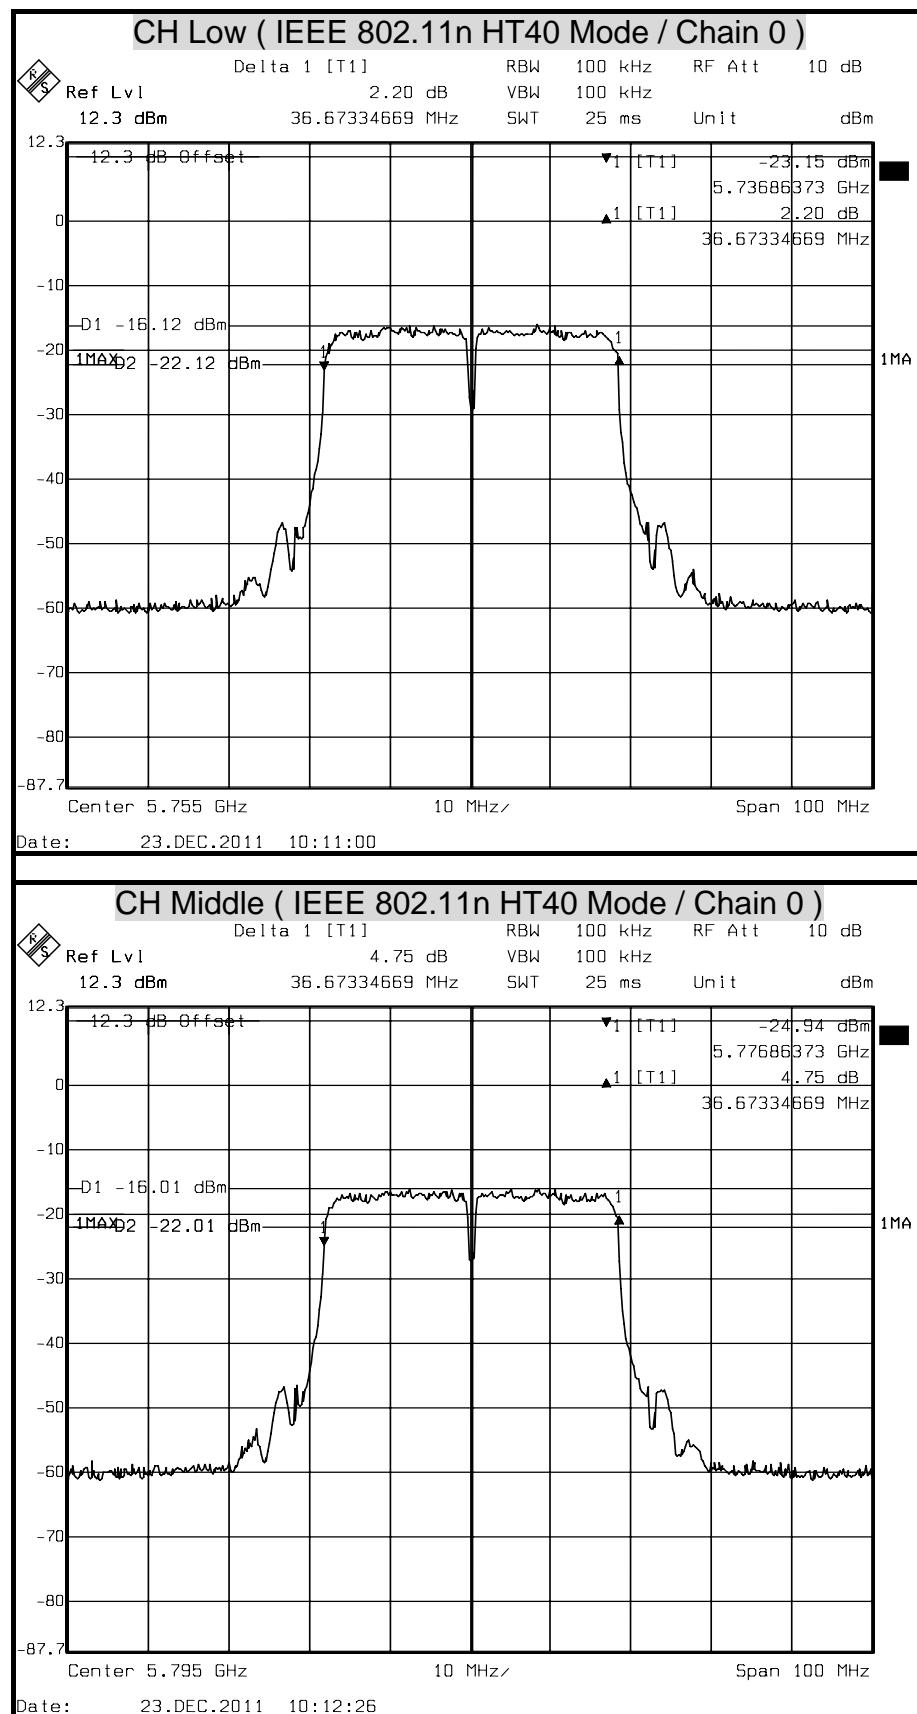

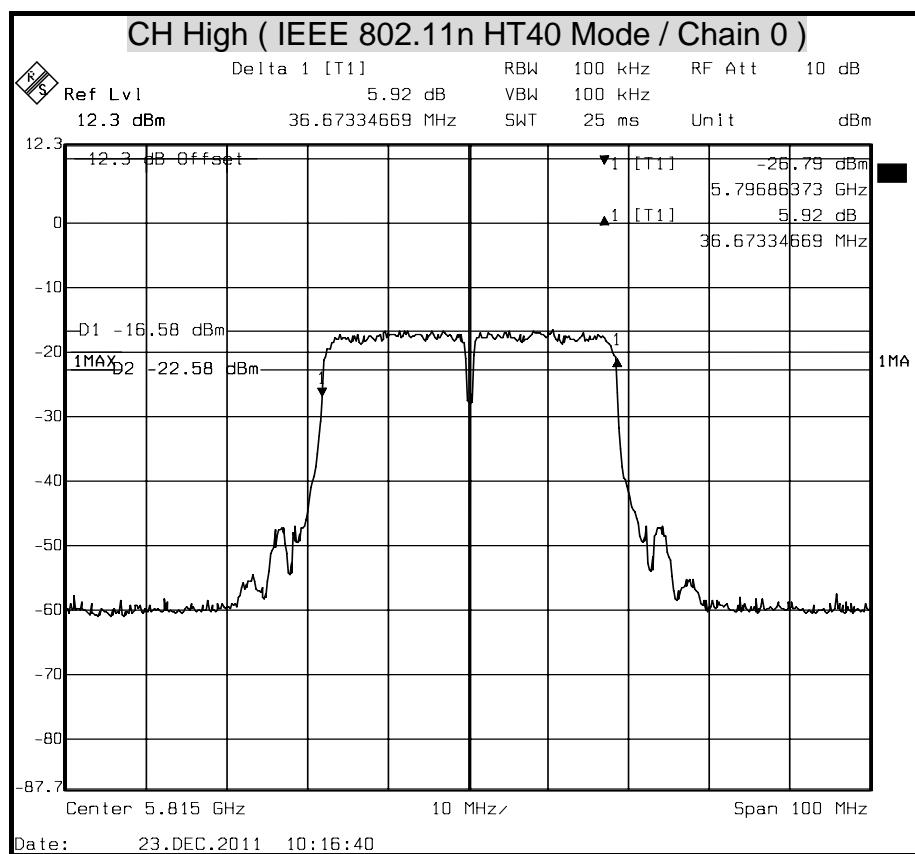

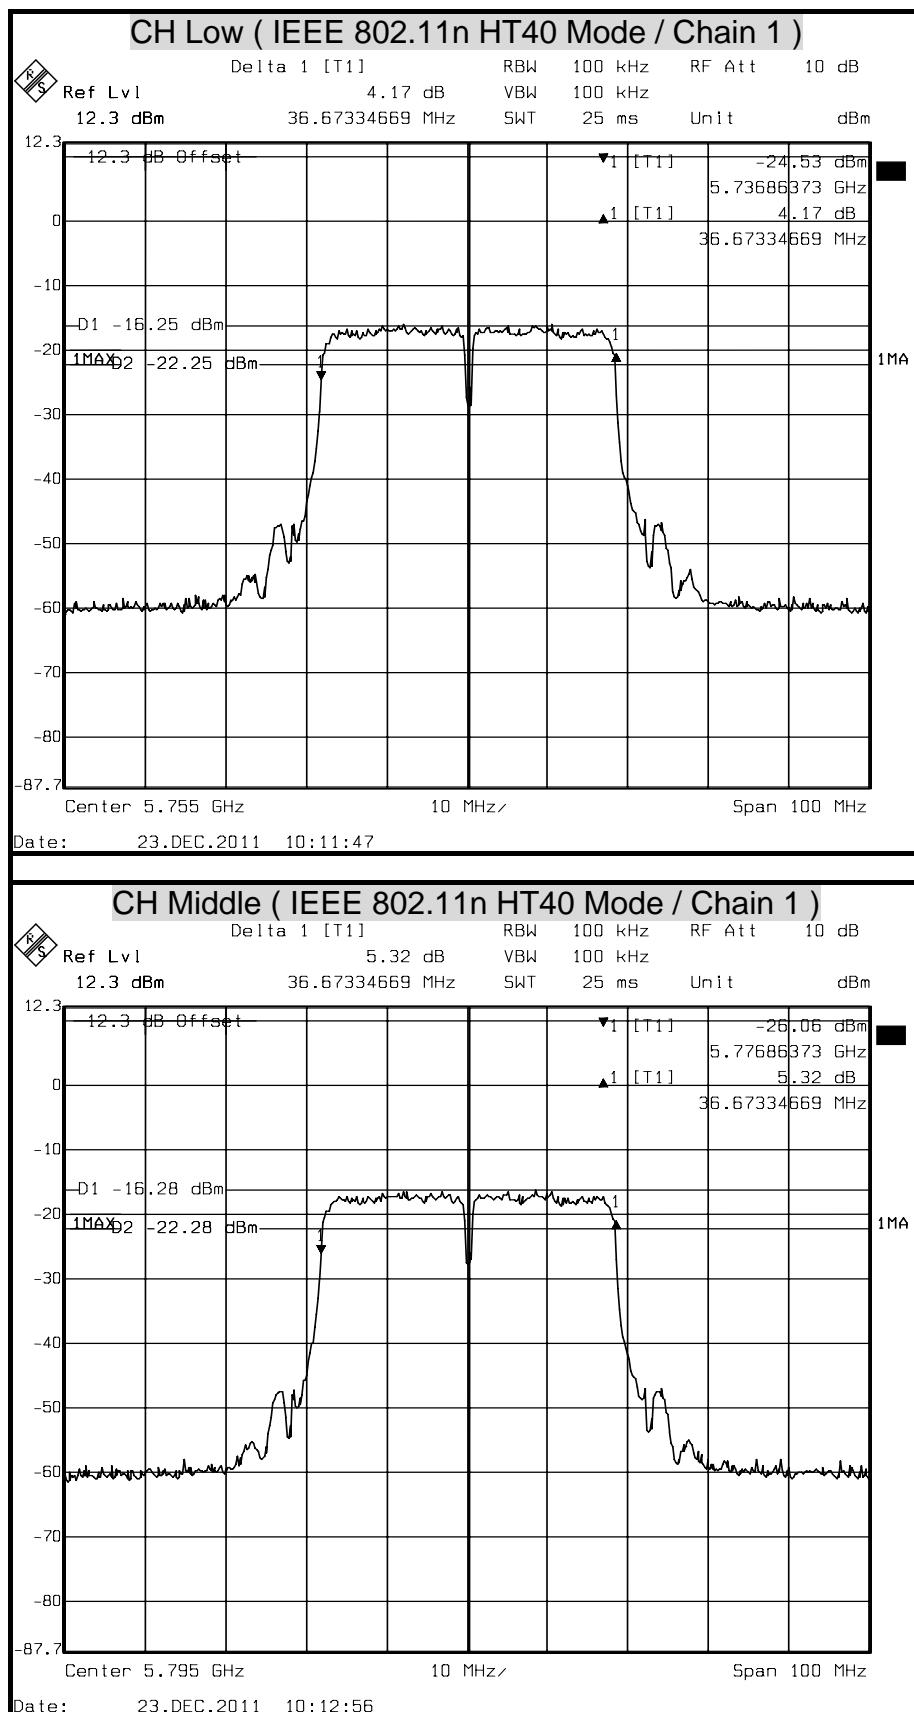

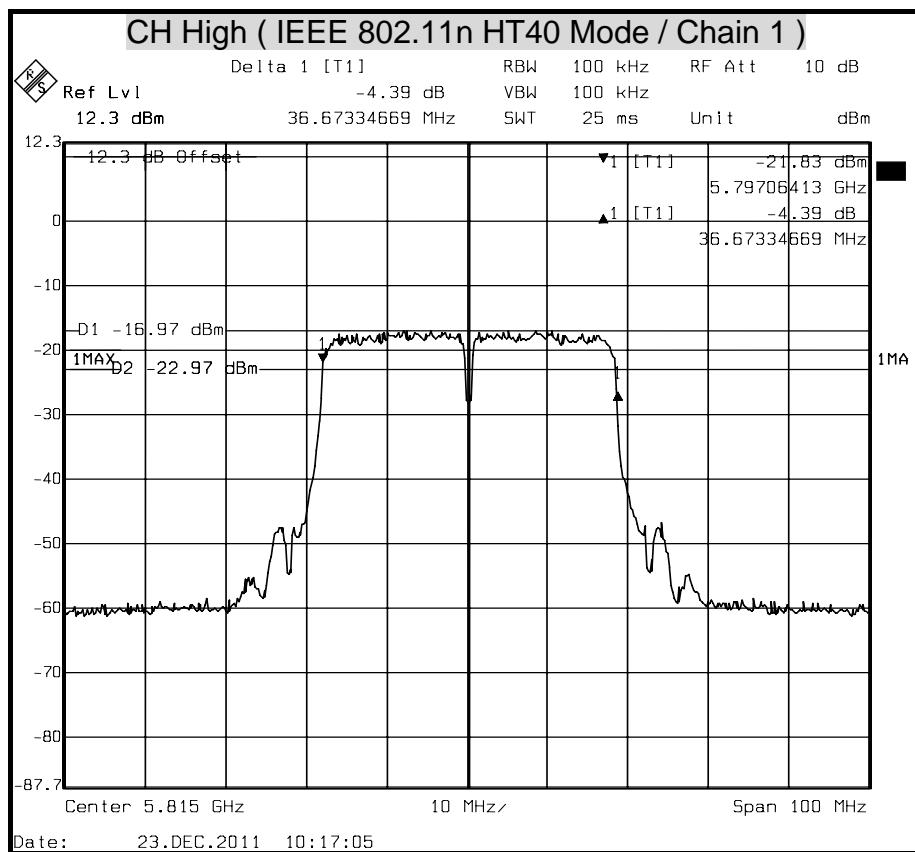



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.


§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2487A	6K00003888	MAY 30, 2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

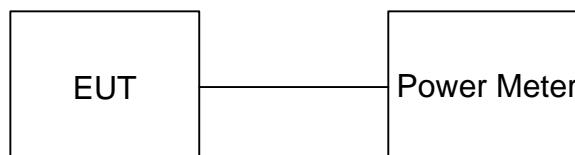

TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

**TEST RESULTS**

Antenna Gain1: 3 dBi
Antenna Gain2: 3 dBi
Array Gain=: 6.01 = $10^{\log((10^{3/10}) + (10^{3/10})))}$
Peak Power Limit: 29.99 = $30 - (6.01 - 6)$

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	21.63	30	PASS
Middle	2437	20.87		PASS
High	2462	21.31		PASS

Remark: At final test to get the worst-case emission at 1Mbps.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (dBm)	Pass / Fail
Low	2412	24.82	30	PASS
Middle	2437	24.63		PASS
High	2462	25.02		PASS

Remark: At final test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	23.73	24.21	26.99	29.99	PASS
Middle	2437	23.34	23.89	26.63		PASS
High	2462	23.76	24.12	26.95		PASS

Remark: At final test to get the worst-case emission at 6.5Mbps.



IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power (dBm) (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 0			
Low	2422	20.78	21.46	24.14	29.99	PASS
Middle	2437	21.46	21.14	24.31		PASS
High	2452	21.05	21.65	24.37		PASS

Remark: At finial test to get the worst-case emission at 13.5Mbps.



Antenna Gain1: 4 dBi
 Antenna Gain2: 4 dBi
 Array Gain=: 7.01 = $10^{\log((10^{4/10}) + (10^{4/10}))}$
 Peak Power Limit: 28.99 = $30 - (7.01 - 6)$

IEEE 802.11a Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)	Peak Power Limit (W)	Pass / Fail
Low	5745	15.37	1	PASS
Middle	5785	15.42	1	PASS
High	5825	15.05	1	PASS

Remark: At finial test to get the worst-case emission at 6Mbps.

IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	5745	14.48	14.32	17.41	28.99	PASS
Middle	5785	14.37	14.09	17.24		PASS
High	5825	13.95	13.74	16.86		PASS

Remark: At finial test to get the worst-case emission at 13Mbps.

IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total (dBm)	Peak Power Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	5755	12.75	12.62	15.70	28.99	PASS
Middle	5795	12.40	12.27	15.35		PASS
High	5815	12.29	12.18	15.25		PASS

Remark: At finial test to get the worst-case emission at 27Mbps.



Average Power

802.11b Mode

Channel	Frequency (MHz)	Average Power ChainA (dBm)
Low	2412	19.00
Middle	2437	18.34
High	2462	18.77

802.11g Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)
Low	2412	14.86
Middle	2437	14.42
High	2462	14.6.

802.11n HT20 Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)	Average Power ChainB (dBm)
Low	2412	13.89	14.24
Middle	2437	13.36	14.14
High	2462	13.07	14.59

802.11n HT40 Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)	Average Power ChainB (dBm)
Low	2422	11.15	11.95
Middle	2437	11.45	12.20
High	2452	11.27	11.91



802.11a Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)
Low	5745	5.30
Middle	5785	5.28
High	5825	5.11

802.11n HT20 Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)	Average Power ChainB (dBm)
Low	5745	4.39	4.25
Middle	5785	4.22	4.18
High	5825	4.07	3.93

802.11n HT40 Mode

Channel	Frequency (MHz)	Average Power Chain0 (dBm)	Average Power ChainB (dBm)
Low	5755	2.83	2.90
Middle	5795	2.67	2.57
High	5815	2.29	2.28



7.3 POWER SPECTRAL DENSITY

LIMITS


§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEK 30	835253/002	SEP. 29, 2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 3KHz and VBW RBW, set sweep time = span / 3KHz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.



TEST RESULTS

IEEE 802.11b Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-10.48	8	PASS
Middle	2437	-11.08	8	PASS
High	2462	-10.74	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	2412	-13.09	8	PASS
Middle	2437	-13.68	8	PASS
High	2462	-13.03	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



Antenna Gain1: 3 dBi
Antenna Gain2: 3 dBi
Array Gain=: $6.01 = 10 \log ((10^{(3/10)} + (10^{(3/10)}))$
PPSD Limit: $7.99 = 8 - (6.01 - 6)$

IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)			Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2412	-13.22	-12.60	-9.89	7.99	PASS
Middle	2437	-13.83	-13.75	-10.78		PASS
High	2462	-13.61	-12.96	-10.26		PASS

Remark:

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)			Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	2422	-17.85	-18.10	-14.96	7.99	PASS
Middle	2437	-17.74	-19.62	-15.57		PASS
High	2452	-17.58	-18.87	-15.17		PASS

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



Antenna Gain1: 4 dBi
Antenna Gain2: 4 dBi
Array Gain=: 7.01 = $10^{\log((10^{4/10}) + (10^{4/10}))}$
PPSD Limit: 6.99 = $8 - (7.01 - 6)$

IEEE 802.11a Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)	Minimum Limit (dBm)	Pass / Fail
Low	5745	-24.46	8	PASS
Middle	5785	-25.02		PASS
High	5825	-24.78		PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 12.3dB (including 10 dB pad and 2.3 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT20 Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)			Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	5745	-27.47	-28.20	-24.81	6.99	PASS
Middle	5785	-28.02	-29.01	-25.48		PASS
High	5825	-28.23	-29.57	-25.84		PASS

Remark:

1. At final test to get the worst-case emission at 13Mbps.
2. The cable assembly insertion loss of 12.3dB (including 10 dB pad and 2.3 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Mode

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)			Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Total		
Low	5755	-30.94	-31.69	-28.29	6.99	PASS
Middle	5795	-30.96	-31.81	-28.35		PASS
High	5815	-31.13	-31.58	-28.34		PASS

Remark:

1. At final test to get the worst-case emission at 27Mbps.
2. The cable assembly insertion loss of 12.3dB (including 10 dB pad and 2.3 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

POWER SPECTRAL DENSITY