

Appendix A. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Total Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11a	5220	--	22.52	23.12	--	25.84	30	--	Pass
	5745	--	19.68	20.16	--	22.94	30	--	Pass
802.11ax (20 MHz)	5220	--	23.24	23.72	--	26.50	30	--	Pass
	5825	--	19.25	19.92	--	22.61	30	--	Pass
802.11ax (40 MHz)	5230		21.16	21.54	--	24.36	30	--	Pass
	5755		21.75	22.15	--	24.96	30	--	Pass
802.11ax (80 MHz)	5210	--	11.02	11.27	--	14.16	30	--	Pass
	5775	--	16.90	17.05	--	19.99	30	--	Pass

Note: Total Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.

Appendix B. Test Result of Transmitter Radiated Spurious Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5220MHz
TEST BY :Peter

Level (dBuV/m)

Date: 2024-09-13

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dB	dB/m	
1	10440.000	46.60	68.22	-21.62	55.97	-9.37	Peak
2	15660.000	53.37	74.00	-20.63	54.56	-1.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5220MHz
TEST BY :Peter

Level (dBuV/m)

Date: 2024-09-13

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dB	dB/m	
1	10440.000	47.12	68.22	-21.10	56.49	-9.37	Peak
2	15660.000	41.14	54.00	-12.86	42.33	-1.19	Average
3	15660.000	55.35	74.00	-18.65	56.54	-1.19	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
TEST BY :Peter

Level (dBuV/m)

Date: 2024-09-05

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dB	dB/m	
1	11490.000	46.72	74.00	-27.28	53.82	-7.10	Peak
2	17235.000	60.86	68.22	-7.36	61.39	-0.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
TEST BY :Peter


Level (dBuV/m)

Date: 2024-09-05

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	dB	dB/m	
1	11490.000	46.55	74.00	-27.45	53.65	-7.10	Peak
2	17235.000	63.15	68.22	-5.07	63.68	-0.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5220MHz
TEST BY :Peter

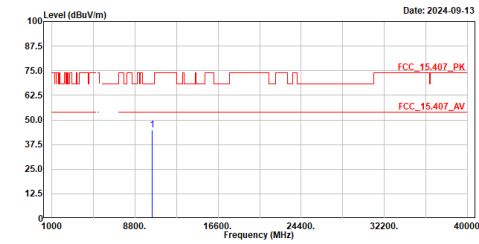


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	45.00	68.22	-23.22	54.37	-9.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5220MHz
TEST BY :Peter

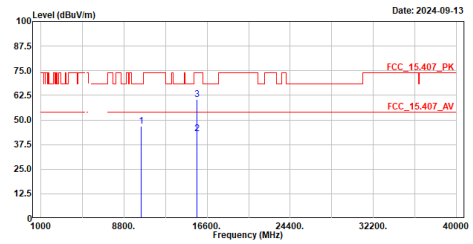


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10440.000	46.82	68.22	-21.40	56.19	-9.37	Peak
2	15660.000	43.11	54.00	-10.89	44.30	-1.19	Average
3	15660.000	60.24	74.00	-13.76	61.43	-1.19	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5825MHz
TEST BY :Peter

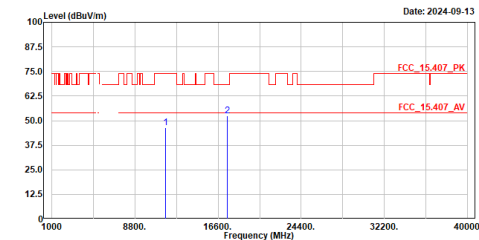


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.25	74.00	-27.75	53.43	-7.18	Peak
2	17475.000	52.49	68.22	-15.73	52.78	-0.21	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5825MHz
TEST BY :Peter

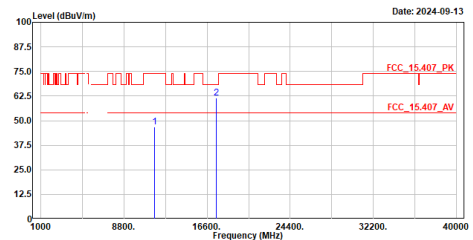


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.70	74.00	-27.30	53.88	-7.18	Peak
2	17475.000	61.50	68.22	-6.72	61.71	-0.21	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

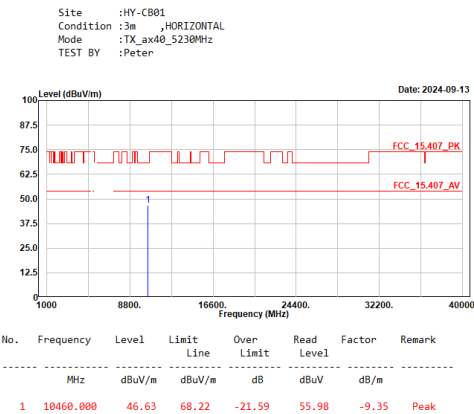


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

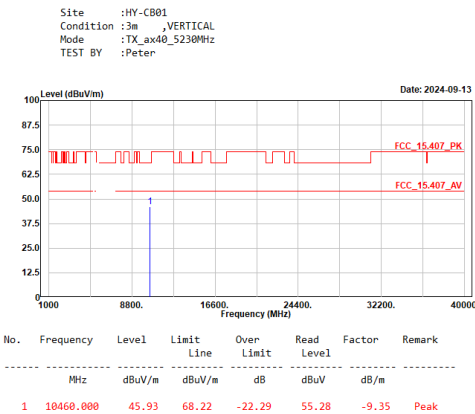

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

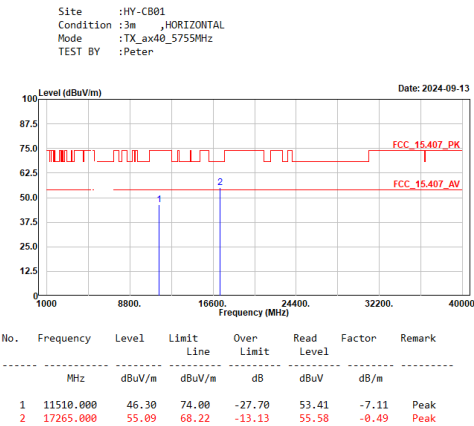


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

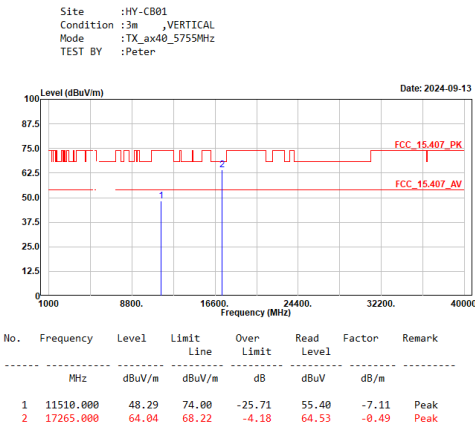

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5210MHz
TEST BY :Peter

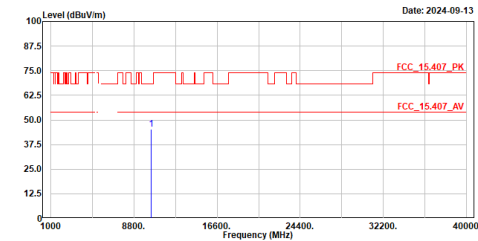

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	45.26	68.22	-22.96	54.64	-9.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5210MHz
TEST BY :Peter

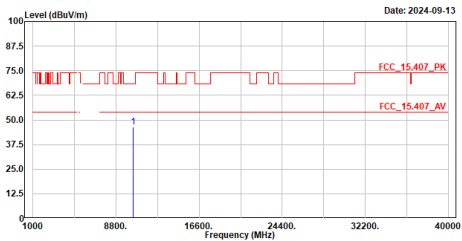

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10420.000	46.48	68.22	-21.74	55.86	-9.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

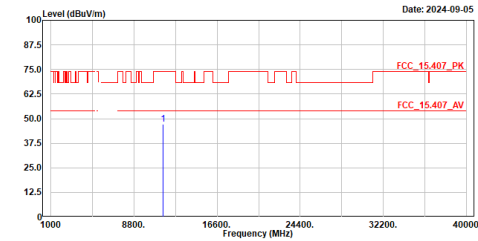

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	47.12	74.00	-26.88	54.26	-7.14	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

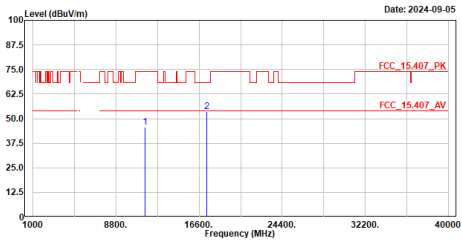


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11550.000	45.68	74.00	-28.32	52.82	-7.14	Peak
2	17325.000	53.47	68.22	-14.75	53.93	-0.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Adapter_DCT36W120300ZZ-D2


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

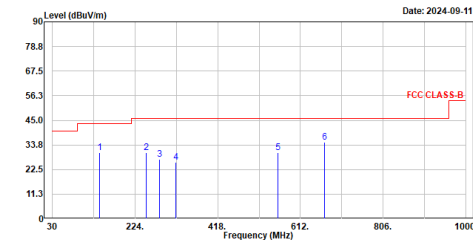

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	140.580	30.37	43.50	-13.13	54.66	-24.29	QP
2	250.190	30.12	46.00	-15.88	54.94	-24.82	QP
3	281.230	27.10	46.00	-18.90	50.51	-23.41	QP
4	320.030	25.85	46.00	-20.15	48.18	-22.33	QP
5	559.620	30.11	46.00	-15.89	46.82	-16.71	QP
6	668.260	34.84	46.00	-11.16	49.43	-14.59	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

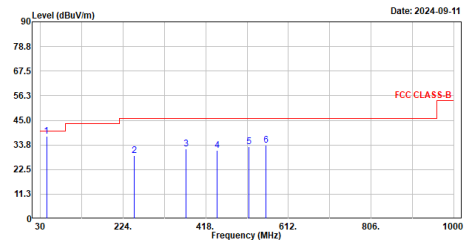


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	44.520	37.77	40.00	-2.23	61.42	-23.65	QP
2	250.190	28.72	46.00	-17.28	53.54	-24.82	QP
3	371.440	31.76	46.00	-14.24	52.83	-21.07	QP
4	445.160	31.22	46.00	-14.78	50.12	-18.90	QP
5	519.850	32.97	46.00	-13.03	50.51	-17.54	QP
6	559.620	33.64	46.00	-12.36	50.35	-16.71	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Adapter_PS36LA120K3000UD


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

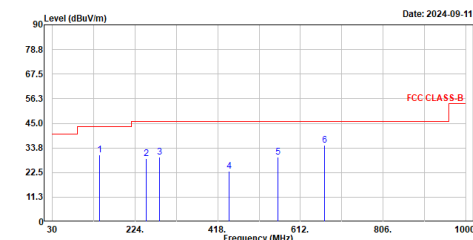

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	141.550	30.45	43.50	-13.05	54.64	-24.19	QP
2	250.190	28.71	46.00	-17.29	53.53	-24.82	QP
3	282.200	29.39	46.00	-16.61	52.76	-23.37	QP
4	445.160	22.98	46.00	-23.02	41.88	-18.90	QP
5	559.620	29.69	46.00	-16.31	46.40	-16.71	QP
6	668.260	34.98	46.00	-11.02	49.57	-14.59	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax80_5775MHz
TEST BY :Peter

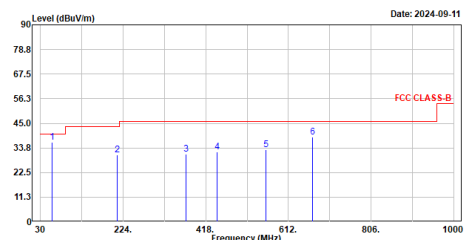

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	57.160	36.48	40.00	-3.52	60.38	-23.90	QP
2	210.420	30.54	43.50	-12.96	56.98	-26.44	QP
3	371.440	30.75	46.00	-15.25	51.82	-21.07	QP
4	445.160	31.96	46.00	-14.04	50.86	-18.90	QP
5	559.620	33.03	46.00	-12.97	49.74	-16.71	QP
6	668.260	38.57	46.00	-7.43	53.16	-14.59	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5220MHz
TEST BY :Caster

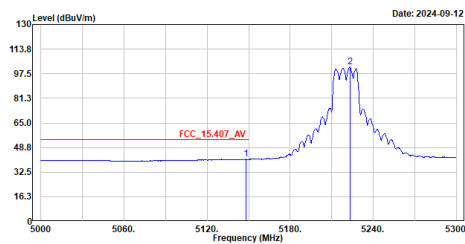

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	41.14	54.00	-12.86	26.74	14.40	Average
2	5223.200	101.96	-----	-----	87.46	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5220MHz
TEST BY :Caster

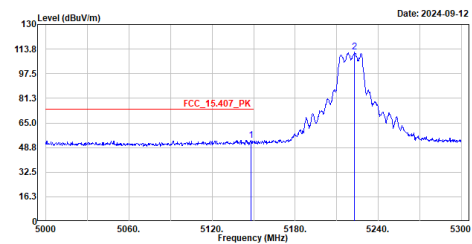

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5147.900	53.61	74.00	-20.39	39.21	14.40	Peak
2	5222.900	111.79	-----	-----	97.29	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5220MHz
TEST BY :Caster

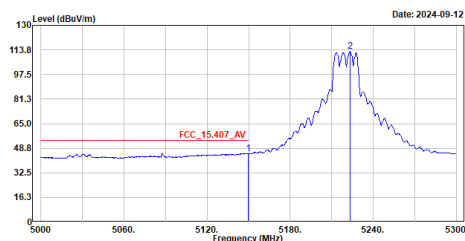

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	45.37	54.00	-8.63	30.97	14.40	Average
2	5223.200	112.66	-----	-----	98.16	14.50	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5220MHz
TEST BY :Caster

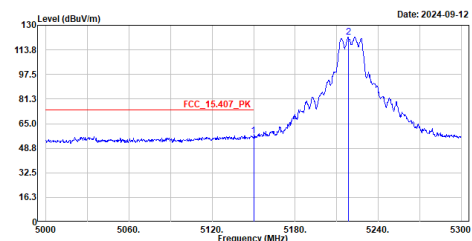


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	56.92	74.00	-17.08	42.52	14.40	Peak
2	5218.400	122.21	-----	-----	107.70	14.51	Peak


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

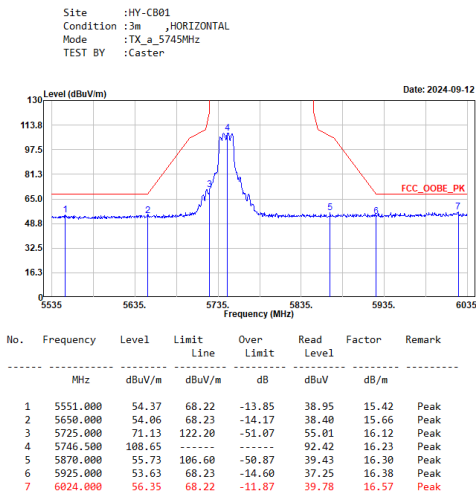


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

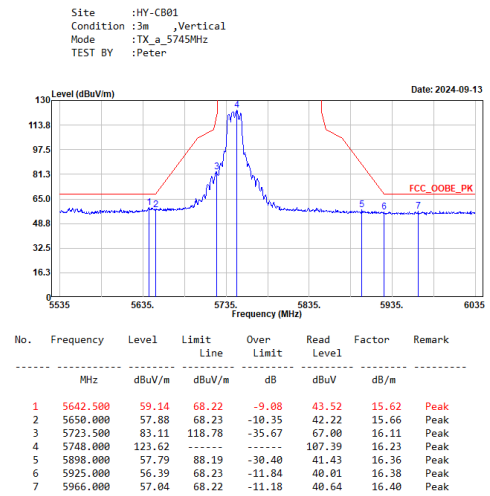

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

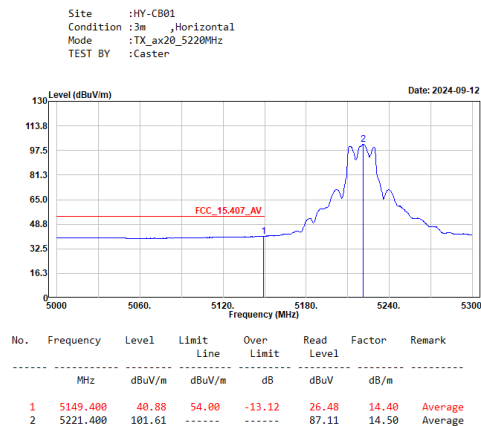


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

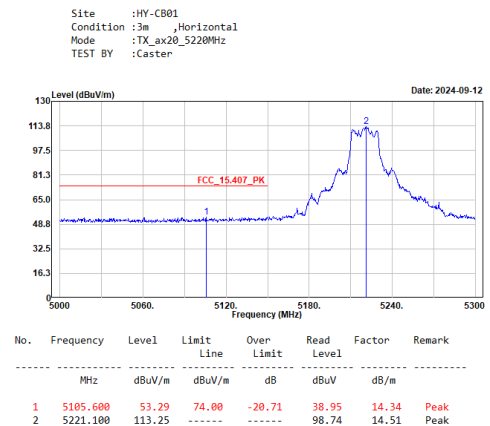

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5220MHz
TEST BY :Caster

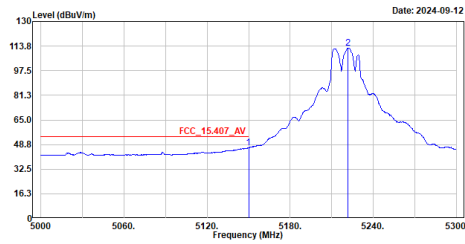


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	46.52	54.00	-7.48	32.12	14.40	Average
2	5221.700	112.44	-----	-----	97.94	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5220MHz
TEST BY :Caster

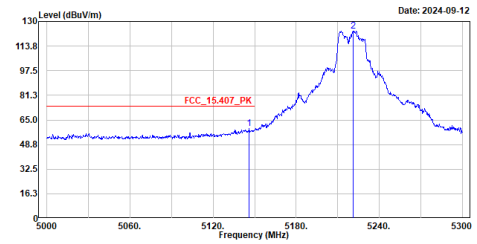


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.100	59.50	74.00	-14.50	45.10	14.40	Peak
2	5221.400	123.86	-----	-----	109.36	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5825MHz
TEST BY :Caster

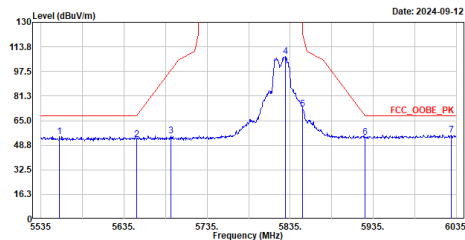


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5557.500	54.66	68.22	-13.56	39.27	15.39	Peak
2	5650.000	52.70	68.23	-15.53	37.04	15.66	Peak
3	5691.500	55.15	98.91	-43.76	39.21	15.94	Peak
4	5825.000	107.65	-----	-----	91.37	16.28	Peak
5	5850.000	72.44	122.20	-49.76	56.19	16.25	Peak
6	5925.000	53.95	68.23	-14.28	37.57	16.38	Peak
7	6028.500	55.58	68.22	-12.64	38.99	16.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5825MHz
TEST BY :Caster

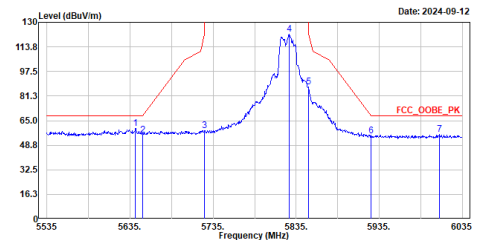


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5641.500	59.74	68.22	-8.48	44.13	15.61	Peak
2	5650.000	55.55	68.23	-12.68	39.89	15.66	Peak
3	5725.000	58.38	122.20	-63.82	42.26	16.12	Peak
4	5827.000	122.26	-----	-----	105.97	16.29	Peak
5	5850.000	87.17	122.20	-35.03	70.92	16.25	Peak
6	5925.000	54.79	68.23	-13.44	38.41	16.38	Peak
7	6007.500	55.90	68.22	-12.32	39.38	16.52	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_5230MHz
TEST BY :Caster

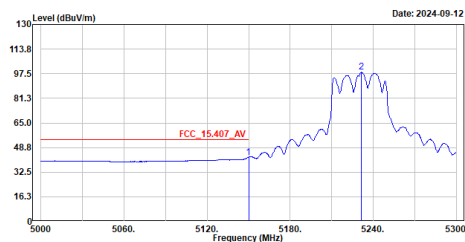

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	42.40	54.00	-11.60	28.00	14.40	Average
2	5231.600	98.47	-----	-----	83.98	14.49	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_5230MHz
TEST BY :Caster

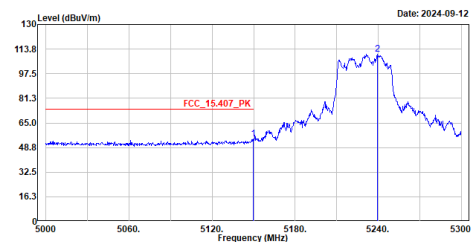

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	54.44	74.00	-19.56	40.04	14.40	Peak
2	5239.400	110.20	-----	-----	95.72	14.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_5230MHz
TEST BY :Caster

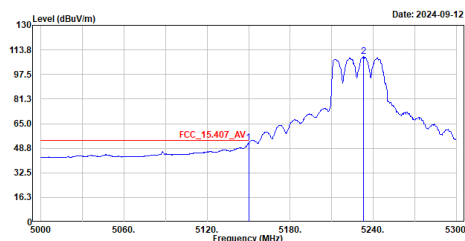

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	52.32	54.00	-1.68	37.92	14.40	Average
2	5233.100	109.32	-----	-----	94.82	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_5230MHz
TEST BY :Caster

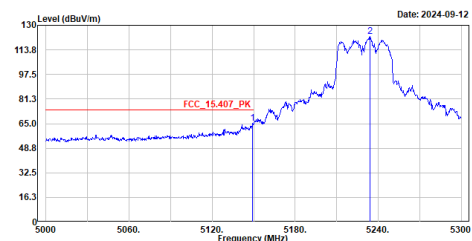

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.400	65.37	74.00	-8.63	50.97	14.40	Peak
2	5234.300	122.57	-----	-----	108.08	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax40_5755MHz
TEST BY :Caster

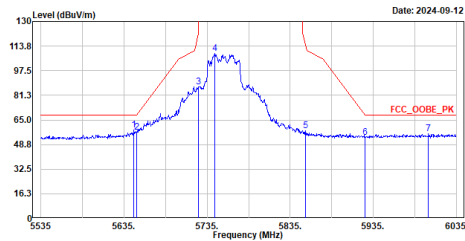

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.000	58.30	68.22	-9.92	42.66	15.64	Peak
2	5650.000	56.75	68.23	-11.48	41.09	15.66	Peak
3	5725.000	86.96	122.20	-35.24	70.84	16.12	Peak
4	5744.500	108.89	-----	-----	92.67	16.22	Peak
5	5853.500	57.70	114.22	-56.52	41.44	16.26	Peak
6	5925.000	53.60	68.23	-14.63	37.22	16.38	Peak
7	6001.500	56.02	68.22	-12.20	39.53	16.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax40_5755MHz
TEST BY :Caster

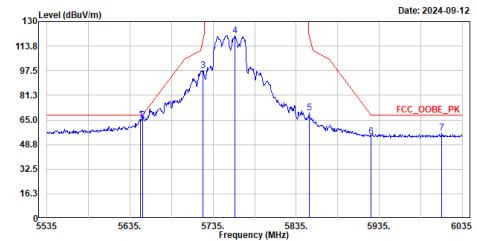

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.500	65.37	68.22	-2.85	49.72	15.65	Peak
2	5650.000	64.70	68.23	-3.53	49.04	15.66	Peak
3	5723.000	97.40	117.64	-20.24	81.29	16.11	Peak
4	5761.000	120.61	-----	-----	104.33	16.28	Peak
5	5850.500	69.53	121.06	-51.53	53.28	16.25	Peak
6	5925.000	54.09	68.23	-14.14	37.71	16.38	Peak
7	6010.500	56.26	68.22	-11.96	39.73	16.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
TEST BY :Peter

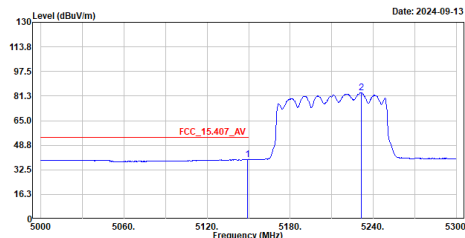

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	39.47	54.00	-14.53	25.07	14.40	Average
2	5231.300	83.25	-----	-----	68.77	14.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
TEST BY :Peter

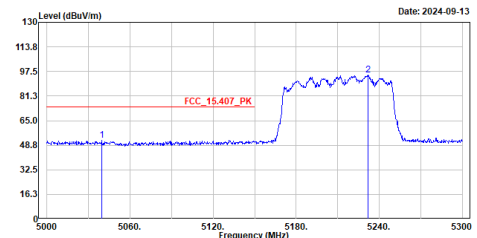

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5039.600	51.94	74.00	-22.06	37.62	14.32	Peak
2	5231.900	95.14	-----	-----	80.65	14.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
TEST BY :Peter

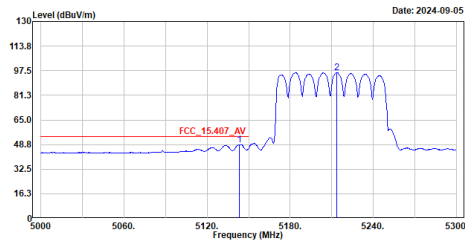


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5143.100	48.75	54.00	-5.25	34.36	14.39	Average
2	5213.600	96.20	-----	-----	81.69	14.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5210MHz
TEST BY :Peter

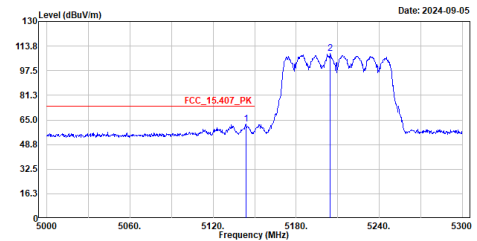


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5143.700	62.33	74.00	-11.67	47.94	14.39	Peak
2	5204.600	109.02	-----	-----	94.51	14.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5775MHz
TEST BY :Caster

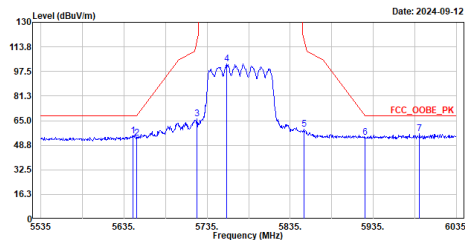


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.500	54.89	68.22	-13.33	39.26	15.63	Peak
2	5650.000	53.48	68.23	-14.75	37.82	15.66	Peak
3	5723.000	66.15	117.64	-51.49	50.04	16.11	Peak
4	5758.500	102.62	-----	-----	86.34	16.28	Peak
5	5851.500	59.48	118.78	-59.30	43.22	16.26	Peak
6	5925.000	54.16	68.23	-14.07	37.78	16.38	Peak
7	5990.500	56.34	68.22	-11.88	39.88	16.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax80_5775MHz
TEST BY :Caster

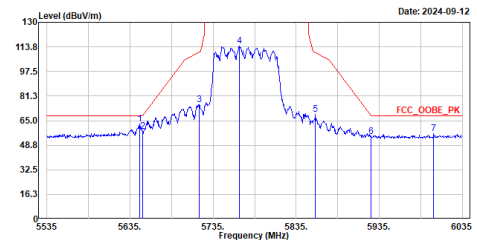

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.000	62.85	68.22	-5.37	47.21	15.64	Peak
2	5650.000	57.70	68.23	-10.53	42.84	15.66	Peak
3	5718.500	75.55	110.38	-34.83	59.46	16.09	Peak
4	5766.500	114.36	-----	-----	98.07	16.29	Peak
5	5858.000	68.94	109.96	-41.02	52.67	16.27	Peak
6	5925.000	54.33	68.23	-13.90	37.95	16.38	Peak
7	6000.500	56.39	68.22	-11.83	39.90	16.49	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.