



Appendix A. Test Result of AC Power Line Conducted Emission

for Adapter: DSA-24PFS-12 FUS 120200

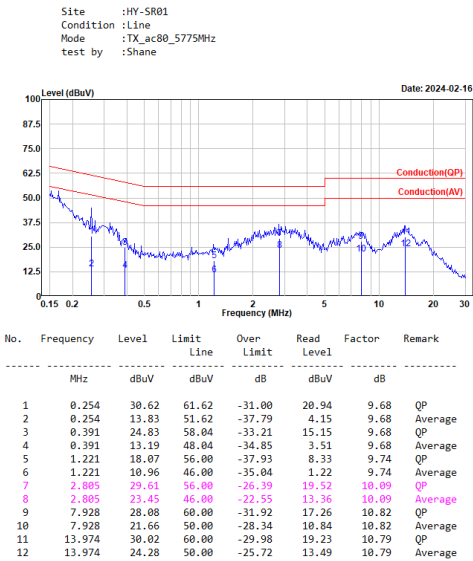


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

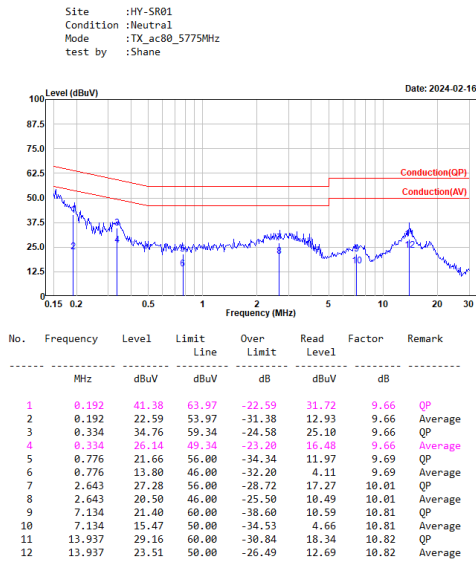


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

for PoE:

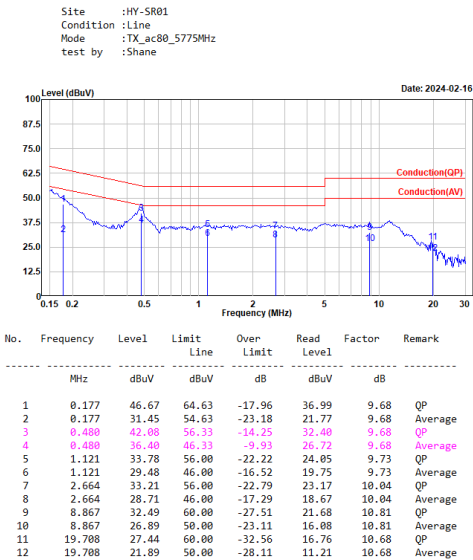

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

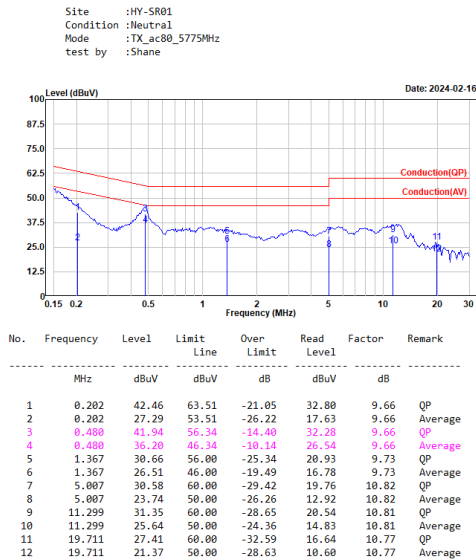

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Appendix B. Test Result of Emission Bandwidth


Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11a	5745	15065	15704	>500
	5785	15065	15704	>500
	5825	13826	15145	>500

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (20 MHz)	5745	15065	15105	>500
	5785	15065	15065	>500
	5825	15025	15145	>500

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (40 MHz)	5755	32607	35005	>500
	5795	32607	35005	>500

Modulation	Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
		Chain A	Chain B	DTS Bandwidth
802.11ac (80 MHz)	5755	72567	73846	>500

For 6dB Bandwidth:

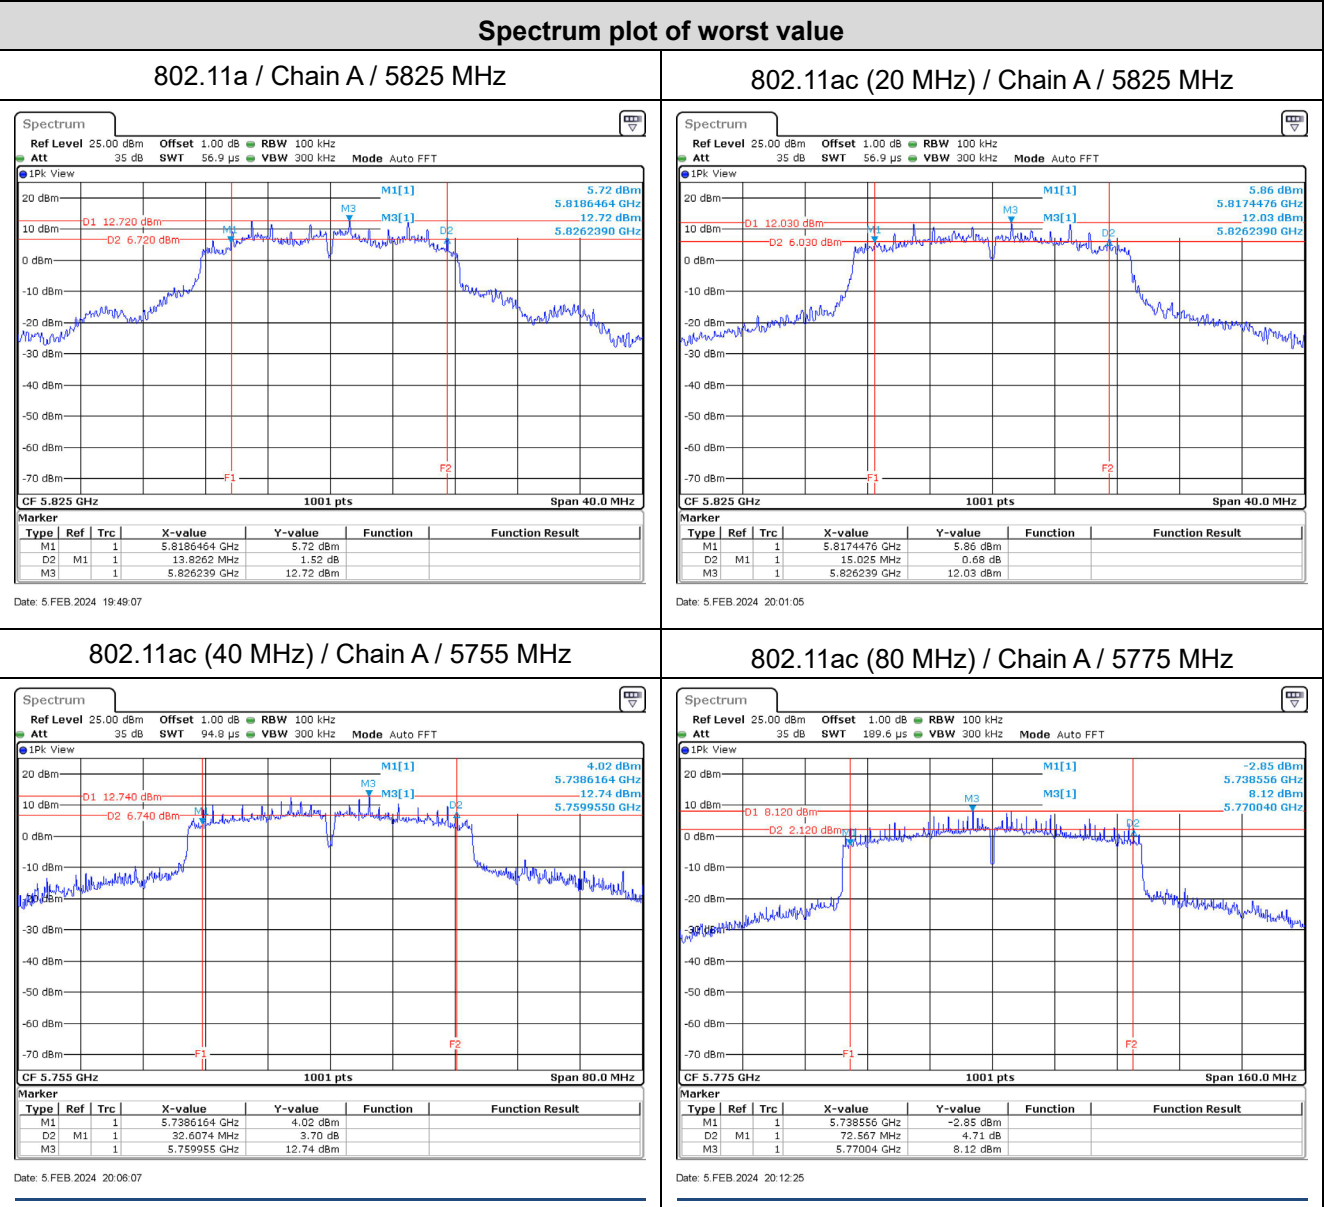

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11a	5180	--	21.72	21.89	--	24.82	30	--
	5220	--	23.46	23.51	--	26.50	30	--
	5240	--	23.81	23.74	--	26.79	30	--
	5745	--	25.71	24.03	--	27.96	30	--
	5785	--	25.14	23.49	--	27.40	30	--
	5825	--	23.86	22.64	--	26.30	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (20 MHz)	5180	--	21.57	21.75	--	24.67	30	--
	5220	--	22.86	22.67	--	25.78	30	--
	5240	--	23.76	23.73	--	26.76	30	--
	5745	--	26.19	24.18	--	28.31	30	--
	5785	--	25.08	23.38	--	27.32	30	--
	5825	--	23.43	22.39	--	25.95	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11n (40 MHz)	5190	--	18.62	18.60	--	21.62	30	--
	5230	--	22.82	22.72	--	25.78	30	--
	5755	--	25.85	23.97	--	28.02	30	--
	5795	--	25.73	23.94	--	27.94	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (20 MHz)	5180	--	21.62	21.82	--	24.73	30	--
	5220	--	22.92	22.75	--	25.85	30	--
	5240	--	23.84	23.77	--	26.82	30	--
	5745	--	26.24	24.25	--	28.37	30	--
	5785	--	25.13	23.44	--	27.38	30	--
	5825	--	23.48	22.46	--	26.01	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (40 MHz)	5190	--	18.71	18.65	--	21.69	30	--
	5230	--	22.86	22.75	--	25.82	30	--
	5755	--	25.92	24.05	--	28.10	30	--
	5795	--	25.81	23.98	--	28.00	30	--

Modulation	Frequency (MHz)	26dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit	
							(dBm)	dBm+10log(BW)
802.11ac (80 MHz)	5210	--	14.53	14.09	--	17.33	30	--
	5775	--	23.88	22.56	--	26.28	30	--

Note:

1. Output Power Value (dBm) = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)})$

Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11a	5180	6	A	10.58	0.17	13.51	16.84
			B	10.07			
	5220	6	A	12.42	0.17	15.35	16.84
			B	11.90			
	5240	6	A	12.73	0.17	15.32	16.84
			B	11.47			
	5745	6	A	11.51	0.17	13.65	29.24
			B	9.10			
	5785	6	A	10.98	0.17	13.27	29.24
			B	8.98			
	5825	6	A	9.84	0.17	12.22	29.24
			B	8.06			

Note:

1. Total PSD/MHz = $10 \cdot \log (\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor.}$

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (20 MHz)	5180	MCS0	A	9.12	0.34	12.46	16.84
			B	9.11			
	5220	MCS0	A	10.55	0.34	13.50	16.84
			B	9.71			
	5240	MCS0	A	12.18	0.34	15.00	16.84
			B	11.04			
	5745	MCS0	A	10.83	0.34	13.47	29.24
			B	9.28			
	5785	MCS0	A	9.48	0.34	12.24	29.24
			B	8.21			
	5825	MCS0	A	8.17	0.34	11.20	29.24
			B	7.51			

Note:

1. Total PSD/MHz = 10*LOG (Chain A(mW) + Chain B(mW))+Duty factor.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (40 MHz)	5190	MCS0	A	3.81	0.63	6.81	16.84
			B	2.41			
	5230	MCS0	A	7.34	0.63	10.77	16.84
			B	6.91			
	5755	MCS0	A	7.21	0.63	10.24	29.24
			B	5.90			
	5795	MCS0	A	7.29	0.63	10.31	29.24
			B	5.95			


Note:


1. Total PSD/MHz = $10 \cdot \text{LOG} (\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

Modulation	Frequency (MHz)	Data Rate (Mbps)	Chain	PPSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)
802.11ac (80 MHz)	5210	MCS0	A	-3.94	1.13	0.02	16.84
			B	-4.30			
	5775	MCS0	A	2.77	1.13	6.28	29.24
			B	1.40			

Note:


1. Total PSD/MHz = $10 \cdot \text{LOG} (\text{Chain A(mW)} + \text{Chain B(mW)}) + \text{Duty factor}$.

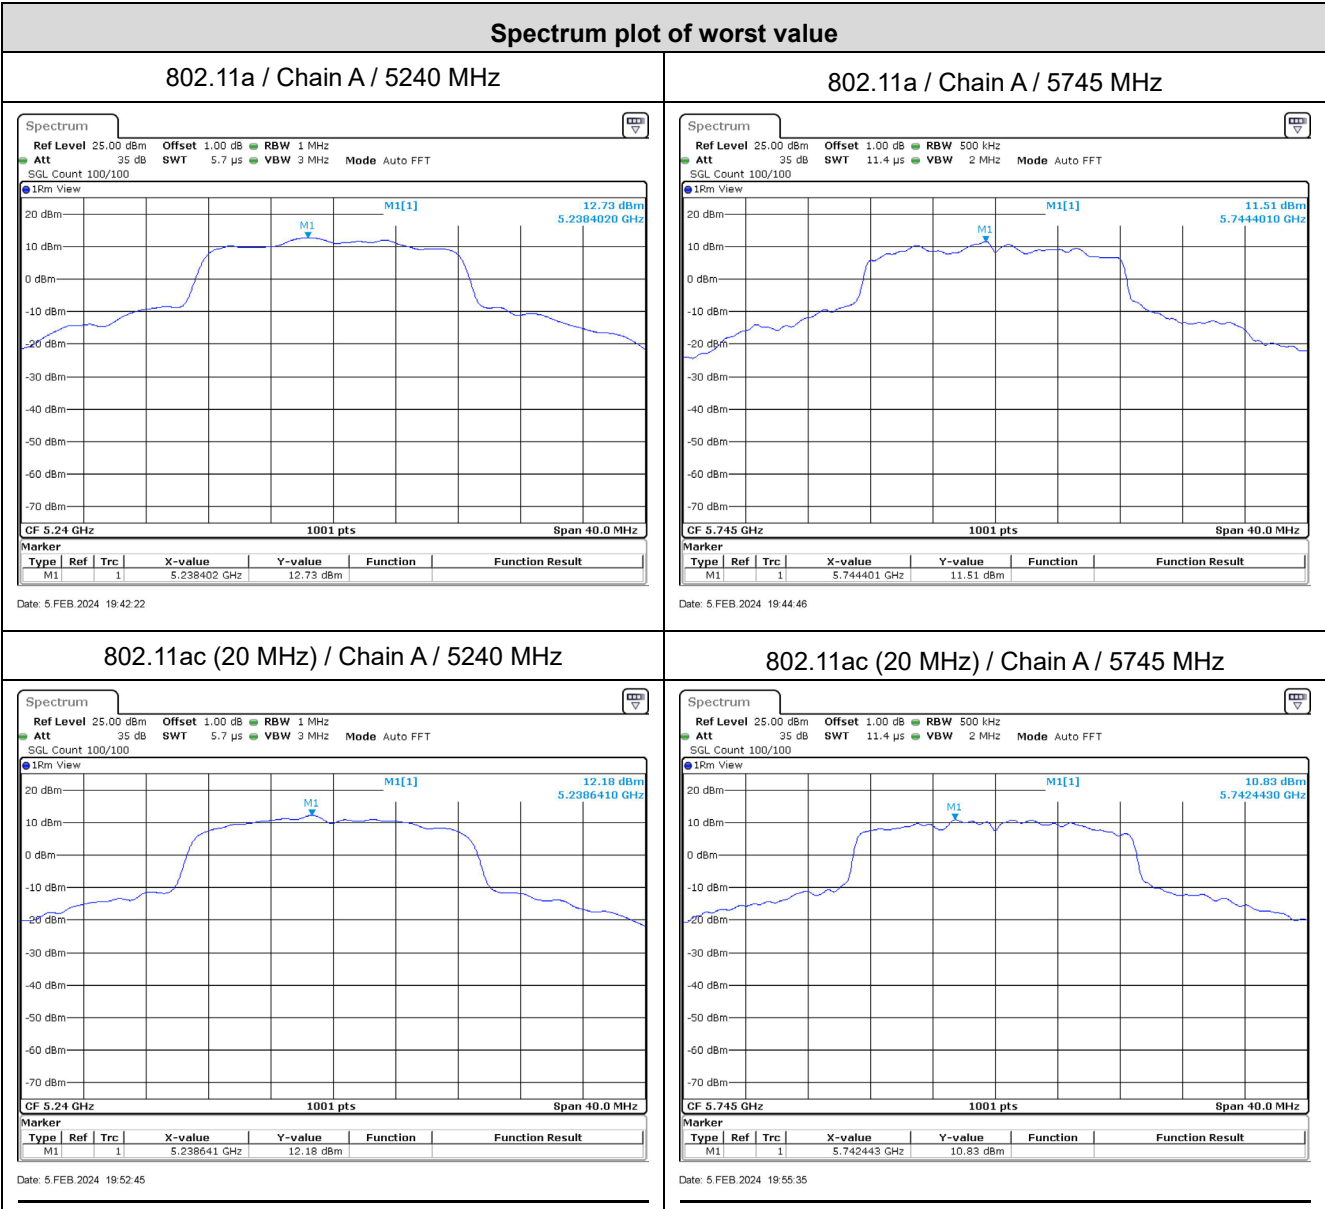

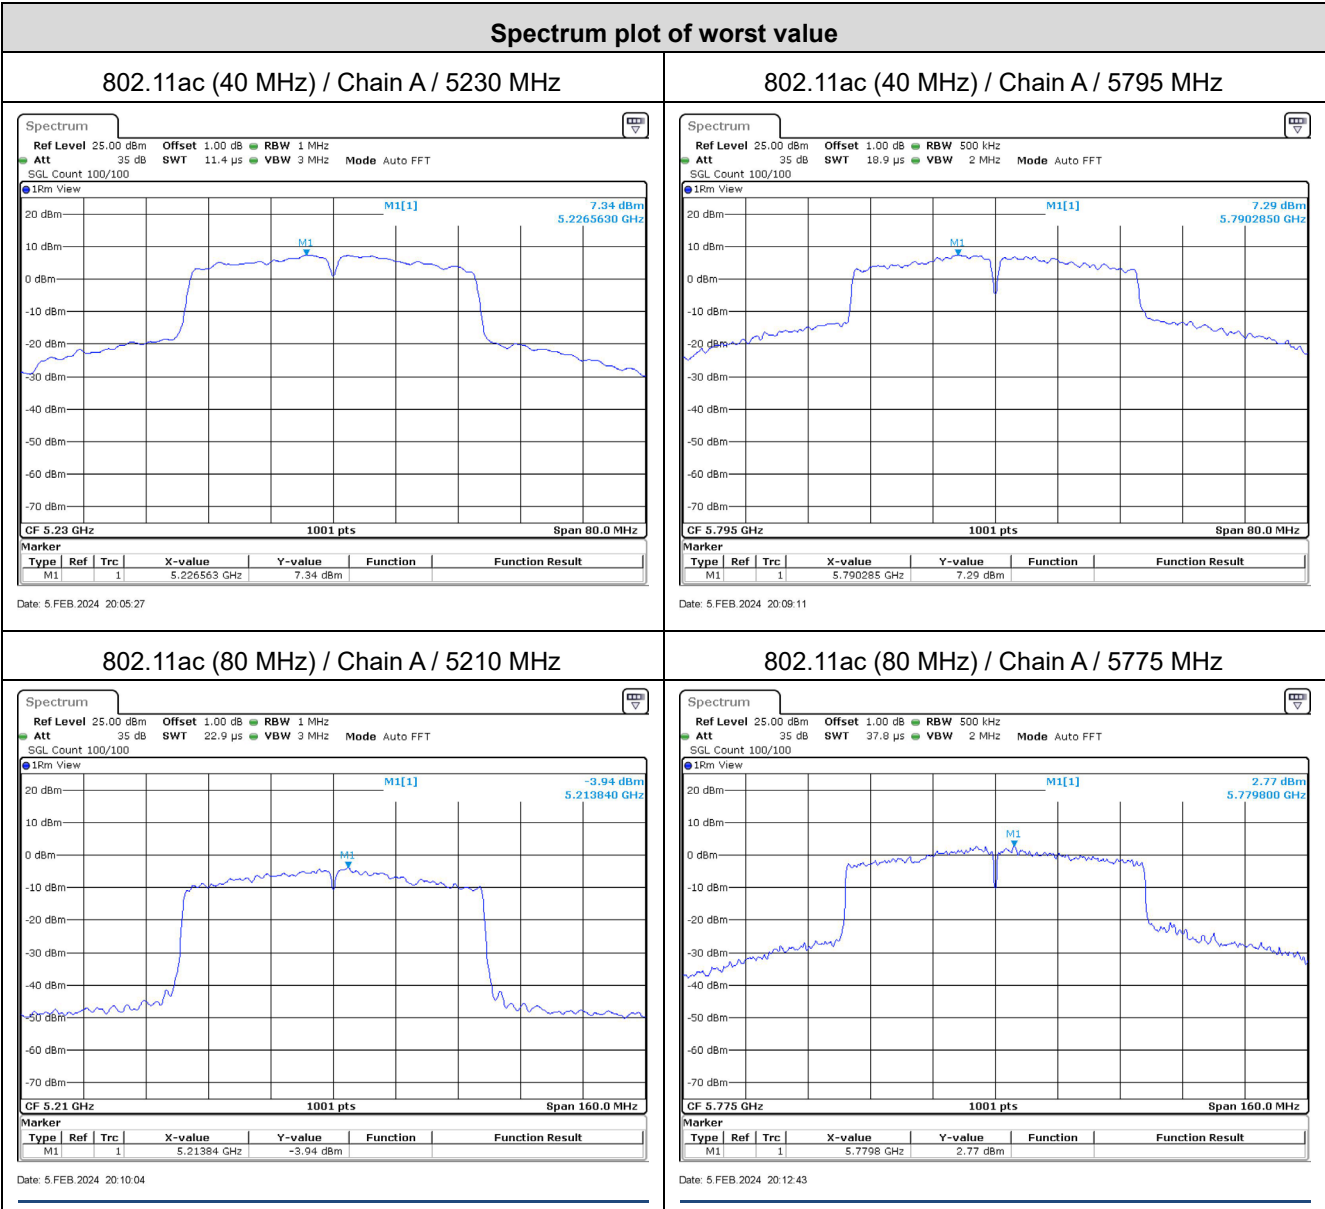

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_a_5180MHz
Test BY :Bob

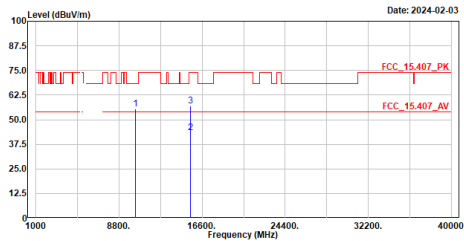


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	55.47	68.22	-12.75	59.55	-4.08	Peak
2	15540.000	43.51	54.00	-10.49	43.47	0.04	Average
3	15540.000	56.96	74.00	-17.04	56.92	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5180MHz
Test BY :Bob

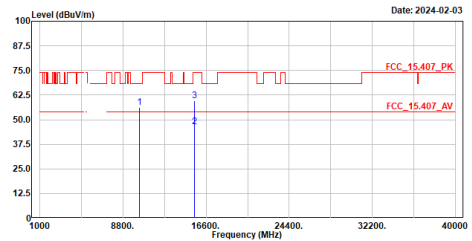


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	56.13	68.22	-12.09	60.21	-4.08	Peak
2	15540.000	46.53	54.00	-7.47	46.49	0.04	Average
3	15540.000	59.47	74.00	-14.53	59.43	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_a_5220MHz
Test BY :Bob

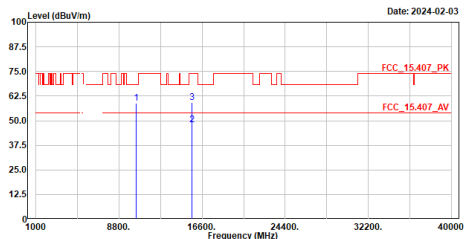


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	58.99	68.22	-9.23	62.92	-3.93	Peak
2	15660.000	47.84	54.00	-6.16	47.77	0.07	Average
3	15660.000	59.21	74.00	-14.79	59.14	0.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5220MHz
Test BY :Bob

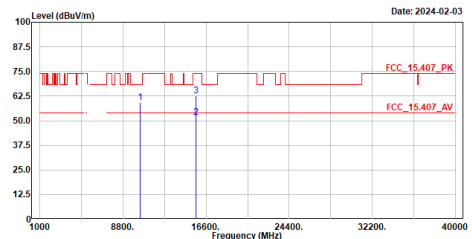


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	59.12	68.22	-9.10	63.05	-3.93	Peak
2	15660.000	51.62	54.00	-2.38	51.55	0.07	Average
3	15660.000	62.73	74.00	-11.27	62.66	0.07	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_a_5240MHz
Test BY :Bob

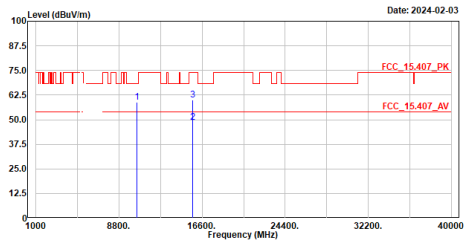


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10480.000	58.77	68.22	-9.45	62.67	-3.90	Peak
2	15720.000	48.66	54.00	-5.34	48.61	0.05	Average
3	15728.000	59.84	74.00	-14.16	59.79	0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5240MHz
Test BY :Bob

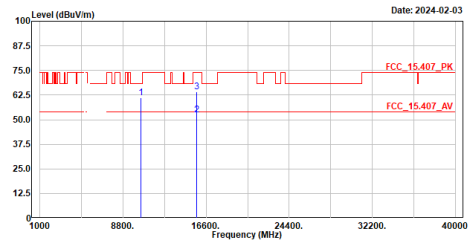


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10480.000	61.19	68.22	-7.03	65.09	-3.90	Peak
2	15720.000	52.38	54.00	-1.62	52.33	0.05	Average
3	15728.000	64.25	74.00	-9.75	64.20	0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_a_5745MHz
Test BY :Ashton

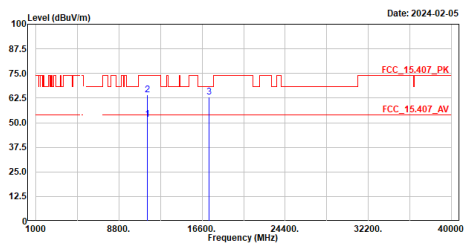


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11490.000	51.62	54.00	-2.38	52.88	-1.26	Average
2	11490.000	64.24	74.00	-9.76	65.50	-1.26	Peak
3	17235.000	63.08	68.22	-5.14	63.54	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5745MHz
Test BY :Ashton

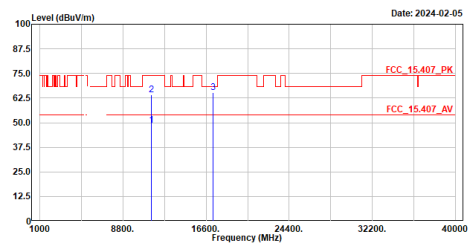


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11490.000	48.66	54.00	-5.34	49.92	-1.26	Average
2	11490.000	64.21	74.00	-9.79	65.47	-1.26	Peak
3	17235.000	65.45	68.22	-2.77	65.91	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_a_5785MHz
Test BY :Ashton

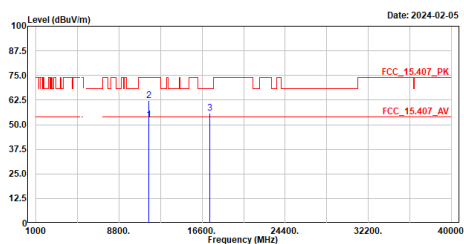


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	52.50	54.00	-1.50	53.64	-1.14	Average
2	11570.000	62.17	74.00	-11.83	63.31	-1.14	Peak
3	17355.000	55.74	68.22	-12.48	55.66	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5785MHz
Test BY :Ashton

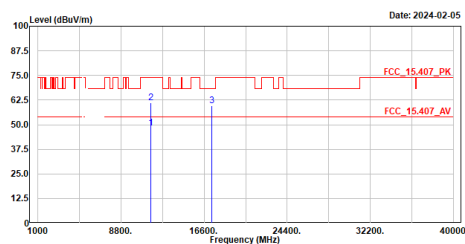


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	48.15	54.00	-5.85	49.29	-1.14	Average
2	11570.000	60.97	74.00	-13.03	62.11	-1.14	Peak
3	17355.000	59.74	68.22	-8.48	59.66	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5825MHz
Test BY :Ashton

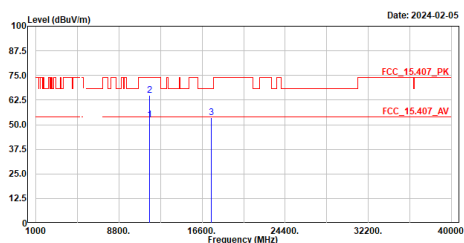


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	52.53	54.00	-1.47	53.69	-1.16	Average
2	11650.000	64.80	74.00	-9.20	65.96	-1.16	Peak
3	17475.000	53.58	68.22	-14.64	53.50	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_a_5825MHz
Test BY :Ashton

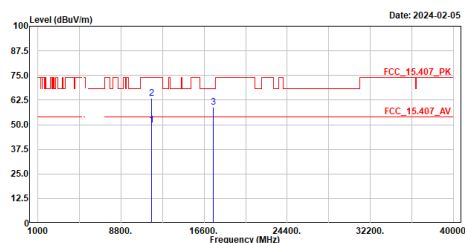


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	49.67	54.00	-4.33	50.83	-1.16	Average
2	11650.000	63.50	74.00	-10.50	64.66	-1.16	Peak
3	17475.000	59.00	68.22	-9.22	58.92	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac20_5180MHz
Test BY :Bob

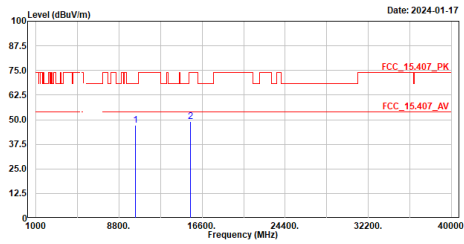

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	47.19	68.22	-21.03	51.27	-4.08	Peak
2	15540.000	49.17	74.00	-24.83	49.13	0.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac20_5180MHz
Test BY :Bob

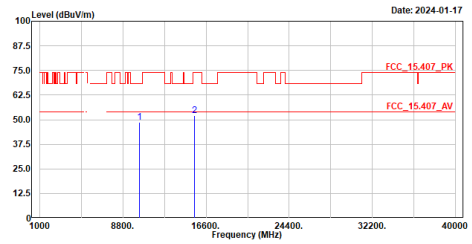

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	48.84	68.22	-19.38	52.92	-4.08	Peak
2	15540.000	52.19	74.00	-21.81	52.15	0.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac20_5220MHz
Test BY :Bob

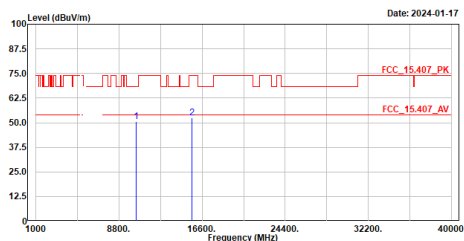

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	50.64	68.22	-17.58	54.57	-3.93	Peak
2	15660.000	52.59	74.00	-21.41	52.52	0.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac20_5220MHz
Test BY :Bob

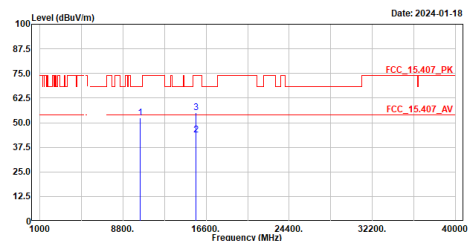

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	52.54	68.22	-15.68	56.47	-3.93	Peak
2	15660.000	43.68	54.00	-10.32	43.61	0.07	Average
3	15660.000	55.27	74.00	-18.73	55.20	0.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac20_5240MHz
Test BY :Ashton

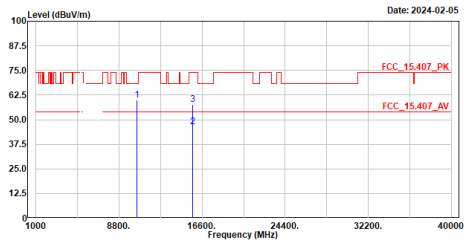


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	60.09	68.22	-8.13	63.99	-3.90	Peak
2	15720.000	46.51	54.00	-7.49	46.46	0.05	Average
3	15728.000	57.83	74.00	-16.17	57.78	0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac20_5240MHz
Test BY :Ashton

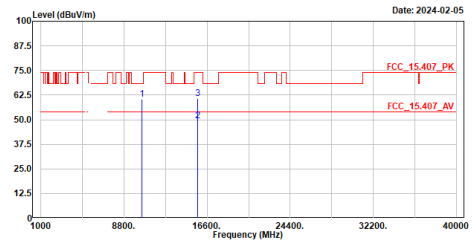


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	60.22	68.22	-8.00	64.12	-3.90	Peak
2	15720.000	49.28	54.00	-4.72	49.23	0.05	Average
3	15728.000	60.79	74.00	-13.21	60.74	0.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac20_5745MHz
Test BY :Ashton

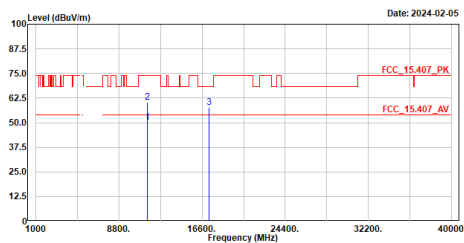


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	50.31	54.00	-3.69	51.57	-1.26	Average
2	11490.000	60.24	74.00	-13.76	61.50	-1.26	Peak
3	17235.000	57.59	68.22	-10.63	58.05	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac20_5745MHz
Test BY :Ashton

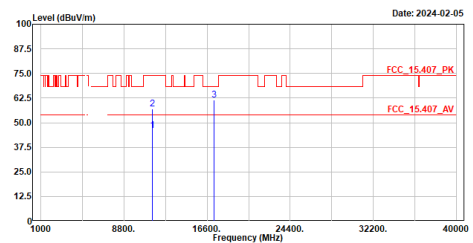


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	46.12	54.00	-7.88	47.38	-1.26	Average
2	11490.000	56.80	74.00	-17.20	58.06	-1.26	Peak
3	17235.000	61.38	68.22	-6.84	61.84	-0.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5785MHz
Test BY :Ashton

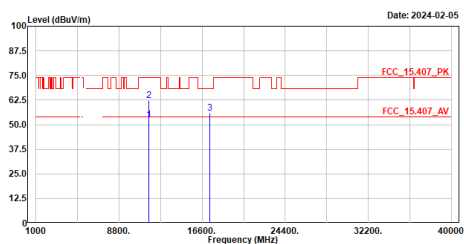


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	52.55	54.00	-1.45	53.69	-1.14	Average
2	11570.000	62.43	74.00	-11.57	63.57	-1.14	Peak
3	17355.000	56.01	68.22	-12.21	55.93	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5785MHz
Test BY :Ashton

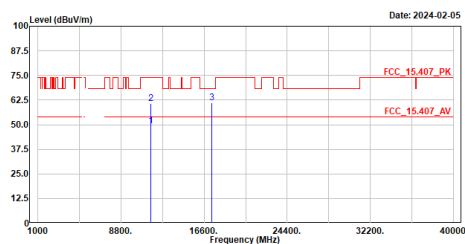


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11570.000	49.55	54.00	-4.45	50.69	-1.14	Average
2	11570.000	60.92	74.00	-13.08	62.06	-1.14	Peak
3	17355.000	61.04	68.22	-7.18	60.96	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5825MHz
Test BY :Ashton

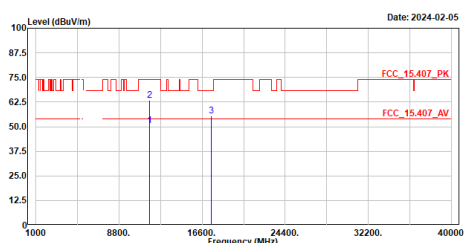


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	50.41	54.00	-3.59	51.57	-1.16	Average
2	11650.000	63.57	74.00	-10.43	64.73	-1.16	Peak
3	17475.000	55.37	68.22	-12.85	55.29	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5825MHz
Test BY :Ashton

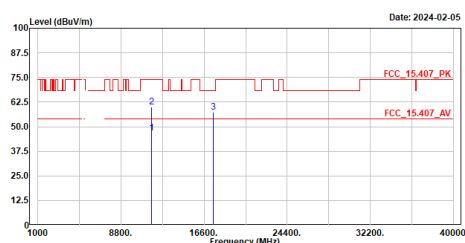


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11650.000	46.66	54.00	-7.34	47.82	-1.16	Average
2	11650.000	59.84	74.00	-14.16	61.00	-1.16	Peak
3	17475.000	57.20	68.22	-11.02	57.12	0.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac40_5190MHz
Test BY :Ashton

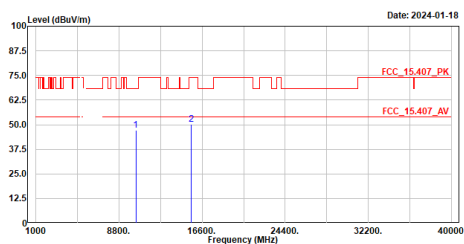


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10380.000	46.99	68.22	-21.23	51.01	-4.02	Peak
2	15570.000	50.36	74.00	-23.64	50.24	0.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac40_5190MHz
Test BY :Ashton

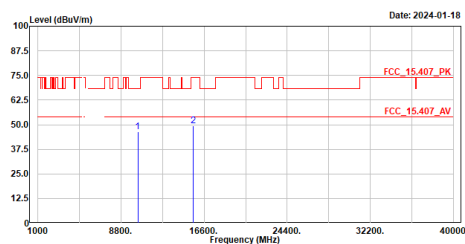


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10380.000	46.56	68.22	-21.66	50.58	-4.02	Peak
2	15570.000	49.43	74.00	-24.57	49.31	0.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac40_5230MHz
Test BY :Ashton

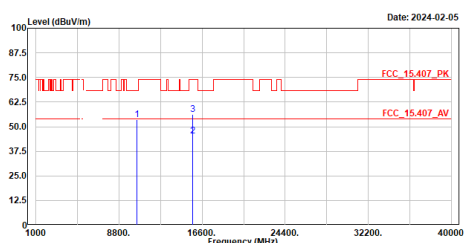


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10460.000	53.42	68.22	-14.80	57.36	-3.94	Peak
2	15690.000	45.31	54.00	-8.69	45.31	0.00	Average
3	15690.000	56.29	74.00	-17.71	56.29	0.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac40_5230MHz
Test BY :Ashton

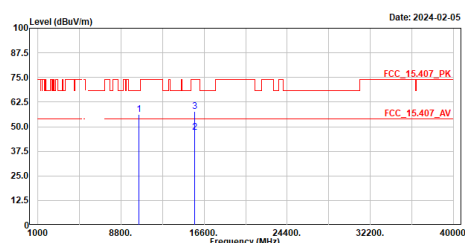


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10460.000	56.34	68.22	-11.88	60.28	-3.94	Peak
2	15690.000	47.21	54.00	-6.79	47.21	0.00	Average
3	15690.000	57.86	74.00	-16.14	57.86	0.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac40_5755MHz
Test BY :Ashton

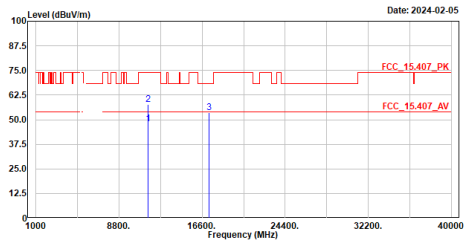


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11510.000	47.83	54.00	-6.17	49.04	-1.21	Average
2	11510.000	57.70	74.00	-16.30	58.91	-1.21	Peak
3	17265.000	53.70	68.22	-14.52	53.93	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac40_5755MHz
Test BY :Ashton

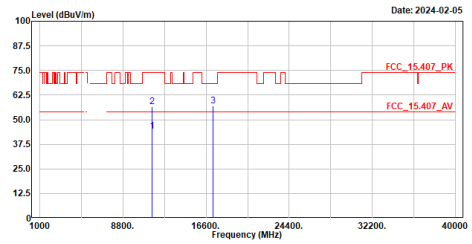


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11510.000	44.34	54.00	-9.66	45.55	-1.21	Average
2	11510.000	56.77	74.00	-17.23	57.98	-1.21	Peak
3	17265.000	57.15	68.22	-11.07	57.38	-0.23	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac40_5795MHz
Test BY :Ashton

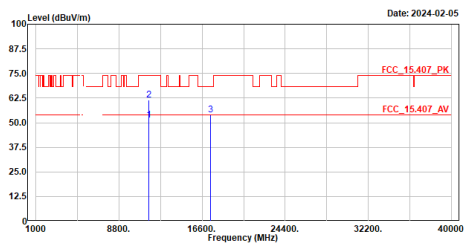


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11590.000	51.17	54.00	-2.83	52.34	-1.17	Average
2	11590.000	61.56	74.00	-12.44	62.73	-1.17	Peak
3	17385.000	54.14	68.22	-14.08	54.04	0.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac40_5795MHz
Test BY :Ashton

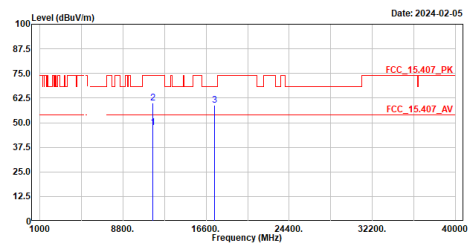


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11590.000	47.66	54.00	-6.34	48.83	-1.17	Average
2	11590.000	60.07	74.00	-13.93	61.24	-1.17	Peak
3	17385.000	58.75	68.22	-9.47	58.65	0.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac80_5210MHz
Test BY :Ashton

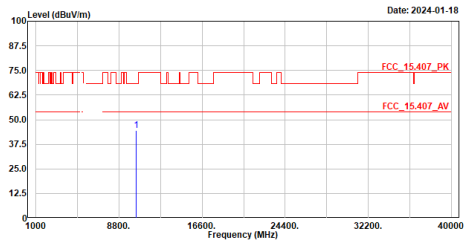


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10420.000	44.58	68.22	-23.64	48.51	-3.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac80_5210MHz
Test BY :Ashton

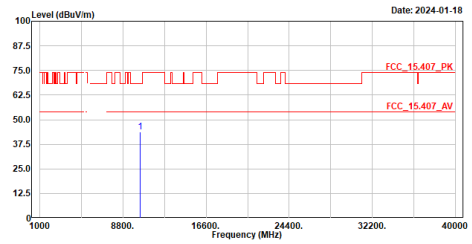


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	10420.000	43.84	68.22	-24.38	47.77	-3.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m HORIZONTAL
Mode :TX_ac80_5775MHz
Test BY :Ashton

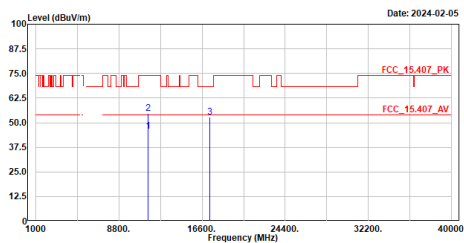


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11550.000	45.83	54.00	-8.17	46.93	-1.10	Average
2	11550.000	54.71	74.00	-19.29	55.81	-1.10	Peak
3	17325.000	52.96	68.22	-15.26	52.85	0.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m VERTICAL
Mode :TX_ac80_5775MHz
Test BY :Ashton

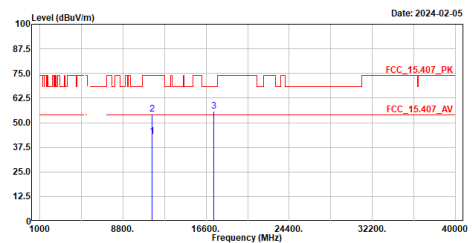


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	11550.000	43.07	54.00	-10.93	44.17	-1.10	Average
2	11550.000	54.37	74.00	-19.63	55.47	-1.10	Peak
3	17325.000	55.85	68.22	-12.37	55.74	0.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

for Adapter: DSA-24PFS-12 FUS 120200

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Bob

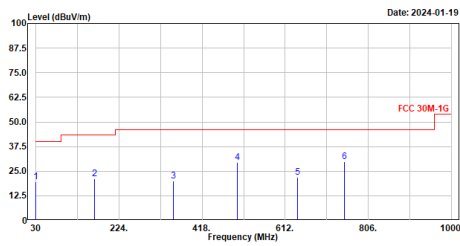


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	30.000	19.58	40.00	-20.42	44.53	-24.95	QP
2	166.770	21.10	43.50	-22.40	45.22	-24.12	QP
3	351.070	20.15	46.00	-25.85	41.90	-21.75	QP
4	500.450	29.45	46.00	-16.55	47.32	-17.87	QP
5	640.130	21.76	46.00	-24.24	36.63	-14.87	QP
6	750.710	29.64	46.00	-16.36	42.63	-12.99	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Bob

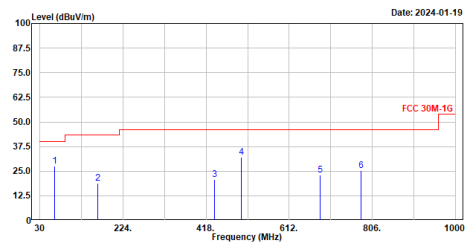


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	64.920	27.45	40.00	-12.55	52.75	-25.30	QP
2	165.800	18.95	43.50	-24.55	43.00	-24.05	QP
3	437.400	20.58	46.00	-25.42	39.64	-19.06	QP
4	500.450	32.02	46.00	-13.98	49.89	-17.87	QP
5	683.780	22.96	46.00	-23.04	37.23	-14.27	QP
6	779.810	25.39	46.00	-20.61	37.92	-12.53	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

for Adapter: DSA-36PFN-12 FUS 120300

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Ashton

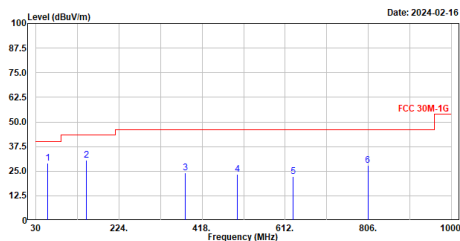


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	58.130	29.05	40.00	-10.95	53.18	-24.13	QP
2	148.340	30.51	43.50	-12.99	54.36	-23.85	QP
3	379.200	24.11	46.00	-21.89	44.73	-20.62	QP
4	500.450	23.40	46.00	-22.60	41.27	-17.87	QP
5	630.430	22.19	46.00	-23.81	37.17	-14.98	QP
6	805.030	28.11	46.00	-17.89	40.50	-12.39	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Ashton

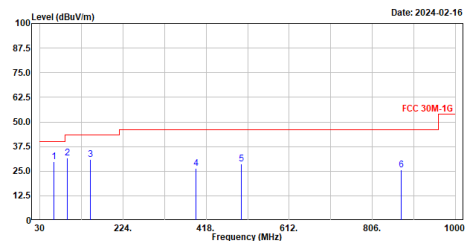


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	62.010	29.67	40.00	-10.33	54.49	-24.82	QP
2	94.020	31.76	43.50	-11.74	60.74	-28.98	QP
3	148.340	30.99	43.50	-12.51	54.84	-23.85	QP
4	394.720	26.44	46.00	-19.56	46.70	-20.26	QP
5	500.450	28.80	46.00	-17.20	46.67	-17.87	QP
6	873.900	25.84	46.00	-20.16	37.76	-11.92	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

for PoE:


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test BY :Ashton

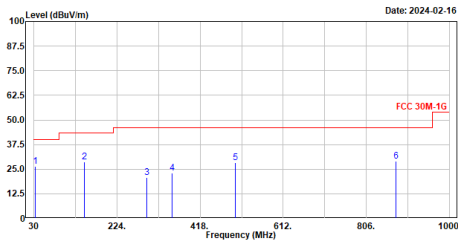

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	32.910	26.39	40.00	-13.61	51.44	-25.05	QP
2	148.340	28.76	43.50	-14.74	52.61	-23.85	QP
3	292.870	20.79	46.00	-25.21	43.89	-23.10	QP
4	352.040	23.05	46.00	-22.95	44.78	-21.73	QP
5	500.450	28.17	46.00	-17.83	46.04	-17.87	QP
6	875.640	28.99	46.00	-17.01	40.90	-11.91	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test BY :Ashton

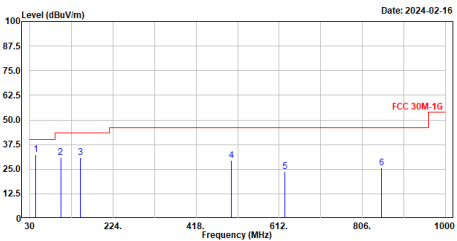

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	43.580	32.63	40.00	-7.37	56.26	-23.63	QP
2	101.780	30.92	43.50	-12.58	58.77	-27.85	QP
3	148.340	30.76	43.50	-12.74	54.61	-23.85	QP
4	500.450	29.53	46.00	-16.47	47.40	-17.87	QP
5	625.580	23.84	46.00	-22.16	38.93	-15.09	QP
6	850.620	25.62	46.00	-20.38	37.40	-11.78	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5180MHz
Test BY :Ashton

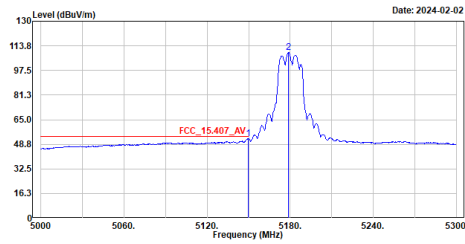


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.700	52.30	54.00	-1.70	36.57	15.73	Average
2	5178.800	109.53	-----	-----	93.68	15.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5180MHz
Test BY :Ashton

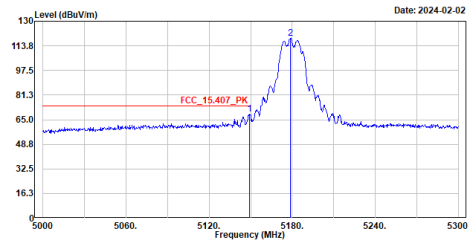


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5149.100	68.79	74.00	-5.21	53.06	15.73	Peak
2	5178.800	118.88	-----	-----	103.03	15.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5180MHz
Test BY :Ashton

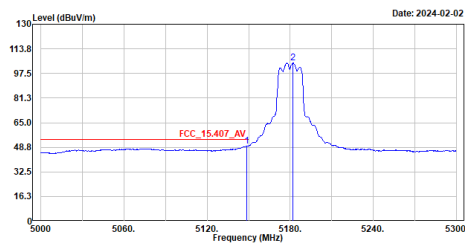


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5148.800	49.78	54.00	-4.22	34.05	15.73	Average
2	5182.100	104.37	-----	-----	88.50	15.87	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5180MHz
Test BY :Ashton

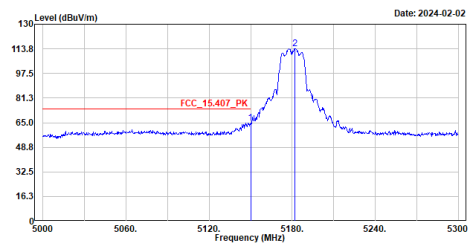


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	65.00	74.00	-9.00	49.27	15.73	Peak
2	5181.800	113.96	-----	-----	98.09	15.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5220MHz_B1
Test BY :Ashton

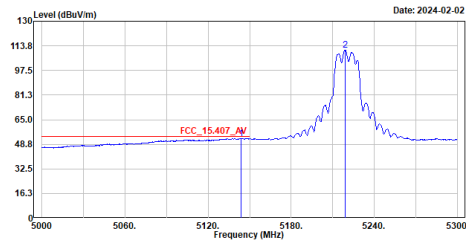


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5143.700	52.65	54.00	-1.35	36.92	15.73	Average
2	5219.000	110.88	-----	-----	94.92	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5220MHz_B1
Test BY :Ashton

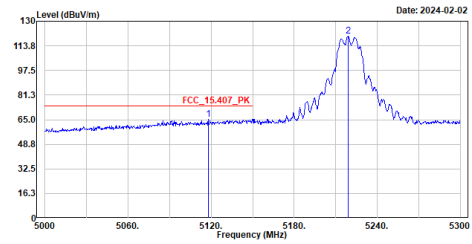


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5117.900	65.20	74.00	-8.80	49.47	15.73	Peak
2	5219.000	120.12	-----	-----	104.16	15.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5220MHz_B1
Test BY :Ashton

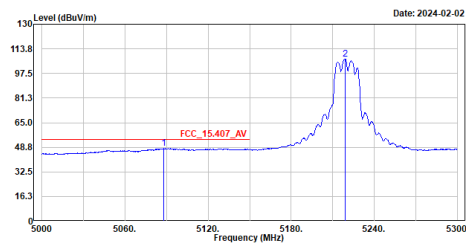


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5087.900	47.91	54.00	-6.09	32.17	15.74	Average
2	5219.000	107.10	-----	-----	91.14	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5220MHz_B1
Test BY :Ashton

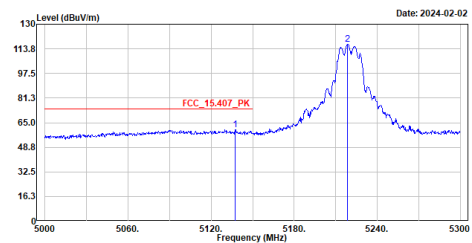


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5137.400	60.36	74.00	-13.64	44.62	15.74	Peak
2	5218.400	116.64	-----	-----	100.68	15.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5220MHz_B2
Test BY :Ashton

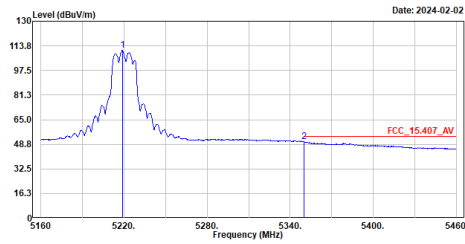


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5218.000	110.84	-----	-----	94.88	15.96	Average
2	5350.200	50.33	54.00	-3.67	34.37	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5220MHz_B2
Test BY :Ashton

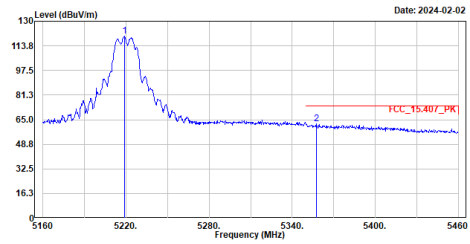


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5218.000	120.00	-----	-----	104.04	15.96	Peak
2	5357.700	62.37	74.00	-11.63	46.37	16.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5220MHz_B2
Test BY :Ashton

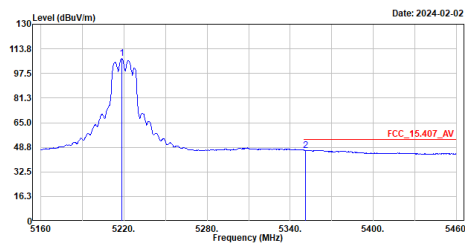


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5218.200	107.22	-----	-----	91.26	15.96	Average
2	5351.100	46.84	54.00	-7.16	30.88	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5220MHz_B2
Test BY :Ashton

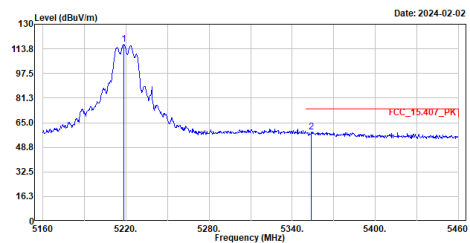


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5218.500	116.62	-----	-----	100.66	15.96	Peak
2	5353.800	59.09	74.00	-14.91	43.12	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX @ 5240MHz
Test BY :Ashton

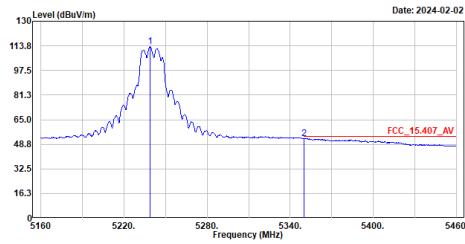


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5238.900	113.12	-----	-----	97.15	15.97	Average
2	5358.000	52.36	54.00	-1.64	36.40	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX @ 5240MHz
Test BY :Ashton

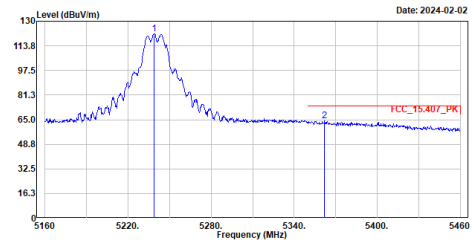


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5238.900	121.78	-----	-----	105.81	15.97	Peak
2	5361.900	64.03	74.00	-9.97	48.02	16.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX @ 5240MHz
Test BY :Ashton

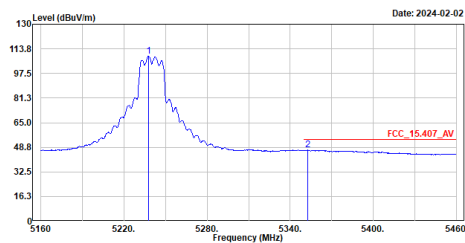


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5238.000	108.90	-----	-----	92.93	15.97	Average
2	5352.600	46.95	54.00	-7.05	30.98	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX @ 5240MHz
Test BY :Ashton

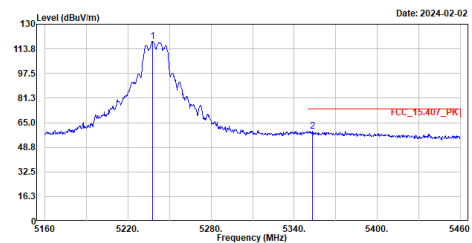


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5237.700	118.82	-----	-----	102.85	15.97	Peak
2	5353.200	59.41	74.00	-14.59	43.44	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5745MHz
Test BY :Ashton

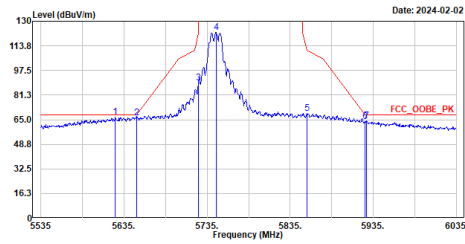


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5624.500	66.57	68.20	-1.63	49.48	17.09	Peak
2	5650.000	66.25	68.21	-1.96	49.16	17.09	Peak
3	5725.000	89.49	122.20	-32.71	71.83	17.66	Peak
4	5746.000	122.70	-----	-----	104.89	17.81	Peak
5	5855.500	69.23	110.66	-41.43	51.20	18.03	Peak
6	5925.000	63.65	68.21	-4.56	45.63	18.02	Peak
7	5926.500	64.06	68.20	-4.14	46.04	18.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5745MHz
Test BY :Ashton

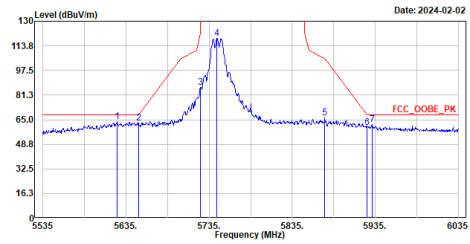


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5624.000	63.53	68.20	-4.67	46.44	17.09	Peak
2	5650.000	62.80	68.21	-5.41	45.71	17.09	Peak
3	5725.000	86.56	122.20	-35.64	68.90	17.66	Peak
4	5744.500	118.81	-----	-----	101.01	17.00	Peak
5	5874.500	65.99	105.34	-39.35	47.93	18.06	Peak
6	5925.000	59.71	68.21	-8.50	41.69	18.02	Peak
7	5931.000	61.68	68.20	-6.52	43.67	18.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5785MHz
Test BY :Ashton

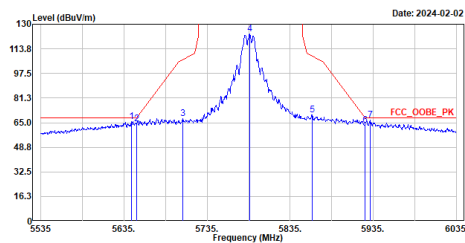


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5644.000	65.94	68.20	-2.26	48.84	17.10	Peak
2	5650.000	64.27	68.21	-3.94	47.18	17.09	Peak
3	5706.000	67.91	106.88	-38.97	50.39	17.52	Peak
4	5706.000	123.59	-----	-----	105.65	17.94	Peak
5	5861.500	70.17	108.98	-38.81	52.13	18.04	Peak
6	5925.000	63.38	68.21	-4.83	45.36	18.02	Peak
7	5931.500	66.93	68.20	-1.27	48.93	18.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5785MHz
Test BY :Ashton

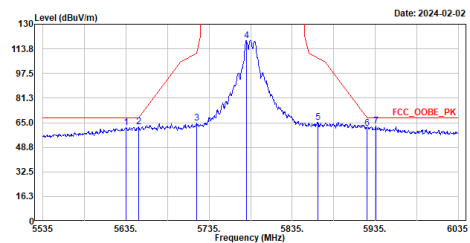


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5635.500	61.95	68.20	-6.25	44.86	17.09	Peak
2	5650.000	62.44	68.21	-5.77	45.35	17.09	Peak
3	5728.500	64.89	111.94	-47.05	47.27	17.62	Peak
4	5700.000	119.14	-----	-----	101.22	17.92	Peak
5	5866.000	65.44	107.72	-42.28	47.39	18.05	Peak
6	5925.000	61.43	68.21	-6.78	43.41	18.02	Peak
7	5935.500	62.56	68.20	-5.64	44.56	18.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_a_5825MHz
Test BY :Ashton

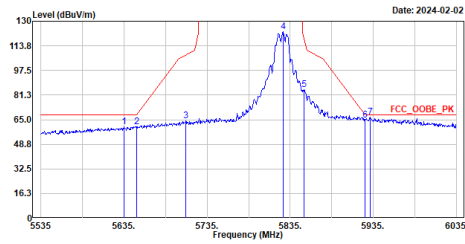

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5635.500	60.46	68.20	-7.74	43.37	17.09	Peak
2	5650.000	60.18	68.21	-8.03	43.09	17.09	Peak
3	5709.500	64.18	107.86	-43.68	46.64	17.54	Peak
4	5826.500	122.89	-----	-----	104.89	18.00	Peak
5	5852.000	84.76	117.64	-32.88	66.73	18.03	Peak
6	5925.000	64.75	68.21	-3.46	46.73	18.02	Peak
7	5931.000	66.73	68.20	-1.47	48.72	18.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_a_5825MHz
Test BY :Ashton

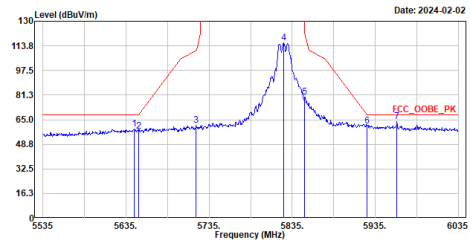

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5645.000	58.69	68.20	-9.51	41.60	17.09	Peak
2	5650.000	57.33	68.21	-10.88	40.24	17.09	Peak
3	5719.500	61.20	110.66	-49.46	43.58	17.62	Peak
4	5826.500	115.69	-----	-----	97.69	18.00	Peak
5	5850.000	80.16	122.20	-42.04	62.13	18.03	Peak
6	5925.000	61.03	68.21	-7.18	43.01	18.02	Peak
7	5961.000	63.85	68.20	-4.35	45.87	17.98	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5180MHz
Test BY :Bob

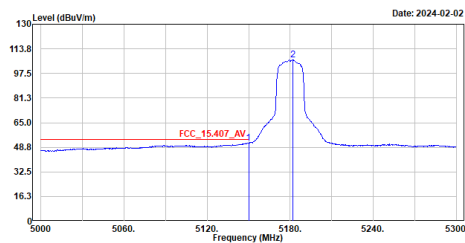

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	51.45	54.00	-2.55	35.72	15.73	Average
2	5182.100	106.51	-----	-----	90.64	15.87	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5180MHz
Test BY :Bob

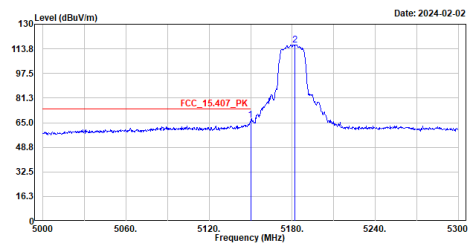

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	66.88	74.00	-7.12	51.15	15.73	Peak
2	5182.100	116.43	-----	-----	100.56	15.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5180MHz
Test BY :Bob

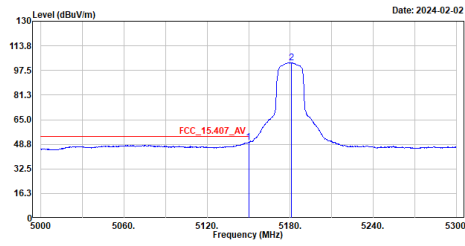


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	50.10	54.00	-3.90	34.37	15.73	Average
2	5180.900	102.72	-----	-----	86.86	15.86	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5180MHz
Test BY :Bob

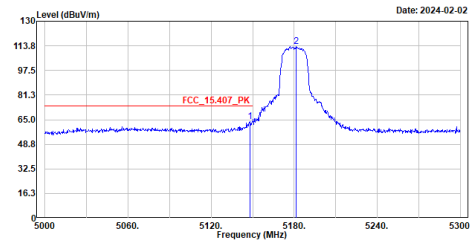


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.900	63.93	74.00	-10.07	48.20	15.73	Peak
2	5181.500	113.42	-----	-----	97.55	15.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5220MHz_B1
Test BY :Bob

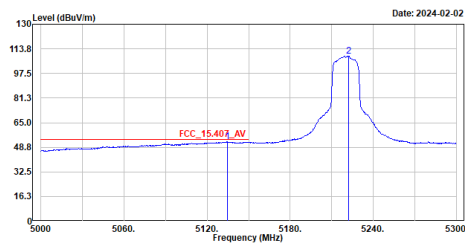


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5134.700	52.30	54.00	-1.70	36.57	15.73	Average
2	5222.300	108.97	-----	-----	93.00	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5220MHz_B1
Test BY :Bob

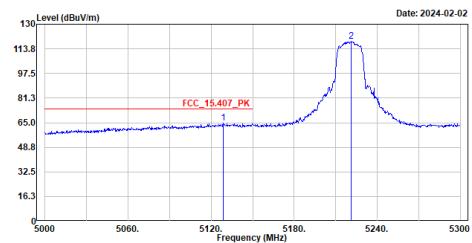


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5129.000	64.61	74.00	-9.39	48.87	15.74	Peak
2	5221.100	118.62	-----	-----	102.65	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5220MHz_B1
Test BY :Bob

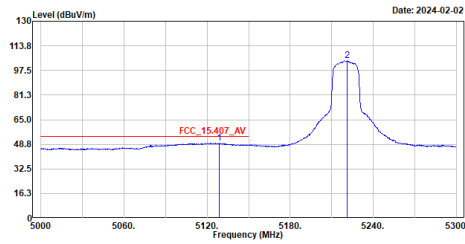


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5129.000	49.43	54.00	-4.57	33.69	15.74	Average
2	5221.108	103.90	-----	-----	87.93	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5220MHz_B1
Test BY :Bob

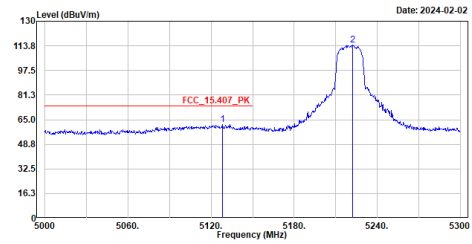


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5128.100	61.87	74.00	-12.13	46.13	15.74	Peak
2	5222.000	114.09	-----	-----	98.12	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5220MHz_B2
Test BY :Bob

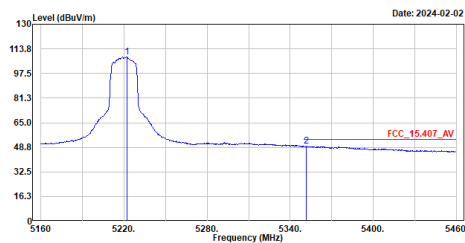


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5222.100	108.57	-----	-----	92.60	15.97	Average
2	5351.700	49.40	54.00	-4.60	33.44	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5220MHz_B2
Test BY :Bob

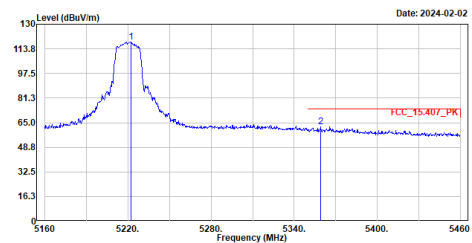


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5222.100	118.19	-----	-----	102.22	15.97	Peak
2	5359.200	62.36	74.00	-11.64	46.36	16.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5220MHz_B2
Test BY :Bob

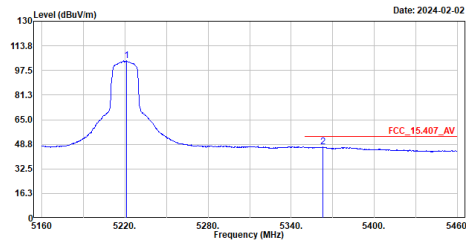


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5220.900	103.82	-----	-----	87.85	15.97	Average
2	5362.800	46.93	54.00	-7.07	38.92	16.01	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5220MHz_B2
Test BY :Bob

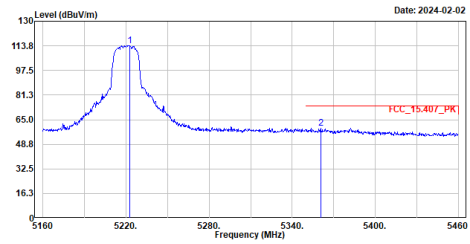


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5222.700	113.99	-----	-----	98.03	15.96	Peak
2	5360.700	59.59	74.00	-14.41	43.58	16.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5240MHz
Test BY :Bob

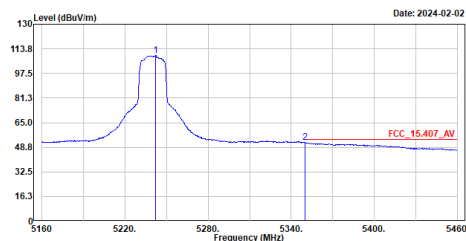


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5242.200	109.19	-----	-----	93.20	15.99	Average
2	5350.200	52.07	54.00	-1.93	36.11	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5240MHz
Test BY :Bob

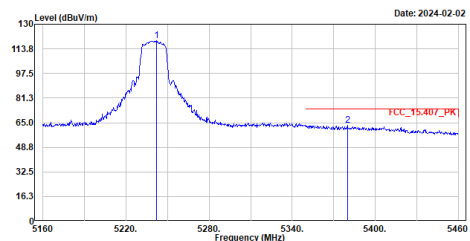


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5241.900	119.06	-----	-----	103.07	15.99	Peak
2	5379.900	63.08	74.00	-10.92	46.98	16.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5240MHz
Test BY :Bob

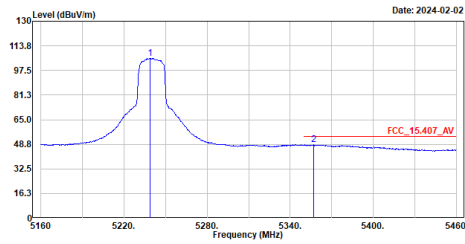


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5238.900	105.58	-----	-----	89.61	15.97	Average
2	5357.100	48.38	54.00	-5.62	32.39	15.99	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5240MHz
Test BY :Bob

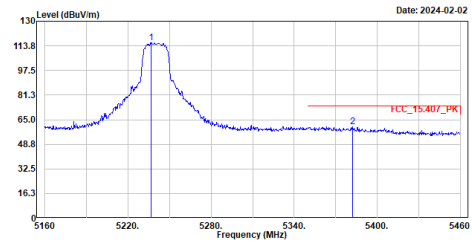


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5238.800	116.00	-----	-----	100.02	15.98	Peak
2	5382.000	60.46	74.00	-13.54	44.34	16.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5745MHz
Test BY :Bob

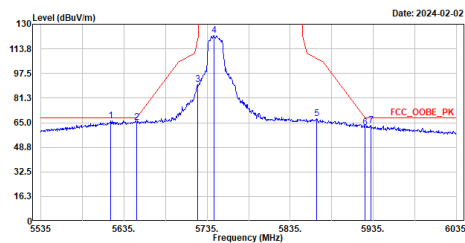


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5619.000	66.38	68.20	-1.82	49.29	17.09	Peak
2	5650.000	65.08	68.21	-3.13	47.99	17.09	Peak
3	5724.000	90.50	119.92	-29.42	72.85	17.65	Peak
4	5743.000	122.42	-----	-----	104.64	17.78	Peak
5	5866.500	67.86	107.58	-39.72	49.81	18.05	Peak
6	5925.000	61.89	68.21	-6.32	43.87	18.02	Peak
7	5932.000	63.37	68.20	-4.83	45.37	18.00	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5745MHz
Test BY :Bob

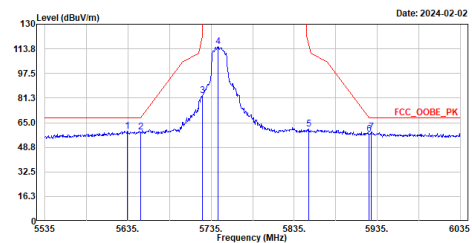


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5634.500	59.18	68.20	-9.02	42.09	17.09	Peak
2	5650.000	58.96	68.21	-9.25	41.87	17.09	Peak
3	5724.500	82.93	121.06	-38.13	65.27	17.66	Peak
4	5743.000	115.36	-----	-----	97.58	17.78	Peak
5	5853.000	60.59	115.36	-54.77	42.56	18.03	Peak
6	5925.000	57.51	68.21	-10.70	39.49	18.02	Peak
7	5928.000	58.87	68.20	-9.33	40.85	18.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5785MHz
Test BY :Bob

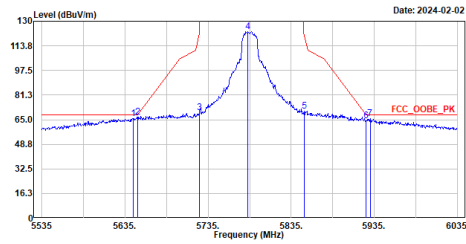

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.000	65.82	68.20	-2.38	48.73	17.09	Peak
2	5658.000	66.73	68.21	-1.48	49.64	17.09	Peak
3	5725.000	69.50	122.20	-52.70	51.84	17.66	Peak
4	5783.000	123.25	-----	-----	185.32	17.93	Peak
5	5851.000	70.64	119.92	-49.28	52.61	18.03	Peak
6	5925.000	64.42	68.21	-3.79	46.40	18.02	Peak
7	5930.000	65.79	68.20	-2.41	47.78	18.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5785MHz
Test BY :Bob

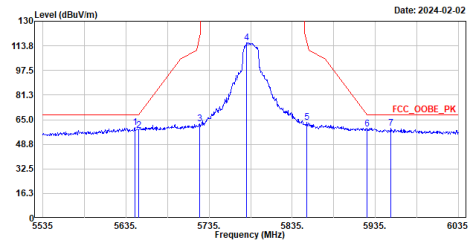

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5645.500	59.77	68.20	-8.43	42.68	17.09	Peak
2	5658.000	58.08	68.21	-10.13	40.99	17.09	Peak
3	5723.500	62.41	118.78	-56.37	44.76	17.65	Peak
4	5780.500	115.89	-----	-----	97.97	17.92	Peak
5	5853.000	63.09	115.36	-52.27	45.06	18.03	Peak
6	5925.000	58.89	68.21	-9.32	40.87	18.02	Peak
7	5954.000	59.38	68.20	-8.82	41.41	17.97	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac20_5825MHz
Test BY :Bob

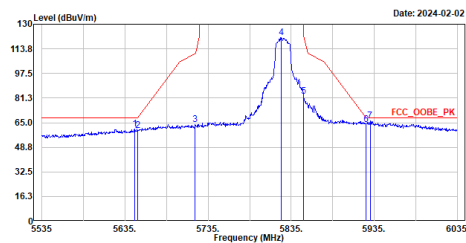

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.500	60.73	68.20	-7.47	43.64	17.09	Peak
2	5658.000	59.81	68.21	-8.40	42.72	17.09	Peak
3	5719.500	63.67	110.66	-46.99	46.05	17.62	Peak
4	5823.000	121.37	-----	-----	183.37	18.00	Peak
5	5858.000	82.47	122.20	-39.73	64.44	18.03	Peak
6	5925.000	63.56	68.21	-4.65	45.54	18.02	Peak
7	5930.000	66.13	68.20	-2.07	48.12	18.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac20_5825MHz
Test BY :Bob

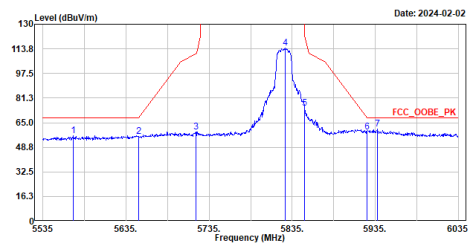

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5571.500	56.43	68.20	-11.77	39.49	16.94	Peak
2	5658.000	55.80	68.21	-12.41	38.71	17.09	Peak
3	5719.500	58.72	110.66	-51.94	41.10	17.62	Peak
4	5826.500	114.06	-----	-----	96.06	18.00	Peak
5	5858.000	74.47	122.20	-47.73	56.44	18.03	Peak
6	5925.000	59.08	68.21	-9.13	41.06	18.02	Peak
7	5938.000	60.92	68.20	-7.28	42.93	17.99	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5190MHz
Test BY :Bob

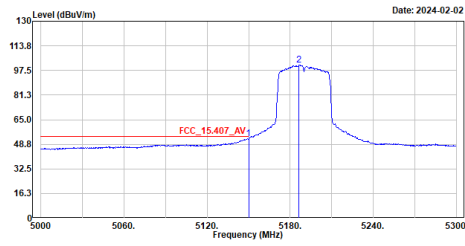


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	52.40	54.00	-1.60	36.67	15.73	Average
2	5186.300	101.22	-----	-----	85.34	15.88	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5190MHz
Test BY :Bob

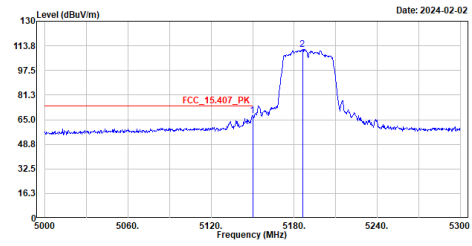


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	67.84	74.00	-6.16	52.11	15.73	Peak
2	5186.000	111.45	-----	-----	95.57	15.88	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5190MHz
Test BY :Bob

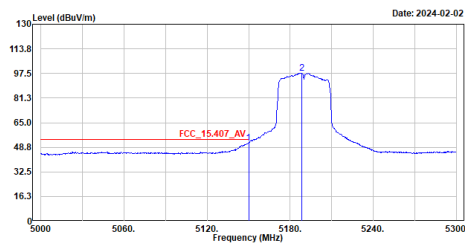


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	51.57	54.00	-2.43	35.84	15.73	Average
2	5188.400	97.66	-----	-----	81.76	15.90	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5190MHz
Test BY :Bob

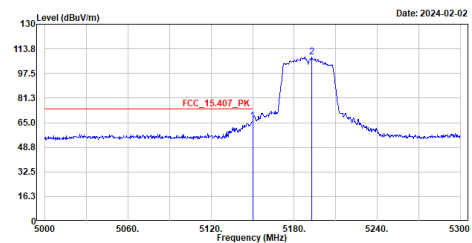


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5150.000	66.24	74.00	-7.76	50.51	15.73	Peak
2	5192.900	108.32	-----	-----	92.40	15.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5230MHz_B1
Test BY :Bob

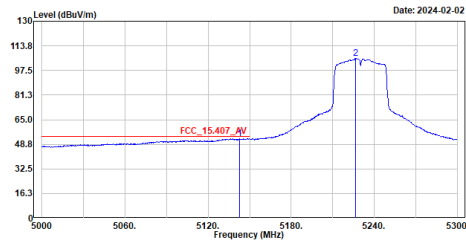


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5142.000	52.54	54.00	-1.46	36.81	15.73	Average
2	5226.508	105.48	-----	-----	89.51	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5230MHz_B1
Test BY :Bob

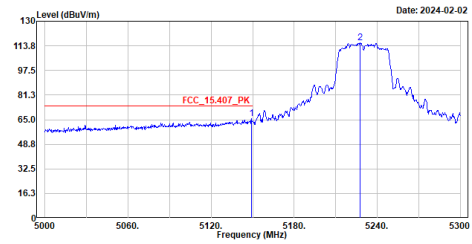


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.100	65.71	74.00	-8.29	49.98	15.73	Peak
2	5227.700	115.54	-----	-----	99.57	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5230MHz_B1
Test BY :Bob

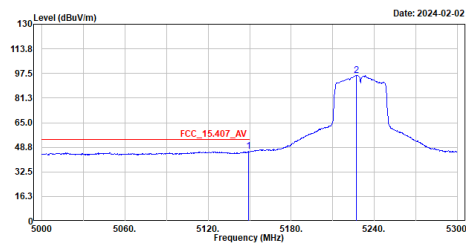


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.100	46.31	54.00	-7.69	30.58	15.73	Average
2	5227.100	96.23	-----	-----	80.26	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5230MHz_B1
Test BY :Bob

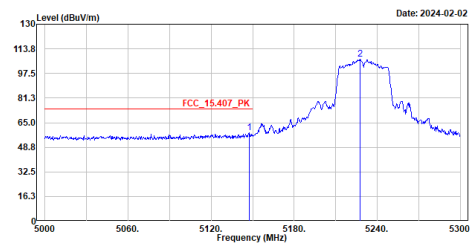


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.600	58.29	74.00	-15.71	42.56	15.73	Peak
2	5227.700	106.76	-----	-----	90.79	15.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5230MHz_B2
Test BY :Bob

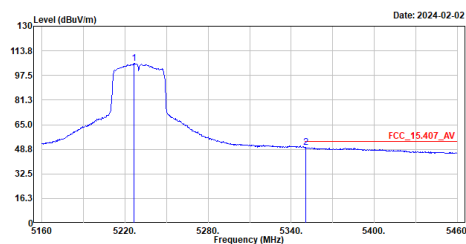


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5226.600	105.54	-----	-----	89.57	15.97	Average
2	5358.500	50.02	54.00	-3.98	34.06	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5230MHz_B2
Test BY :Bob

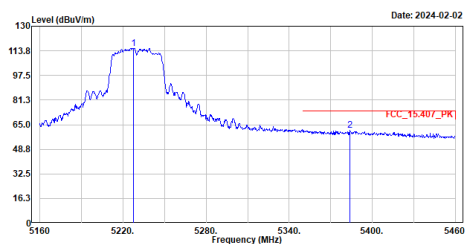


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5227.500	115.45	-----	-----	99.47	15.98	Peak
2	5384.100	61.32	74.00	-12.68	45.20	16.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5230MHz_B2
Test BY :Bob

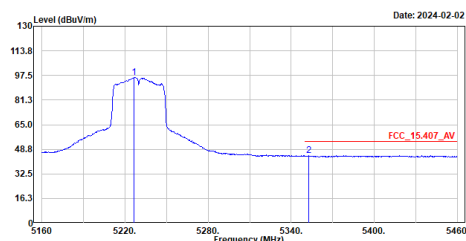


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5226.600	96.24	-----	-----	80.27	15.97	Average
2	5352.900	44.76	54.00	-9.24	28.79	15.97	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5230MHz_B2
Test BY :Bob

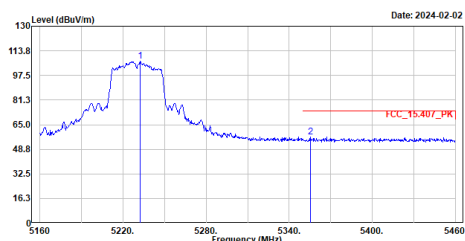


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5232.600	106.79	-----	-----	90.82	15.97	Peak
2	5355.600	57.07	74.00	-16.93	41.08	15.99	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5755MHz
Test BY :Bob

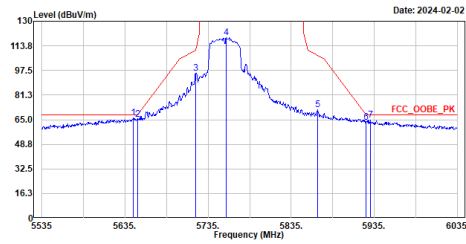


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5645.000	66.05	68.20	-2.15	48.96	17.09	Peak
2	5650.000	65.10	68.21	-3.11	48.01	17.09	Peak
3	5720.500	95.87	111.94	-16.07	78.25	17.62	Peak
4	5756.500	119.08	-----	-----	101.22	17.86	Peak
5	5806.500	71.50	107.58	-36.08	53.45	18.05	Peak
6	5925.000	63.13	68.21	-5.08	45.11	18.02	Peak
7	5930.500	64.76	68.20	-3.44	46.75	18.01	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5755MHz
Test BY :Bob

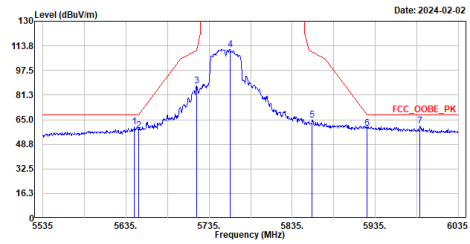


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5645.000	60.15	68.20	-8.05	43.06	17.09	Peak
2	5650.000	58.13	68.21	-10.08	41.04	17.09	Peak
3	5720.000	87.48	110.80	-23.32	69.86	17.62	Peak
4	5760.000	111.56	-----	-----	93.69	17.87	Peak
5	5859.000	64.99	109.68	-44.69	46.96	18.03	Peak
6	5925.000	59.44	68.21	-8.77	41.42	18.02	Peak
7	5989.000	60.77	68.20	-7.43	42.74	18.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac40_5795MHz
Test BY :Bob

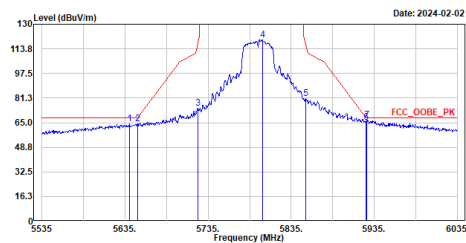


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5640.500	64.23	68.20	-3.97	47.14	17.09	Peak
2	5650.000	64.51	68.21	-3.70	47.42	17.09	Peak
3	5723.000	74.50	117.64	-43.14	56.85	17.65	Peak
4	5800.500	119.58	-----	-----	101.60	17.98	Peak
5	5853.000	81.03	115.36	-34.33	63.00	18.03	Peak
6	5925.000	65.38	68.21	-2.83	47.36	18.02	Peak
7	5926.000	66.60	68.20	-1.60	48.57	18.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac40_5795MHz
Test BY :Bob

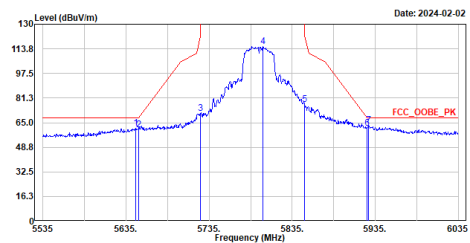


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5646.500	61.37	68.20	-6.83	44.28	17.09	Peak
2	5650.000	60.45	68.21	-7.76	43.36	17.09	Peak
3	5725.000	71.35	122.20	-50.85	53.69	17.66	Peak
4	5799.500	115.32	-----	-----	97.34	17.98	Peak
5	5850.000	77.00	122.20	-45.20	58.97	18.03	Peak
6	5925.000	61.46	68.21	-6.75	43.44	18.02	Peak
7	5927.000	63.06	68.20	-5.14	45.04	18.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac80_5210MHz
Test BY :Bob

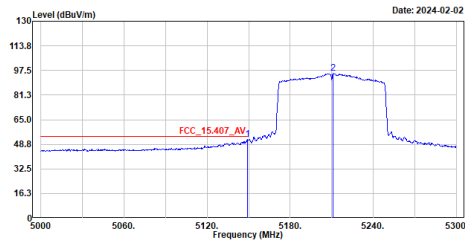


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.400	51.83	54.00	-2.17	36.10	15.73	Average
2	5211.200	95.59	-----	-----	79.63	15.96	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac80_5210MHz
Test BY :Bob

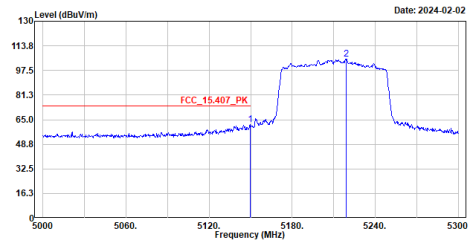


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.700	61.79	74.00	-12.21	46.06	15.73	Peak
2	5219.000	105.10	-----	-----	89.14	15.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac80_5210MHz
Test BY :Bob

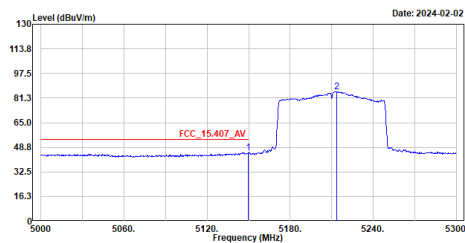


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5149.700	45.19	54.00	-8.81	29.46	15.73	Average
2	5213.600	85.55	-----	-----	69.60	15.95	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac80_5210MHz
Test BY :Bob

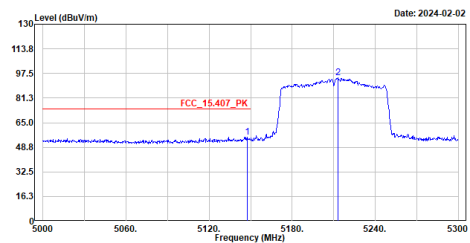


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	5147.600	55.64	74.00	-18.36	39.91	15.73	Peak
2	5213.300	94.60	-----	-----	78.65	15.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Horizontal
Mode :TX_ac80_5775MHz
Test BY :Bob

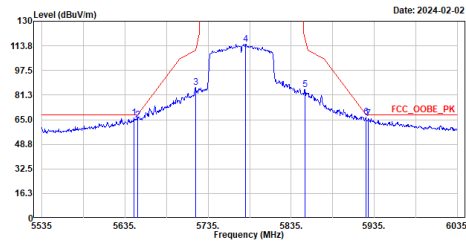


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5646.000	66.14	68.20	-2.06	49.05	17.09	Peak
2	5650.000	64.69	68.21	-3.52	47.60	17.09	Peak
3	5728.000	86.12	110.80	-24.68	68.50	17.62	Peak
4	5780.500	115.04	-----	-----	97.12	17.92	Peak
5	5851.500	85.10	118.78	-33.68	67.07	18.03	Peak
6	5925.000	66.58	68.21	-1.63	48.56	18.02	Peak
7	5928.000	65.73	68.20	-2.47	47.71	18.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m Vertical
Mode :TX_ac80_5775MHz
Test BY :Bob

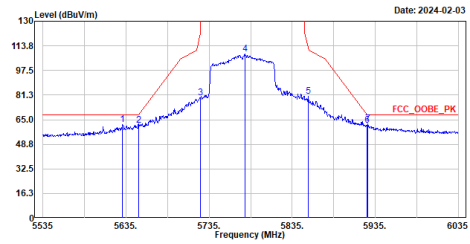


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5631.000	61.91	68.20	-6.29	44.83	17.08	Peak
2	5650.000	61.53	68.21	-6.68	44.44	17.09	Peak
3	5724.500	79.37	121.06	-41.69	61.71	17.66	Peak
4	5778.000	108.34	-----	-----	90.42	17.92	Peak
5	5854.000	80.27	113.08	-32.81	62.24	18.03	Peak
6	5925.000	61.28	68.21	-6.93	43.26	18.02	Peak
7	5926.000	62.25	68.20	-5.95	44.22	18.03	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Appendix F. Test Result of Radiated Emissions Co-location 30 MHz ~ 1 GHz:


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz+ac20_5745MHz
Test BY :Ashton

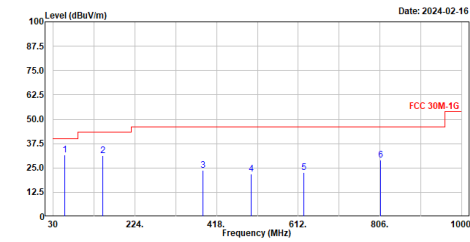

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	58.130	31.74	40.00	-8.26	55.87	-24.13	QP
2	148.340	31.21	43.50	-12.29	55.06	-23.85	QP
3	385.990	23.66	46.00	-22.34	44.11	-20.45	QP
4	590.450	22.02	46.00	-23.98	39.89	-17.87	QP
5	625.580	22.68	46.00	-23.32	37.77	-15.09	QP
6	806.970	29.01	46.00	-16.99	41.39	-12.38	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz+ac20_5745MHz
Test BY :Ashton

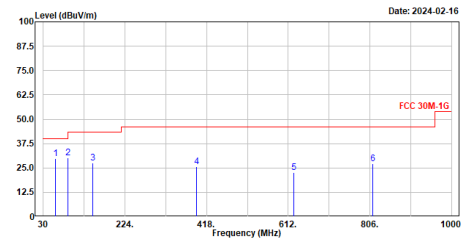


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	59.100	29.99	40.00	-10.01	54.21	-24.22	QP
2	88.200	30.13	43.50	-13.37	59.85	-29.72	QP
3	148.340	27.46	43.50	-16.04	51.31	-23.85	QP
4	393.750	25.72	46.00	-20.28	45.99	-20.27	QP
5	625.580	22.76	46.00	-23.24	37.85	-15.09	QP
6	812.790	27.10	46.00	-18.90	39.45	-12.35	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Above 1 GHz:


Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2412MHz+ac20_5745MHz
Test BY :Ashton

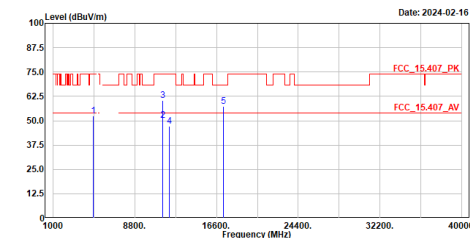

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4824.000	52.44	74.00	-21.56	66.41	-13.97	Peak
2	11490.000	50.10	54.00	-3.90	51.36	-1.26	Average
3	11490.000	60.28	74.00	-13.80	61.46	-1.26	Peak
4	12060.000	47.00	74.00	-27.00	47.44	-0.44	Peak
5	17235.000	57.48	68.22	-10.74	57.94	-0.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2412MHz+ac20_5745MHz
Test BY :Ashton

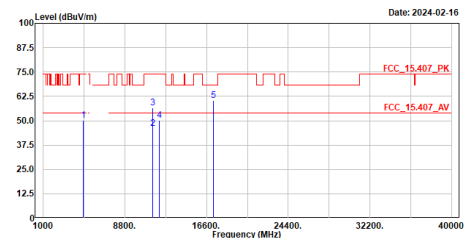

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB/m	Remark
1	4824.000	50.07	74.00	-23.93	64.04	-13.97	Peak
2	11490.000	46.07	54.00	-7.93	47.33	-1.26	Average
3	11490.000	56.70	74.00	-17.30	57.96	-1.26	Peak
4	12060.000	50.10	74.00	-23.90	50.54	-0.44	Peak
5	17235.000	60.26	68.22	-7.96	60.72	-0.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.