


FCC Radio Test Report

FCC ID : UDX-600214010
Equipment : Cisco Wireless 9172I Series Wi-Fi 7 Access Point
Brand Name : CISCO
Model Name : CW9172I
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Aug. 29, 2024, and testing was started from Oct. 31, 2024 and completed on Dec. 05, 2024. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.

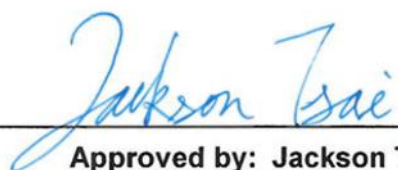

Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	10
1.3 Testing Location Information	10
1.4 Measurement Uncertainty	10
2 TEST CONFIGURATION OF EUT.....	11
2.1 Test Channel Mode	11
2.2 The Worst Case Measurement Configuration.....	12
2.3 Accessories	13
2.4 Support Equipment.....	13
2.5 Test Setup Diagram	13
3 TRANSMITTER TEST RESULT	14
3.1 Maximum Conducted Output Power	14
3.2 Peak Power Spectral Density.....	16
3.3 Unwanted Emissions.....	18
4 TEST EQUIPMENT AND CALIBRATION DATA.....	21
APPENDIX A. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX B. TEST RESULTS OF PEAK POWER SPECTRAL DENSITY	
APPENDIX C. TEST RESULTS OF UNWANTED EMISSIONS	
APPENDIX D. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	

[illegible]



Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.407(a)	Maximum Conducted Output Power	PASS	-
3.2	15.407(a)	Peak Power Spectral Density	PASS	-
3.3	15.407(b)	Unwanted Emissions	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Ryan Hsiao

Report Producer: Debby Hung

1 General Description

1.1 Information

Radio 3 (Scan radio) is only RX function.

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5180-5240	36-48 [4]
5150-5250	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5190-5230	38-46 [2]
5150-5250	ac (VHT80), ax (HEW80) , be (EHT80)	5210	42 [1]

Non-Beamforming_Radio 2_1TX

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT80	80	1TX

Non-Beamforming_Radio 2_2TX

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT80	80	2TX

Non-Beamforming_Radio 2_4TX

Band	Mode	BWch	Nant
5.15-5.25GHz	802.11be EHT80	80	4TX

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40, HEW80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ Evaluated EHT20/EHT40/EHT80 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/VHT80 /HEW20/HEW40/HEW80 mode are the same or lower than EHT20/EHT40/EHT80.

**1.1.2 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector	Support	Radio
1	Sercomm	6172004VJHDB1H	PIFA	I-Pex	2.4G	Radio1
					5G	Radio 2
2	Sercomm	6172004VJHDB2V	PIFA	I-Pex	2.4G	Radio1
					5G	Radio 2
3	Sercomm	6172004VJH561H	PIFA	I-Pex	5G/6G	Radio 2
4	Sercomm	6172004VJH562V	PIFA	I-Pex		
5	Sercomm	6172004VJHSC1V	PIFA	I-Pex	2.4G/5G/6G	Scan Radio 3 (RX)
6	Sercomm	6172004VJHSC2V	PIFA	I-Pex		
7	Sercomm	6172004VJHBLEV	PIFA	I-Pex	BT	Radio 4

Ant.	Port	Gain (dBi)									
		2.4G	5G				6G				BT
			UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-5	UNII-6	UNII-7	UNII-8	
1	1	3.78	3.45	2.71	4.22	3.86	-	-	-	-	-
2	2	4.06	3.44	3.37	4.88	4.62	-	-	-	-	-
3	3	-	5.26	5.46	5.47	4.92	6.23	5.81	5.59	5.80	-
4	4	-	4.03	5.09	4.08	4.73	4.68	3.89	3.74	4.66	-
5	1	2.4	2.87	2.96	3.08	2.71	3.61	3.17	4.38	3.32	-
6	2	2.3	3.24	3.56	3.46	3.18	3.96	4.12	3.98	4.08	-
7	1	-	-	-	-	-	-	-	-	-	2.23

Composite Gain (dBi)									
Wi-Fi Mode	2.4G	5G							
	Radio 1_2TX	Radio 2_2TX				Radio 2_4TX			
		UNII-1	UNII-2A	UNII-2C	UNII-3	UNII-1	UNII-2A	UNII-2C	UNII-3
DG [1SS]	4.65	4.96	5.14	5.8	6.03	6.76	6.31	6.67	6.69
DG [2SS]	4.06	3.45	3.37	4.88	4.62	5.26	5.46	5.47	4.92
DG [4SS]	-	-	-	-	-	5.26	5.46	5.47	4.92

Composite Gain (dBi)				
6G Radio 2_2TX				
Wi-Fi Mode	UNII-5	UNII-6	UNII-7	UNII-8
DG [1SS]	6.84	7.04	6.2	6.56
DG [2SS]	6.23	5.81	5.59	5.8

Note 1: The EUT has seven antennas.

Note 2: The composite gain is derived as KDB 662911 D03 v01 which was used as directional gain. For more detail information, please refer to the Antenna Pattern Report AP470202-01.

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (1TX/1RX) (Radio 1)

Ant. 1 (port 1) could transmit/receive.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) (Radio 1)

Ant. 1 (port 1) and Ant. 2 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax/be mode (2RX) (Radio 3)

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (1TX/1RX) (Radio 2)

Ant. 1 (port 1) could transmit/receive.

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX) (Radio 2)

Ant. 1 (port 1) and Ant. 2 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (4TX/4RX) (Radio 2)

Ant. 1 (port 1), Ant. 2 (port 2), Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax/be mode (2RX) (Radio 3)

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX) (Radio 4)

Ant. 7 (port 1) could transmit/receive.

For 6GHz function:

For IEEE 802.11 ax/be mode (1TX/1RX) (Radio 2)

Ant. 3 (port 3) could transmit/receive.


For IEEE 802.11 ax/be mode (2TX/2RX) (Radio 2)

Ant. 3 (port 3) and Ant. 4 (port 4) could transmit/receive simultaneously.

For IEEE 802.11 ax mode (2RX) (Radio 3)

Ant. 5 (port 1) and Ant. 6 (port 2) could receive simultaneously.

1.1.3 MRU (static preamble puncturing)

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH						
		80	CH42	CH58	CH106	CH122	CH138	CH155	CH171
484+242	1		--	V	--	V	V	V	V
	2		V	V	V	V	V	V	V
	3		V	V	V	V	V	V	V
	4		V	--	V	V	--	V	--

RU-tone	MRU(static preamble puncturing)	Bandwidth(MHz)	5GHz Test CH		
		160	CH50	CH114	CH163
996+484	1		--	V	--
	2		V	V	V
	3		V	V	V
	4		V	--	V
996+484+242	1		--	V	V
	2		V	V	V
	3		V	V	V
	4		V	V	V
	5		V	V	V
	6		V	V	V
	7		V	V	V
	8		V	--	V

1.1.4 Worst case of MRU (static preamble puncturing) evaluation procedure

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU(static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU(static preamble puncturing) by conducted method and find out the MRU(static preamble puncturing) worst case configuration
4. Follow step 3 to find the worst MRU(static preamble puncturing) configuration and perform radiated unwanted emission testing
5. Confirm whether the worst MRU(static preamble puncturing) configuration setting in steps 3 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU(static preamble puncturing) needs to be retested.

1.1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR470202-01AN

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
to enable punctured transmission capability to 5GHz(NII) band by software.	Maximum Conducted Output Power Peak Power Spectral Density Unwanted Emissions above 1GHz was evaluated

1.1.6 EUT Information

Operational Condition			
EUT Power Type	From AC Adapter / PoE		
EUT Function	☐ Outdoor AP	☒ Indoor AP	
	☐ Fixed P2P AP	☐ Client	
Beamforming Function	☒ With beamforming	☐ Without beamforming	
Resource Unit	☐ Full RU	☐ Partial RU	
	☒ MRU(static preamble puncturing)	☐ MRU(dynamic preamble puncturing)	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.: ...		
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

1.1.7 Mode Test Duty Cycle
Non-Beamforming_Radio 2_1TX

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0)_1TX	0.997	0.01	n/a (DC>=0.98)	n/a (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_2TX

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0)_2TX	0.949	0.23	2.147m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Non-Beamforming_Radio 2_4TX

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0)_4TX	0.955	0.2	2.219m	500

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 662911 D03 v01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
(TAF: 3785)	TEL: 886-3-327-3456	FAX: 886-3-327-0973		
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH07-HY	Xun Hsieh	23.5~24.2°C / 52~55%	31/Oct/2024~05/Dec/2024
☒ Wenhua 3rd.	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
(TAF: 3785)	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated (5G R2 1TX+2TX)	03CH25-HY	Rian Chung	19.4~19.7°C / 51~54%	27/Nov/2024~28/Nov/2024
Radiated (5G R2 4TX)	03CH25-HY	Rian Chung	20.1~20.8°C / 52~54%	01/Nov/2024~06/Nov/2024

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Maximum Conducted Output Power	2 dB	Confidence levels of 95%
Power Spectral Density	2 dB	Confidence levels of 95%
Unwanted Emissions	4.8 dB	Confidence levels of 95%
Humidity	3.4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099.1
-----------------------	--------------------------------------

Non-Beamforming_Radio 2_1TX

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX	-
5210MHz	20
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	-
5210MHz	20
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX	-
5210MHz	20
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX	-
5210MHz	18.5

Non-Beamforming_Radio 2_2TX

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-
5210MHz	18.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-
5210MHz	18.5
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-
5210MHz	17
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_2TX	-
5210MHz	18.5

Non-Beamforming_Radio 2_4TX

Mode	Power Setting
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-
5210MHz	17
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-
5210MHz	17
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-
5210MHz	17
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-
5210MHz	17.5

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Conducted Output Power Peak Power Spectral Density
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V (R2-4TX)	V (R2-2TX)	V (R2-1TX)

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	CTX
1	Radio 1:WLAN 2.4G (2*2) + Radio 2: WLAN 5G (2*2) + Radio 2: WLAN 6G (2*2) + Bluetooth
Refer to Sporton Test Report No.: FA470202-04 for Co-location RF Exposure Evaluation.	

2.3 Accessories

Accessories				
Wall Mount	Brand Name	CISCO	Model Name	69-2160-04
Ceiling	Brand Name	CISCO	Model Name	800-26066-03


Reminder: Regarding to more detail and other information, please refer to user manual.

2.4 Support Equipment

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	PoE	Microsemi	PD-9001GR/AT/AC	-	Provided by Customer

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	PoE	PHIHONG	POE29U-1AT(PL)	-	Provided by Customer
2	AC power cable	Power sync	PW-GPC180-3	-	-
3	RJ-45 Cable	Power sync	CAT-6E-10	-	-

2.5 Test Setup Diagram

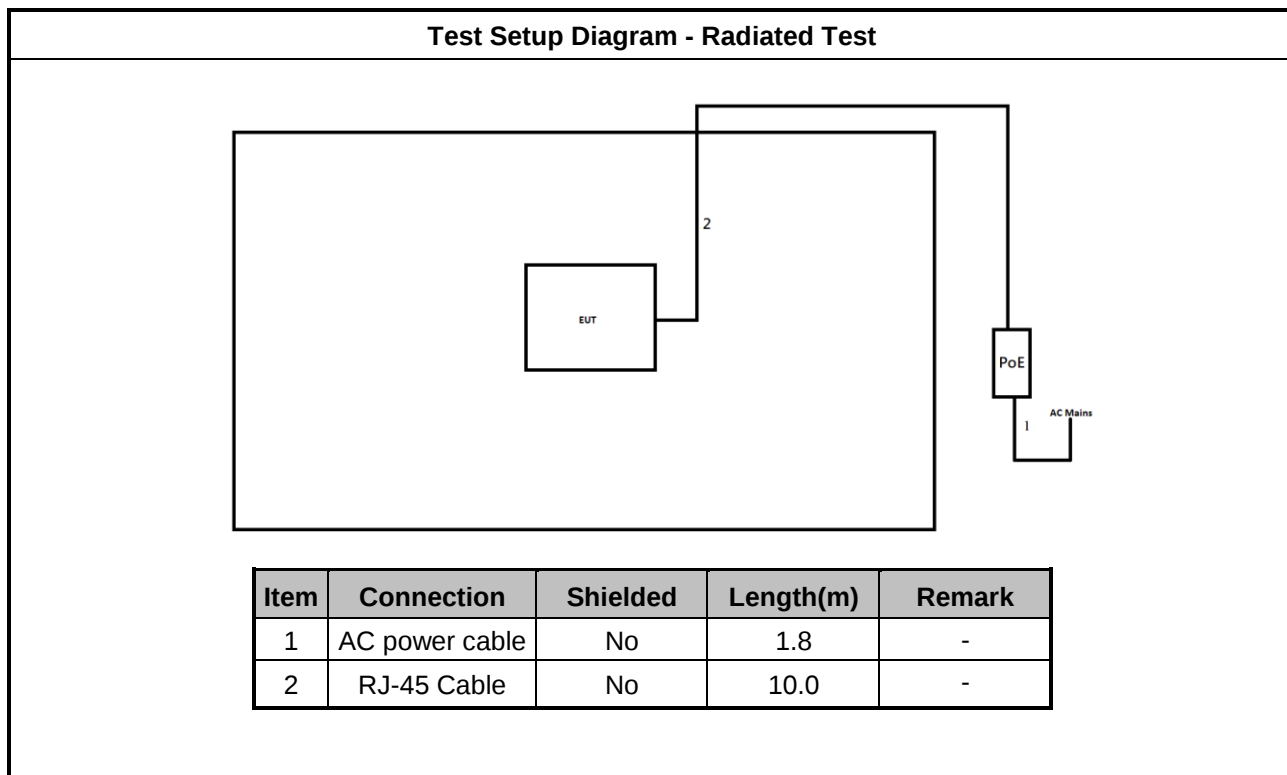

3 Transmitter Test Result

3.1 Maximum Conducted Output Power

3.1.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
☐	Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$. e.i.r.p. at any elevation angle above 30 degrees $\leq 125\text{mW}$ [21dBm]
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐	Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$.
☐	Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed 250 mW. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☐ For the 5.725-5.85 GHz band:	
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method	
Maximum Conducted Output Power	
	Duty cycle $\geq 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as KDB 789033, clause E Method PM (using an RF average power meter).
For conducted measurement.	
	If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$

3.1.4 Test Setup

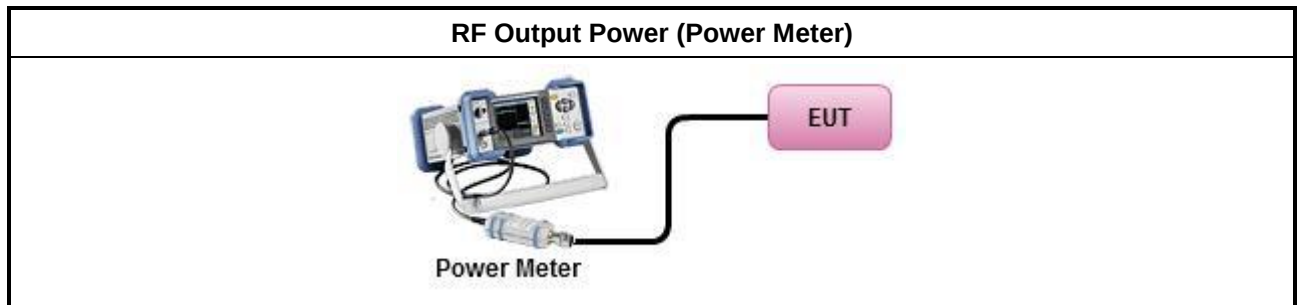

3.1.5 Test Result of Maximum Conducted Output Power

Refer as Appendix A

3.2 Peak Power Spectral Density

3.2.1 Peak Power Spectral Density Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒ For the 5.15-5.25 GHz band:	
	Outdoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Indoor AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
	Point-to-point AP: the peak power spectral density (PPSD) shall not exceed 17dBm/MHz. If $G_{TX} > 23$ dBi, then $P_{Out} = 17 - (G_{TX} - 23)$.
	Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☐ For the 5.725-5.85 GHz band:	
	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐ Refer as KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth Duty cycle ≥ 98%	
☒ Refer as KDB 789033, clause E Method SA-2 (spectral trace averaging). Duty cycle < 98%	
☒ Refer as KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)	
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
- Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.	
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

3.2.4 Test Setup

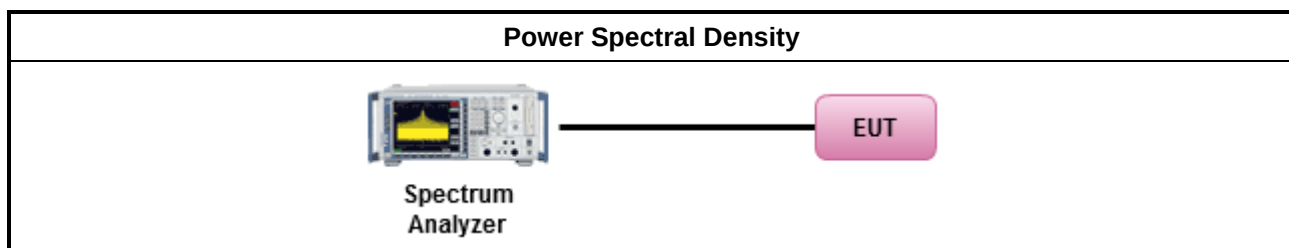

3.2.5 Test Result of Peak Power Spectral Density

Refer as Appendix B

3.3 Unwanted Emissions

3.3.1 Transmitter Radiated Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.85 GHz	5.650-5700 GHz: e.i.r.p. -27 ~ 10 dBm [68.2 ~ 105.2 dBuV/m@3m] 5.700-5720 GHz: e.i.r.p. 10 ~ 15.6 dBm [105.2 ~ 110.8 dBuV/m@3m] 5.720-5725 GHz: e.i.r.p. 15.6 ~ 27 dBm [110.8 ~ 122.2 dBuV/m@3m] 5.850-5.855 GHz: e.i.r.p. 27 ~ 15.6 dBm [122.2 ~ 110.8 dBuV/m@3m] 5.855-5.875 GHz: e.i.r.p. 15.6 ~ 10 dBm [110.8 ~ 105.2 dBuV/m@3m] 5.875-5.925 GHz: e.i.r.p. 10 ~ -27 dBm [105.2 ~ 68.2dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as KDB 789033, clause G)1) for unwanted emissions into restricted bands.
☒	Refer as KDB 789033, G)6) Method VB (ANSI C63.10, clause 4.1.4.2.3), Reduced VBW.
☒	Refer as KDB 789033, clause G)5) (ANSI C63.10, clause 4.1.4.2.2), measurement procedure peak limit.


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

3.3.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.3.5 Test Setup

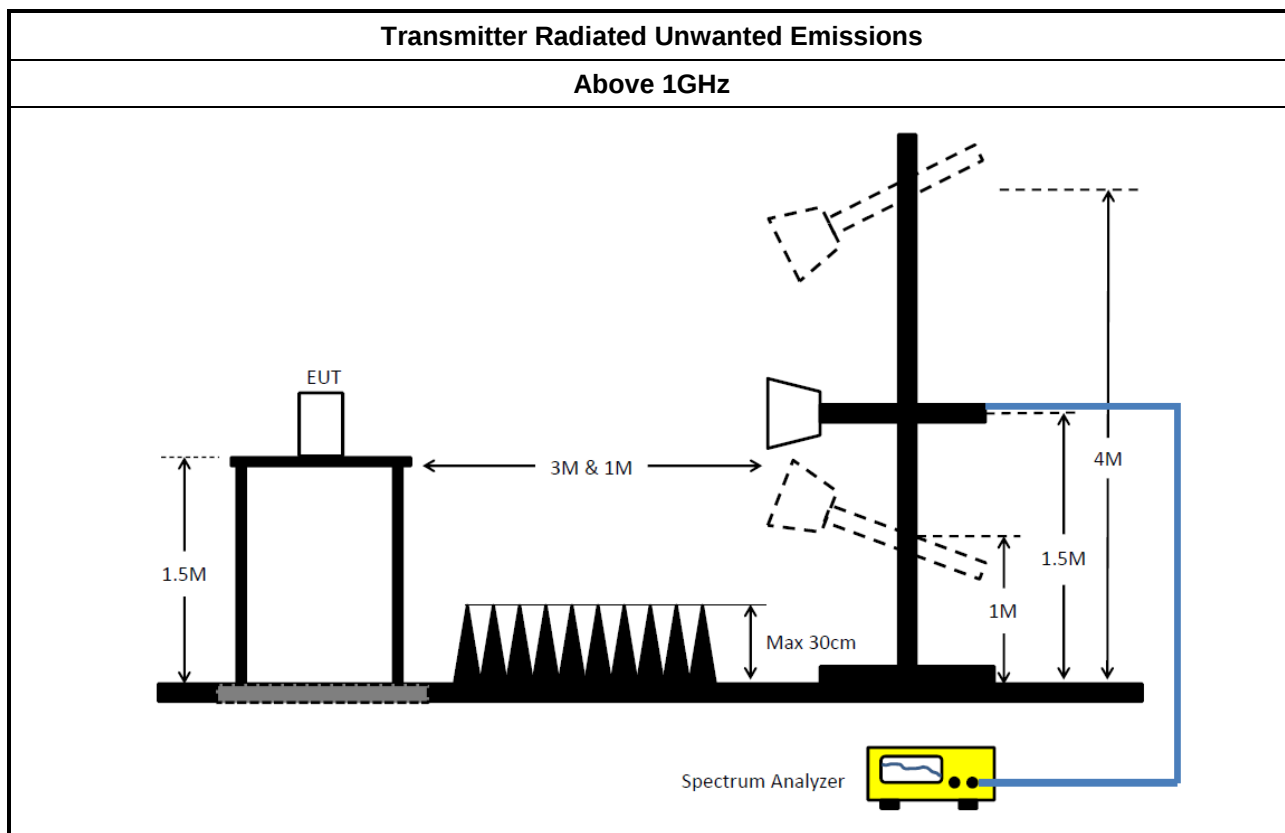

3.3.6 Test Result of Transmitter Unwanted Emissions

Refer as Appendix C

4 Test Equipment and Calibration Data

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101515	9kHz~40GHz	02/Feb/2024	01/Feb/2025
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	16/Oct/2024	15/Oct/2025
Power Meter	Anritsu	ML2495A	1517010	300MHz~40GHz	15/Dec/2023	14/Dec/2024
Pulse Sensor	Anritsu	MA2411B	1339407	300MHz~40GHz	15/Dec/2023	14/Dec/2024
SENSE-15407_NII	Sporton	V5.11.20	N/A	N/A	N/A	N/A

Instrument for Radiated Test_03CH25-HY

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH25-HY	1GHz~18GHz 3m	08/Aug/2024	07/Aug/2025
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101410	10Hz~44GHz	17/Nov/2023	16/Nov/2024
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101410	10Hz~44GHz	18/Nov/2024	17/Nov/2025
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02876	1GHz~18GHz	11/Jul/2024	10/Jul/2025
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170154	18GHz~40GHz	04/Jun/2024	03/Jun/2025
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB007	1GHz~40GHz	23/Apr/2024	22/Apr/2025
Preamplifier	SGH	PRAMP 903	20230515-1	25MHz~3GHz	24/May/2024	23/May/2025
Preamplifier	SGH	PRAMP 118-H	20230515-3	1GHz~18GHz	24/May/2024	23/May/2025
Preamplifier	EMCI	EM01G18G	060940	1GHz~18GHz	22/Oct/2024	21/Oct/2025
Amplifier	EM	EM18G40GA	060874	18GHz ~ 40GHz	15/Apr/2024	14/Apr/2025
SENSE-15407-NII	Sporton	V5.11.20	NA	NA	NA	NA



Average Power_Non-Beamforming_Radio 2_1T1S

Appendix A.1

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX	21.27	0.13397	24.72	0.29648

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	21.27	21.27	30.00	24.72	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	20.98	20.98	30.00	24.43	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	20.89	20.89	30.00	24.34	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	19.37	19.37	30.00	22.82	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Average Power_Non-Beamforming_Radio 2_2T1S

Appendix A.2

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	22.92	0.19588	26.37	0.43351

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.45	19.76	20.05	22.92	30.00	26.37	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.45	19.47	19.76	22.63	30.00	26.08	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.45	17.97	18.32	21.16	30.00	24.61	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	3.45	19.27	19.61	22.45	30.00	25.90	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	23.96	0.24889	29.22	0.83560

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.26	18.17	18.31	17.14	16.55	23.62	30.00	28.88	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.26	18.04	18.23	17.08	16.57	23.55	30.00	28.81	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.26	17.95	18.08	17.08	16.62	23.49	30.00	28.75	36.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	5.26	18.32	18.37	17.65	17.33	23.96	30.00	29.22	36.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX	3.15	6.60

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	3.15	3.15	17.00	6.60	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	2.99	2.99	17.00	6.44	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	3.01	3.01	17.00	6.46	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX	-	-	-	-	-	-	-
5210MHz	Pass	3.45	1.23	1.23	17.00	4.68	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX

PSD

5210MHz

20/11/2024

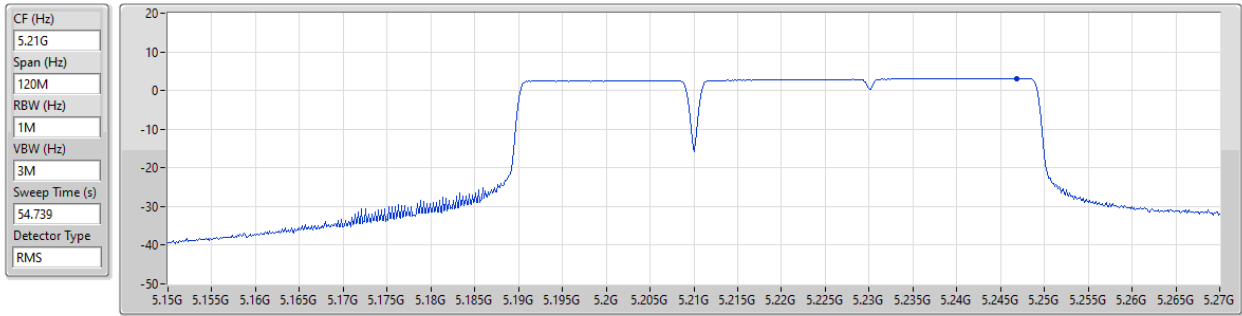

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.15	3.15	3.15



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	4.70	9.66

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.96	1.50	1.91	4.70	17.00	9.66	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.96	1.42	1.90	4.64	17.00	9.60	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.96	0.23	0.80	3.51	17.00	8.47	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_2TX	-	-	-	-	-	-	-	-
5210MHz	Pass	4.96	1.03	1.62	4.32	17.00	9.28	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX

PSD

5210MHz

20/11/2024

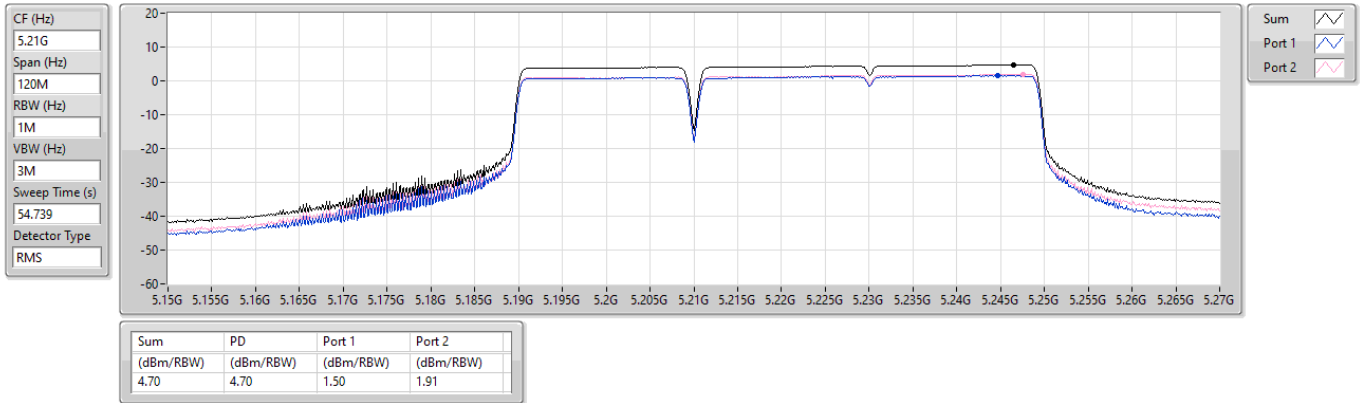



Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	5.92	12.68

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.76	0.41	0.80	-0.81	-1.35	5.74	16.24	12.50	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.76	0.27	0.78	-0.80	-1.27	5.70	16.24	12.46	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.76	0.18	0.72	-0.91	-1.40	5.65	16.24	12.41	23.00
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	6.76	0.38	0.73	-0.41	-0.69	5.92	16.24	12.68	23.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

PSD

5210MHz

31/10/2024

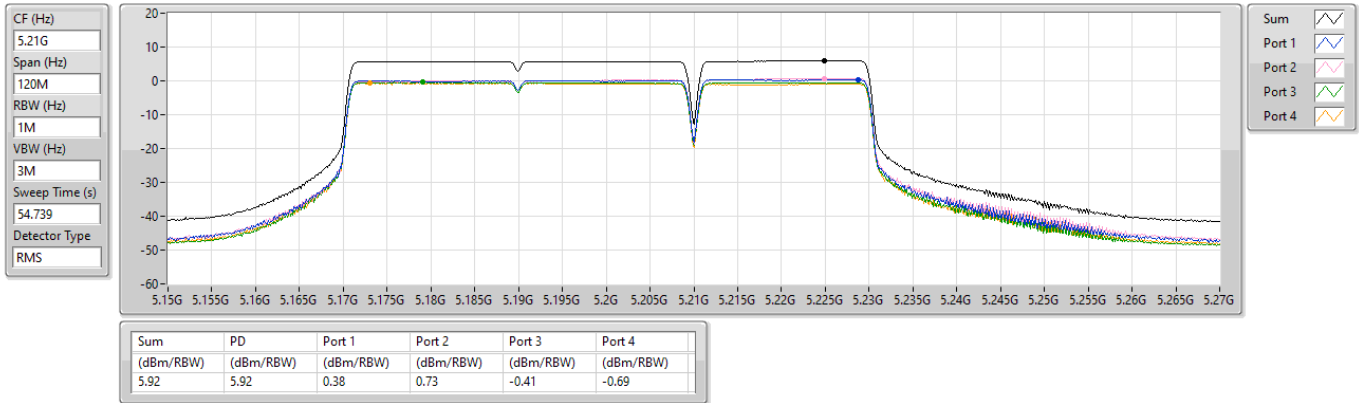



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX	Pass	PK	5.15G	73.46	74.00	-0.54	3	Horizontal	324	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.15G	51.68	54.00	-2.32	3	Vertical	336	1.94
5210MHz	Pass	AV	5.188G	95.88	Inf	-Inf	3	Vertical	336	1.94
5210MHz	Pass	AV	5.351G	43.83	54.00	-10.17	3	Vertical	336	1.94
5210MHz	Pass	PK	5.149G	73.24	74.00	-0.76	3	Vertical	336	1.94
5210MHz	Pass	PK	5.184G	109.54	Inf	-Inf	3	Vertical	336	1.94
5210MHz	Pass	PK	5.366G	57.04	74.00	-16.96	3	Vertical	336	1.94
5210MHz	Pass	AV	5.15G	52.58	54.00	-1.42	3	Horizontal	324	1.00
5210MHz	Pass	AV	5.213G	96.54	Inf	-Inf	3	Horizontal	324	1.00
5210MHz	Pass	AV	5.35G	44.62	54.00	-9.38	3	Horizontal	324	1.00
5210MHz	Pass	PK	5.15G	73.46	74.00	-0.54	3	Horizontal	324	1.00
5210MHz	Pass	PK	5.228G	109.93	Inf	-Inf	3	Horizontal	324	1.00
5210MHz	Pass	PK	5.372G	58.63	74.00	-15.37	3	Horizontal	324	1.00
5210MHz	Pass	PK	10.42992G	49.24	68.20	-18.96	3	Vertical	360	1.50
5210MHz	Pass	PK	10.42412G	49.42	68.20	-18.78	3	Horizontal	350	1.50

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX


5210MHz_TX

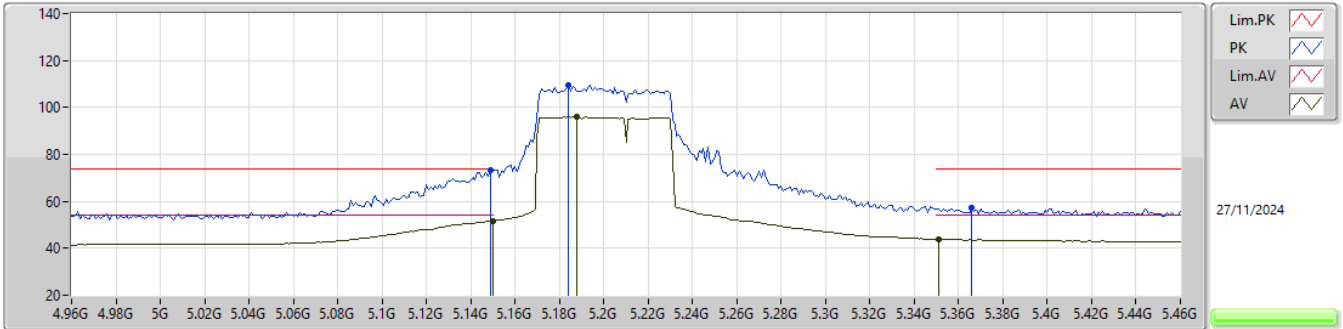

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	51.68	54.00	-2.32	1.02	3	Vertical	336	1.94	50.66	33.50	4.81	37.29
AV	5.188G	95.88	Inf	-Inf	0.88	3	Vertical	336	1.94	95.00	33.35	4.83	37.30
AV	5.351G	43.83	54.00	-10.17	0.67	3	Vertical	336	1.94	43.16	33.10	4.91	37.34
PK	5.149G	73.24	74.00	-0.76	1.01	3	Vertical	336	1.94	72.23	33.49	4.81	37.29
PK	5.184G	109.54	Inf	-Inf	0.89	3	Vertical	336	1.94	108.65	33.36	4.83	37.30
PK	5.366G	57.04	74.00	-16.96	0.64	3	Vertical	336	1.94	56.40	33.07	4.91	37.34

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX


5210MHz_TX

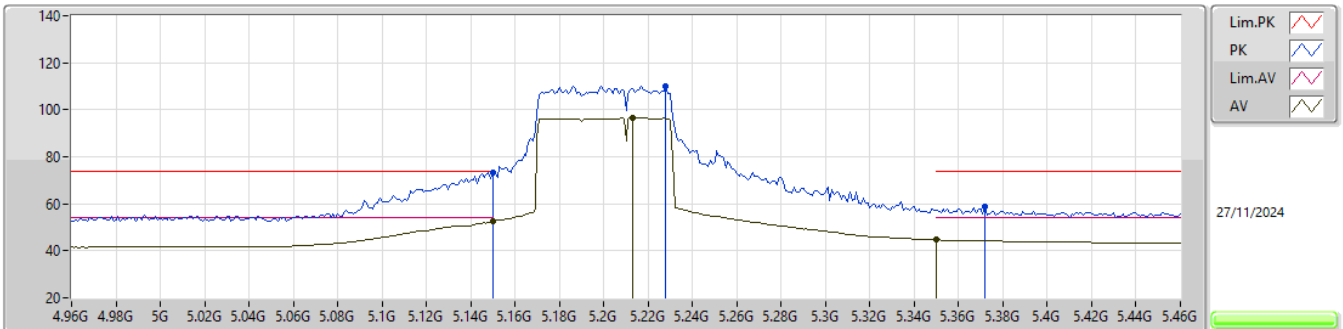

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	5.15G	52.58	54.00	-1.42	1.02	3	Horizontal	324	1.00	51.56	33.50	4.81	37.29
AV	5.213G	96.54	Inf	-Inf	0.81	3	Horizontal	324	1.00	95.73	33.27	4.85	37.31
AV	5.35G	44.62	54.00	-9.38	0.67	3	Horizontal	324	1.00	43.95	33.10	4.91	37.34
PK	5.15G	73.46	74.00	-0.54	1.02	3	Horizontal	324	1.00	72.44	33.50	4.81	37.29
PK	5.228G	109.93	Inf	-Inf	0.78	3	Horizontal	324	1.00	109.15	33.24	4.85	37.31
PK	5.372G	58.63	74.00	-15.37	0.64	3	Horizontal	324	1.00	57.99	33.06	4.92	37.34


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX

5210MHz_TX

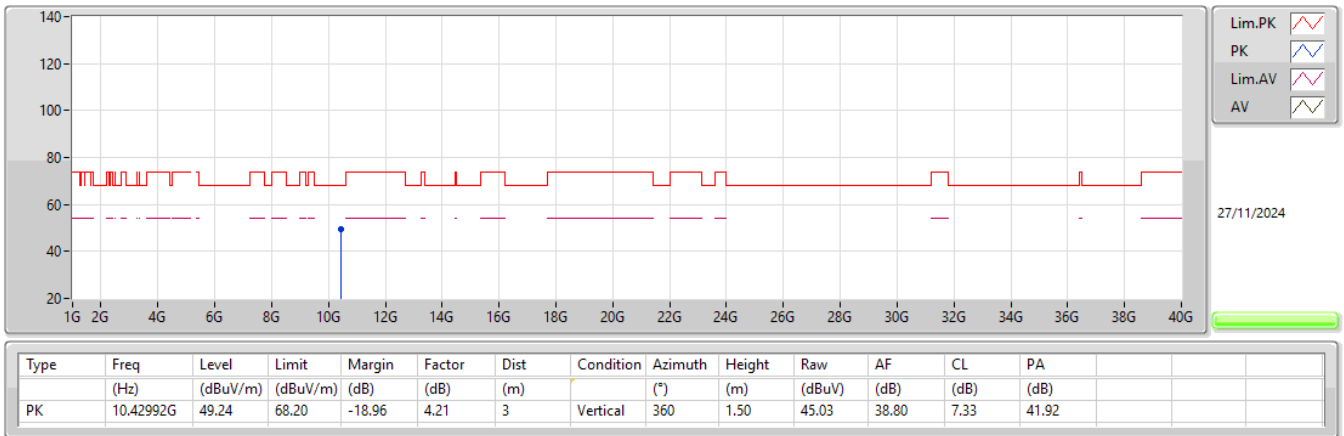

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_1TX

5210MHz_TX

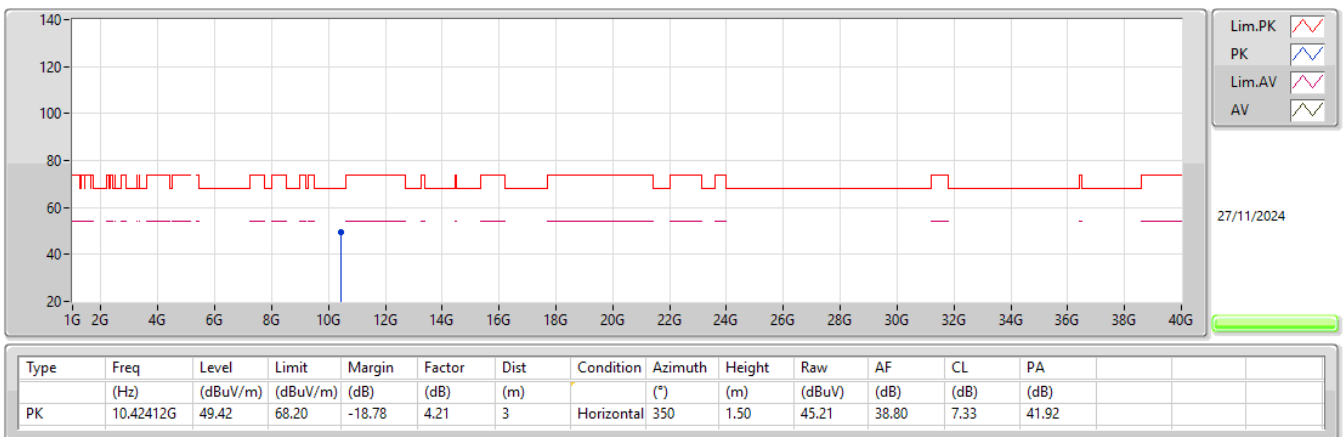



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	Pass	PK	5.142G	73.27	74.00	-0.73	3	Vertical	31	2.59

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.142G	48.72	54.00	-5.28	3	Vertical	31	2.59
5210MHz	Pass	AV	5.239G	98.88	Inf	-Inf	3	Vertical	31	2.59
5210MHz	Pass	AV	5.36G	45.11	54.00	-8.89	3	Vertical	31	2.59
5210MHz	Pass	PK	5.142G	73.27	74.00	-0.73	3	Vertical	31	2.59
5210MHz	Pass	PK	5.18G	111.68	Inf	-Inf	3	Vertical	31	2.59
5210MHz	Pass	PK	5.356G	61.35	74.00	-12.65	3	Vertical	31	2.59
5210MHz	Pass	AV	5.145G	45.16	54.00	-8.84	3	Horizontal	310	1.96
5210MHz	Pass	AV	5.242G	93.12	Inf	-Inf	3	Horizontal	310	1.96
5210MHz	Pass	AV	5.355G	43.85	54.00	-10.15	3	Horizontal	310	1.96
5210MHz	Pass	PK	5.143G	66.25	74.00	-7.75	3	Horizontal	310	1.96
5210MHz	Pass	PK	5.243G	107.24	Inf	-Inf	3	Horizontal	310	1.96
5210MHz	Pass	PK	5.383G	57.30	74.00	-16.70	3	Horizontal	310	1.96
5210MHz	Pass	PK	10.4504G	49.66	68.20	-18.54	3	Vertical	66	1.50
5210MHz	Pass	PK	10.43216G	48.81	68.20	-19.39	3	Horizontal	236	2.52


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

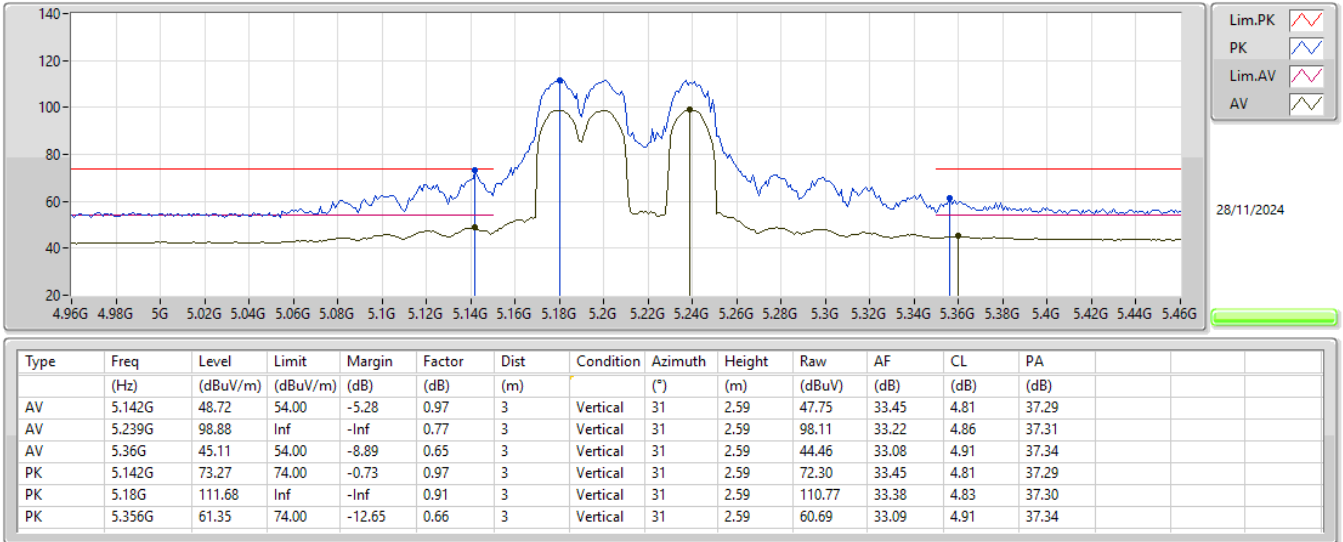


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

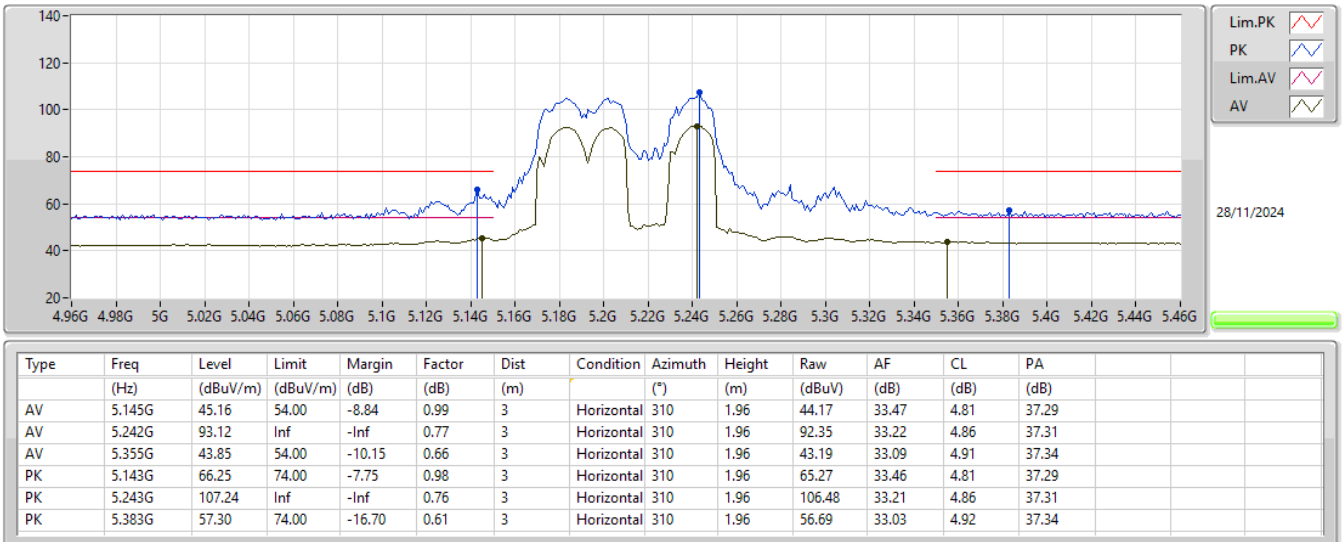


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

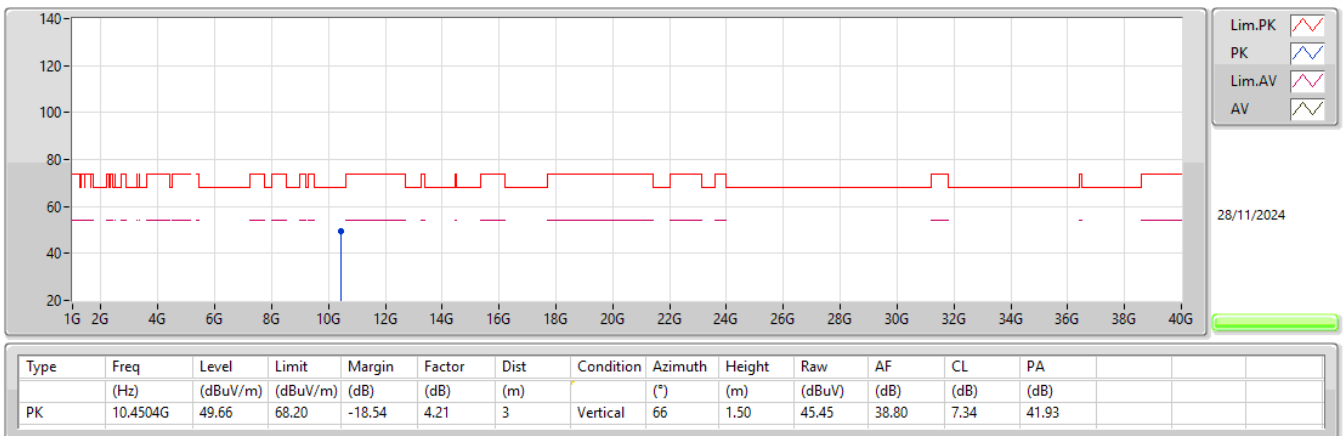

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_2TX

5210MHz_TX

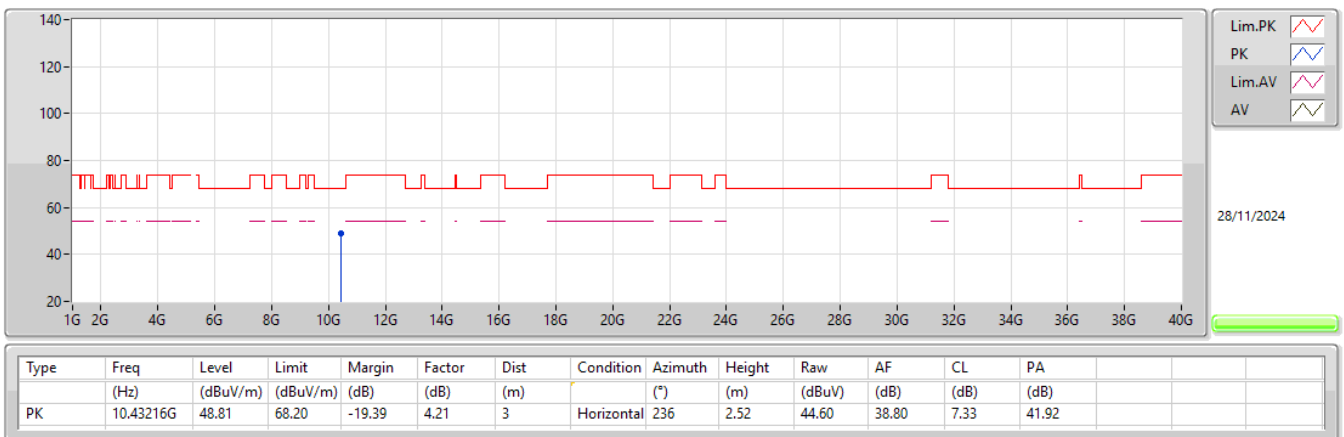



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	Pass	PK	5.139G	72.23	74.00	-1.77	3	Vertical	53	1.96

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX	-	-	-	-	-	-	-	-	-	-
5210MHz	Pass	AV	5.139G	51.12	54.00	-2.88	3	Vertical	53	1.96
5210MHz	Pass	AV	5.218G	101.23	Inf	-Inf	3	Vertical	53	1.96
5210MHz	Pass	AV	5.381G	49.15	54.00	-4.85	3	Vertical	53	1.96
5210MHz	Pass	PK	5.139G	72.23	74.00	-1.77	3	Vertical	53	1.96
5210MHz	Pass	PK	5.219G	113.78	Inf	-Inf	3	Vertical	53	1.96
5210MHz	Pass	PK	5.356G	62.63	74.00	-11.37	3	Vertical	53	1.96
5210MHz	Pass	AV	5.147G	50.76	54.00	-3.24	3	Horizontal	339	1.04
5210MHz	Pass	AV	5.2G	97.77	Inf	-Inf	3	Horizontal	339	1.04
5210MHz	Pass	AV	5.365G	48.95	54.00	-5.05	3	Horizontal	339	1.04
5210MHz	Pass	PK	5.139G	71.75	74.00	-2.25	3	Horizontal	339	1.04
5210MHz	Pass	PK	5.2G	111.24	Inf	-Inf	3	Horizontal	339	1.04
5210MHz	Pass	PK	5.375G	62.52	74.00	-11.48	3	Horizontal	339	1.04
5210MHz	Pass	PK	10.38064G	49.51	68.20	-18.69	3	Vertical	38	1.50
5210MHz	Pass	PK	10.4248G	49.61	68.20	-18.59	3	Horizontal	180	1.01

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

5210MHz_TX

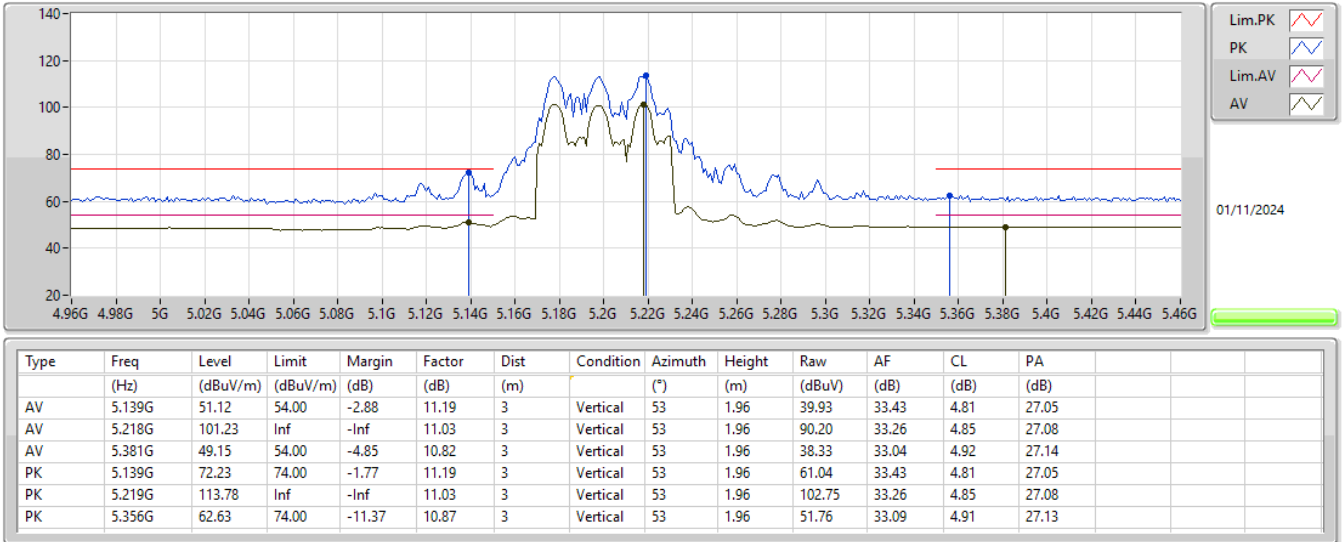


5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

5210MHz_TX



5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

5210MHz_TX

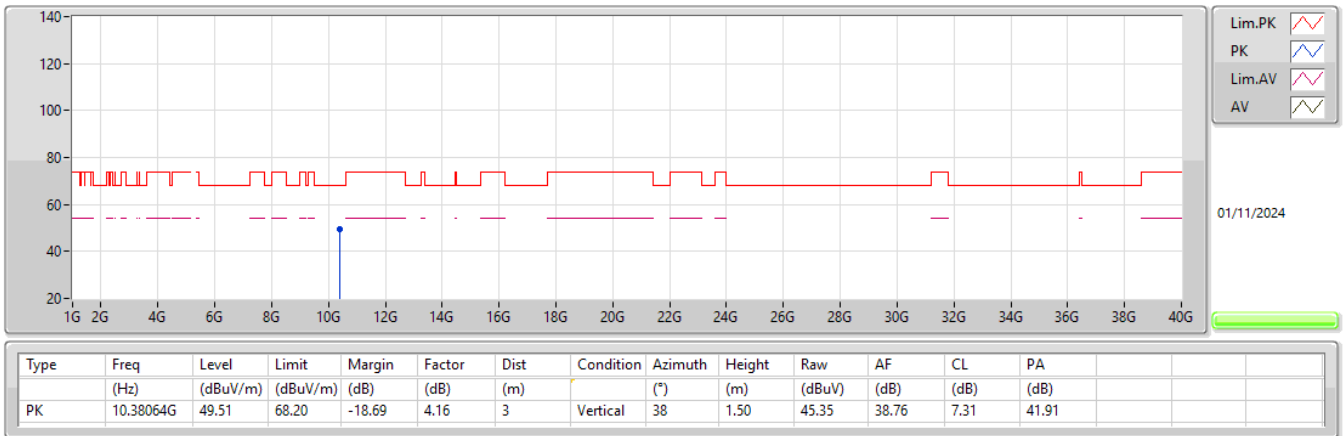

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 4_4TX

5210MHz_TX

