


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

CSE Other [PK]

5250MHz

08/02/2025

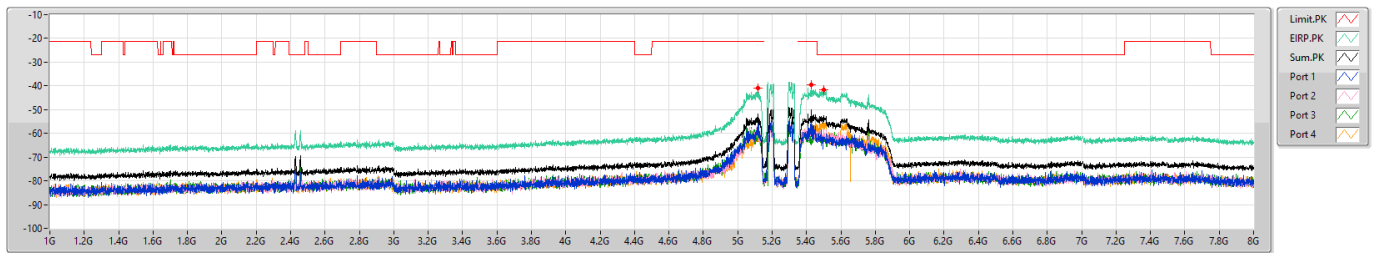


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.1195G	-40.99	-21.20	-19.79	10.70	0.00	-51.69	-54.37	-59.37	-59.39	-60.89
1G	8G	1M	PK	5.42575G	-39.52	-21.20	-18.32	10.70	0.00	-50.22	-51.83	-60.40	-64.79	-57.69
1G	8G	1M	PK	5.49925G	-41.67	-27.00	-14.67	10.70	0.00	-52.37	-62.47	-57.82	-61.04	-55.54

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

CSE Other [AV]

5250MHz

08/02/2025

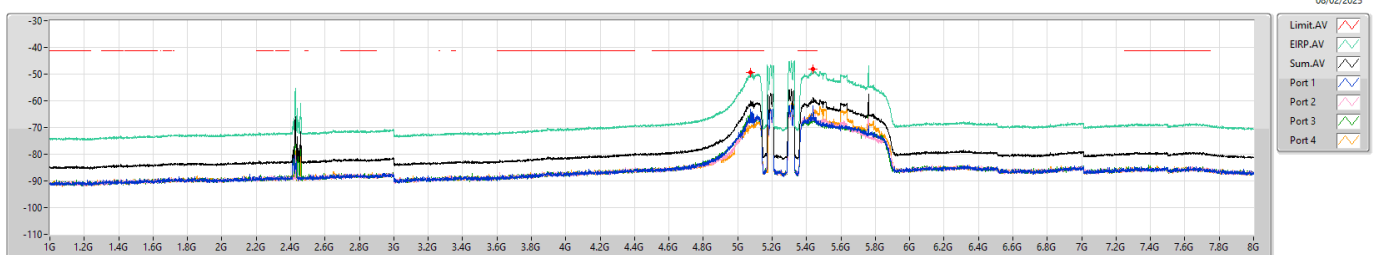

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.074G	-49.26	-41.20	-8.06	10.70	0.00	-59.96	-63.22	-67.26	-66.21	-69.72
1G	8G	1M	AV	5.43888G	-48.11	-41.20	-6.91	10.70	0.00	-58.81	-61.82	-66.87	-67.42	-65.66



Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	DG (dBi)	EIRP (dBm)	Psum (dBm)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Limit (dBm)	Margin (dB)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	10.70	-50.66	-61.36	-61.36				-41.2	-9.46
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	10.70	-48.06	-58.76	-61.28	-62.33			-41.2	-6.86
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	10.70	-49.06	-59.76	-67.83	-68.02	-66.95	-62.73	-41.2	-7.86
802.11be EHT160_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	10.70	-41.65	-52.35	-52.35				-41.2	-0.45
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	10.70	-41.83	-52.53	-53.44	-59.78			-41.2	-0.63
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	10.70	-45.09	-55.79	-60.56	-65.65	-65.48	-59.2	-41.2	-3.89

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.10025G	10.70	-61.36				-61.36	-50.66	-41.2	-9.46
5290MHz	Pass	1G	8G	AV	5.38288G	10.70	-61.42				-61.42	-50.72	-41.2	-9.52
5290MHz	Pass	1G	8G	PK	5.102G	10.70	-52.97				-52.97	-42.27	-21.2	-21.07
5290MHz	Pass	1G	8G	PK	5.36975G	10.70	-52.05				-52.05	-41.35	-21.2	-20.15
5290MHz	Pass	1G	8G	PK	5.50188G	10.70	-53.17				-53.17	-42.47	-27	-15.47
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.12563G	10.70	-61.28	-62.33			-58.76	-48.06	-41.2	-6.86
5290MHz	Pass	1G	8G	AV	5.459G	10.70	-62.02	-62.42			-59.21	-48.51	-41.2	-7.31
5290MHz	Pass	1G	8G	PK	5.13263G	10.70	-51.43	-56.14			-50.17	-39.47	-21.2	-18.27
5290MHz	Pass	1G	8G	PK	5.44063G	10.70	-54.98	-54.5			-51.72	-41.02	-21.2	-19.82
5290MHz	Pass	1G	8G	PK	5.58325G	10.70	-54.18	-49.17			-47.98	-37.28	-27	-10.28
802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.12825G	10.70	-66.89	-67.96	-66.24	-64.53	-60.2	-49.50	-41.2	-8.30
5290MHz	Pass	1G	8G	AV	5.438G	10.70	-67.83	-68.02	-66.95	-62.73	-59.76	-49.06	-41.2	-7.86
5290MHz	Pass	1G	8G	PK	5.10288G	10.70	-59.25	-60.87	-58.46	-57.07	-52.68	-41.98	-21.2	-20.78
5290MHz	Pass	1G	8G	PK	5.41963G	10.70	-60.79	-61	-62.54	-54.84	-52.62	-41.92	-21.2	-20.72
5290MHz	Pass	1G	8G	PK	5.56838G	10.70	-59.96	-57.47	-60.65	-51.12	-49.44	-38.74	-27	-11.74
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11425G	10.70	-53.28				-53.28	-42.58	-41.2	-1.38
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38463G	10.70	-55.9				-55.9	-45.20	-41.2	-4.00
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.08625G	10.70	-46.42				-46.42	-35.72	-21.2	-14.52
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.40738G	10.70	-40.91				-40.91	-30.21	-21.2	-9.01
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.46863G	10.70	-45.43				-45.43	-34.73	-27	-7.73
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11863G	10.70	-52.35				-52.35	-41.65	-41.2	-0.45
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.42138G	10.70	-56.21				-56.21	-45.51	-41.2	-4.31
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.07313G	10.70	-38.54				-38.54	-27.84	-21.2	-6.64
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.39863G	10.70	-39.22				-39.22	-28.52	-21.2	-7.32
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.5115G	10.70	-44.85				-44.85	-34.15	-27	-7.15
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.116G	10.70	-53.44	-59.78			-52.53	-41.83	-41.2	-0.63
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.3995G	10.70	-59.18	-60			-56.56	-45.86	-41.2	-4.66
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.08013G	10.70	-43.34	-56.26			-43.12	-32.42	-21.2	-11.22
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.40213G	10.70	-40.02	-57.61			-39.95	-29.25	-21.2	-8.05
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.4625G	10.70	-49.95	-55.46			-48.87	-38.17	-27	-11.17
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.10375G	10.70	-62.7	-55.25			-54.53	-43.83	-41.2	-2.63
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38113G	10.70	-59.9	-58.9			-56.36	-45.66	-41.2	-4.46
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.06963G	10.70	-40.35	-62.41			-40.32	-29.62	-21.2	-8.42
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38113G	10.70	-41.75	-60.06			-41.69	-30.99	-21.2	-9.79
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.49663G	10.70	-46.86	-58.03			-46.54	-35.84	-27	-8.84
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.1125G	10.70	-60.56	-65.65	-65.48	-59.2	-55.79	-45.09	-41.2	-3.89
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.40213G	10.70	-65.54	-67.89	-67.86	-63.04	-59.58	-48.88	-41.2	-7.68
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.07925G	10.70	-61.27	-58.68	-51.39	-59.82	-49.83	-39.13	-21.2	-17.93
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.39425G	10.70	-60.03	-62.63	-61.56	-48.53	-47.89	-37.19	-21.2	-15.99
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.48263G	10.70	-60.28	-59.85	-60.03	-52.98	-50.97	-40.27	-27	-13.27
802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.09763G	10.70	-59.86	-69.43	-69.07	-69.4	-58.58	-47.88	-41.2	-6.68
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.4415G	10.70	-71.29	-70.31	-64.34	-64.27	-60.41	-49.71	-41.2	-8.51
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.07575G	10.70	-43.3	-65.62	-63.1	-63.02	-43.18	-32.48	-21.2	-11.28
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.45813G	10.70	-49.48	-62.22	-55.51	-61.74	-48.14	-37.44	-21.2	-16.24
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.49313G	10.70	-63.31	-61.34	-62.4	-53.61	-52.12	-41.42	-27	-14.42


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX

CSE Other [PK]

5290MHz

13/02/2025

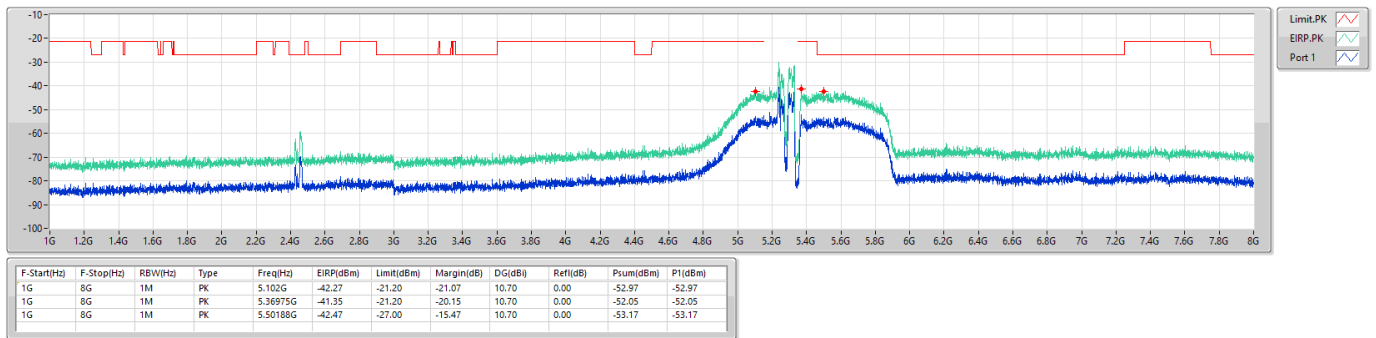


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_1TX

CSE Other [AV]

5290MHz

13/02/2025

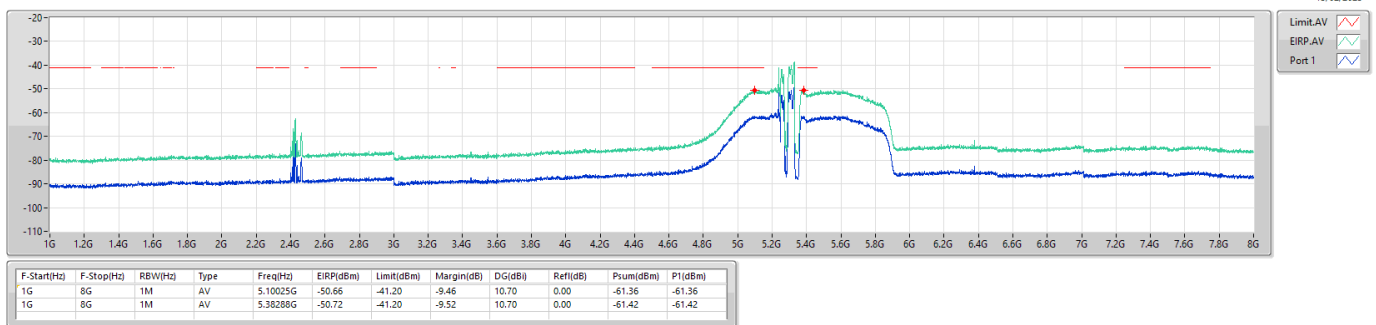


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX

CSE Other [PK]

5290MHz

13/02/2025

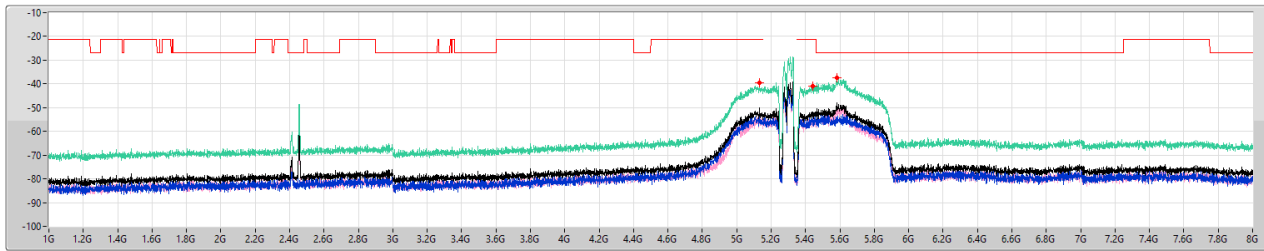


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.13263G	-39.47	-21.20	-18.27	10.70	0.00	-50.17	-51.43	-56.14
1G	8G	1M	PK	5.44063G	-41.02	-21.20	-19.82	10.70	0.00	-51.72	-54.98	-54.50
1G	8G	1M	PK	5.58325G	-37.28	-27.00	-10.28	10.70	0.00	-47.98	-54.18	-49.17

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_2TX

CSE Other [AV]

5290MHz

13/02/2025

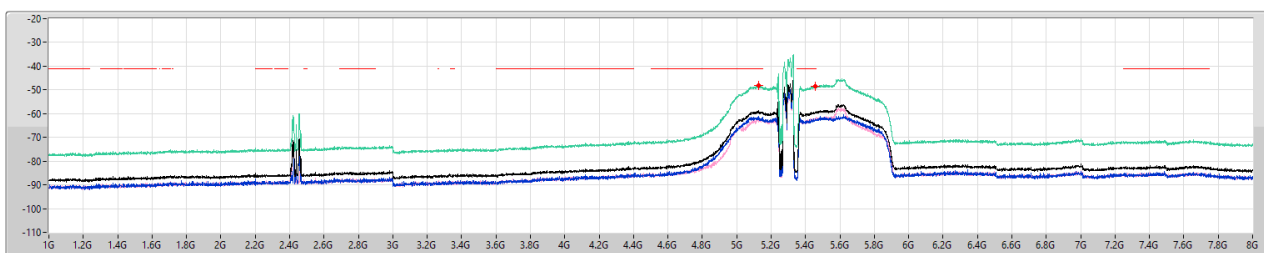


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.12563G	-48.06	-41.20	-6.86	10.70	0.00	-58.76	-61.28	-62.33
1G	8G	1M	AV	5.459G	-48.51	-41.20	-7.31	10.70	0.00	-59.21	-62.02	-62.42

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX

CSE Other [PK]

5290MHz

13/02/2025

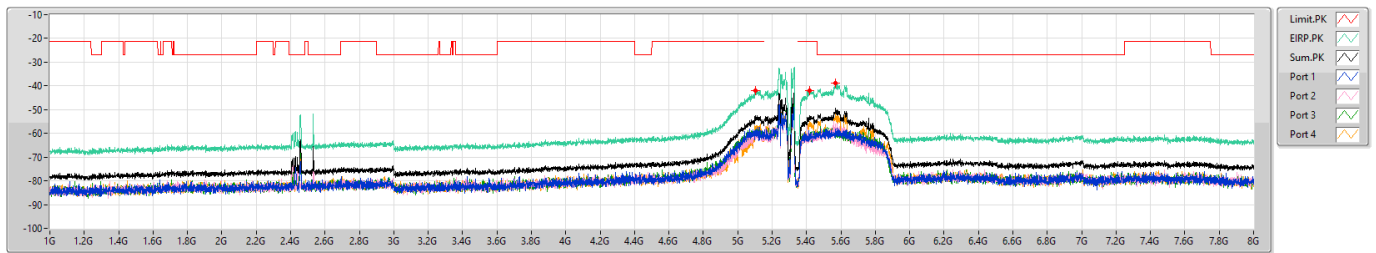


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10288G	-41.98	-21.20	-20.78	10.70	0.00	-52.68	-59.25	-60.87	-58.46	-57.07
1G	8G	1M	PK	5.41963G	-41.92	-21.20	-20.72	10.70	0.00	-52.62	-60.79	-61.00	-62.54	-54.84
1G	8G	1M	PK	5.56838G	-38.74	-27.00	-11.74	10.70	0.00	-49.44	-59.96	-57.47	-60.65	-51.12

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 3_4TX

CSE Other [AV]

5290MHz

13/02/2025

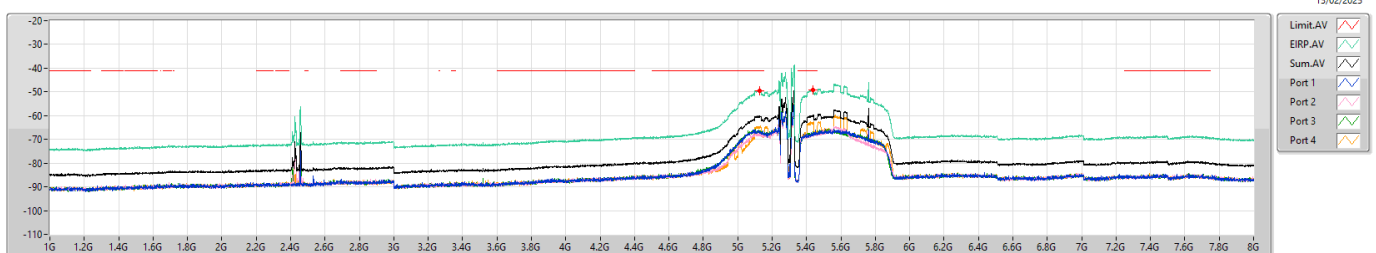


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.12825G	-49.50	-41.20	-8.30	10.70	0.00	-60.20	-66.89	-67.96	-66.24	-64.53
1G	8G	1M	AV	5.438G	-49.06	-41.20	-7.86	10.70	0.00	-59.76	-67.83	-68.02	-66.95	-62.73

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

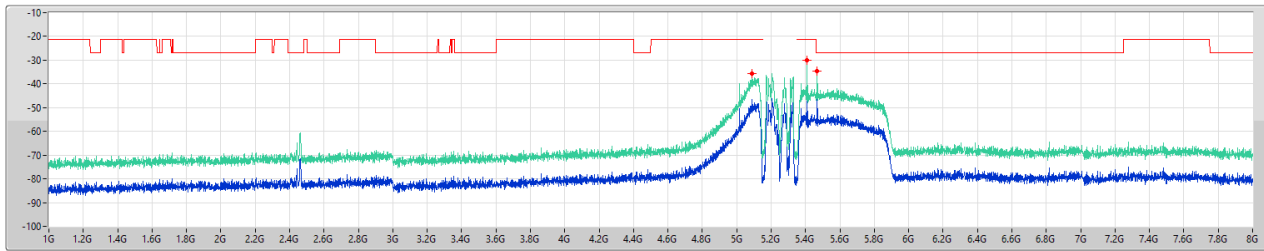


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08625G	-35.72	-21.20	-14.52	10.70	0.00	-46.42	-46.42
1G	8G	1M	PK	5.40738G	-30.21	-21.20	-9.01	10.70	0.00	-40.91	-40.91
1G	8G	1M	PK	5.46863G	-34.73	-27.00	-7.73	10.70	0.00	-45.43	-45.43

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

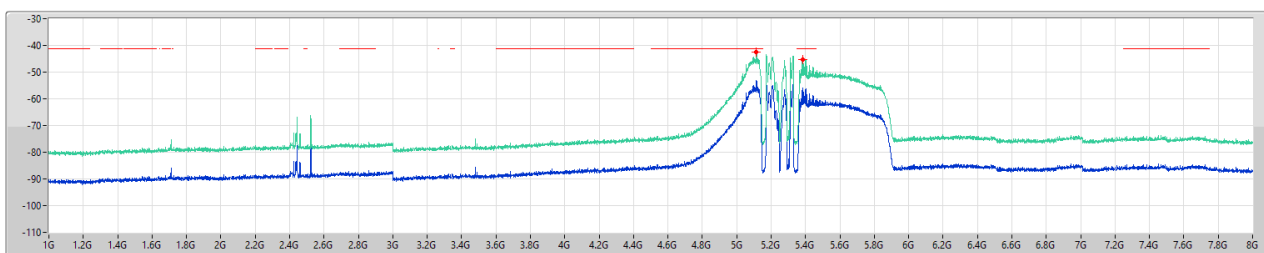


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.11425G	-42.58	-41.20	-1.38	10.70	0.00	-53.28	-53.28
1G	8G	1M	AV	5.38463G	-45.20	-41.20	-4.00	10.70	0.00	-55.90	-55.90

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

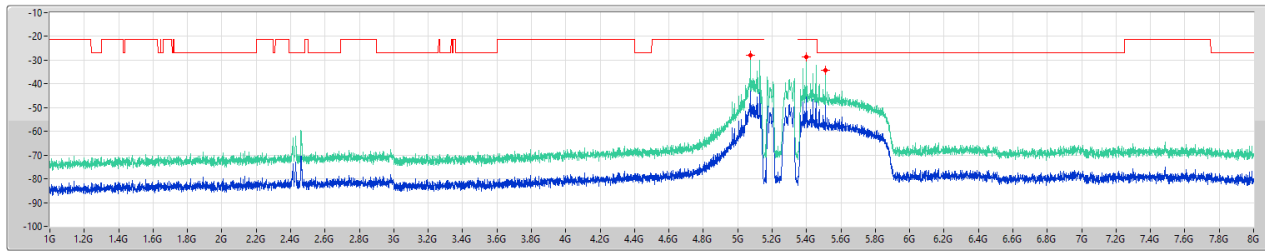


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.07313G	-27.84	-21.20	-6.64	10.70	0.00	-38.54	-38.54
1G	8G	1M	PK	5.39863G	-28.52	-21.20	-7.32	10.70	0.00	-39.22	-39.22
1G	8G	1M	PK	5.5115G	-34.15	-27.00	-7.15	10.70	0.00	-44.85	-44.85

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

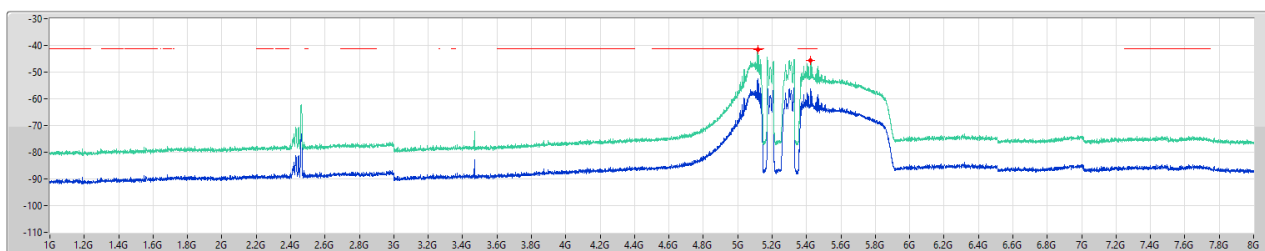


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.11863G	-41.65	-41.20	-0.45	10.70	0.00	-52.35	-52.35
1G	8G	1M	AV	5.42138G	-45.51	-41.20	-4.31	10.70	0.00	-56.21	-56.21

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

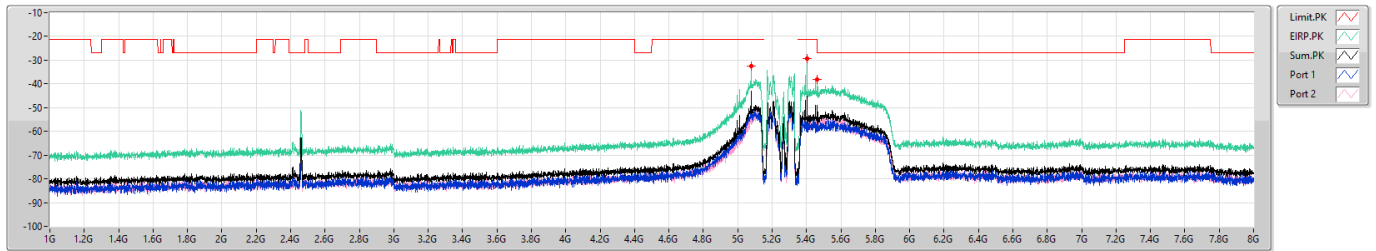


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

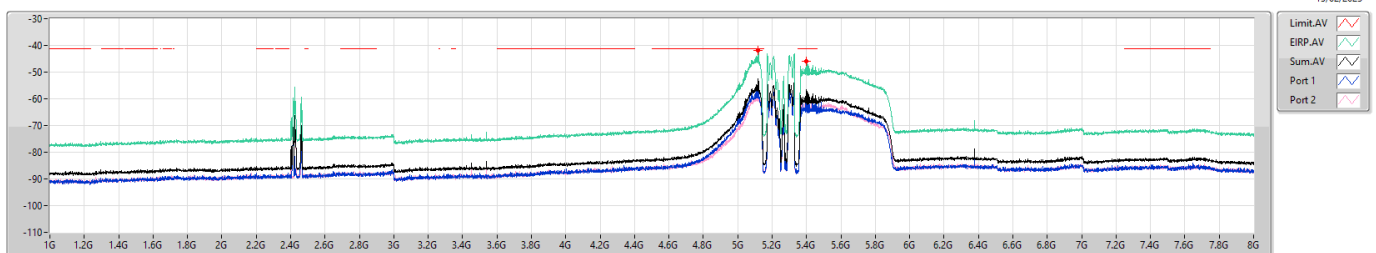


5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_2TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

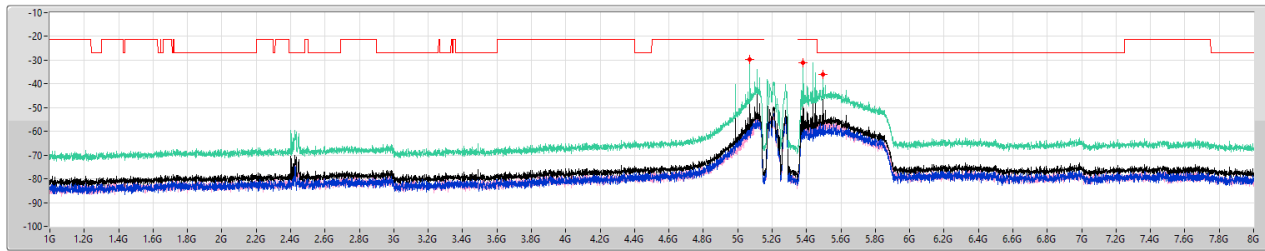


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.06963G	-29.62	-21.20	-8.42	10.70	0.00	-40.32	-40.35	-62.41
1G	8G	1M	PK	5.38113G	-30.99	-21.20	-9.79	10.70	0.00	-41.69	-41.75	-60.06
1G	8G	1M	PK	5.49663G	-35.84	-27.00	-8.84	10.70	0.00	-46.54	-46.66	-58.03

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_2TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

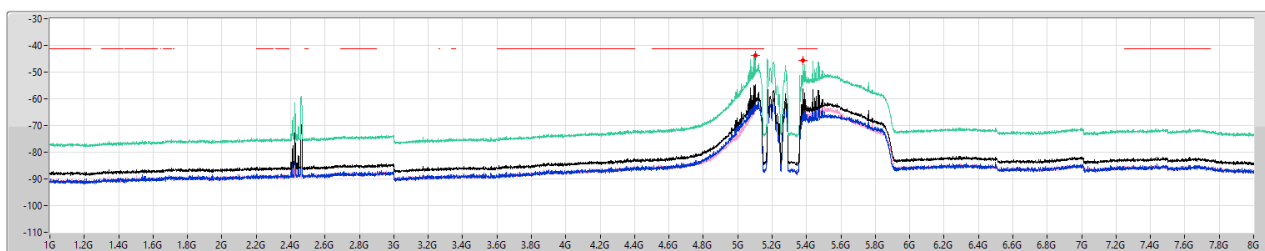


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.10375G	-43.83	-41.20	-2.63	10.70	0.00	-54.53	-62.70	-55.25
1G	8G	1M	AV	5.38113G	-45.66	-41.20	-4.46	10.70	0.00	-56.36	-59.90	-58.90

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

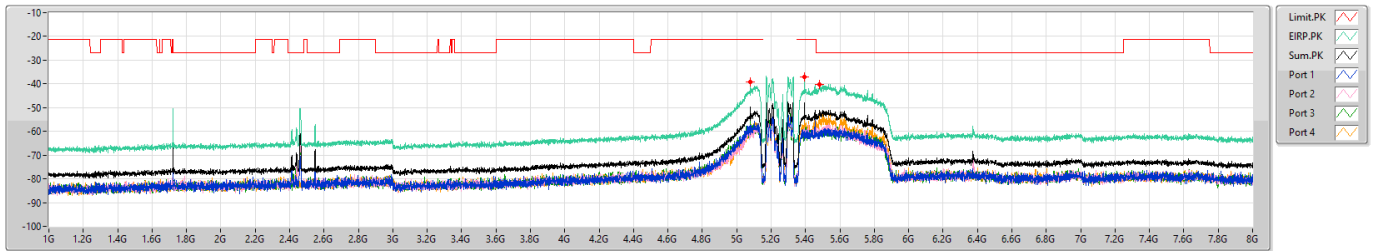


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.07925G	-39.13	-21.20	-17.93	10.70	0.00	-49.83	-61.27	-58.68	-51.39	-59.82
1G	8G	1M	PK	5.39425G	-37.19	-21.20	-15.99	10.70	0.00	-47.89	-60.03	-60.63	-61.56	-48.53
1G	8G	1M	PK	5.48263G	-40.27	-27.00	-13.27	10.70	0.00	-50.97	-60.28	-59.85	-60.03	-52.98

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

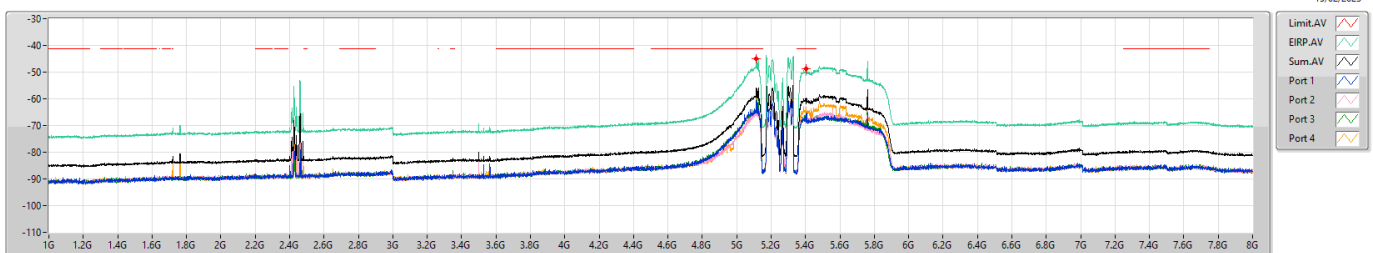


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.1125G	-45.09	-41.20	-3.89	10.70	0.00	-55.79	-60.56	-65.65	-65.48	-59.20
1G	8G	1M	AV	5.40213G	-48.88	-41.20	-7.68	10.70	0.00	-59.58	-65.54	-67.89	-67.86	-63.04

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

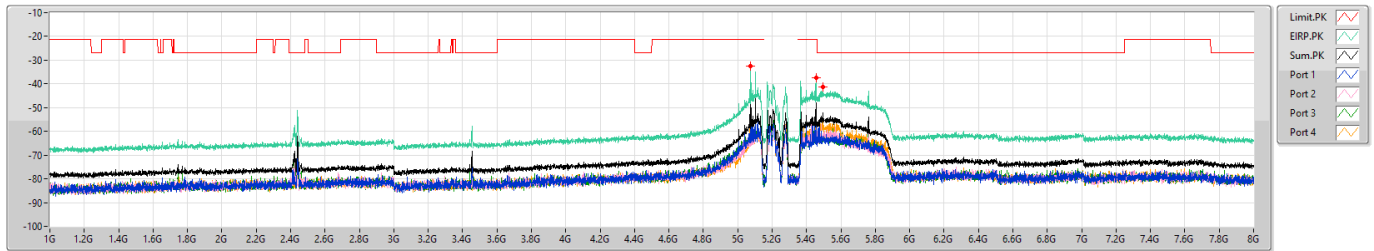


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.07575G	-32.48	-21.20	-11.28	10.70	0.00	-43.18	-43.30	-65.62	-63.10	-63.02
1G	8G	1M	PK	5.45813G	-37.44	-21.20	-16.24	10.70	0.00	-48.14	-49.48	-62.22	-55.51	-61.74
1G	8G	1M	PK	5.49313G	-41.42	-27.00	-14.42	10.70	0.00	-52.12	-63.31	-61.34	-62.40	-53.61

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

13/02/2025

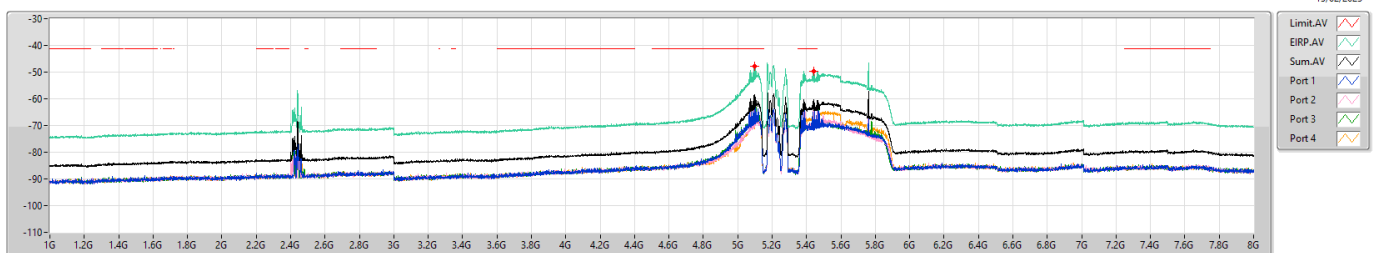

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.09763G	-47.88	-41.20	-6.68	10.70	0.00	-58.58	-59.86	-69.43	-69.07	-69.40
1G	8G	1M	AV	5.4415G	-49.71	-41.20	-8.51	10.70	0.00	-60.41	-71.29	-70.31	-64.34	-64.27

**Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	DG (dBi)	Psum (dBm)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	1G	8G	AV	4.71	-58.20	-58.20				-53.49	-41.20	-12.29
802.11a_Nss1,(6Mbps)_2TX	Pass	1G	8G	AV	4.71	-56.14	-58.98	-59.33			-51.43	-41.20	-10.23
802.11a_Nss1,(6Mbps)_4TX	Pass	1G	8G	AV	7.72	-56.45	-60.66	-61.03	-64.82	-65.39	-48.73	-41.20	-7.53
802.11be EHT20_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	4.71	-57.50	-57.50				-52.79	-41.20	-11.59
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	4.71	-56.96	-59.42	-60.60			-52.25	-41.20	-11.05
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	7.72	-56.45	-60.92	-61.09	-64.08	-65.42	-48.73	-41.20	-7.53
802.11be EHT40_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	4.71	-58.40	-58.40				-53.69	-41.20	-12.49
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	4.71	-57.22	-59.49	-61.13			-52.51	-41.20	-11.31
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	7.72	-57.06	-63.56	-64.57	-63.39	-61.44	-49.34	-41.20	-8.14
802.11be EHT80_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	4.71	-53.53	-53.53				-48.82	-41.20	-7.62
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	4.71	-53.35	-57.14	-55.70			-48.64	-41.20	-7.44
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	7.72	-55.12	-61.58	-61.03	-60.31	-61.80	-47.40	-41.20	-6.20
802.11be EHT160_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	4.71	-47.73	-47.73				-43.02	-41.20	-1.82
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	4.71	-49.58	-51.45	-54.15			-44.87	-41.20	-3.67
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	7.72	-51.31	-58.10	-56.51	-56.95	-57.95	-43.59	-41.20	-2.39

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.10025G	4.71	-61.02				-61.02	-56.31	-41.20	-15.11
5260MHz	Pass	1G	8G	AV	5.38113G	4.71	-60.53				-60.53	-55.82	-41.20	-14.62
5260MHz	Pass	1G	8G	PK	5.09763G	4.71	-51.86				-51.86	-47.15	-21.20	-25.95
5260MHz	Pass	1G	8G	PK	5.375G	4.71	-51.98				-51.98	-47.27	-21.20	-26.07
5260MHz	Pass	1G	8G	PK	5.92363G	4.71	-54.32				-54.32	-49.61	-27.00	-22.61
5260MHz	Pass	1G	8G	PK	6.46788G	4.71	-54.04				-54.04	-49.33	-27.00	-22.33
5300MHz	Pass	1G	8G	AV	5.09238G	4.71	-61.07				-61.07	-56.36	-41.20	-15.16
5300MHz	Pass	1G	8G	AV	5.382G	4.71	-60.17				-60.17	-55.46	-41.20	-14.26
5300MHz	Pass	1G	8G	PK	5.09763G	4.71	-52.37				-52.37	-47.66	-21.20	-26.46
5300MHz	Pass	1G	8G	PK	5.382G	4.71	-50.58				-50.58	-45.87	-21.20	-24.67
5300MHz	Pass	1G	8G	PK	5.96738G	4.71	-56.41				-56.41	-51.70	-27.00	-24.70
5300MHz	Pass	1G	8G	PK	6.29463G	4.71	-54.56				-54.56	-49.85	-27.00	-22.85
5320MHz	Pass	1G	8G	AV	5.09325G	4.71	-61.32				-61.32	-56.61	-41.20	-15.41
5320MHz	Pass	1G	8G	AV	5.38463G	4.71	-58.20				-58.20	-53.49	-41.20	-12.29
5320MHz	Pass	1G	8G	PK	5.10288G	4.71	-52.24				-52.24	-47.53	-21.20	-26.33
5320MHz	Pass	1G	8G	PK	5.3715G	4.71	-49.47				-49.47	-44.76	-21.20	-23.56
5320MHz	Pass	1G	8G	PK	5.613G	4.71	-55.39				-55.39	-50.68	-27.00	-23.68
5320MHz	Pass	1G	8G	PK	6.24913G	4.71	-54.78				-54.78	-50.07	-27.00	-23.07
802.11be EHT20_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.10375G	4.71	-60.96				-60.96	-56.25	-41.20	-15.05
5260MHz	Pass	1G	8G	AV	5.38288G	4.71	-60.24				-60.24	-55.53	-41.20	-14.33
5260MHz	Pass	1G	8G	PK	5.10025G	4.71	-51.88				-51.88	-47.17	-21.20	-25.97
5260MHz	Pass	1G	8G	PK	5.38025G	4.71	-52.00				-52.00	-47.29	-21.20	-26.09
5260MHz	Pass	1G	8G	PK	5.92538G	4.71	-56.55				-56.55	-51.84	-27.00	-24.84
5260MHz	Pass	1G	8G	PK	6.45038G	4.71	-55.19				-55.19	-50.48	-27.00	-23.48
5300MHz	Pass	1G	8G	AV	5.0915G	4.71	-61.42				-61.42	-56.71	-41.20	-15.51
5300MHz	Pass	1G	8G	AV	5.37675G	4.71	-59.85				-59.85	-55.14	-41.20	-13.94
5300MHz	Pass	1G	8G	PK	5.10375G	4.71	-52.25				-52.25	-47.54	-21.20	-26.34
5300MHz	Pass	1G	8G	PK	5.37675G	4.71	-50.16				-50.16	-45.45	-21.20	-24.25
5300MHz	Pass	1G	8G	PK	5.97G	4.71	-56.39				-56.39	-51.68	-27.00	-24.68
5300MHz	Pass	1G	8G	PK	6.45738G	4.71	-55.07				-55.07	-50.36	-27.00	-23.36
5320MHz	Pass	1G	8G	AV	5.09325G	4.71	-60.36				-60.36	-55.65	-41.20	-14.45
5320MHz	Pass	1G	8G	AV	5.37413G	4.71	-57.50				-57.50	-52.79	-41.20	-11.59
5320MHz	Pass	1G	8G	PK	5.11163G	4.71	-51.50				-51.50	-46.79	-21.20	-25.59
5320MHz	Pass	1G	8G	PK	5.37588G	4.71	-47.81				-47.81	-43.10	-21.20	-21.90
5320MHz	Pass	1G	8G	PK	5.95338G	4.71	-56.52				-56.52	-51.81	-27.00	-24.81
802.11be EHT40_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.095G	4.71	-60.40				-60.40	-55.69	-41.20	-14.49
5270MHz	Pass	1G	8G	AV	5.37938G	4.71	-59.64				-59.64	-54.93	-41.20	-13.73
5270MHz	Pass	1G	8G	PK	5.08888G	4.71	-49.97				-49.97	-45.26	-21.20	-24.06
5270MHz	Pass	1G	8G	PK	5.38638G	4.71	-49.67				-49.67	-44.96	-21.20	-23.76
5270MHz	Pass	1G	8G	PK	5.53863G	4.71	-56.40				-56.40	-51.69	-27.00	-24.69
5270MHz	Pass	1G	8G	PK	6.38125G	4.71	-54.83				-54.83	-50.12	-27.00	-23.12
5310MHz	Pass	1G	8G	AV	5.09763G	4.71	-61.51				-61.51	-56.80	-41.20	-15.60
5310MHz	Pass	1G	8G	AV	5.37063G	4.71	-58.40				-58.40	-53.69	-41.20	-12.49
5310MHz	Pass	1G	8G	PK	5.08713G	4.71	-51.31				-51.31	-46.60	-21.20	-25.40
5310MHz	Pass	1G	8G	PK	5.37063G	4.71	-48.20				-48.20	-43.49	-21.20	-22.29
5310MHz	Pass	1G	8G	PK	5.94288G	4.71	-54.56				-54.56	-49.85	-27.00	-22.85
802.11be EHT80_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.0915G	4.71	-58.50				-58.50	-53.79	-41.20	-12.59
5290MHz	Pass	1G	8G	AV	5.37063G	4.71	-53.53				-53.53	-48.82	-41.20	-7.62
5290MHz	Pass	1G	8G	PK	5.10288G	4.71	-48.77				-48.77	-44.06	-21.20	-22.86
5290MHz	Pass	1G	8G	PK	5.3715G	4.71	-42.28				-42.28	-37.57	-21.20	-16.37
5290MHz	Pass	1G	8G	PK	5.88338G	4.71	-56.15				-56.15	-51.44	-27.00	-24.44
802.11be EHT160_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11513G	4.71	-47.73				-47.73	-43.02	-41.20	-1.82
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38463G	4.71	-50.67				-50.67	-45.96	-41.20	-4.76
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.12563G	4.71	-39.16				-39.16	-34.45	-21.20	-13.25
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.37325G	4.71	-42.44				-42.44	-37.73	-21.20	-16.53
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.88163G	4.71	-55.89				-55.89	-51.18	-27.00	-24.18
802.11a_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.10288G	4.71	-61.78	-61.52			-58.64	-53.93	-41.20	-12.73
5260MHz	Pass	1G	8G	AV	5.382G	4.71	-58.98	-59.33			-56.14	-51.43	-41.20	-10.23
5260MHz	Pass	1G	8G	PK	5.08363G	4.71	-51.13	-55.24			-49.71	-45.00	-21.20	-23.80
5260MHz	Pass	1G	8G	PK	5.38638G	4.71	-51.46	-50.32			-47.84	-43.13	-21.20	-21.93
5260MHz	Pass	1G	8G	PK	5.60513G	4.71	-56.21	-58.06			-54.03	-49.32	-27.00	-22.32
5260MHz	Pass	1G	8G	PK	6.992G	4.71	-56.46	-54.98			-52.65	-47.94	-27.00	-20.94
5300MHz	Pass	1G	8G	AV	5.08713G	4.71	-62.35	-63.03			-59.67	-54.96	-41.20	-13.76

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5300MHz	Pass	1G	8G	AV	5.382G	4.71	-61.28	-61.72			-58.48	-53.77	-41.20	-12.57
5300MHz	Pass	1G	8G	PK	5.08013G	4.71	-55.31	-52.60			-50.74	-46.03	-21.20	-24.83
5300MHz	Pass	1G	8G	PK	5.38375G	4.71	-51.37	-55.60			-49.98	-45.27	-21.20	-24.07
5300MHz	Pass	1G	8G	PK	5.72588G	4.71	-59.81	-55.78			-54.33	-49.62	-27.00	-22.62
5300MHz	Pass	1G	8G	PK	6.50113G	4.71	-56.18	-55.78			-52.97	-48.26	-27.00	-21.26
5320MHz	Pass	1G	8G	AV	5.08625G	4.71	-61.70	-63.54			-59.51	-54.80	-41.20	-13.60
5320MHz	Pass	1G	8G	AV	5.38113G	4.71	-59.18	-60.93			-56.96	-52.25	-41.20	-11.05
5320MHz	Pass	1G	8G	PK	5.08363G	4.71	-53.92	-53.67			-50.78	-46.07	-21.20	-24.87
5320MHz	Pass	1G	8G	PK	5.38025G	4.71	-51.64	-50.51			-48.03	-43.32	-21.20	-22.12
5320MHz	Pass	1G	8G	PK	5.93413G	4.71	-58.21	-56.22			-54.09	-49.38	-27.00	-22.38
5320MHz	Pass	1G	8G	PK	6.4635G	4.71	-58.75	-53.74			-52.55	-47.84	-27.00	-20.84
802.11be EHT20_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.09763G	4.71	-61.20	-61.06			-58.12	-53.41	-41.20	-12.21
5260MHz	Pass	1G	8G	AV	5.382G	4.71	-59.42	-60.60			-56.96	-52.25	-41.20	-11.05
5260MHz	Pass	1G	8G	PK	5.09938G	4.71	-53.94	-51.23			-49.37	-44.66	-21.20	-23.46
5260MHz	Pass	1G	8G	PK	5.38375G	4.71	-50.90	-51.42			-48.14	-43.43	-21.20	-22.23
5260MHz	Pass	1G	8G	PK	5.96825G	4.71	-58.00	-56.51			-54.18	-49.47	-27.00	-22.47
5260MHz	Pass	1G	8G	PK	6.29375G	4.71	-54.52	-56.87			-52.53	-47.82	-27.00	-20.82
5300MHz	Pass	1G	8G	AV	5.08975G	4.71	-61.63	-63.67			-59.52	-54.81	-41.20	-13.61
5300MHz	Pass	1G	8G	AV	5.375G	4.71	-61.46	-61.74			-58.59	-53.88	-41.20	-12.68
5300MHz	Pass	1G	8G	PK	5.102G	4.71	-52.81	-55.32			-50.88	-46.17	-21.20	-24.97
5300MHz	Pass	1G	8G	PK	5.375G	4.71	-52.63	-51.97			-49.28	-44.57	-21.20	-23.37
5300MHz	Pass	1G	8G	PK	5.93938G	4.71	-57.06	-57.13			-54.08	-49.37	-27.00	-22.37
5300MHz	Pass	1G	8G	PK	6.99113G	4.71	-54.88	-56.91			-52.77	-48.06	-27.00	-21.06
5320MHz	Pass	1G	8G	AV	5.03463G	4.71	-67.21	-68.12			-64.63	-59.92	-41.20	-18.72
5320MHz	Pass	1G	8G	AV	5.38113G	4.71	-66.49	-67.32			-63.87	-59.16	-41.20	-17.96
5320MHz	Pass	1G	8G	AV	7.48725G	4.71	-65.66	-65.58			-62.61	-57.90	-41.20	-16.70
5320MHz	Pass	1G	8G	PK	5.01625G	4.71	-59.94	-57.72			-55.68	-50.97	-21.20	-29.77
5320MHz	Pass	1G	8G	PK	5.38288G	4.71	-55.90	-58.16			-53.87	-49.16	-21.20	-27.96
5320MHz	Pass	1G	8G	PK	5.48875G	4.71	-56.18	-57.94			-53.96	-49.25	-27.00	-22.25
5320MHz	Pass	1G	8G	PK	6.29025G	4.71	-57.87	-53.53			-52.17	-47.46	-27.00	-20.46
802.11be EHT40_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.08625G	4.71	-60.36	-61.58			-57.92	-53.21	-41.20	-12.01
5270MHz	Pass	1G	8G	AV	5.38463G	4.71	-60.52	-60.49			-57.49	-52.78	-41.20	-11.58
5270MHz	Pass	1G	8G	PK	5.09763G	4.71	-52.54	-51.89			-49.19	-44.48	-21.20	-23.28
5270MHz	Pass	1G	8G	PK	5.38288G	4.71	-51.19	-53.33			-49.12	-44.41	-21.20	-23.21
5270MHz	Pass	1G	8G	PK	5.977G	4.71	-57.17	-56.09			-53.59	-48.88	-27.00	-21.88
5270MHz	Pass	1G	8G	PK	6.36725G	4.71	-56.30	-55.92			-53.10	-48.39	-27.00	-21.39
5310MHz	Pass	1G	8G	AV	5.08625G	4.71	-62.37	-63.28			-59.79	-55.08	-41.20	-13.88
5310MHz	Pass	1G	8G	AV	5.375G	4.71	-59.49	-61.13			-57.22	-52.51	-41.20	-11.31
5310MHz	Pass	1G	8G	PK	5.08188G	4.71	-52.44	-57.39			-51.23	-46.52	-21.20	-25.32
5310MHz	Pass	1G	8G	PK	5.37938G	4.71	-51.22	-52.46			-48.79	-44.08	-21.20	-22.88
5310MHz	Pass	1G	8G	PK	5.98313G	4.71	-58.57	-55.19			-53.55	-48.84	-27.00	-21.84
5310MHz	Pass	1G	8G	PK	6.45388G	4.71	-55.39	-55.22			-52.29	-47.58	-27.00	-20.58
802.11be EHT80_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.09588G	4.71	-58.96	-61.45			-57.02	-52.31	-41.20	-11.11
5290MHz	Pass	1G	8G	AV	5.36975G	4.71	-57.14	-55.70			-53.35	-48.64	-41.20	-7.44
5290MHz	Pass	1G	8G	PK	5.07925G	4.71	-51.66	-51.77			-48.70	-43.99	-21.20	-22.79
5290MHz	Pass	1G	8G	PK	5.37413G	4.71	-49.48	-45.75			-44.22	-39.51	-21.20	-18.31
5290MHz	Pass	1G	8G	PK	5.84313G	4.71	-56.19	-56.94			-53.54	-48.83	-27.00	-21.83
802.11be EHT160_Nss1(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	1G	8G	AV	5.1125G	4.71	-48.02	-55.23			-47.26	-42.55	-41.20	-1.35
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11863G	4.71	-51.45	-54.15			-49.58	-44.87	-41.20	-3.67
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38113G	4.71	-52.27	-53.19			-49.70	-44.99	-41.20	-3.79
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.11425G	4.71	-43.09	-45.90			-41.26	-36.55	-21.20	-15.35
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38725G	4.71	-43.90	-45.28			-41.53	-36.82	-21.20	-15.62
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.58588G	4.71	-56.47	-58.01			-54.16	-49.45	-27.00	-22.45
802.11a_Nss1(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.0985G	7.72	-64.81	-65.34	-64.43	-60.69	-57.36	-49.64	-41.20	-8.44
5260MHz	Pass	1G	8G	AV	5.382G	7.72	-60.66	-61.03	-64.82	-65.39	-56.45	-48.73	-41.20	-7.53
5260MHz	Pass	1G	8G	PK	5.09938G	7.72	-55.82	-54.99	-56.35	-52.91	-48.79	-41.07	-21.20	-19.87
5260MHz	Pass	1G	8G	PK	5.37675G	7.72	-52.11	-50.54	-55.08	-57.66	-47.03	-39.31	-21.20	-18.11
5260MHz	Pass	1G	8G	PK	5.92975G	7.72	-56.54	-55.66	-58.20	-59.23	-51.17	-43.45	-27.00	-16.45
5260MHz	Pass	1G	8G	PK	6.47925G	7.72	-54.05	-55.53	-57.37	-56.75	-49.71	-41.99	-27.00	-14.99
5300MHz	Pass	1G	8G	AV	5.09675G	7.72	-64.54	-64.97	-65.58	-66.30	-59.28	-51.56	-41.20	-10.36
5300MHz	Pass	1G	8G	AV	5.3785G	7.72	-63.87	-63.61	-63.80	-63.82	-57.75	-50.03	-41.20	-8.83
5300MHz	Pass	1G	8G	PK	5.095G	7.72	-55.53	-58.97	-57.85	-55.50	-50.69	-42.97	-21.20	-21.77
5300MHz	Pass	1G	8G	PK	5.37413G	7.72	-55.94	-54.63	-54.50	-57.16	-49.41	-41.69	-21.20	-20.49
5300MHz	Pass	1G	8G	PK	5.613G	7.72	-58.72	-57.90	-56.02	-57.14	-51.31	-43.59	-27.00	-16.59
5300MHz	Pass	1G	8G	PK	6.45563G	7.72	-55.81	-55.45	-57.57	-57.08	-50.37	-42.65	-27.00	-15.65


Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5320MHz	Pass	1G	8G	AV	5.088G	7.72	-65.55	-64.98	-63.70	-64.95	-58.72	-51.00	-41.20	-9.80
5320MHz	Pass	1G	8G	AV	5.38375G	7.72	-61.30	-63.09	-63.54	-63.20	-56.67	-48.95	-41.20	-7.75
5320MHz	Pass	1G	8G	PK	5.08888G	7.72	-56.40	-59.41	-55.70	-55.22	-50.39	-42.67	-21.20	-21.47
5320MHz	Pass	1G	8G	PK	5.38288G	7.72	-53.89	-52.87	-54.94	-57.08	-48.41	-40.69	-21.20	-19.49
5320MHz	Pass	1G	8G	PK	5.66288G	7.72	-59.94	-55.88	-57.03	-60.70	-51.92	-44.20	-27.00	-17.20
5320MHz	Pass	1G	8G	PK	6.50813G	7.72	-54.71	-57.36	-58.59	-54.82	-50.05	-42.33	-27.00	-15.33
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.09763G	7.72	-63.86	-64.74	-64.33	-60.83	-57.12	-49.40	-41.20	-8.20
5260MHz	Pass	1G	8G	AV	5.3855G	7.72	-60.92	-61.09	-64.08	-65.42	-56.45	-48.73	-41.20	-7.53
5260MHz	Pass	1G	8G	PK	5.10025G	7.72	-55.49	-56.15	-56.35	-52.16	-48.65	-40.93	-21.20	-19.73
5260MHz	Pass	1G	8G	PK	5.38375G	7.72	-53.03	-49.99	-57.22	-57.25	-47.26	-39.54	-21.20	-18.34
5260MHz	Pass	1G	8G	PK	5.50013G	7.72	-55.01	-58.25	-61.58	-57.63	-51.50	-43.78	-27.00	-16.78
5260MHz	Pass	1G	8G	PK	6.481G	7.72	-55.88	-53.37	-57.85	-58.47	-49.89	-42.17	-27.00	-15.17
5300MHz	Pass	1G	8G	AV	5.0845G	7.72	-63.99	-65.98	-64.95	-66.09	-59.15	-51.43	-41.20	-10.23
5300MHz	Pass	1G	8G	AV	5.38113G	7.72	-63.38	-64.04	-63.95	-64.31	-57.89	-50.17	-41.20	-8.97
5300MHz	Pass	1G	8G	PK	5.07925G	7.72	-58.15	-53.94	-57.30	-57.34	-50.33	-42.61	-21.20	-21.41
5300MHz	Pass	1G	8G	PK	5.38375G	7.72	-55.03	-56.58	-54.70	-57.72	-49.59	-41.87	-21.20	-20.67
5300MHz	Pass	1G	8G	PK	5.984G	7.72	-57.48	-56.47	-56.05	-59.23	-51.13	-43.41	-27.00	-16.41
5300MHz	Pass	1G	8G	PK	6.50025G	7.72	-55.66	-57.91	-54.98	-55.78	-49.93	-42.21	-27.00	-15.21
5320MHz	Pass	1G	8G	AV	5.088G	7.72	-65.00	-65.62	-63.89	-65.12	-58.84	-51.12	-41.20	-9.92
5320MHz	Pass	1G	8G	AV	5.37938G	7.72	-62.57	-62.17	-62.89	-63.31	-56.69	-48.97	-41.20	-7.77
5320MHz	Pass	1G	8G	PK	5.08188G	7.72	-55.18	-56.40	-55.62	-56.15	-49.79	-42.07	-21.20	-20.87
5320MHz	Pass	1G	8G	PK	5.3785G	7.72	-55.78	-54.26	-53.96	-53.54	-48.29	-40.57	-21.20	-19.37
5320MHz	Pass	1G	8G	PK	5.94113G	7.72	-59.16	-55.87	-57.63	-59.60	-51.79	-44.07	-27.00	-17.07
5320MHz	Pass	1G	8G	PK	6.485G	7.72	-55.24	-55.28	-58.51	-55.34	-49.88	-42.16	-27.00	-15.16
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.10375G	7.72	-63.56	-64.57	-63.39	-61.44	-57.06	-49.34	-41.20	-8.14
5270MHz	Pass	1G	8G	AV	5.3785G	7.72	-62.39	-63.42	-63.34	-63.29	-57.07	-49.35	-41.20	-8.15
5270MHz	Pass	1G	8G	PK	5.09938G	7.72	-54.39	-56.00	-55.14	-52.12	-48.14	-40.42	-21.20	-19.22
5270MHz	Pass	1G	8G	PK	5.37675G	7.72	-53.68	-53.17	-56.20	-55.47	-48.43	-40.71	-21.20	-19.51
5270MHz	Pass	1G	8G	PK	5.9875G	7.72	-60.08	-56.28	-57.98	-58.19	-51.91	-44.19	-27.00	-17.19
5270MHz	Pass	1G	8G	PK	6.50288G	7.72	-56.39	-54.91	-57.18	-57.50	-50.35	-42.63	-27.00	-15.63
5310MHz	Pass	1G	8G	AV	5.088G	7.72	-65.03	-65.99	-64.17	-65.13	-59.01	-51.29	-41.20	-10.09
5310MHz	Pass	1G	8G	AV	5.38025G	7.72	-63.19	-63.86	-63.64	-65.15	-57.88	-50.16	-41.20	-8.96
5310MHz	Pass	1G	8G	PK	5.08538G	7.72	-56.77	-57.42	-56.32	-56.94	-50.82	-43.10	-21.20	-21.90
5310MHz	Pass	1G	8G	PK	5.382G	7.72	-54.63	-56.57	-53.82	-55.42	-48.97	-41.25	-21.20	-20.05
5310MHz	Pass	1G	8G	PK	5.95688G	7.72	-58.70	-57.46	-55.85	-58.16	-51.38	-43.66	-27.00	-16.66
5310MHz	Pass	1G	8G	PK	6.46613G	7.72	-56.30	-55.55	-57.28	-56.65	-50.38	-42.66	-27.00	-15.66
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.09063G	7.72	-62.58	-63.78	-62.64	-63.94	-57.17	-49.45	-41.20	-8.25
5290MHz	Pass	1G	8G	AV	5.37325G	7.72	-61.58	-61.03	-60.31	-61.80	-55.12	-47.40	-41.20	-6.20
5290MHz	Pass	1G	8G	PK	5.10113G	7.72	-54.55	-56.23	-53.65	-54.92	-48.72	-41.00	-21.20	-19.80
5290MHz	Pass	1G	8G	PK	5.375G	7.72	-53.15	-49.24	-52.81	-53.82	-45.83	-38.11	-21.20	-16.91
5290MHz	Pass	1G	8G	PK	5.893G	7.72	-57.60	-57.38	-57.76	-57.94	-51.64	-43.92	-27.00	-16.92
5290MHz	Pass	1G	8G	PK	6.46525G	7.72	-55.69	-57.18	-57.85	-54.62	-50.13	-42.41	-27.00	-15.41
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.10988G	7.72	-58.10	-56.51	-56.95	-57.95	-51.31	-43.59	-41.20	-2.39
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38113G	7.72	-60.01	-57.99	-57.85	-60.36	-52.88	-45.16	-41.20	-3.96
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.10725G	7.72	-47.62	-48.76	-50.17	-49.23	-42.83	-35.11	-21.20	-13.91
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38288G	7.72	-51.62	-48.66	-48.91	-49.77	-43.58	-35.86	-21.20	-14.66
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.92625G	7.72	-56.96	-57.37	-58.57	-56.74	-51.33	-43.61	-27.00	-16.61

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5260MHz

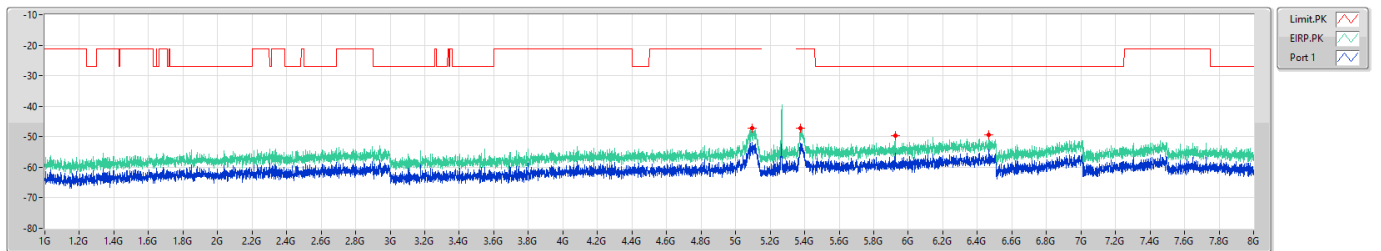


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.09763G	-47.15	-21.20	-25.95	4.71	0.00	-51.86	-51.86
1G	8G	1M	PK	5.375G	-47.27	-21.20	-26.07	4.71	0.00	-51.98	-51.98
1G	8G	1M	PK	5.92363G	-49.61	-27.00	-22.61	4.71	0.00	-54.32	-54.32
1G	8G	1M	PK	6.46786G	-49.33	-27.00	-22.33	4.71	0.00	-54.04	-54.04

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5260MHz

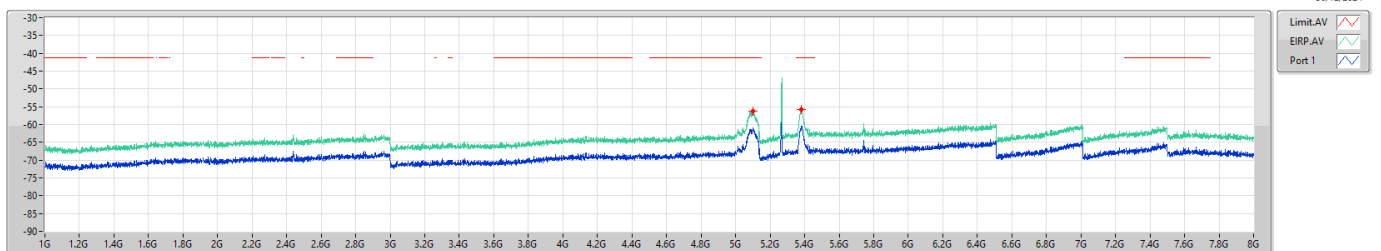


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10025G	-56.31	-41.20	-15.11	4.71	0.00	-61.02	-61.02
1G	8G	1M	AV	5.38113G	-55.82	-41.20	-14.62	4.71	0.00	-60.53	-60.53

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5300MHz

30/12/2024

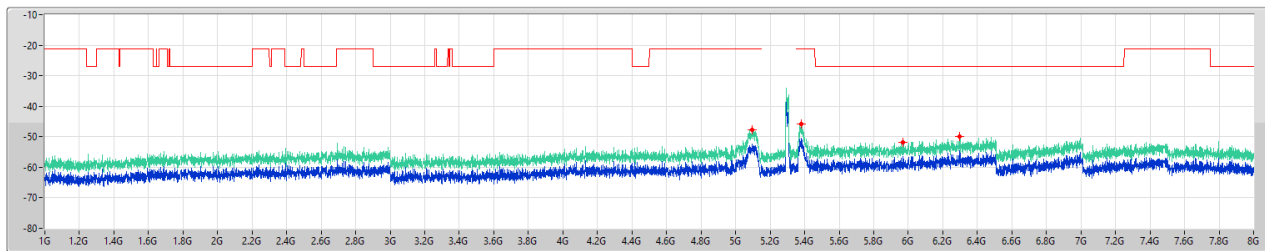


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.09763G	-47.66	-21.20	-26.46	4.71	0.00	-52.37	-52.37
1G	8G	1M	PK	5.382G	-45.87	-21.20	-24.67	4.71	0.00	-50.58	-50.58
1G	8G	1M	PK	5.96738G	-51.70	-27.00	-24.70	4.71	0.00	-56.41	-56.41
1G	8G	1M	PK	6.29463G	-49.85	-27.00	-22.85	4.71	0.00	-54.56	-54.56

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5300MHz

30/12/2024

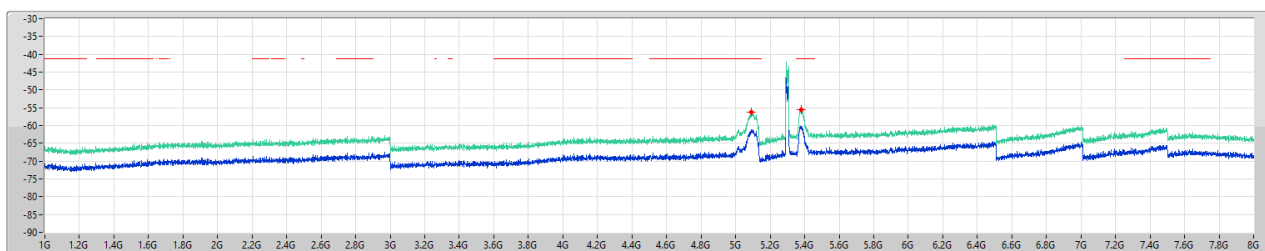


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09238G	-56.36	-41.20	-15.16	4.71	0.00	-61.07	-61.07
1G	8G	1M	AV	5.382G	-55.46	-41.20	-14.26	4.71	0.00	-60.17	-60.17

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5320MHz

30/12/2024

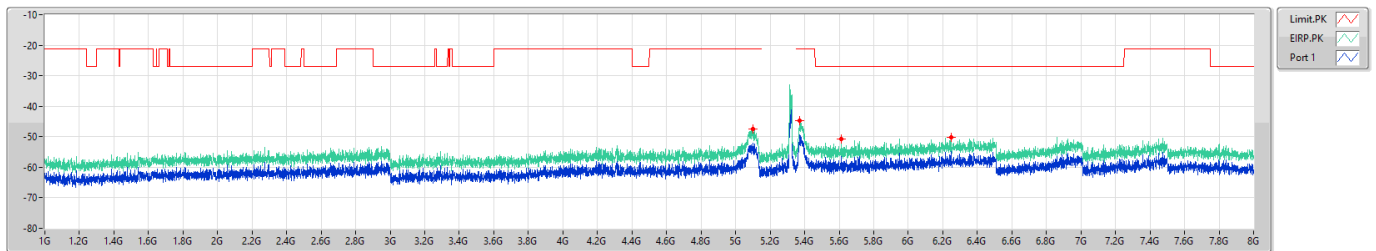


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10288G	-47.53	-21.20	-26.33	4.71	0.00	-52.24	-52.24
1G	8G	1M	PK	5.3715G	-44.76	-21.20	-23.56	4.71	0.00	-49.47	-49.47
1G	8G	1M	PK	5.613G	-50.68	-27.00	-23.68	4.71	0.00	-55.39	-55.39
1G	8G	1M	PK	6.24913G	-50.07	-27.00	-23.07	4.71	0.00	-54.78	-54.78

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5320MHz

30/12/2024

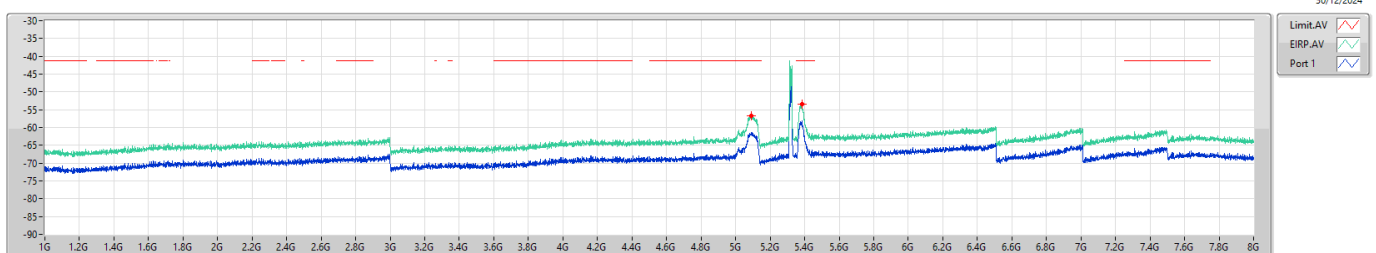


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09325G	-56.61	-41.20	-15.41	4.71	0.00	-61.32	-61.32
1G	8G	1M	AV	5.38463G	-53.49	-41.20	-12.29	4.71	0.00	-58.20	-58.20

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5260MHz

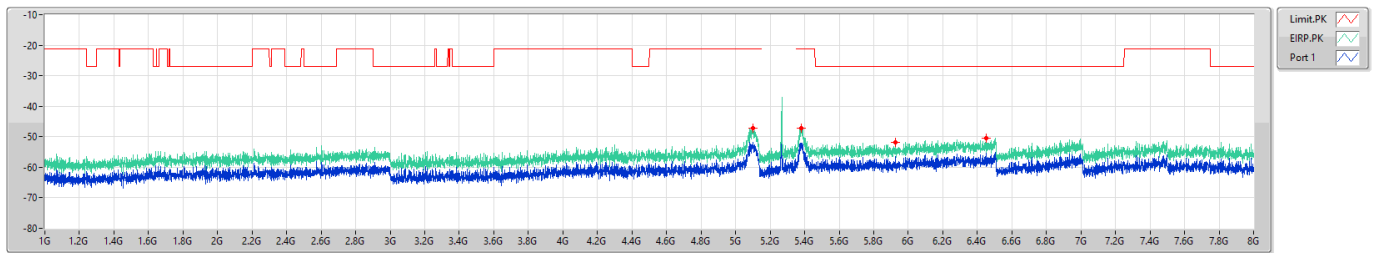


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10025G	-47.17	-21.20	-25.97	4.71	0.00	-51.88	-51.88
1G	8G	1M	PK	5.38025G	-47.29	-21.20	-26.09	4.71	0.00	-52.00	-52.00
1G	8G	1M	PK	5.92538G	-51.84	-27.00	-24.84	4.71	0.00	-56.55	-56.55
1G	8G	1M	PK	6.45038G	-50.48	-27.00	-23.48	4.71	0.00	-55.19	-55.19

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5260MHz

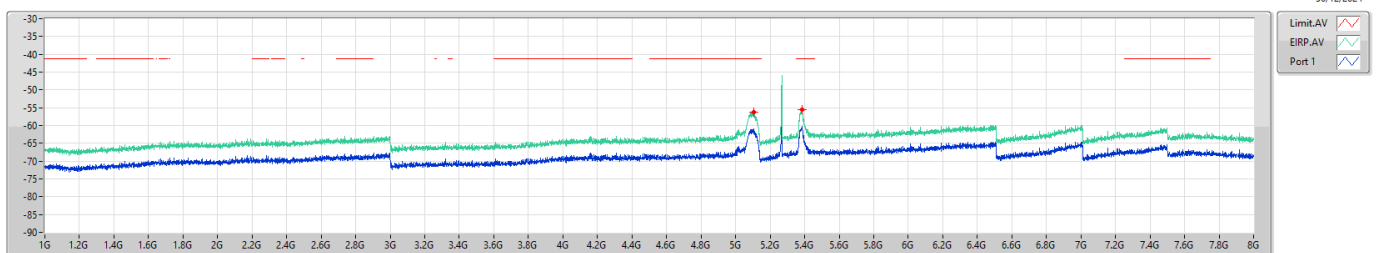


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10375G	-56.25	-41.20	-15.05	4.71	0.00	-60.96	-60.96
1G	8G	1M	AV	5.38288G	-55.53	-41.20	-14.33	4.71	0.00	-60.24	-60.24

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5300MHz

30/12/2024

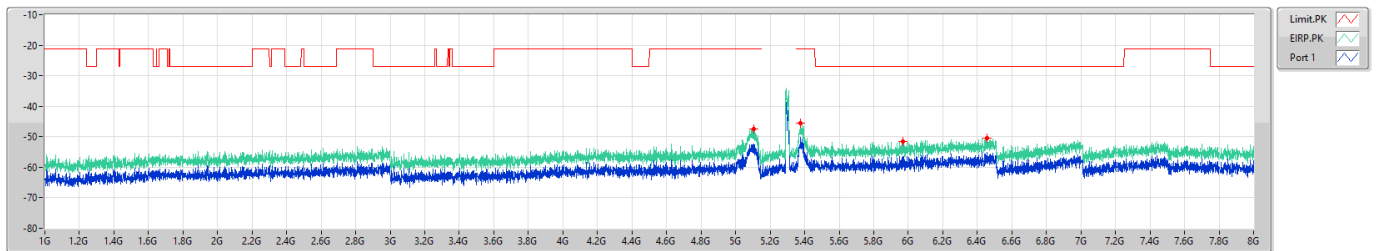


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10375G	-47.54	-21.20	-26.34	4.71	0.00	-52.25	-52.25
1G	8G	1M	PK	5.37675G	-45.45	-21.20	-24.25	4.71	0.00	-50.16	-50.16
1G	8G	1M	PK	5.97G	-51.68	-27.00	-24.68	4.71	0.00	-56.39	-56.39
1G	8G	1M	PK	6.45738G	-50.36	-27.00	-23.36	4.71	0.00	-55.07	-55.07

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5300MHz

30/12/2024

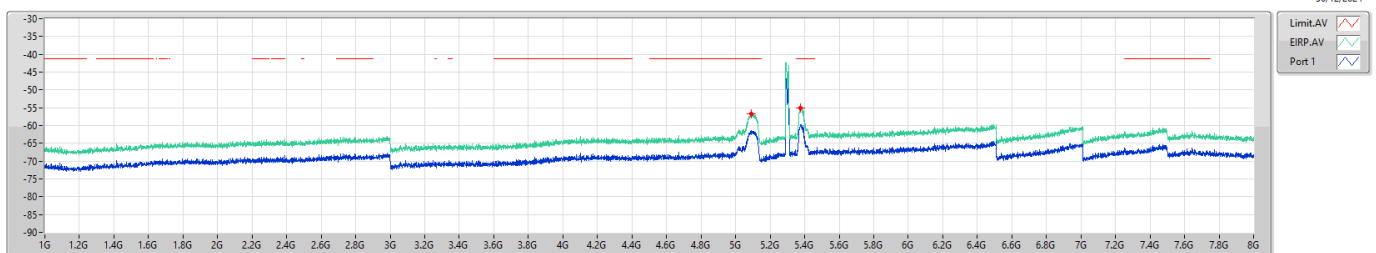


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.0915G	-56.71	-41.20	-15.51	4.71	0.00	-61.42	-61.42
1G	8G	1M	AV	5.37675G	-55.14	-41.20	-13.94	4.71	0.00	-59.85	-59.85

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5320MHz

30/12/2024

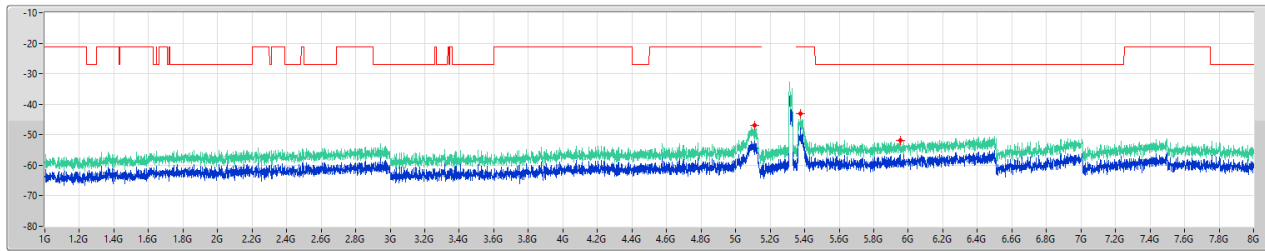


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.11163G	-46.79	-21.20	-25.59	4.71	0.00	-51.50	-51.50
1G	8G	1M	PK	5.37586G	-43.10	-21.20	-21.90	4.71	0.00	-47.81	-47.81
1G	8G	1M	PK	5.95338G	-51.81	-27.00	-24.81	4.71	0.00	-56.52	-56.52

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5320MHz

30/12/2024

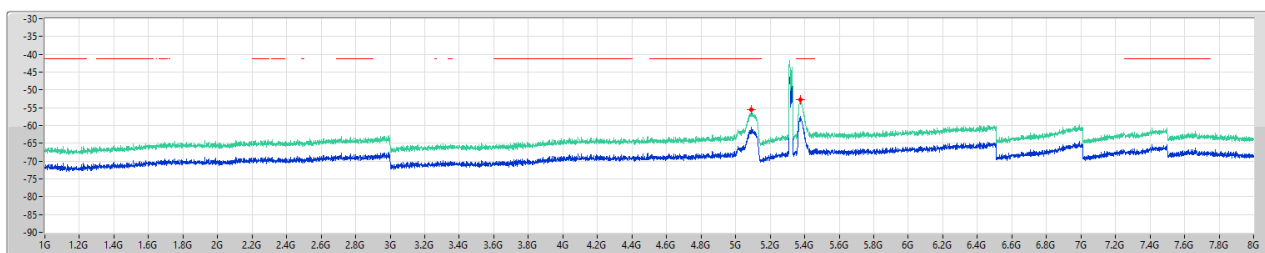


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09325G	-55.65	-41.20	-14.45	4.71	0.00	-60.36	-60.36
1G	8G	1M	AV	5.37413G	-52.79	-41.20	-11.59	4.71	0.00	-57.50	-57.50

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [PK]

5270MHz

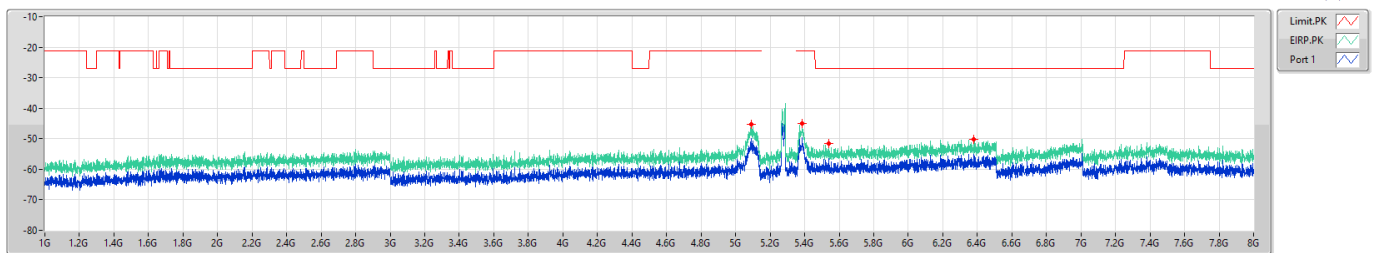


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08888G	-45.25	-21.20	-24.06	4.71	0.00	-49.97	-49.97
1G	8G	1M	PK	5.38638G	-44.96	-21.20	-23.76	4.71	0.00	-49.67	-49.67
1G	8G	1M	PK	5.53863G	-51.69	-27.00	-24.69	4.71	0.00	-56.40	-56.40
1G	8G	1M	PK	6.38125G	-50.12	-27.00	-23.12	4.71	0.00	-54.83	-54.83

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [AV]

5270MHz

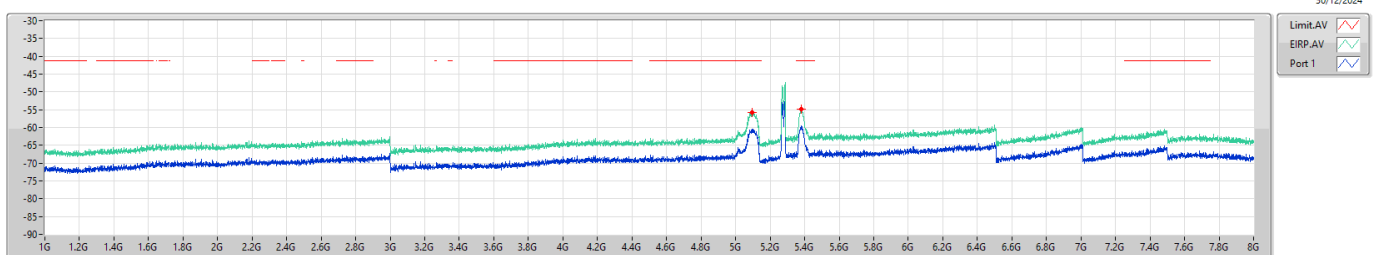


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.095G	-55.69	-41.20	-14.49	4.71	0.00	-60.40	-60.40
1G	8G	1M	AV	5.37938G	-54.93	-41.20	-13.73	4.71	0.00	-59.64	-59.64

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [PK]

5310MHz

30/12/2024

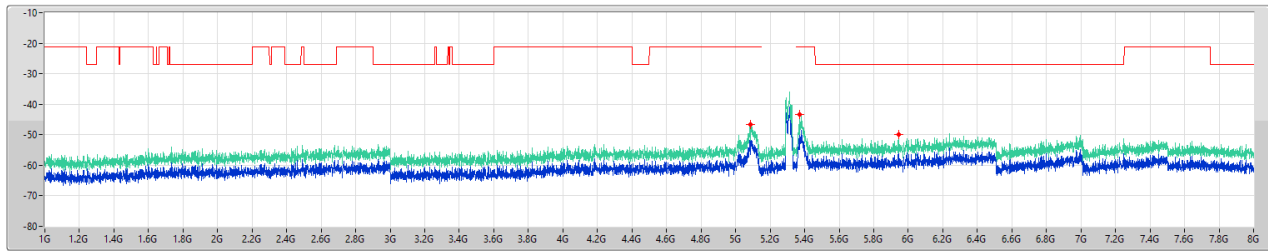


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08713G	-46.60	-21.20	-25.40	4.71	0.00	-51.31	-51.31
1G	8G	1M	PK	5.37063G	-43.49	-21.20	-22.29	4.71	0.00	-48.20	-48.20
1G	8G	1M	PK	5.94286G	-49.85	-27.00	-22.85	4.71	0.00	-54.56	-54.56

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [AV]

5310MHz

30/12/2024

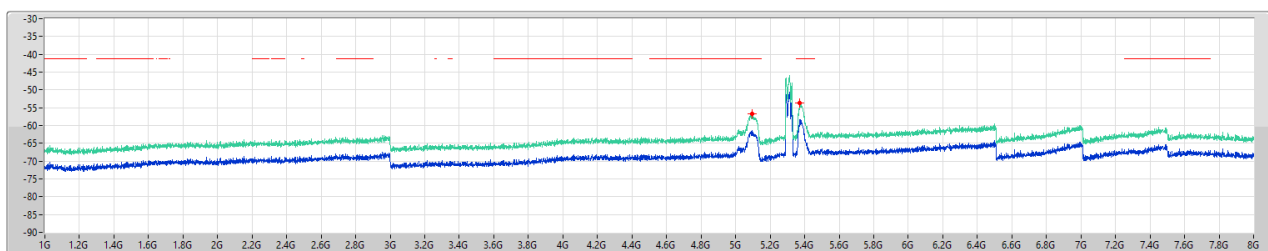


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09763G	-56.80	-41.20	-15.60	4.71	0.00	-61.51	-61.51
1G	8G	1M	AV	5.37063G	-53.69	-41.20	-12.49	4.71	0.00	-58.40	-58.40

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

CSE Other [PK]

5290MHz

30/12/2024

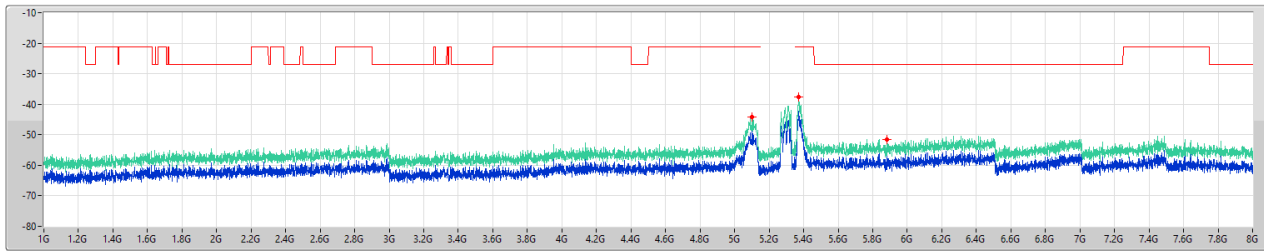

Limit.PK
EIRP.PK
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10288G	-44.06	-21.20	-22.86	4.71	0.00	-48.77	-48.77
1G	8G	1M	PK	5.3719G	-37.57	-21.20	-16.37	4.71	0.00	-42.28	-42.28
1G	8G	1M	PK	5.8838G	-51.44	-27.00	-24.44	4.71	0.00	-56.15	-56.15

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

CSE Other [AV]

5290MHz

30/12/2024

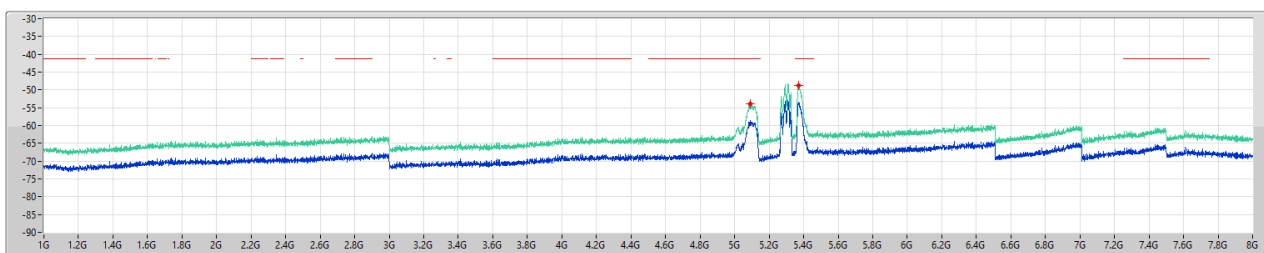

Limit.AV
EIRP.AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.0915G	-53.79	-41.20	-12.59	4.71	0.00	-58.50	-58.50
1G	8G	1M	AV	5.37063G	-48.82	-41.20	-7.62	4.71	0.00	-53.53	-53.53

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

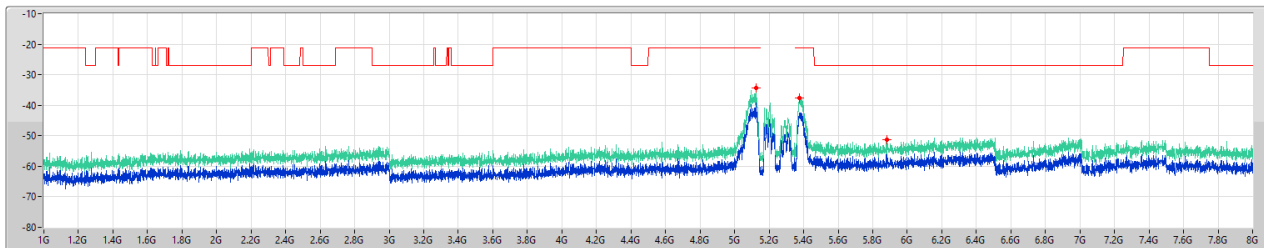

Limit.PK
EIRP.PK
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.12563G	-34.45	-21.20	-13.25	4.71	0.00	-39.16	-39.16
1G	8G	1M	PK	5.37325G	-37.73	-21.20	-16.53	4.71	0.00	-42.44	-42.44
1G	8G	1M	PK	5.88163G	-51.18	-27.00	-24.18	4.71	0.00	-55.89	-55.89

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

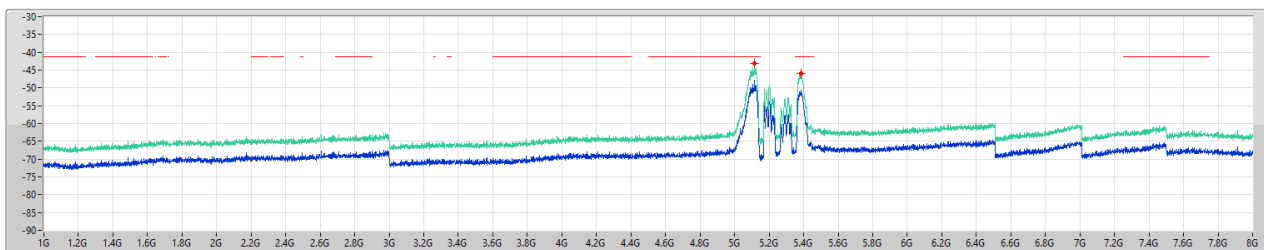

Limit.AV
EIRP.AV
Port 1


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.11513G	-43.02	-41.20	-1.82	4.71	0.00	-47.73	-47.73
1G	8G	1M	AV	5.38463G	-45.96	-41.20	-4.76	4.71	0.00	-50.67	-50.67

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5260MHz

30/12/2024

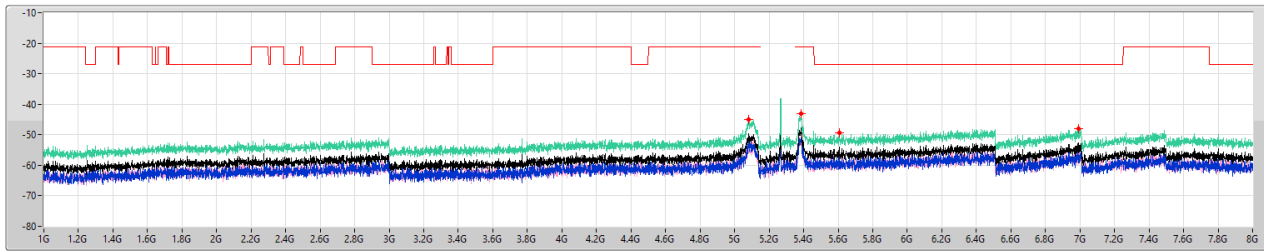


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08363G	-45.00	-21.20	-23.80	4.71	0.00	-49.71	-51.13	-55.24
1G	8G	1M	PK	5.38638G	-43.13	-21.20	-21.93	4.71	0.00	-47.84	-51.46	-50.32
1G	8G	1M	PK	5.60513G	-49.32	-27.00	-22.32	4.71	0.00	-54.03	-56.21	-58.06
1G	8G	1M	PK	6.992G	-47.94	-27.00	-20.94	4.71	0.00	-52.65	-56.46	-54.98

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5260MHz

30/12/2024

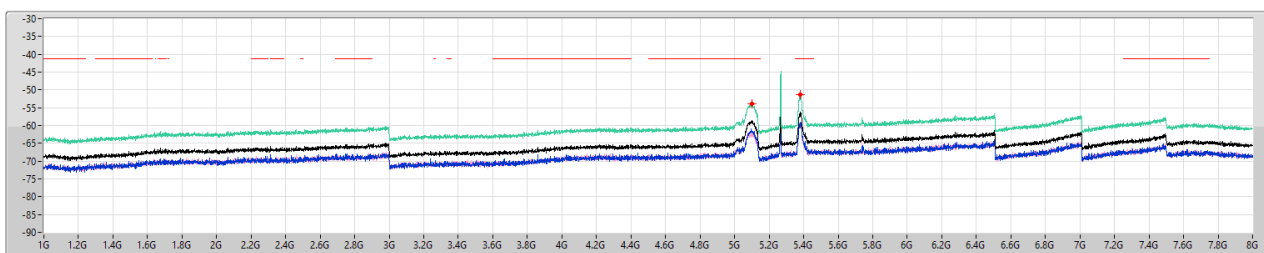


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.10288G	-53.93	-41.20	-12.73	4.71	0.00	-58.64	-61.78	-61.52
1G	8G	1M	AV	5.382G	-51.43	-41.20	-10.23	4.71	0.00	-56.14	-58.98	-59.33

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5300MHz

30/12/2024

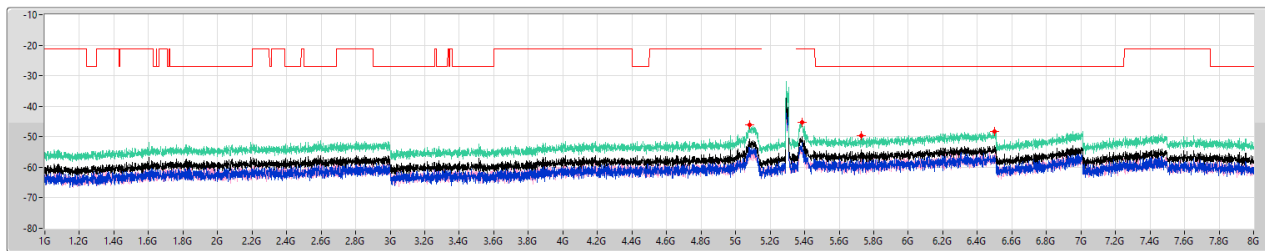


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08013G	-46.03	-21.20	-24.83	4.71	0.00	-50.74	-55.31	-52.60
1G	8G	1M	PK	5.38375G	-45.27	-21.20	-24.07	4.71	0.00	-49.98	-51.37	-55.60
1G	8G	1M	PK	5.72588G	-49.62	-27.00	-22.62	4.71	0.00	-54.33	-59.81	-55.78
1G	8G	1M	PK	6.50113G	-48.26	-27.00	-21.26	4.71	0.00	-52.97	-56.18	-55.78

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5300MHz

30/12/2024

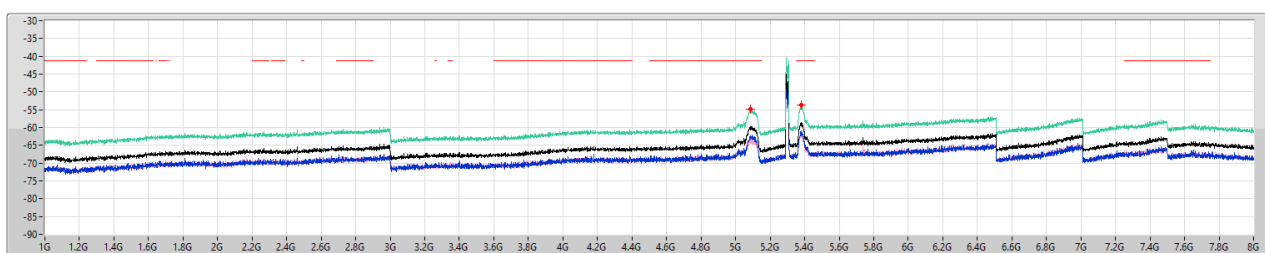


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08713G	-54.96	-41.20	-13.76	4.71	0.00	-59.67	-62.35	-63.03
1G	8G	1M	AV	5.382G	-53.77	-41.20	-12.57	4.71	0.00	-58.48	-61.28	-61.72

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5320MHz

30/12/2024

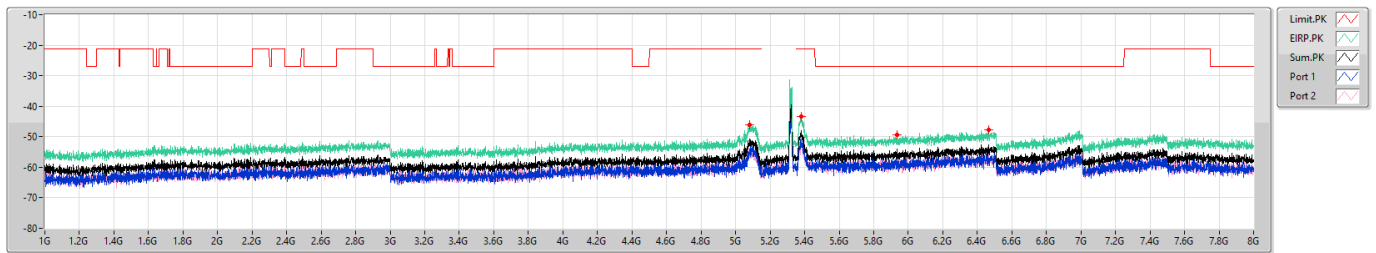


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08363G	-46.07	-21.20	-24.87	4.71	0.00	-50.78	-53.92	-53.67
1G	8G	1M	PK	5.38025G	-43.32	-21.20	-22.12	4.71	0.00	-48.03	-51.64	-50.51
1G	8G	1M	PK	5.93413G	-49.38	-27.00	-22.38	4.71	0.00	-54.09	-58.21	-56.22
1G	8G	1M	PK	6.4635G	-47.84	-27.00	-20.84	4.71	0.00	-52.55	-58.75	-53.74

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5320MHz

30/12/2024

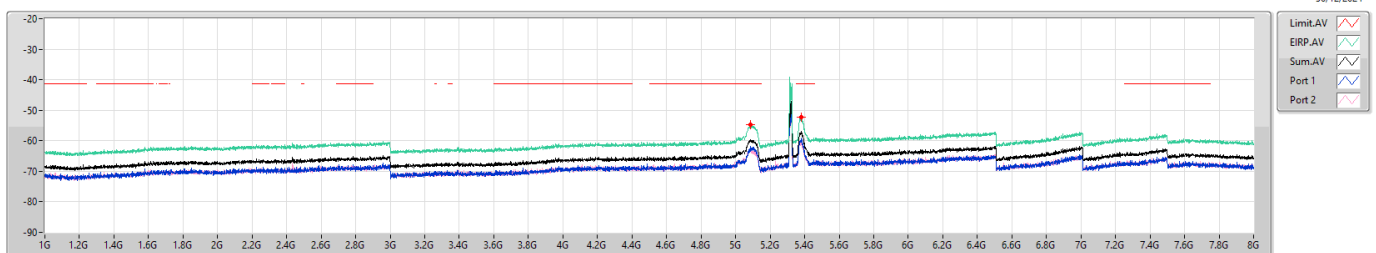


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08625G	-54.80	-41.20	-13.60	4.71	0.00	-59.51	-61.70	-63.54
1G	8G	1M	AV	5.38113G	-52.25	-41.20	-11.05	4.71	0.00	-56.96	-59.18	-60.93

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5260MHz

30/12/2024

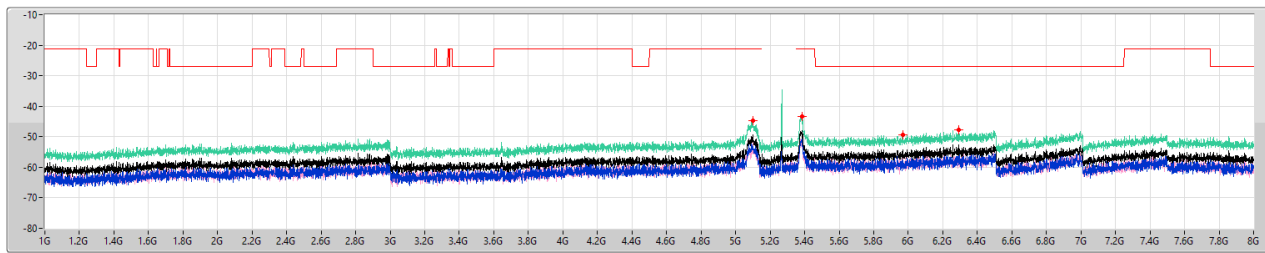


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09938G	-44.66	-21.20	-23.46	4.71	0.00	-49.37	-53.94	-51.23
1G	8G	1M	PK	5.38375G	-43.43	-21.20	-22.23	4.71	0.00	-48.14	-50.90	-51.42
1G	8G	1M	PK	5.96825G	-49.47	-27.00	-22.47	4.71	0.00	-54.18	-58.00	-56.51
1G	8G	1M	PK	6.29375G	-47.82	-27.00	-20.82	4.71	0.00	-52.53	-54.52	-56.87

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5260MHz

30/12/2024

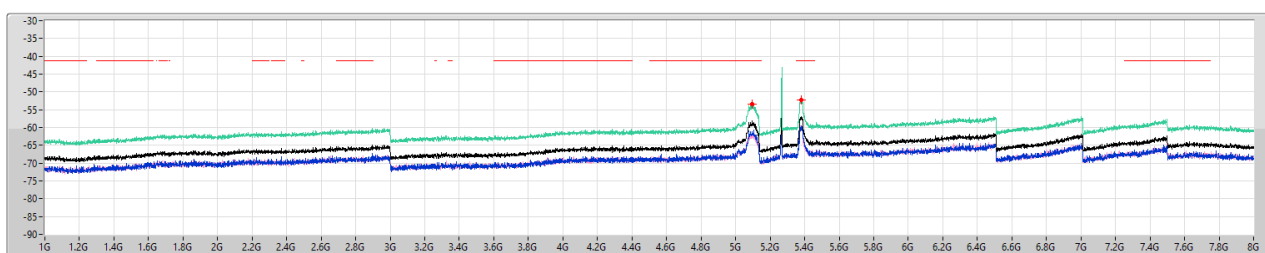


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09763G	-53.41	-41.20	-12.21	4.71	0.00	-58.12	-61.20	-61.06
1G	8G	1M	AV	5.382G	-52.25	-41.20	-11.05	4.71	0.00	-56.96	-59.42	-60.60

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5300MHz

30/12/2024

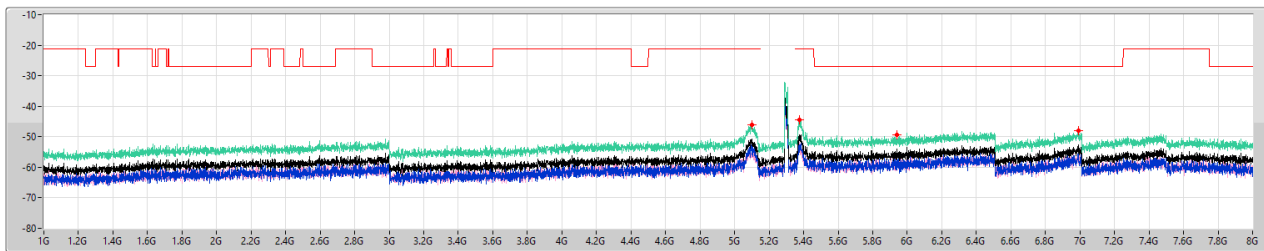


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.102G	-46.17	-21.20	-24.97	4.71	0.00	-50.88	-52.81	-55.32
1G	8G	1M	PK	5.375G	-44.57	-21.20	-23.37	4.71	0.00	-49.28	-52.63	-51.97
1G	8G	1M	PK	5.93938G	-49.37	-27.00	-22.37	4.71	0.00	-54.08	-57.06	-57.13
1G	8G	1M	PK	6.99113G	-48.06	-27.00	-21.06	4.71	0.00	-52.77	-54.88	-56.91

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5300MHz

30/12/2024

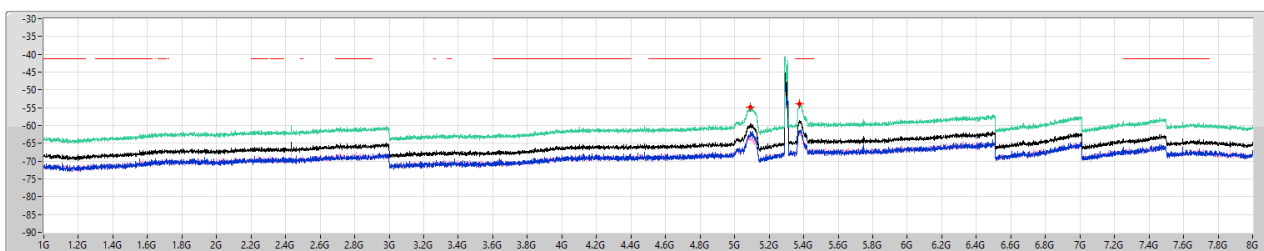


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08975G	-54.81	-41.20	-13.61	4.71	0.00	-59.52	-61.63	-63.67
1G	8G	1M	AV	5.375G	-53.88	-41.20	-12.68	4.71	0.00	-58.59	-61.46	-61.74

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5320MHz

30/12/2024

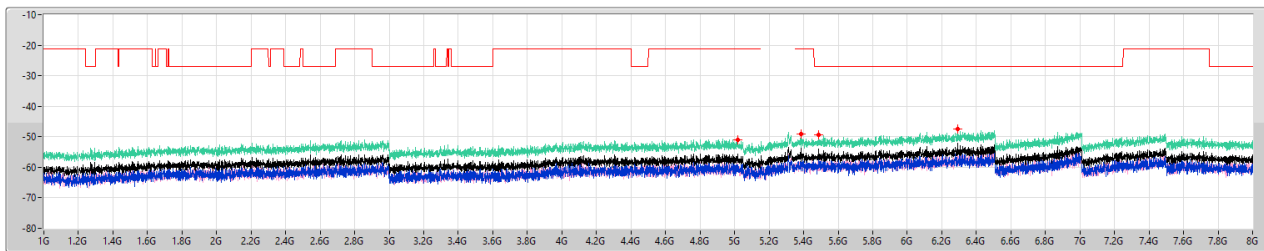


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.01625G	-50.97	-21.20	-29.77	4.71	0.00	-55.68	-59.94	-57.72
1G	8G	1M	PK	5.38288G	-49.16	-21.20	-27.96	4.71	0.00	-53.87	-55.90	-58.16
1G	8G	1M	PK	5.48875G	-49.25	-27.00	-22.25	4.71	0.00	-53.96	-56.18	-57.94
1G	8G	1M	PK	6.29025G	-47.46	-27.00	-20.46	4.71	0.00	-52.17	-57.87	-53.53

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5320MHz

30/12/2024

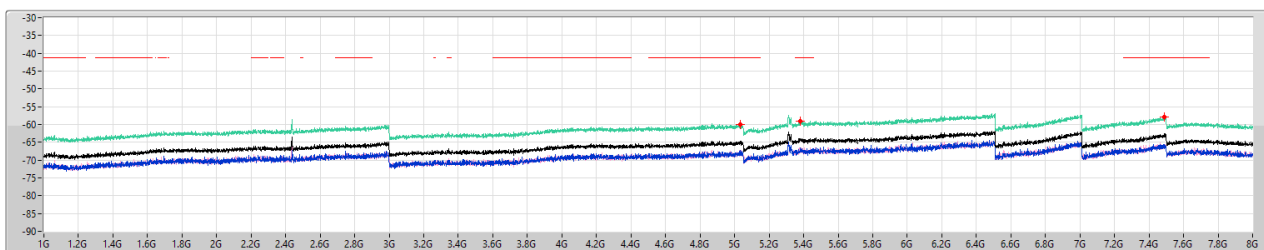


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.03463G	-59.92	-41.20	-18.72	4.71	0.00	-64.63	-67.21	-68.12
1G	8G	1M	AV	5.38113G	-59.16	-41.20	-17.96	4.71	0.00	-63.87	-66.49	-67.32
1G	8G	1M	AV	7.48725G	-57.90	-41.20	-16.70	4.71	0.00	-62.61	-65.66	-65.58

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [PK]

5270MHz

30/12/2024

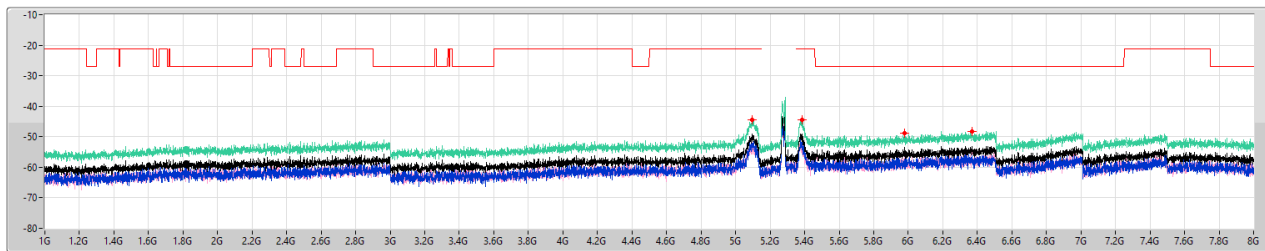


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09763G	-44.48	-21.20	-23.28	4.71	0.00	-49.19	-52.54	-51.89
1G	8G	1M	PK	5.38288G	-44.41	-21.20	-23.21	4.71	0.00	-49.12	-51.19	-53.33
1G	8G	1M	PK	5.977G	-48.88	-27.00	-21.88	4.71	0.00	-53.59	-57.17	-56.09
1G	8G	1M	PK	6.36725G	-48.39	-27.00	-21.39	4.71	0.00	-53.10	-56.30	-55.92

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [AV]

5270MHz

30/12/2024

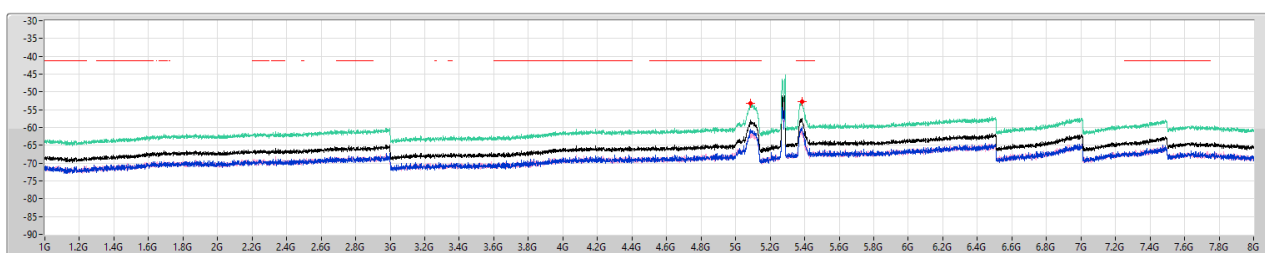


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08625G	-53.21	-41.20	-12.01	4.71	0.00	-57.92	-60.36	-61.58
1G	8G	1M	AV	5.38463G	-52.78	-41.20	-11.58	4.71	0.00	-57.49	-60.52	-60.49

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [PK]

5310MHz

30/12/2024

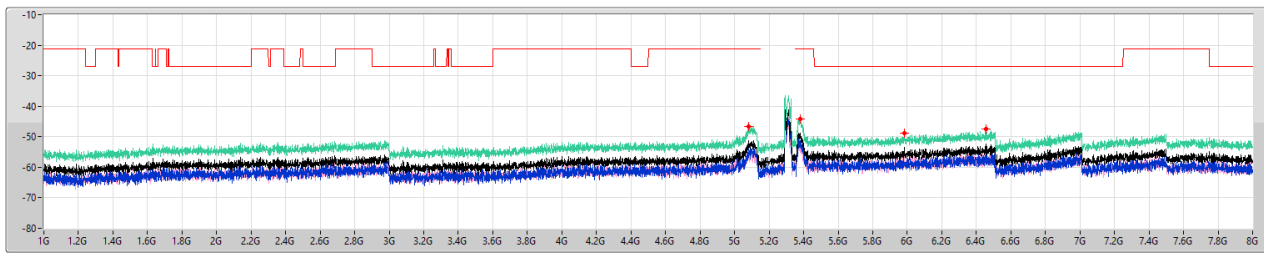


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08188G	-46.52	-21.20	-25.32	4.71	0.00	-51.23	-52.44	-57.39
1G	8G	1M	PK	5.37938G	-44.08	-21.20	-22.88	4.71	0.00	-48.79	-51.22	-52.46
1G	8G	1M	PK	5.98313G	-48.84	-27.00	-21.84	4.71	0.00	-53.55	-58.57	-55.19
1G	8G	1M	PK	6.45388G	-47.58	-27.00	-20.58	4.71	0.00	-52.29	-55.39	-55.22

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [AV]

5310MHz

30/12/2024

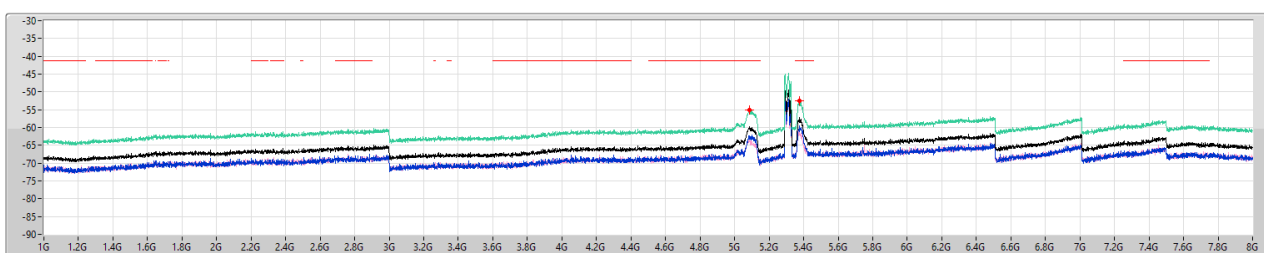


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08625G	-55.08	-41.20	-13.88	4.71	0.00	-59.79	-62.37	-63.28
1G	8G	1M	AV	5.375G	-52.51	-41.20	-11.31	4.71	0.00	-57.22	-59.49	-61.13

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

CSE Other [PK]

5290MHz

30/12/2024

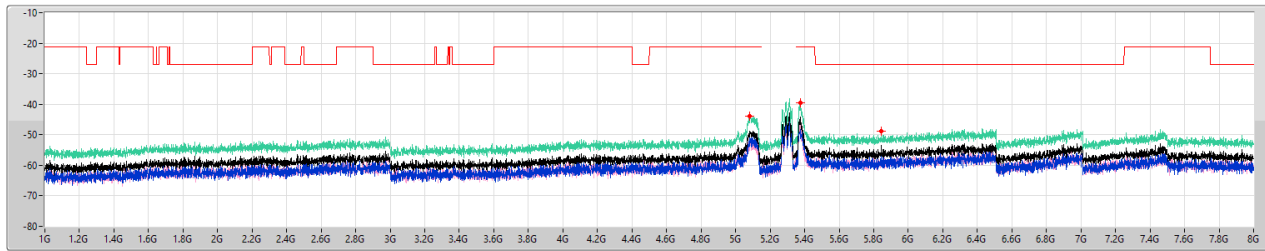


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.07925G	-43.99	-21.20	-22.79	4.71	0.00	-48.70	-51.66	-51.77
1G	8G	1M	PK	5.37413G	-39.51	-21.20	-18.31	4.71	0.00	-44.22	-49.48	-45.75
1G	8G	1M	PK	5.84313G	-48.83	-27.00	-21.83	4.71	0.00	-53.54	-56.19	-56.94

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

CSE Other [AV]

5290MHz

30/12/2024

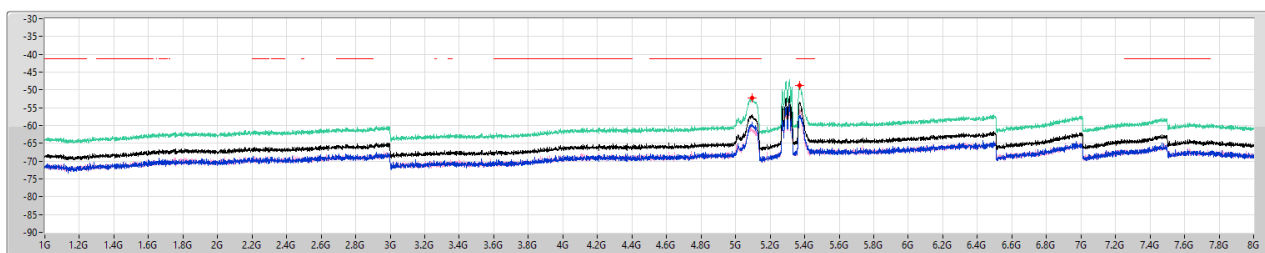


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09588G	-52.31	-41.20	-11.11	4.71	0.00	-57.02	-58.96	-61.45
1G	8G	1M	AV	5.36975G	-48.64	-41.20	-7.44	4.71	0.00	-53.35	-57.14	-55.70

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

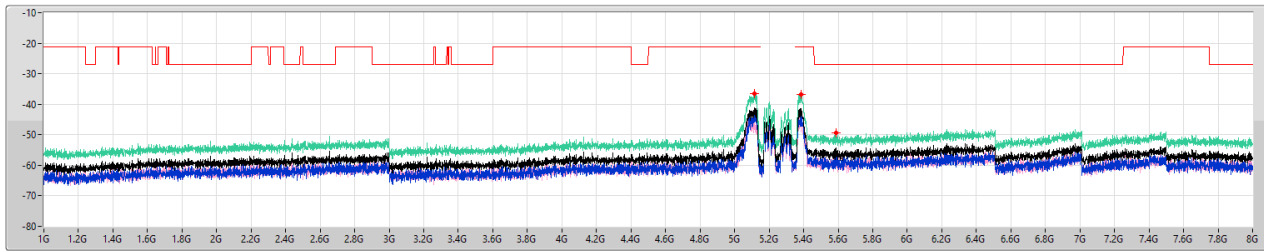


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.11425G	-36.55	-21.20	-15.35	4.71	0.00	-41.26	-43.09	-45.90
1G	8G	1M	PK	5.38725G	-36.82	-21.20	-15.62	4.71	0.00	-41.53	-43.90	-45.28
1G	8G	1M	PK	5.58588G	-49.45	-27.00	-22.45	4.71	0.00	-54.16	-56.47	-58.01

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

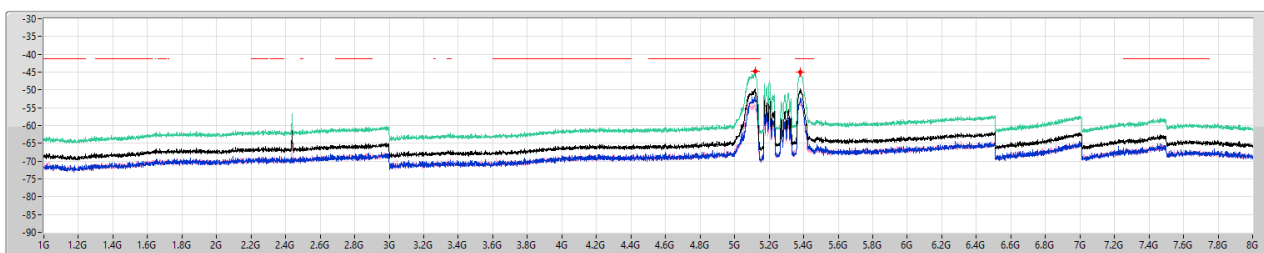


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.11863G	-44.87	-41.20	-3.67	4.71	0.00	-49.58	-51.45	-54.15
1G	8G	1M	AV	5.38113G	-44.99	-41.20	-3.79	4.71	0.00	-49.70	-52.27	-53.19

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5260MHz

30/12/2024

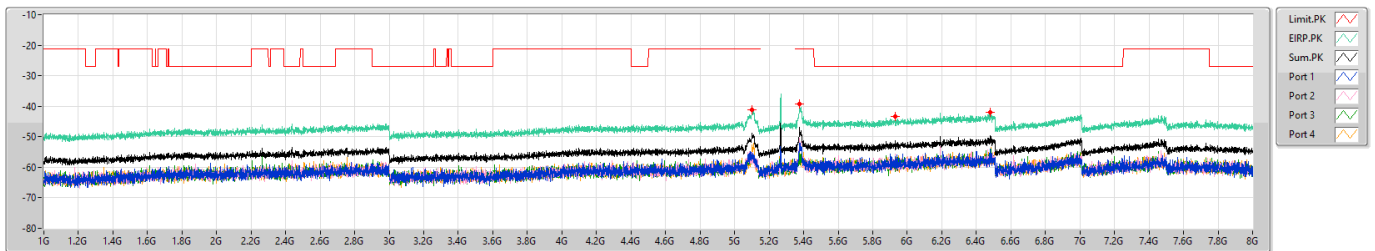


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.09938G	-41.07	-21.20	-19.87	7.72	0.00	-48.79	-55.82	-54.99	-56.35	-52.91
1G	8G	1M	PK	5.37675G	-39.31	-21.20	-18.11	7.72	0.00	-47.03	-52.11	-50.54	-55.08	-57.66
1G	8G	1M	PK	5.92975G	-43.45	-27.00	-16.45	7.72	0.00	-51.17	-56.54	-55.66	-58.20	-59.23
1G	8G	1M	PK	6.47925G	-41.99	-27.00	-14.99	7.72	0.00	-49.71	-54.05	-55.53	-57.37	-56.75

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5260MHz

30/12/2024

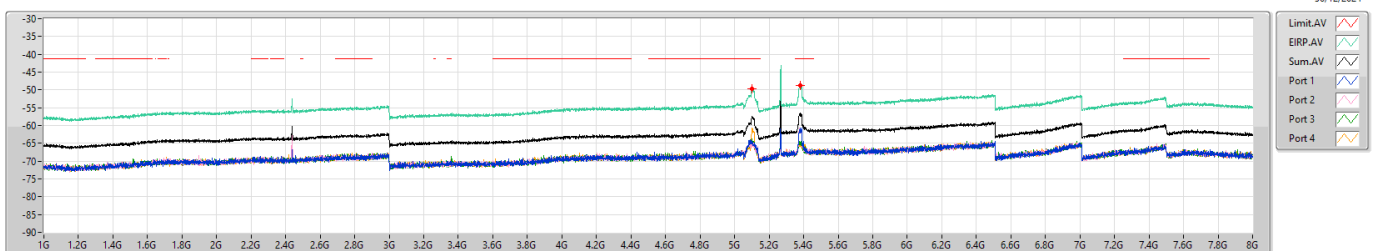


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.0985G	-49.64	-41.20	-8.44	7.72	0.00	-57.36	-64.81	-65.34	-64.43	-60.69
1G	8G	1M	AV	5.382G	-48.73	-41.20	-7.53	7.72	0.00	-56.45	-60.66	-61.03	-64.82	-65.39

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5300MHz

30/12/2024

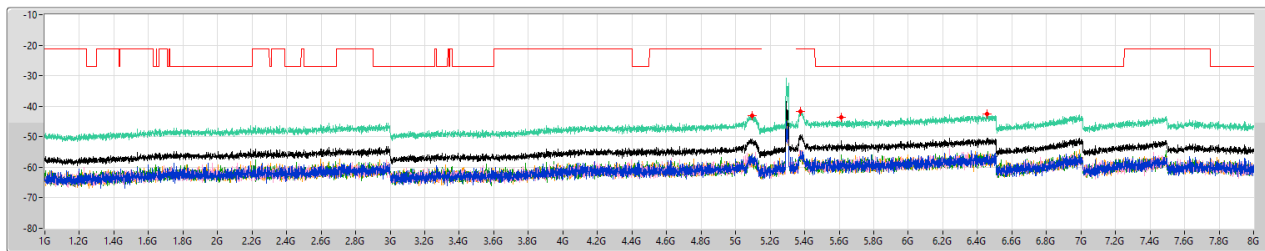


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.095G	-42.97	-21.20	-21.77	7.72	0.00	-50.69	-55.53	-58.97	-57.85	-55.50
1G	8G	1M	PK	5.37413G	-41.69	-21.20	-20.49	7.72	0.00	-49.41	-55.94	-54.63	-54.50	-57.16
1G	8G	1M	PK	5.613G	-43.59	-27.00	-16.59	7.72	0.00	-51.31	-58.72	-57.90	-56.02	-57.14
1G	8G	1M	PK	6.45563G	-42.65	-27.00	-15.65	7.72	0.00	-50.37	-55.81	-55.45	-57.57	-57.08

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5300MHz

30/12/2024

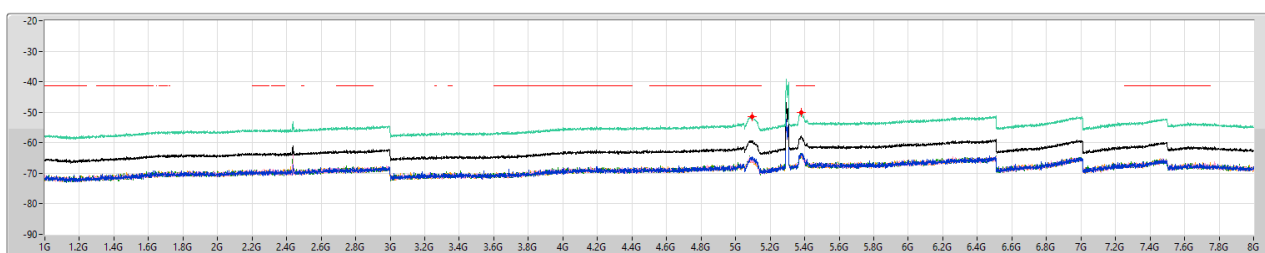


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.09675G	-51.56	-41.20	-10.36	7.72	0.00	-59.28	-64.54	-64.97	-65.58	-66.30
1G	8G	1M	AV	5.3785G	-50.03	-41.20	-8.83	7.72	0.00	-57.75	-63.87	-63.61	-63.80	-63.82

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5320MHz

30/12/2024

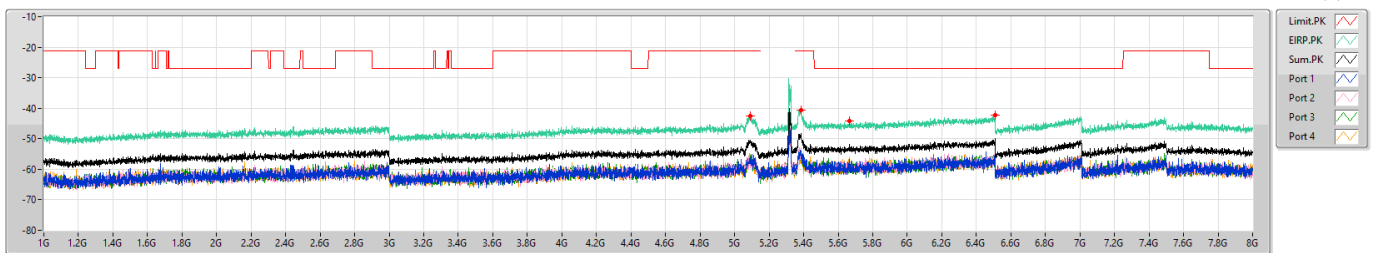


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.08888G	-42.67	-21.20	-21.47	7.72	0.00	-50.39	-56.40	-59.41	-55.70	-55.22
1G	8G	1M	PK	5.38288G	-40.69	-21.20	-19.49	7.72	0.00	-48.41	-53.89	-52.87	-54.94	-57.08
1G	8G	1M	PK	5.66288G	-44.20	-27.00	-17.20	7.72	0.00	-51.92	-59.94	-55.88	-57.03	-60.70
1G	8G	1M	PK	6.50813G	-42.33	-27.00	-15.33	7.72	0.00	-50.05	-54.71	-57.36	-58.59	-54.82

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5320MHz

30/12/2024

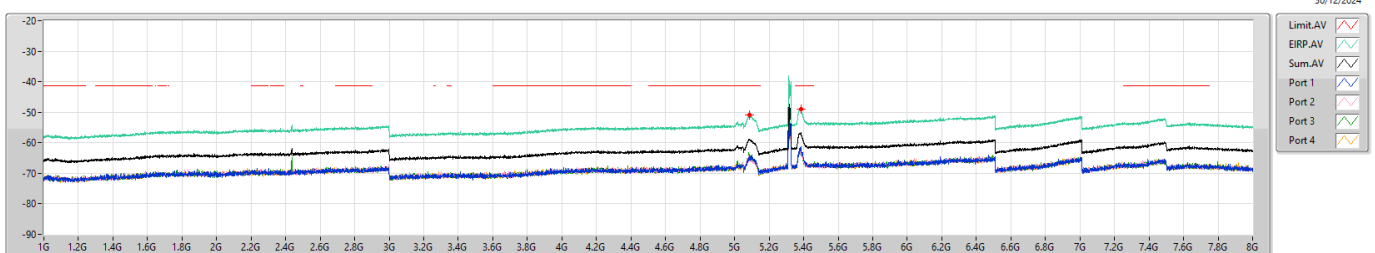


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.088G	-51.00	-41.20	-9.80	7.72	0.00	-58.72	-65.55	-64.98	-63.70	-64.95
1G	8G	1M	AV	5.38375G	-48.95	-41.20	-7.75	7.72	0.00	-56.67	-61.30	-63.09	-63.54	-63.20

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5260MHz

30/12/2024

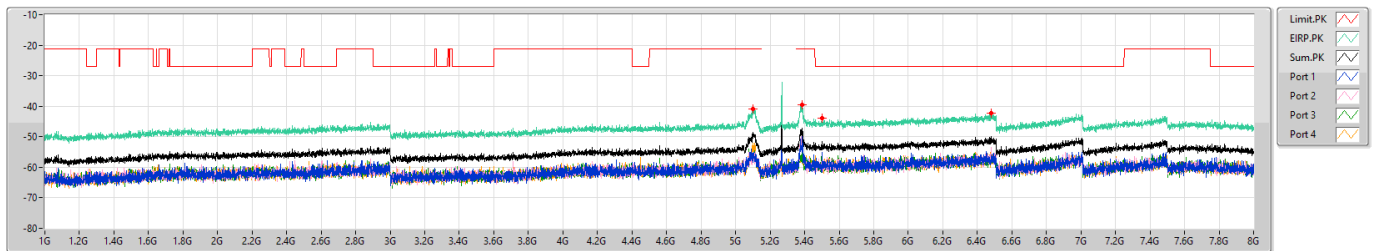


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10025G	-40.93	-21.20	-19.73	7.72	0.00	-48.65	-55.49	-56.15	-56.35	-52.16
1G	8G	1M	PK	5.38375G	-39.54	-21.20	-18.34	7.72	0.00	-47.26	-53.03	-49.99	-57.22	-57.25
1G	8G	1M	PK	5.50013G	-43.78	-27.00	-16.78	7.72	0.00	-51.50	-55.01	-58.25	-61.58	-57.63
1G	8G	1M	PK	6.481G	-42.17	-27.00	-15.17	7.72	0.00	-49.89	-55.88	-53.37	-57.85	-58.47

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5260MHz

30/12/2024

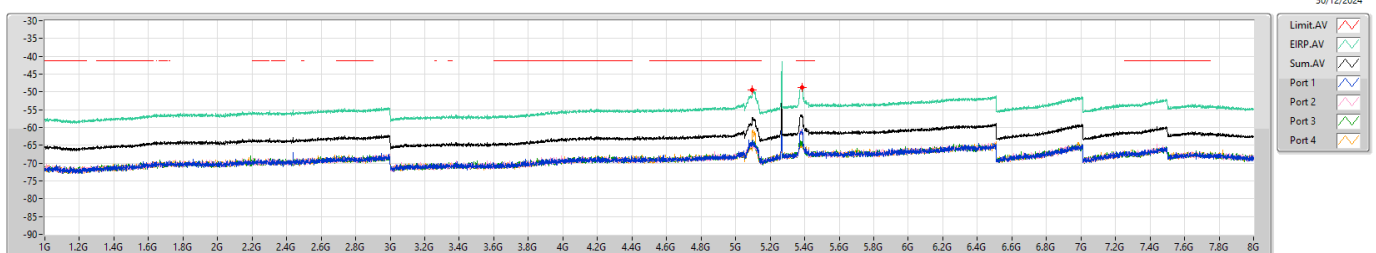


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.09763G	-49.40	-41.20	-8.20	7.72	0.00	-57.12	-63.86	-64.74	-64.33	-60.83
1G	8G	1M	AV	5.3855G	-48.73	-41.20	-7.53	7.72	0.00	-56.45	-60.92	-61.09	-64.08	-65.42

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5300MHz

30/12/2024

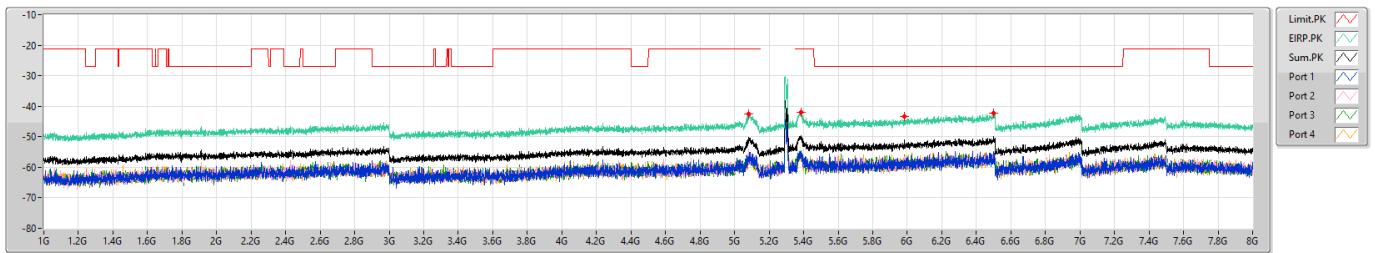


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.07925G	-42.61	-21.20	-21.41	7.72	0.00	-50.33	-58.15	-53.94	-57.30	-57.34
1G	8G	1M	PK	5.38375G	-41.87	-21.20	-20.67	7.72	0.00	-49.59	-55.03	-55.58	-54.70	-57.72
1G	8G	1M	PK	5.984G	-43.41	-27.00	-16.41	7.72	0.00	-51.13	-57.48	-56.47	-56.05	-59.23
1G	8G	1M	PK	6.50025G	-42.21	-27.00	-15.21	7.72	0.00	-49.93	-55.66	-57.91	-54.98	-55.78

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5300MHz

30/12/2024

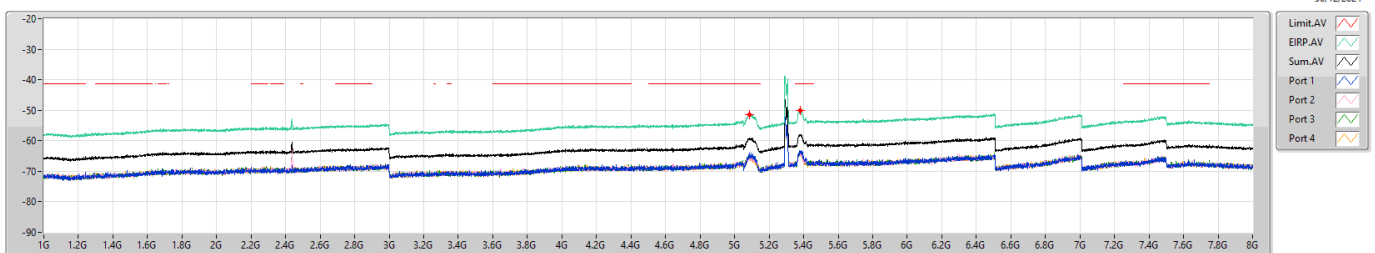


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.0845G	-51.43	-41.20	-10.23	7.72	0.00	-59.15	-63.99	-65.98	-64.95	-66.09
1G	8G	1M	AV	5.38113G	-50.17	-41.20	-8.97	7.72	0.00	-57.89	-63.38	-64.04	-63.95	-64.31

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5320MHz

30/12/2024

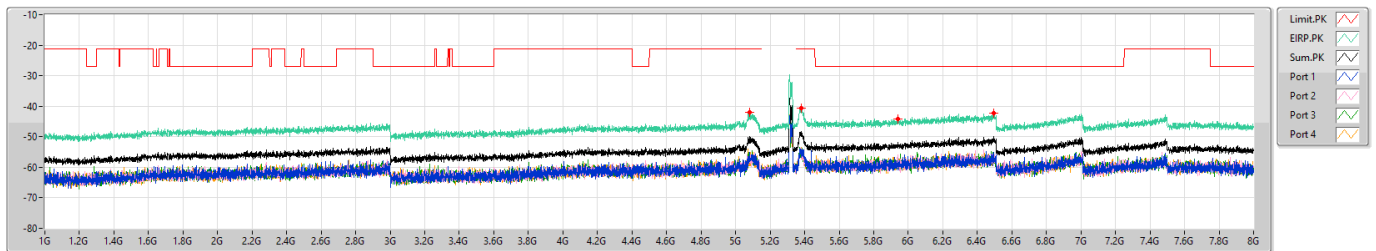


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.08188G	-42.07	-21.20	-20.87	7.72	0.00	-49.79	-55.18	-56.40	-55.62	-56.15
1G	8G	1M	PK	5.3785G	-40.57	-21.20	-19.37	7.72	0.00	-48.29	-55.78	-54.26	-53.96	-53.54
1G	8G	1M	PK	5.94113G	-44.07	-27.00	-17.07	7.72	0.00	-51.79	-59.16	-55.87	-57.63	-59.60
1G	8G	1M	PK	6.495G	-42.16	-27.00	-15.16	7.72	0.00	-49.88	-55.24	-55.28	-58.51	-55.34

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5320MHz

30/12/2024

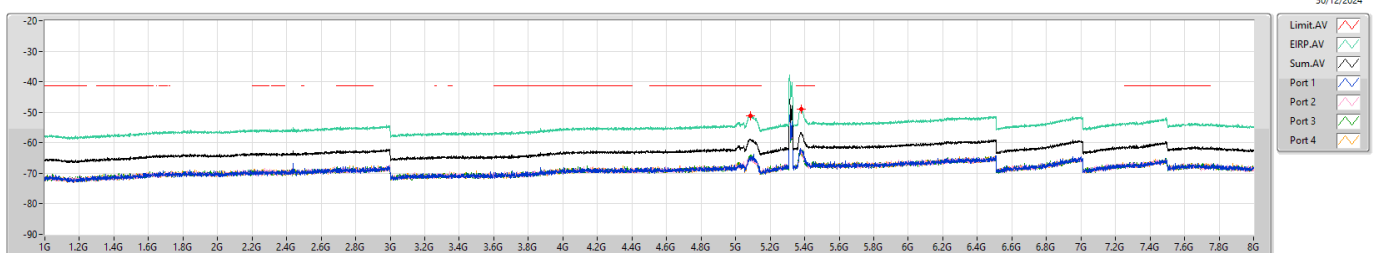


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.088G	-51.12	-41.20	-9.92	7.72	0.00	-58.84	-65.00	-65.62	-63.89	-65.12
1G	8G	1M	AV	5.37938G	-48.97	-41.20	-7.77	7.72	0.00	-56.69	-62.57	-62.17	-62.89	-63.31

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [PK]

5270MHz

30/12/2024

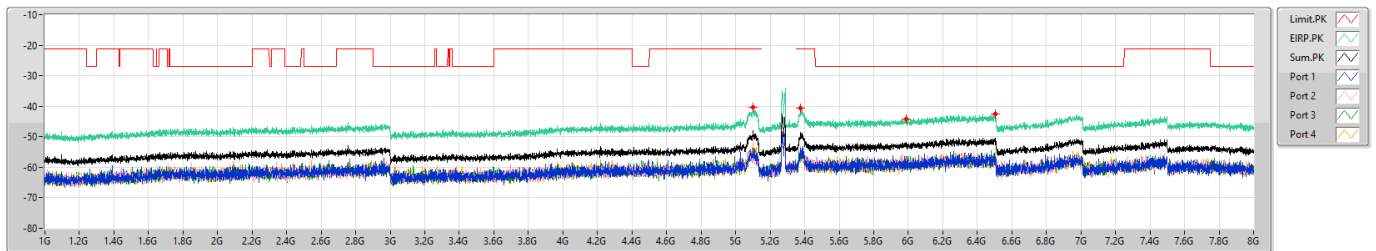


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.09938G	-40.42	-21.20	-19.22	7.72	0.00	-48.14	-54.39	-56.00	-55.14	-52.12
1G	8G	1M	PK	5.37675G	-40.71	-21.20	-19.51	7.72	0.00	-48.43	-53.68	-53.17	-56.20	-55.47
1G	8G	1M	PK	5.9875G	-44.19	-27.00	-17.19	7.72	0.00	-51.91	-60.08	-56.28	-57.98	-58.19
1G	8G	1M	PK	6.50288G	-42.63	-27.00	-15.63	7.72	0.00	-50.35	-56.39	-54.91	-57.18	-57.50

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [AV]

5270MHz

30/12/2024

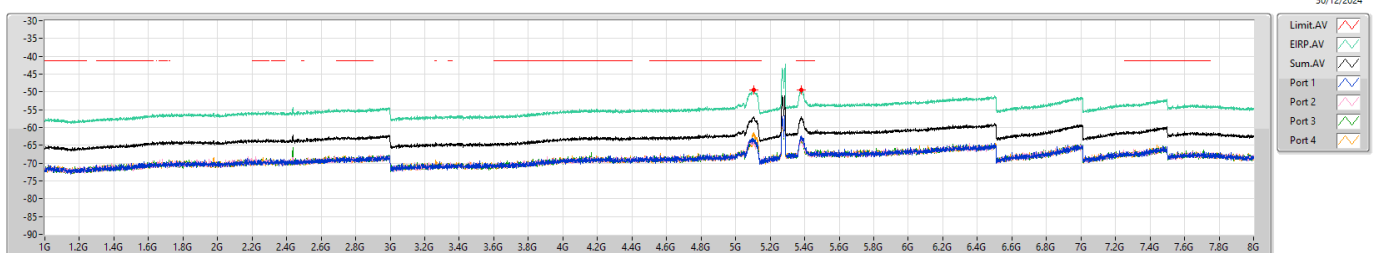


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.10375G	-49.34	-41.20	-8.14	7.72	0.00	-57.06	-63.56	-64.57	-63.39	-61.44
1G	8G	1M	AV	5.3785G	-49.35	-41.20	-8.15	7.72	0.00	-57.07	-62.39	-63.42	-63.34	-63.29

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [PK]

5310MHz

30/12/2024

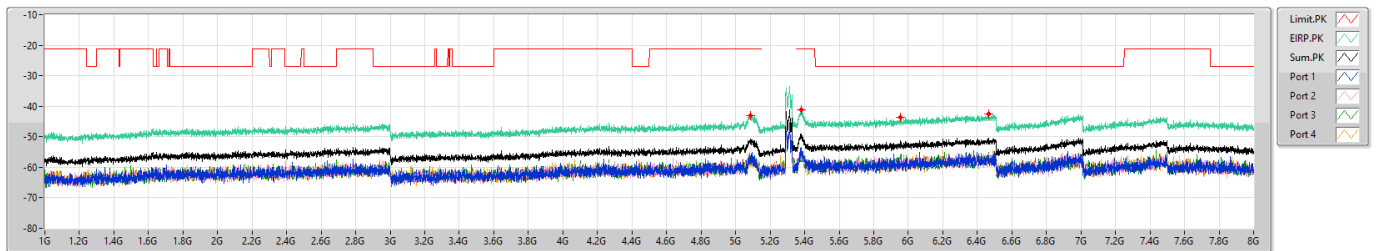


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.08538G	-43.10	-21.20	-21.90	7.72	0.00	-50.82	-56.77	-57.42	-56.32	-56.94
1G	8G	1M	PK	5.382G	-41.25	-21.20	-20.05	7.72	0.00	-48.97	-54.63	-56.57	-53.82	-55.42
1G	8G	1M	PK	5.95688G	-43.66	-27.00	-16.66	7.72	0.00	-51.38	-58.70	-57.46	-55.85	-58.16
1G	8G	1M	PK	6.46613G	-42.66	-27.00	-15.66	7.72	0.00	-50.38	-56.30	-55.55	-57.28	-56.65

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [AV]

5310MHz

30/12/2024

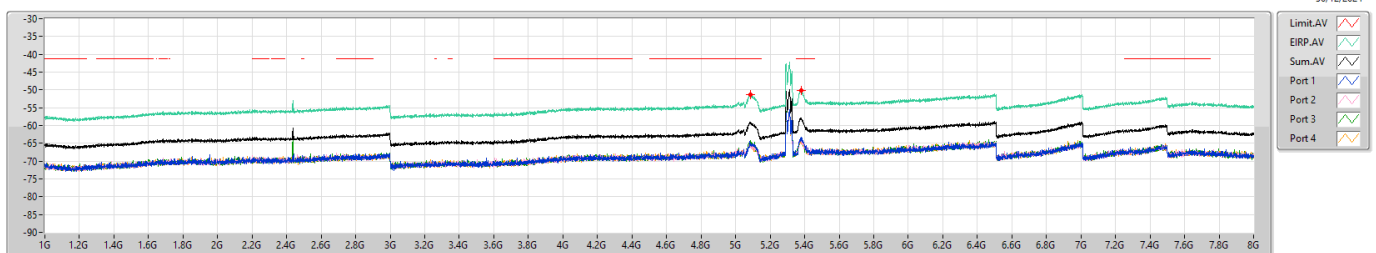


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.088G	-51.29	-41.20	-10.09	7.72	0.00	-59.01	-65.03	-65.99	-64.17	-65.13
1G	8G	1M	AV	5.38025G	-50.16	-41.20	-8.96	7.72	0.00	-57.88	-63.19	-63.86	-63.64	-65.15

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Other [PK]

5290MHz

30/12/2024

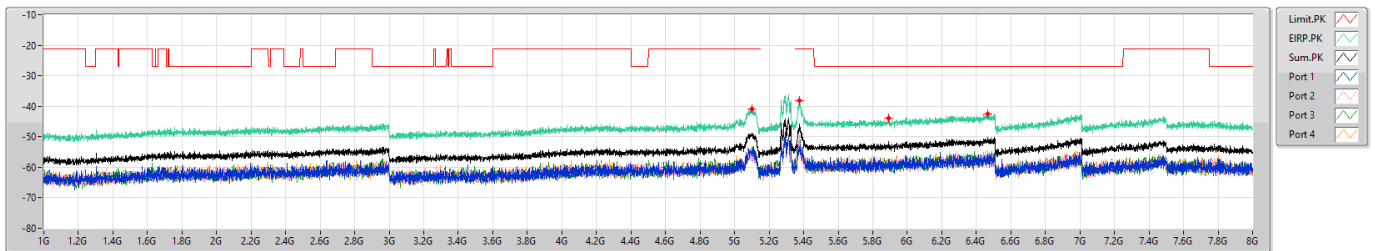


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10113G	-41.00	-21.20	-19.80	7.72	0.00	-48.72	-54.55	-56.23	-53.65	-54.92
1G	8G	1M	PK	5.375G	-38.11	-21.20	-16.91	7.72	0.00	-45.83	-53.15	-49.24	-52.81	-53.82
1G	8G	1M	PK	5.893G	-43.92	-27.00	-16.92	7.72	0.00	-51.64	-57.60	-57.38	-57.76	-57.94
1G	8G	1M	PK	6.46525G	-42.41	-27.00	-15.41	7.72	0.00	-50.13	-55.69	-57.18	-57.85	-54.62

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Other [AV]

5290MHz

30/12/2024

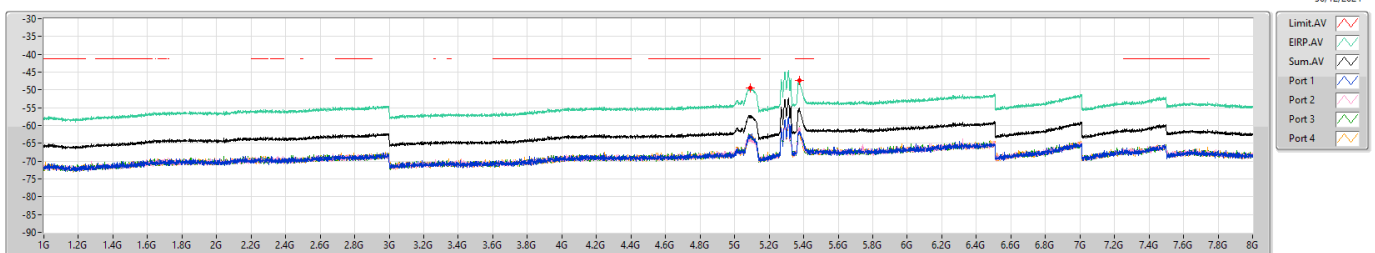


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.09063G	-49.45	-41.20	-8.25	7.72	0.00	-57.17	-62.58	-63.78	-62.64	-63.94
1G	8G	1M	AV	5.37325G	-47.40	-41.20	-6.20	7.72	0.00	-55.12	-61.58	-61.03	-60.31	-61.80

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

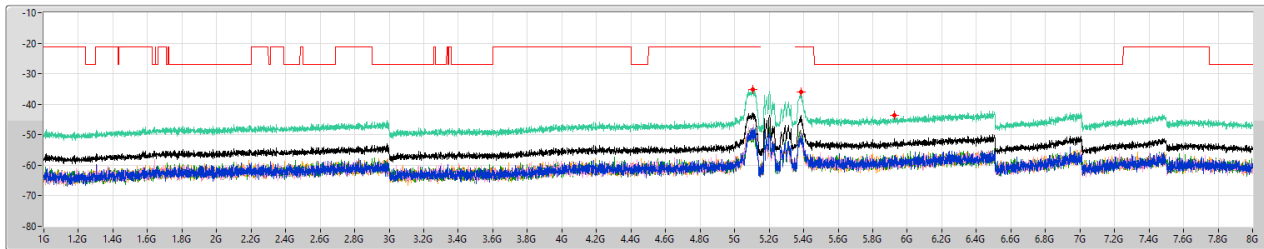


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10725G	-35.11	-21.20	-13.91	7.72	0.00	-42.83	-47.62	-48.76	-50.17	-49.23
1G	8G	1M	PK	5.30288G	-35.86	-21.20	-14.66	7.72	0.00	-43.58	-51.62	-48.66	-48.91	-49.77
1G	8G	1M	PK	5.92625G	-43.61	-27.00	-16.61	7.72	0.00	-51.33	-56.96	-57.37	-58.57	-56.74

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

30/12/2024

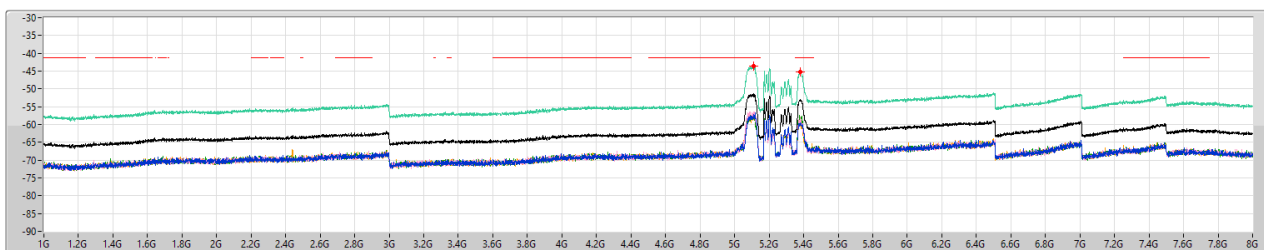

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.10988G	-43.59	-41.20	-2.39	7.72	0.00	-51.31	-58.10	-56.51	-56.95	-57.95
1G	8G	1M	AV	5.38113G	-45.16	-41.20	-3.96	7.72	0.00	-52.08	-60.01	-57.99	-57.85	-60.36



Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	EIRP (dBm)	Psum (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	P1 (dBm)	Limit (dBm)	Margin (dB)	DG (dBi)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-46.37	-55.77				-55.77	-41.20	-5.17	9.40
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-48.57	-57.97	-60.68			-61.30	-41.20	-7.37	9.40
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-48.05	-57.45	-63.65	-67.29	-61.90	-62.73	-41.20	-6.85	9.40
802.11be EHT160_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-41.71	-51.11				-51.11	-41.20	-0.51	9.40
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-41.46	-50.86	-58.95			-51.59	-41.20	-0.26	9.40
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-43.40	-52.80	-62.11	-61.80	-56.47	-57.64	-41.20	-2.20	9.40

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.08625G	9.40	-59.45				-59.45	-50.05	-41.20	-8.85
5290MHz	Pass	1G	8G	AV	5.37675G	9.40	-57.80				-57.80	-48.40	-41.20	-7.20
5290MHz	Pass	1G	8G	PK	5.102G	9.40	-48.76				-48.76	-39.36	-21.20	-18.16
5290MHz	Pass	1G	8G	PK	5.3715G	9.40	-47.61				-47.61	-38.21	-21.20	-17.01
5290MHz	Pass	1G	8G	PK	5.97263G	9.40	-61.09				-61.09	-51.69	-27.00	-24.69
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.1335G	9.40	-59.79				-59.79	-50.39	-41.20	-9.19
5290MHz	Pass	1G	8G	AV	5.38113G	9.40	-55.77				-55.77	-46.37	-41.20	-5.17
5290MHz	Pass	1G	8G	PK	5.13438G	9.40	-45.01				-45.01	-35.61	-21.20	-14.41
5290MHz	Pass	1G	8G	PK	5.37063G	9.40	-45.14				-45.14	-35.74	-21.20	-14.54
5290MHz	Pass	1G	8G	PK	5.85625G	9.40	-61.46				-61.46	-52.06	-27.00	-25.06
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.095G	9.40	-52.07				-52.07	-42.67	-41.20	-1.47
5250MHz	Pass	1G	8G	AV	5.37675G	9.40	-57.77				-57.77	-48.37	-41.20	-7.17
5250MHz	Pass	1G	8G	PK	5.10638G	9.40	-44.65				-44.65	-35.25	-21.20	-14.05
5250MHz	Pass	1G	8G	PK	5.375G	9.40	-50.37				-50.37	-40.97	-21.20	-19.77
5250MHz	Pass	1G	8G	PK	5.98663G	9.40	-61.17				-61.17	-51.77	-27.00	-24.77
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.10638G	9.40	-51.56				-51.56	-42.16	-41.20	-0.96
5250MHz	Pass	1G	8G	AV	5.37325G	9.40	-56.49				-56.49	-47.09	-41.20	-5.89
5250MHz	Pass	1G	8G	PK	5.1125G	9.40	-40.48				-40.48	-31.08	-21.20	-9.88
5250MHz	Pass	1G	8G	PK	5.38025G	9.40	-46.89				-46.89	-37.49	-21.20	-16.29
5250MHz	Pass	1G	8G	PK	5.48G	9.40	-60.99				-60.99	-51.59	-27.00	-24.59
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.081G	9.40	-51.11				-51.11	-41.71	-41.20	-0.51
5250MHz	Pass	1G	8G	AV	5.382G	9.40	-59.64				-59.64	-50.24	-41.20	-9.04
5250MHz	Pass	1G	8G	PK	5.0915G	9.40	-41.76				-41.76	-32.36	-21.20	-11.16
5250MHz	Pass	1G	8G	PK	5.37675G	9.40	-48.07				-48.07	-38.67	-21.20	-17.47
5250MHz	Pass	1G	8G	PK	5.96913G	9.40	-60.92				-60.92	-51.52	-27.00	-24.52
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.10025G	9.40	-60.90	-62.06			-58.43	-49.03	-41.20	-7.83
5290MHz	Pass	1G	8G	AV	5.37588G	9.40	-61.30	-60.68			-57.97	-48.57	-41.20	-7.37
5290MHz	Pass	1G	8G	PK	5.08188G	9.40	-51.59	-57.49			-50.60	-41.20	-21.20	-20.00
5290MHz	Pass	1G	8G	PK	5.37063G	9.40	-56.16	-51.76			-50.41	-41.01	-21.20	-19.81
5290MHz	Pass	1G	8G	PK	5.977G	9.40	-60.73	-62.90			-58.67	-49.27	-27.00	-22.27
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.09763G	9.40	-63.30	-63.18			-60.23	-50.83	-41.20	-9.63
5290MHz	Pass	1G	8G	AV	5.3785G	9.40	-62.49	-60.92			-58.62	-49.22	-41.20	-8.02
5290MHz	Pass	1G	8G	PK	5.09763G	9.40	-52.63	-56.69			-51.19	-41.79	-21.20	-20.59
5290MHz	Pass	1G	8G	PK	5.37763G	9.40	-56.43	-53.05			-51.41	-42.01	-21.20	-20.81
5290MHz	Pass	1G	8G	PK	5.92888G	9.40	-62.81	-60.70			-58.62	-49.22	-27.00	-22.22
5290MHz	Pass	1G	8G	PK	6.9815G	9.40	-61.60	-58.16			-56.54	-47.14	-27.00	-20.14
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.095G	9.40	-54.00	-54.81			-51.38	-41.98	-41.20	-0.78
5250MHz	Pass	1G	8G	AV	5.37938G	9.40	-59.51	-59.61			-56.55	-47.15	-41.20	-5.95
5250MHz	Pass	1G	8G	PK	5.09063G	9.40	-43.03	-49.25			-42.10	-32.70	-21.20	-11.50
5250MHz	Pass	1G	8G	PK	5.39513G	9.40	-56.66	-47.93			-47.38	-37.98	-21.20	-16.78
5250MHz	Pass	1G	8G	PK	5.86063G	9.40	-62.05	-62.22			-59.12	-49.72	-27.00	-22.72
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.09238G	9.40	-52.81	-55.48			-50.93	-41.53	-41.20	-0.33
5250MHz	Pass	1G	8G	AV	5.37938G	9.40	-60.67	-54.04			-53.19	-43.79	-41.20	-2.59
5250MHz	Pass	1G	8G	PK	5.11075G	9.40	-40.51	-49.02			-39.94	-30.54	-21.20	-9.34
5250MHz	Pass	1G	8G	PK	5.375G	9.40	-48.17	-46.37			-44.17	-34.77	-21.20	-13.57
5250MHz	Pass	1G	8G	PK	5.92363G	9.40	-61.63	-61.03			-58.31	-48.91	-27.00	-21.91
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.0775G	9.40	-51.59	-58.95			-50.86	-41.46	-41.20	-0.26
5250MHz	Pass	1G	8G	AV	5.37588G	9.40	-56.43	-62.65			-55.50	-46.10	-41.20	-4.90
5250MHz	Pass	1G	8G	PK	5.06788G	9.40	-44.01	-55.40			-43.71	-34.31	-21.20	-13.11
5250MHz	Pass	1G	8G	PK	5.37675G	9.40	-54.32	-51.22			-49.49	-40.09	-21.20	-18.89
5250MHz	Pass	1G	8G	PK	5.81513G	9.40	-60.78	-63.77			-59.01	-49.61	-27.00	-22.61
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.09938G	9.40	-65.44	-66.19	-64.59	-61.53	-58.02	-48.62	-41.20	-7.42
5290MHz	Pass	1G	8G	AV	5.382G	9.40	-65.41	-65.48	-63.39	-63.88	-58.42	-49.02	-41.20	-7.82
5290MHz	Pass	1G	8G	PK	5.10025G	9.40	-59.24	-59.05	-56.43	-54.18	-50.69	-41.29	-21.20	-20.09
5290MHz	Pass	1G	8G	PK	5.37325G	9.40	-59.02	-54.18	-58.62	-50.70	-48.25	-38.85	-21.20	-17.65
5290MHz	Pass	1G	8G	PK	5.95513G	9.40	-60.86	-63.81	-62.50	-61.73	-56.07	-46.67	-27.00	-19.67
5290MHz	Pass	1G	8G	PK	7.00513G	9.40	-59.26	-60.26	-59.49	-61.58	-54.04	-44.64	-27.00	-17.64
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-



CSE Harmonic (1~8GHz)_R5 (Internal Ant.)_Multi-RU

Appendix E.7

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5290MHz	Pass	1G	8G	AV	5.10025G	9.40	-66.30	-66.79	-65.34	-62.16	-58.71	-49.31	-41.20	-8.11
5290MHz	Pass	1G	8G	AV	5.38025G	9.40	-62.73	-63.65	-67.29	-61.90	-57.45	-48.05	-41.20	-6.85
5290MHz	Pass	1G	8G	PK	5.12913G	9.40	-50.37	-63.29	-61.58	-56.52	-49.00	-39.60	-21.20	-18.40
5290MHz	Pass	1G	8G	PK	5.37675G	9.40	-46.84	-50.59	-59.77	-59.24	-44.99	-35.59	-21.20	-14.39
5290MHz	Pass	1G	8G	PK	5.98925G	9.40	-63.26	-63.97	-60.00	-65.77	-56.70	-47.30	-27.00	-20.30
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.11775G	9.40	-58.79	-66.32	-63.90	-58.44	-54.69	-45.29	-41.20	-4.09
5250MHz	Pass	1G	8G	AV	5.37325G	9.40	-65.08	-66.66	-64.57	-63.18	-58.68	-49.28	-41.20	-8.08
5250MHz	Pass	1G	8G	PK	5.0985G	9.40	-57.29	-57.20	-59.47	-45.77	-45.03	-35.63	-21.20	-14.43
5250MHz	Pass	1G	8G	PK	5.37588G	9.40	-59.17	-59.23	-61.65	-49.84	-48.71	-39.31	-21.20	-18.11
5250MHz	Pass	1G	8G	PK	5.98838G	9.40	-62.26	-63.12	-63.20	-61.55	-56.46	-47.06	-27.00	-20.06
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.10113G	9.40	-58.71	-62.90	-61.76	-59.12	-54.26	-44.86	-41.20	-3.66
5250MHz	Pass	1G	8G	AV	5.38288G	9.40	-63.54	-65.16	-62.74	-62.05	-57.21	-47.81	-41.20	-6.61
5250MHz	Pass	1G	8G	PK	5.07575G	9.40	-49.53	-60.92	-61.13	-46.71	-44.68	-35.28	-21.20	-14.08
5250MHz	Pass	1G	8G	PK	5.36713G	9.40	-50.49	-62.13	-61.26	-53.51	-48.31	-38.91	-21.20	-17.71
5250MHz	Pass	1G	8G	PK	5.98313G	9.40	-61.52	-62.54	-62.25	-63.50	-56.37	-46.97	-27.00	-19.97
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz	Pass	1G	8G	AV	5.08713G	9.40	-57.64	-62.11	-61.80	-56.47	-52.80	-43.40	-41.20	-2.20
5250MHz	Pass	1G	8G	AV	5.37588G	9.40	-62.67	-65.56	-64.84	-64.38	-58.21	-48.81	-41.20	-7.61
5250MHz	Pass	1G	8G	PK	5.0845G	9.40	-52.43	-54.32	-54.54	-45.13	-43.60	-34.20	-21.20	-13.00
5250MHz	Pass	1G	8G	PK	5.37763G	9.40	-52.26	-58.74	-56.82	-56.80	-49.41	-40.01	-21.20	-18.81
5250MHz	Pass	1G	8G	PK	5.98225G	9.40	-62.10	-62.94	-60.98	-63.00	-56.15	-46.75	-27.00	-19.75


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

CSE Other [PK]

5290MHz

14/02/2025

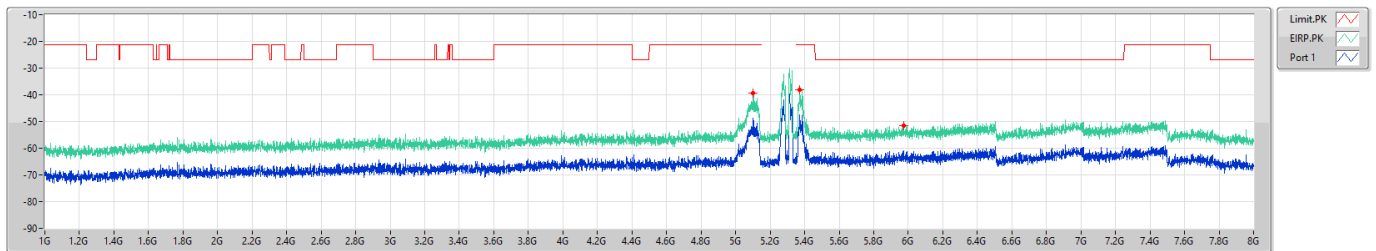


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.102G	-39.36	-21.20	-18.16	9.40	0.00	-48.76	-48.76
1G	8G	1M	PK	5.3715G	-38.21	-21.20	-17.01	9.40	0.00	-47.61	-47.61
1G	8G	1M	PK	5.97263G	-51.69	-27.00	-24.69	9.40	0.00	-61.09	-61.09

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

CSE Other [AV]

5290MHz

14/02/2025

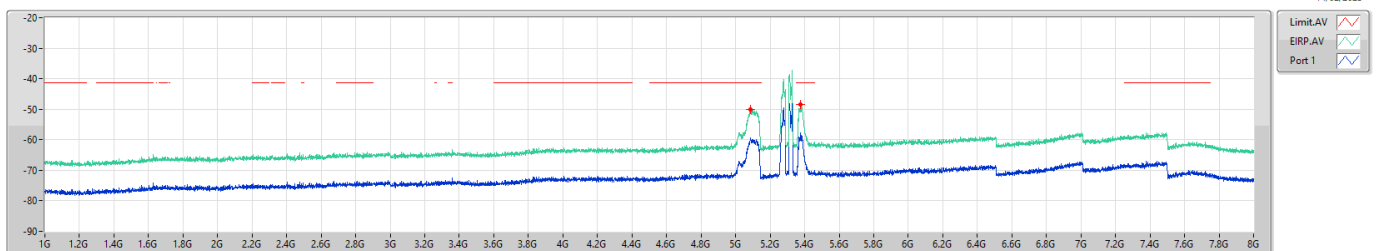


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08625G	-50.05	-41.20	-8.85	9.40	0.00	-59.45	-59.45
1G	8G	1M	AV	5.37675G	-48.40	-41.20	-7.20	9.40	0.00	-57.80	-57.80

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

CSE Other [PK]

5290MHz

14/02/2025

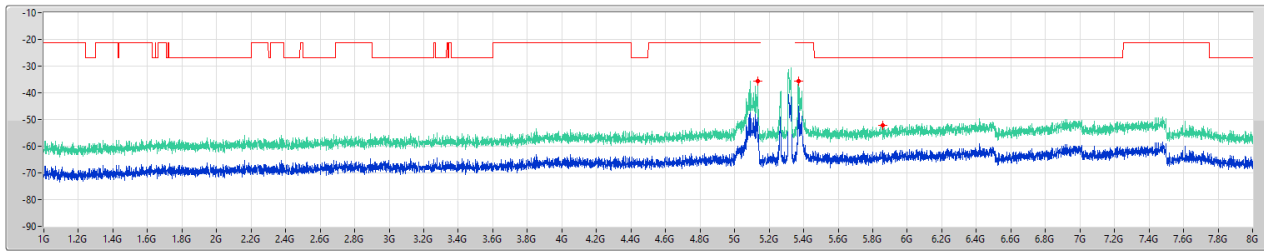


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.13438G	-35.61	-21.20	-14.41	9.40	0.00	-45.01	-45.01
1G	8G	1M	PK	5.37063G	-35.74	-21.20	-14.54	9.40	0.00	-45.14	-45.14
1G	8G	1M	PK	5.85625G	-52.06	-27.00	-25.06	9.40	0.00	-61.46	-61.46

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

CSE Other [AV]

5290MHz

14/02/2025

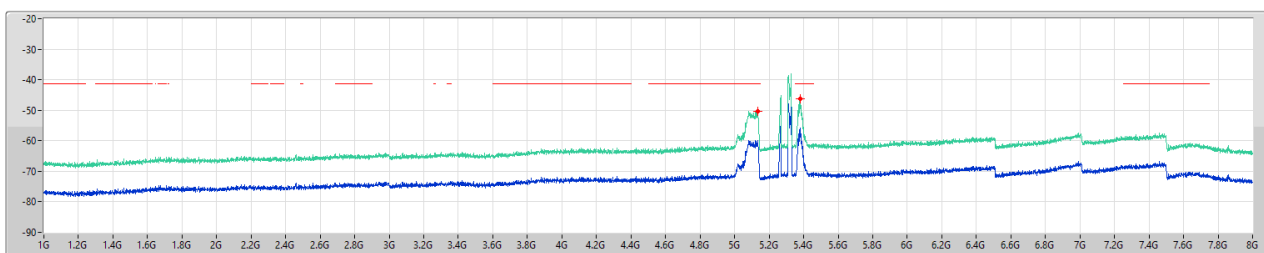


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.1335G	-50.39	-41.20	-9.19	9.40	0.00	-59.79	-59.79
1G	8G	1M	AV	5.38113G	-46.37	-41.20	-5.17	9.40	0.00	-55.77	-55.77

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

CSE Other [PK]

5250MHz

14/02/2025

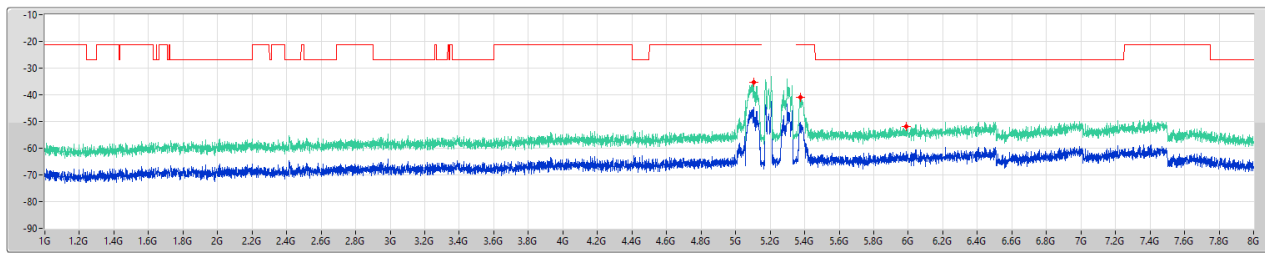


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10638G	-35.25	-21.20	-14.05	9.40	0.00	-44.65	-44.65
1G	8G	1M	PK	5.375G	-40.97	-21.20	-19.77	9.40	0.00	-50.37	-50.37
1G	8G	1M	PK	5.98663G	-51.77	-27.00	-24.77	9.40	0.00	-61.17	-61.17

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

CSE Other [AV]

5250MHz

14/02/2025

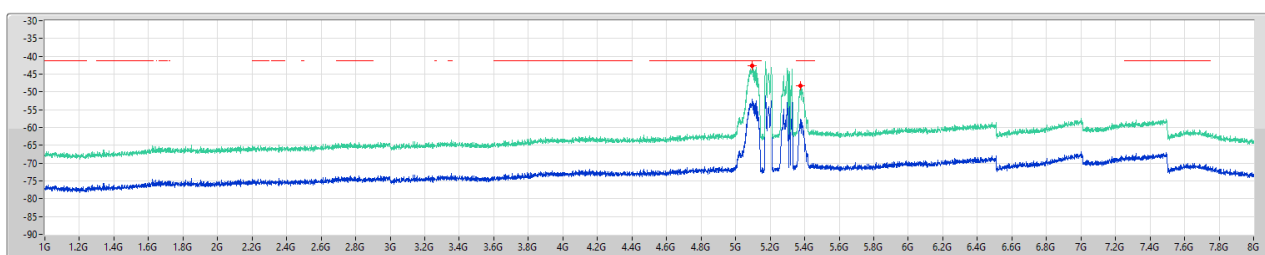


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.095G	-42.67	-41.20	-1.47	9.40	0.00	-52.07	-52.07
1G	8G	1M	AV	5.37675G	-48.37	-41.20	-7.17	9.40	0.00	-57.77	-57.77

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

CSE Other [PK]

5250MHz

14/02/2025

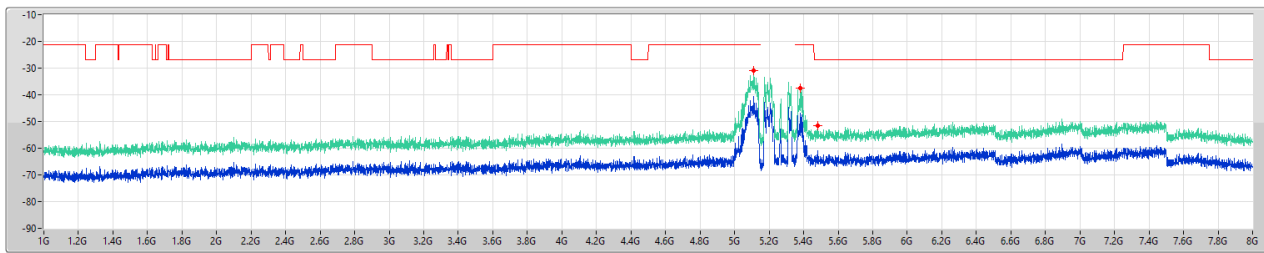


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.1125G	-31.08	-21.20	-9.88	9.40	0.00	-40.48	-40.48
1G	8G	1M	PK	5.38025G	-37.49	-21.20	-16.29	9.40	0.00	-46.89	-46.89
1G	8G	1M	PK	5.48G	-51.59	-27.00	-24.59	9.40	0.00	-60.99	-60.99

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

CSE Other [AV]

5250MHz

14/02/2025

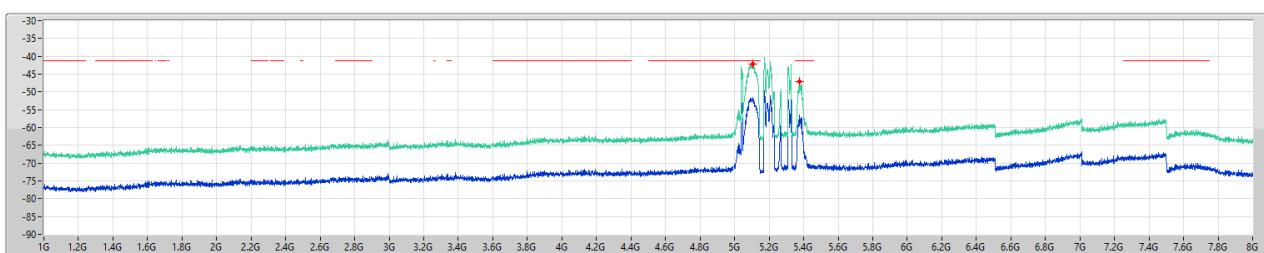


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10638G	-42.16	-41.20	-0.96	9.40	0.00	-51.56	-51.56
1G	8G	1M	AV	5.37325G	-47.09	-41.20	-5.89	9.40	0.00	-56.49	-56.49

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

CSE Other [PK]

5250MHz

14/02/2025

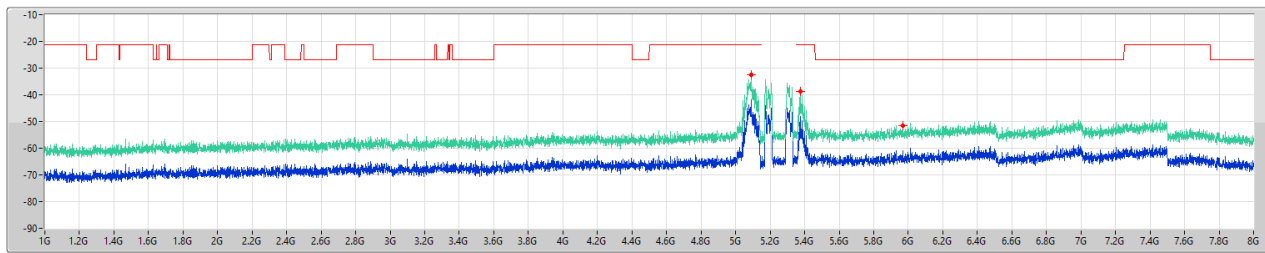


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.0915G	-32.36	-21.20	-11.16	9.40	0.00	-41.76	-41.76
1G	8G	1M	PK	5.37675G	-36.67	-21.20	-17.47	9.40	0.00	-48.07	-48.07
1G	8G	1M	PK	5.96913G	-51.52	-27.00	-24.52	9.40	0.00	-60.92	-60.92

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

CSE Other [AV]

5250MHz

14/02/2025

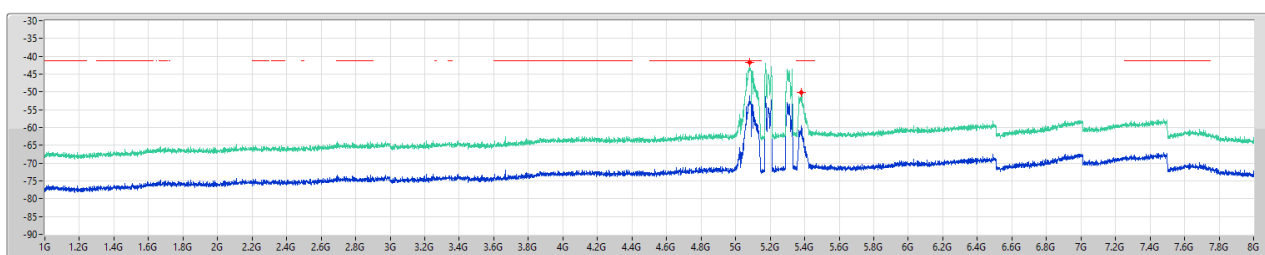


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.081G	-41.71	-41.20	-0.51	9.40	0.00	-51.11	-51.11
1G	8G	1M	AV	5.382G	-50.24	-41.20	-9.04	9.40	0.00	-59.64	-59.64

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

CSE Other [PK]

5290MHz

14/02/2025

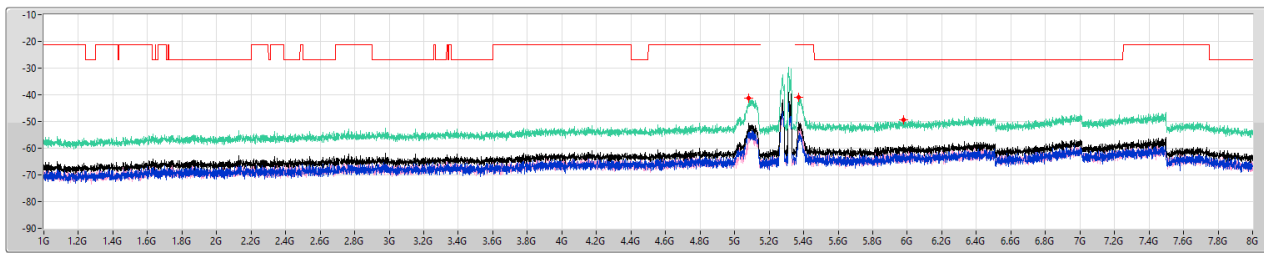


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08188G	-41.20	-21.20	-20.00	9.40	0.00	-50.60	-51.59	-57.49
1G	8G	1M	PK	5.37063G	-41.01	-21.20	-19.81	9.40	0.00	-50.41	-56.16	-51.76
1G	8G	1M	PK	5.9777G	-49.27	-27.00	-22.27	9.40	0.00	-58.67	-60.73	-62.90

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

CSE Other [AV]

5290MHz

14/02/2025

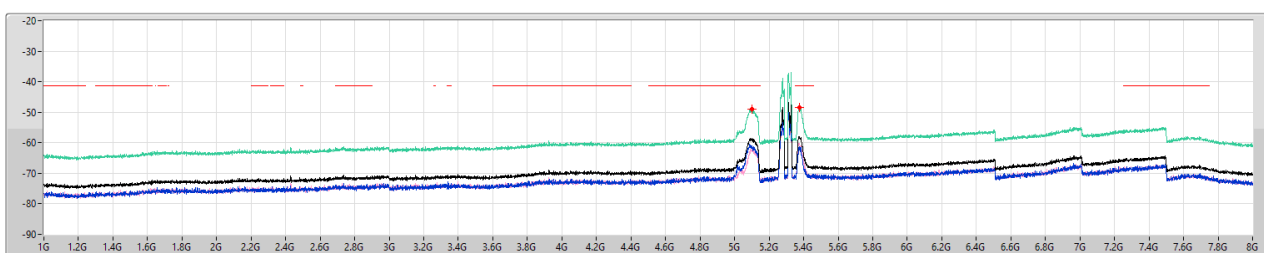


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.10025G	-49.03	-41.20	-7.83	9.40	0.00	-58.43	-60.90	-62.06
1G	8G	1M	AV	5.37588G	-48.57	-41.20	-7.37	9.40	0.00	-57.97	-61.30	-60.68

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

CSE Other [PK]

5290MHz

14/02/2025

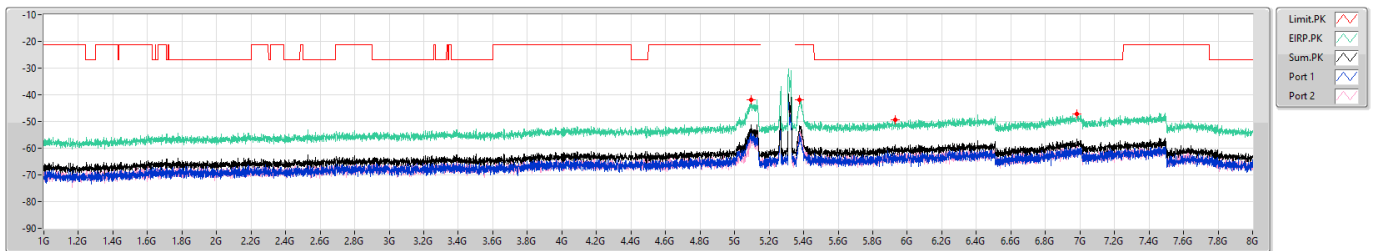


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09763G	-41.79	-21.20	-20.59	9.40	0.00	-51.19	-52.63	-56.69
1G	8G	1M	PK	5.37763G	-42.01	-21.20	-20.81	9.40	0.00	-51.41	-56.43	-53.05
1G	8G	1M	PK	5.92888G	-49.22	-27.00	-22.22	9.40	0.00	-58.62	-62.81	-60.70
1G	8G	1M	PK	6.9815G	-47.14	-27.00	-20.14	9.40	0.00	-56.54	-61.60	-58.16

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

CSE Other [AV]

5290MHz

14/02/2025

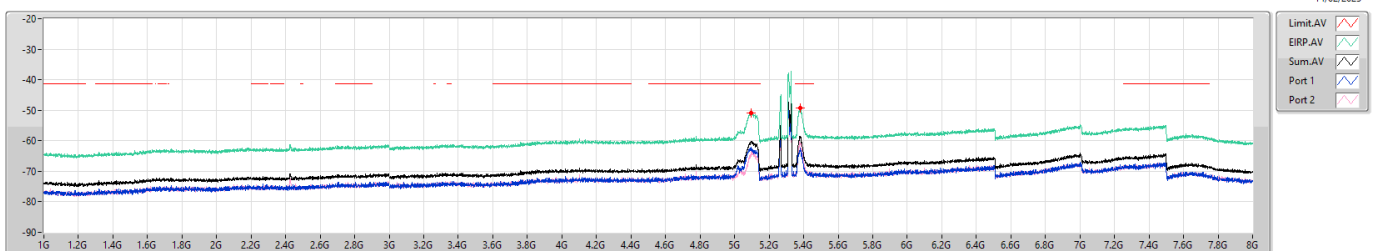


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09763G	-50.83	-41.20	-9.63	9.40	0.00	-60.23	-63.30	-63.18
1G	8G	1M	AV	5.3785G	-49.22	-41.20	-8.02	9.40	0.00	-58.62	-62.49	-60.92

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

CSE Other [PK]

5250MHz

14/02/2025

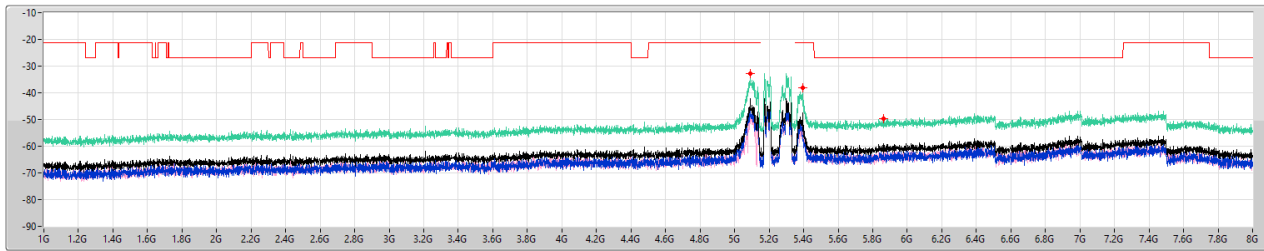


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09063G	-32.70	-21.20	-11.50	9.40	0.00	-42.10	-43.03	-49.25
1G	8G	1M	PK	5.39513G	-37.98	-21.20	-16.78	9.40	0.00	-47.38	-56.66	-47.93
1G	8G	1M	PK	5.86063G	-49.72	-27.00	-22.72	9.40	0.00	-59.12	-62.05	-62.22

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX

CSE Other [AV]

5250MHz

14/02/2025

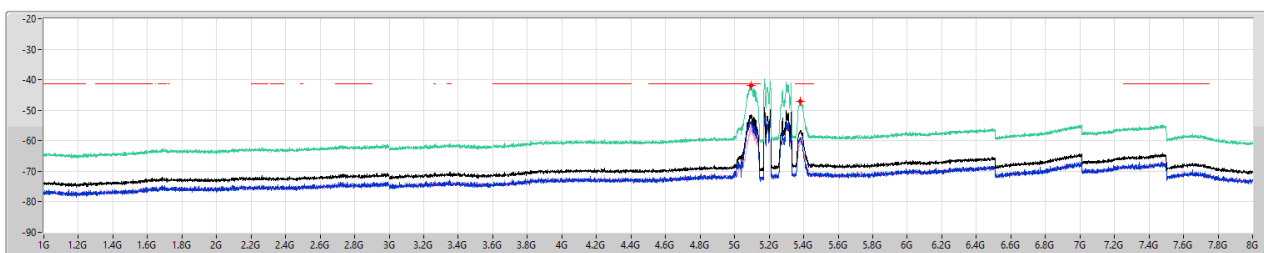


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.095G	-41.98	-41.20	-0.78	9.40	0.00	-51.38	-54.00	-54.81
1G	8G	1M	AV	5.37938G	-47.15	-41.20	-5.95	9.40	0.00	-56.55	-59.51	-59.61

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

CSE Other [PK]

5250MHz

14/02/2025

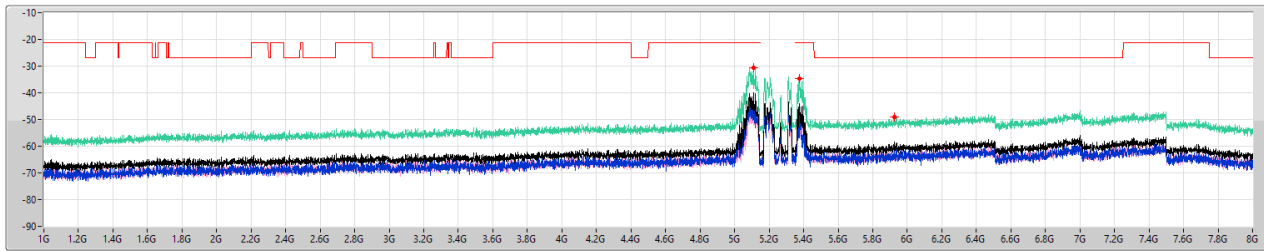


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.11075G	-30.54	-21.20	-9.34	9.40	0.00	-39.94	-40.51	-49.02
1G	8G	1M	PK	5.375G	-34.77	-21.20	-13.57	9.40	0.00	-44.17	-48.17	-46.37
1G	8G	1M	PK	5.92365G	-48.91	-27.00	-21.91	9.40	0.00	-58.31	-61.63	-61.03

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX

CSE Other [AV]

5250MHz

14/02/2025

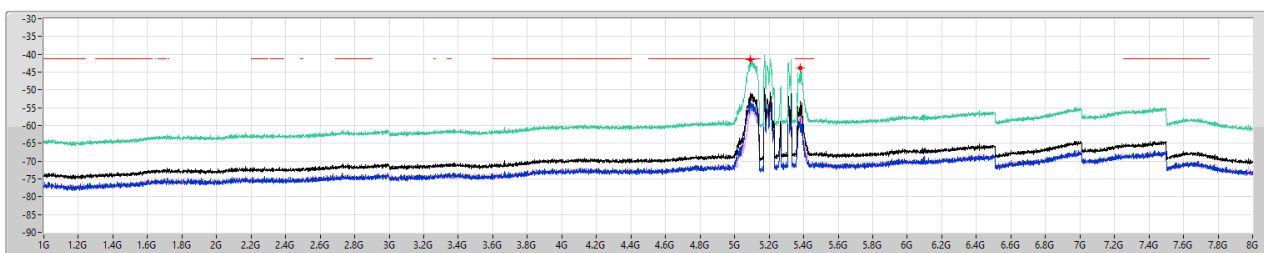


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09238G	-41.53	-41.20	-0.33	9.40	0.00	-50.93	-52.81	-55.48
1G	8G	1M	AV	5.37938G	-43.79	-41.20	-2.59	9.40	0.00	-53.19	-60.67	-54.04

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

CSE Other [PK]

5250MHz

14/02/2025

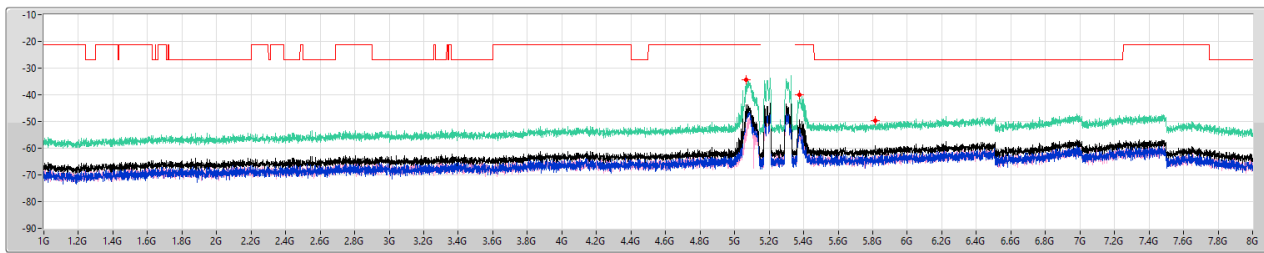


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.06788G	-34.31	-21.20	-13.11	9.40	0.00	-43.71	-44.01	-55.40
1G	8G	1M	PK	5.37675G	-40.09	-21.20	-18.89	9.40	0.00	-49.49	-54.32	-51.22
1G	8G	1M	PK	5.81513G	-49.61	-27.00	-22.61	9.40	0.00	-59.01	-60.78	-63.77

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX

CSE Other [AV]

5250MHz

14/02/2025

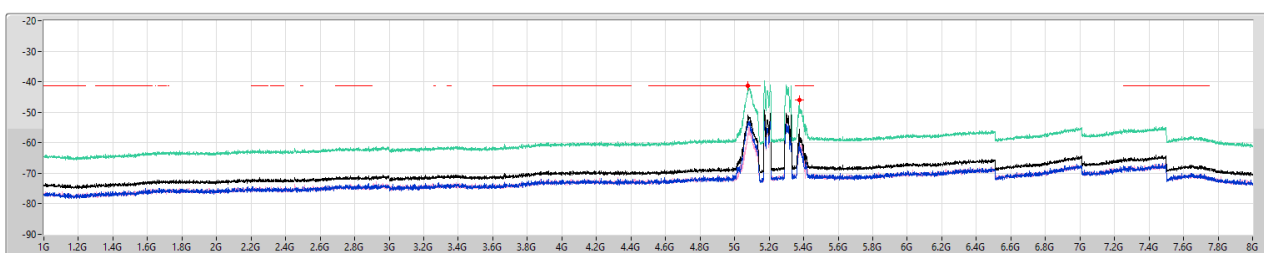


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.0775G	-41.46	-41.20	-0.26	9.40	0.00	-50.86	-51.59	-58.95
1G	8G	1M	AV	5.37588G	-46.10	-41.20	-4.90	9.40	0.00	-55.50	-56.43	-62.65

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

CSE Other [PK]

5290MHz

14/02/2025

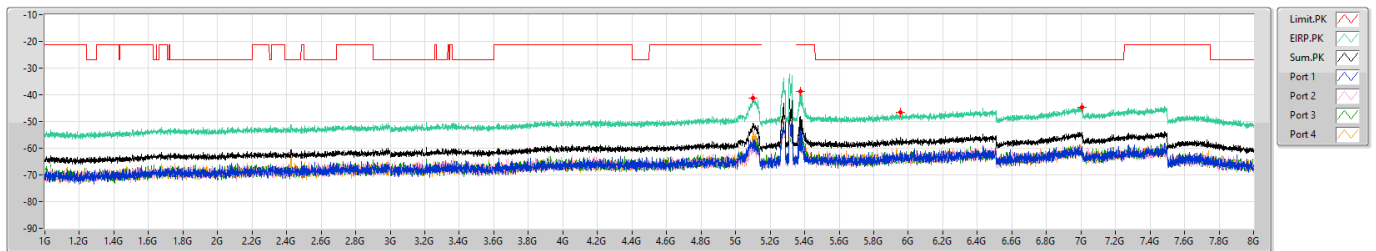


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10025G	-41.29	-21.20	-20.09	9.40	0.00	-50.69	-59.24	-59.05	-56.43	-54.18
1G	8G	1M	PK	5.37325G	-38.85	-21.20	-17.65	9.40	0.00	-48.25	-59.02	-54.18	-58.62	-50.70
1G	8G	1M	PK	5.95513G	-46.67	-27.00	-19.67	9.40	0.00	-56.07	-60.86	-63.81	-62.50	-61.73
1G	8G	1M	PK	7.00513G	-44.64	-27.00	-17.64	9.40	0.00	-54.04	-59.26	-60.26	-59.49	-61.58

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX

CSE Other [AV]

5290MHz

14/02/2025

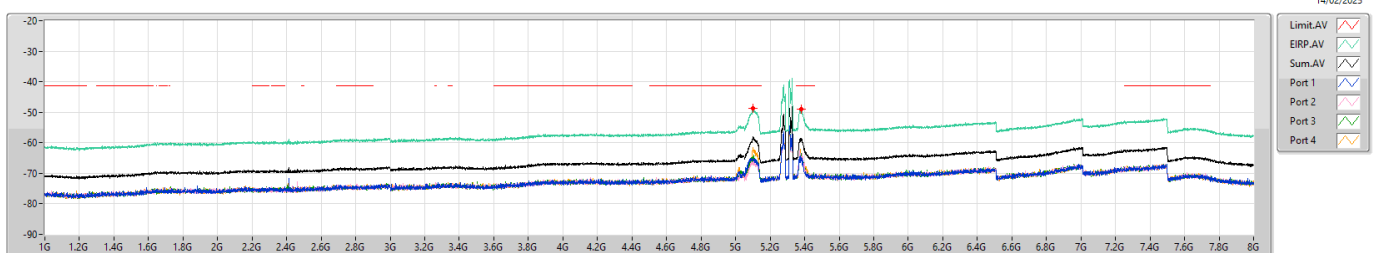


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.09938G	-48.62	-41.20	-7.42	9.40	0.00	-58.02	-65.44	-66.19	-64.59	-61.53
1G	8G	1M	AV	5.382G	-49.02	-41.20	-7.82	9.40	0.00	-58.42	-65.41	-65.48	-63.39	-63.88

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

CSE Other [PK]

5290MHz

14/02/2025

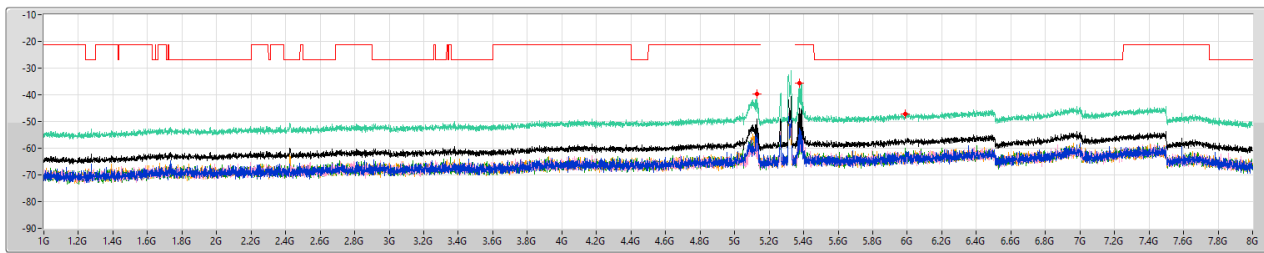


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.12913G	-39.60	-21.20	-18.40	9.40	0.00	-49.00	-50.37	-63.29	-61.58	-56.52
1G	8G	1M	PK	5.37675G	-35.59	-21.20	-14.39	9.40	0.00	-44.99	-46.84	-50.59	-59.77	-59.24
1G	8G	1M	PK	5.98925G	-47.30	-27.00	-20.30	9.40	0.00	-56.70	-63.26	-63.97	-60.00	-65.77

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX

CSE Other [AV]

5290MHz

14/02/2025

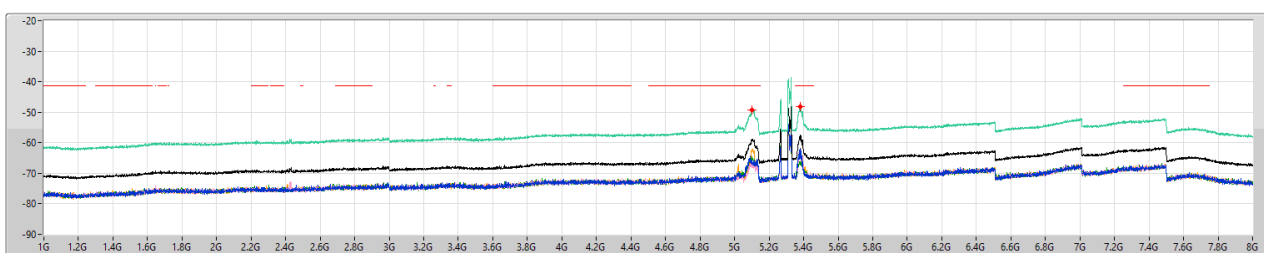


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.10025G	-49.31	-41.20	-8.11	9.40	0.00	-58.71	-66.30	-66.79	-65.34	-62.16
1G	8G	1M	AV	5.38025G	-48.05	-41.20	-6.85	9.40	0.00	-57.45	-62.73	-63.65	-67.29	-61.90

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

CSE Other [PK]

5250MHz

14/02/2025

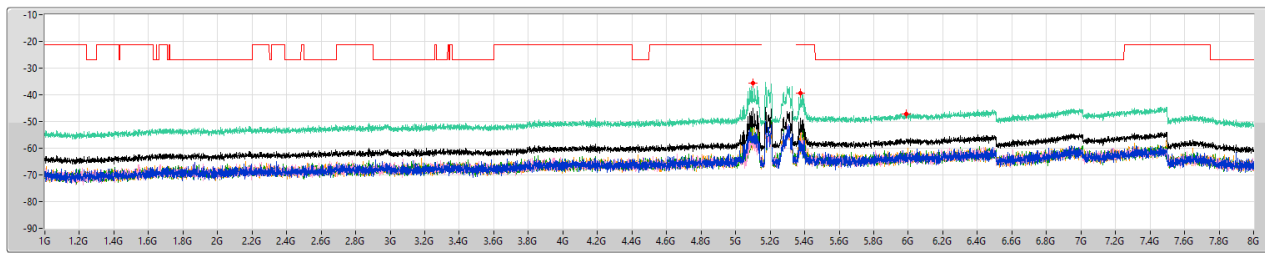


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.0985G	-35.63	-21.20	-14.43	9.40	0.00	-45.03	-57.29	-57.20	-59.47	-45.77
1G	8G	1M	PK	5.37588G	-39.31	-21.20	-18.11	9.40	0.00	-48.71	-59.17	-59.23	-61.65	-49.84
1G	8G	1M	PK	5.98838G	-47.06	-27.00	-20.06	9.40	0.00	-56.46	-62.26	-63.12	-63.20	-61.55

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX

CSE Other [AV]

5250MHz

14/02/2025

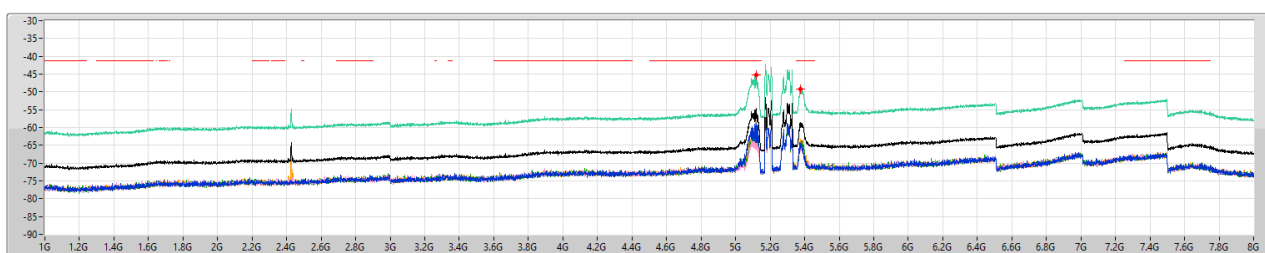


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.11775G	-45.29	-41.20	-4.09	9.40	0.00	-54.69	-58.79	-66.32	-63.90	-58.44
1G	8G	1M	AV	5.37325G	-49.28	-41.20	-8.08	9.40	0.00	-58.68	-65.08	-66.66	-64.57	-63.18

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX

CSE Other [PK]

5250MHz

14/02/2025

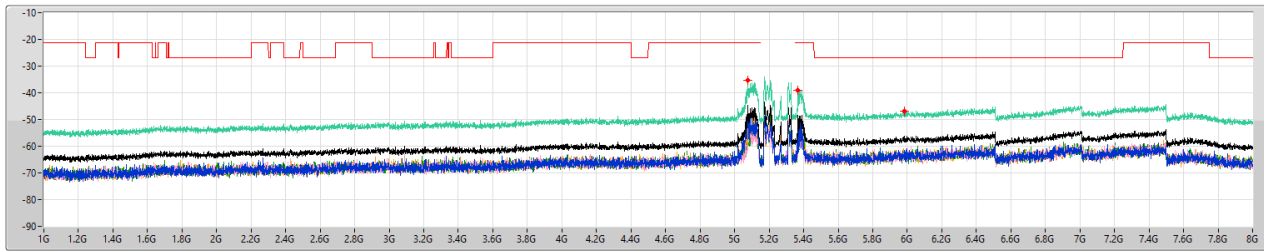


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.07575G	-35.28	-21.20	-14.08	9.40	0.00	-44.68	-49.53	-60.92	-61.13	-46.71
1G	8G	1M	PK	5.36713G	-38.91	-21.20	-17.71	9.40	0.00	-48.31	-50.49	-62.13	-61.26	-53.51
1G	8G	1M	PK	5.98313G	-46.97	-27.00	-19.97	9.40	0.00	-56.37	-61.52	-62.54	-62.25	-63.50

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX

CSE Other [AV]

5250MHz

14/02/2025

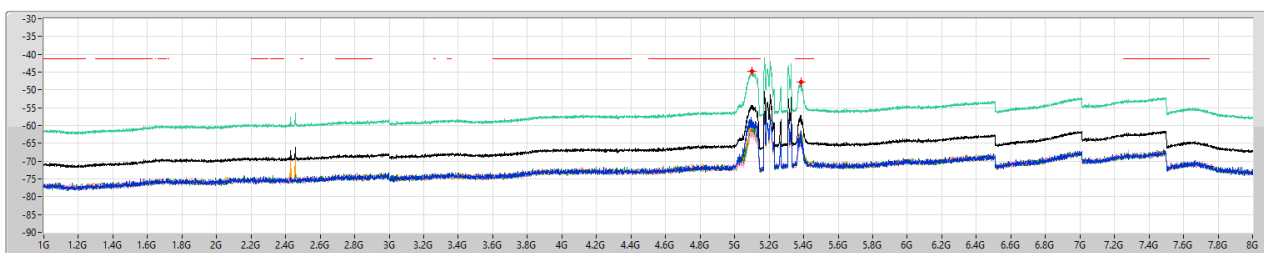


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.10113G	-44.86	-41.20	-3.66	9.40	0.00	-54.26	-58.71	-62.90	-61.76	-59.12
1G	8G	1M	AV	5.38288G	-47.81	-41.20	-6.61	9.40	0.00	-57.21	-63.54	-65.16	-62.74	-62.05

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

CSE Other [PK]

5250MHz

14/02/2025

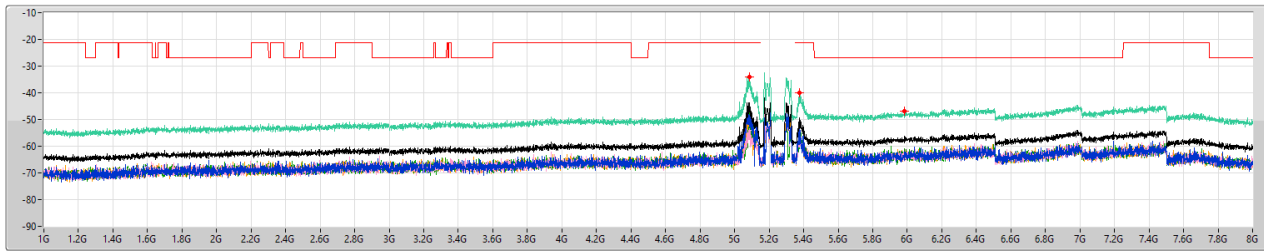


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.0845G	-34.20	-21.20	-13.00	9.40	0.00	-43.60	-52.43	-54.32	-54.54	-45.13
1G	8G	1M	PK	5.37763G	-40.01	-21.20	-18.81	9.40	0.00	-49.41	-52.26	-58.74	-56.82	-56.80
1G	8G	1M	PK	5.98225G	-46.75	-27.00	-19.75	9.40	0.00	-56.15	-62.10	-62.94	-60.98	-63.00

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX

CSE Other [AV]

5250MHz

14/02/2025

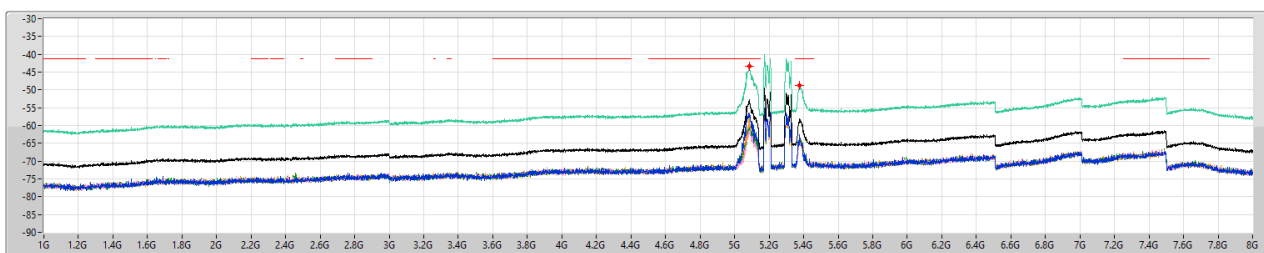

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.08713G	-43.40	-41.20	-2.20	9.40	0.00	-52.80	-57.64	-62.11	-61.80	-56.47
1G	8G	1M	AV	5.37588G	-48.81	-41.20	-7.61	9.40	0.00	-58.21	-62.67	-65.56	-64.84	-64.38

**Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	DG (dBi)	EIRP (dBm)	Psum (dBm)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Limit (dBm)	Margin (dB)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	9.40	-47.74	-57.14	-57.14				-41.20	-6.54
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	9.40	-45.78	-55.18	-58.09	-58.30			-41.20	-4.58
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	9.40	-42.99	-52.39	-59.08	-57.40	-58.78	-58.57	-41.20	-1.79
802.11be EHT160_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	9.40	-41.37	-50.77	-50.77				-41.20	-0.17
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	9.40	-41.99	-51.39	-52.64	-57.39			-41.20	-0.79
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	9.40	-41.53	-50.93	-59.61	-60.65	-59.86	-52.93	-41.20	-0.33

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX



CSE Harmonic (1~8GHz)_R5 (Internal Ant.)_Puncturing

Appendix E.8

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11be EHT80_Nss1(MCS0),RU484+RU242 CP 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.08275G	9.40	-57.99				-57.99	-48.59	-41.20	-7.39
5290MHz	Pass	1G	8G	AV	5.375G	9.40	-57.14				-57.14	-47.74	-41.20	-6.54
5290MHz	Pass	1G	8G	PK	5.08363G	9.40	-48.50				-48.50	-39.10	-21.20	-17.90
5290MHz	Pass	1G	8G	PK	5.36888G	9.40	-47.55				-47.55	-38.15	-21.20	-16.95
5290MHz	Pass	1G	8G	PK	5.942G	9.40	-49.78				-49.78	-40.38	-27.00	-13.38
5290MHz	Pass	1G	8G	PK	6.26838G	9.40	-48.14				-48.14	-38.74	-27.00	-11.74
802.11be EHT160_Nss1(MCS0),RU996+RU484+RU242 CP 7_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.10988G	9.40	-50.77				-50.77	-41.37	-41.20	-0.17
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38025G	9.40	-51.20				-51.20	-41.80	-41.20	-0.60
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.09938G	9.40	-46.05				-46.05	-36.65	-21.20	-15.45
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.41G	9.40	-48.53				-48.53	-39.13	-21.20	-17.93
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.85013G	9.40	-49.17				-49.17	-39.77	-27.00	-12.77
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	6.92288G	9.40	-47.31				-47.31	-37.91	-27.00	-10.91
802.11be EHT160_Nss1(MCS0),RU996+RU484 CP 4_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.09588G	9.40	-52.15				-52.15	-42.75	-41.20	-1.55
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.36625G	9.40	-54.80				-54.80	-45.40	-41.20	-4.20
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.12738G	9.40	-47.28				-47.28	-37.88	-21.20	-16.68
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.37675G	9.40	-50.02				-50.02	-40.62	-21.20	-19.42
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.97175G	9.40	-49.10				-49.10	-39.70	-27.00	-12.70
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	6.37338G	9.40	-47.90				-47.90	-38.50	-27.00	-11.50
802.11be EHT80_Nss1(MCS0),RU484+RU242 CP 2_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.02413G	9.40	-60.05	-59.25			-56.62	-47.22	-41.20	-6.02
5290MHz	Pass	1G	8G	AV	5.37763G	9.40	-59.31	-58.32			-55.78	-46.38	-41.20	-5.18
5290MHz	Pass	1G	8G	AV	7.48813G	9.40	-58.09	-58.30			-55.18	-45.78	-41.20	-4.58
5290MHz	Pass	1G	8G	PK	5.00575G	9.40	-52.36	-52.18			-49.26	-39.86	-21.20	-18.66
5290MHz	Pass	1G	8G	PK	5.37938G	9.40	-51.29	-49.94			-47.55	-38.15	-21.20	-16.95
5290MHz	Pass	1G	8G	PK	5.96563G	9.40	-52.36	-49.86			-47.92	-38.52	-27.00	-11.52
5290MHz	Pass	1G	8G	PK	6.4985G	9.40	-50.51	-47.47			-45.72	-36.32	-27.00	-9.32
802.11be EHT160_Nss1(MCS0),RU996+RU484+RU242 CP 6_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.123G	9.40	-52.64	-57.39			-51.39	-41.99	-41.20	-0.79
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37413G	9.40	-56.95	-57.89			-54.38	-44.98	-41.20	-3.78
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.12125G	9.40	-48.69	-46.47			-44.43	-35.03	-21.20	-13.83
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.403G	9.40	-53.72	-48.23			-47.15	-37.75	-21.20	-16.55
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.92975G	9.40	-48.86	-51.55			-46.99	-37.59	-27.00	-10.59
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	6.957G	9.40	-48.47	-49.78			-46.07	-36.67	-27.00	-9.67
802.11be EHT160_Nss1(MCS0),RU996+RU484 CP 2_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.12563G	9.40	-53.88	-58.81			-52.67	-43.27	-41.20	-2.07
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37588G	9.40	-57.27	-57.86			-54.54	-45.14	-41.20	-3.94
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.08625G	9.40	-47.10	-51.48			-45.75	-36.35	-21.20	-15.15
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.36975G	9.40	-48.44	-53.20			-47.19	-37.79	-21.20	-16.59
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.95338G	9.40	-51.26	-47.99			-46.31	-36.91	-27.00	-9.91
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	7.00688G	9.40	-47.84	-50.77			-46.05	-36.65	-27.00	-9.65
802.11be EHT80_Nss1(MCS0),RU484+RU242 CP 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.03638G	9.40	-59.60	-59.81	-60.25	-60.29	-53.96	-44.56	-41.20	-3.36
5290MHz	Pass	1G	8G	AV	5.44938G	9.40	-59.31	-59.66	-59.92	-58.62	-53.33	-43.93	-41.20	-2.73
5290MHz	Pass	1G	8G	AV	7.412G	9.40	-59.08	-57.40	-58.78	-58.57	-52.39	-42.99	-41.20	-1.79
5290MHz	Pass	1G	8G	PK	5.0355G	9.40	-52.68	-54.20	-51.72	-52.29	-46.61	-37.21	-21.20	-16.01
5290MHz	Pass	1G	8G	PK	5.37238G	9.40	-49.47	-51.13	-53.64	-52.91	-45.46	-36.06	-21.20	-14.86
5290MHz	Pass	1G	8G	PK	5.94813G	9.40	-51.72	-51.26	-49.32	-51.19	-44.75	-35.35	-27.00	-8.35
5290MHz	Pass	1G	8G	PK	6.9395G	9.40	-49.48	-51.71	-49.23	-47.57	-43.24	-33.84	-27.00	-6.84
802.11be EHT160_Nss1(MCS0),RU996+RU484+RU242 CP 7_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.116G	9.40	-59.61	-60.65	-59.86	-52.93	-50.93	-41.53	-41.20	-0.33
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38113G	9.40	-55.69	-59.65	-59.26	-59.52	-52.16	-42.76	-41.20	-1.56
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.11338G	9.40	-52.88	-54.71	-49.86	-52.35	-46.08	-36.68	-21.20	-15.48
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.3715G	9.40	-53.84	-50.37	-50.52	-51.05	-45.22	-35.82	-21.20	-14.62
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.95513G	9.40	-50.56	-51.75	-52.17	-51.20	-45.36	-35.96	-27.00	-8.96
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	6.44075G	9.40	-47.68	-50.63	-49.73	-50.51	-43.44	-34.04	-27.00	-7.04
802.11be EHT160_Nss1(MCS0),RU996+RU484 CP 2_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.12388G	9.40	-60.25	-52.91	-60.56	-60.17	-51.02	-41.62	-41.20	-0.42
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.39425G	9.40	-59.71	-56.47	-59.24	-59.75	-52.54	-43.14	-41.20	-1.94
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.09588G	9.40	-53.52	-45.89	-54.78	-54.38	-44.30	-34.90	-21.20	-13.70
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.36888G	9.40	-52.13	-43.63	-52.64	-53.73	-42.28	-32.88	-21.20	-11.68
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.92188G	9.40	-52.12	-50.15	-50.63	-52.22	-45.16	-35.76	-27.00	-8.76
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	6.49588G	9.40	-49.57	-49.63	-48.25	-50.64	-43.42	-34.02	-27.00	-7.02


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX

CSE Other [PK]

5290MHz

15/02/2025

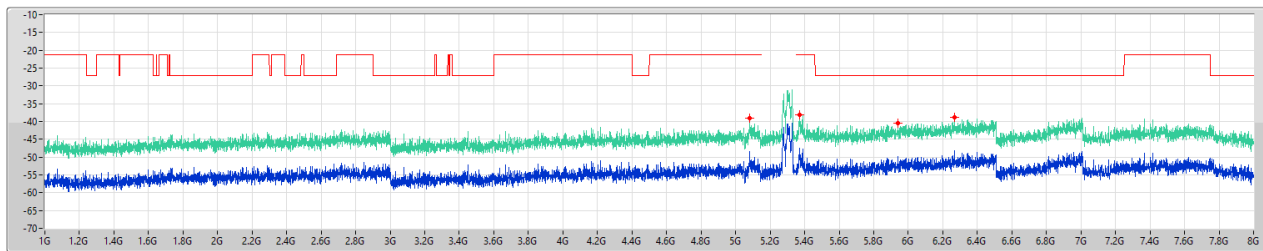


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08363G	-39.10	-21.20	-17.90	9.40	0.00	-48.50	-48.50
1G	8G	1M	PK	5.36888G	-38.15	-21.20	-16.95	9.40	0.00	-47.55	-47.55
1G	8G	1M	PK	5.942G	-40.38	-27.00	-13.38	9.40	0.00	-49.78	-49.78
1G	8G	1M	PK	6.26838G	-38.74	-27.00	-11.74	9.40	0.00	-48.14	-48.14

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_1TX

CSE Other [AV]

5290MHz

15/02/2025

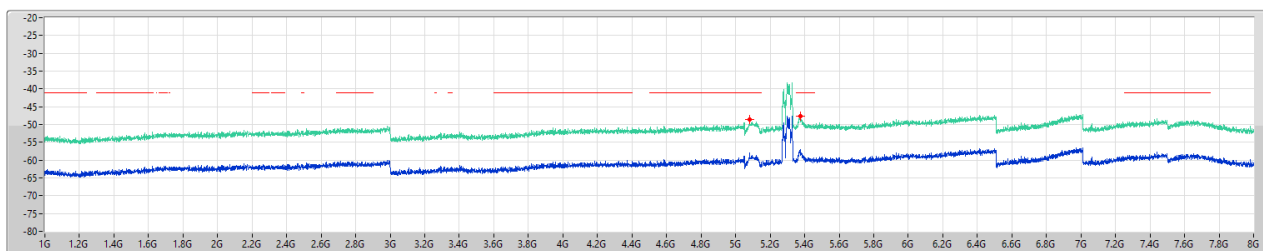


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08275G	-48.59	-41.20	-7.39	9.40	0.00	-57.99	-57.99
1G	8G	1M	AV	5.375G	-47.74	-41.20	-6.54	9.40	0.00	-57.14	-57.14

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_1TX

CSE Other [PK]


5250MHz Straddle 5.25-5.35GHz

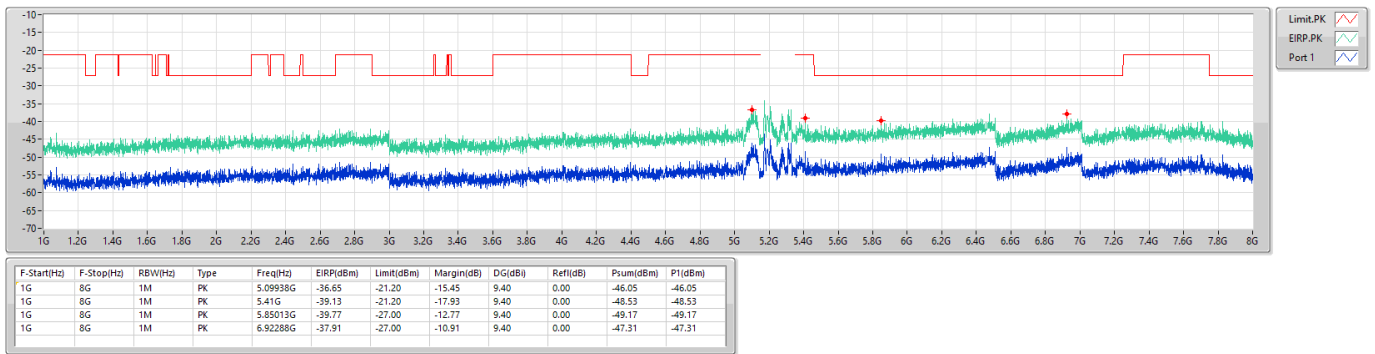

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_1TX

CSE Other [AV]


5250MHz Straddle 5.25-5.35GHz

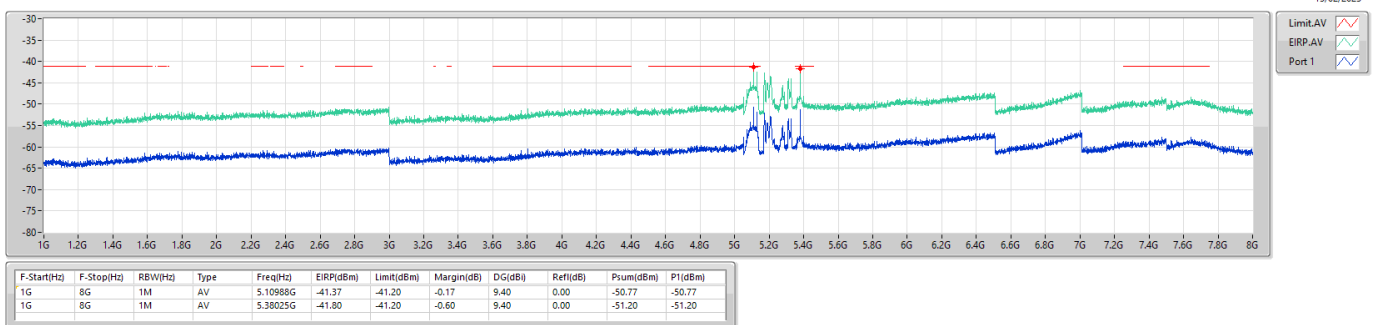

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

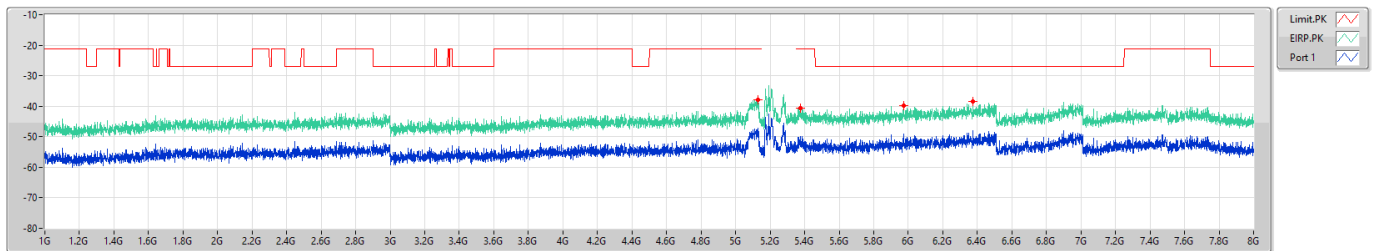


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.12738G	-37.88	-21.20	-16.68	9.40	0.00	-47.28	-47.28
1G	8G	1M	PK	5.37675G	-40.62	-21.20	-19.42	9.40	0.00	-50.02	-50.02
1G	8G	1M	PK	5.97175G	-39.70	-27.00	-12.70	9.40	0.00	-49.10	-49.10
1G	8G	1M	PK	6.37338G	-38.50	-27.00	-11.50	9.40	0.00	-47.90	-47.90

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 4_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

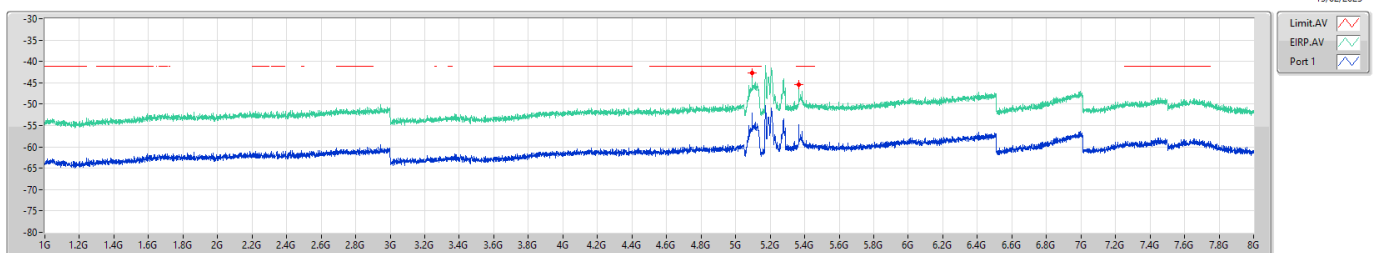


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09588G	-42.75	-41.20	-1.55	9.40	0.00	-52.15	-52.15
1G	8G	1M	AV	5.36625G	-45.40	-41.20	-4.20	9.40	0.00	-54.80	-54.80

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

CSE Other [PK]

5290MHz

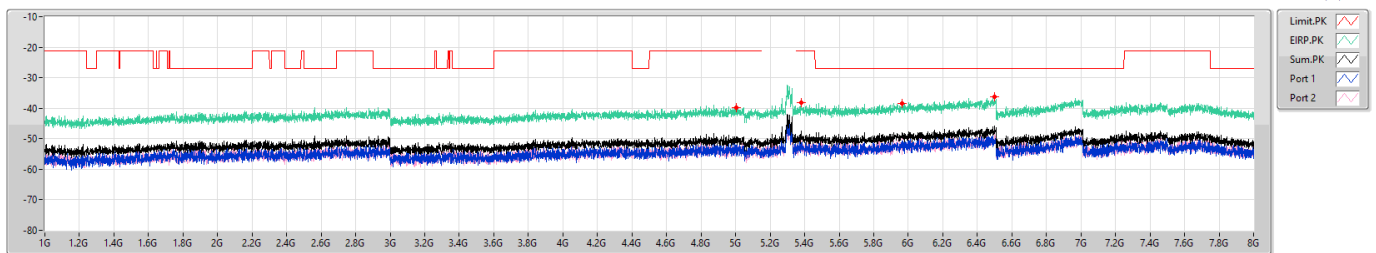


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.00575G	-39.86	-21.20	-18.66	9.40	0.00	-49.26	-52.36	-52.18
1G	8G	1M	PK	5.37938G	-38.15	-21.20	-16.95	9.40	0.00	-47.55	-51.29	-49.94
1G	8G	1M	PK	5.96563G	-38.52	-27.00	-11.52	9.40	0.00	-47.92	-52.36	-49.86
1G	8G	1M	PK	6.4985G	-36.32	-27.00	-9.32	9.40	0.00	-45.72	-50.51	-47.47

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 2_2TX

CSE Other [AV]

5290MHz

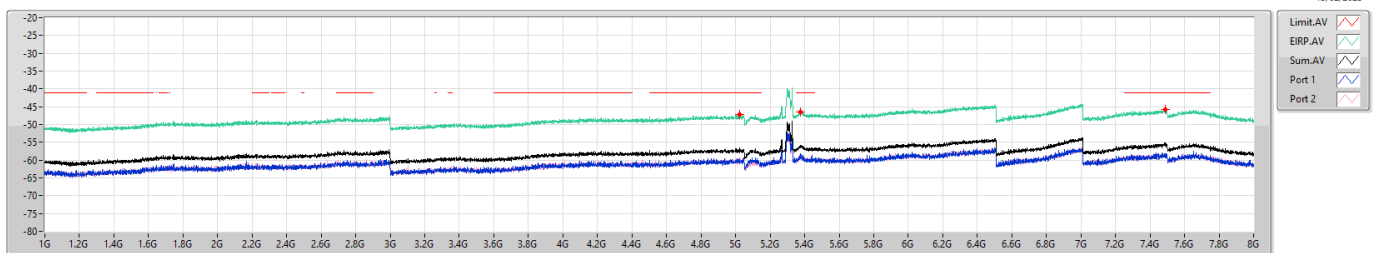


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.02413G	-47.22	-41.20	-6.02	9.40	0.00	-56.62	-60.05	-59.25
1G	8G	1M	AV	5.37763G	-46.38	-41.20	-5.18	9.40	0.00	-55.78	-59.31	-58.32
1G	8G	1M	AV	7.48813G	-45.78	-41.20	-4.58	9.40	0.00	-55.18	-58.09	-58.30

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

CSE Other [PK]


5250MHz Straddle 5.25-5.35GHz

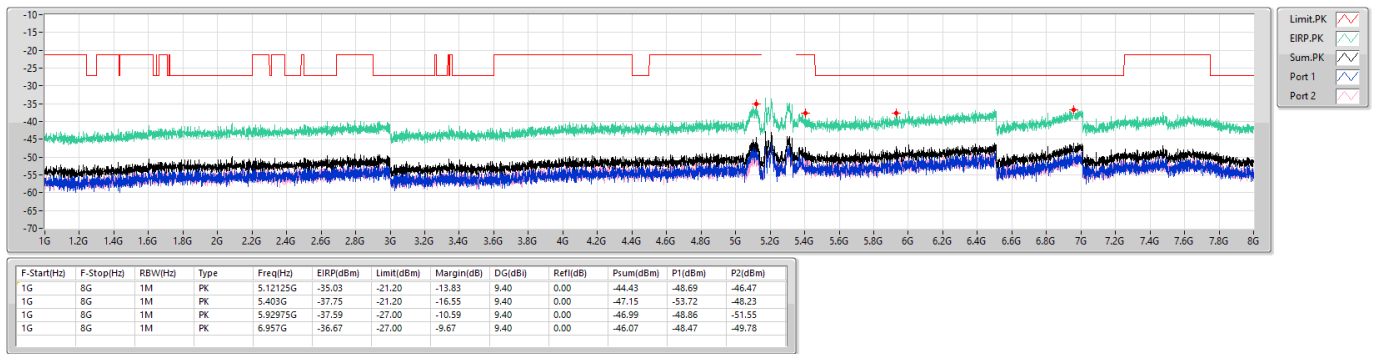

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 6_2TX

CSE Other [AV]


5250MHz Straddle 5.25-5.35GHz

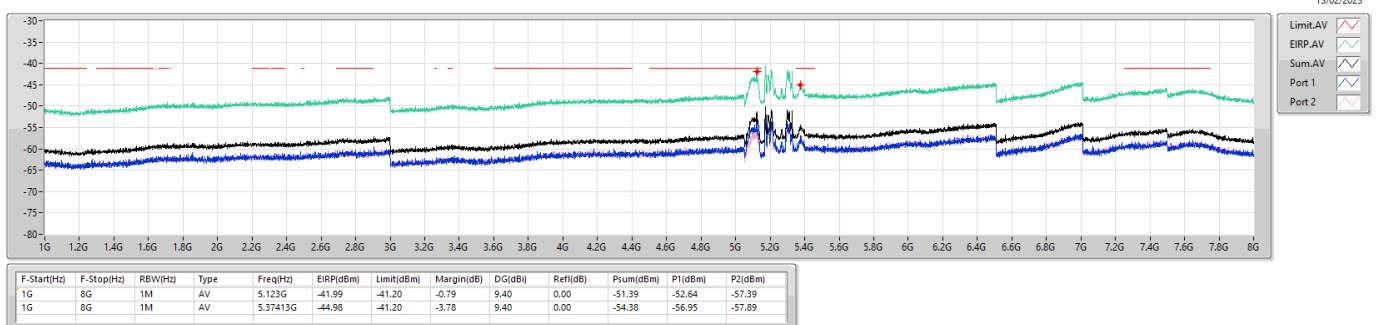

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

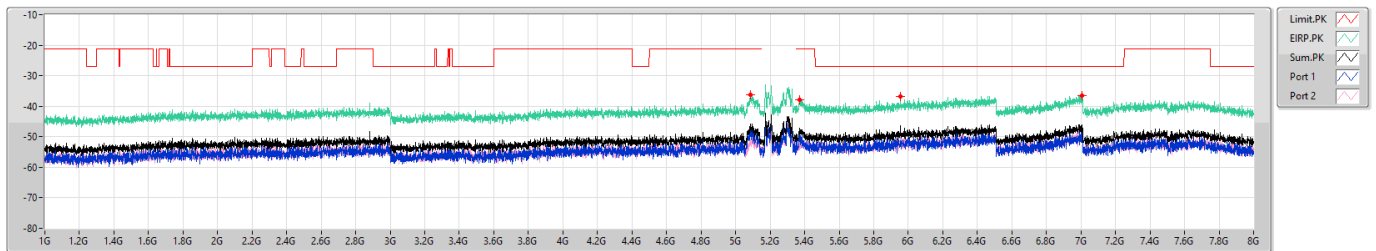


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08625G	-36.35	-21.20	-15.15	9.40	0.00	-45.75	-47.10	-51.48
1G	8G	1M	PK	5.36975G	-37.79	-21.20	-16.59	9.40	0.00	-47.19	-48.44	-53.20
1G	8G	1M	PK	5.95338G	-36.91	-27.00	-9.91	9.40	0.00	-46.31	-51.26	-47.99
1G	8G	1M	PK	7.00688G	-36.65	-27.00	-9.65	9.40	0.00	-46.05	-47.84	-50.77

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_2TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

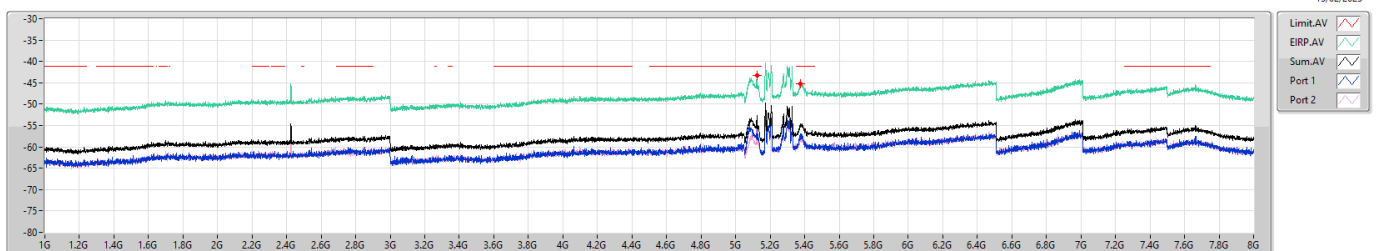


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.12563G	-43.27	-41.20	-2.07	9.40	0.00	-52.67	-53.88	-58.81
1G	8G	1M	AV	5.37588G	-45.14	-41.20	-3.94	9.40	0.00	-54.54	-57.27	-57.86

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

CSE Other [PK]

5290MHz

15/02/2025

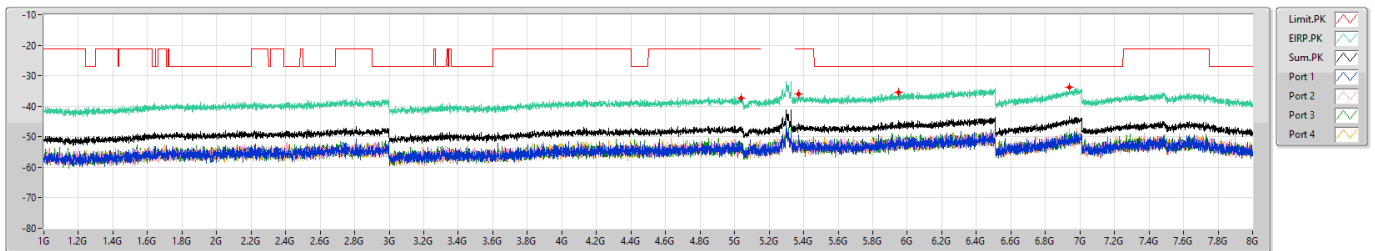


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.0355G	-37.21	-21.20	-16.01	9.40	0.00	-46.61	-52.68	-54.20	-51.72	-52.29
1G	8G	1M	PK	5.37238G	-36.06	-21.20	-14.86	9.40	0.00	-45.46	-49.47	-51.13	-53.64	-52.91
1G	8G	1M	PK	5.94813G	-35.35	-27.00	-8.35	9.40	0.00	-44.75	-51.72	-51.26	-49.32	-51.19
1G	8G	1M	PK	6.9395G	-33.84	-27.00	-6.84	9.40	0.00	-43.24	-49.48	-51.71	-49.23	-47.57

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 CP 1_4TX

CSE Other [AV]

5290MHz

15/02/2025

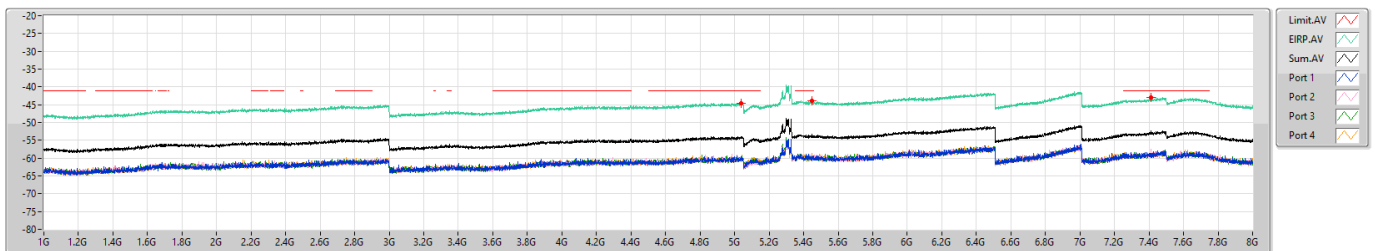


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.03638G	-44.56	-41.20	-3.36	9.40	0.00	-53.96	-59.60	-59.81	-60.25	-60.29
1G	8G	1M	AV	5.44938G	-43.93	-41.20	-2.73	9.40	0.00	-53.33	-59.31	-59.66	-59.92	-58.62
1G	8G	1M	AV	7.412G	-42.99	-41.20	-1.79	9.40	0.00	-52.39	-59.08	-57.40	-58.78	-58.57

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

15/02/2025

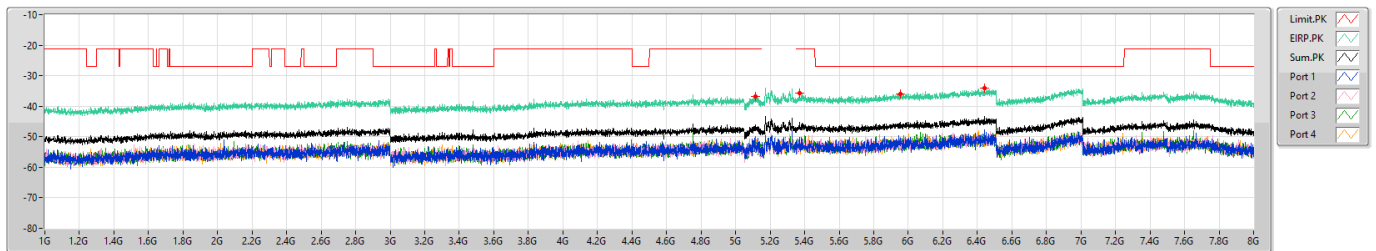


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.11338G	-36.68	-21.20	-15.48	9.40	0.00	-46.08	-52.88	-54.71	-49.86	-52.35
1G	8G	1M	PK	5.3715G	-35.82	-21.20	-14.62	9.40	0.00	-45.22	-53.84	-50.37	-50.52	-51.05
1G	8G	1M	PK	5.95513G	-35.96	-27.00	-8.96	9.40	0.00	-45.36	-50.56	-51.75	-52.17	-51.20
1G	8G	1M	PK	6.44075G	-34.04	-27.00	-7.04	9.40	0.00	-43.44	-47.68	-50.63	-49.73	-50.51

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 CP 7_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

15/02/2025

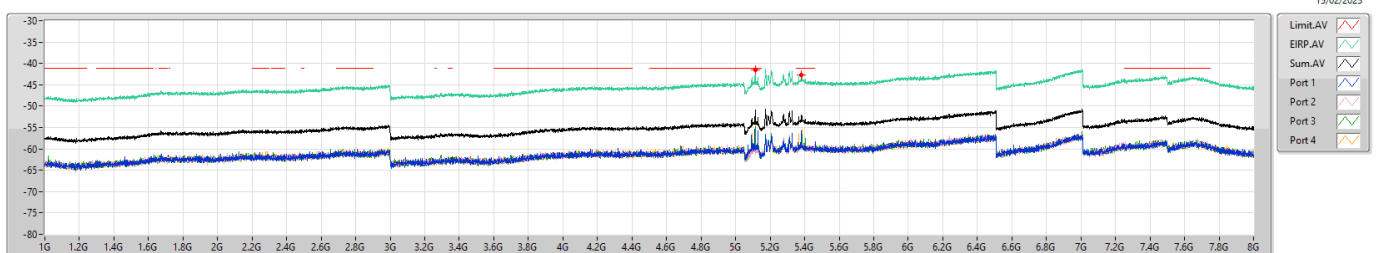


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.116G	-41.53	-41.20	-0.33	9.40	0.00	-50.93	-59.61	-60.65	-59.86	-52.93
1G	8G	1M	AV	5.38113G	-42.76	-41.20	-1.56	9.40	0.00	-52.16	-55.69	-59.65	-59.26	-59.52

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

15/02/2025

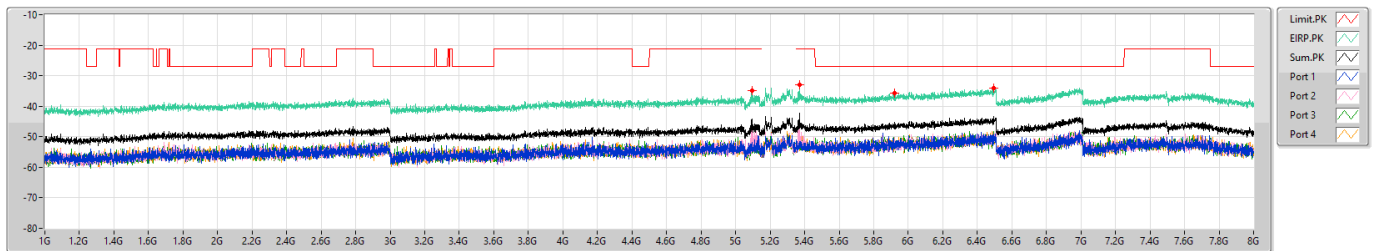


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.09588G	-34.90	-21.20	-13.70	9.40	0.00	-44.30	-53.52	-45.89	-54.78	-54.38
1G	8G	1M	PK	5.36888G	-32.88	-21.20	-11.68	9.40	0.00	-42.28	-52.13	-43.63	-52.64	-53.73
1G	8G	1M	PK	5.92188G	-35.76	-27.00	-8.76	9.40	0.00	-45.16	-52.12	-50.15	-50.63	-52.22
1G	8G	1M	PK	6.49588G	-34.02	-27.00	-7.02	9.40	0.00	-43.42	-49.57	-49.63	-48.25	-50.64

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 CP 2_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

15/02/2025

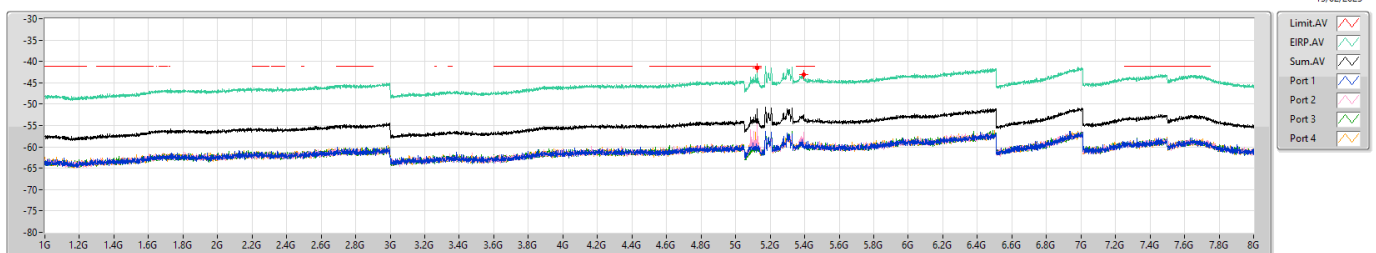

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.12388G	-41.62	-41.20	-0.42	9.40	0.00	-51.02	-60.25	-52.91	-60.56	-60.17
1G	8G	1M	AV	5.39425G	-43.14	-41.20	-1.94	9.40	0.00	-52.54	-59.71	-56.47	-59.24	-59.75

**Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	EIRP (dBm)	Psum (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	P1 (dBm)	Limit (dBm)	Margin (dB)	DG (dBi)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	Pass	1G	8G	AV	-52.44	-59.95				-59.95	-41.20	-11.24	7.51
802.11a_Nss1,(6Mbps)_2TX	Pass	1G	8G	AV	-52.44	-59.95	-62.82			-63.11	-41.20	-11.24	7.51
802.11a_Nss1,(6Mbps)_4TX	Pass	1G	8G	AV	-51.96	-59.47	-68.59	-66.85	-61.89	-68.64	-41.20	-10.76	7.51
802.11be EHT20_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-52.26	-59.77				-59.77	-41.20	-11.06	7.51
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-52.18	-59.69	-62.75			-62.66	-41.20	-10.98	7.51
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-52.37	-59.88	-68.60	-67.01	-62.59	-68.52	-41.20	-11.17	7.51
802.11be EHT40_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-41.25	-48.76				-48.76	-41.20	-0.05	7.51
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-50.65	-58.16	-62.73			-60.03	-41.20	-9.45	7.51
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-51.16	-58.67	-64.94	-65.44	-63.44	-65.26	-41.20	-9.96	7.51
802.11be EHT80_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-44.27	-51.78				-51.78	-41.20	-3.07	7.51
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-47.99	-55.50	-59.35			-57.81	-41.20	-6.79	7.51
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-53.40	-60.91	-68.17	-67.57	-65.00	-67.75	-41.20	-12.20	7.51
802.11be EHT160_Nss1,(MCS0)_1TX	Pass	1G	8G	AV	-41.42	-48.93				-48.93	-41.20	-0.22	7.51
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	1G	8G	AV	-44.62	-52.13	-55.72			-54.63	-41.20	-3.42	7.51
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	1G	8G	AV	-49.05	-56.56	-61.58	-63.31	-62.75	-62.88	-41.20	-7.85	7.51

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11a_Nss1(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.09413G	7.51	-61.35				-61.35	-53.84	-41.20	-12.64
5260MHz	Pass	1G	8G	AV	5.382G	7.51	-61.49				-61.49	-53.98	-41.20	-12.78
5260MHz	Pass	1G	8G	PK	5.081G	7.51	-52.16				-52.16	-44.65	-21.20	-23.45
5260MHz	Pass	1G	8G	PK	5.3855G	7.51	-52.27				-52.27	-44.76	-21.20	-23.56
5260MHz	Pass	1G	8G	PK	5.76G	7.51	-68.19				-68.19	-60.68	-27.00	-33.68
5300MHz	Pass	1G	8G	AV	5.081G	7.51	-62.60				-62.60	-55.09	-41.20	-13.89
5300MHz	Pass	1G	8G	AV	5.37938G	7.51	-62.26				-62.26	-54.75	-41.20	-13.55
5300MHz	Pass	1G	8G	PK	5.08888G	7.51	-51.23				-51.23	-43.72	-21.20	-22.52
5300MHz	Pass	1G	8G	PK	5.38638G	7.51	-53.13				-53.13	-45.62	-21.20	-24.42
5300MHz	Pass	1G	8G	PK	5.75125G	7.51	-69.12				-69.12	-61.61	-27.00	-34.61
5320MHz	Pass	1G	8G	AV	5.095G	7.51	-62.18				-62.18	-54.67	-41.20	-13.47
5320MHz	Pass	1G	8G	AV	5.38288G	7.51	-59.95				-59.95	-52.44	-41.20	-11.24
5320MHz	Pass	1G	8G	PK	5.10988G	7.51	-52.75				-52.75	-45.24	-21.20	-24.04
5320MHz	Pass	1G	8G	PK	5.36975G	7.51	-50.48				-50.48	-42.97	-21.20	-21.77
5320MHz	Pass	1G	8G	PK	5.76788G	7.51	-76.43				-76.43	-68.92	-27.00	-41.92
802.11be EHT20_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.10375G	7.51	-61.26				-61.26	-53.75	-41.20	-12.55
5260MHz	Pass	1G	8G	AV	5.3855G	7.51	-61.71				-61.71	-54.20	-41.20	-13.00
5260MHz	Pass	1G	8G	PK	5.09763G	7.51	-52.14				-52.14	-44.63	-21.20	-23.43
5260MHz	Pass	1G	8G	PK	5.38113G	7.51	-51.05				-51.05	-43.54	-21.20	-22.34
5260MHz	Pass	1G	8G	PK	5.74775G	7.51	-69.40				-69.40	-61.89	-27.00	-34.89
5300MHz	Pass	1G	8G	AV	5.08538G	7.51	-62.40				-62.40	-54.89	-41.20	-13.69
5300MHz	Pass	1G	8G	AV	5.37763G	7.51	-62.08				-62.08	-54.57	-41.20	-13.37
5300MHz	Pass	1G	8G	PK	5.09063G	7.51	-52.08				-52.08	-44.57	-21.20	-23.37
5300MHz	Pass	1G	8G	PK	5.38113G	7.51	-52.84				-52.84	-45.33	-21.20	-24.13
5300MHz	Pass	1G	8G	PK	5.78188G	7.51	-75.02				-75.02	-67.51	-27.00	-40.51
5320MHz	Pass	1G	8G	AV	5.08888G	7.51	-62.30				-62.30	-54.79	-41.20	-13.59
5320MHz	Pass	1G	8G	AV	5.37063G	7.51	-59.77				-59.77	-52.26	-41.20	-11.06
5320MHz	Pass	1G	8G	PK	5.08188G	7.51	-51.92				-51.92	-44.41	-21.20	-23.21
5320MHz	Pass	1G	8G	PK	5.3715G	7.51	-49.35				-49.35	-41.84	-21.20	-20.64
5320MHz	Pass	1G	8G	PK	5.76613G	7.51	-77.90				-77.90	-70.39	-27.00	-43.39
802.11be EHT40_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.10375G	7.51	-58.40				-58.40	-50.89	-41.20	-9.69
5270MHz	Pass	1G	8G	AV	5.38288G	7.51	-58.52				-58.52	-51.01	-41.20	-9.81
5270MHz	Pass	1G	8G	PK	5.1125G	7.51	-49.81				-49.81	-42.30	-21.20	-21.10
5270MHz	Pass	1G	8G	PK	5.38113G	7.51	-50.53				-50.53	-43.02	-21.20	-21.82
5270MHz	Pass	1G	8G	PK	5.76G	7.51	-67.21				-67.21	-59.70	-27.00	-32.70
5310MHz	Pass	1G	8G	AV	5.10725G	7.51	-60.15				-60.15	-52.64	-41.20	-11.44
5310MHz	Pass	1G	8G	AV	5.36975G	7.51	-48.76				-48.76	-41.25	-41.20	-0.05
5310MHz	Pass	1G	8G	PK	5.0915G	7.51	-49.51				-49.51	-42.00	-21.20	-20.80
5310MHz	Pass	1G	8G	PK	5.37238G	7.51	-39.41				-39.41	-31.90	-21.20	-10.70
5310MHz	Pass	1G	8G	PK	5.74775G	7.51	-85.68				-85.68	-78.17	-27.00	-51.17
802.11be EHT80_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.08975G	7.51	-58.76				-58.76	-51.25	-41.20	-10.05
5290MHz	Pass	1G	8G	AV	5.37238G	7.51	-51.78				-51.78	-44.27	-41.20	-3.07
5290MHz	Pass	1G	8G	PK	5.0915G	7.51	-50.00				-50.00	-42.49	-21.20	-21.29
5290MHz	Pass	1G	8G	PK	5.368G	7.51	-40.48				-40.48	-32.97	-21.20	-11.77
5290MHz	Pass	1G	8G	PK	5.74775G	7.51	-62.75				-62.75	-55.24	-27.00	-28.24
802.11be EHT160_Nss1(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.1125G	7.51	-48.93				-48.93	-41.42	-41.20	-0.22
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38288G	7.51	-52.87				-52.87	-45.36	-41.20	-4.16
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.1055G	7.51	-41.65				-41.65	-34.14	-21.20	-12.94
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.3855G	7.51	-42.90				-42.90	-35.39	-21.20	-14.19
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.9455G	7.51	-85.47				-85.47	-77.96	-27.00	-50.96
802.11a_Nss1(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.08363G	7.51	-64.71	-64.56			-61.62	-54.11	-41.20	-12.91
5260MHz	Pass	1G	8G	AV	5.3785G	7.51	-63.32	-63.61			-60.45	-52.94	-41.20	-11.74
5260MHz	Pass	1G	8G	PK	5.0845G	7.51	-55.05	-56.25			-52.60	-45.09	-21.20	-23.89
5260MHz	Pass	1G	8G	PK	5.382G	7.51	-53.44	-54.52			-50.94	-43.43	-21.20	-22.23
5260MHz	Pass	1G	8G	PK	5.75825G	7.51	-68.35	-66.21			-68.28	-60.77	-27.00	-33.77
5300MHz	Pass	1G	8G	AV	5.0915G	7.51	-65.16	-65.21			-62.17	-54.66	-41.20	-13.46
5300MHz	Pass	1G	8G	AV	5.38288G	7.51	-65.01	-64.64			-61.81	-54.30	-41.20	-13.10
5300MHz	Pass	1G	8G	PK	5.09413G	7.51	-56.36	-53.85			-51.92	-44.41	-21.20	-23.21
5300MHz	Pass	1G	8G	PK	5.3785G	7.51	-57.32	-55.32			-53.20	-45.69	-21.20	-24.49
5300MHz	Pass	1G	8G	PK	5.753G	7.51	-64.56	-69.49			-64.55	-57.04	-27.00	-30.04
5320MHz	Pass	1G	8G	AV	5.08363G	7.51	-64.67	-64.53			-61.59	-54.08	-41.20	-12.88
5320MHz	Pass	1G	8G	AV	5.382G	7.51	-63.11	-62.82			-59.95	-52.44	-41.20	-11.24
5320MHz	Pass	1G	8G	PK	5.09325G	7.51	-55.86	-55.32			-52.57	-45.06	-21.20	-23.86

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5320MHz	Pass	1G	8G	PK	5.38025G	7.51	-53.59	-53.55			-50.56	-43.05	-21.20	-21.85
5320MHz	Pass	1G	8G	PK	5.74338G	7.51	-88.90	-67.26			-67.23	-59.72	-27.00	-32.72
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.08188G	7.51	-64.60	-64.32			-61.45	-53.94	-41.20	-12.74
5260MHz	Pass	1G	8G	AV	5.37763G	7.51	-63.88	-62.81			-60.30	-52.79	-41.20	-11.59
5260MHz	Pass	1G	8G	PK	5.08888G	7.51	-55.88	-55.00			-52.41	-44.90	-21.20	-23.70
5260MHz	Pass	1G	8G	PK	5.37588G	7.51	-56.78	-52.34			-51.01	-43.50	-21.20	-22.30
5260MHz	Pass	1G	8G	PK	5.76G	7.51	-67.72	-88.59			-67.68	-60.17	-27.00	-33.17
5300MHz	Pass	1G	8G	AV	5.08975G	7.51	-64.88	-65.37			-62.11	-54.60	-41.20	-13.40
5300MHz	Pass	1G	8G	AV	5.37675G	7.51	-63.87	-64.44			-61.14	-53.63	-41.20	-12.43
5300MHz	Pass	1G	8G	PK	5.08625G	7.51	-55.74	-56.03			-52.87	-45.36	-21.20	-24.16
5300MHz	Pass	1G	8G	PK	5.37938G	7.51	-54.54	-57.29			-52.69	-45.18	-21.20	-23.98
5300MHz	Pass	1G	8G	PK	5.77225G	7.51	-71.51	-70.18			-67.78	-60.27	-27.00	-33.27
5320MHz	Pass	1G	8G	AV	5.09413G	7.51	-64.77	-65.06			-61.90	-54.39	-41.20	-13.19
5320MHz	Pass	1G	8G	AV	5.37675G	7.51	-62.66	-62.75			-59.69	-52.18	-41.20	-10.98
5320MHz	Pass	1G	8G	PK	5.08538G	7.51	-54.65	-55.80			-52.18	-44.67	-21.20	-23.47
5320MHz	Pass	1G	8G	PK	5.3715G	7.51	-52.12	-55.47			-50.47	-42.96	-21.20	-21.76
5320MHz	Pass	1G	8G	PK	5.76G	7.51	-66.09	-88.02			-66.06	-58.55	-27.00	-31.55
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.0915G	7.51	-62.68	-63.88			-60.23	-52.72	-41.20	-11.52
5270MHz	Pass	1G	8G	AV	5.382G	7.51	-63.44	-63.38			-60.40	-52.89	-41.20	-11.69
5270MHz	Pass	1G	8G	PK	5.09325G	7.51	-52.62	-53.22			-49.90	-42.39	-21.20	-21.19
5270MHz	Pass	1G	8G	PK	5.38025G	7.51	-54.90	-52.06			-50.24	-42.73	-21.20	-21.53
5270MHz	Pass	1G	8G	PK	5.75913G	7.51	-67.40	-87.75			-67.36	-59.85	-27.00	-32.85
5310MHz	Pass	1G	8G	AV	5.08625G	7.51	-62.89	-62.93			-59.90	-52.39	-41.20	-11.19
5310MHz	Pass	1G	8G	AV	5.37763G	7.51	-60.03	-62.73			-58.16	-50.65	-41.20	-9.45
5310MHz	Pass	1G	8G	PK	5.08888G	7.51	-54.81	-52.27			-50.35	-42.84	-21.20	-21.64
5310MHz	Pass	1G	8G	PK	5.375G	7.51	-49.09	-53.58			-47.77	-40.26	-21.20	-19.06
5310MHz	Pass	1G	8G	PK	5.8125G	7.51	-88.52	-72.84			-72.72	-65.21	-27.00	-38.21
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.09238G	7.51	-60.79	-63.04			-58.76	-51.25	-41.20	-10.05
5290MHz	Pass	1G	8G	AV	5.37325G	7.51	-57.81	-59.35			-55.50	-47.99	-41.20	-6.79
5290MHz	Pass	1G	8G	PK	5.08888G	7.51	-52.25	-55.15			-50.45	-42.94	-21.20	-21.74
5290MHz	Pass	1G	8G	PK	5.37063G	7.51	-49.99	-48.42			-46.12	-38.61	-21.20	-17.41
5290MHz	Pass	1G	8G	PK	5.74688G	7.51	-67.82	-63.40			-62.06	-54.55	-27.00	-27.55
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.09325G	7.51	-54.63	-55.72			-52.13	-44.62	-41.20	-3.42
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37763G	7.51	-57.21	-57.76			-54.47	-46.96	-41.20	-5.76
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.10638G	7.51	-44.59	-47.14			-42.67	-35.16	-21.20	-13.96
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38638G	7.51	-46.72	-48.59			-44.54	-37.03	-21.20	-15.83
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.74688G	7.51	-67.87	-88.66			-67.83	-60.32	-27.00	-33.32
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.102G	7.51	-68.64	-68.59	-66.85	-61.89	-59.47	-51.96	-41.20	-10.76
5260MHz	Pass	1G	8G	AV	5.38113G	7.51	-64.40	-63.36	-70.38	-70.23	-59.95	-52.44	-41.20	-11.24
5260MHz	Pass	1G	8G	PK	5.10463G	7.51	-60.30	-60.96	-57.34	-53.26	-50.81	-43.30	-21.20	-22.10
5260MHz	Pass	1G	8G	PK	5.37675G	7.51	-57.44	-54.46	-61.80	-63.43	-51.87	-44.36	-21.20	-23.16
5260MHz	Pass	1G	8G	PK	5.74863G	7.51	-64.07	-72.47	-88.68	-77.49	-63.30	-55.79	-27.00	-28.79
5300MHz	Pass	1G	8G	AV	5.08713G	7.51	-68.69	-69.15	-68.02	-68.46	-62.54	-55.03	-41.20	-13.83
5300MHz	Pass	1G	8G	AV	5.382G	7.51	-68.74	-68.70	-69.69	-69.84	-63.19	-55.68	-41.20	-14.48
5300MHz	Pass	1G	8G	PK	2.45513G	7.51	-82.69	-58.80	-89.03	-76.54	-58.71	-51.20	-27.00	-24.20
5300MHz	Pass	1G	8G	PK	5.08538G	7.51	-60.16	-60.18	-59.27	-58.25	-53.37	-45.86	-21.20	-24.66
5300MHz	Pass	1G	8G	PK	5.3785G	7.51	-59.12	-61.67	-61.85	-60.24	-54.55	-47.04	-21.20	-25.84
5300MHz	Pass	1G	8G	PK	5.7495G	7.51	-89.20	-89.72	-88.65	-64.85	-64.80	-57.29	-27.00	-30.29
5320MHz	Pass	1G	8G	AV	5.08713G	7.51	-68.03	-67.79	-67.39	-67.62	-61.68	-54.17	-41.20	-12.97
5320MHz	Pass	1G	8G	AV	5.38025G	7.51	-67.65	-67.63	-68.00	-68.50	-61.91	-54.40	-41.20	-13.20
5320MHz	Pass	1G	8G	PK	5.07925G	7.51	-59.17	-59.69	-59.03	-58.01	-52.91	-45.40	-21.20	-24.20
5320MHz	Pass	1G	8G	PK	5.37763G	7.51	-58.36	-60.24	-59.52	-59.42	-53.31	-45.80	-21.20	-24.60
5320MHz	Pass	1G	8G	PK	5.7775G	7.51	-69.82	-88.40	-88.25	-90.14	-69.66	-62.15	-27.00	-35.15
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5260MHz	Pass	1G	8G	AV	5.0985G	7.51	-68.52	-68.60	-67.01	-62.59	-59.88	-52.37	-41.20	-11.17
5260MHz	Pass	1G	8G	AV	5.37763G	7.51	-65.21	-64.79	-69.66	-69.60	-60.70	-53.19	-41.20	-11.99
5260MHz	Pass	1G	8G	PK	5.0985G	7.51	-59.99	-59.50	-59.08	-52.08	-50.20	-42.69	-21.20	-21.49
5260MHz	Pass	1G	8G	PK	5.38288G	7.51	-54.56	-54.84	-61.32	-61.48	-50.85	-43.34	-21.20	-22.14
5260MHz	Pass	1G	8G	PK	5.76088G	7.51	-66.95	-88.29	-89.94	-89.16	-66.87	-59.36	-27.00	-32.36
5300MHz	Pass	1G	8G	AV	5.08275G	7.51	-68.94	-68.85	-68.54	-68.31	-62.63	-55.12	-41.20	-13.92
5300MHz	Pass	1G	8G	AV	5.37938G	7.51	-68.98	-68.97	-69.19	-69.33	-63.09	-55.58	-41.20	-14.38
5300MHz	Pass	1G	8G	PK	5.081G	7.51	-60.15	-60.06	-59.38	-58.74	-53.52	-46.01	-21.20	-24.81
5300MHz	Pass	1G	8G	PK	5.37938G	7.51	-60.41	-59.79	-62.97	-62.45	-55.18	-47.67	-21.20	-26.47
5300MHz	Pass	1G	8G	PK	5.74888G	7.51	-89.51	-65.61	-88.20	-89.22	-65.55	-58.04	-27.00	-31.04
5320MHz	Pass	1G	8G	AV	5.0845G	7.51	-67.63	-68.40	-67.30	-68.31	-61.86	-54.35	-41.20	-13.15

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5320MHz	Pass	1G	8G	AV	5.3785G	7.51	-66.85	-67.14	-68.25	-68.57	-61.62	-54.11	-41.20	-12.91
5320MHz	Pass	1G	8G	PK	5.08713G	7.51	-59.50	-58.40	-57.69	-60.32	-52.84	-45.33	-21.20	-24.13
5320MHz	Pass	1G	8G	PK	5.37838G	7.51	-55.93	-58.83	-59.03	-60.22	-52.17	-44.66	-21.20	-23.46
5320MHz	Pass	1G	8G	PK	5.7495G	7.51	-75.13	-88.84	-88.00	-65.41	-64.93	-57.42	-27.00	-30.42
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5270MHz	Pass	1G	8G	AV	5.10025G	7.51	-65.26	-64.94	-65.44	-63.44	-58.67	-51.16	-41.20	-9.96
5270MHz	Pass	1G	8G	AV	5.38113G	7.51	-65.78	-65.99	-66.86	-66.77	-60.30	-52.79	-41.20	-11.59
5270MHz	Pass	1G	8G	PK	5.10113G	7.51	-58.05	-57.00	-55.07	-54.61	-49.94	-42.43	-21.20	-21.23
5270MHz	Pass	1G	8G	PK	5.37763G	7.51	-56.24	-57.97	-56.59	-58.62	-51.23	-43.72	-21.20	-22.52
5270MHz	Pass	1G	8G	PK	5.7425G	7.51	-90.76	-87.07	-66.67	-89.65	-66.59	-59.08	-27.00	-32.08
5310MHz	Pass	1G	8G	AV	5.08538G	7.51	-66.07	-66.05	-65.66	-66.17	-59.96	-52.45	-41.20	-11.25
5310MHz	Pass	1G	8G	AV	5.37938G	7.51	-65.29	-65.35	-66.40	-66.60	-59.85	-52.34	-41.20	-11.14
5310MHz	Pass	1G	8G	PK	5.0845G	7.51	-57.38	-58.05	-55.68	-57.17	-50.96	-43.45	-21.20	-22.25
5310MHz	Pass	1G	8G	PK	5.38375G	7.51	-56.26	-56.24	-56.76	-58.12	-50.76	-43.25	-21.20	-22.05
5310MHz	Pass	1G	8G	PK	5.753G	7.51	-66.52	-87.92	-88.50	-88.37	-66.43	-58.92	-27.00	-31.92
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.102G	7.51	-67.75	-68.17	-67.57	-65.00	-60.91	-53.40	-41.20	-12.20
5290MHz	Pass	1G	8G	AV	5.3785G	7.51	-67.44	-67.35	-68.37	-68.56	-61.88	-54.37	-41.20	-13.17
5290MHz	Pass	1G	8G	PK	5.10813G	7.51	-57.60	-59.59	-59.69	-56.99	-52.28	-44.77	-21.20	-23.57
5290MHz	Pass	1G	8G	PK	5.37238G	7.51	-58.85	-61.04	-60.67	-57.87	-53.39	-45.88	-21.20	-24.68
5290MHz	Pass	1G	8G	PK	5.73813G	7.51	-68.69	-89.97	-81.47	-87.42	-68.38	-60.87	-27.00	-33.87
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.095G	7.51	-62.88	-61.58	-63.31	-62.75	-56.56	-49.05	-41.20	-7.85
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37675G	7.51	-66.61	-65.66	-66.56	-66.01	-60.17	-52.66	-41.20	-11.46
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.09413G	7.51	-53.73	-54.33	-52.67	-52.25	-47.15	-39.64	-21.20	-18.44
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38463G	7.51	-56.29	-59.75	-56.79	-58.31	-51.56	-44.05	-21.20	-22.85
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.74688G	7.51	-88.24	-61.69	-72.37	-79.90	-61.26	-53.75	-27.00	-26.75


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5260MHz

24/01/2025

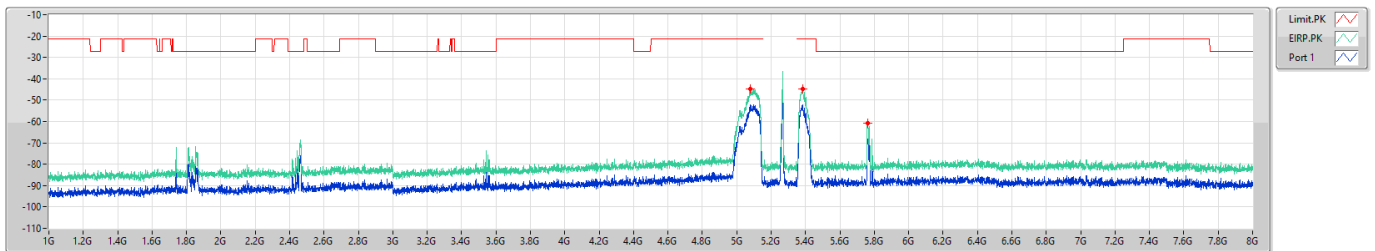


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.081G	-44.65	-21.20	-23.45	7.51	0.00	-52.16	-52.16
1G	8G	1M	PK	5.3855G	-44.76	-21.20	-23.56	7.51	0.00	-52.27	-52.27
1G	8G	1M	PK	5.76G	-60.68	-27.00	-33.68	7.51	0.00	-68.19	-68.19

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5260MHz

24/01/2025

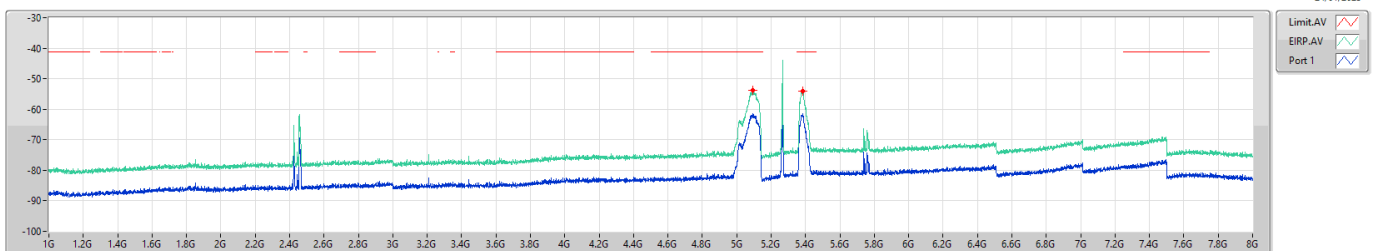


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.09413G	-53.84	-41.20	-12.64	7.51	0.00	-61.35	-61.35
1G	8G	1M	AV	5.382G	-53.98	-41.20	-12.78	7.51	0.00	-61.49	-61.49

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5300MHz

24/01/2025

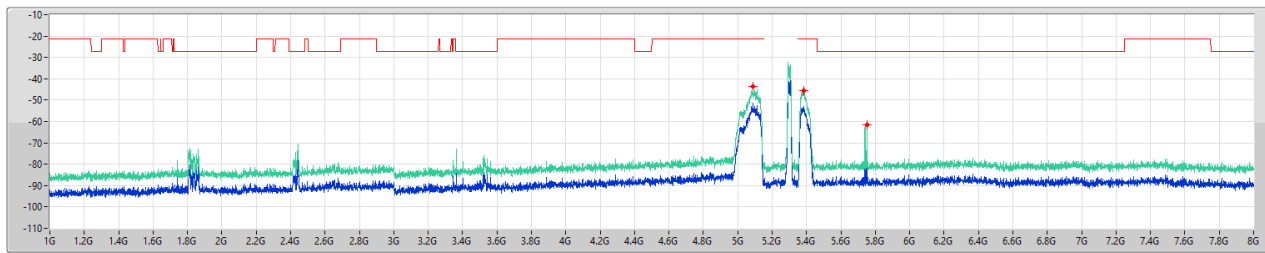


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08888G	-43.72	-21.20	-22.52	7.51	0.00	-51.23	-51.23
1G	8G	1M	PK	5.38638G	-45.62	-21.20	-24.42	7.51	0.00	-53.13	-53.13
1G	8G	1M	PK	5.175125G	-61.61	-27.00	-34.61	7.51	0.00	-69.12	-69.12

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5300MHz

24/01/2025

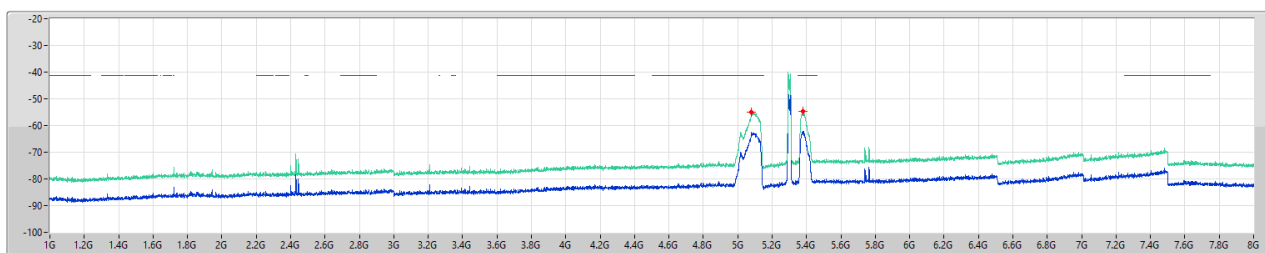


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.081G	-55.09	-41.20	-13.89	7.51	0.00	-62.60	-62.60
1G	8G	1M	AV	5.37938G	-54.75	-41.20	-13.55	7.51	0.00	-62.26	-62.26

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [PK]

5320MHz

24/01/2025

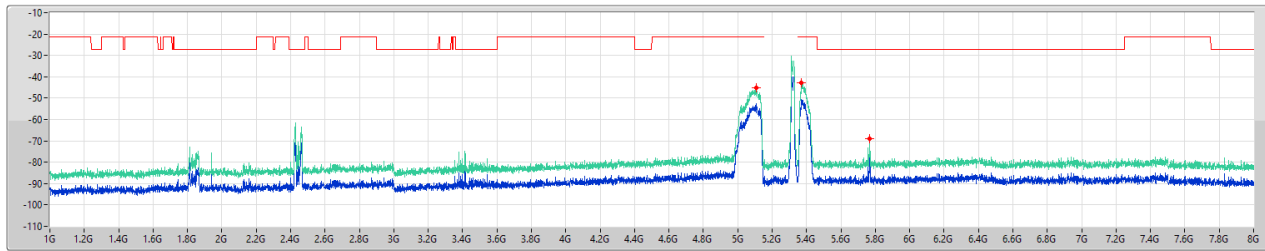


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.10988G	-45.24	-21.20	-24.04	7.51	0.00	-52.75	-52.75
1G	8G	1M	PK	5.36975G	-42.97	-21.20	-21.77	7.51	0.00	-50.48	-50.48
1G	8G	1M	PK	5.76788G	-68.92	-27.00	-41.92	7.51	0.00	-76.43	-76.43

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_1TX

CSE Other [AV]

5320MHz

24/01/2025

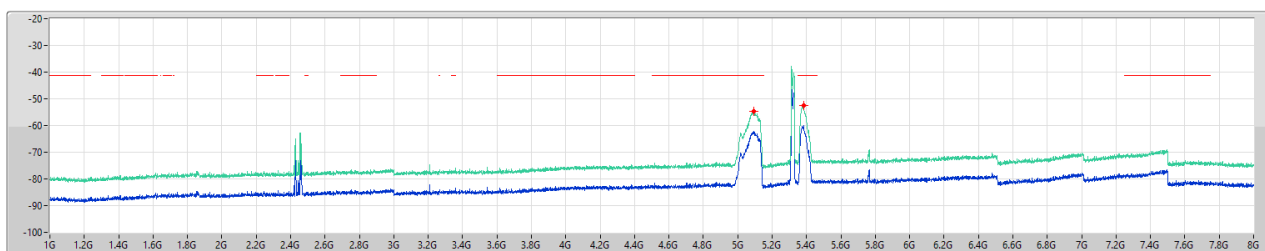


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.095G	-54.67	-41.20	-13.47	7.51	0.00	-62.18	-62.18
1G	8G	1M	AV	5.38288G	-52.44	-41.20	-11.24	7.51	0.00	-59.95	-59.95

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5260MHz

24/01/2025

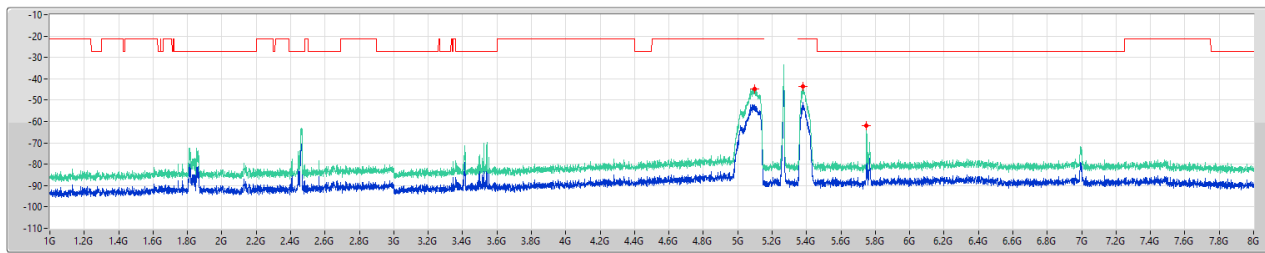


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.09763G	-44.63	-21.20	-23.43	7.51	0.00	-52.14	-52.14
1G	8G	1M	PK	5.36113G	-43.54	-21.20	-22.34	7.51	0.00	-51.05	-51.05
1G	8G	1M	PK	5.74775G	-61.89	-27.00	-34.89	7.51	0.00	-69.40	-69.40

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5260MHz

24/01/2025

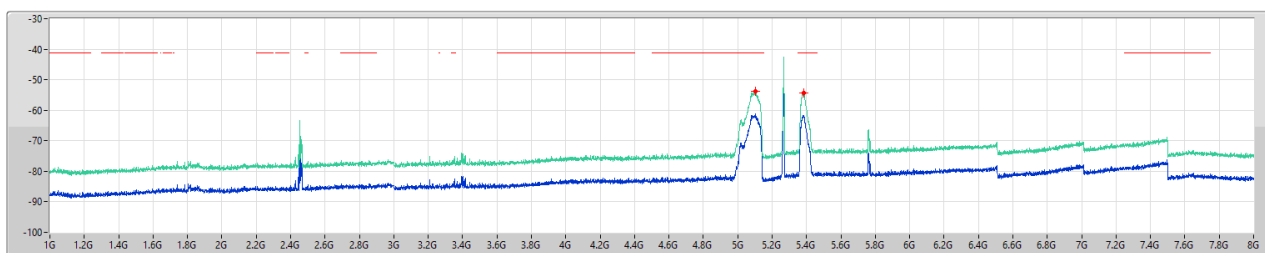


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10375G	-53.75	-41.20	-12.55	7.51	0.00	-61.26	-61.26
1G	8G	1M	AV	5.3855G	-54.20	-41.20	-13.00	7.51	0.00	-61.71	-61.71

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5300MHz

24/01/2025

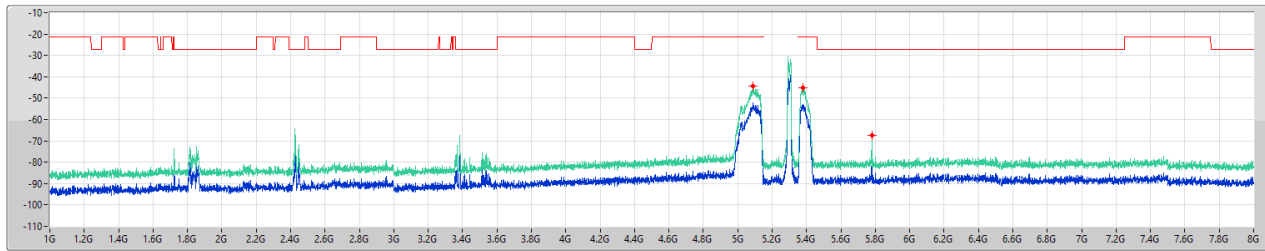


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.09063G	-44.57	-21.20	-23.37	7.51	0.00	-52.08	-52.08
1G	8G	1M	PK	5.36113G	-45.33	-21.20	-24.13	7.51	0.00	-52.84	-52.84
1G	8G	1M	PK	5.78188G	-67.51	-27.00	-40.51	7.51	0.00	-75.02	-75.02

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5300MHz

24/01/2025

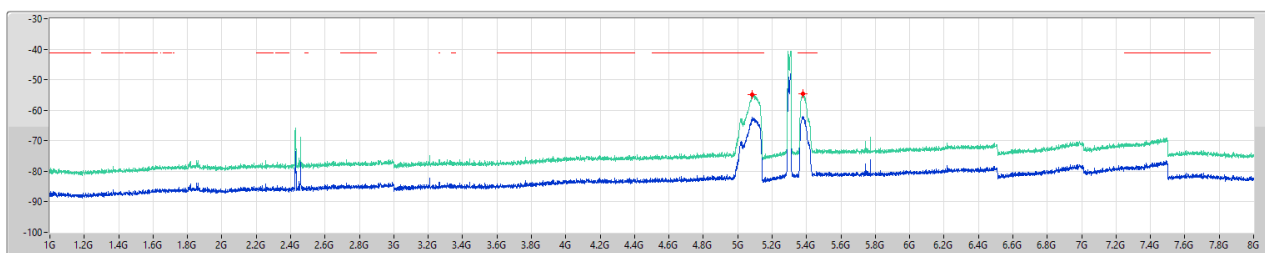


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08538G	-54.89	-41.20	-13.69	7.51	0.00	-62.40	-62.40
1G	8G	1M	AV	5.37763G	-54.57	-41.20	-13.37	7.51	0.00	-62.08	-62.08

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [PK]

5320MHz

24/01/2025

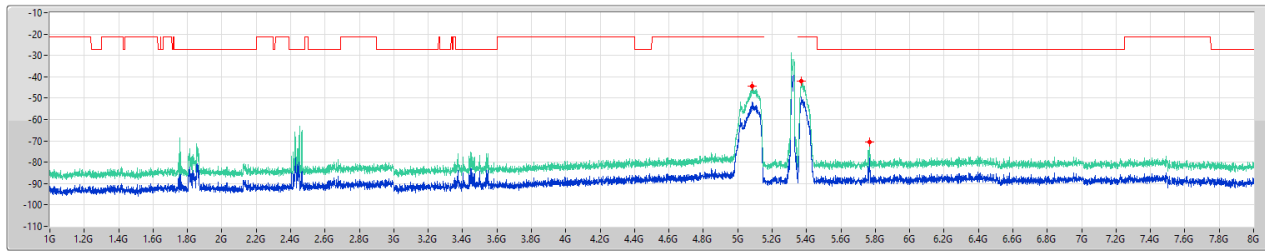


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08188G	-44.41	-21.20	-23.21	7.51	0.00	-51.92	-51.92
1G	8G	1M	PK	5.3715G	-41.94	-21.20	-20.64	7.51	0.00	-49.35	-49.35
1G	8G	1M	PK	5.76615G	-70.39	-27.00	-43.39	7.51	0.00	-77.90	-77.90

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_1TX

CSE Other [AV]

5320MHz

24/01/2025

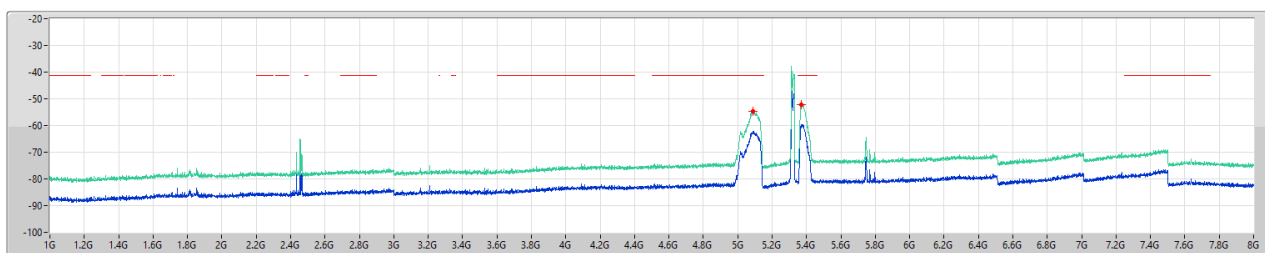


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08888G	-54.79	-41.20	-13.59	7.51	0.00	-62.30	-62.30
1G	8G	1M	AV	5.37063G	-52.26	-41.20	-11.06	7.51	0.00	-59.77	-59.77

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [PK]

5270MHz

24/01/2025

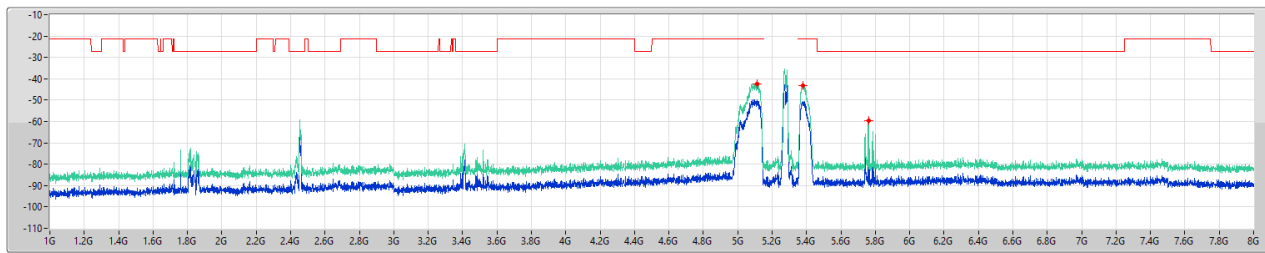


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.1125G	-42.30	-21.20	-21.10	7.51	0.00	-49.81	-49.81
1G	8G	1M	PK	5.36113G	-43.02	-21.20	-21.82	7.51	0.00	-50.53	-50.53
1G	8G	1M	PK	5.76G	-59.70	-27.00	-32.70	7.51	0.00	-67.21	-67.21

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [AV]

5270MHz

24/01/2025

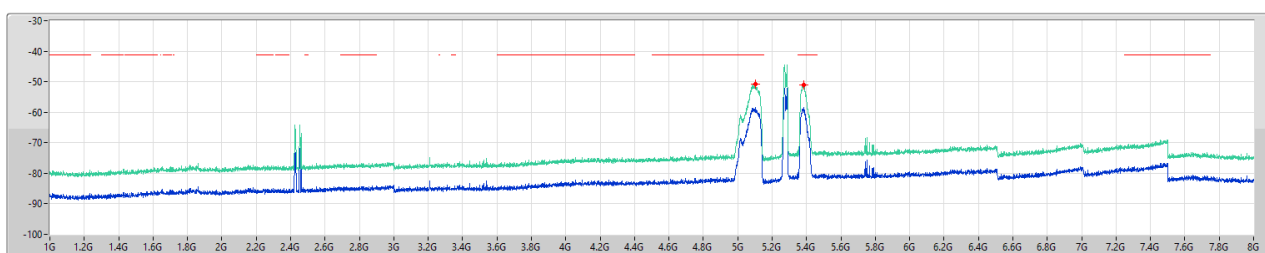


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10375G	-50.89	-41.20	-9.69	7.51	0.00	-58.40	-58.40
1G	8G	1M	AV	5.38288G	-51.01	-41.20	-9.81	7.51	0.00	-58.52	-58.52

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [PK]

5310MHz

24/01/2025

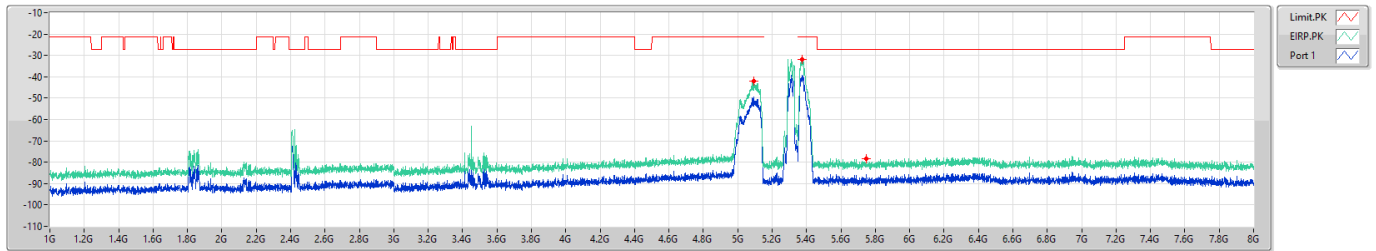


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.0915G	-42.00	-21.20	-20.80	7.51	0.00	-49.51	-49.51
1G	8G	1M	PK	5.37238G	-31.90	-21.20	-10.70	7.51	0.00	-39.41	-39.41
1G	8G	1M	PK	5.74775G	-78.17	-27.00	-51.17	7.51	0.00	-85.68	-85.68

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_1TX

CSE Other [AV]

5310MHz

24/01/2025

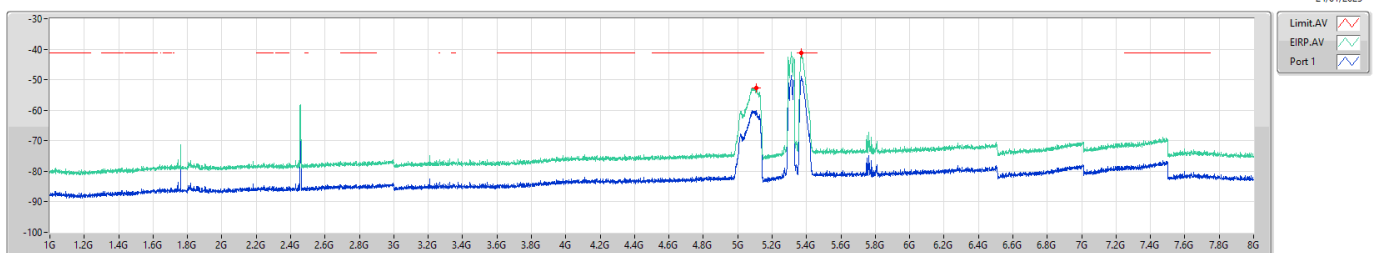


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.10725G	-52.64	-41.20	-11.44	7.51	0.00	-60.15	-60.15
1G	8G	1M	AV	5.36975G	-41.25	-41.20	-0.05	7.51	0.00	-48.76	-48.76

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

CSE Other [PK]

5290MHz

24/01/2025

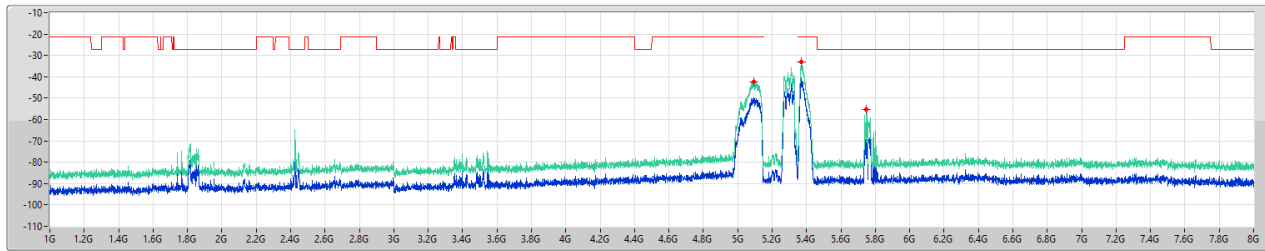


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.0915G	-42.49	-21.20	-21.29	7.51	0.00	-50.00	-50.00
1G	8G	1M	PK	5.366G	-32.97	-21.20	-11.77	7.51	0.00	-40.48	-40.48
1G	8G	1M	PK	5.74775G	-55.24	-27.00	-28.24	7.51	0.00	-62.75	-62.75

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_1TX

CSE Other [AV]

5290MHz

24/01/2025

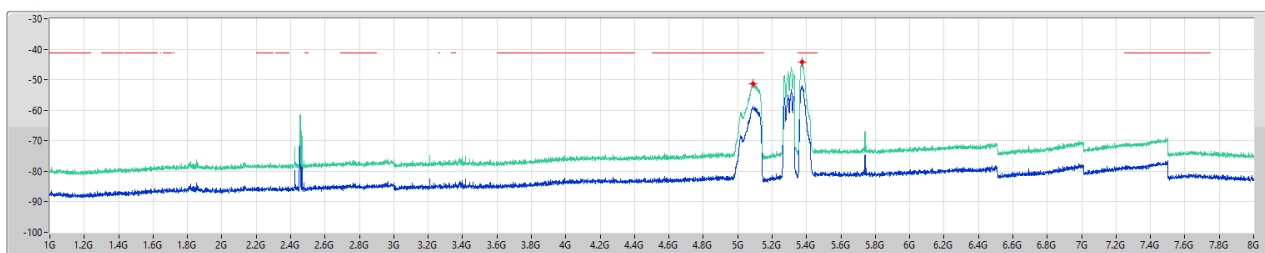


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08975G	-51.25	-41.20	-10.05	7.51	0.00	-58.76	-58.76
1G	8G	1M	AV	5.37238G	-44.27	-41.20	-3.07	7.51	0.00	-51.78	-51.78

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

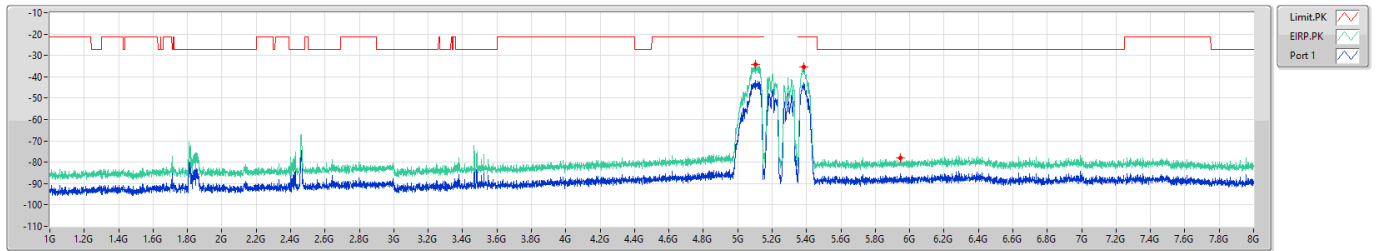


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.1055G	-34.14	-21.20	-12.94	7.51	0.00	-41.65	-41.65
1G	8G	1M	PK	5.3855G	-35.39	-21.20	-14.19	7.51	0.00	-42.90	-42.90
1G	8G	1M	PK	5.9455G	-77.96	-27.00	-50.96	7.51	0.00	-85.47	-85.47

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

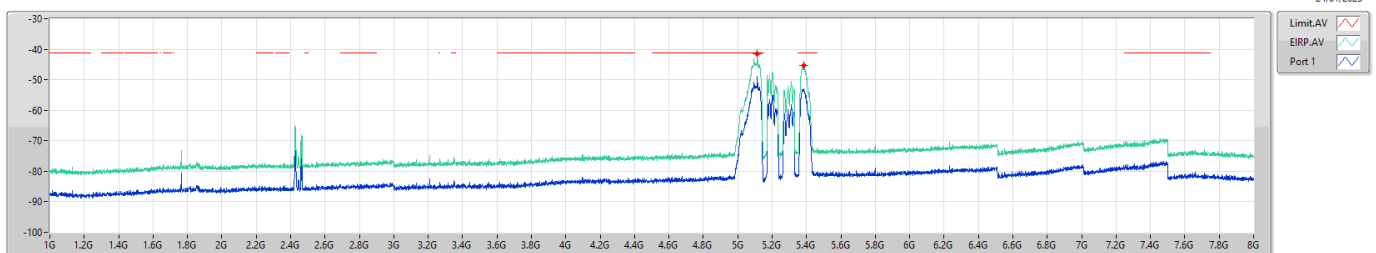


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.1125G	-41.42	-41.20	-0.22	7.51	0.00	-48.93	-48.93
1G	8G	1M	AV	5.38288G	-45.36	-41.20	-4.16	7.51	0.00	-52.87	-52.87

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5260MHz

24/01/2025

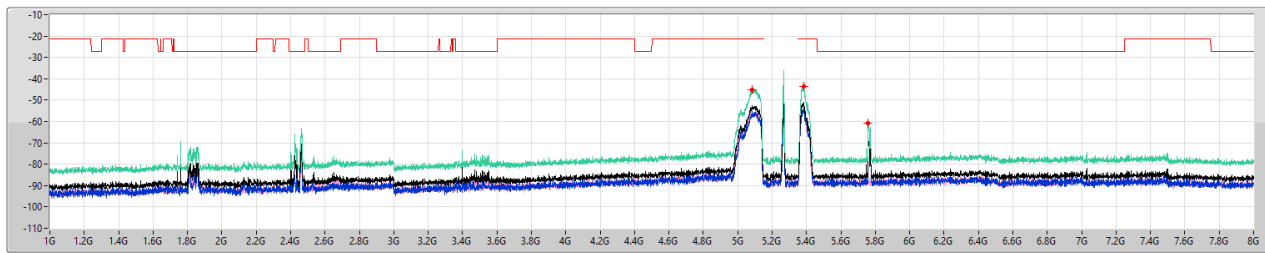


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.0845G	-45.09	-21.20	-23.89	7.51	0.00	-52.60	-55.05	-56.25
1G	8G	1M	PK	5.3826G	-43.43	-21.20	-22.23	7.51	0.00	-50.94	-53.44	-54.52
1G	8G	1M	PK	5.15825G	-60.77	-27.00	-33.77	7.51	0.00	-68.28	-68.35	-66.21

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5260MHz

24/01/2025

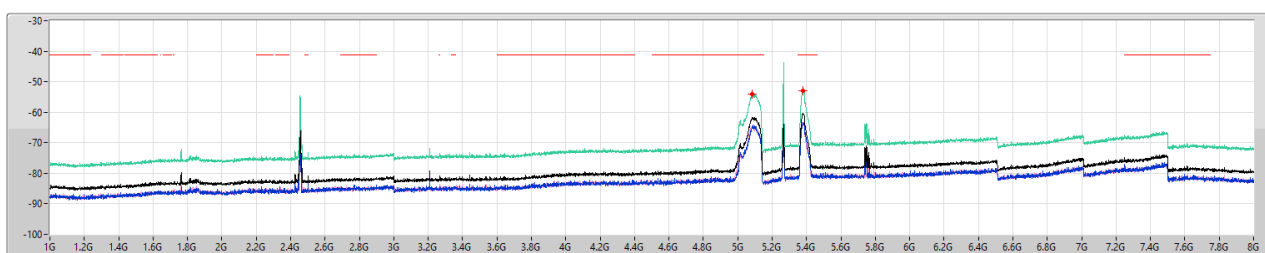


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08363G	-54.11	-41.20	-12.91	7.51	0.00	-61.62	-64.71	-64.56
1G	8G	1M	AV	5.3785G	-52.94	-41.20	-11.74	7.51	0.00	-60.45	-63.32	-63.61

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5300MHz

24/01/2025

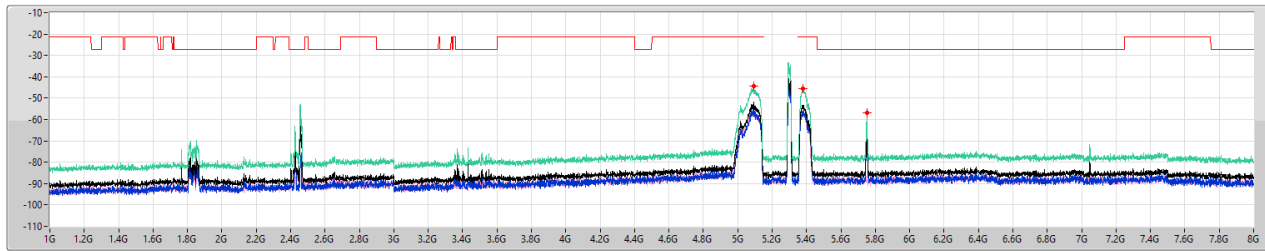


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09413G	-44.41	-21.20	-23.21	7.51	0.00	-51.92	-56.36	-53.85
1G	8G	1M	PK	5.3785G	-45.69	-21.20	-24.49	7.51	0.00	-53.20	-57.32	-55.32
1G	8G	1M	PK	5.1753G	-57.04	-27.00	-30.04	7.51	0.00	-64.55	-64.56	-69.49

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5300MHz

24/01/2025

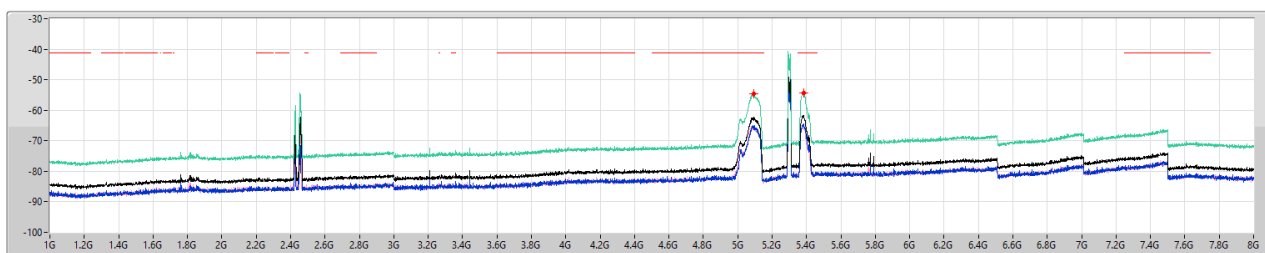


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.0915G	-54.66	-41.20	-13.46	7.51	0.00	-62.17	-65.16	-65.21
1G	8G	1M	AV	5.38288G	-54.30	-41.20	-13.10	7.51	0.00	-61.81	-65.01	-64.64

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [PK]

5320MHz

24/01/2025

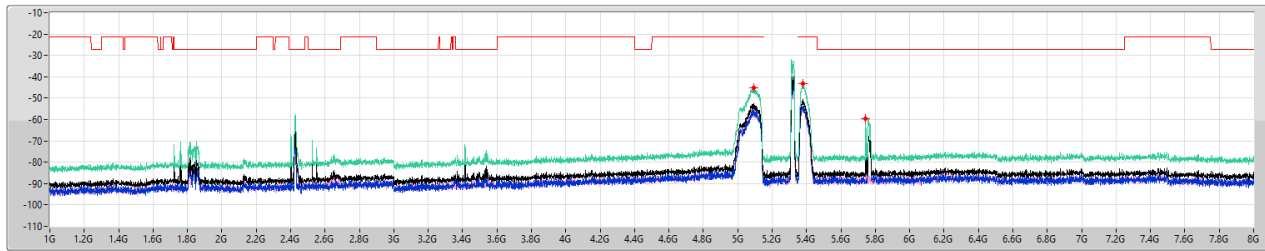


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09325G	-45.06	-21.20	-23.86	7.51	0.00	-52.57	-55.86	-55.32
1G	8G	1M	PK	5.30025G	-43.05	-21.20	-21.85	7.51	0.00	-50.56	-53.59	-53.55
1G	8G	1M	PK	5.74338G	-59.72	-27.00	-32.72	7.51	0.00	-67.23	-68.90	-67.26

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_2TX

CSE Other [AV]

5320MHz

24/01/2025

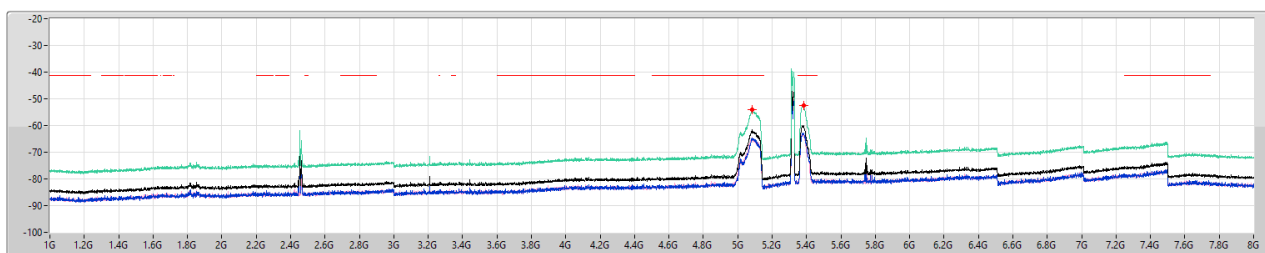


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08363G	-54.08	-41.20	-12.88	7.51	0.00	-61.59	-64.67	-64.53
1G	8G	1M	AV	5.382G	-52.44	-41.20	-11.24	7.51	0.00	-59.95	-63.11	-62.82

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5260MHz

24/01/2025

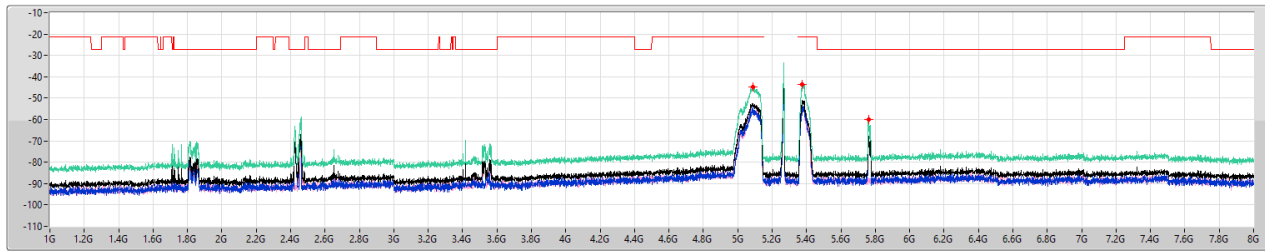


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08888G	-44.90	-21.20	-23.70	7.51	0.00	-52.41	-55.88	-55.00
1G	8G	1M	PK	5.37588G	-43.50	-21.20	-22.30	7.51	0.00	-51.01	-56.78	-52.34
1G	8G	1M	PK	5.176G	-60.17	-27.00	-33.17	7.51	0.00	-67.68	-67.72	-68.59

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5260MHz

24/01/2025

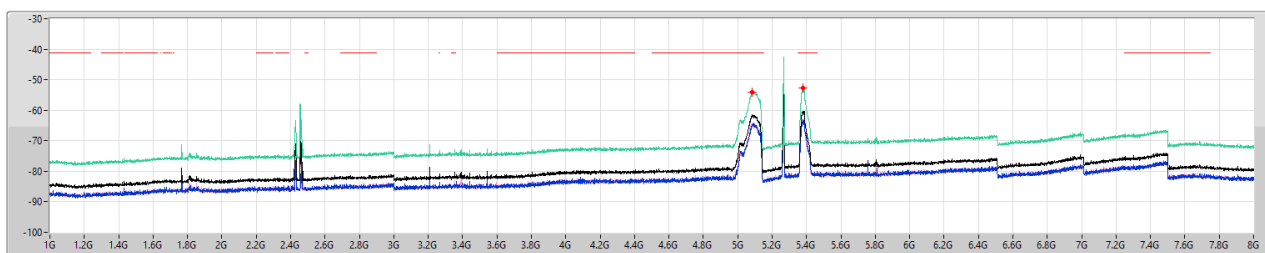


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08188G	-53.94	-41.20	-12.74	7.51	0.00	-61.45	-64.60	-64.32
1G	8G	1M	AV	5.37763G	-52.79	-41.20	-11.59	7.51	0.00	-60.30	-63.88	-62.81

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5300MHz

24/01/2025

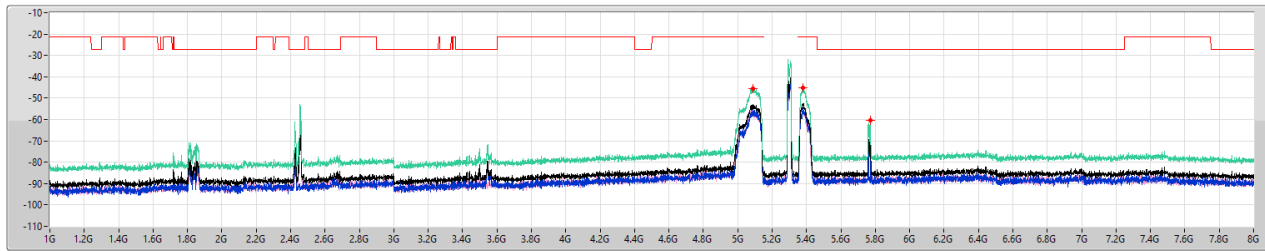


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08625G	-45.36	-21.20	-24.16	7.51	0.00	-52.87	-55.74	-56.03
1G	8G	1M	PK	5.37938G	-45.18	-21.20	-23.98	7.51	0.00	-52.69	-54.54	-57.29
1G	8G	1M	PK	5.17225G	-60.27	-27.00	-33.27	7.51	0.00	-67.78	-71.51	-70.18

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5300MHz

24/01/2025

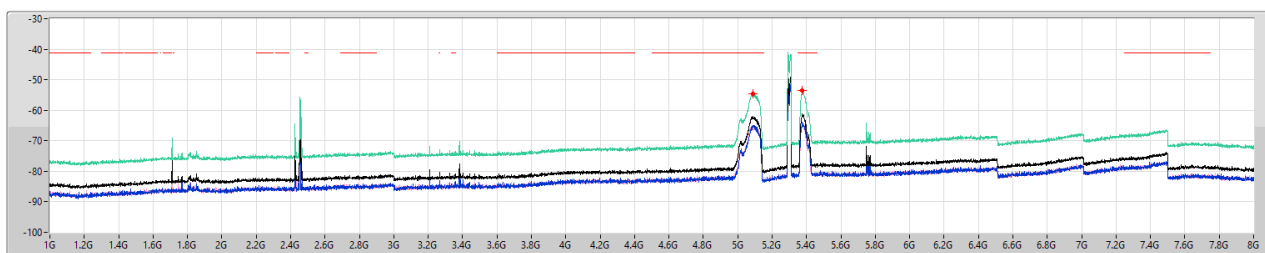


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08975G	-54.60	-41.20	-13.40	7.51	0.00	-62.11	-64.88	-65.37
1G	8G	1M	AV	5.37675G	-53.63	-41.20	-12.43	7.51	0.00	-61.14	-63.87	-64.44

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [PK]

5320MHz

24/01/2025

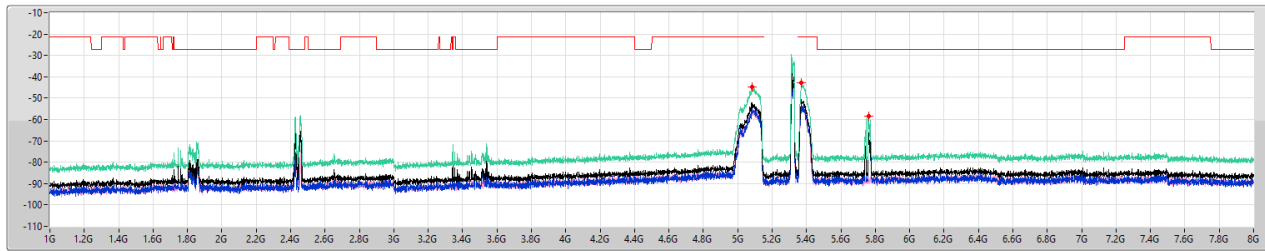


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08538G	-44.67	-21.20	-23.47	7.51	0.00	-52.18	-54.65	-55.80
1G	8G	1M	PK	5.3715G	-42.96	-21.20	-21.76	7.51	0.00	-50.47	-52.12	-55.47
1G	8G	1M	PK	5.176G	-58.55	-27.00	-31.55	7.51	0.00	-66.06	-66.09	-68.02

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSE Other [AV]

5320MHz

24/01/2025

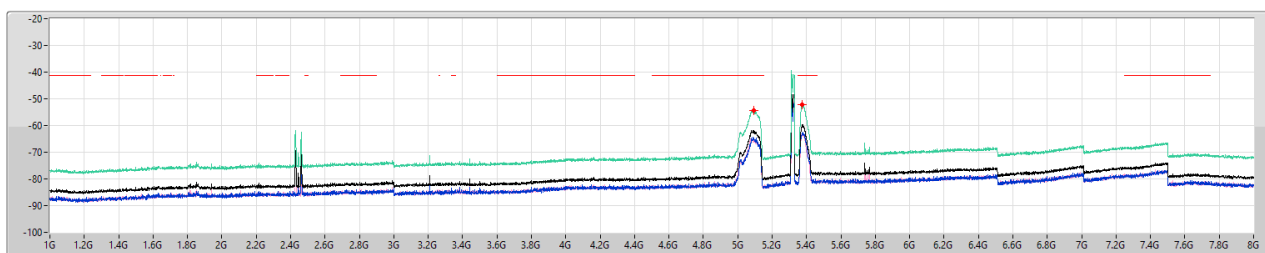


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09413G	-54.39	-41.20	-13.19	7.51	0.00	-61.90	-64.77	-65.06
1G	8G	1M	AV	5.37675G	-52.18	-41.20	-10.98	7.51	0.00	-59.69	-62.66	-62.75

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [PK]

5270MHz

24/01/2025

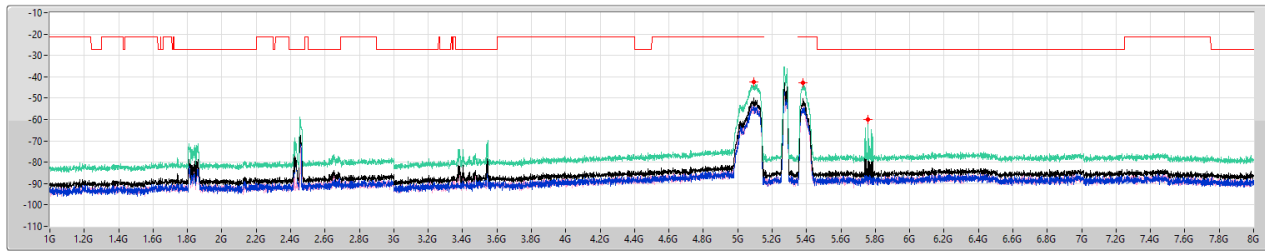


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.09325G	-42.39	-21.20	-21.19	7.51	0.00	-49.90	-52.62	-53.22
1G	8G	1M	PK	5.38025G	-42.73	-21.20	-21.53	7.51	0.00	-50.24	-54.90	-52.06
1G	8G	1M	PK	5.75913G	-59.85	-27.00	-32.85	7.51	0.00	-67.36	-67.40	-67.75

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [AV]

5270MHz

24/01/2025

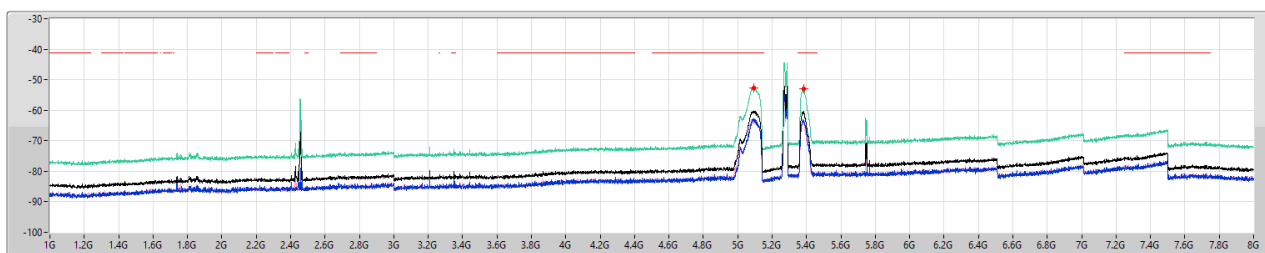


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.0915G	-52.72	-41.20	-11.52	7.51	0.00	-60.23	-62.68	-63.88
1G	8G	1M	AV	5.382G	-52.89	-41.20	-11.69	7.51	0.00	-60.40	-63.44	-63.38

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [PK]

5310MHz

24/01/2025

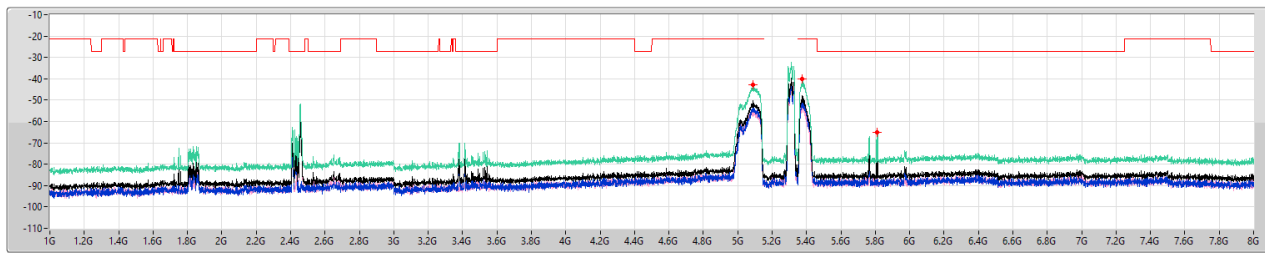


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08888G	-42.84	-21.20	-21.64	7.51	0.00	-50.35	-54.81	-52.27
1G	8G	1M	PK	5.375G	-40.26	-21.20	-19.06	7.51	0.00	-47.77	-49.09	-53.58
1G	8G	1M	PK	5.8125G	-65.21	-27.00	-38.21	7.51	0.00	-72.72	-68.52	-72.84

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSE Other [AV]

5310MHz

24/01/2025

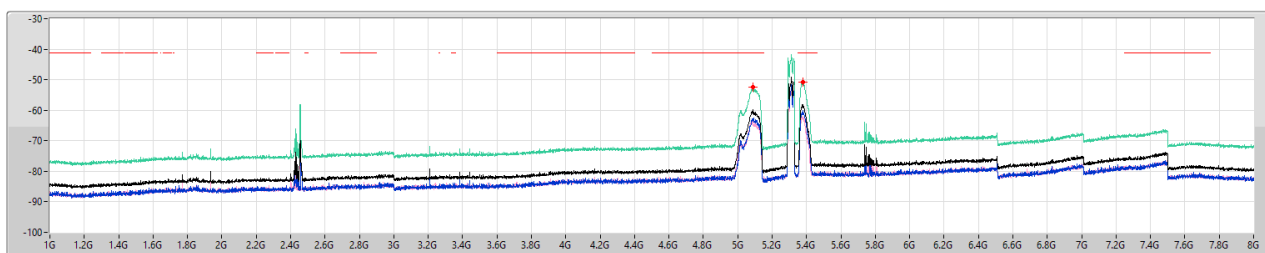


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.08625G	-52.39	-41.20	-11.19	7.51	0.00	-59.90	-62.89	-62.93
1G	8G	1M	AV	5.37763G	-50.65	-41.20	-9.45	7.51	0.00	-58.16	-60.03	-62.73

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

CSE Other [PK]

5290MHz

24/01/2025

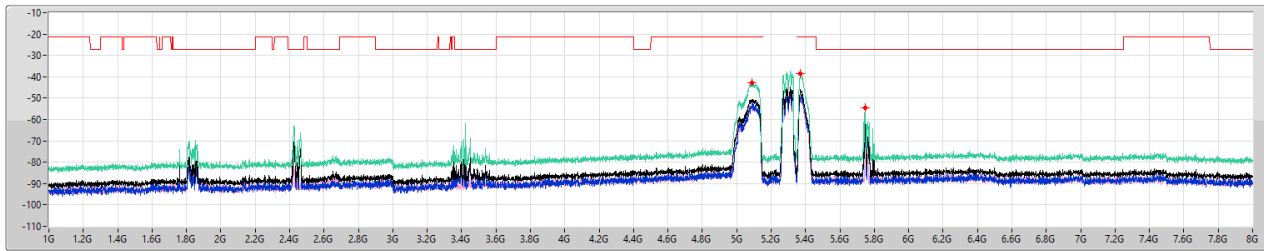


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.08888G	-42.94	-21.20	-21.74	7.51	0.00	-50.45	-52.25	-55.15
1G	8G	1M	PK	5.37063G	-38.61	-21.20	-17.41	7.51	0.00	-46.12	-49.99	-48.42
1G	8G	1M	PK	5.74688G	-54.55	-27.00	-27.55	7.51	0.00	-62.06	-67.82	-63.40

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_2TX

CSE Other [AV]

5290MHz

24/01/2025

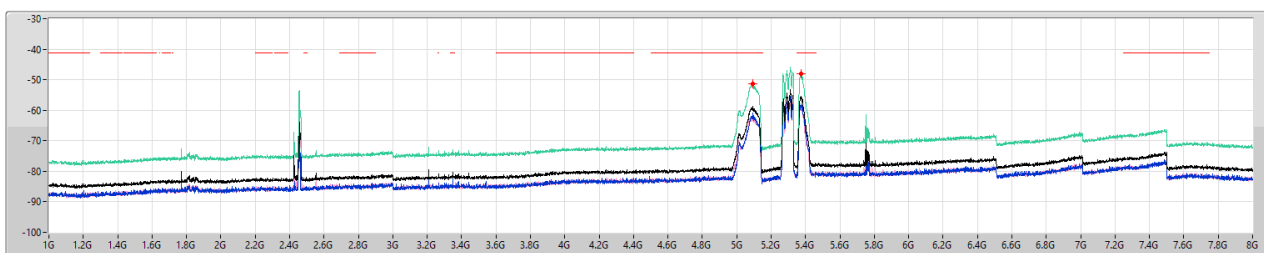


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09238G	-51.25	-41.20	-10.05	7.51	0.00	-58.76	-60.79	-63.04
1G	8G	1M	AV	5.37325G	-47.99	-41.20	-6.79	7.51	0.00	-55.50	-57.81	-59.35

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

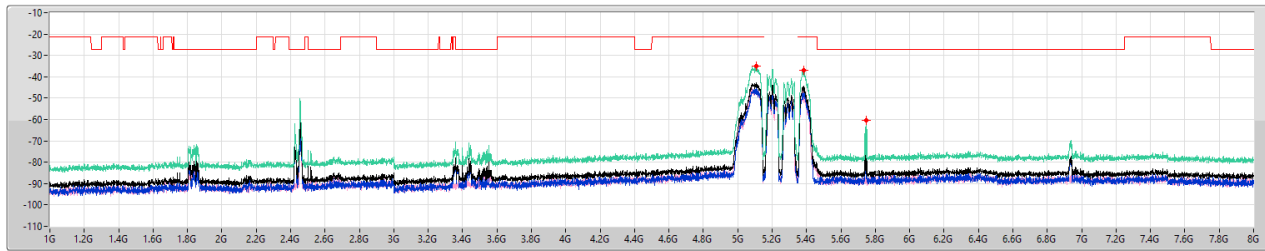


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	PK	5.10638G	-35.16	-21.20	-13.96	7.51	0.00	-42.67	-44.59	-47.14
1G	8G	1M	PK	5.30638G	-37.03	-21.20	-15.83	7.51	0.00	-44.54	-46.72	-48.59
1G	8G	1M	PK	5.74688G	-60.32	-27.00	-33.32	7.51	0.00	-67.83	-67.87	-68.66

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_2TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

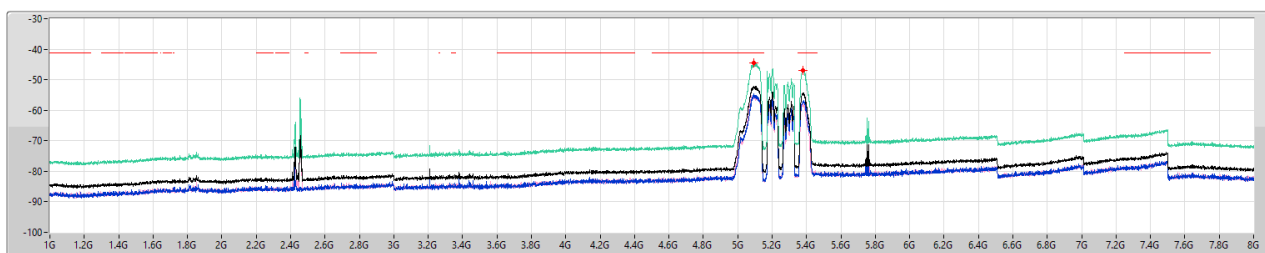


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)
1G	8G	1M	AV	5.09325G	-44.62	-41.20	-3.42	7.51	0.00	-52.13	-54.63	-55.72
1G	8G	1M	AV	5.37763G	-46.96	-41.20	-5.76	7.51	0.00	-54.47	-57.21	-57.76

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5260MHz

24/01/2025

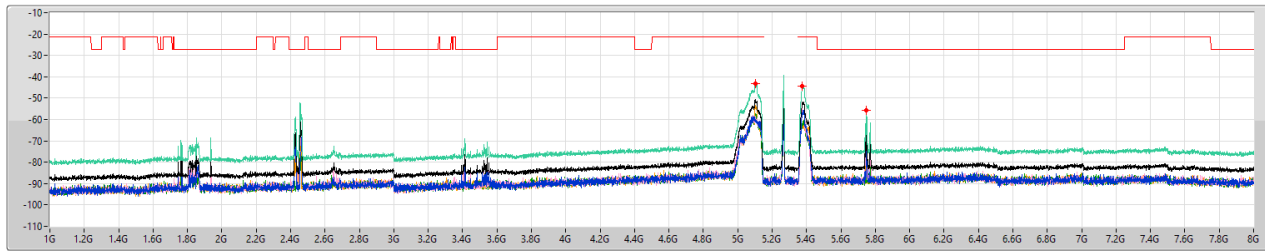


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10463G	-43.30	-21.20	-22.10	7.51	0.00	-50.81	-60.30	-60.96	-57.34	-53.26
1G	8G	1M	PK	5.37675G	-44.36	-21.20	-23.16	7.51	0.00	-51.87	-57.44	-54.46	-61.80	-63.43
1G	8G	1M	PK	5.74863G	-55.79	-27.00	-28.79	7.51	0.00	-63.30	-64.07	-72.47	-88.68	-77.49

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5260MHz

24/01/2025

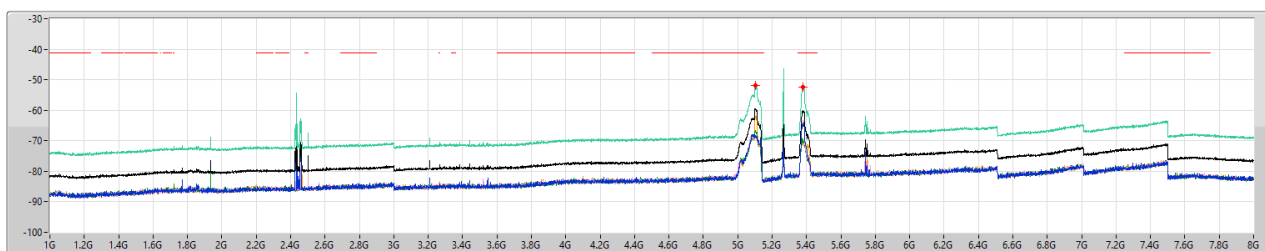


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.102G	-51.96	-41.20	-10.76	7.51	0.00	-59.47	-68.64	-68.59	-66.85	-61.89
1G	8G	1M	AV	5.38113G	-52.44	-41.20	-11.24	7.51	0.00	-59.95	-64.40	-63.36	-70.38	-70.23

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5300MHz

24/01/2025

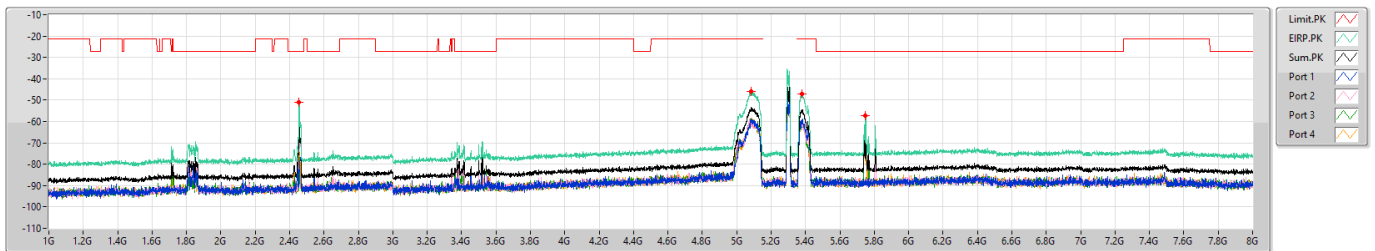


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	2.45513G	-51.20	-27.00	-24.20	7.51	0.00	-58.71	-62.69	-58.80	-59.03	-76.54
1G	8G	1M	PK	5.08538G	-45.86	-21.20	-24.66	7.51	0.00	-53.37	-60.16	-60.18	-59.27	-58.25
1G	8G	1M	PK	5.3785G	-47.04	-21.20	-25.84	7.51	0.00	-54.55	-59.12	-61.67	-61.85	-60.24
1G	8G	1M	PK	5.7495G	-57.29	-27.00	-30.29	7.51	0.00	-64.80	-69.20	-69.72	-68.65	-64.85

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5300MHz

24/01/2025

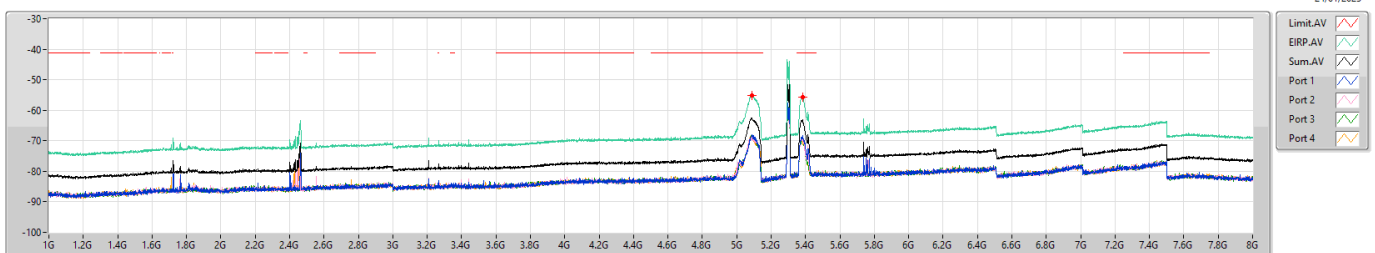


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.08713G	-55.03	-41.20	-13.83	7.51	0.00	-62.54	-68.69	-69.15	-68.02	-68.46
1G	8G	1M	AV	5.382G	-55.68	-41.20	-14.48	7.51	0.00	-63.19	-68.74	-68.70	-69.69	-69.84

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [PK]

5320MHz

24/01/2025

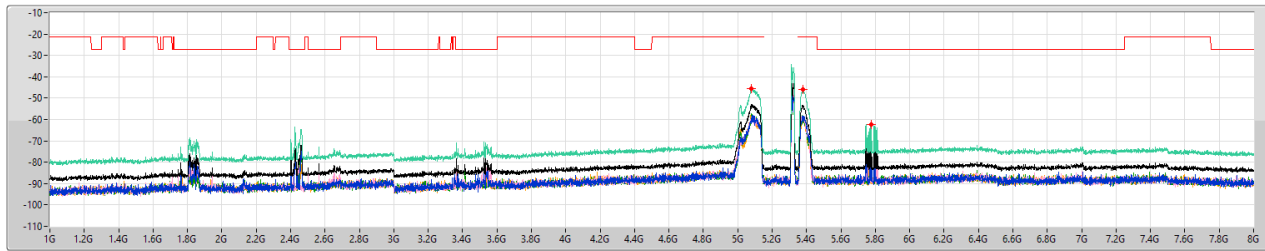


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.07925G	-45.40	-21.20	-24.20	7.51	0.00	-52.91	-59.17	-59.69	-59.03	-58.01
1G	8G	1M	PK	5.37763G	-45.80	-21.20	-24.60	7.51	0.00	-53.31	-58.36	-60.24	-59.52	-59.42
1G	8G	1M	PK	5.1775G	-62.15	-27.00	-35.15	7.51	0.00	-69.66	-69.82	-68.40	-68.25	-90.14

5.25-5.35GHz_802.11a_Nss1,(6Mbps)_4TX

CSE Other [AV]

5320MHz

24/01/2025

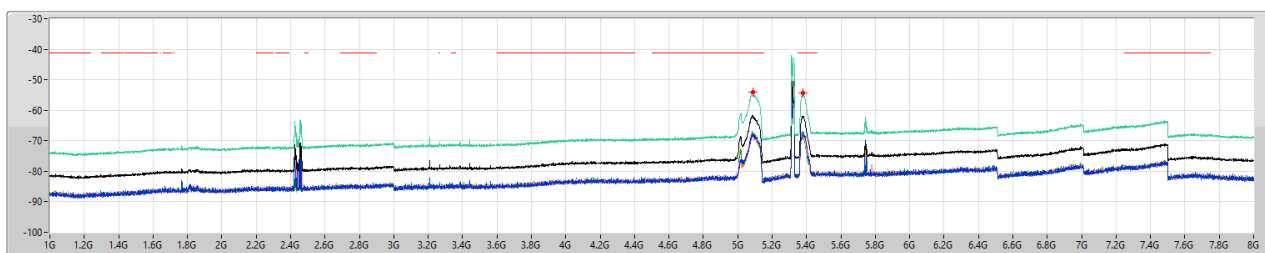


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.08713G	-54.17	-41.20	-12.97	7.51	0.00	-61.68	-68.03	-67.79	-67.39	-67.62
1G	8G	1M	AV	5.38025G	-54.40	-41.20	-13.20	7.51	0.00	-61.91	-67.65	-67.63	-68.00	-68.50

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5260MHz

24/01/2025

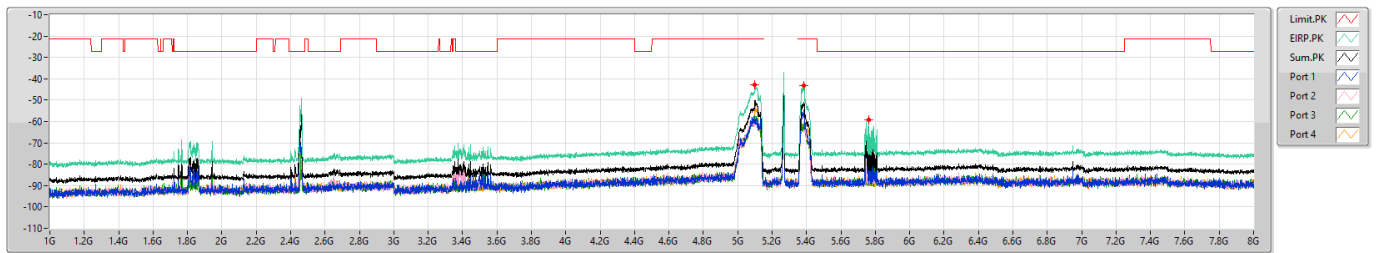


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.0985G	-42.69	-21.20	-21.49	7.51	0.00	-50.20	-59.99	-59.50	-59.08	-52.08
1G	8G	1M	PK	5.38288G	-43.34	-21.20	-22.14	7.51	0.00	-50.85	-54.56	-54.94	-61.32	-61.48
1G	8G	1M	PK	5.76088G	-59.36	-27.00	-32.36	7.51	0.00	-66.87	-66.95	-66.29	-69.94	-69.16

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5260MHz

24/01/2025

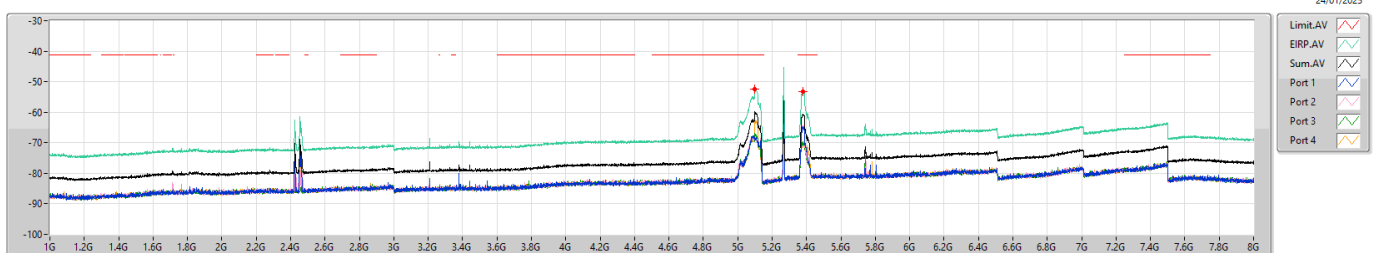


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.0985G	-52.37	-41.20	-11.17	7.51	0.00	-59.88	-68.52	-68.60	-67.01	-62.59
1G	8G	1M	AV	5.37763G	-53.19	-41.20	-11.99	7.51	0.00	-60.70	-65.21	-64.79	-69.66	-69.60

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5300MHz

24/01/2025

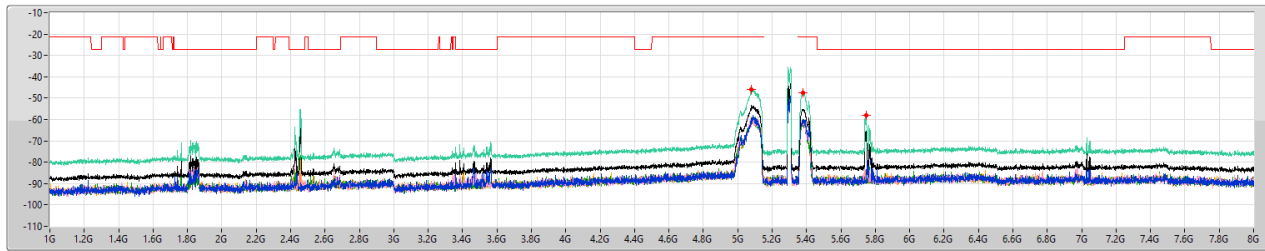


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.081G	-46.01	-21.20	-24.81	7.51	0.00	-53.52	-60.15	-60.06	-59.38	-58.74
1G	8G	1M	PK	5.37938G	-47.67	-21.20	-26.47	7.51	0.00	-55.16	-60.41	-59.79	-62.97	-62.45
1G	8G	1M	PK	5.74688G	-58.04	-27.00	-31.04	7.51	0.00	-65.55	-69.51	-65.61	-68.20	-69.22

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5300MHz

24/01/2025

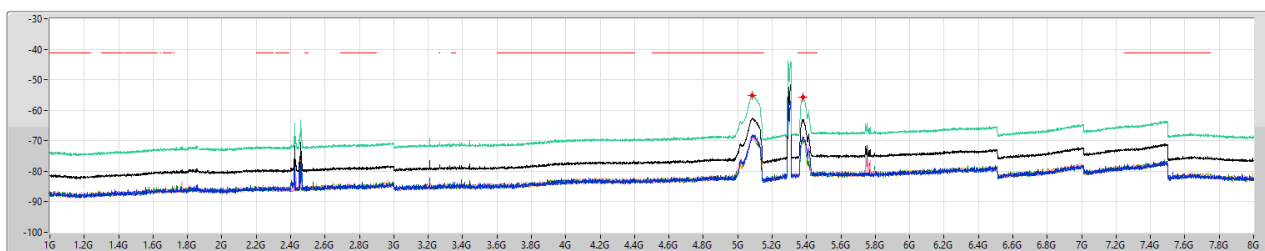


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.08275G	-55.12	-41.20	-13.92	7.51	0.00	-62.63	-68.94	-68.85	-68.54	-68.31
1G	8G	1M	AV	5.37938G	-55.58	-41.20	-14.38	7.51	0.00	-63.09	-68.98	-68.97	-69.19	-69.33

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [PK]

5320MHz

24/01/2025

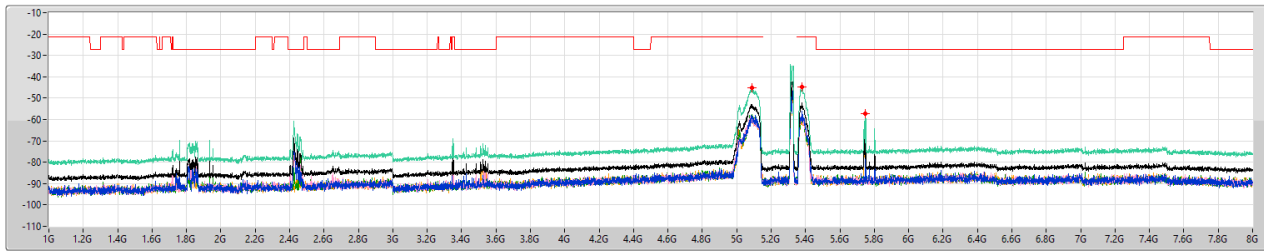


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.08713G	-45.33	-21.20	-24.13	7.51	0.00	-52.84	-59.50	-58.40	-57.69	-60.32
1G	8G	1M	PK	5.37936G	-44.66	-21.20	-23.46	7.51	0.00	-52.17	-55.93	-58.83	-59.03	-60.22
1G	8G	1M	PK	5.7495G	-57.42	-27.00	-30.42	7.51	0.00	-64.93	-75.13	-88.84	-88.00	-65.41

5.25-5.35GHz_802.11be EHT20_Nss1,(MCS0)_4TX

CSE Other [AV]

5320MHz

24/01/2025

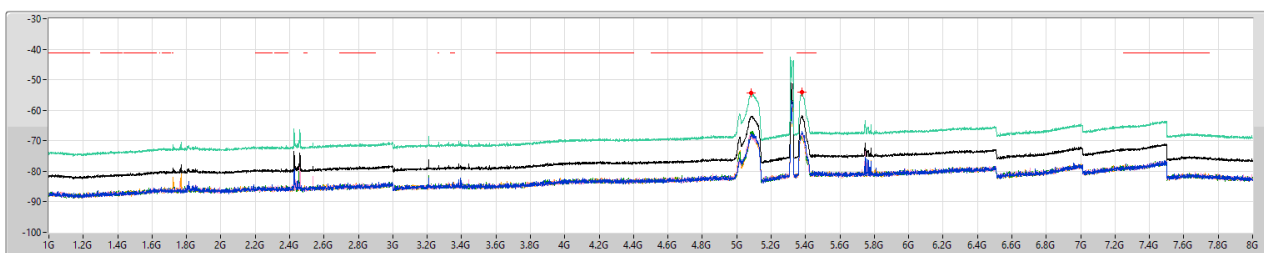


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.0845G	-54.35	-41.20	-13.15	7.51	0.00	-61.86	-67.63	-68.40	-67.30	-68.31
1G	8G	1M	AV	5.3785G	-54.11	-41.20	-12.91	7.51	0.00	-61.62	-66.85	-67.14	-68.25	-68.57

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [PK]

5270MHz

24/01/2025

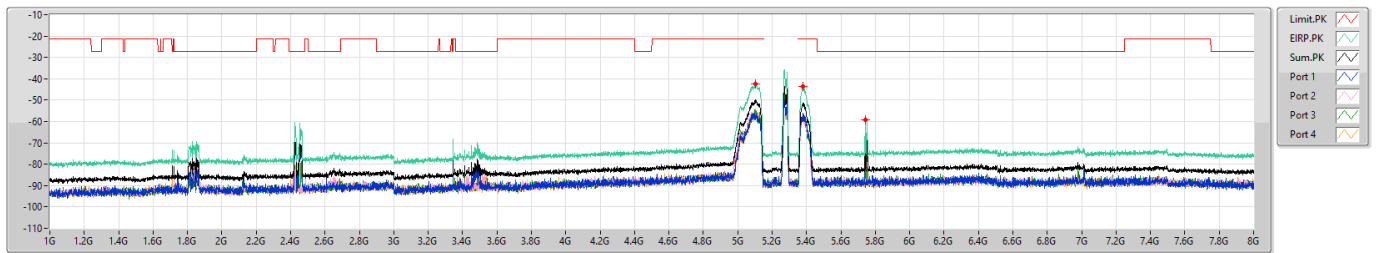


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10113G	-42.43	-21.20	-21.23	7.51	0.00	-49.94	-58.05	-57.00	-55.07	-54.61
1G	8G	1M	PK	5.37769G	-43.72	-21.20	-22.52	7.51	0.00	-51.23	-56.24	-57.97	-56.59	-50.62
1G	8G	1M	PK	5.17425G	-59.08	-27.00	-32.08	7.51	0.00	-66.59	-90.76	-87.07	-66.67	-89.65

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [AV]

5270MHz

24/01/2025

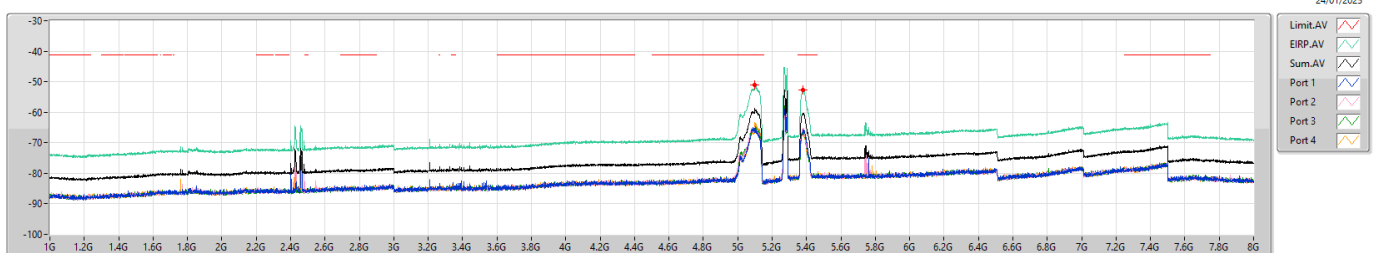


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	RefI(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.10025G	-51.16	-41.20	-9.96	7.51	0.00	-58.67	-65.26	-64.94	-65.44	-63.44
1G	8G	1M	AV	5.38113G	-52.79	-41.20	-11.59	7.51	0.00	-60.30	-65.78	-65.99	-66.86	-66.77

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [PK]

5310MHz

24/01/2025

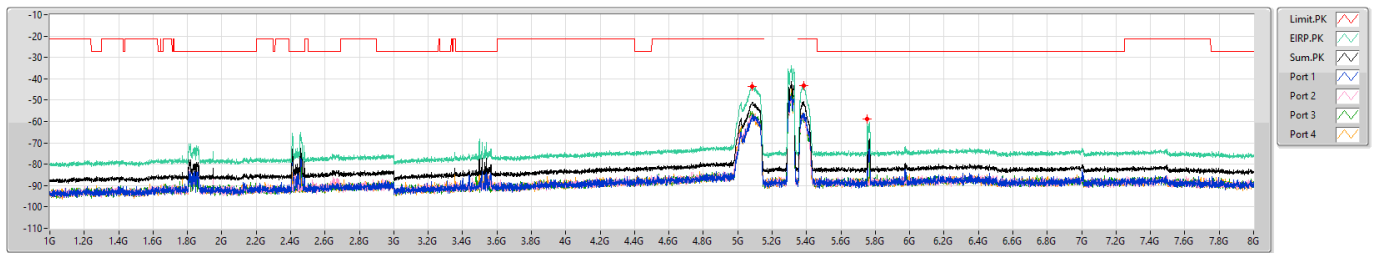


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.0845G	-43.45	-21.20	-22.25	7.51	0.00	-50.96	-57.38	-58.05	-55.68	-57.17
1G	8G	1M	PK	5.38375G	-43.25	-21.20	-22.05	7.51	0.00	-50.76	-56.26	-56.24	-56.76	-50.12
1G	8G	1M	PK	5.1753G	-58.92	-27.00	-31.92	7.51	0.00	-66.43	-66.52	-67.92	-68.50	-68.37

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_4TX

CSE Other [AV]

5310MHz

24/01/2025

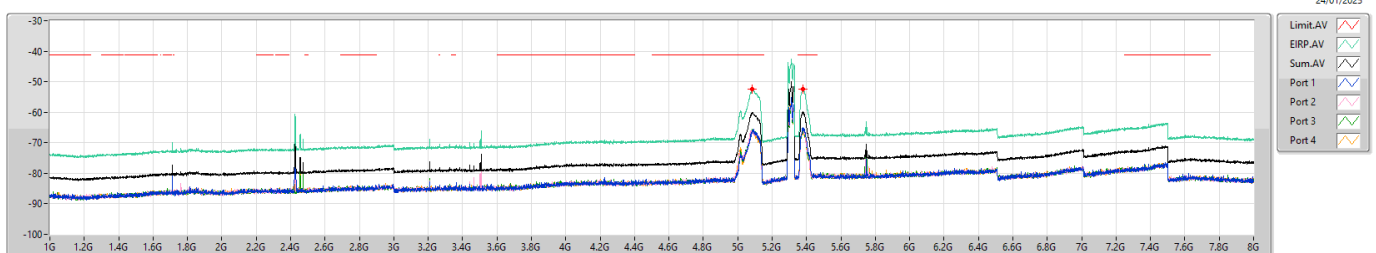


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.08538G	-52.45	-41.20	-11.25	7.51	0.00	-59.96	-66.07	-66.05	-65.66	-66.17
1G	8G	1M	AV	5.37938G	-52.34	-41.20	-11.14	7.51	0.00	-59.85	-65.29	-65.35	-66.40	-66.60

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Other [PK]

5290MHz

24/01/2025

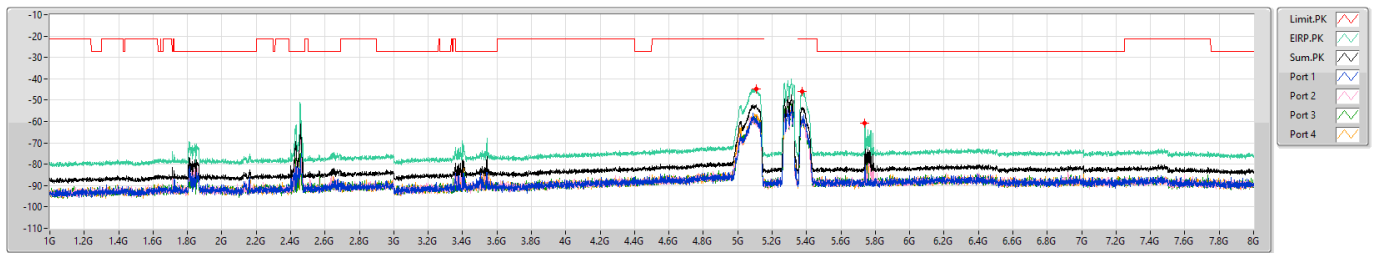


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.10813G	-44.77	-21.20	-23.57	7.51	0.00	-52.28	-57.60	-59.59	-59.69	-56.99
1G	8G	1M	PK	5.37238G	-45.88	-21.20	-24.68	7.51	0.00	-53.39	-58.85	-61.04	-60.67	-57.87
1G	8G	1M	PK	5.173813G	-60.87	-27.00	-33.87	7.51	0.00	-68.38	-68.69	-69.97	-61.47	-67.42

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_4TX

CSE Other [AV]

5290MHz

24/01/2025

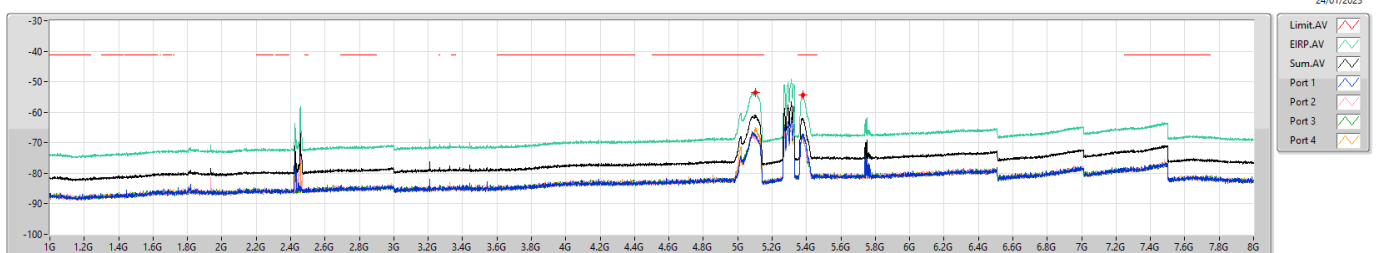


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.102G	-53.40	-41.20	-12.20	7.51	0.00	-60.91	-67.75	-68.17	-67.57	-65.00
1G	8G	1M	AV	5.3785G	-54.37	-41.20	-13.17	7.51	0.00	-61.88	-67.44	-67.35	-68.37	-68.56

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

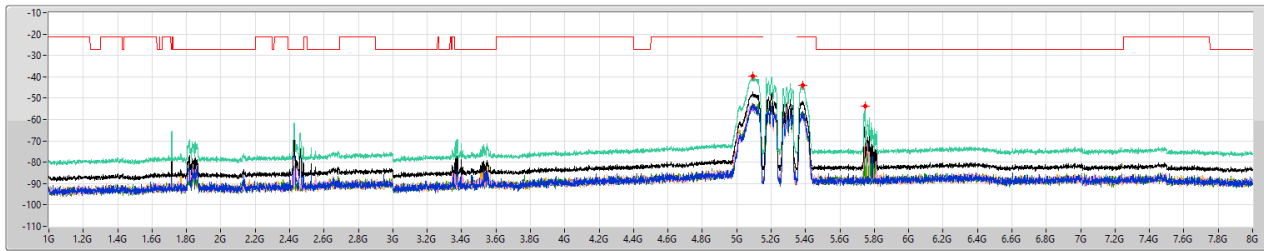


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	PK	5.09413G	-39.64	-21.20	-18.44	7.51	0.00	-47.15	-53.73	-54.33	-52.67	-52.25
1G	8G	1M	PK	5.30463G	-44.05	-21.20	-22.85	7.51	0.00	-51.56	-56.29	-59.75	-56.79	-50.31
1G	8G	1M	PK	5.74688G	-53.75	-27.00	-26.75	7.51	0.00	-61.26	-68.24	-61.69	-72.37	-79.90

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_4TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

24/01/2025

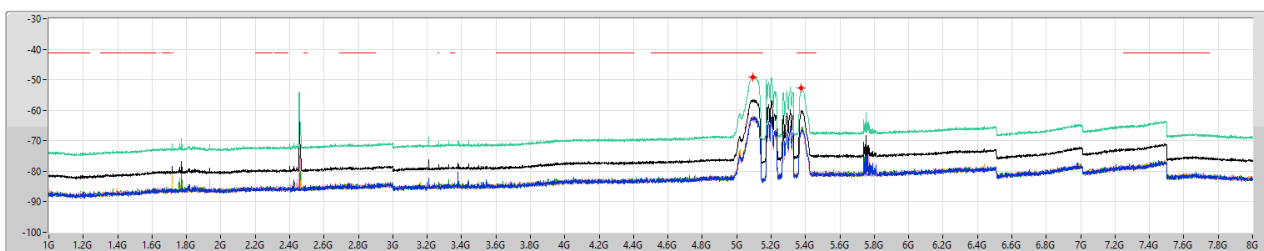

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)	P2(dBm)	P3(dBm)	P4(dBm)
1G	8G	1M	AV	5.095G	-49.05	-41.20	-7.85	7.51	0.00	-56.56	-62.88	-61.58	-63.31	-62.75
1G	8G	1M	AV	5.37675G	-52.66	-41.20	-11.46	7.51	0.00	-60.17	-66.61	-65.66	-66.56	-66.01

**Summary**

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	EIRP (dBm)	Psum (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	P1 (dBm)	Limit (dBm)	Margin (dB)	DG (dBi)
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	Pass	1G	8G	AV	-45.28	-52.79				-52.79	-41.20	-4.08	7.51
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	Pass	1G	8G	AV	-45.03	-52.54				-52.54	-41.20	-3.83	7.51
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	Pass	1G	8G	AV	-46.75	-54.26	-55.69			-59.78	-41.20	-5.55	7.51
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	Pass	1G	8G	AV	-50.48	-57.99	-66.32	-64.22	-61.60	-65.43	-41.20	-9.28	7.51
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	Pass	1G	8G	AV	-49.27	-56.78	-69.08	-57.59	-68.53	-70.34	-41.20	-8.07	7.51
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	Pass	1G	8G	AV	-42.28	-49.79				-49.79	-41.20	-1.08	7.51
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	Pass	1G	8G	AV	-45.02	-52.53				-52.53	-41.20	-3.82	7.51
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX	Pass	1G	8G	AV	-42.75	-50.26				-50.26	-41.20	-1.55	7.51
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	Pass	1G	8G	AV	-42.45	-49.96	-52.27			-53.81	-41.20	-1.25	7.51
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	Pass	1G	8G	AV	-43.14	-50.65	-53.86			-53.47	-41.20	-1.94	7.51
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	Pass	1G	8G	AV	-42.18	-49.69	-55.20			-51.13	-41.20	-0.98	7.51
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	Pass	1G	8G	AV	-45.85	-53.36	-62.22	-59.52	-57.72	-59.18	-41.20	-4.65	7.51
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	Pass	1G	8G	AV	-50.08	-57.59	-67.71	-60.11	-64.14	-66.74	-41.20	-8.88	7.51
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	Pass	1G	8G	AV	-47.62	-55.13	-63.54	-63.02	-61.00	-58.75	-41.20	-6.42	7.51

DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

Result

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.14838G	7.51	-53.62				-53.62	-46.11	-41.20	-4.91
5290MHz	Pass	1G	8G	AV	5.37413G	7.51	-52.79				-52.79	-45.28	-41.20	-4.08
5290MHz	Pass	1G	8G	PK	5.144G	7.51	-44.17				-44.17	-36.66	-21.20	-15.46
5290MHz	Pass	1G	8G	PK	5.36713G	7.51	-40.53				-40.53	-33.02	-21.20	-11.82
5290MHz	Pass	1G	8G	PK	5.98225G	7.51	-76.97				-76.97	-69.46	-27.00	-42.46
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.13525G	7.51	-52.54				-52.54	-45.03	-41.20	-3.83
5290MHz	Pass	1G	8G	AV	5.3855G	7.51	-55.30				-55.30	-47.79	-41.20	-6.59
5290MHz	Pass	1G	8G	PK	5.14663G	7.51	-45.19				-45.19	-37.68	-21.20	-16.48
5290MHz	Pass	1G	8G	PK	5.38375G	7.51	-45.19				-45.19	-37.68	-21.20	-16.48
5290MHz	Pass	1G	8G	PK	5.75038G	7.51	-71.43				-71.43	-63.92	-27.00	-36.92
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.1163G	7.51	-49.79				-49.79	-42.28	-41.20	-1.08
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.382G	7.51	-56.41				-56.41	-48.90	-41.20	-7.70
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.08713G	7.51	-43.79				-43.79	-36.28	-21.20	-15.08
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.3785G	7.51	-47.21				-47.21	-39.70	-21.20	-18.50
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.7705G	7.51	-73.33				-73.33	-65.82	-27.00	-38.82
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.07925G	7.51	-52.53				-52.53	-45.02	-41.20	-3.82
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.3785G	7.51	-59.21				-59.21	-51.70	-41.20	-10.50
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.11075G	7.51	-41.28				-41.28	-33.77	-21.20	-12.57
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38463G	7.51	-45.43				-45.43	-37.92	-21.20	-16.72
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.5255G	7.51	-76.85				-76.85	-69.34	-27.00	-42.34
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.08188G	7.51	-50.26				-50.26	-42.75	-41.20	-1.55
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37588G	7.51	-59.74				-59.74	-52.23	-41.20	-11.03
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.08013G	7.51	-41.05				-41.05	-33.54	-21.20	-12.34
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.382G	7.51	-48.41				-48.41	-40.90	-21.20	-19.70
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.77313G	7.51	-73.76				-73.76	-66.25	-27.00	-39.25
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.1405G	7.51	-59.78	-55.69			-54.26	-46.75	-41.20	-5.55
5290MHz	Pass	1G	8G	AV	5.382G	7.51	-62.53	-57.07			-55.98	-48.47	-41.20	-7.27
5290MHz	Pass	1G	8G	PK	5.14925G	7.51	-54.81	-46.74			-46.11	-38.60	-21.20	-17.40
5290MHz	Pass	1G	8G	PK	5.38288G	7.51	-56.30	-41.94			-41.78	-34.27	-21.20	-13.07
5290MHz	Pass	1G	8G	PK	5.80725G	7.51	-79.73	-69.58			-69.18	-61.67	-27.00	-34.67
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11338G	7.51	-53.81	-52.27			-49.96	-42.45	-41.20	-1.25
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37763G	7.51	-59.34	-58.67			-55.98	-48.47	-41.20	-7.27
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.1265G	7.51	-49.74	-41.53			-40.92	-33.41	-21.20	-12.21
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.382G	7.51	-47.86	-48.00			-44.92	-37.41	-21.20	-16.21
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.977G	7.51	-76.33	-78.85			-74.40	-66.89	-27.00	-39.89
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.09588G	7.51	-53.47	-53.86			-50.65	-43.14	-41.20	-1.94
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37938G	7.51	-61.57	-63.47			-59.41	-51.90	-41.20	-10.70
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.10375G	7.51	-43.51	-49.67			-42.57	-35.06	-21.20	-13.86
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.375G	7.51	-49.10	-56.25			-48.33	-40.82	-21.20	-19.62
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.76875G	7.51	-74.87	-81.05			-73.93	-66.42	-27.00	-39.42
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.08013G	7.51	-51.13	-55.20			-49.69	-42.18	-41.20	-0.98
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37588G	7.51	-61.83	-63.48			-59.57	-52.06	-41.20	-10.86
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.0705G	7.51	-43.32	-45.37			-41.21	-33.70	-21.20	-12.50
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.37763G	7.51	-56.78	-48.32			-47.74	-40.23	-21.20	-19.03
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.93063G	7.51	-74.73	-80.55			-73.72	-66.21	-27.00	-39.21
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.12825G	7.51	-65.43	-66.32	-64.22	-61.60	-57.99	-50.48	-41.20	-9.28
5290MHz	Pass	1G	8G	AV	5.37325G	7.51	-69.25	-68.71	-67.78	-66.84	-62.03	-54.52	-41.20	-13.32
5290MHz	Pass	1G	8G	PK	5.13525G	7.51	-59.17	-60.94	-58.23	-52.38	-50.32	-42.81	-21.20	-21.61
5290MHz	Pass	1G	8G	PK	5.38725G	7.51	-65.38	-53.63	-63.53	-62.14	-52.46	-44.95	-21.20	-23.75
5290MHz	Pass	1G	8G	PK	5.81163G	7.51	-68.70	-79.12	-81.23	-80.72	-67.87	-60.36	-27.00	-33.36
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5290MHz	Pass	1G	8G	AV	5.137G	7.51	-66.04	-68.26	-59.80	-67.39	-57.88	-50.37	-41.20	-9.17
5290MHz	Pass	1G	8G	AV	5.3785G	7.51	-70.34	-69.08	-57.59	-68.53	-56.78	-49.27	-41.20	-8.07
5290MHz	Pass	1G	8G	PK	5.14313G	7.51	-61.25	-61.36	-46.72	-59.51	-46.22	-38.71	-21.20	-17.51
5290MHz	Pass	1G	8G	PK	5.38463G	7.51	-65.15	-62.73	-46.38	-62.72	-46.13	-38.62	-21.20	-17.42
5290MHz	Pass	1G	8G	PK	5.98488G	7.51	-79.18	-79.43	-76.01	-79.37	-72.21	-64.70	-27.00	-37.70
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.11163G	7.51	-59.18	-62.22	-59.52	-57.72	-53.36	-45.85	-41.20	-4.65
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.37938G	7.51	-66.04	-68.40	-67.71	-64.60	-60.41	-52.90	-41.20	-11.70



CSE Harmonic (1~8GHz)_R5 (External Ant.)_Multi-RU

Appendix E.10

Mode	Result	F-Start (Hz)	F-Stop (Hz)	Type	Freq (Hz)	DG (dBi)	P1 (dBm)	P2 (dBm)	P3 (dBm)	P4 (dBm)	Psum (dBm)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.13G	7.51	-56.17	-55.55	-58.68	-48.19	-46.63	-39.12	-21.20	-17.92
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.389G	7.51	-64.26	-62.03	-62.02	-52.03	-51.03	-43.52	-21.20	-22.32
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.98575G	7.51	-77.25	-77.14	-78.08	-78.29	-71.64	-64.13	-27.00	-37.13
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.1265G	7.51	-66.74	-67.71	-60.11	-64.14	-57.59	-50.08	-41.20	-8.88
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38025G	7.51	-71.78	-70.67	-63.81	-62.78	-59.60	-52.09	-41.20	-10.89
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.1055G	7.51	-59.28	-61.81	-49.77	-58.98	-48.65	-41.14	-21.20	-19.94
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.38375G	7.51	-65.35	-63.56	-52.52	-60.55	-51.42	-43.91	-21.20	-22.71
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.80638G	7.51	-82.42	-67.70	-80.70	-79.42	-67.09	-59.58	-27.00	-32.58
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.08188G	7.51	-58.75	-63.54	-63.02	-61.00	-55.13	-47.62	-41.20	-6.42
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	AV	5.38113G	7.51	-66.87	-67.18	-67.13	-67.37	-61.11	-53.60	-41.20	-12.40
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.09063G	7.51	-53.84	-57.65	-52.37	-55.74	-48.44	-40.93	-21.20	-19.73
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.37238G	7.51	-59.99	-60.64	-60.37	-59.01	-53.94	-46.43	-21.20	-25.23
5250MHz Straddle 5.25-5.35GHz	Pass	1G	8G	PK	5.96125G	7.51	-78.83	-78.59	-78.21	-76.56	-71.93	-64.42	-27.00	-37.42


DG = Directional Gain ; PX=Port X; Psum=P1+P2+...PX

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

CSE Other [PK]

5290MHz

17/02/2025

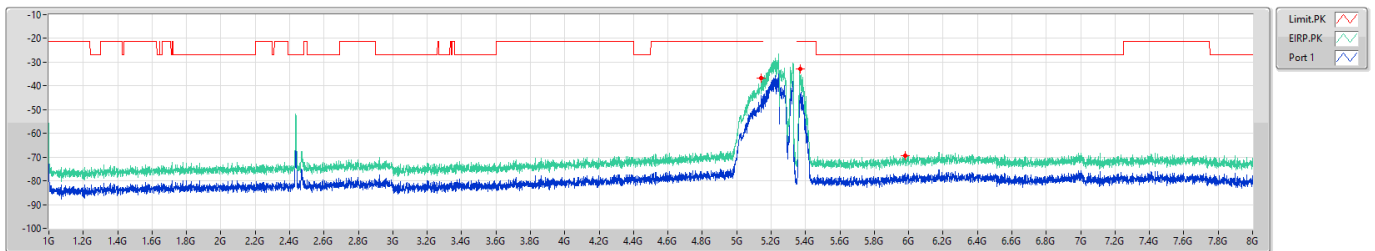


F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.144G	-36.66	-21.20	-15.46	7.51	0.00	-44.17	-44.17
1G	8G	1M	PK	5.36713G	-33.02	-21.20	-11.82	7.51	0.00	-40.53	-40.53
1G	8G	1M	PK	5.98225G	-69.46	-27.00	-42.46	7.51	0.00	-76.97	-76.97

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

CSE Other [AV]

5290MHz

17/02/2025

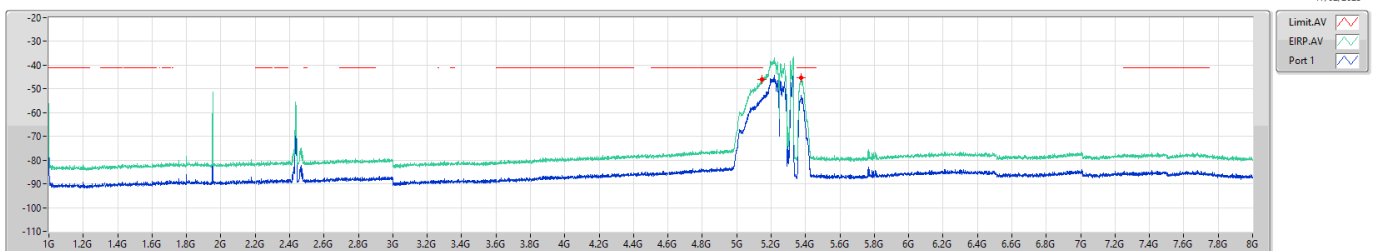


F.Start(Hz)	F.Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.14838G	-46.11	-41.20	-4.91	7.51	0.00	-53.62	-53.62
1G	8G	1M	AV	5.37413G	-45.28	-41.20	-4.08	7.51	0.00	-52.79	-52.79

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

CSE Other [PK]

5290MHz

17/02/2025

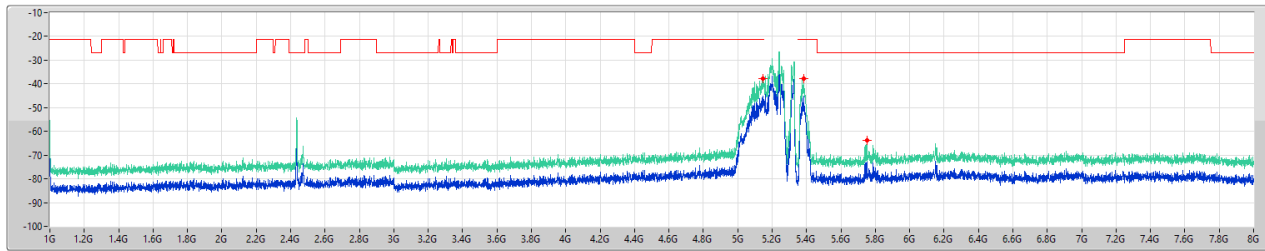


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.14663G	-37.68	-21.20	-16.48	7.51	0.00	-45.19	-45.19
1G	8G	1M	PK	5.38375G	-37.68	-21.20	-16.48	7.51	0.00	-45.19	-45.19
1G	8G	1M	PK	5.15038G	-63.92	-27.00	-36.92	7.51	0.00	-71.43	-71.43

5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

CSE Other [AV]

5290MHz

17/02/2025

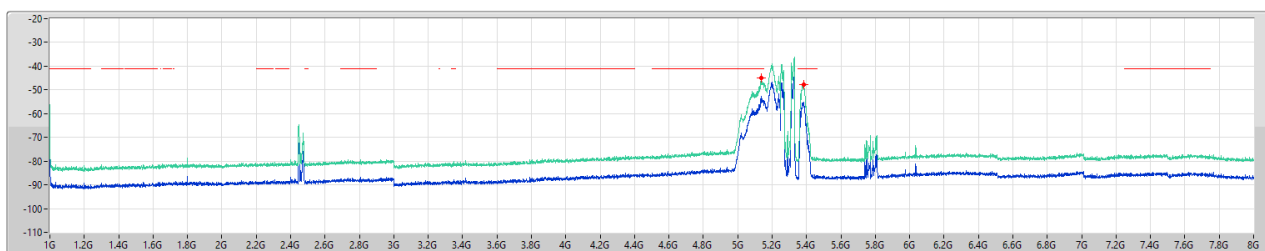


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.13525G	-45.03	-41.20	-3.83	7.51	0.00	-52.54	-52.54
1G	8G	1M	AV	5.3855G	-47.79	-41.20	-6.59	7.51	0.00	-55.30	-55.30

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

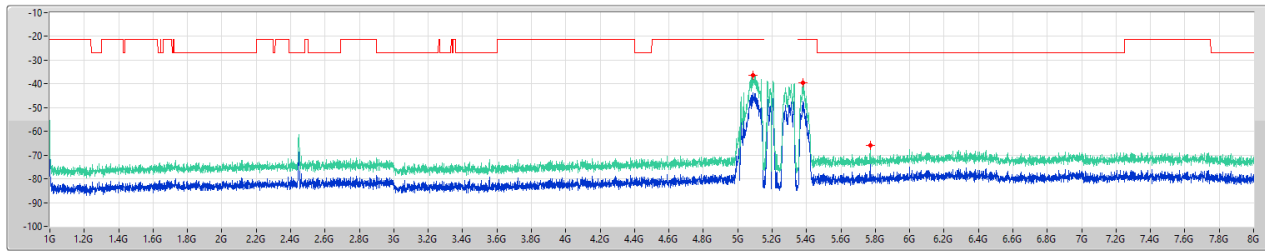


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08713G	-36.28	-21.20	-15.08	7.51	0.00	-43.79	-43.79
1G	8G	1M	PK	5.3785G	-39.70	-21.20	-18.50	7.51	0.00	-47.21	-47.21
1G	8G	1M	PK	5.1705G	-65.82	-27.00	-38.82	7.51	0.00	-73.33	-73.33

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

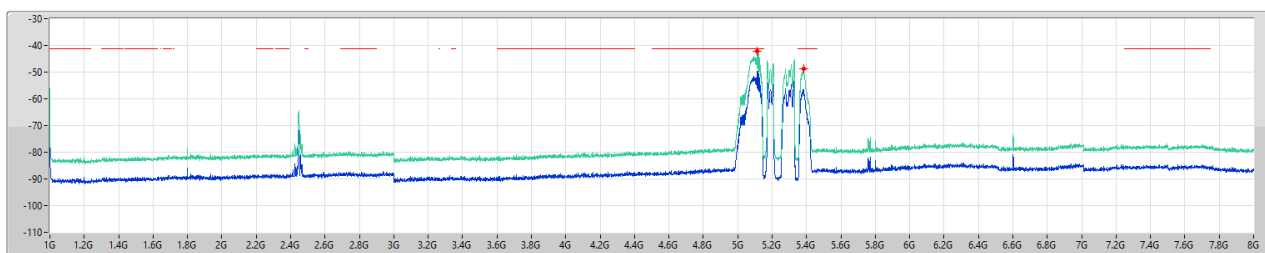


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.11163G	-42.28	-41.20	-1.08	7.51	0.00	-49.79	-49.79
1G	8G	1M	AV	5.382G	-48.90	-41.20	-7.70	7.51	0.00	-56.41	-56.41

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

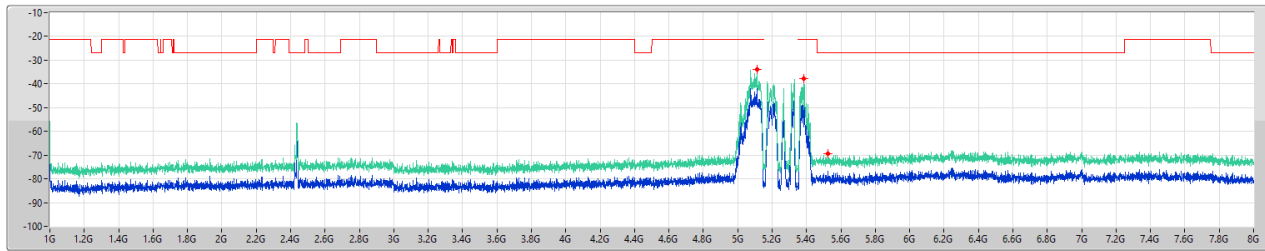


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.11075G	-33.77	-21.20	-12.57	7.51	0.00	-41.28	-41.28
1G	8G	1M	PK	5.30463G	-37.92	-21.20	-16.72	7.51	0.00	-45.43	-45.43
1G	8G	1M	PK	5.5255G	-69.34	-27.00	-42.34	7.51	0.00	-76.85	-76.85

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

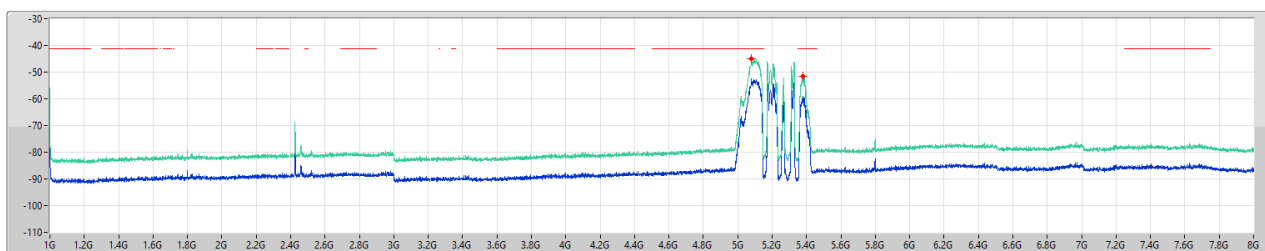


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref1(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.07925G	-45.02	-41.20	-3.82	7.51	0.00	-52.53	-52.53
1G	8G	1M	AV	5.3785G	-51.70	-41.20	-10.50	7.51	0.00	-59.21	-59.21

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

CSE Other [PK]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

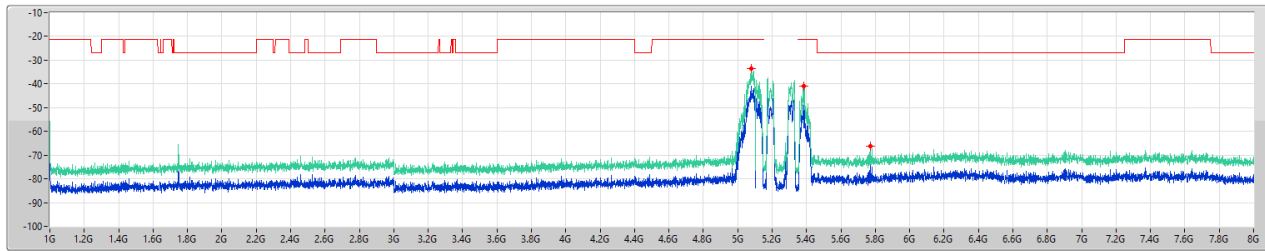


F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	PK	5.08013G	-35.54	-21.20	-12.34	7.51	0.00	-41.05	-41.05
1G	8G	1M	PK	5.3826G	-40.90	-21.20	-19.70	7.51	0.00	-48.41	-48.41
1G	8G	1M	PK	5.17313G	-66.25	-27.00	-39.25	7.51	0.00	-73.76	-73.76

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

CSE Other [AV]

5250MHz Straddle 5.25-5.35GHz

17/02/2025

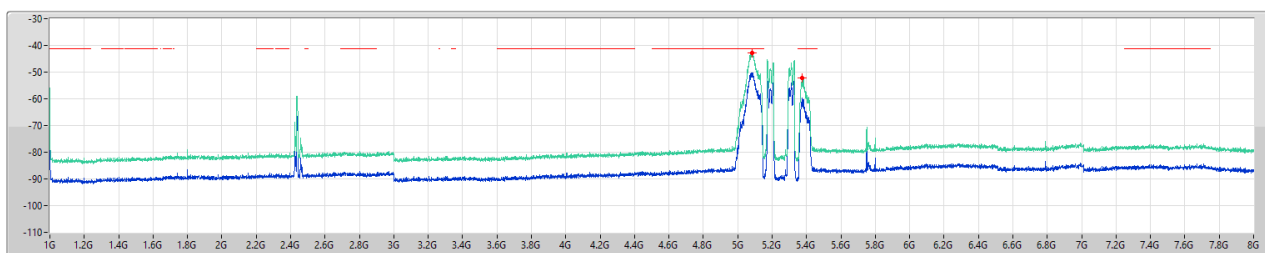

F-Start(Hz)	F-Stop(Hz)	RBW(Hz)	Type	Freq(Hz)	EIRP(dBm)	Limit(dBm)	Margin(dB)	DG(dB)	Ref(dB)	Psum(dBm)	P1(dBm)
1G	8G	1M	AV	5.08188G	-42.75	-41.20	-1.55	7.51	0.00	-50.26	-50.26
1G	8G	1M	AV	5.37588G	-52.23	-41.20	-11.03	7.51	0.00	-59.74	-59.74