


Testing Laboratory
3787

RADIO TEST REPORT

FCC ID : UDX-600216020
Equipment : Cisco Wireless 9179F Series Wi-Fi 7 Access Point
Brand Name : CISCO
Model Name : CW9179F
Applicant : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems, Inc.
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 29, 2024, and testing was started from Dec. 18, 2024 and completed on May 23, 2025. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

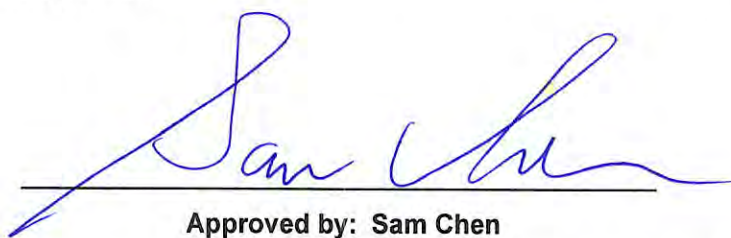

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory

No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	20
1.3 Testing Location Information	20
1.4 Measurement Uncertainty	21
2 Test Configuration of EUT	22
2.1 Test Channel Mode	22
2.2 The Worst Case Measurement Configuration	29
2.3 EUT Operation during Test	33
2.4 Accessories	33
2.5 Support Equipment.....	34
2.6 Test Setup Diagram	36
3 Transmitter Test Result	39
3.1 AC Power-line Conducted Emissions	39
3.2 Emission Bandwidth	41
3.3 Maximum Output Power	42
3.4 Power Spectral Density	44
3.5 Unwanted Emissions.....	47
4 Test Equipment and Calibration Data	53
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Output Power	
Appendix D. Test Results of Power Spectral Density	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Spot Check Results	
Appendix G. Test Photos	
Photographs of EUT v01	



History of this test report

TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB-A12_1 Ver1.4

Page Number : 3 of 55
Issued Date : Jul. 14, 2025
Report Version : 01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.3	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	Data Referencing
3.3	15.407(a)	Maximum Output Power	PASS	Data Referencing
3.4	15.407(a)	Power Spectral Density	PASS	Data Referencing
3.5	15.407(b)	Unwanted Emissions	PASS	Data Referencing

Data Referencing Statement:

This report references test data from the parent device (Original Sporton Report No.: FR4N2714-02AF, FCC ID: UDX-600216010).

The variant device (FCC ID: UDX-600216020) is electrically identical to the parent device for the portions of the circuitry corresponding to the data referencing.

The differences compared to the parent device are as follows:

1. Add Smart Cover-Secure and contact Weatherizes.
2. Change to outdoor by software.
3. Change the label location.
4. Disable UWB by software.

The details of spot-check testing are at the discretion of the applicant's engineering judgment. Accordingly, only the following items were spot-checked on the worst-case channel identified in the original report, and all results are included in this report:

1. Maximum Output Power
2. Power Spectral Density
3. Unwanted Emissions

The applicant takes full responsibility that the test data as referenced in FCC ID: UDX-600216010 represents compliance with the new FCC ID: UDX-600216020.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the chapter "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.

Reviewed by: Sam Chen

Report Producer: Sophia Shiung



1 General Description

1.1 Information

1.1.1 RF General Information

<Radio 1>

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5470-5725	a, n (HT20), ac (VHT20), ax (HEW20)	5500-5720	100-144 [12]
5470-5725	n (HT40), ac (VHT40), ax (HEW40)	5510-5710	102-142 [6]
5470-5725	ac (VHT80), ax (HEW80)	5530-5690	106-138 [3]
5470-5725	ac (VHT160), ax (HEW160)	5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11a	20	1TX
5.47-5.725GHz	802.11n HT20	20	1TX
5.47-5.725GHz	802.11ac VHT20	20	1TX
5.47-5.725GHz	802.11ax HEW20	20	1TX
5.47-5.725GHz	802.11n HT40	40	1TX
5.47-5.725GHz	802.11ac VHT40	40	1TX
5.47-5.725GHz	802.11ax HEW40	40	1TX
5.47-5.725GHz	802.11ac VHT80	80	1TX
5.47-5.725GHz	802.11ax HEW80	80	1TX
5.47-5.725GHz	802.11ac VHT160	160	1TX
5.47-5.725GHz	802.11ax HEW160	160	1TX

**<Radio 3>**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5470-5725	a, n (HT20), ac (VHT20), ax (HEW20), be (EHT20)	5500-5720	100-144 [12]
5470-5725	n (HT40), ac (VHT40), ax (HEW40), be (EHT40)	5510-5710	102-142 [6]
5470-5725	ac (VHT80), ax (HEW80), be (EHT80)	5530-5690	106-138 [3]
5470-5725	ac (VHT160), ax (HEW160), be (EHT160)	5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11a	20	1, 2, 4TX
5.47-5.725GHz	802.11n HT20	20	1, 2, 4TX
5.47-5.725GHz	802.11n HT20-BF	20	2, 4TX
5.47-5.725GHz	802.11ac VHT20	20	1, 2, 4TX
5.47-5.725GHz	802.11ac VHT20-BF	20	2, 4TX
5.47-5.725GHz	802.11ax HEW20	20	1, 2, 4TX
5.47-5.725GHz	802.11ax HEW20-BF	20	2, 4TX
5.47-5.725GHz	802.11be EHT20	20	1, 2, 4TX
5.47-5.725GHz	802.11be EHT20-BF	20	2, 4TX
5.47-5.725GHz	802.11n HT40	40	1, 2, 4TX
5.47-5.725GHz	802.11n HT40-BF	40	2, 4TX
5.47-5.725GHz	802.11ac VHT40	40	1, 2, 4TX
5.47-5.725GHz	802.11ac VHT40-BF	40	2, 4TX
5.47-5.725GHz	802.11ax HEW40	40	1, 2, 4TX
5.47-5.725GHz	802.11ax HEW40-BF	40	2, 4TX
5.47-5.725GHz	802.11be EHT40	40	1, 2, 4TX
5.47-5.725GHz	802.11be EHT40-BF	40	2, 4TX
5.47-5.725GHz	802.11n HT80	80	1, 2, 4TX
5.47-5.725GHz	802.11n HT80-BF	80	2, 4TX
5.47-5.725GHz	802.11ac VHT80	80	1, 2, 4TX
5.47-5.725GHz	802.11ac VHT80-BF	80	2, 4TX
5.47-5.725GHz	802.11ax HEW80	80	1, 2, 4TX
5.47-5.725GHz	802.11ax HEW80-BF	80	2, 4TX
5.47-5.725GHz	802.11be EHT80	80	1, 2, 4TX
5.47-5.725GHz	802.11be EHT80-BF	80	2, 4TX
5.47-5.725GHz	802.11ac VHT160	160	1, 2, 4TX
5.47-5.725GHz	802.11ac VHT160-BF	160	2, 4TX
5.47-5.725GHz	802.11ax HEW160	160	1, 2, 4TX
5.47-5.725GHz	802.11ax HEW160-BF	160	2, 4TX



Band	Mode	BWch (MHz)	Nant
5.47-5.725GHz	802.11be EHT160	160	1, 2, 4TX
5.47-5.725GHz	802.11be EHT160-BF	160	2, 4TX

For MRU (Static preamble puncturing):**Multi-RU:**

RU-tone	Bandwidth (MHz)			5GHz Test CH		
				UNII-2C		UNII-2C/3
				CH106	CH122	CH138
242+242(MCS0)	242		242	V	V	V
242+242(MCS4)	242		242	V	V	V
484+242(MCS0)	484		242	V	V	V
484+242(MCS4)	484		242	V	V	V

RU-tone	Bandwidth (MHz)				5GHz Test CH	
					UNII-2C	
					CH114	
996+484(MCS0)	484			996		V
996+484(MCS4)	484			996		V
484+3x242(MCS0)	484	242		242	242	V
484+3x242(MCS4)	484	242		242	242	V
484+484(MCS0)	484				484	V
484+484(MCS4)	484				484	V

Puncturing:

RU-tone	Configuration	Bandwidth (MHz)			5GHz Test CH		
					UNII-2C		UNII-2C/3
					CH106	CH122	CH138
484+242	1		242	484	--	V	V
	2	242		484	V	V	V
	3	484		242	V	V	V
	4	484	242		V	V	--

RU-tone	Configuration	Bandwidth (MHz)				5GHz Test CH	
						UNII-2C	
						CH114	
996+484	1		484		996		--
	2	484			996		V
	3		996			484	V
	4		996		484		V
996+484+242	1		242	484	996		--
	2	242		484	996		V
	3	484		242	996		V
	4	484	242		996		V
	5		996			242	484
	6		996		242		484
	7		996		484		242
	8		996		484	242	

Note:

- ♦ 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40, VHT80 and VHT160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80 and EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.

**1.1.2 Worst case of MRU (Static preamble puncturing) evaluation procedure**

1. Complete test Full RU BE & PSD
2. Measure the PSD of each MRU (static preamble puncturing) by conducted method and it is less than the Full RU conducted PSD.
3. Measure the Band edge emission of each MRU (static preamble puncturing) by conducted method and find out the MRU (static preamble puncturing) worst case configuration.
4. Follow step 3 to find the worst MRU (static preamble puncturing) configuration and perform radiated BE/RSE testing
5. Confirm whether the worst MRU (static preamble puncturing) configuration setting in step 3 and step 4 is the same. If there is a channel where the setting drops due to the test in step 4, the PSD of MRU (static preamble puncturing) needs to be reduced.

**1.1.3 Antenna Information****<Internal Antenna>**

Ant.	Brand	Model Name	Antenna Type	Connector	Support
1	WNC	57XPAD15.LAU	Dipole	U.FL	Radio 1
2	WNC	57XPAD15.MAU	Dipole	U.FL	
3	WNC	57XPAD15.AAU	Dipole	U.FL	Radio 2
4	WNC	57XPAD15.BAU	Dipole	U.FL	
5	WNC	57XPAD15.CAU	Dipole	U.FL	
6	WNC	57XPAD15.DAU	Dipole	U.FL	
7	WNC	57XPAD15.HAU	Dipole	U.FL	Radio 3
8	WNC	57XPAD15.HAU	Dipole	U.FL	
9	WNC	57XPAD15.IAU	Dipole	U.FL	
10	WNC	57XPAD15.IAU	Dipole	U.FL	
11	WNC	57XPAD15.JAU	Dipole	U.FL	Radio 4
12	WNC	57XPAD15.JAU	Dipole	U.FL	
13	WNC	57XPAD15.KAU	Dipole	U.FL	
14	WNC	57XPAD15.KAU	Dipole	U.FL	
15	WNC	57XPAD15.EAU	Dipole	U.FL	Radio 5
16	WNC	57XPAD15.EAU	Dipole	U.FL	
17	WNC	57XPAD15.FAU	Dipole	U.FL	
18	WNC	57XPAD15.FAU	Dipole	U.FL	
19	WNC	57XPAD15.NAU	Loop	U.FL	Radio 6
20	WNC	57XPAD15.PAU	PIFA	U.FL	Radio 7
21	WNC	57XPAD15.0DG	PIFA	U.FL	
22	WNC	57XPAD15.OAU	Patch	U.FL	Radio 8
23	WNC	57XPAD15.OAU	Patch	U.FL	

Ant.	Port	Gain (dBi)					Support
		WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz		
			UNII 1~2A	UNII 2C~3	UNII 5	UNII 7	
1	1	3.7	4.9	6.1	5.0	5.8	Radio 1
2	2	5.1	4.5	5.2	5.5	6.4	
3	1	5.0	-	-	-	-	
4	2	4.3	-	-	-	-	
5	3	5.1	-	-	-	-	
6	4	5.3	-	-	-	-	



Ant.	Port	Gain (dBi)					Support
		WLAN 5GHz					
		Mode	UNII 1	UNII 2A	UNII 2C	UNII 3	
7	3	Boresight	9.3	9.4	9.7	9.8	Radio 3
		Steering	9.4	9.4	10.0	10.0	
8	4	Boresight	10.3	10.3	10.6	10.2	
		Steering	10.2	10.2	10.6	10.3	
9	2	Boresight	9.6	9.9	10.3	9.9	
		Steering	9.9	9.8	10.3	10.1	
10	1	Boresight	10.4	10.6	10.7	10.4	
		Steering	10.3	10.7	10.6	10.4	

Ant.	Port	Gain (dBi)			Support
		WLAN 6GHz			
		Mode	UNII 5	UNII 7	
11	3	Narrow Beam	9.2	9.0	Radio 4
		Wide Beam	5.4	5.3	
12	4	Narrow Beam	9.2	8.7	
		Wide Beam	5.1	5.2	
13	2	Narrow Beam	10.0	9.8	
		Wide Beam	6.4	6.5	
14	1	Narrow Beam	9.8	10.1	
		Wide Beam	5.6	6.2	

Ant.	Port	Gain (dBi)						Support
		WLAN 5GHz			Bluetooth / Zigbee	UWB	GPS	
		Mode	UNII 1	UNII 2A				
15	2	Boresight	8.6	8.8	-	-	-	Radio 5
		Steering	8.5	9.0	-	-	-	
16	1	Boresight	9.4	9.4	-	-	-	
		Steering	9.4	9.4	-	-	-	
17	4	Boresight	8.7	9.3	-	-	-	
		Steering	8.8	9.2	-	-	-	
18	3	Boresight	8.5	9.0	-	-	-	
		Steering	8.5	9.0	-	-	-	
19	1	-	-	-	6.1	-	-	Radio 6
20	1	-	-	-	-	-	3.8	Radio 7
21	1	-	-	-	-	-	3.5	
22	2	-	-	-	-	8.2	-	Radio 8
23	1	-	-	-	-	8.6	-	

<External Antenna>

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Support
1	1~4	CISCO	AIR-ANT2588P4M-NS	(Panel) Dual-polarized directional	N-Female Bulkhead	Radio 2, Radio 5
2	1~4	CISCO	AIR-ANT2566D4M-R	(Patch) Dual-Band Polarization-Diverse Directional Array	RP-TNC (with coupling ring)	
3	1~4	CISCO	AIR-ANT2566D4M-RS	(Patch) Dual-Band Polarization-Diverse Directional Array	RP-TNC (with coupling ring)	
4	1~4	CISCO	AIR-ANT2566P4W-R	(Patch) 4-element dual-band MIMO	RP-TNC	
5	1~4	CISCO	AIR-ANT2566P4W-RS	(Patch) 4-element dual-band MIMO	RP-TNC	
6	1~4	CISCO	CW-ANT-T-D3-N	Dipole	RP-TNC	Radio 7
7	1	CISCO	CW-ANT-GPS1-M-00	OMNI	MMCX	

Ant.	Gain (dBi)					Support
	Pol	WLAN 2.4GHz				
		Peak Gain	Internal Cable Loss	External Cable Loss	Net Gain	
1	V-Pol*2	9.1	0.83	0.5	7.77	Radio 2
	H-Pol*2	7.1	0.83		5.77	
2~3	V-Pol*2	6	0.83	-	5.17	
	H-Pol*2	6	0.83	-	5.17	
4~5	V-Pol*4	6	0.83	-	5.17	
6	-	6	0.83	-	5.17	

Ant.	Gain (dBi)					Support
	Pol	WLAN 5GHz				
		Peak Gain	Internal Cable Loss	External Cable Loss	Net Gain	
1	V-Pol*2	9.6	1.29	0.8	7.51	Radio 5
	H-Pol*2	7.8	1.29		5.71	
2~3	V-Pol*2	6	1.29	-	4.71	
	H-Pol*2	6	1.29	-	4.71	
4~5	V-Pol*4	6	1.29	-	4.71	
6	-	7.5	1.29	-	6.21	

Ant.	Gain (dBi)	Support
	GPS	
7	5	Radio 7

Note 1: The Manufacturer declared that the internal Ant. 22~23 (Radio 8) will not function when the EUT is used.

Note 2: The above information was declared by manufacturer.

Note 3: For external Ant. 1~6:

For radiated measurement: The external Ant. 1, 5 and 6 with the highest antenna gain for each type were selected for testing.

For conducted measurement:

NonTXBF power: The external Ant. 1 with the highest antenna gain was selected for testing.

NonTXBF PSD / TXBF power & PSD:

2.4GHz: The external Ant. 4 with the highest antenna array gain was selected for testing.

5GHz: The external Ant. 6 with the highest antenna array gain was selected for testing.

Note 4: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20} ; NSS1(g1,2) = 10^{G3/20} ; NSS1(g1,2) = 10^{G4/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) + NSS1(g1,3) + NSS1(g1,4))^2 / N_{ANT}] \Rightarrow 10$$

$$\log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20} + 10^{G4/20})^2 / N_{ANT}]$$

Where;

For nonTXBF power:

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
2	2.4G External	2TX	7.77	5.77	-	-	7.77	Cross-Polarized Antenna
		4TX	7.77	5.77	7.77	5.77	7.77	
	2.4G Internal	2TX	5	4.3	-	-	5	
		4TX	5	4.3	5.1	5.3	5.3	
3	5G UNII 1 (Note 5)	2TX	10.4	9.9	-	-	10.4	
		4TX	10.4	9.9	9.4	10.3	10.4	
	5G UNII 1 (Boresight)	2TX	10.4	9.6	-	-	10.4	
		4TX	10.4	9.6	9.3	10.3	10.4	
	5G UNII 2A (Note 5)	2TX	10.7	9.9	-	-	10.7	
		4TX	10.7	9.9	9.4	10.3	10.7	
	5G UNII 2A (Boresight)	2TX	10.6	9.9	-	-	10.6	
		4TX	10.6	9.9	9.4	10.3	10.6	
	5G UNII 2C (Note 5)	2TX	10.7	10.3	-	-	10.7	
		4TX	10.7	10.3	10	10.6	10.7	
	5G UNII 2C (Boresight)	2TX	10.7	10.3	-	-	10.7	
		4TX	10.7	10.3	9.7	10.6	10.7	
	5G UNII 2C (Steering)	2TX	10.6	10.3	-	-	10.6	
		4TX	10.6	10.3	10	10.6	10.6	



Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
3	5G UNII 3 (Note 5)	2TX	10.4	10.1	-	-	10.4	Cross-Polarized Antenna
		4TX	10.4	10.1	10	10.3	10.4	
	5G UNII 3 (Boresight)	2TX	10.4	9.9	-	-	10.4	
		4TX	10.4	9.9	9.8	10.2	10.4	
	5G UNII 3 (Steering)	2TX	10.4	10.1	-	-	10.4	
		4TX	10.4	10.1	10	10.3	10.4	
4	6G UNII 5 (Narrow Beam)	2TX	9.8	10	-	-	10	
		4TX	9.8	10	9.2	9.2	10	
	6G UNII 5 (Wide Beam)	2TX	5.6	6.4	-	-	6.4	
		4TX	5.6	6.4	5.4	5.1	6.4	
	6G UNII 7 (Narrow Beam)	2TX	10.1	9.8	-	-	10.1	
		4TX	10.1	9.8	9	8.7	10.1	
	6G UNII 7 (Wide Beam)	2TX	6.2	6.5	-	-	6.5	
		4TX	6.2	6.5	5.3	5.2	6.5	
5	5G UNII 1~2A External	2TX	7.51	5.71	-	-	7.51	
		4TX	7.51	5.71	7.51	5.71	7.51	
	5G UNII 1 Internal (Note 5)	2TX	9.4	8.6	-	-	9.4	
		4TX	9.4	8.6	8.5	8.8	9.4	
	5G UNII 1 Internal (Boresight)	2TX	9.4	8.6	-	-	9.4	
		4TX	9.4	8.6	8.5	8.7	9.4	
	5G UNII 1 Internal (Steering)	2TX	9.4	8.5	-	-	9.4	
		4TX	9.4	8.5	8.5	8.8	9.4	
	5G UNII 2A Internal (Note 5)	2TX	9.4	9	-	-	9.4	
		4TX	9.4	9	9	9.3	9.4	
	5G UNII 2A Internal (Boresight)	2TX	9.4	8.8	-	-	9.4	
		4TX	9.4	8.8	9	9.3	9.4	
	5G UNII 2A Internal (Steering)	2TX	9.4	9	-	-	9.4	
		4TX	9.4	9	9	9.2	9.4	

For nonTXBF PSD / TXBF power & PSD:

Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
2	2.4G External	2TX	5.17	5.17	-	-	8.18	-
		4TX	5.17	5.17	5.17	5.17	11.19	
	2.4G Internal	2TX	5	4.3	-	-	5	
		4TX	5	4.3	5.1	5.3	7.95	
3	5G UNII 1 (Note 5)	2TX	10.4	9.9	-	-	10.4	Cross-Polarized Antenna
		4TX	10.4	9.9	9.4	10.3	13.02	
	5G UNII 1 (Boresight)	2TX	10.4	9.6	-	-	10.4	
		4TX	10.4	9.6	9.3	10.3	12.93	
	5G UNII 2A (Note 5)	2TX	10.7	9.9	-	-	10.7	
		4TX	10.7	9.9	9.4	10.3	13.11	
	5G UNII 2A (Boresight)	2TX	10.6	9.9	-	-	10.6	
		4TX	10.6	9.9	9.4	10.3	13.08	
	5G UNII 2C (Note 5)	2TX	10.7	10.3	-	-	10.7	
		4TX	10.7	10.3	10	10.6	13.42	
	5G UNII 2C (Boresight)	2TX	10.7	10.3	-	-	10.7	
		4TX	10.7	10.3	9.7	10.6	13.35	
	5G UNII 2C (Steering)	2TX	10.6	10.3	-	-	10.6	
		4TX	10.6	10.3	10	10.6	13.31	
	5G UNII 3 (Note 5)	2TX	10.4	10.1	-	-	10.4	
		4TX	10.4	10.1	10	10.3	13.21	
4	6G UNII 5 (Narrow Beam)	2TX	9.8	10	-	-	10	
		4TX	9.8	10	9.2	9.2	12.57	
	6G UNII 5 (Wide Beam)	2TX	5.6	6.4	-	-	6.4	
		4TX	5.6	6.4	5.4	5.1	8.66	
	6G UNII 7 (Narrow Beam)	2TX	10.1	9.8	-	-	10.1	
		4TX	10.1	9.8	9	8.7	12.45	
	6G UNII 7 (Wide Beam)	2TX	6.2	6.5	-	-	6.5	
		4TX	6.2	6.5	5.3	5.2	8.85	
5	5G UNII 1~2A External	2TX	6.21	6.21	-	-	9.22	-
		4TX	6.21	6.21	6.21	6.21	12.23	
	5G UNII 1 Internal (Note 5)	2TX	9.4	8.6	-	-	9.4	Cross-Polarized Antenna
		4TX	9.4	8.6	8.5	8.8	12.19	
	5G UNII 1 Internal (Boresight)	2TX	9.4	8.6	-	-	9.4	
		4TX	9.4	8.6	8.5	8.7	11.82	
	5G UNII 1 Internal (Steering)	2TX	9.4	8.5	-	-	9.4	
		4TX	9.4	8.5	8.5	8.8	11.82	



Radio	Mode		Max Gain (dBi)				DG (dBi)	Remark
			G1	G2	G3	G4		
5	5G UNII 2A Internal (Note 5)	2TX	9.4	9	-	-	9.4	Cross- Polarized Antenna
		4TX	9.4	9	9	9.3	12.19	
	5G UNII 2A Internal (Boresight)	2TX	9.4	8.8	-	-	9.4	
		4TX	9.4	8.8	9	9.3	12.14	
	5G UNII 2A Internal (Steering)	2TX	9.4	9	-	-	9.4	
		4TX	9.4	9	9	9.2	12.16	

Note 5: For RF Conducted: For internal Ant. 7~10 and Ant. 15~18, only the mode with higher antenna gain between Boresight mode and Steering mode was selected to record in this column and to perform all the test items, except for RF exposure tests.

Note 6: **<Radio 1>**

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax (1TX/2RX):

Only Port 1 can be used as transmitting antenna.

Both Port 1 and 2 can be used as receiving antenna.

Port 1~2 could receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax (1TX/2RX):

Only Port 1 can be used as transmitting antenna.

Both Port 1 and 2 can be used as receiving antenna.

Port 1~2 could receive simultaneously.

For 6GHz function:

For IEEE 802.11 ax (1TX/2RX):

Only Port 1 can be used as transmitting antenna.

Both Port 1 and 2 can be used as receiving antenna.

Port 1~2 could receive simultaneously.

<Radio 2>

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be (1TX, 2TX, 4TX/4RX):

1TX:

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

**<Radio 3>****For 5GHz function:****For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 4>**For 6GHz function:****For IEEE 802.11 ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 5>**For 5GHz function:****For IEEE 802.11 a/n/ac/ax/be (1TX, 2TX, 4TX/4RX):****1TX:**

Only Port 1 can be used as transmitting antenna.

2TX:

Both Port 1 and 2 can be used as transmitting antenna.

Port 1~2 could transmit simultaneously.

4TX:

Port 1~4 can be used as transmitting antenna.

Port 1~4 could transmit simultaneously.

4RX:

Port 1~4 can be used as receiving antenna.

Port 1~4 could receive simultaneously.

<Radio 6>**For Bluetooth function (1TX/1RX):**

Only Port 1 can be used as transmitting/receiving antenna.

For Zigbee function (1TX/1RX):

Only Port 1 can be used as transmitting/receiving antenna.

**<Radio 7>****For GPS function (1RX):**

The EUT supports the antenna with RX diversity functions.

Internal Ant. 20~21 and external Ant. 7 can be used as receiving antenna, but only one of them will be used at one time.

1.1.4 Mode Test Duty Cycle**<Radio 1>**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a	0.933	0.3	1.977m	1k
802.11ax HEW20	0.808	0.93	5.447m	300
802.11ax HEW40	0.807	0.93	5.447m	300
802.11ax HEW80	0.807	0.93	5.445m	300
802.11ax HEW160	0.807	0.93	5.447m	300

<Radio 3>**For Full RU:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11a_Nss 1,(6D)	0.993	0.03	1.981m	10Hz (DC>=0.98)
802.11be EHT20_Nss 1,(M0)	0.998	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40_Nss 1,(M0)	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80_Nss 1,(M0)	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160_Nss 1,(M0)	0.998	0.01	5.456m	10Hz (DC>=0.98)

For MRU (Static preamble puncturing):**Multi-RU:**

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242	0.851	0.7	2.744m	500
802.11be EHT80_Nss1,(MCS0),RU242+RU242	0.875	0.58	2.744m	500
802.11be EHT160_Nss1,(MCS0),RU996+RU484	0.808	0.93	1.42m	1k
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242	0.865	0.63	2.76m	500
802.11be EHT160_Nss1,(MCS0),RU484+RU484	0.836	0.78	1.42m	1k

Puncturing:

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT80_Nss1,(MCS0),RU484+RU242	0.997	0.01	5.452m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242	0.998	0.01	5.453m	10
802.11be EHT160_Nss1,(MCS0),RU996+RU484	0.998	0.01	5.453m	10

Note:

- ◆ DC is Duty Cycle.
- ◆ DCF is Duty Cycle Factor.

**1.1.5 EUT Operational Condition**

EUT Power Type	From PoE			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for n/VHT/ax/be in 2.4GHz (Radio 2), n/ac/ax/be in 5GHz (Radio 3 and Radio 5) and ax/be in 6GHz (Radio 4).			
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
TPC Function	☒	With TPC	☐	Without TPC
Channel Puncturing Function	☒	Supported Static Puncturing in Radio 3		
	☐	Supported Dynamic Puncturing		
	☒	Unsupported in Radio 1		
Support RU	☒	Full RU in Radio 1 and 3	☒	Partial RU in Radio 3
Test Software Version	Non-beamforming mode: QSPR Version 6.00.00142.1 Beamforming mode: DOS[10.0.19045.4780]			

Note: The above information was declared by manufacturer.

1.1.6 Table for Multiple Listing

Equipment Name	Model Name	BW of 5G Mode (MHz)	Radio 3	SW	Frequencies supported by 320MHz (MHz)
Cisco Wireless 9179F Series Wi-Fi 7 Access Point	CW9179F	20/40/80/160	UNII 1~3/ UNII 2C~3	Cisco	Not Support
		20/40/80	UNII 2C~3	Meraki	6105

Note: The above information was declared by manufacturer.

**1.1.7 Table for EUT Support Function**

Function	Supports Band
AP	2.4GHz, 5GHz UNII 1~3, 6GHz UNII 5&7, Bluetooth, Zigbee and GPS
Mesh	6GHz UNII 5&7

Note 1: Form above table list, only AP mode was tested and recorded in this report.

Note 2: The above information was declared by manufacturer.

1.1.8 Table for Radio Function

Function Radio (R)	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	Bluetooth	Zigbee	UWB	GPS
R1 (Scanning Radio)	✓	✓ (UNII 1~3)	✓	-	-	-	-
R2	✓	-	-	-	-	-	-
R3	-	✓ (Note 1) (Full band: UNII 1~3) (High band: UNII 2C~3)	-	-	-	-	-
R4	-	-	✓	-	-	-	-
R5	-	✓ (Low band: UNII 1~2A)	-	-	-	-	-
R6	-	-	-	✓	✓	-	-
R7	-	-	-	-	-	-	✓
R8	-	-	-	-	-	Unable to use	-

Note 1: For R3, the full band mode supports Boresight mode only, and the high band mode supports both Boresight mode and Steering mode.

Note 2: For WLAN 2.4GHz, R1 and R2 can't operate at the same frequency simultaneously.

For WLAN 5GHz, R1, R3 and R5 can't operate at the same frequency simultaneously.

For WLAN 6GHz, R1 and R4 can't operate at the same frequency simultaneously.

Note 3: The above information was declared by manufacturer.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 662911 D01 v02r01
- ♦ FCC KDB 412172 D01 v01r01
- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.) TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted	TH03-CB	Ederson Huang	23.2~24.9 / 61~64	Dec. 18, 2024~ Jan. 24, 2025
				Feb. 06, 2025~ Feb. 17, 2025
Radiated < 1GHz	03CH05-CB	Jackson Peng	21.9~22.4 / 60~62	Feb. 19, 2025~ Feb. 25, 2025
Radiated > 1GHz (Others for R1 & R3)	03CH06-CB	Jackson Peng	22.5~22.9 / 58~60	Feb. 06, 2025~ Feb. 08, 2025
	03CH05-CB		21.9~22.4 / 60~62	May 23, 2025
AC Conduction	CO01-CB	Tim Chen	19~20 / 62~63	Apr. 25, 2025
Spot Check	TH03-CB	Ederson Huang	21.9~22.8 / 57~62	Apr. 24, 2025~ May 09, 2025

Note: The tested sample for AC Conduction and Spot Check tests were received on Dec. 18, 2024.



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.1 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.0 dB	Confidence levels of 95%
Conducted Emission	3.1 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.1 dB	Confidence levels of 95%
Bandwidth Measurement	2.1 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

<Radio 1>

Mode
802.11a_Nss1,(6Mbps)_1TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW20_Nss1,(MCS0)_1TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
5745MHz
5785MHz
5825MHz
802.11ax HEW40_Nss1,(MCS0)_1TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
5755MHz
5795MHz
802.11ax HEW80_Nss1,(MCS0)_1TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
5775MHz
802.11ax HEW160_Nss1,(MCS0)_1TX
5570MHz

**<Radio 3>
For Full RU:**

Mode
802.11a_Nss1,(6Mbps)_1TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT20_Nss1,(MCS0)_1TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT40_Nss1,(MCS0)_1TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0)_1TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_1TX
5570MHz
802.11a_Nss1,(6Mbps)_2TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT20_Nss1,(MCS0)_2TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT40_Nss1,(MCS0)_2TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0)_2TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz



Mode
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_2TX
5570MHz
802.11a_Nss1,(6Mbps)_4TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT20_Nss1,(MCS0)_4TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT40_Nss1,(MCS0)_4TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0)_4TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_4TX
5570MHz
802.11be EHT20-BF_Nss1,(MCS0)_2TX
5500MHz
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT40-BF_Nss1,(MCS0)_2TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
802.11be EHT80-BF_Nss1,(MCS0)_2TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160-BF_Nss1,(MCS0)_2TX
5570MHz
802.11be EHT20-BF_Nss1,(MCS0)_4TX
5500MHz



Mode
5580MHz
5700MHz
5720MHz Straddle 5.47-5.725GHz
5720MHz Straddle 5.725-5.85GHz
802.11be EHT40-BF_Nss1,(MCS0)_4TX
5510MHz
5550MHz
5670MHz
5710MHz Straddle 5.47-5.725GHz
5710MHz Straddle 5.725-5.85GHz
802.11be EHT80-BF_Nss1,(MCS0)_4TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160-BF_Nss1,(MCS0)_4TX
5570MHz

For MRU (Static preamble puncturing):**Multi-RU:**

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX
5570MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5610MHz



Mode
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX
5570MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX
5570MHz
802.11be EHT80_Nss1,(MCS0)_1TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_1TX
5570MHz
802.11be EHT80_Nss1,(MCS0)_2TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz



Mode
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_2TX
5570MHz
802.11be EHT80_Nss1,(MCS0)_4TX
5530MHz
5610MHz
5690MHz Straddle 5.47-5.725GHz
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0)_4TX
5570MHz

Puncturing:

Mode
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_1TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_1TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_2TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_2TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_2TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 4_4TX
5530MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 1_4TX
5610MHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX
5690MHz Straddle 5.47-5.725GHz
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 2_4TX
5690MHz Straddle 5.725-5.85GHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_1TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_2TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484+RU242 MRU 3_4TX
5570MHz
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 3_4TX
5570MHz



Mode
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 4_4TX
5570MHz

Note:

- ♦ For Radio 1: HEW20 / HEW40 / HEW80 / HEW160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 is the same or lower than HEW20 / HEW40 / HEW80 / HEW160.
- ♦ For Radio 3: EHT20 / EHT40 / EHT80 / EHT160 covers HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 due to similar modulation. The power setting for HT20 / HT40 / VHT20 / VHT40 / VHT80 / VHT160 / HEW20 / HEW40 / HEW80 / HEW160 is the same or lower than EHT20 / EHT40 / EHT80 / EHT160.
- ♦ For Radio 3: The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.



2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests								
Tests Item	AC power-line conducted emissions							
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz							
Operating Mode	Normal Link							
	1. The EUT performed the testing on "LAN 0" and "LAN 1" ports. The "LAN 1" port generated the worst case. Consequently, the measurement will follow this same test mode. 2. The EUT performed the testing with PoE 1~8. The "PoE 4" generated the worst case. Consequently, the measurement will follow this same test mode. 3. The EUT performed the testing with 2.4GHz, 5GHz and 6GHz in Radio 1. The 2.4GHz in Radio 1 generated the worst case. Consequently, the measurement will follow this same test mode. 4. The EUT performed the testing with Bluetooth and Zigbee in Radio 6. The Bluetooth in Radio 6 generated the worst case. Consequently, the measurement will follow this same test mode. 5. The EUT performed the testing with Internal Ant. 20, Internal Ant. 21 and External Ant. 7 for GPS function. The Internal Ant. 20 for GPS function generated the worst case. Consequently, the measurement will follow this same test mode. 6. The EUT performed the testing with Boresight mode and Steering mode in Radio 3. The Boresight mode in Radio 3 generated the worst case. Consequently, the measurement will follow this same test mode. 7. The EUT performed the testing with Narrow Beam mode and Wide Beam mode in Radio 4. The Narrow Beam mode in Radio 4 generated the worst case. Consequently, the measurement will follow this same test mode. 8. The EUT performed the testing with Internal Ant. (Boresight mode and Steering mode), External Ant. 1, External Ant. 5 and External Ant. 6 for Radio 5. The mode that Radio 5 is not functioning generated the worst case. Consequently, the measurement will follow this same test mode. 9. The EUT performed the testing with Internal Ant., External Ant. 1, External Ant. 5 and External Ant. 6 for Radio 2. The Internal Ant. for Radio 2 generated the worst case. Consequently, the measurement will follow this same test mode.							
	R1 (2.4GHz/ 5GHz/6GHz)	R2 (2.4GHz)	R3 (5GHz)	R4 (6GHz)	R5 (5GHz)	R6 (BT/ Zigbee)	R7 (GPS)	PoE
1	2.4GHz	Internal Ant.	Boresight	Narrow Beam	N/A	BT	Internal Ant. 20	1 (Test LAN 0)

The Worst Case Mode for Following Conformance Tests		
Tests Item	Emission Bandwidth	
Test Condition	Conducted measurement at transmit chains	
Operating Mode	1	EUT_R1: 5GHz
	2	EUT_R3: 5GHz



The Worst Case Mode for Following Conformance Tests		
Tests Item	Maximum Output Power	
Test Condition	Conducted measurement at transmit chains	
Operating Mode	1	EUT_R1: 5GHz
	2	EUT_R3: 5GHz

The Worst Case Mode for Following Conformance Tests		
Tests Item	Power Spectral Density	
Test Condition	Conducted measurement at transmit chains	
Operating Mode	1	EUT_R1: 5GHz
	2	EUT_R3: 5GHz_Full RU
	3	EUT_R3: 5GHz_Multi-RU
	4	EUT_R3: 5GHz_Puncturing

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	CTX
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis_R1: 2.4GHz + PoE 1
2	EUT in Y axis_R1: 2.4GHz + PoE 2
3	EUT in Y axis_R1: 2.4GHz + PoE 3
4	EUT in Y axis_R1: 2.4GHz + PoE 4
5	EUT in Y axis_R1: 2.4GHz + PoE 5
6	EUT in Y axis_R1: 2.4GHz + PoE 6
7	EUT in Y axis_R1: 2.4GHz + PoE 7
8	EUT in Y axis_R1: 2.4GHz + PoE 8
Mode 4 has been evaluated to be the worst case among Mode 1~8, so the measurement for Mode 9~25 will follow this same test mode.	
9	EUT in Y axis_R1: 5GHz + PoE 4
10	EUT in Y axis_R1: 6GHz + PoE 4
11	EUT in Y axis_R2: 2.4GHz (Internal Ant.) + PoE 4
12	EUT in Y axis_R3: 5GHz (Boresight) + PoE 4



13	EUT in Y axis_R4: 6GHz (Narrow Beam) + PoE 4
14	EUT in Y axis_R5: 5GHz (Internal Ant. - Boresight) + PoE 4
15	EUT in Y axis_R6: Bluetooth + PoE 4
16	EUT in Y axis_R6: Zigbee + PoE 4
17	EUT in Y axis_R3: 5GHz (Steering) + PoE 4
18	EUT in Y axis_R4: 6GHz (Wide Beam) + PoE 4
19	EUT in Y axis_R5: 5GHz (Internal Ant. - Steering) + PoE 4
20	EUT in Y axis_R2: 2.4GHz (External Ant. 1) + PoE 4
21	EUT in Y axis_R2: 2.4GHz (External Ant. 5) + PoE 4
22	EUT in Y axis_R2: 2.4GHz (External Ant. 6) + PoE 4
23	EUT in Y axis_R5: 5GHz (External Ant. 1) + PoE 4
24	EUT in Y axis_R5: 5GHz (External Ant. 5) + PoE 4
25	EUT in Y axis_R5: 5GHz (External Ant. 6) + PoE 4
For operating, mode 13 is the worst case and it was recorded in this test report.	
Operating Mode > 1GHz	CTX (Cabinet)
	After evaluating, EUT in Y axis was the worst case, so the measurement will follow this same test configuration.
1	EUT in Y axis_R1: 5GHz
2	EUT in Y axis_R3: 5GHz

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Conducted measurement at transmit chains
Operating Mode > 1GHz	CTX (Harmonic & Bandedge)
1	EUT_R1: 5GHz
2	EUT_R3: 5GHz_Full RU
3	EUT_R3: 5GHz_Multi-RU
4	EUT_R3: 5GHz_Puncturing



The Worst Case Mode for Following Conformance Tests								
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation							
Operating Mode	R1 (2.4GHz/5GHz/ 6GHz)	R2 (2.4GHz)	R3 (5GHz UNII 1~3/ 5GHz UNII 2C~3)	R4 (6GHz)	R5 (5GHz)	R6 (BT/Zigbee)		
1	2.4GHz	Internal Ant.	Full band: UNII 1~3 (Boresight)	Narrow Beam	N/A	BT		
2	5GHz							
3	6GHz							
4	2.4GHz					Zigbee		
5	5GHz							
6	6GHz							
7	2.4GHz		High band: UNII 2C~3 (Steering)	Wide Beam	Internal Ant. (Steering)	BT		
8	5GHz							
9	6GHz							
10	2.4GHz					Zigbee		
11	5GHz							
12	6GHz							
13	2.4GHz	External Ant.	High band: UNII 2C~3 (Boresight)	Narrow Beam	External Ant.	BT		
14	5GHz							
15	6GHz							
16	2.4GHz					Zigbee		
17	5GHz							
18	6GHz							
19	2.4GHz	Internal Ant.					Internal Ant. (Boresight)	BT
20	5GHz							
21	6GHz							
22	2.4GHz							Zigbee
23	5GHz							
24	6GHz							
Refer to Sporton Test Report No.: FA4N2715-01 for Co-location RF Exposure Evaluation.								

Refer to Sporton Test Report No.: FA4N2715-01 for Co-location RF Exposure Evaluation.

Note: The PoEs were for measurement only and would not be marketed. Their information is shown as below:

Equipment	Brand	Model Name
PoE 1	Microsemi	PD-9001GR/AT/AC
PoE 2	PHIHONG	POE29U-1AT(PL)
PoE 3	DELTA	ADH-65AR B
PoE 4	PHIHONG	POEA33U-1ATE
PoE 5	PHIHONG	POE60U-1BT-X



Equipment	Brand	Model Name
PoE 6	PHIHONG	POE60U-BTA(X66M-R)
PoE 7	PHIHONG	POE60U-BTA(X664-R)
PoE 8	DELTA	ADH-65AR P

2.3 EUT Operation during Test

For CTX Mode:

For Conducted Mode:

Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

Beamforming mode:

During the test, the following programs under WIN 10 were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "DOS[10.0.19045.4780]" to link with the remote workstation to transmit and receive packet by Client and transmit duty cycle no less than 98%.

For Radiated Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

Solar shield*1 (Optional)

Bracket*1 (Optional)

Bay cover*1

Rubber gland*1



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	PoE 4 (1)	PHIHONG	POEA33U-1ATE	N/A
B	2.4G NB	DELL	E6400	N/A
C	5G NB	DELL	E6400	N/A
D	6G module	MTK	MT7927	N/A
E	6G NB	DELL	E6400	N/A
F	GPS Simulator	WELNAVIGATE	GS-100	N/A
G	LAN1 PC	ASUS	S300TA	TX2-RTL8821CE
H	PoE 4 (2)	PHIHONG	POEA33U-1ATE	N/A
I	LAN0 PC	ASUS	S300TA	TX2-RTL8821CE
J	Smart phone	REDMI	M1810F6LH	2AFZZ-RMSF6LG

For Radiated < 1GHz, Radiated > 1GHz (Others for R1 & R3), RF Conducted (Non-beamforming mode) and Spot Check:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE 4	PHIHONG	POEA33U-1ATE	N/A


For Radiated (Co-location):


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE 4	PHIHONG	POEA33U-1ATE	N/A
C	NB	DELL	E4300	N/A
D	PoE	CISCO	MA-INJ-5	N/A
E	Client	CISCO	Alpine	N/A

**For RF Conducted (Beamforming mode):**


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	NB	DELL	E4300	N/A
B	PoE 4	PHIHONG	POEA33U-1ATE	N/A
C	NB	DELL	E4300	N/A
D	Client	CISCO	Alpine	N/A

2.6 Test Setup Diagram

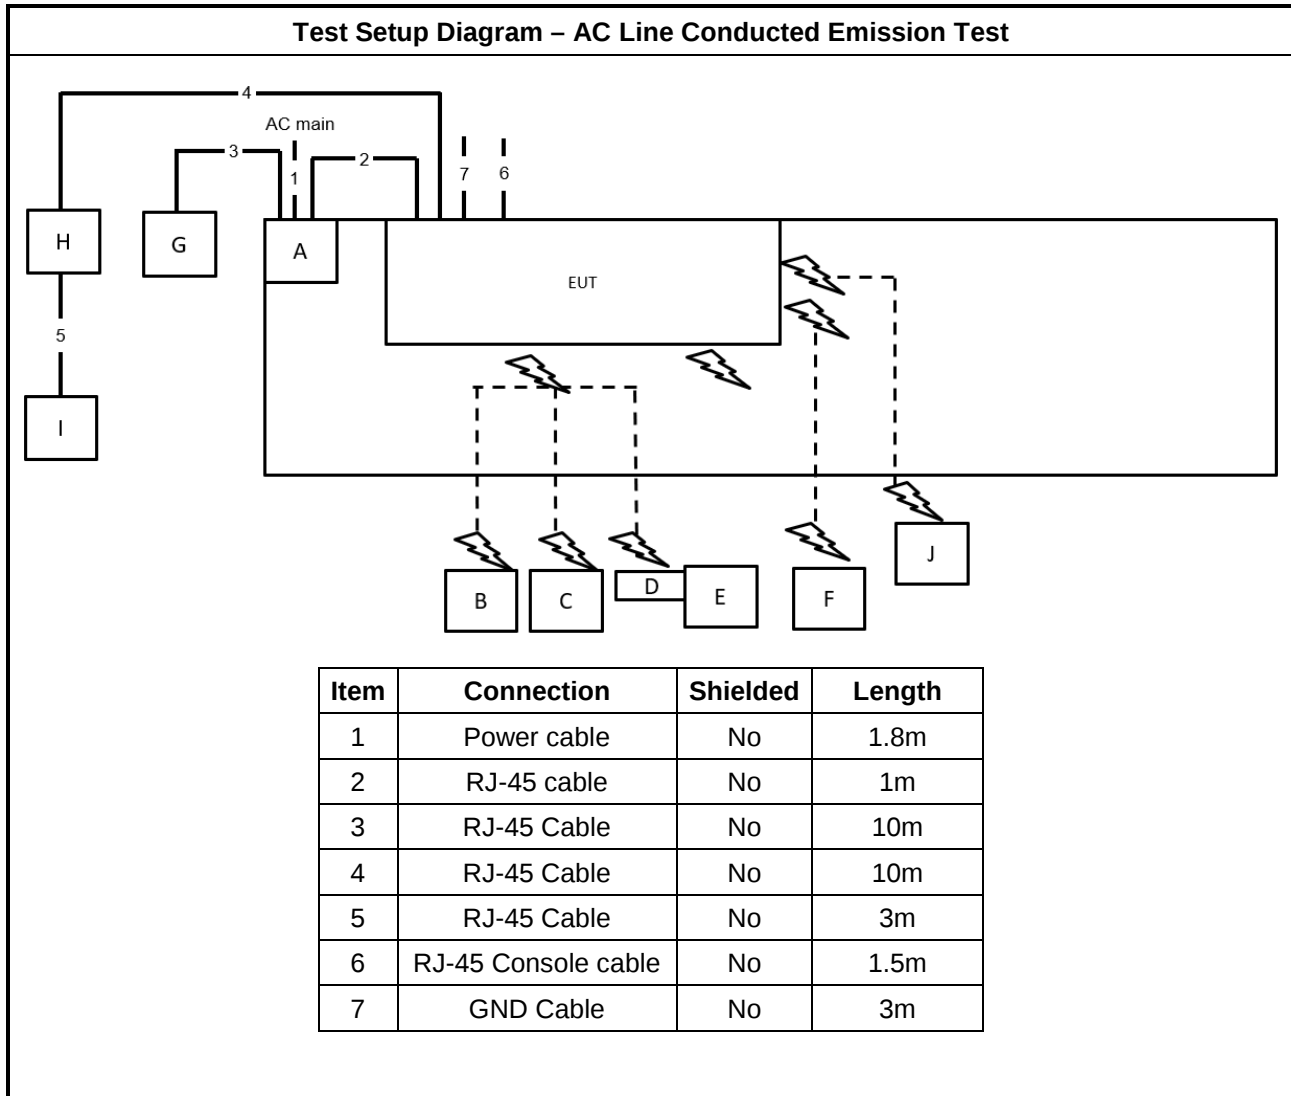

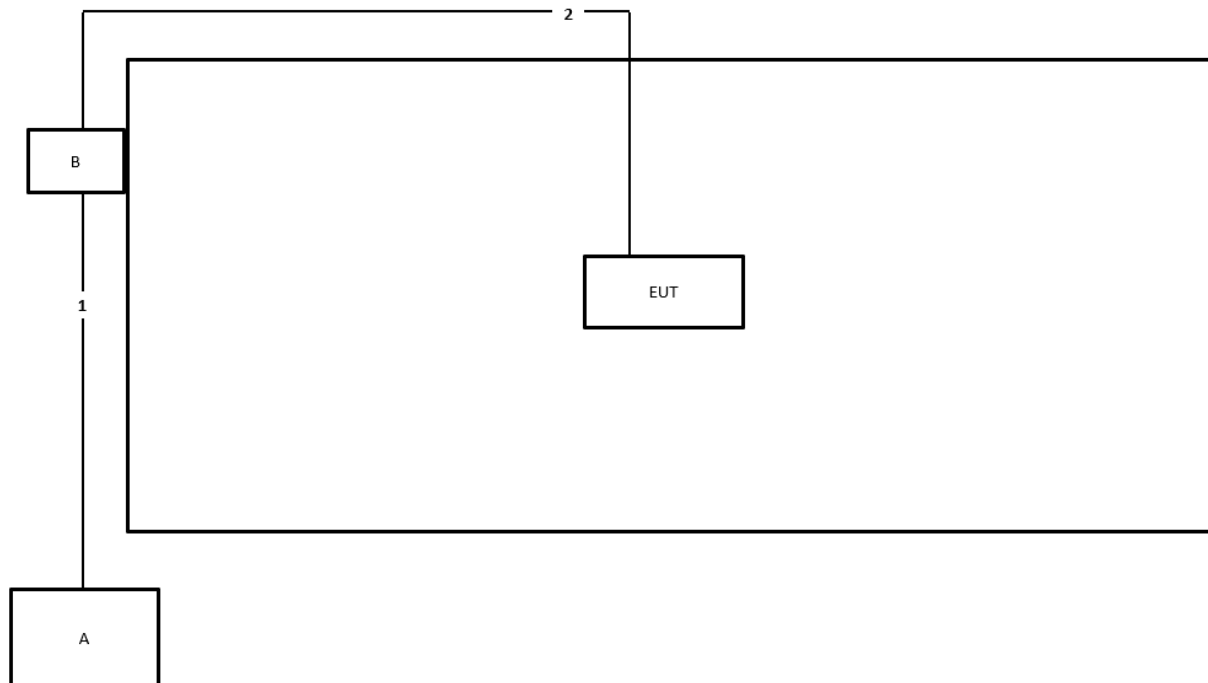Test Setup Diagram - Radiated Test (Others)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1m
2	RJ-45 cable	No	10m

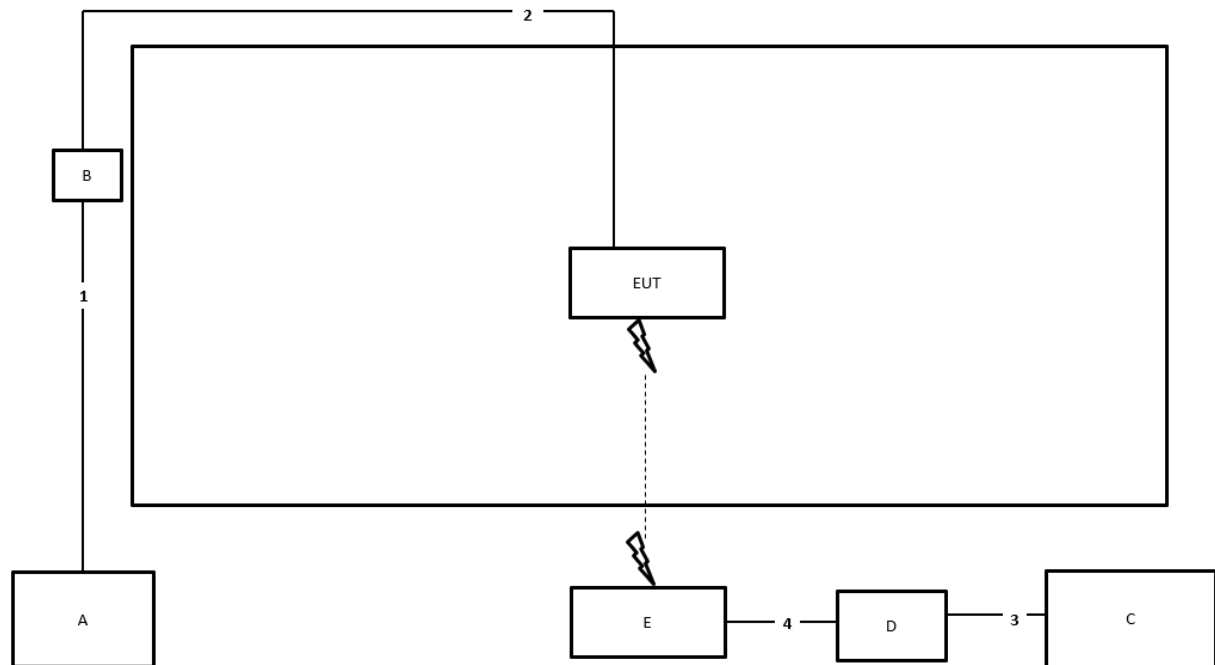Test Setup Diagram - Radiated Test (Co-location)


Item	Connection	Shielded	Length
1	RJ-45 cable	No	1m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1m
4	RJ-45 cable	No	10m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

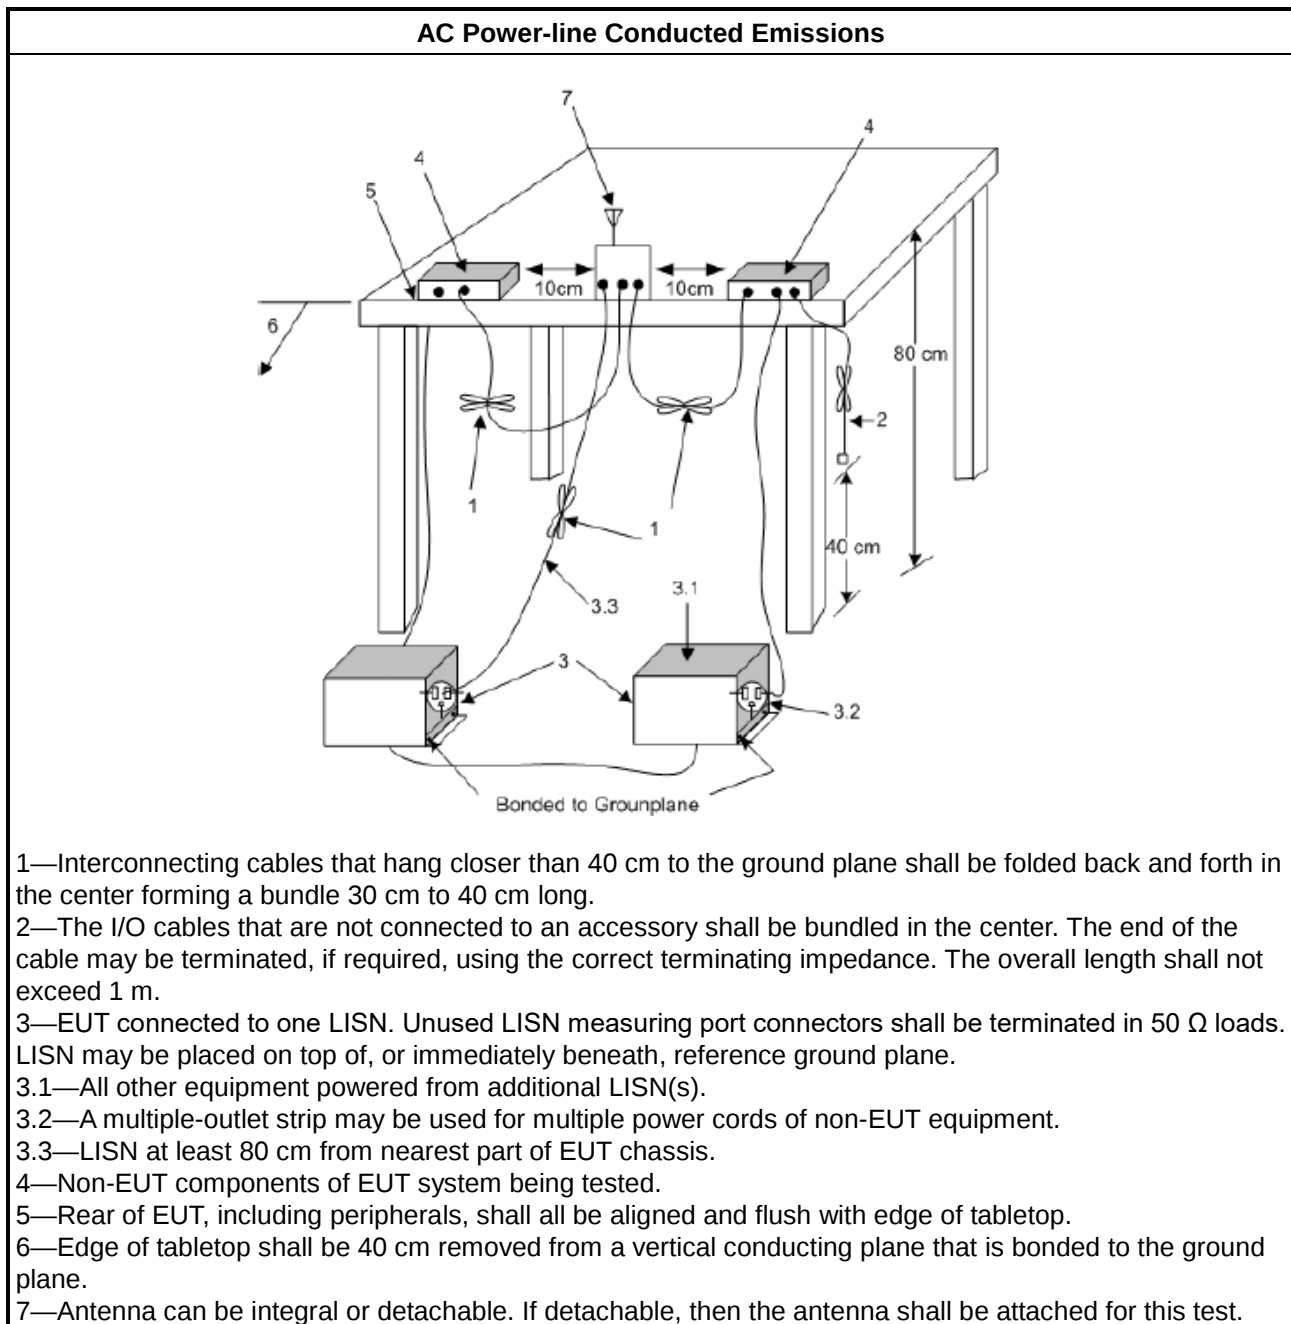

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☐	For the 5.15-5.25 GHz band, N/A
☐	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth $\geq 500\text{kHz}$.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth $\geq 500\text{kHz}$.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪ For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

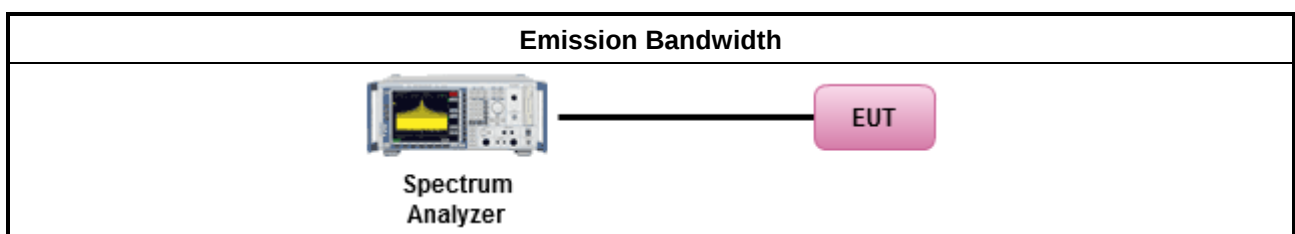

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☐ For the 5.15-5.25 GHz band:	
☐	Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
☐ For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	The maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band:	
☐	For other devices: The maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.25-5.35 GHz band:	
☐	For other devices: The maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	Vehicles devices: The maximum e.i.r.p. shall not exceed 30 mW or 1.76 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or 11 + 10 log 10 B, dBm, and the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.	
☐ For the 5.725-5.85 GHz band:	
☐	Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
	Average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☒	Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	- If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. - If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For Straddle Channels:

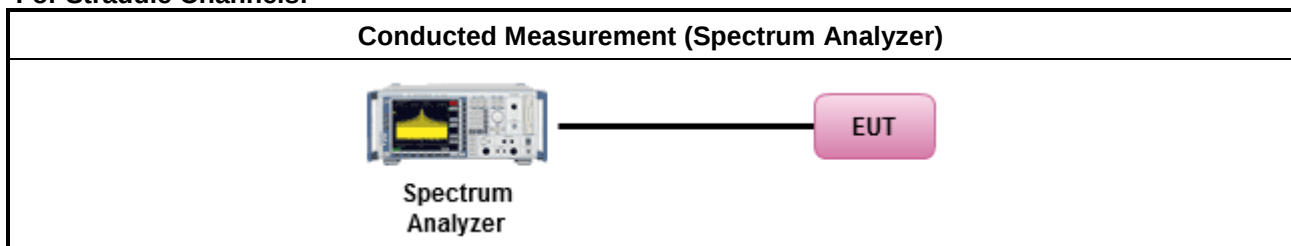

For Others:

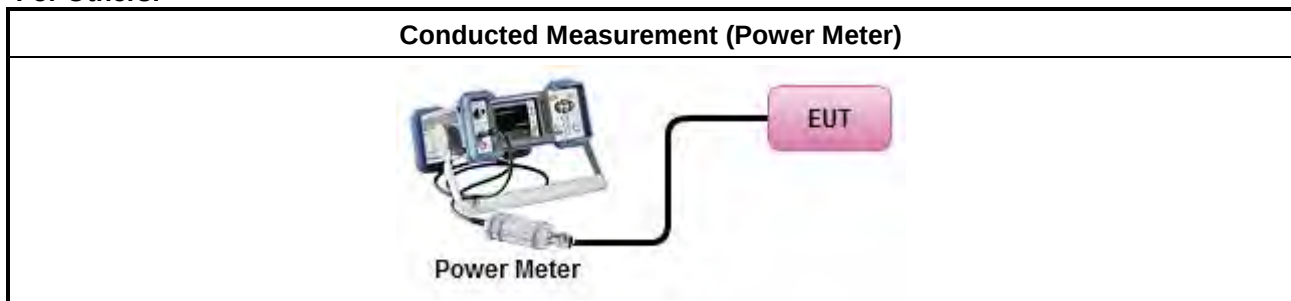

3.3.5 Test Result of Maximum Output Power

Refer as Appendix C



3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☐ For the 5.15-5.25 GHz band:	
☐	Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If $G_{TX} > 6$ dBi, then $P_{Out} = 17 - (G_{TX} - 6)$.
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If $G_{TX} > 6$ dBi, then $PPSD = 11 - (G_{TX} - 6)$.	
☒ For the 5.725-5.85 GHz band:	
☐	The peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
LE-LAN Devices	
☐ For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.	
☐ For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐	e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for $0^\circ \leq \theta < 8^\circ$; -13 - 0.716 (θ -8) dBW/MHz for $8^\circ \leq \theta < 40^\circ$ -35.9 - 1.22 (θ -40) dBW/MHz for $40^\circ \leq \theta \leq 45^\circ$; -42 dBW/MHz for $\theta > 45^\circ$
☐ For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.	
☐ For the 5.725-5.85 GHz band:	
☐	Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If $G_{TX} > 6$ dBi, then $PPSD = 30 - (G_{TX} - 6)$.
☐	Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.4.3 Test Procedures

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
[duty cycle ≥ 98% or external video / power trigger]	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
duty cycle < 98% and average over on/off periods with duty factor	
☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☒	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	

☐	For radiated measurement.
☐	- Refer as FCC KDB 789033 D02 clause II A.1.F "Antenna-port Conducted versus Radiated Testing" - Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz. - Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

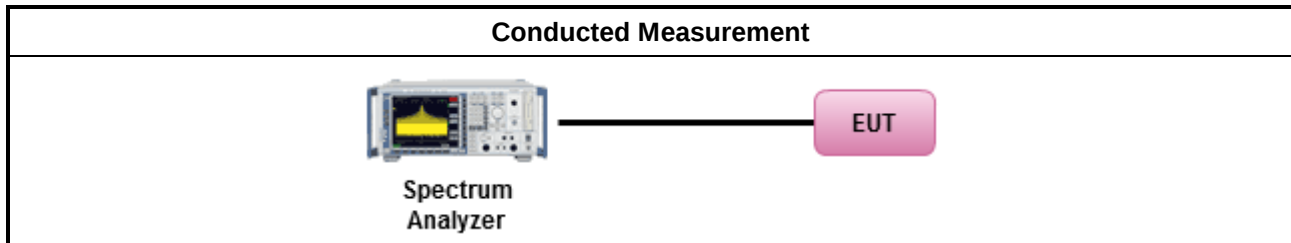

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.



Un-restricted band emissions above 1GHz Limit		
Operating Band		Limit
☐	5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☐	5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒	5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒	5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).		

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.5.3 Test Procedures



Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.
	☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).
	☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).
	☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.
☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	



Test Method	
▪ For conducted and cabinet radiation measurement, refer as FCC KDB 789033 D02, clause G)3).	
	▪ For conducted unwanted emissions into non-restricted bands (relative emission limits). Devices with multiple transmit chains: Refer as FCC KDB 662911, when testing out-of-band and spurious emissions against relative emission limits, tests may be performed on each output individually without summing or adding 10 log(N) if the measurements are made relative to the in-band emissions on the individual outputs.
	▪ For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below: (1) Measure and sum the spectra across the outputs or (2) Measure and add 10 log(N) dB
	▪ For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.

3.5.4 Test Setup

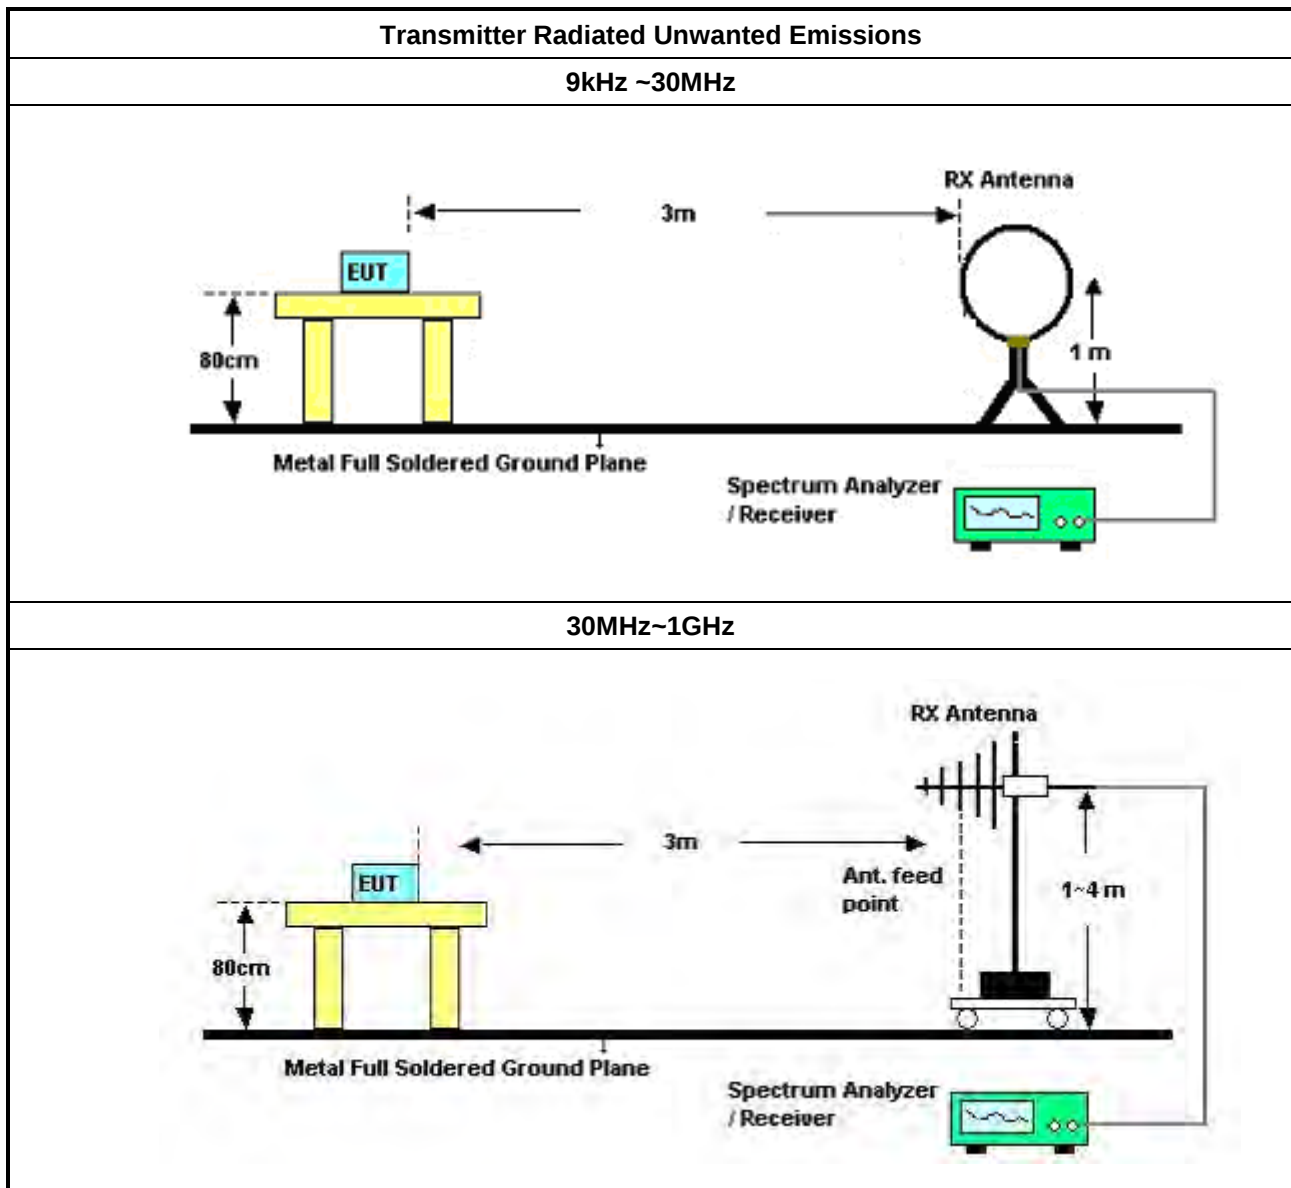

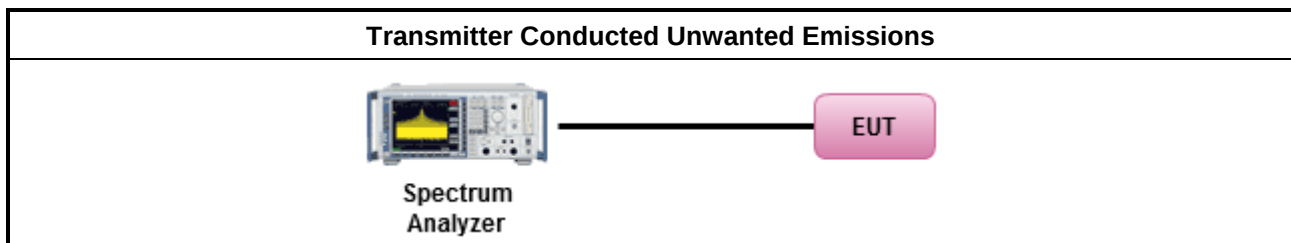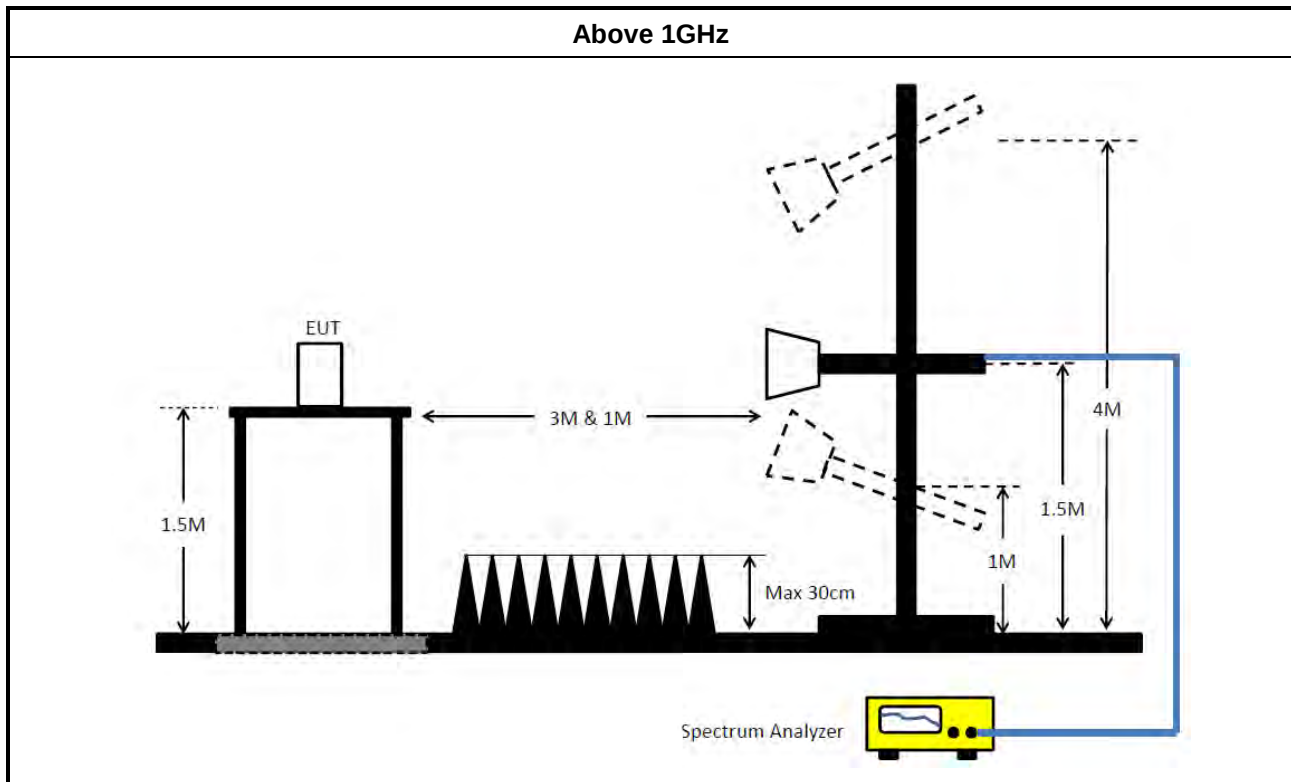

3.5.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Mar. 06, 2025	Mar. 05, 2026	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 18, 2025	Feb. 17, 2026	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Feb. 06, 2025	Feb. 05, 2026	Conduction (CO01-CB)
Pulse Limiter	Rohde& Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	Oct. 16, 2024	Oct. 15, 2025	Conduction (CO01-CB)
Test Software	SPORTON	SENSE-EMI	V5.11	150kHz-30MHz	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6121	65417	9kHz - 30MHz	Oct. 16, 2024	Oct. 15, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH05-CB	30 MHz ~ 1 GHz	Aug. 01, 2024	Jul. 31, 2025	Radiation (03CH05-CB)
Bilog Antenna with 6dB Attenuator	TESEQ & EMCi	CBL 6112D & N-6-06	35236 & AT-N0610	30MHz ~ 2GHz	Mar. 23, 2024	Mar. 22, 2025	Radiation (03CH05-CB)
Amplifier	EMCI	EMC330N	980331	20MHz ~ 3GHz	May 02, 2024	May 01, 2025	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 17, 2024	Apr. 16, 2025	Radiation (03CH05-CB)
Spectrum Analyzer	R&S	FSP40	100304	9kHz ~ 40GHz	Apr. 21, 2025	Apr. 20, 2026	Radiation (03CH05-CB)
EMI Test Receiver	R&S	ESR7	102172	9kHz ~ 7GHz	Oct. 21, 2024	Oct. 20, 2025	Radiation (03CH05-CB)
RF Cable-low	Woken	RG402	Low Cable-04+23	30MHz~1GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH05-CB	1GHz ~18GHz 3m	Sep. 28, 2024	Sep. 27, 2025	Radiation (03CH05-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120 D-1291	1GHz~18GHz	Jun. 20, 2024	Jun. 19, 2025	Radiation (03CH05-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH05-CB)
Pre-Amplifier	EMCI	EMC12630SE	980287	1GHz – 26.5GHz	Jun. 29, 2024	Jun. 28, 2025	Radiation (03CH05-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
RF Cable-high	Woken	RG402	High Cable-04+28	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-EMI	V5.11.8	30MHz-40GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH05-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH06-CB	1GHz ~18GHz 3m	Oct. 08, 2024	Oct. 07, 2025	Radiation (03CH06-CB)
Horn Antenna	SCHWARZBECK	BBHA9120D	BBHA 9120D-1292	1GHz~18GHz	Jul. 29, 2024	Jul. 28, 2025	Radiation (03CH06-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Sep. 23, 2024	Sep. 22, 2025	Radiation (03CH06-CB)
Pre-Amplifier	EMCI	EMC12630SE	980383	1GHz ~ 18GHz	Jul. 31, 2024	Jul. 30, 2025	Radiation (03CH06-CB)
Pre-Amplifier	SGH	SGH184	20221107-3	18GHz ~ 40GHz	Nov. 25, 2024	Nov. 24, 2025	Radiation (03CH06-CB)
Signal analyzer	R&S	FSV3044	101667	9kHz~44GHz	Aug. 20, 2024	Aug. 19, 2025	Radiation (03CH06-CB)
RF Cable-high	Woken	RG402	High Cable-05+68	1GHz~18GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH06-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Radiation (03CH06-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Radiation (03CH06-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	Jun. 11, 2024	Jun. 10, 2025	Conducted (TH03-CB)
Power Sensor	Anritsu	MA2411B	1726195	300MHz~40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 06, 2024	Sep. 05, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-11	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable	Woken	RG402	High Cable-12	30MHz ~18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)

**RADIO TEST REPORT****Report No. : FR4N2715-01AF**

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable	Woken	RG402	High Cable-13	30MHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-14	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
RF Cable-high	Woken	RG402	High Cable-15	1 GHz –18 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
High Cable	Woken	WCA0929M	40G#5+6	1GHz ~ 40 GHz	Oct. 01, 2024	Sep. 30, 2025	Conducted (TH03-CB)
Switch	SPTCB	SP-SWI	SWI-03	1~18GHz	Oct. 02, 2024	Oct. 01, 2025	Conducted (TH03-CB)
Test Software	SPORTON	SENSE-15407_NII	V5.11. 23	5.15GHz-7.115GHz	N.C.R.	N.C.R.	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.




Conducted Emissions at Powerline
(Variant Device / FCC ID: UDX-600216020)

Appendix A

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	168k	60.94	65.06	-4.12	Line

Mode 1

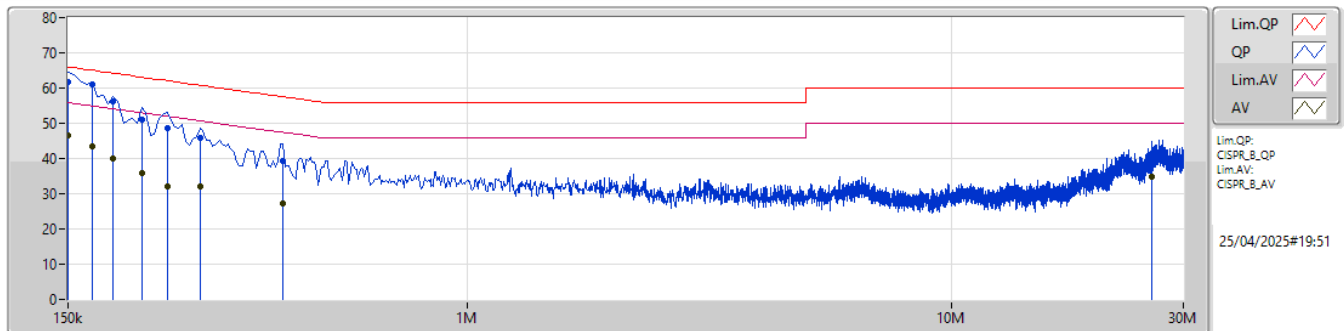

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	61.79	66.00	-4.21	10.03	Line	-	51.76	0.04	0.08	9.91						
AV	150k	46.59	56.00	-9.41	10.03	Line	-	36.56	0.04	0.08	9.91						
QP	168k	60.94	65.06	-4.12	10.05	Line	"Worst"	50.89	0.04	0.08	9.93						
AV	168k	43.32	55.06	-11.74	10.05	Line	-	33.27	0.04	0.08	9.93						
QP	186k	56.15	64.20	-8.05	10.05	Line	-	46.10	0.04	0.07	9.94						
AV	186k	40.15	54.20	-14.05	10.05	Line	-	30.10	0.04	0.07	9.94						
QP	213k	51.10	63.09	-11.99	10.07	Line	-	41.03	0.04	0.07	9.96						
AV	213k	35.81	53.09	-17.28	10.07	Line	-	25.74	0.04	0.07	9.96						
QP	240k	48.50	62.10	-13.60	10.10	Line	-	38.40	0.04	0.08	9.98						
AV	240k	32.22	52.10	-19.88	10.10	Line	-	22.12	0.04	0.08	9.98						
QP	280.5k	45.87	60.80	-14.93	10.12	Line	-	35.75	0.04	0.08	10.00						
AV	280.5k	31.95	50.80	-18.85	10.12	Line	-	21.83	0.04	0.08	10.00						
QP	415.5k	39.16	57.53	-18.37	10.20	Line	-	28.96	0.04	0.10	10.06						
AV	415.5k	27.26	47.53	-20.27	10.20	Line	-	17.06	0.04	0.10	10.06						
QP	25.89M	40.76	60.00	-19.24	10.65	Line	-	30.11	0.38	0.31	9.96						
AV	25.89M	34.69	50.00	-15.31	10.65	Line	-	24.04	0.38	0.31	9.96						

Mode 1

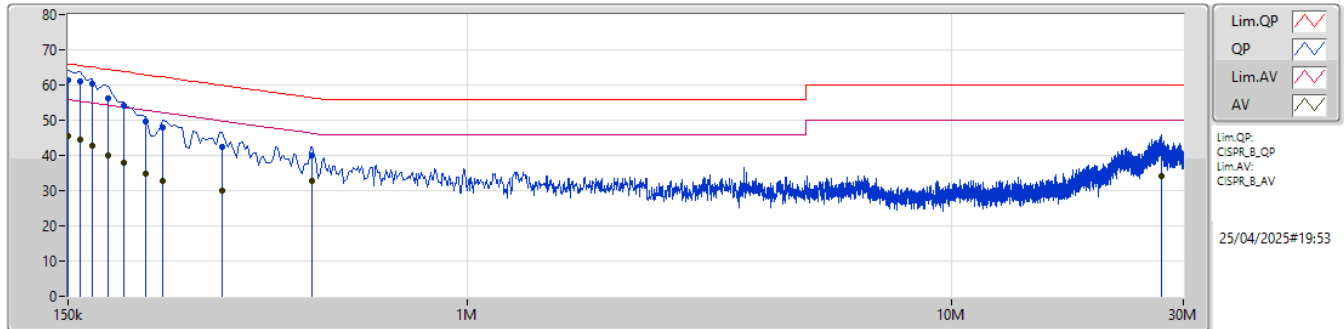

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)						
QP	150k	61.31	66.00	-4.69	10.03	Neutral	-	51.28	0.04	0.08	9.91						
AV	150k	45.61	56.00	-10.39	10.03	Neutral	-	35.58	0.04	0.08	9.91						
QP	159k	61.16	65.52	-4.36	10.04	Neutral	"Worst"	51.12	0.04	0.08	9.92						
AV	159k	44.63	55.52	-10.89	10.04	Neutral	-	34.59	0.04	0.08	9.92						
QP	168k	60.20	65.06	-4.86	10.05	Neutral	-	50.15	0.04	0.08	9.93						
AV	168k	42.88	55.06	-12.18	10.05	Neutral	-	32.83	0.04	0.08	9.93						
QP	181.5k	56.19	64.41	-8.22	10.05	Neutral	-	46.14	0.04	0.07	9.94						
AV	181.5k	39.84	54.41	-14.57	10.05	Neutral	-	29.79	0.04	0.07	9.94						
QP	195k	54.06	63.82	-9.76	10.06	Neutral	-	44.00	0.04	0.07	9.95						
AV	195k	37.90	53.82	-15.92	10.06	Neutral	-	27.84	0.04	0.07	9.95						
QP	217.5k	49.64	62.92	-13.28	10.07	Neutral	-	39.57	0.04	0.07	9.96						
AV	217.5k	34.97	52.92	-17.95	10.07	Neutral	-	24.90	0.04	0.07	9.96						
QP	235.5k	48.10	62.25	-14.15	10.10	Neutral	-	38.00	0.04	0.08	9.98						
AV	235.5k	32.75	52.25	-19.50	10.10	Neutral	-	22.65	0.04	0.08	9.98						
QP	312k	42.56	59.92	-17.36	10.15	Neutral	-	32.41	0.04	0.09	10.02						
AV	312k	29.90	49.92	-20.02	10.15	Neutral	-	19.75	0.04	0.09	10.02						
QP	478.5k	39.91	56.36	-16.45	10.22	Neutral	-	29.69	0.04	0.10	10.08						
AV	478.5k	32.88	46.36	-13.48	10.22	Neutral	-	22.66	0.04	0.10	10.08						
QP	26.966M	40.87	60.00	-19.13	10.72	Neutral	-	30.15	0.44	0.32	9.96						
AV	26.966M	34.09	50.00	-15.91	10.72	Neutral	-	23.37	0.44	0.32	9.96						



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	36.08M	17.238M	17M2D1D	18.645M	14.626M
802.11ax HEW20_Nss1,(MCS0)_1TX	41.195M	19.343M	19M3D1D	19.91M	14.654M
802.11ax HEW40_Nss1,(MCS0)_1TX	53.165M	37.769M	37M8D1D	39.05M	34.448M
802.11ax HEW80_Nss1,(MCS0)_1TX	81.62M	77.176M	77M2D1D	75.225M	73.527M
802.11ax HEW160_Nss1,(MCS0)_1TX	161.92M	154.477M	154MD1D	161.92M	154.477M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	3.16M	11.439M	11M4D1D	3.16M	11.439M
802.11ax HEW20_Nss1,(MCS0)_1TX	4.4M	9.435M	9M44D1D	4.4M	9.435M
802.11ax HEW40_Nss1,(MCS0)_1TX	3.98M	24.278M	24M3D1D	3.98M	24.278M
802.11ax HEW80_Nss1,(MCS0)_1TX	3.92M	30.13M	30M1D1D	3.92M	30.13M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5500MHz	Pass	Inf	18.755M	16.329M
5580MHz	Pass	Inf	36.08M	17.238M
5700MHz	Pass	Inf	18.645M	16.303M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	21.78M	14.626M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.16M	11.439M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5500MHz	Pass	Inf	20.295M	18.952M
5580MHz	Pass	Inf	41.195M	19.343M
5700MHz	Pass	Inf	19.91M	18.878M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	24.945M	14.654M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.4M	9.435M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5510MHz	Pass	Inf	39.05M	37.747M
5550MHz	Pass	Inf	43.78M	37.769M
5670MHz	Pass	Inf	39.27M	37.613M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	53.165M	34.448M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.98M	24.278M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5530MHz	Pass	Inf	80.08M	76.998M
5610MHz	Pass	Inf	81.62M	77.176M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.225M	73.527M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.92M	30.13M
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-
5570MHz	Pass	Inf	161.92M	154.477M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5500MHz

21/12/2024

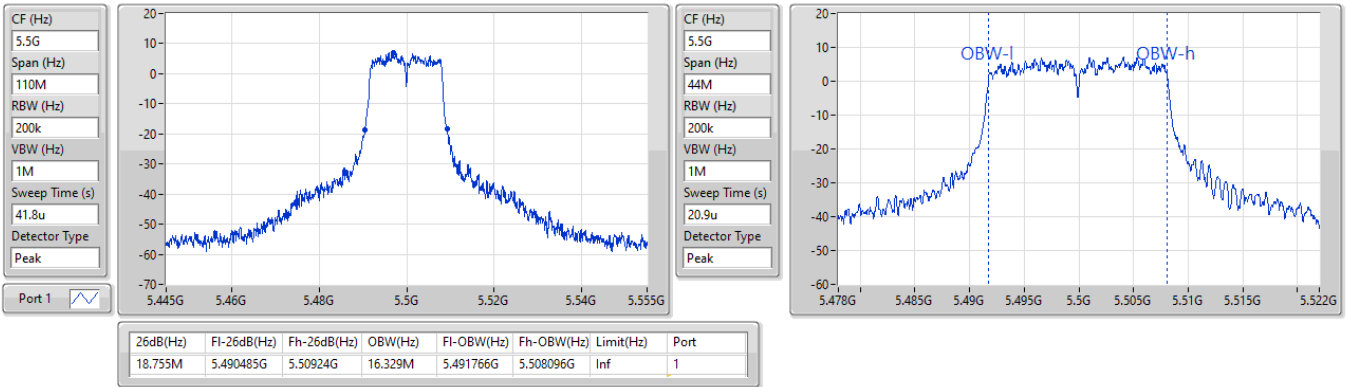


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5580MHz

21/12/2024


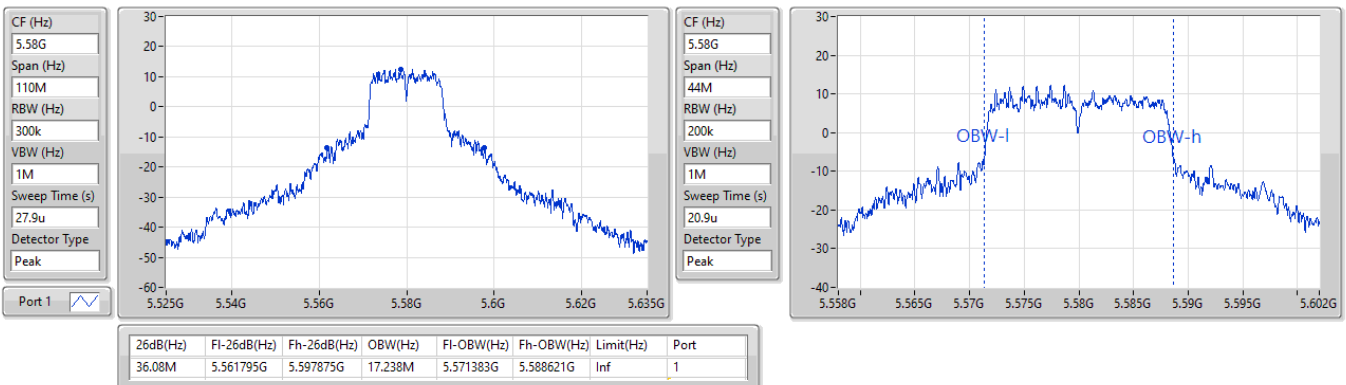


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5700MHz

21/12/2024

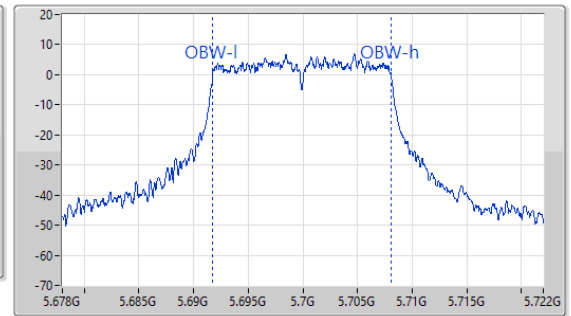
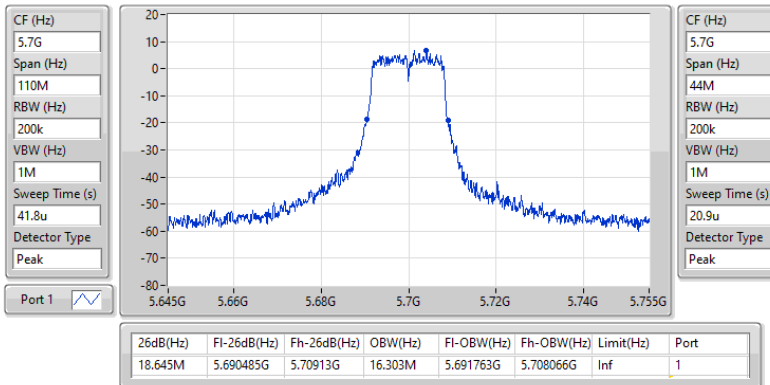


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.47-5.725GHz

21/12/2024

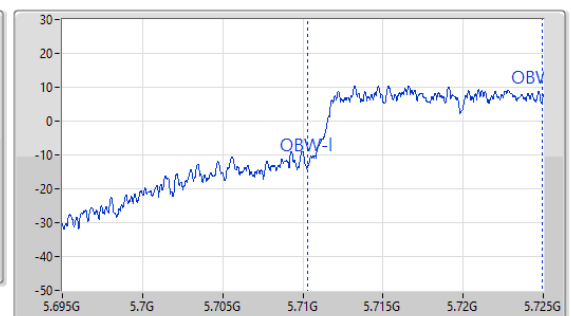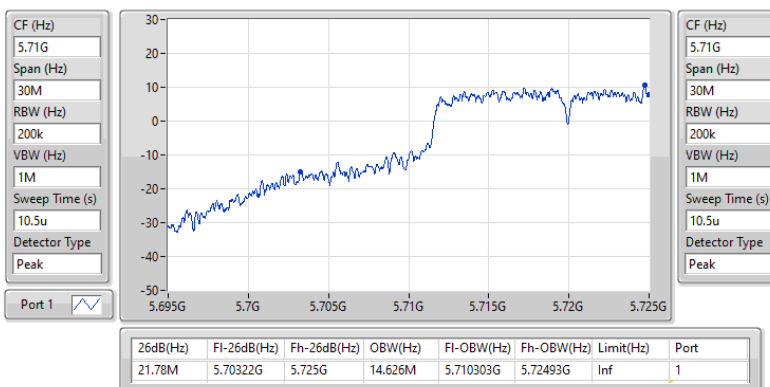


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

21/12/2024

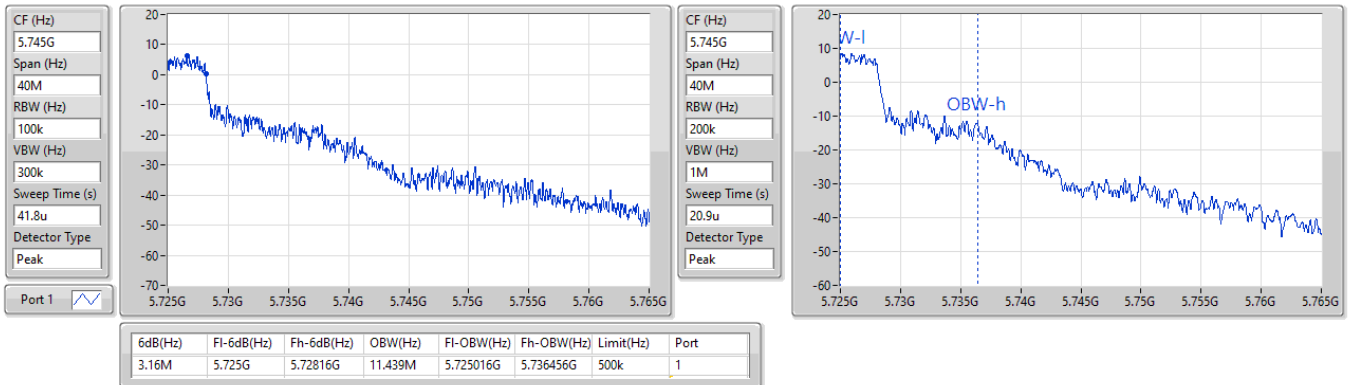


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

21/12/2024


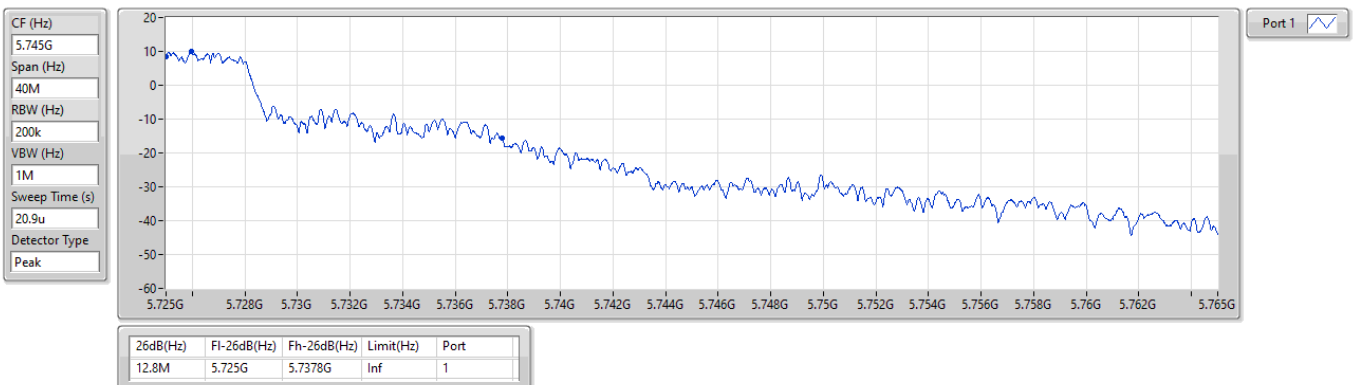


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5500MHz

21/12/2024

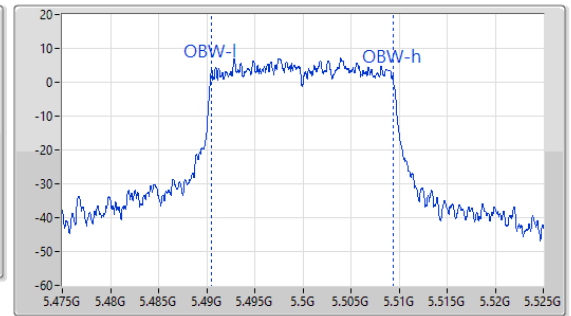
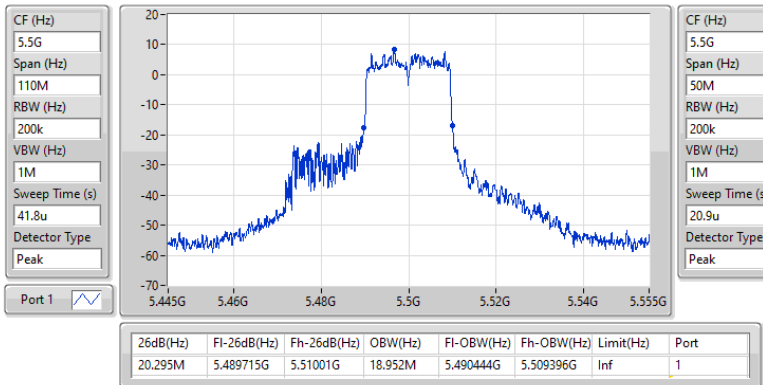


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5580MHz

21/12/2024

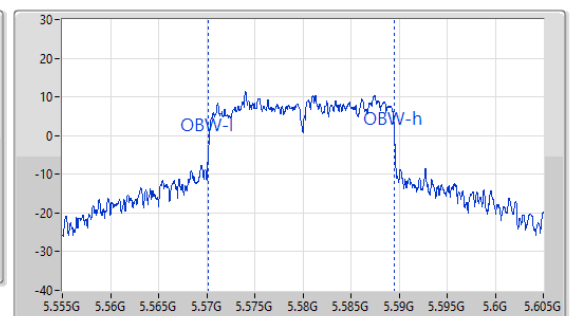
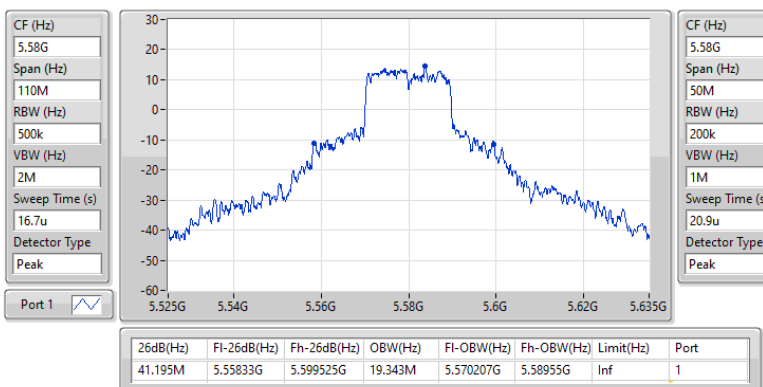


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5700MHz

21/12/2024

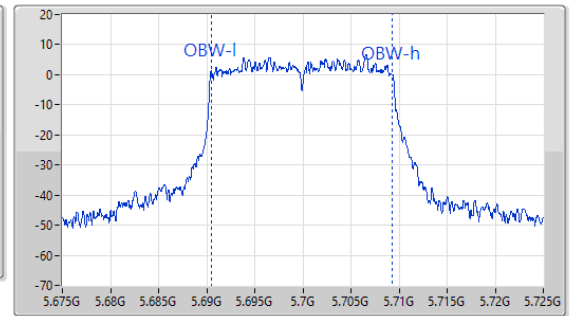
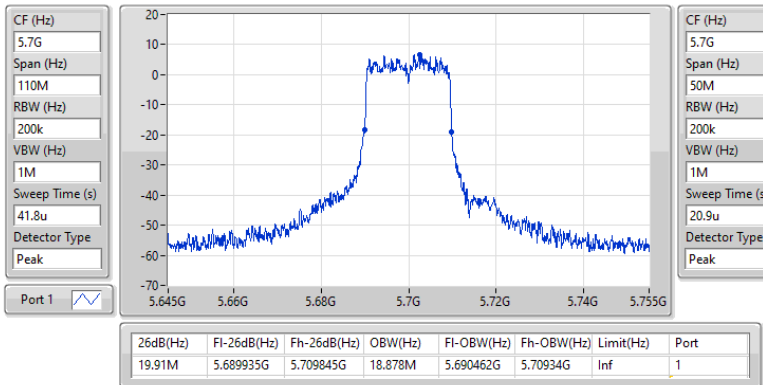


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.47-5.725GHz

21/12/2024

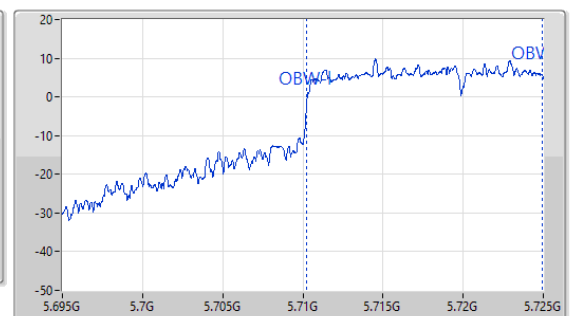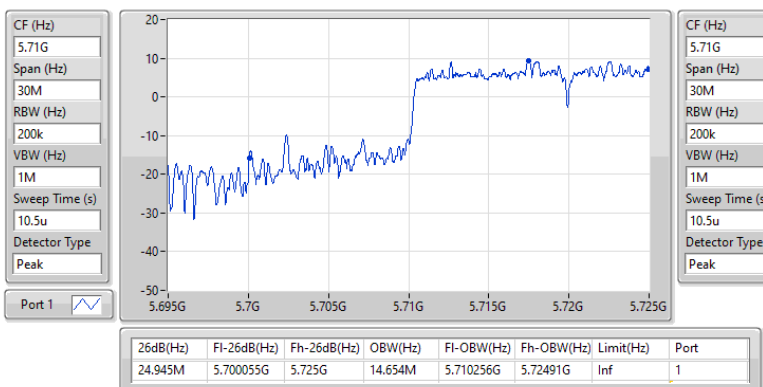


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

21/12/2024

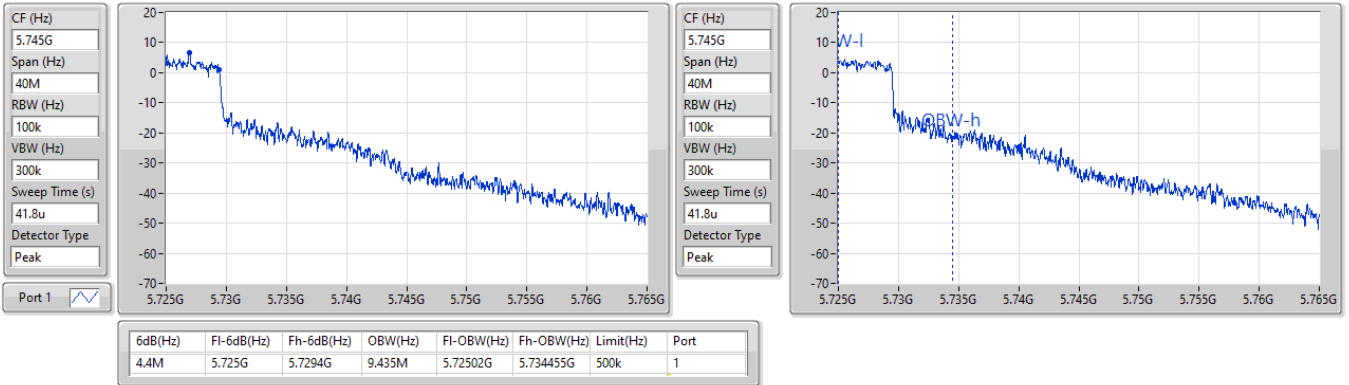


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

21/12/2024


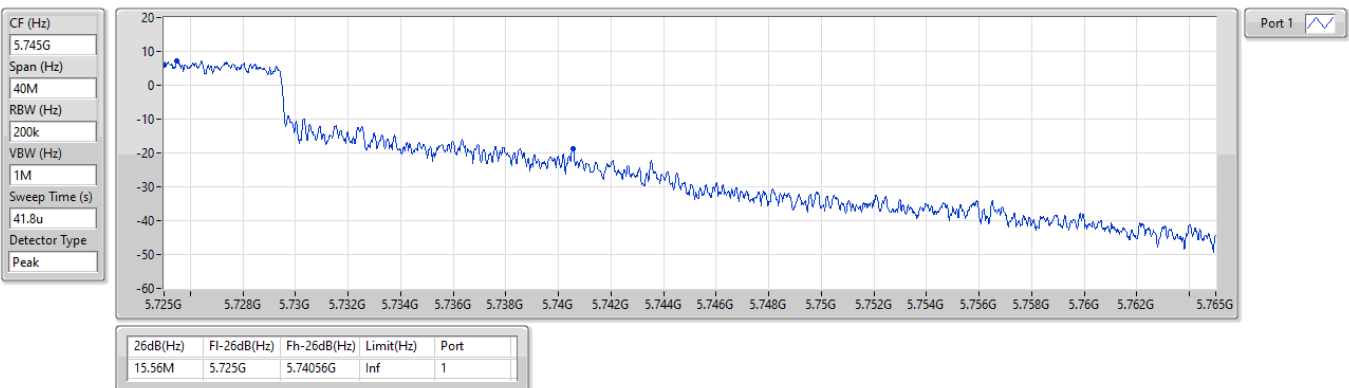


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5510MHz

21/12/2024

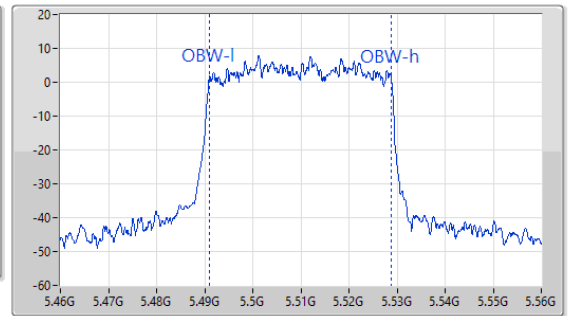
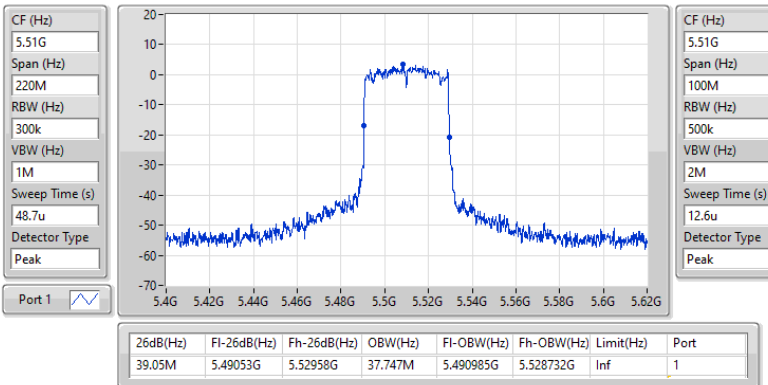


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5550MHz

21/12/2024

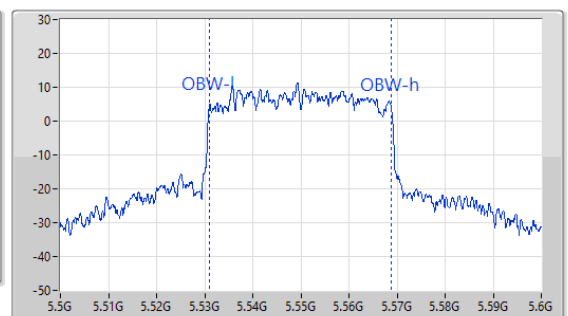
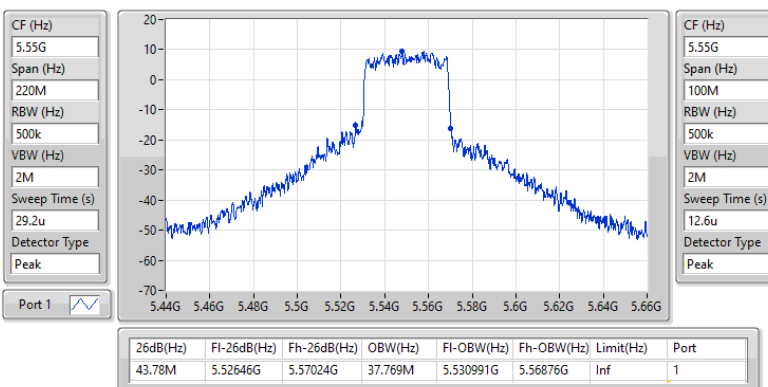


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5670MHz

21/12/2024

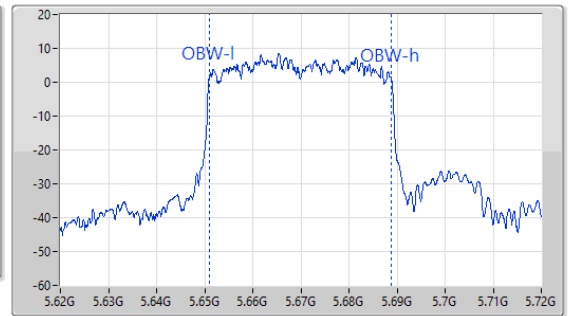
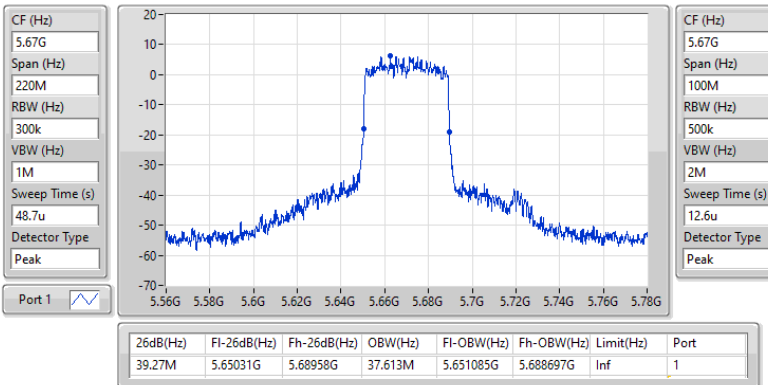


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.47-5.725GHz

21/12/2024

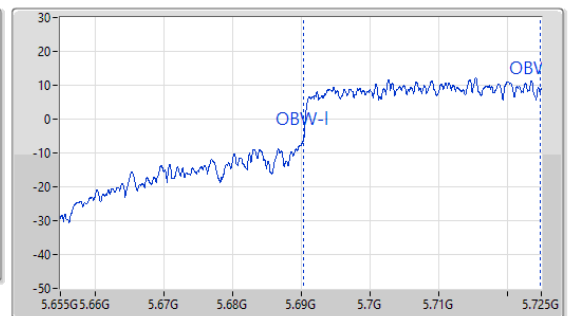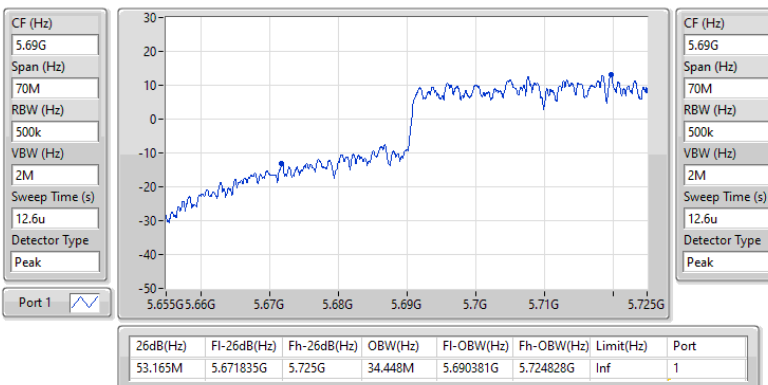


5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.725-5.85GHz

21/12/2024

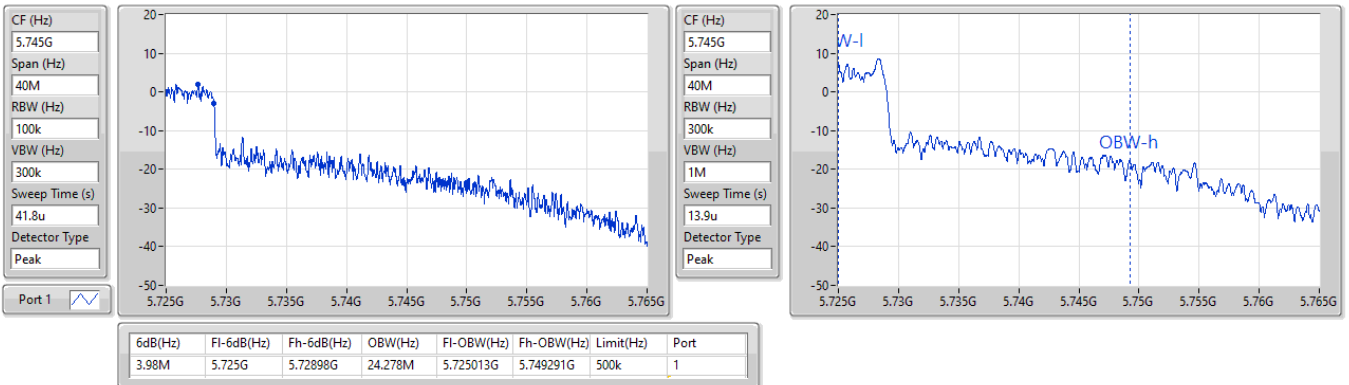


5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.725-5.85GHz

21/12/2024


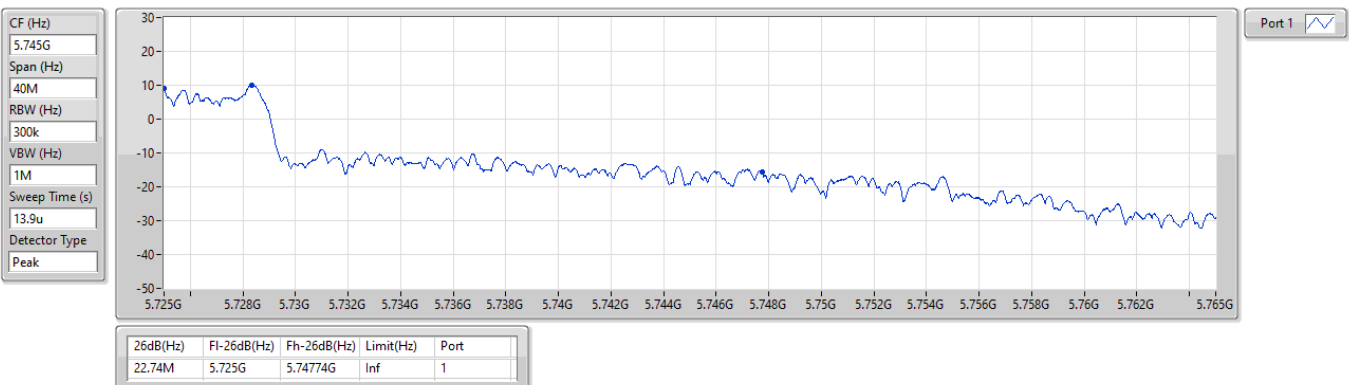


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

5530MHz

21/12/2024

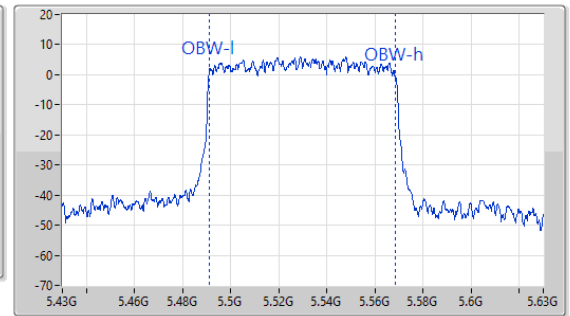
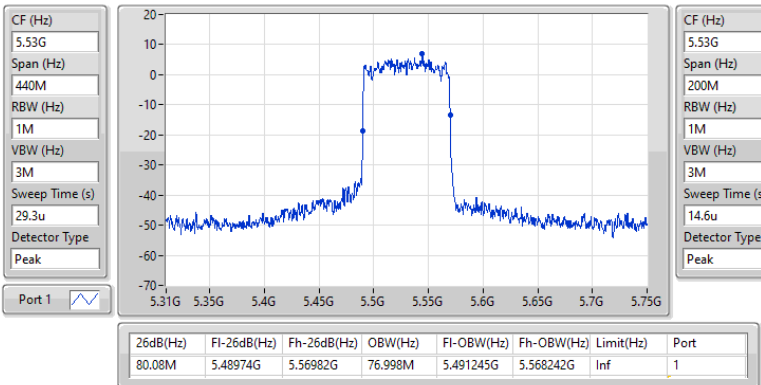


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

5610MHz

21/12/2024

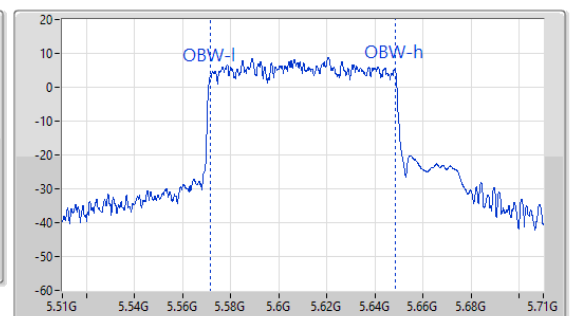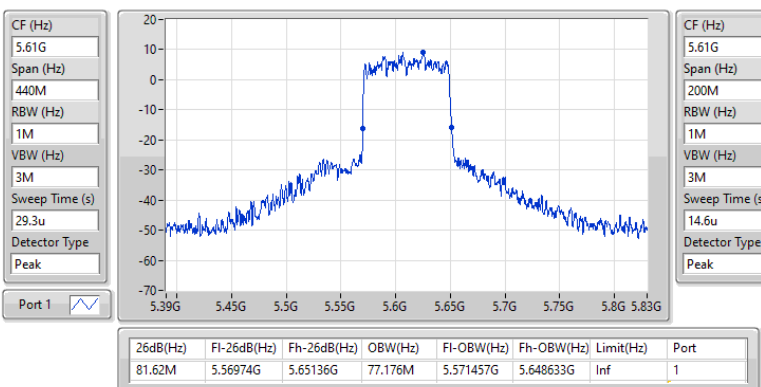


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.47-5.725GHz

21/12/2024

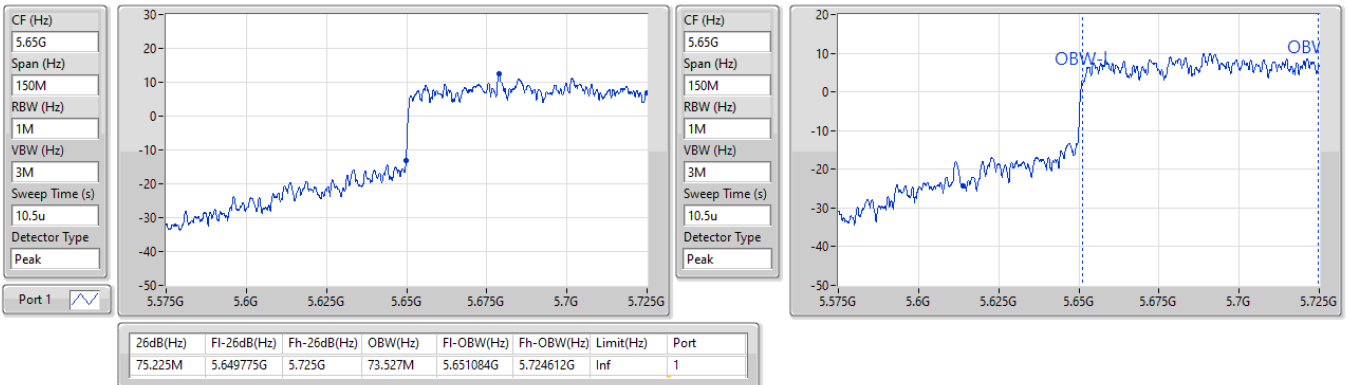


5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.725-5.85GHz

21/12/2024

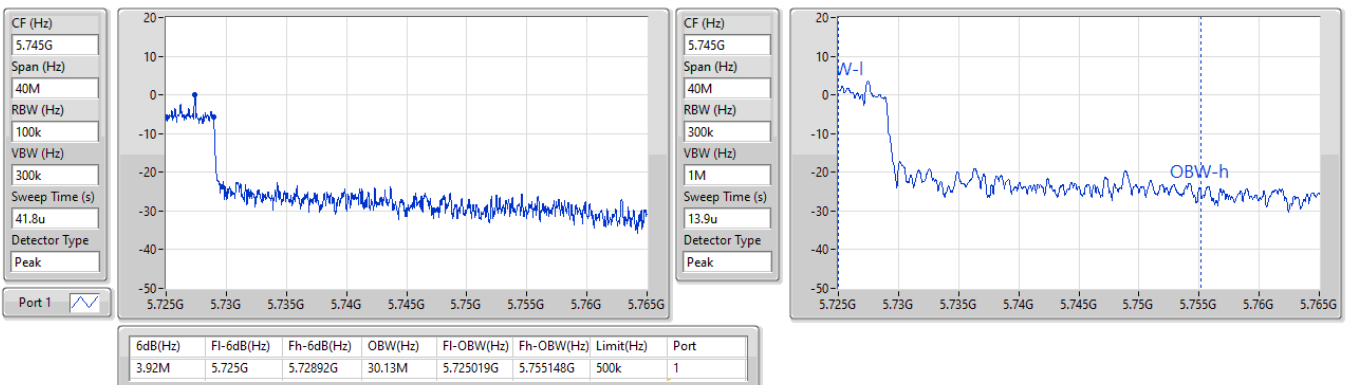


5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.725-5.85GHz

21/12/2024

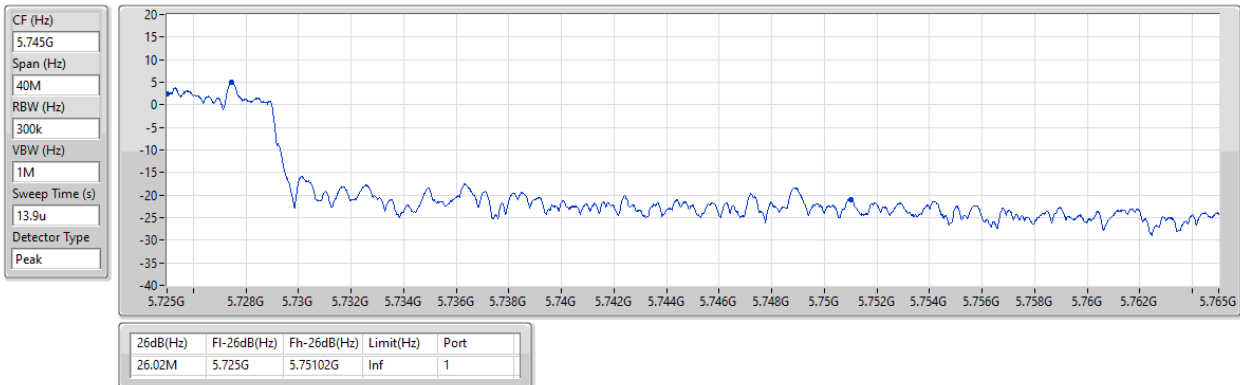


5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

EBW

5570MHz

21/12/2024

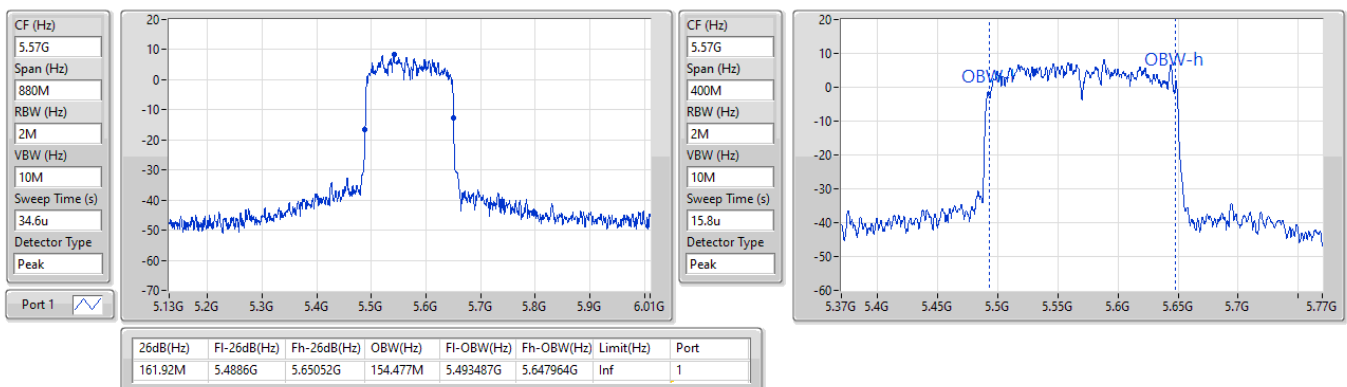

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	22.715M	17.34M	17M3D1D	18.81M	14.511M
802.11a_Nss1,(6Mbps)_2TX	22.55M	16.967M	17M0D1D	16.005M	13.381M
802.11a_Nss1,(6Mbps)_4TX	22.715M	17.011M	17M0D1D	15.735M	13.335M
802.11be EHT20_Nss1,(MCS0)_1TX	33.88M	19.112M	19M1D1D	21.945M	14.884M
802.11be EHT20_Nss1,(MCS0)_2TX	22.385M	19.146M	19M1D1D	15.84M	14.565M
802.11be EHT20_Nss1,(MCS0)_4TX	22.33M	19.061M	19M1D1D	15.6M	14.462M
802.11be EHT40_Nss1,(MCS0)_1TX	41.25M	37.933M	37M9D1D	36.4M	33.84M
802.11be EHT40_Nss1,(MCS0)_2TX	45.54M	38.068M	38M1D1D	35.84M	33.878M
802.11be EHT40_Nss1,(MCS0)_4TX	42.68M	38.179M	38M2D1D	34.72M	33.823M
802.11be EHT80_Nss1,(MCS0)_1TX	113.7M	77.618M	77M6D1D	82.5M	74.187M
802.11be EHT80_Nss1,(MCS0)_2TX	87.56M	77.714M	77M7D1D	76.575M	73.488M
802.11be EHT80_Nss1,(MCS0)_4TX	86.68M	77.872M	77M9D1D	75.075M	73.206M
802.11be EHT160_Nss1,(MCS0)_1TX	330.44M	159.592M	160MD1D	330.44M	159.592M
802.11be EHT160_Nss1,(MCS0)_2TX	168.52M	157.244M	157MD1D	164.56M	156.007M
802.11be EHT160_Nss1,(MCS0)_4TX	164.12M	157.191M	157MD1D	161.92M	156.685M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	3.24M	4.248M	4M25D1D	3.24M	4.248M
802.11a_Nss1,(6Mbps)_2TX	3.22M	4.274M	4M27D1D	3.2M	4.158M
802.11a_Nss1,(6Mbps)_4TX	3.22M	4.241M	4M24D1D	3.16M	4.149M
802.11be EHT20_Nss1,(MCS0)_1TX	4.54M	4.539M	4M54D1D	4.54M	4.539M
802.11be EHT20_Nss1,(MCS0)_2TX	4.54M	4.537M	4M54D1D	4.5M	4.52M
802.11be EHT20_Nss1,(MCS0)_4TX	4.56M	4.57M	4M57D1D	4.48M	4.54M
802.11be EHT40_Nss1,(MCS0)_1TX	4.06M	4.277M	4M28D1D	4.06M	4.277M
802.11be EHT40_Nss1,(MCS0)_2TX	4.02M	4.138M	4M14D1D	3.98M	4.111M
802.11be EHT40_Nss1,(MCS0)_4TX	4.08M	4.536M	4M54D1D	4.02M	4.208M
802.11be EHT80_Nss1,(MCS0)_1TX	4.04M	5.903M	5M90D1D	4.04M	5.903M
802.11be EHT80_Nss1,(MCS0)_2TX	4.12M	6.346M	6M35D1D	4.06M	5.42M
802.11be EHT80_Nss1,(MCS0)_4TX	4.06M	6.313M	6M31D1D	4M	5.358M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.945M	16.68M						
5580MHz	Pass	Inf	22.715M	17.34M						
5700MHz	Pass	Inf	21.725M	16.697M						
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	18.81M	14.511M						
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.24M	4.248M						
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.945M	19.008M						
5580MHz	Pass	Inf	33.88M	19.112M						
5700MHz	Pass	Inf	22.22M	19.016M						
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	24.87M	14.884M						
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.539M						
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	Inf	41.25M	37.866M						
5550MHz	Pass	Inf	40.59M	37.863M						
5670MHz	Pass	Inf	40.37M	37.933M						
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.4M	33.84M						
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	4.277M						
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	Inf	82.72M	77.587M						
5610MHz	Pass	Inf	82.5M	77.618M						
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	113.7M	74.187M						
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.04M	5.903M						
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-	-	-
5570MHz	Pass	Inf	330.44M	159.592M						
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.395M	16.647M	21.56M	16.618M				
5580MHz	Pass	Inf	21.395M	16.67M	21.56M	16.655M				
5700MHz	Pass	Inf	22.165M	16.967M	22.55M	16.786M				
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.005M	13.387M	16.65M	13.381M				
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.2M	4.158M	3.22M	4.274M				
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.285M	19.146M	21.175M	19.035M				
5580MHz	Pass	Inf	22.275M	19.027M	21.45M	19.049M				
5700MHz	Pass	Inf	21.34M	19.02M	22.385M	19.102M				
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.29M	14.565M	15.84M	14.593M				
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.54M	4.537M	4.5M	4.52M				
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	Inf	41.36M	37.811M	41.03M	37.855M				
5550MHz	Pass	Inf	41.03M	37.923M	40.26M	37.873M				
5670MHz	Pass	Inf	45.54M	38.068M	40.59M	37.946M				
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.295M	33.878M	35.84M	33.936M				
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.98M	4.111M	4.02M	4.138M				
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	Inf	84.48M	77.504M	87.56M	77.304M				
5610MHz	Pass	Inf	84.04M	77.714M	81.62M	76.856M				
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	76.575M	73.488M	76.725M	73.595M				
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.12M	6.346M	4.06M	5.42M				
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
5570MHz	Pass	Inf	168.52M	157.244M	164.56M	156.007M				
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.89M	16.749M	21.23M	16.63M	21.725M	16.814M	21.67M	16.847M
5580MHz	Pass	Inf	21.945M	16.741M	21.23M	17.011M	21.34M	16.651M	21.56M	16.838M
5700MHz	Pass	Inf	22.165M	16.713M	22.66M	16.743M	22.715M	16.685M	21.945M	16.805M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.735M	13.518M	16.335M	13.425M	15.75M	13.44M	15.765M	13.335M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)	Port 3-N dB (Hz)	Port 3-OBW (Hz)	Port 4-N dB (Hz)	Port 4-OBW (Hz)
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.22M	4.149M	3.22M	4.16M	3.22M	4.241M	3.16M	4.189M
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5500MHz	Pass	Inf	21.835M	19.055M	21.285M	18.988M	21.67M	18.954M	21.835M	19.002M
5580MHz	Pass	Inf	20.9M	19.002M	21.285M	19.018M	22.22M	19.03M	21.67M	19.061M
5700MHz	Pass	Inf	21.615M	18.958M	22.055M	18.94M	21.78M	19.015M	22.33M	19.002M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	16.2M	14.5M	15.69M	14.504M	15.6M	14.462M	15.675M	14.489M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	4.48M	4.57M	4.5M	4.561M	4.52M	4.558M	4.56M	4.54M
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5510MHz	Pass	Inf	41.69M	37.893M	41.03M	38.179M	40.04M	37.975M	40.81M	37.858M
5550MHz	Pass	Inf	42.68M	37.948M	40.48M	37.99M	40.81M	37.925M	40.81M	37.989M
5670MHz	Pass	Inf	41.03M	37.777M	42.68M	37.989M	41.14M	37.957M	42.02M	38.08M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	36.505M	33.898M	36.085M	33.875M	34.72M	34.032M	35.77M	33.823M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	4.04M	4.208M	4.02M	4.536M	4.04M	4.333M	4.08M	4.318M
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5530MHz	Pass	Inf	82.06M	77.494M	83.82M	77.382M	83.6M	77.428M	84.48M	77.511M
5610MHz	Pass	Inf	82.06M	77.704M	86.68M	77.577M	86.02M	77.729M	80.3M	77.872M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.375M	73.317M	75.075M	73.302M	77.85M	73.416M	75.3M	73.206M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	4.06M	5.86M	4M	5.358M	4.06M	6.313M	4.04M	5.983M
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5570MHz	Pass	Inf	162.36M	157.171M	161.92M	156.685M	164.12M	156.852M	163.24M	157.191M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5500MHz

18/12/2024

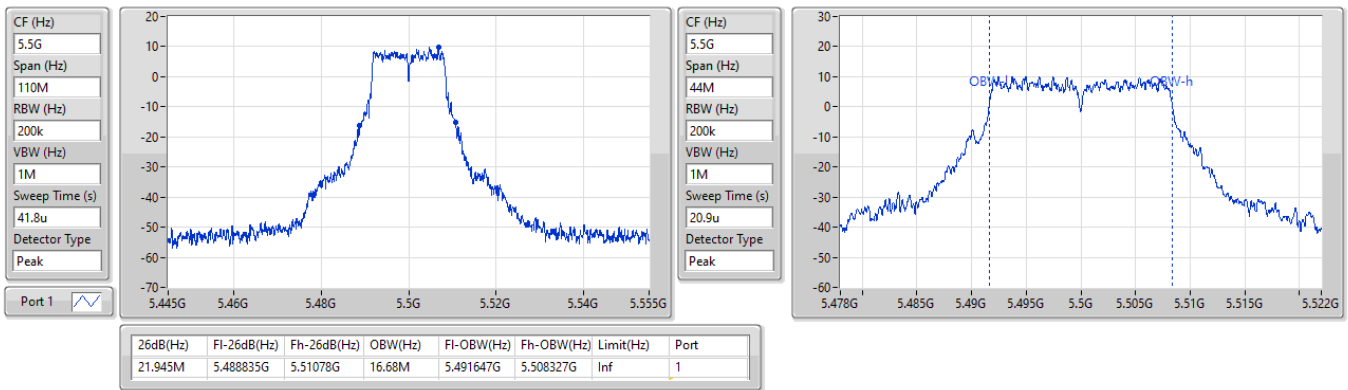


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5580MHz

18/12/2024


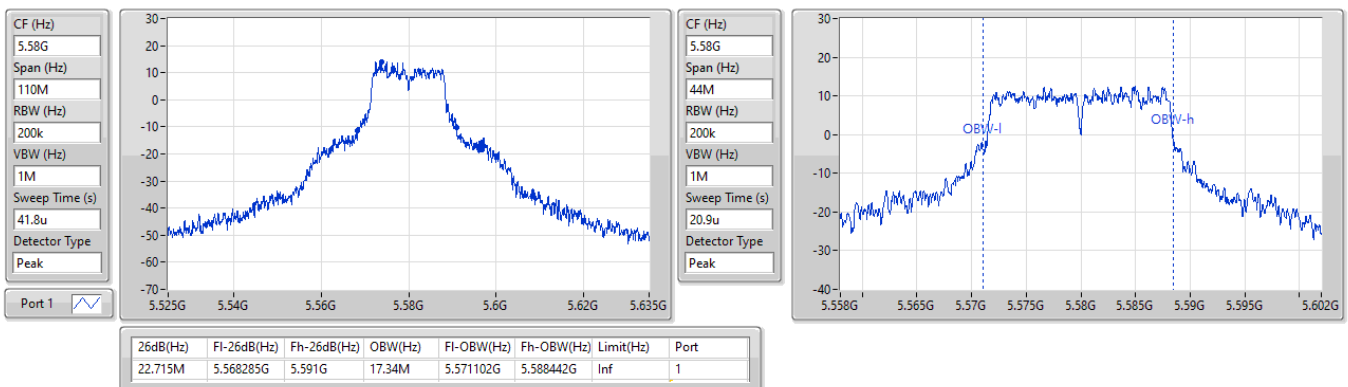


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5700MHz

18/12/2024

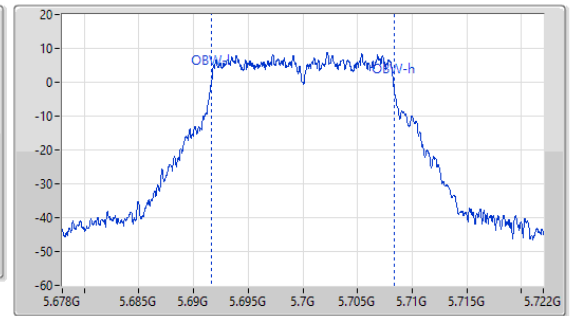
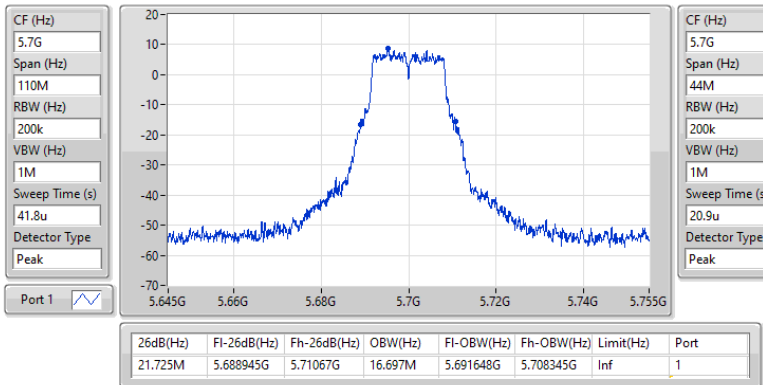


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.47-5.725GHz

18/12/2024

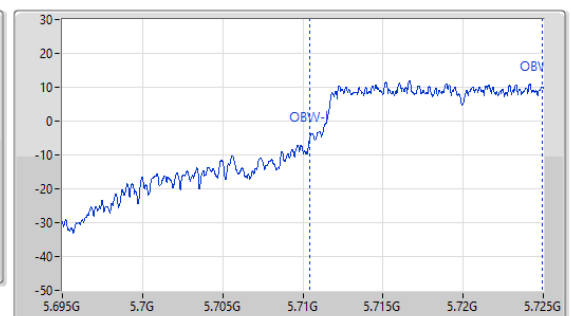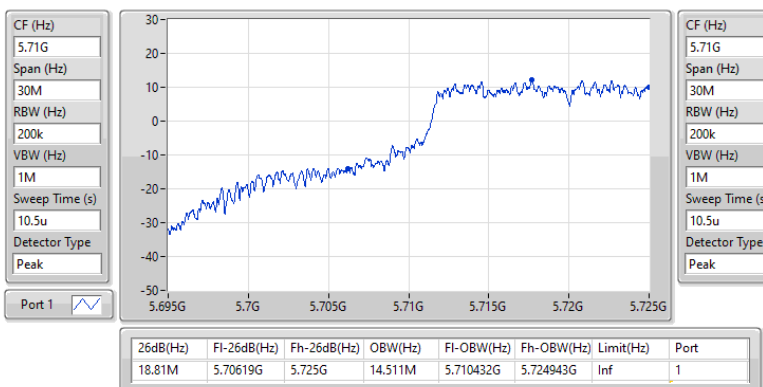


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

18/12/2024

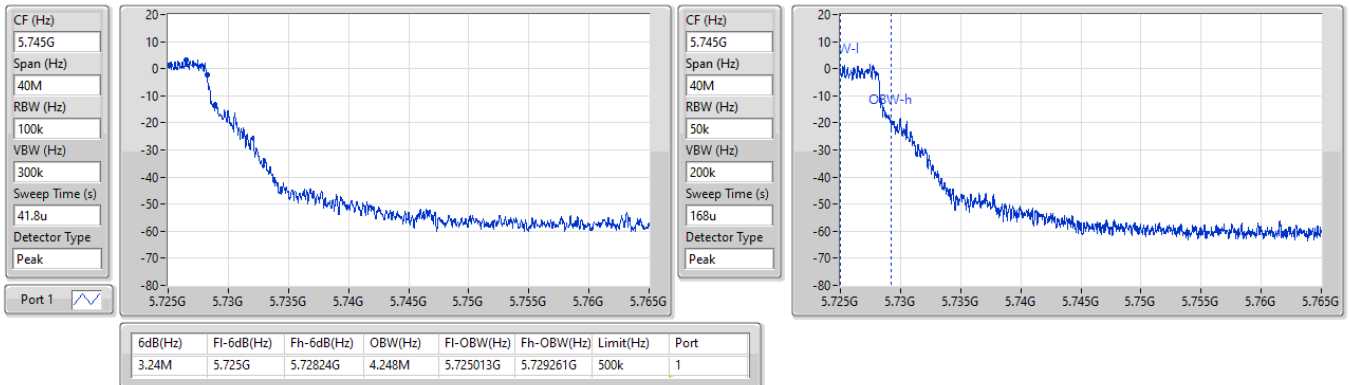


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

18/12/2024


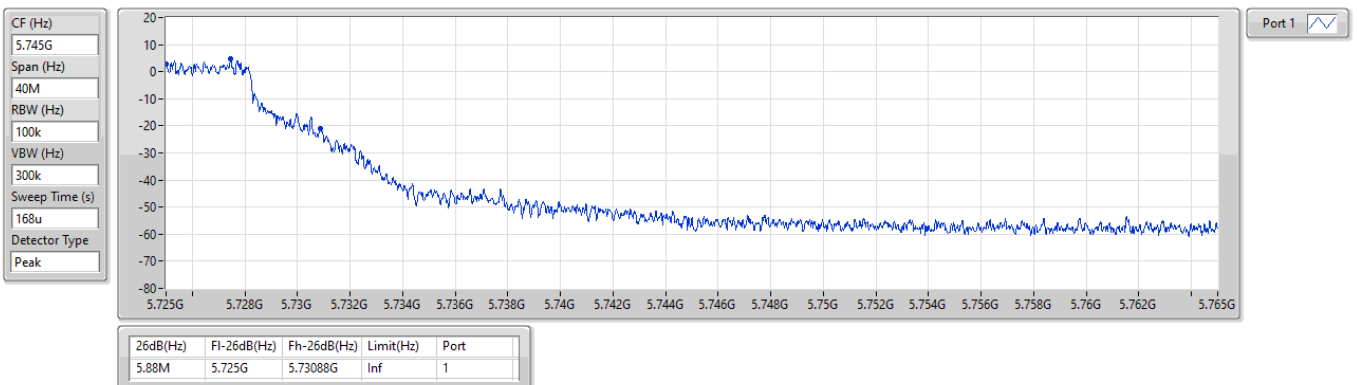


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5500MHz

18/12/2024

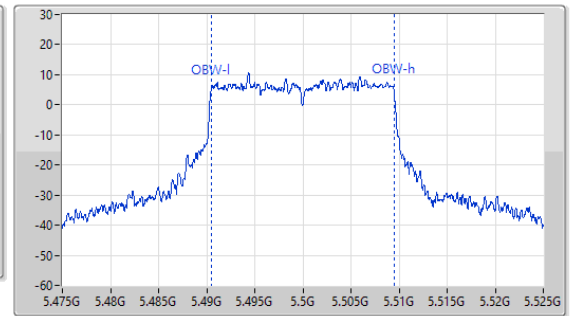
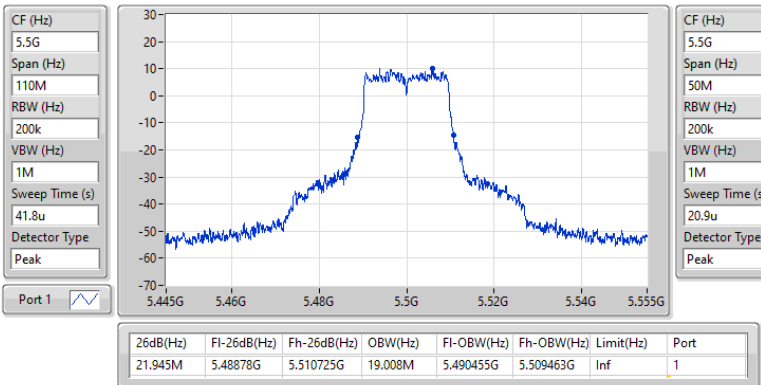


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5580MHz

18/12/2024

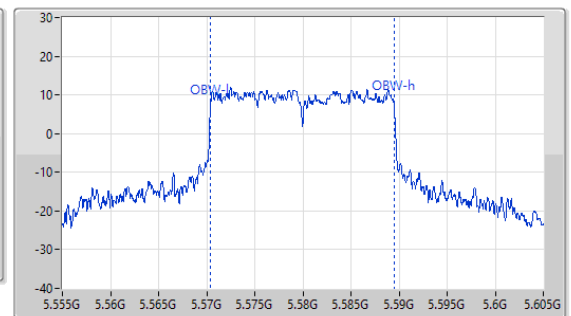
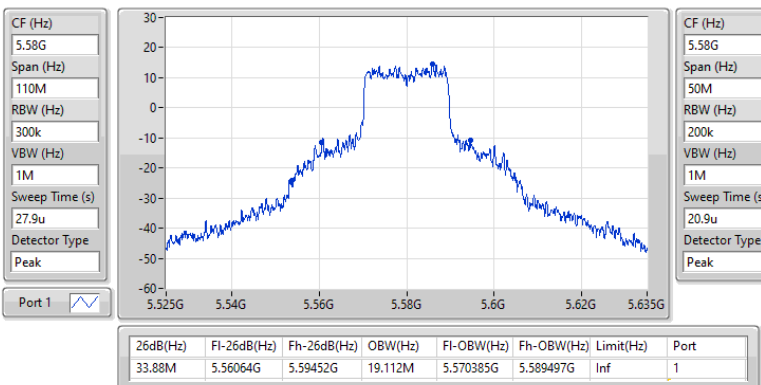


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5700MHz

27/12/2024

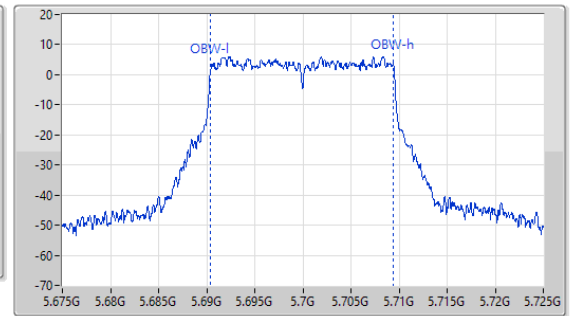
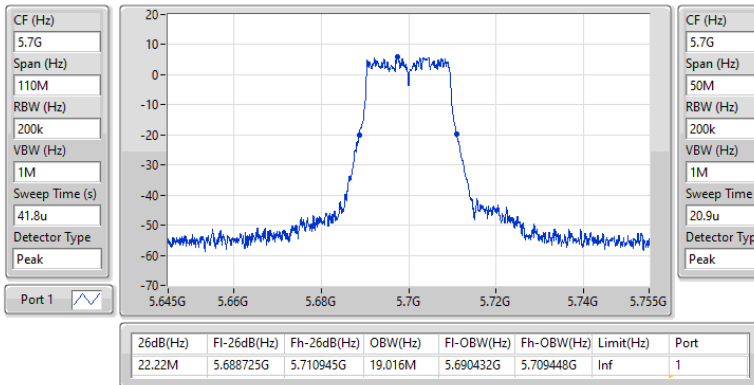


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.47-5.725GHz

18/12/2024

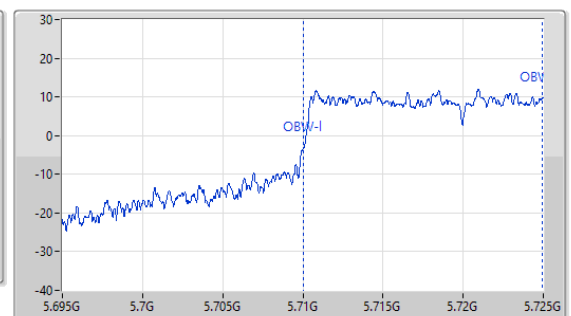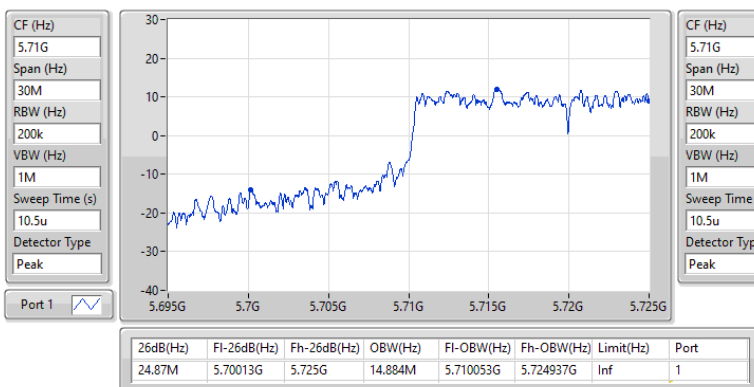


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

18/12/2024

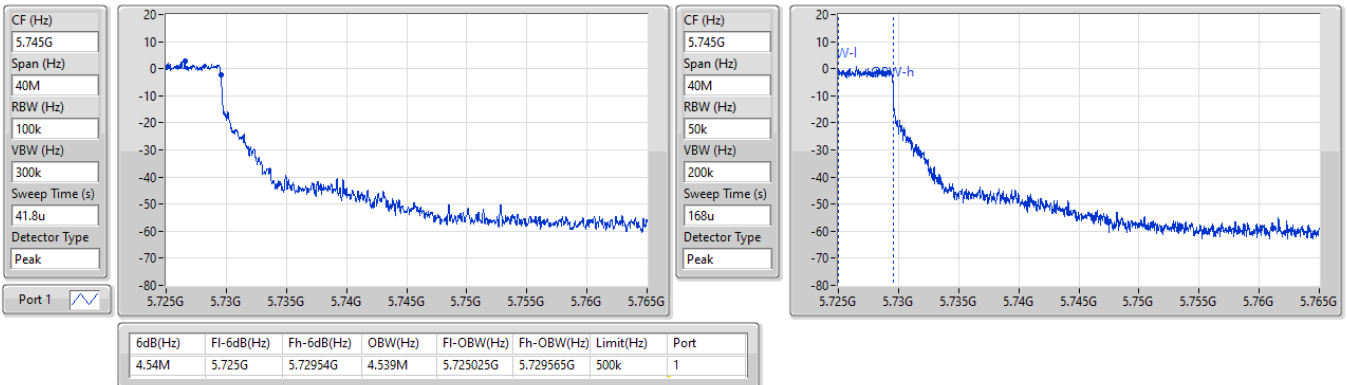


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX

EBW

5720MHz Straddle 5.725-5.85GHz

18/12/2024


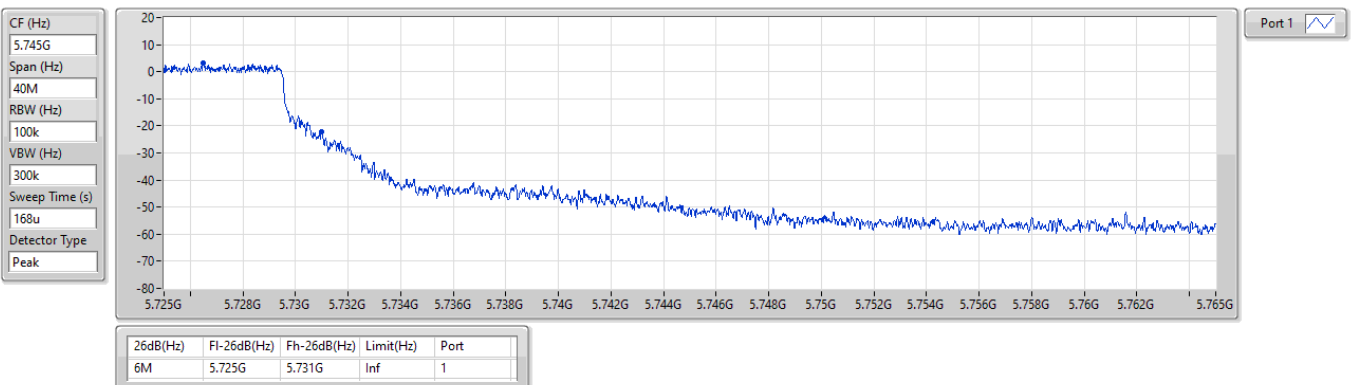


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5510MHz

27/12/2024

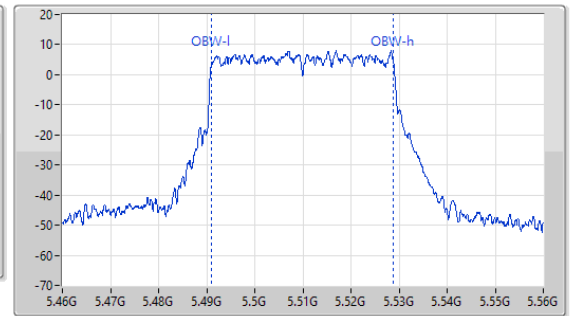
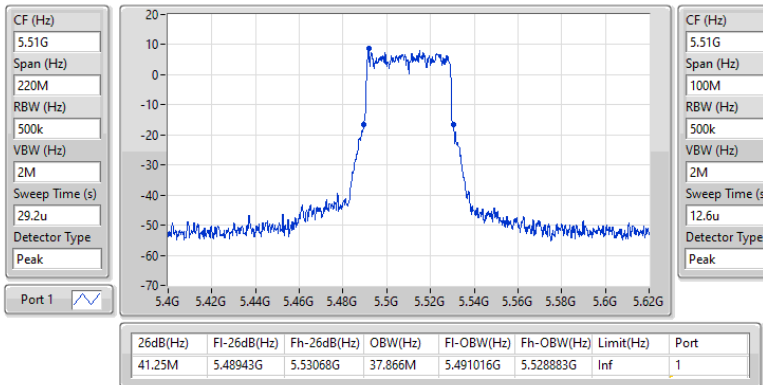


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5550MHz

27/12/2024

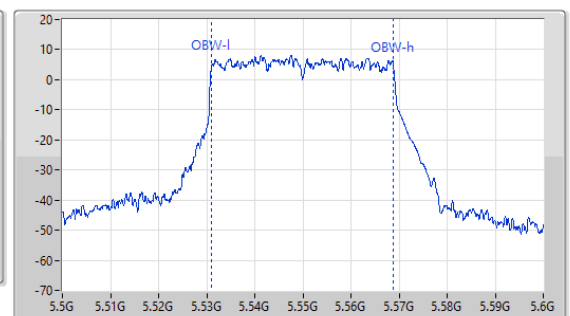
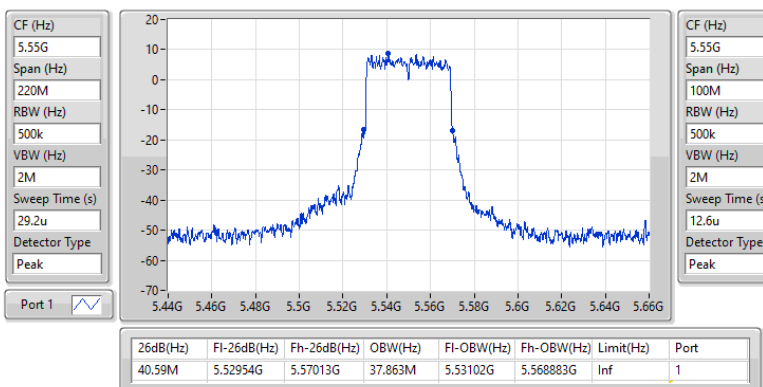


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5670MHz

27/12/2024

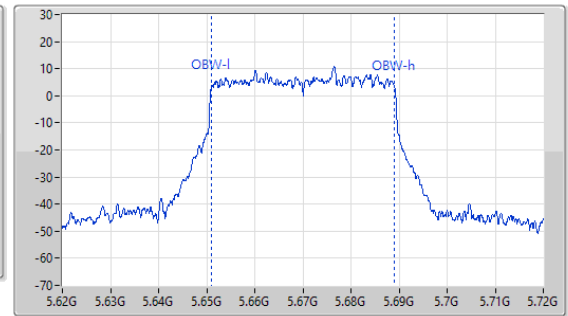
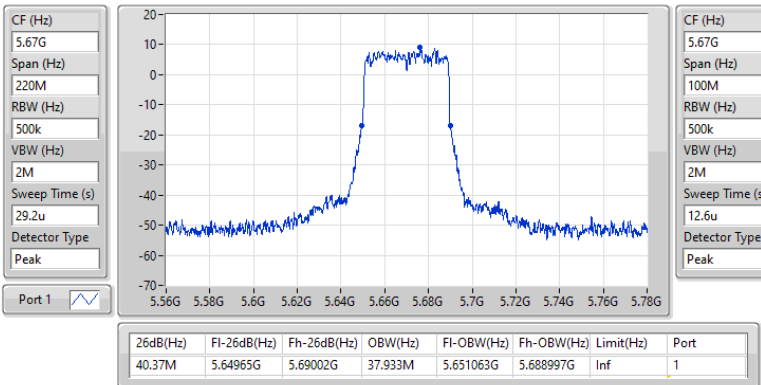


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.47-5.725GHz

27/12/2024

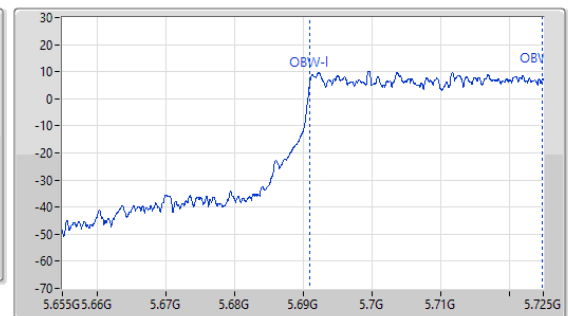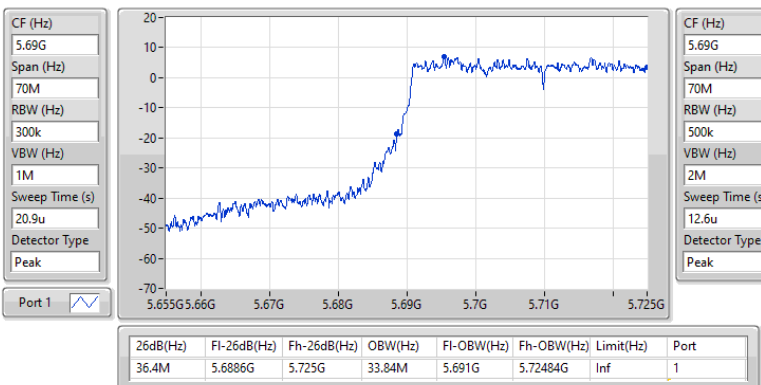


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.725-5.85GHz

27/12/2024

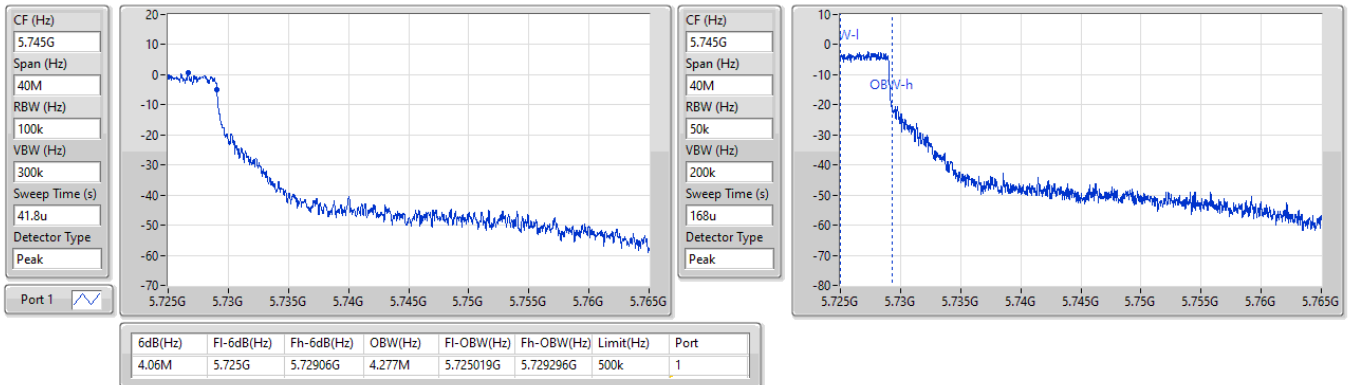


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX

EBW

5710MHz Straddle 5.725-5.85GHz

27/12/2024


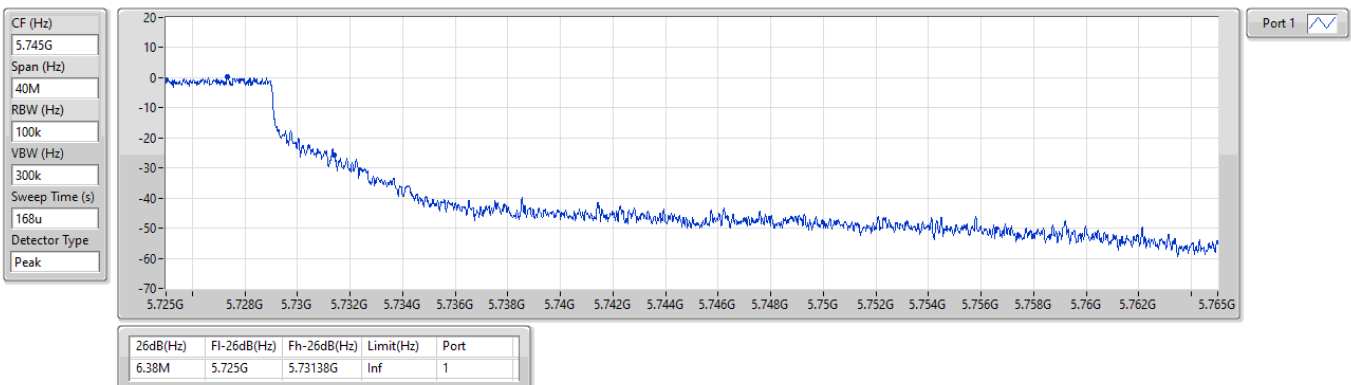


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5530MHz

18/12/2024

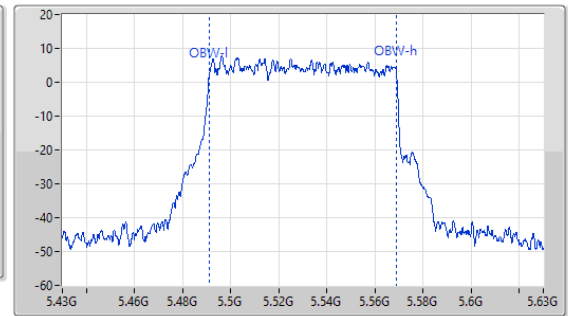
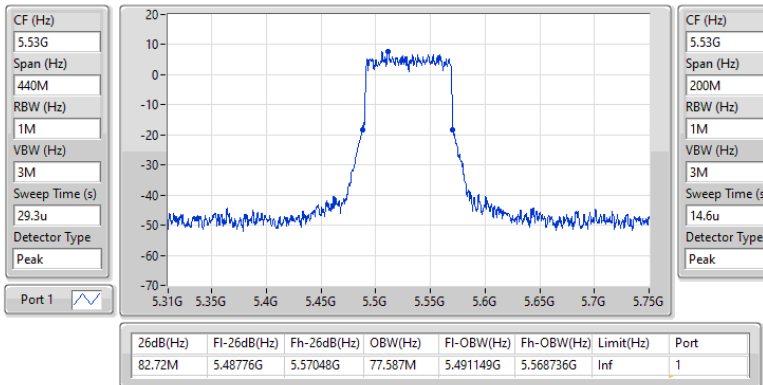


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5610MHz

18/12/2024

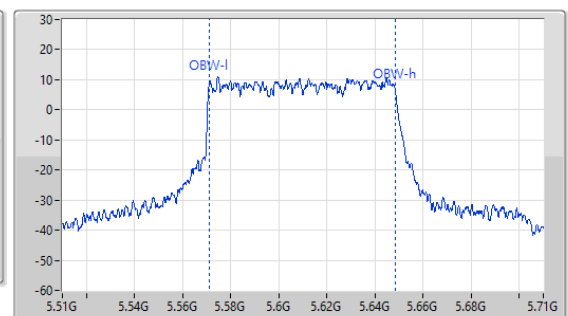
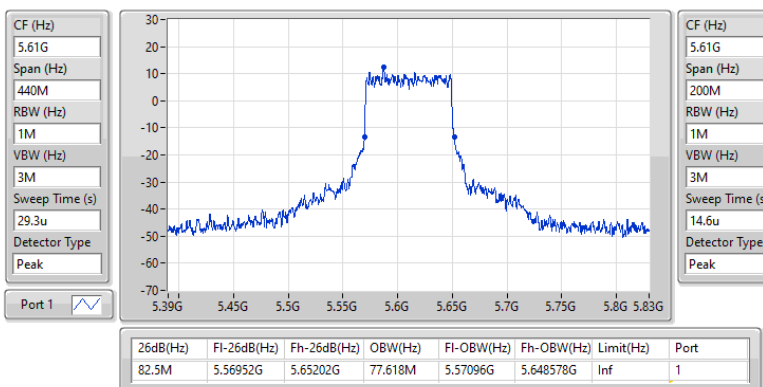


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.47-5.725GHz

18/12/2024

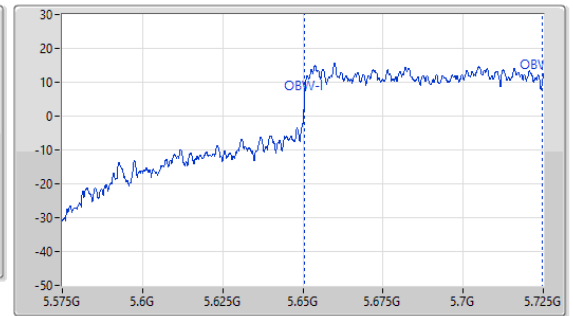
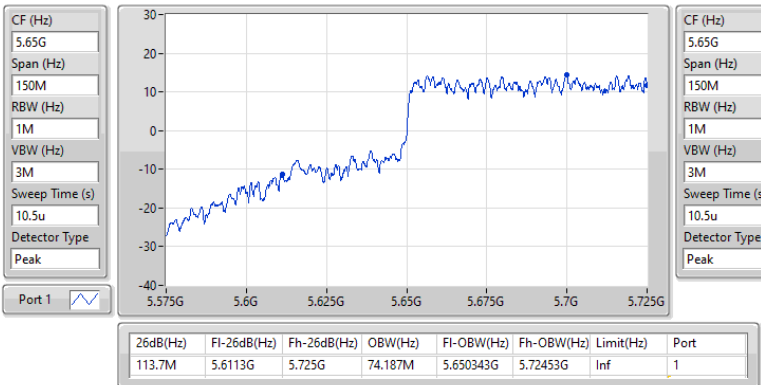


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.725-5.85GHz

18/12/2024

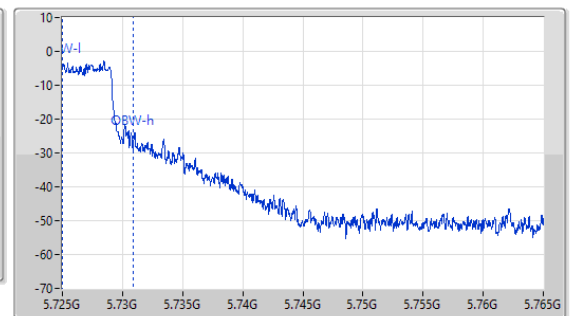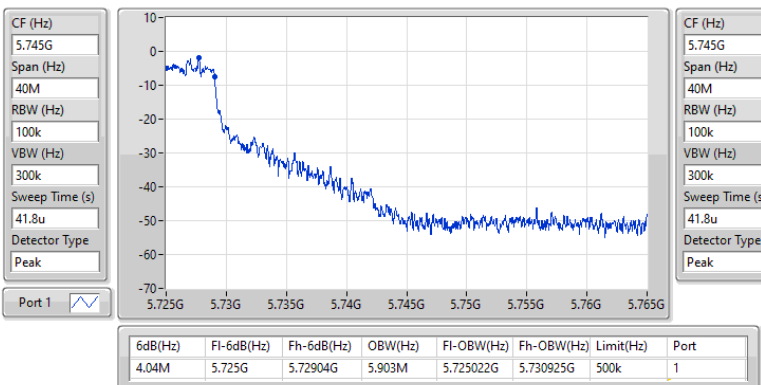


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX

EBW

5690MHz Straddle 5.725-5.85GHz

18/12/2024

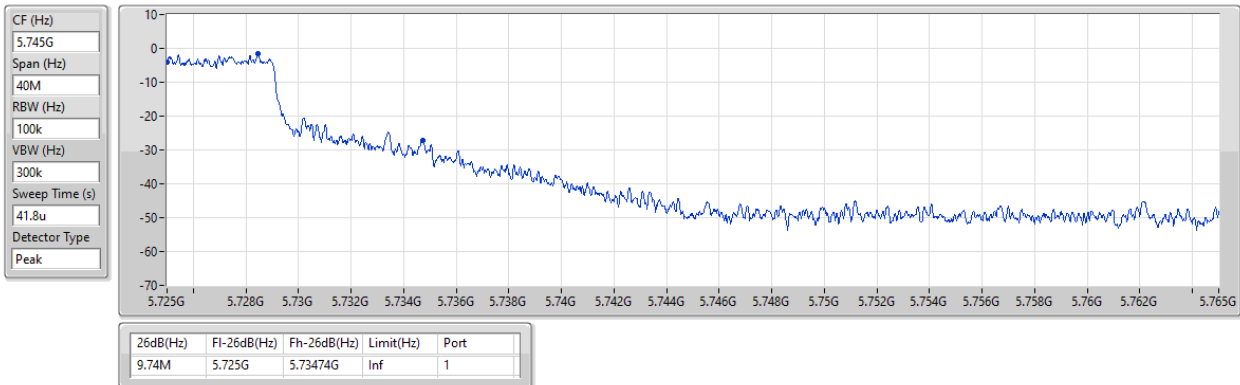


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_1TX

EBW

5570MHz

18/12/2024


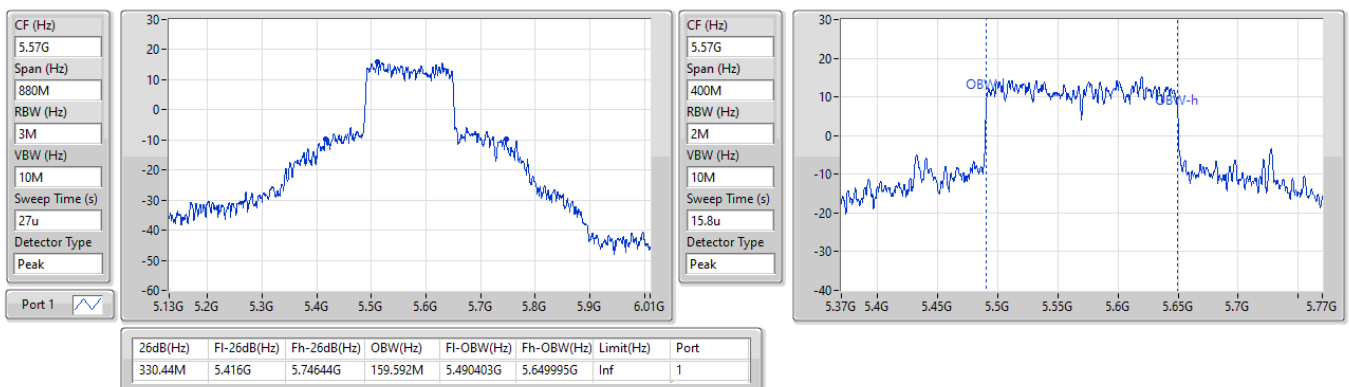


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5500MHz

27/12/2024

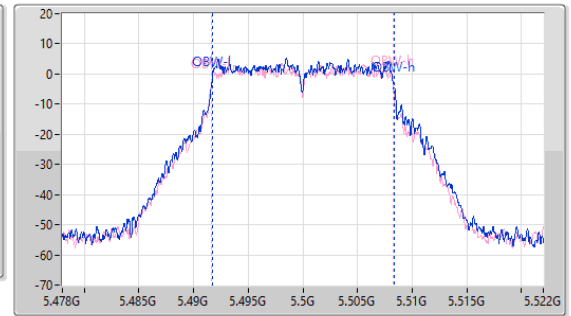
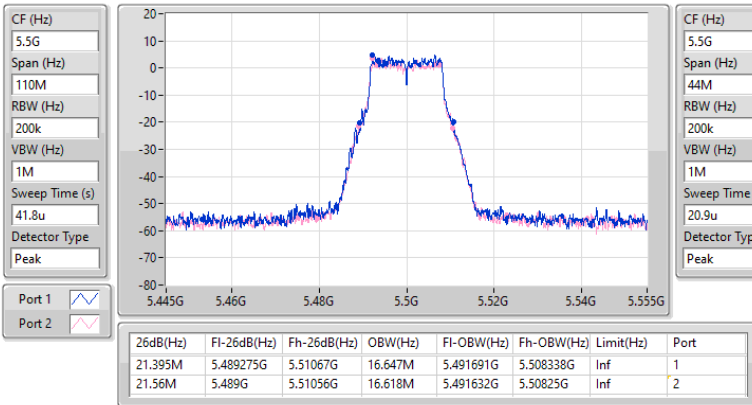


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5580MHz

27/12/2024

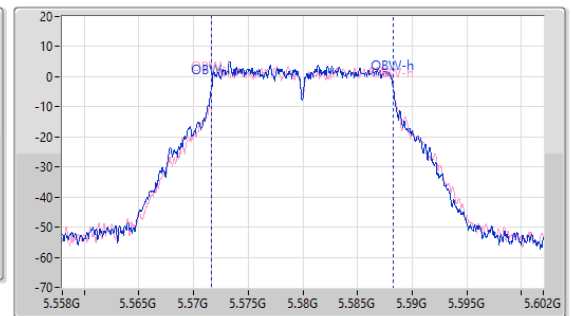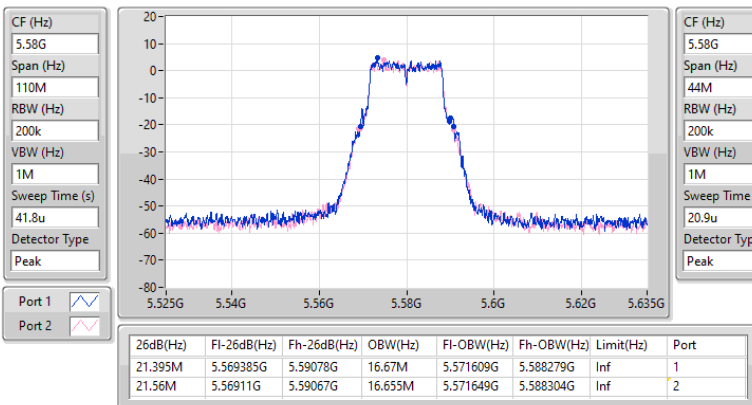


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5700MHz

27/12/2024

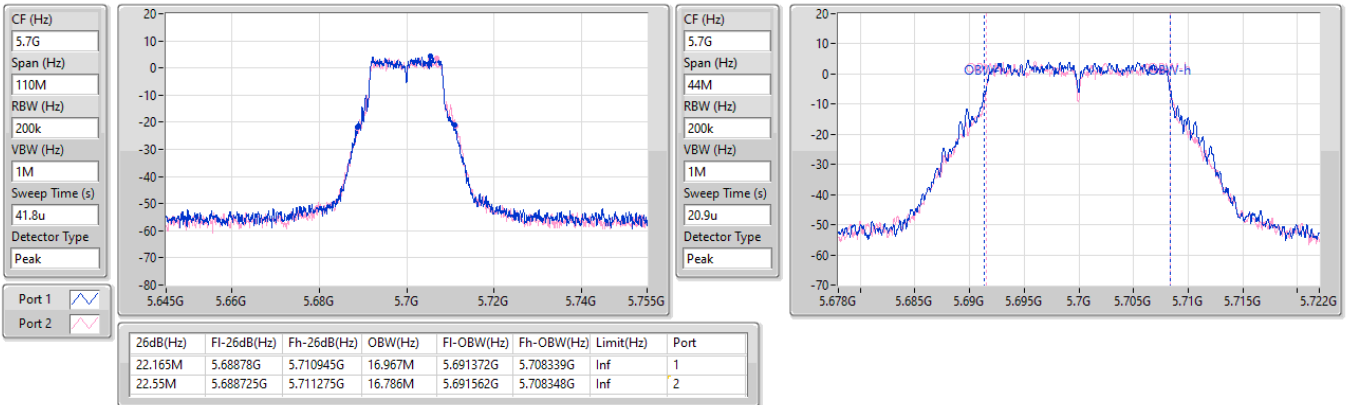


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.47-5.725GHz

27/12/2024

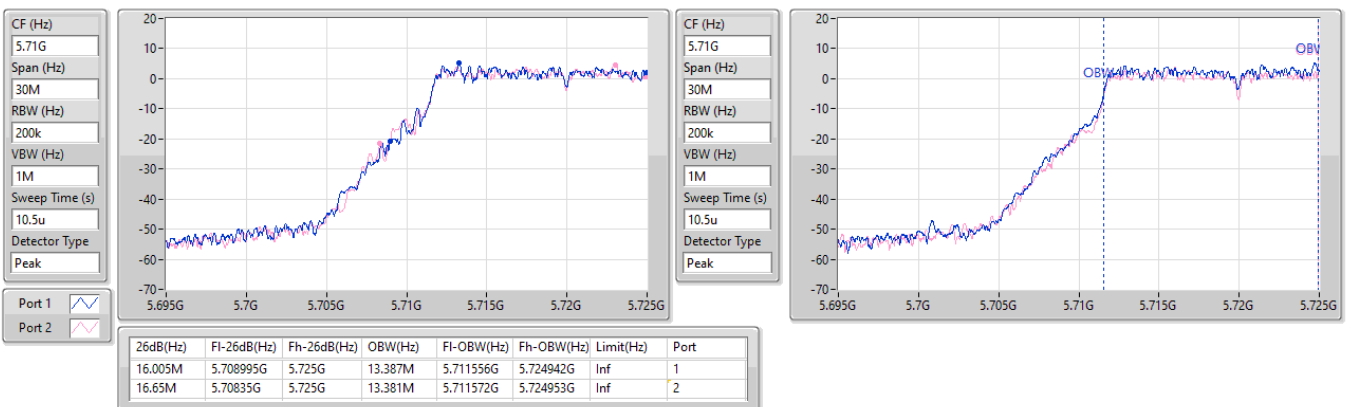


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/12/2024

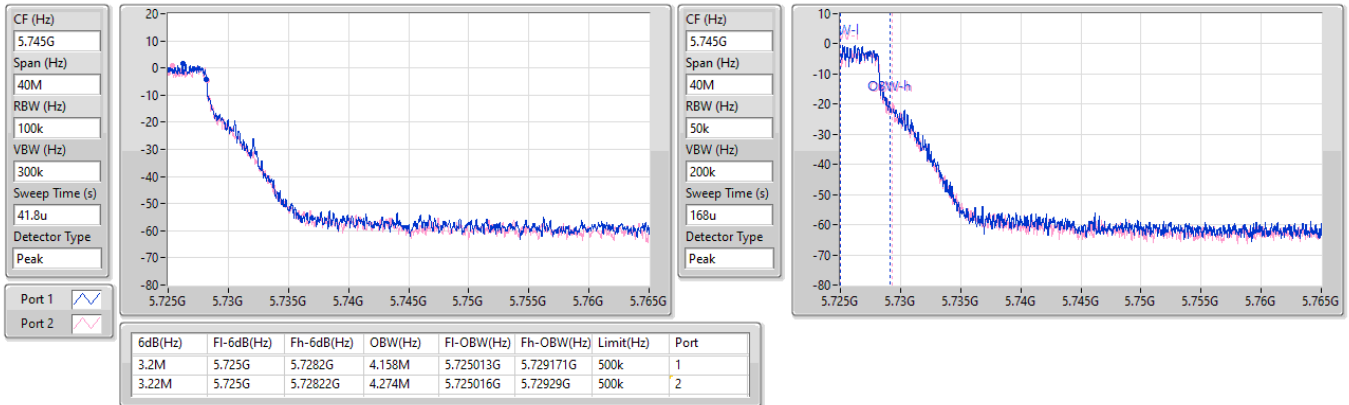


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/12/2024


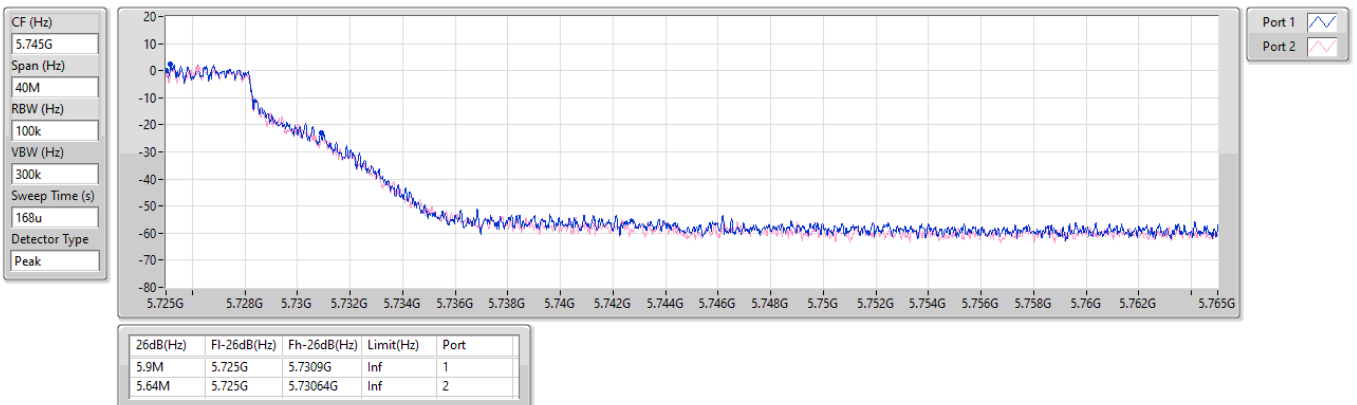


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5500MHz

27/12/2024

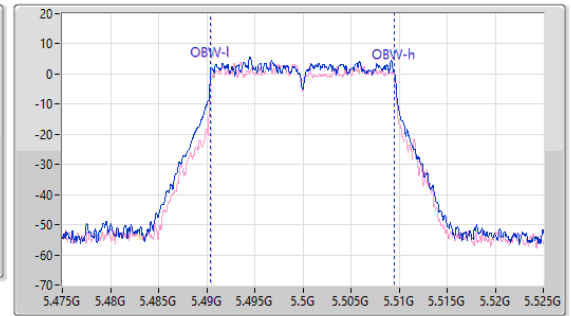
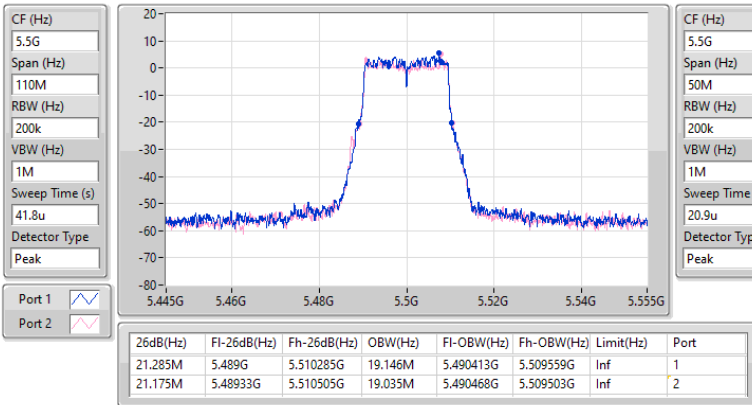


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5580MHz

27/12/2024

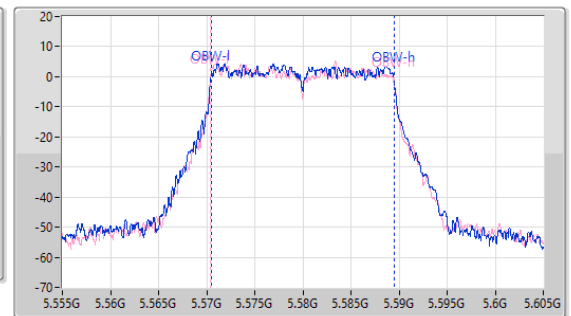
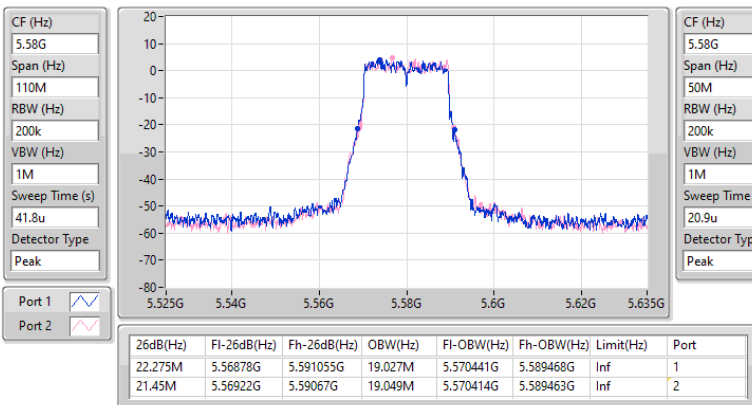


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5700MHz

27/12/2024

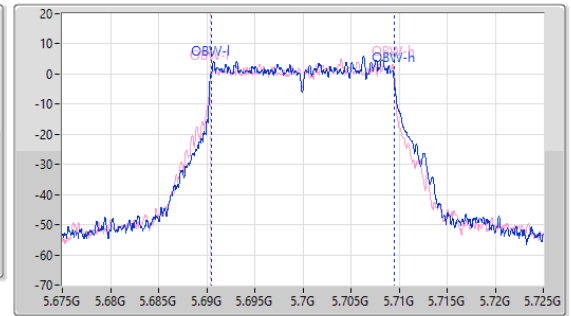
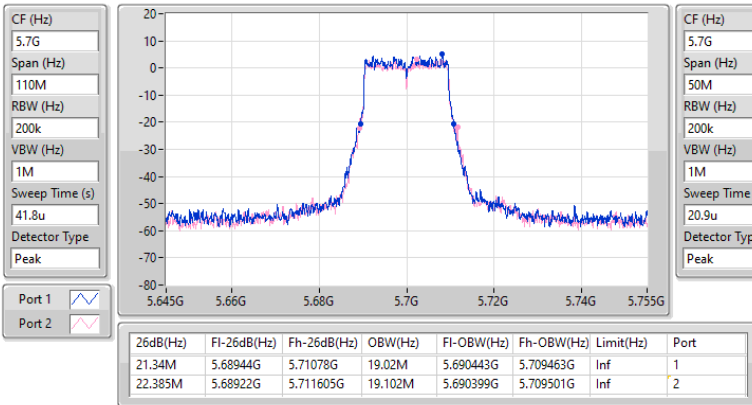


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.47-5.725GHz

27/12/2024

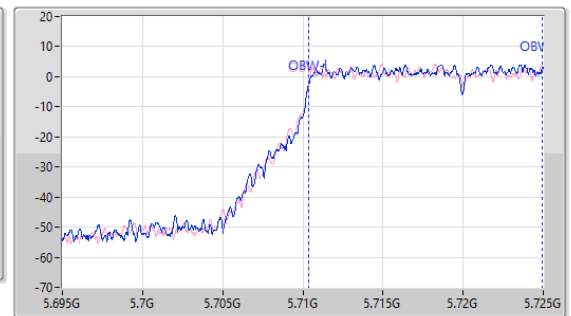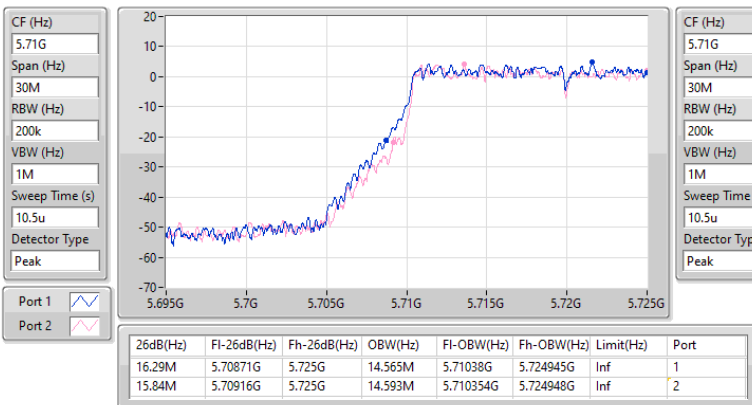


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/12/2024

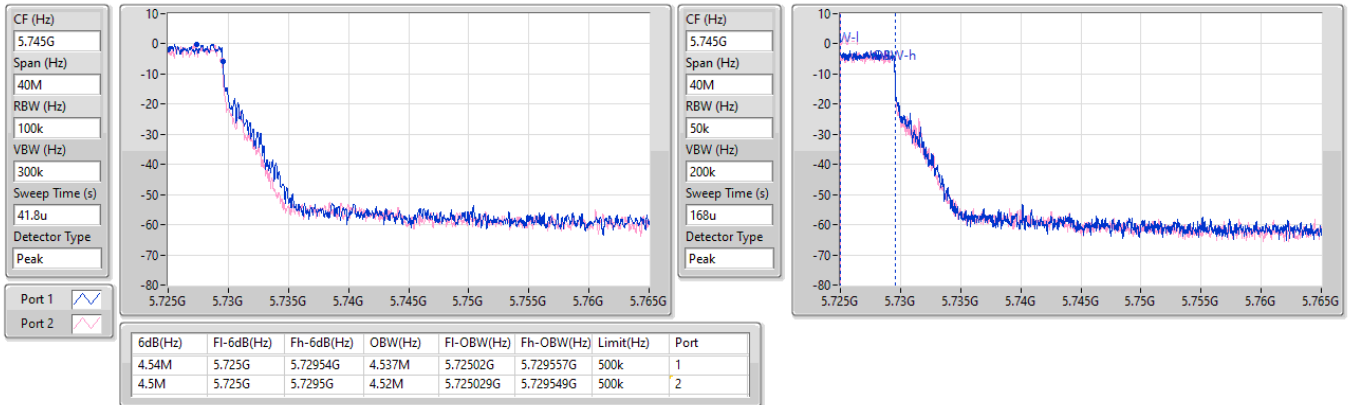


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5720MHz Straddle 5.725-5.85GHz

27/12/2024

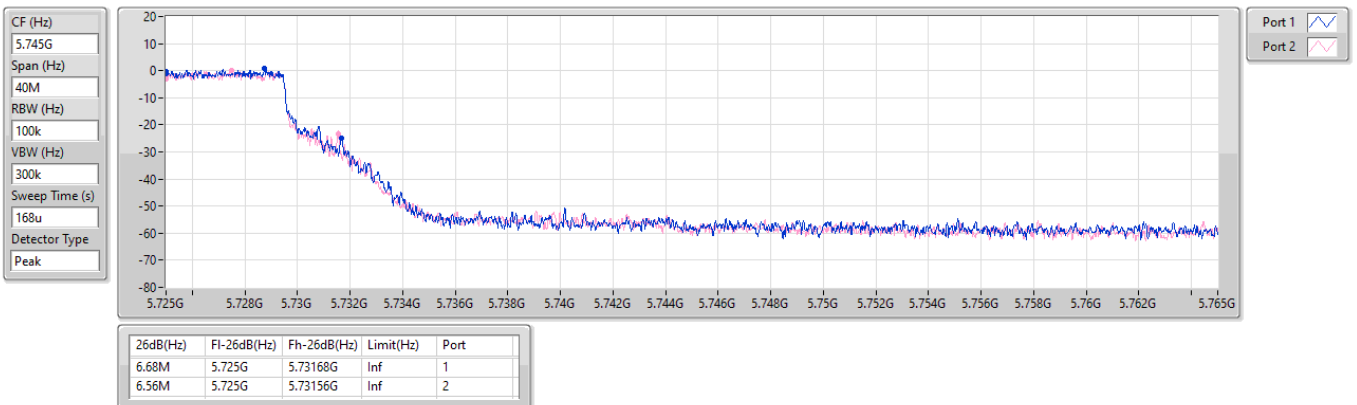


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5510MHz

27/12/2024

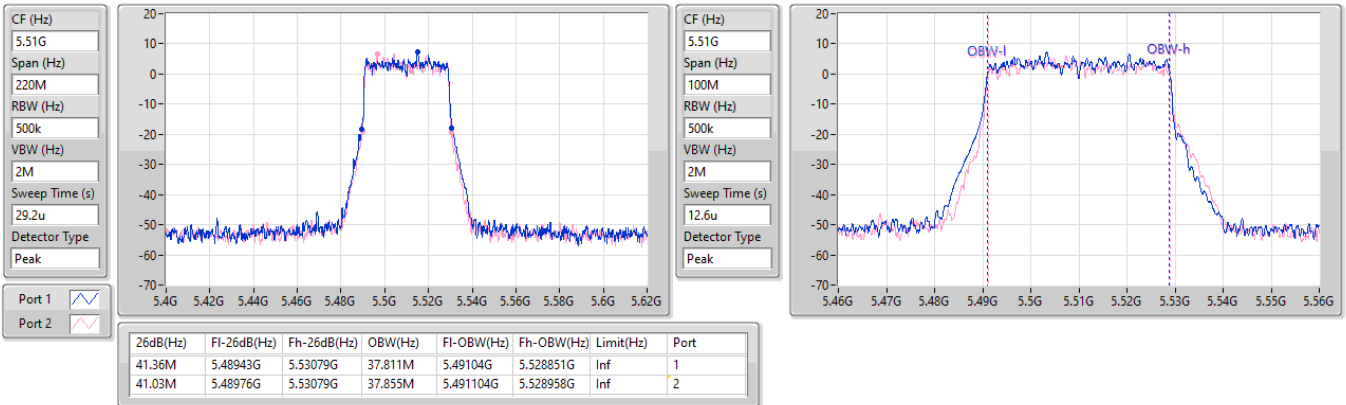


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5550MHz

27/12/2024

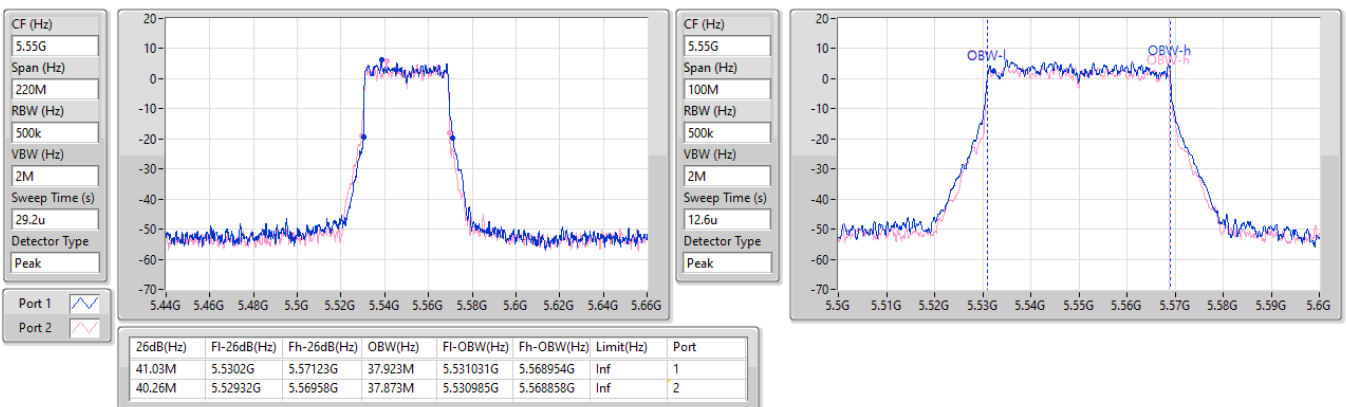


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5670MHz

27/12/2024

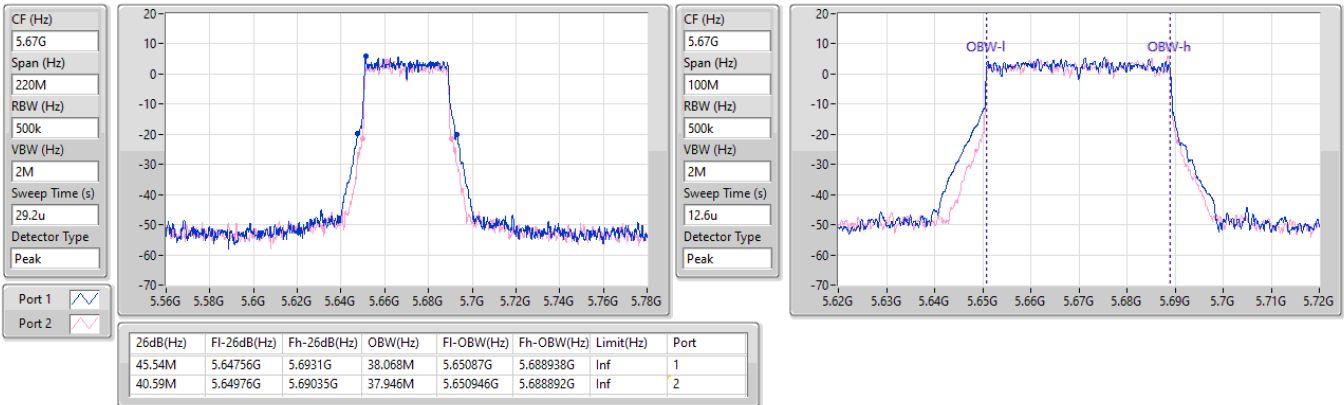


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.47-5.725GHz

27/12/2024

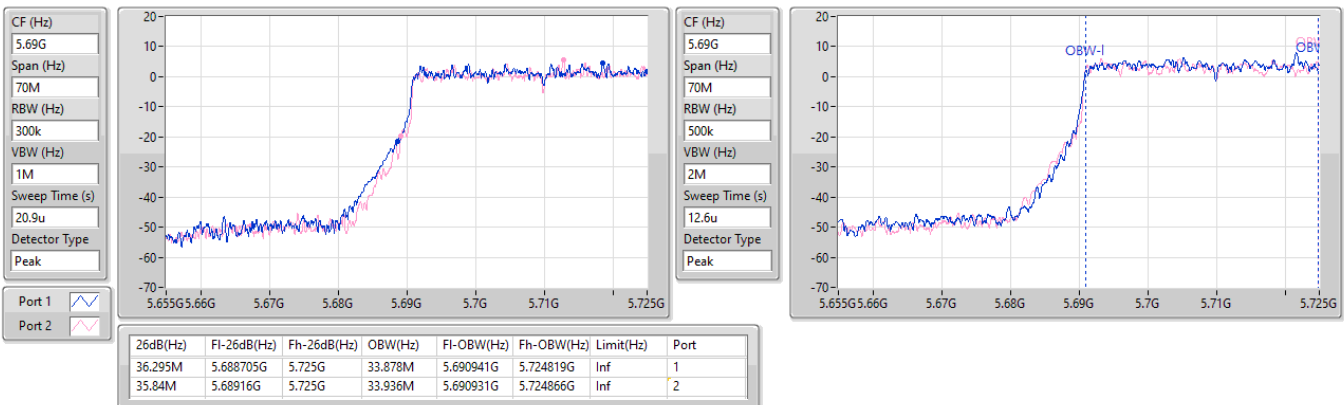


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

27/12/2024

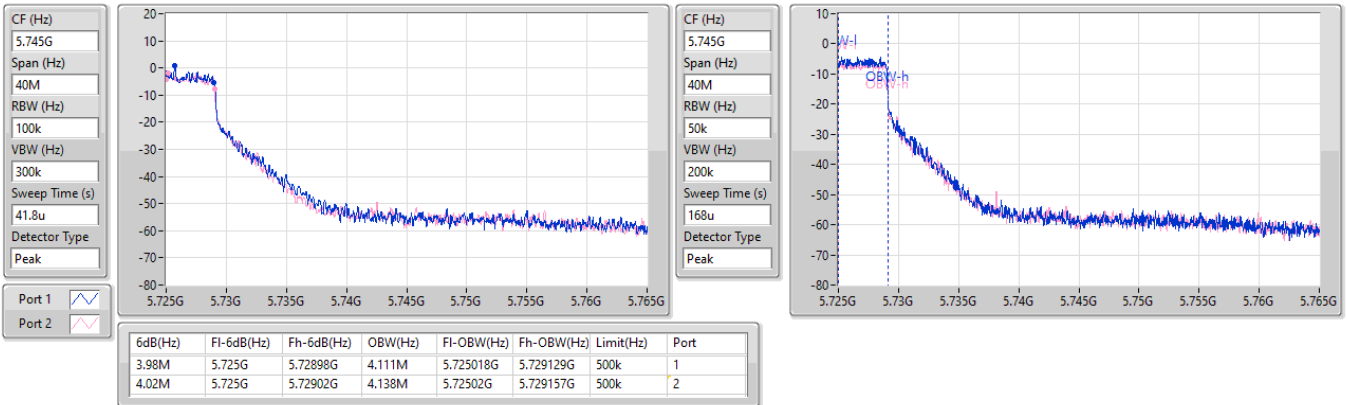


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

5710MHz Straddle 5.725-5.85GHz

27/12/2024

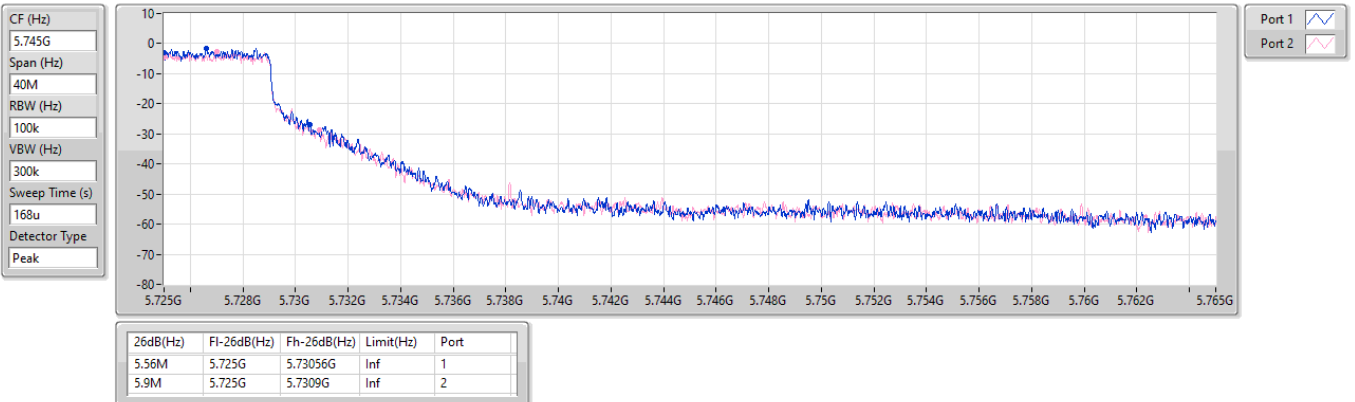


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5530MHz

27/12/2024

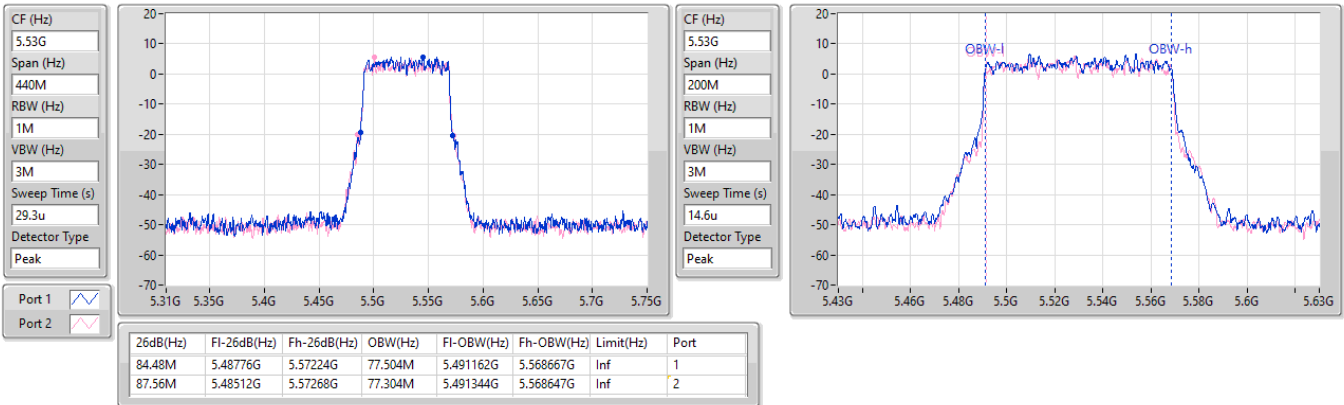


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5610MHz

27/12/2024


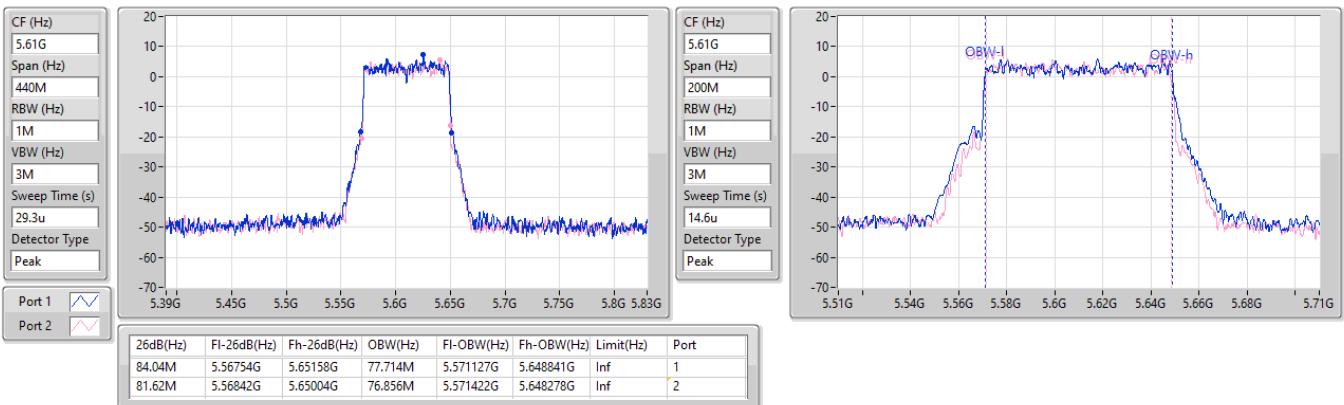


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.47-5.725GHz

27/12/2024

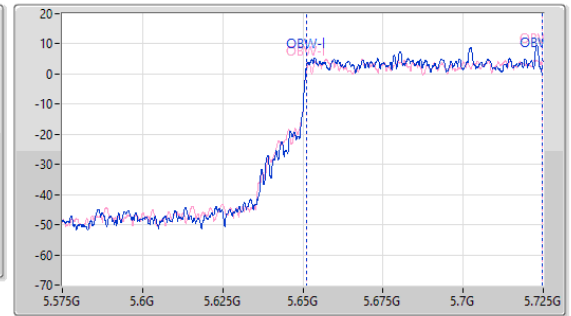
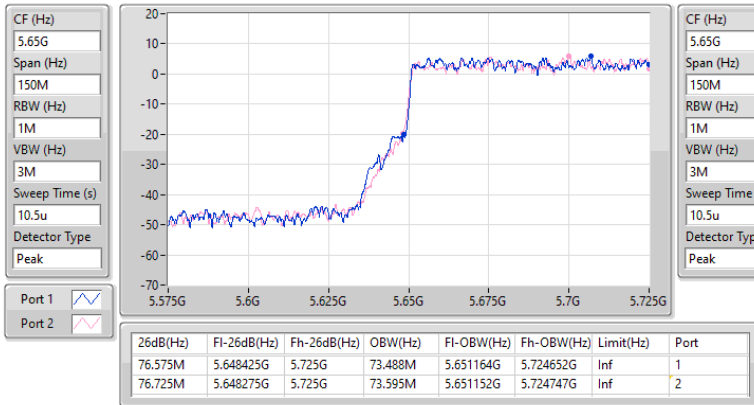


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

27/12/2024

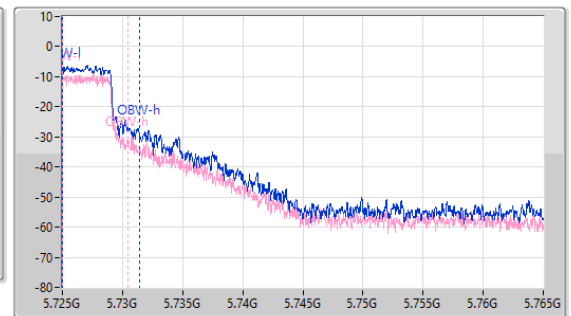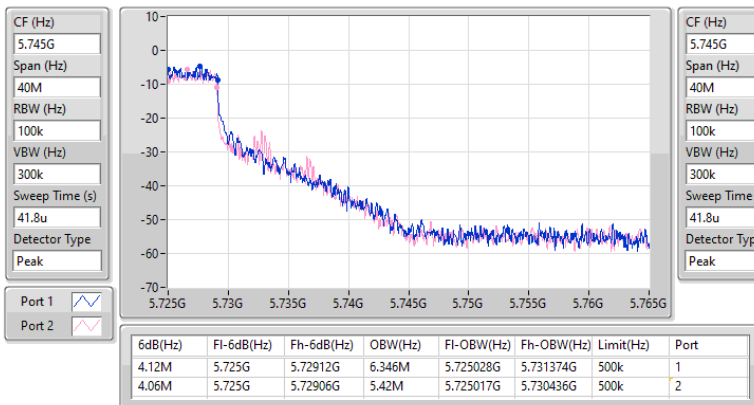


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5690MHz Straddle 5.725-5.85GHz

27/12/2024

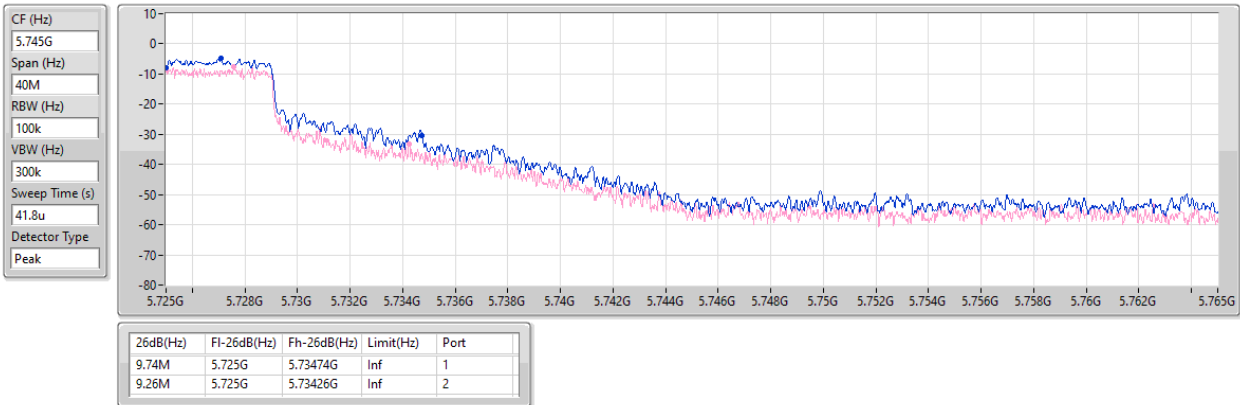


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

5570MHz

27/12/2024


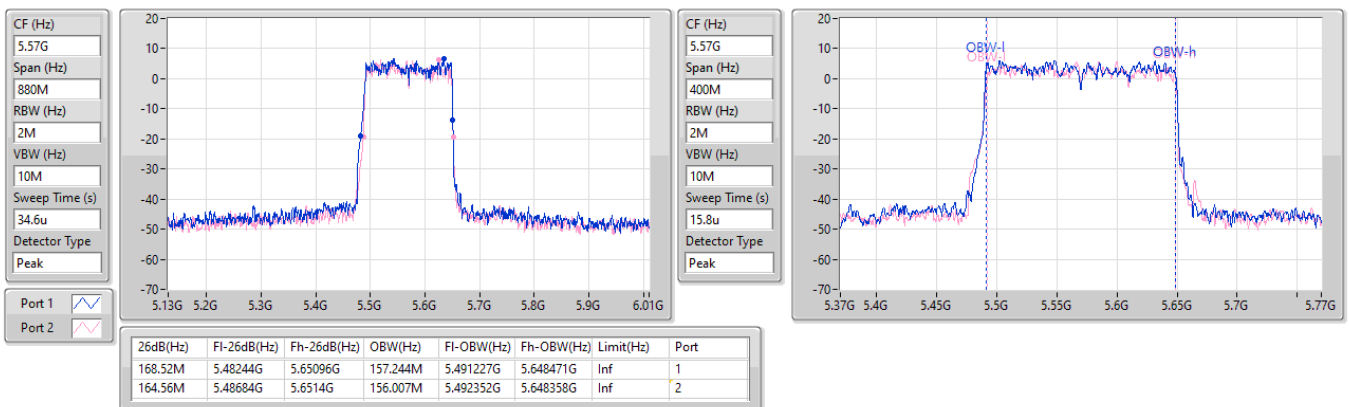


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5500MHz

20/12/2024

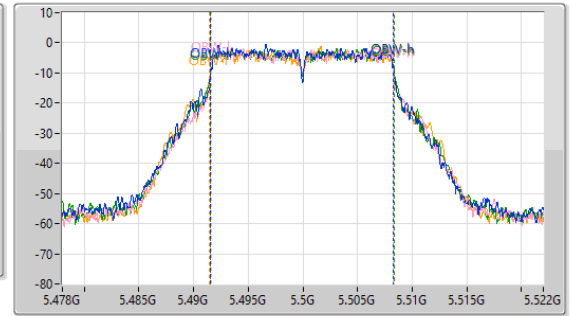
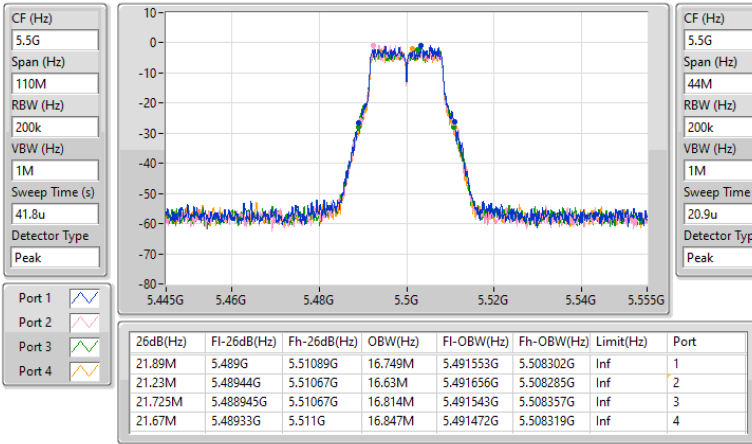


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5580MHz

20/12/2024

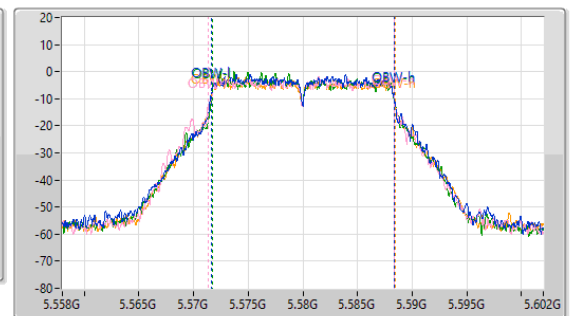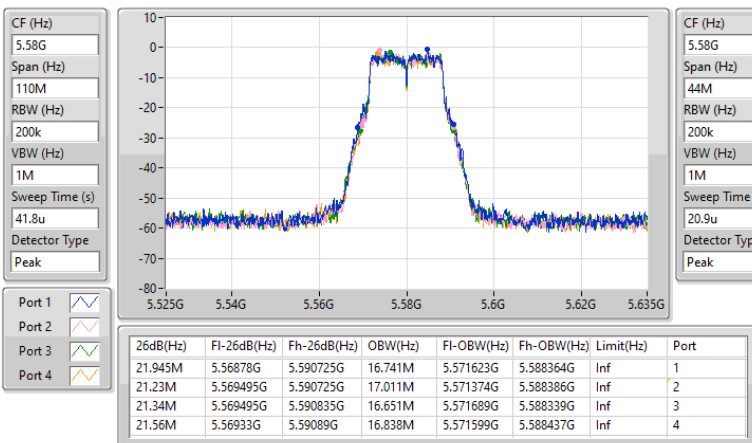


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5700MHz

20/12/2024

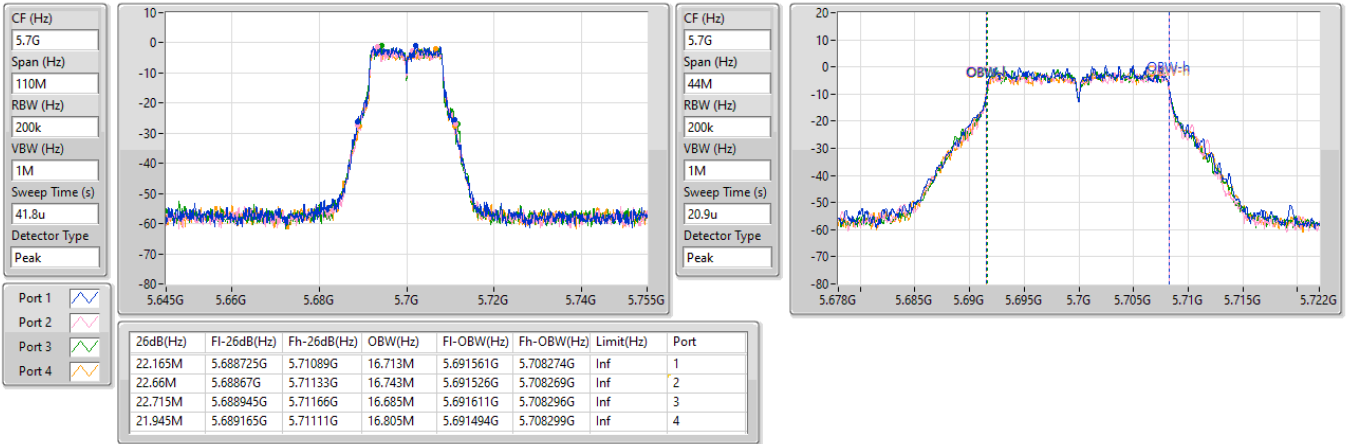


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

20/12/2024

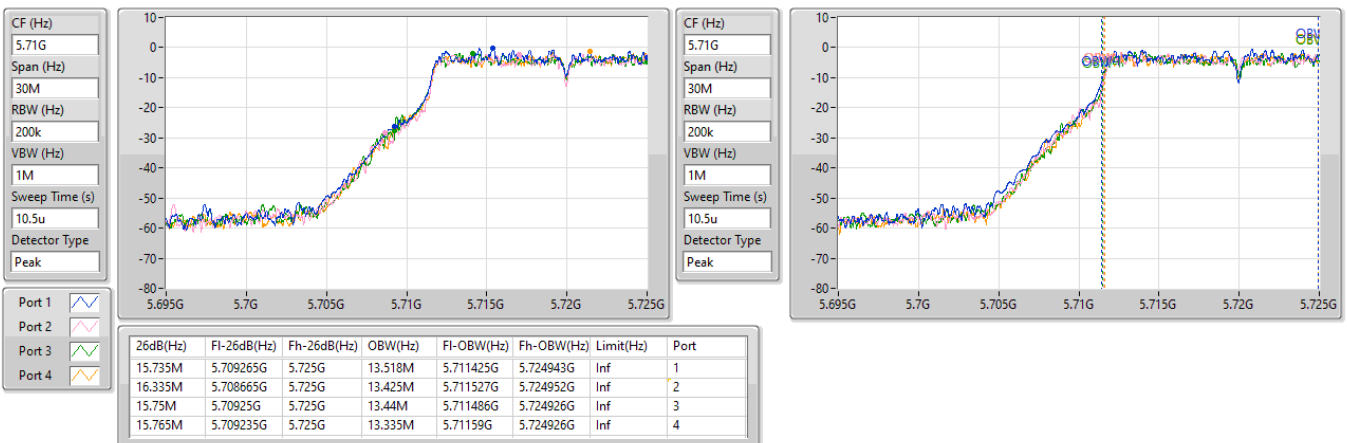


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

20/12/2024

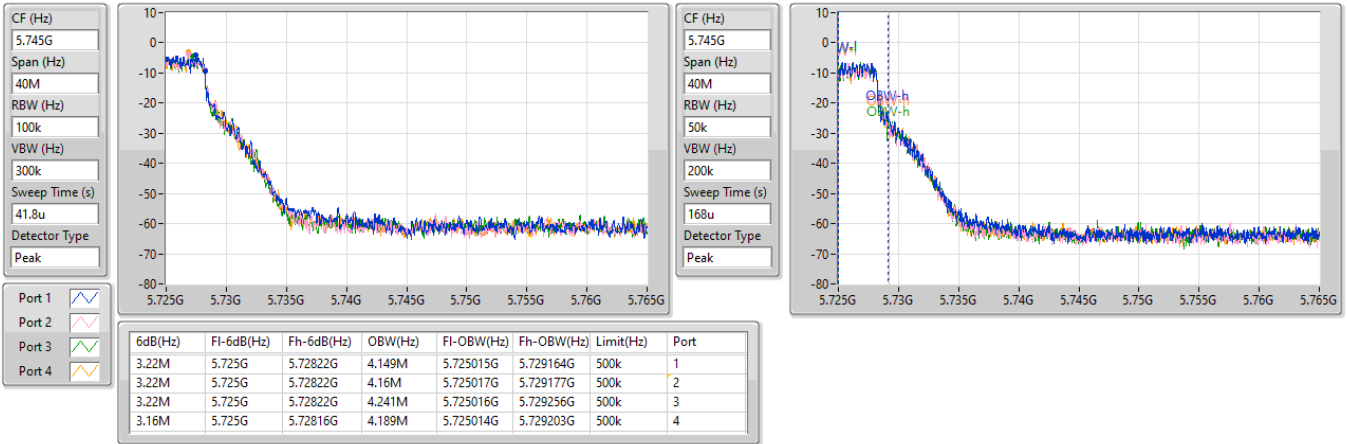


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

20/12/2024


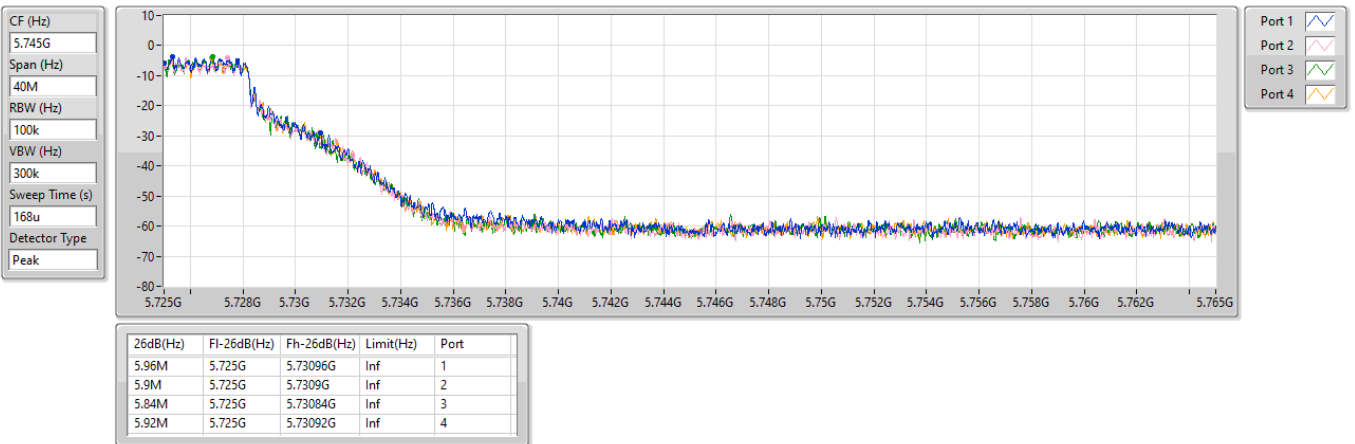


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5500MHz

20/12/2024

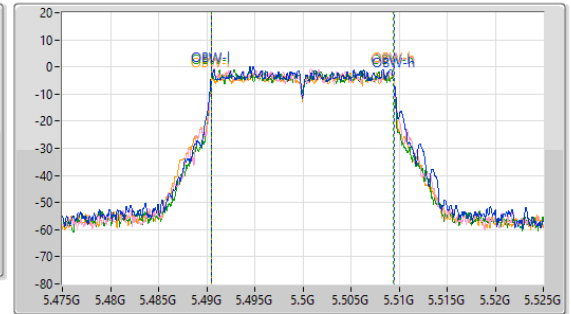
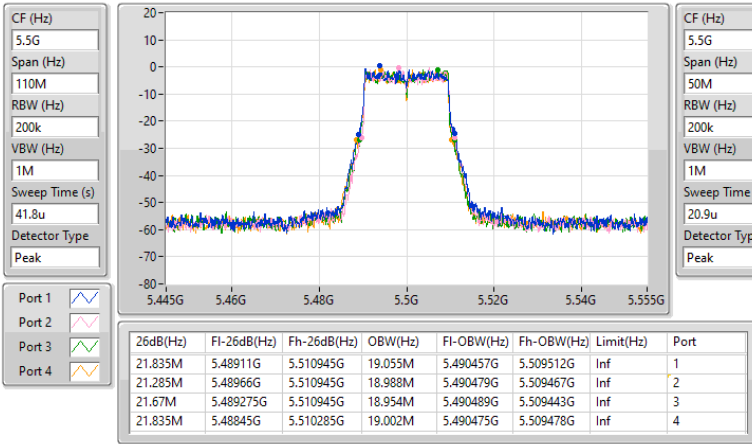


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5580MHz

20/12/2024

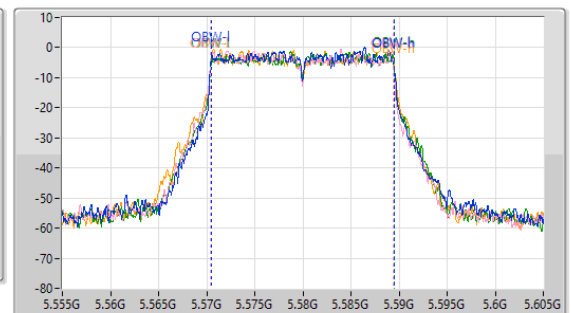
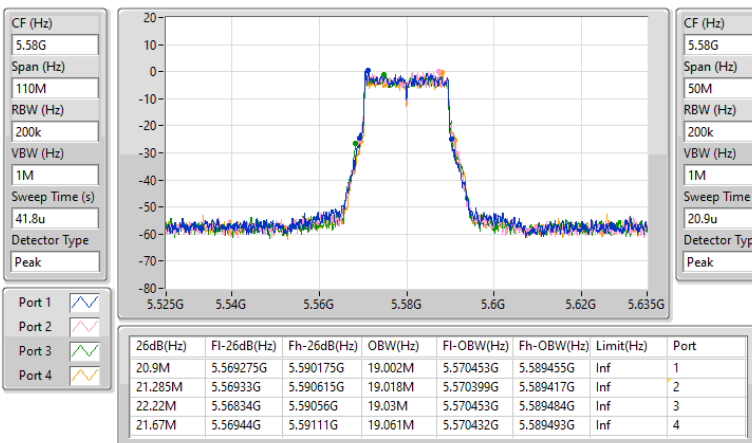


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5700MHz

20/12/2024

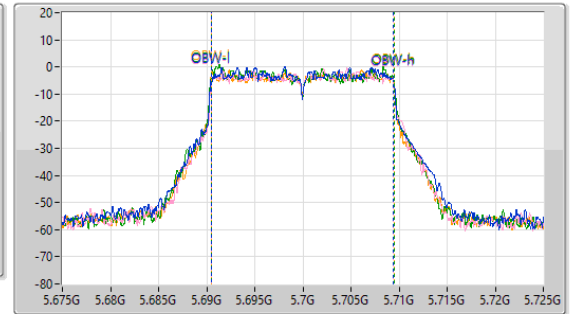
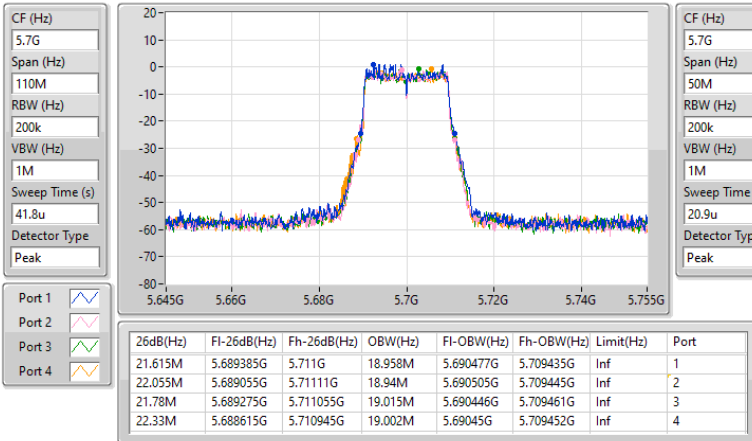


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.47-5.725GHz

20/12/2024

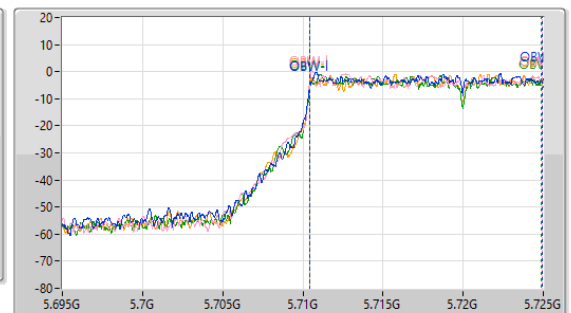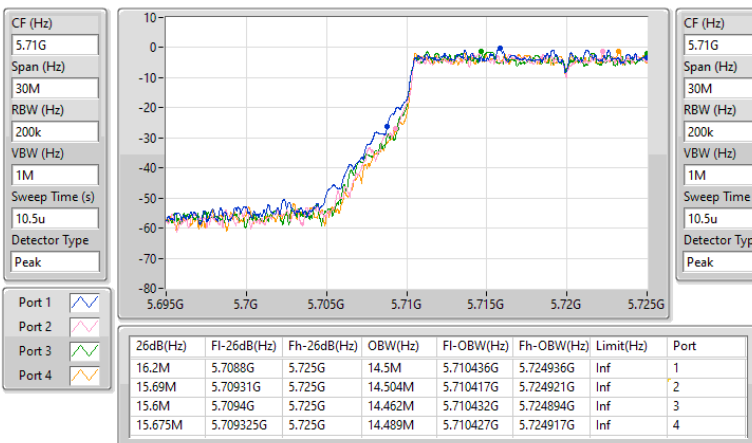


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

20/12/2024

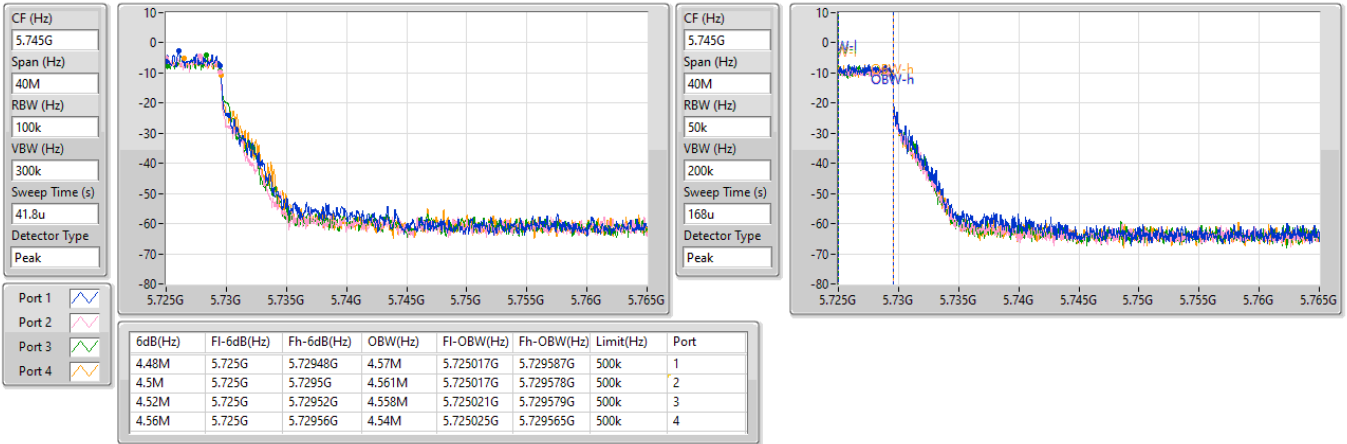


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

EBW

5720MHz Straddle 5.725-5.85GHz

20/12/2024

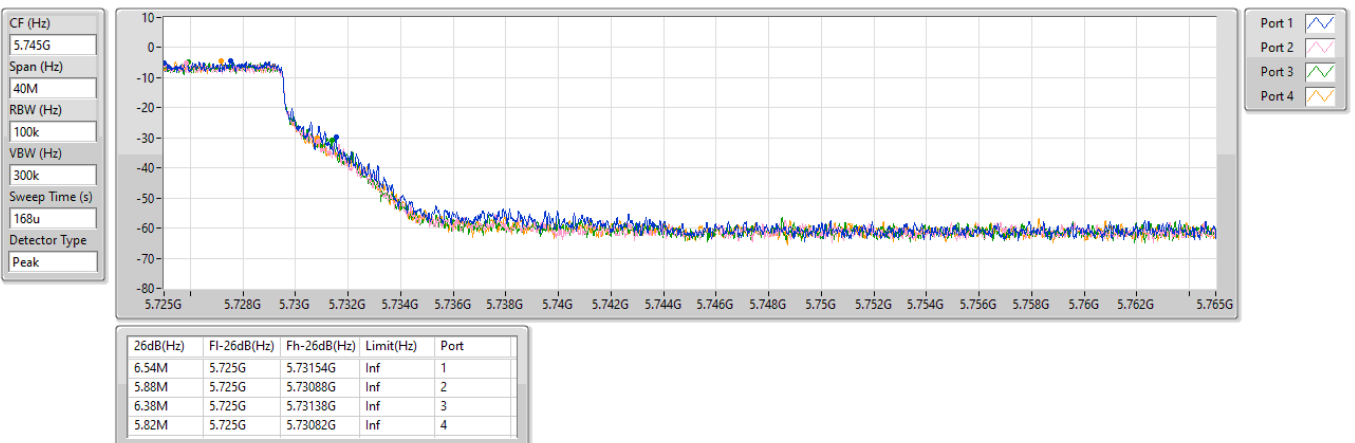


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5510MHz

20/12/2024

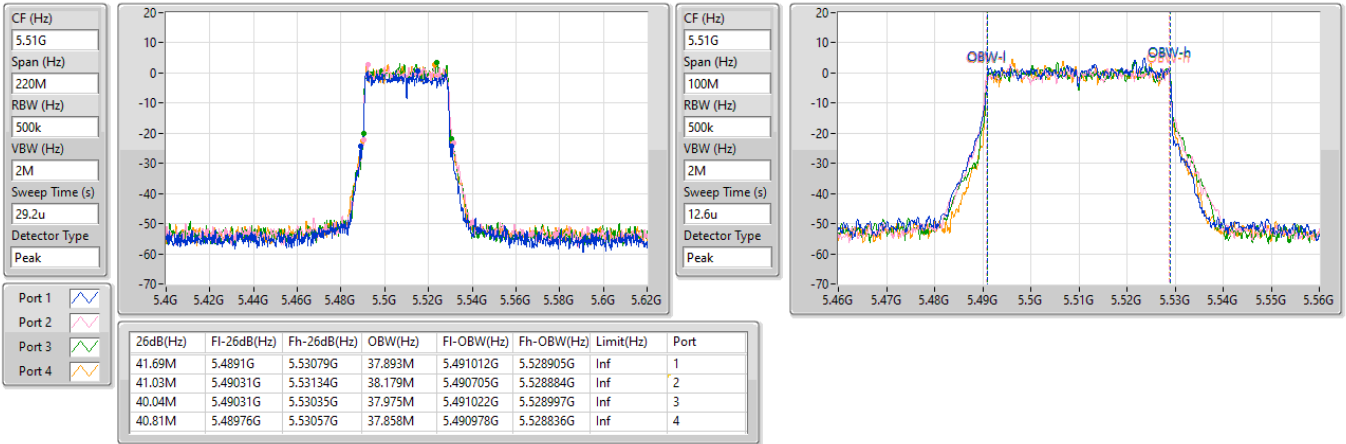


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5550MHz

20/12/2024


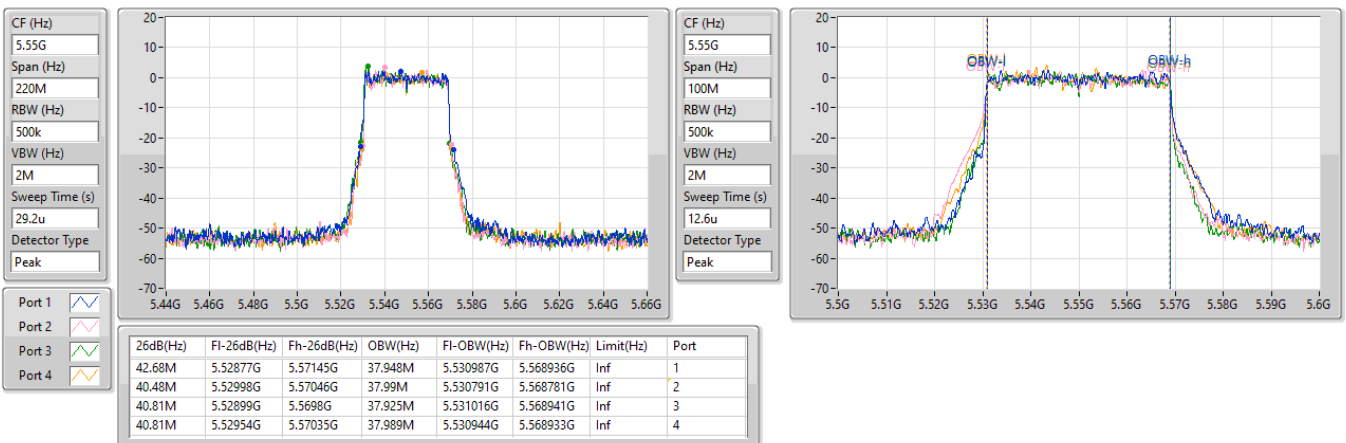


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5670MHz

20/12/2024

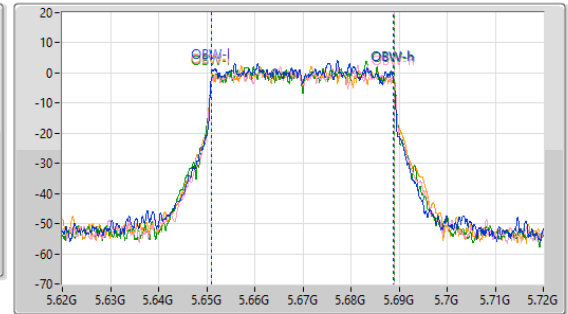
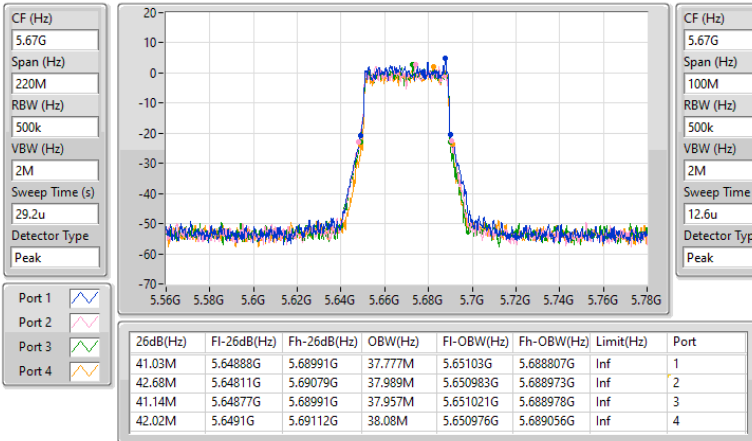


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.47-5.725GHz

20/12/2024

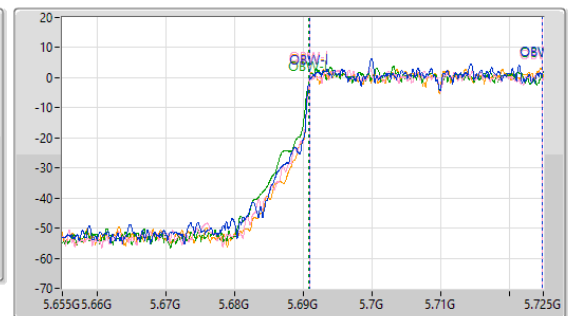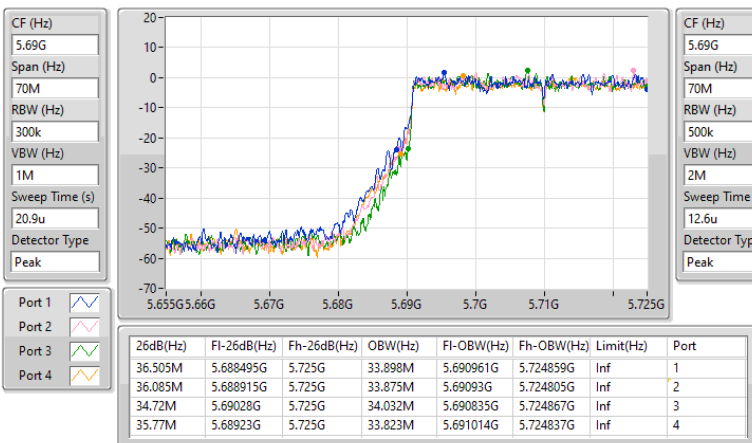


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

20/12/2024

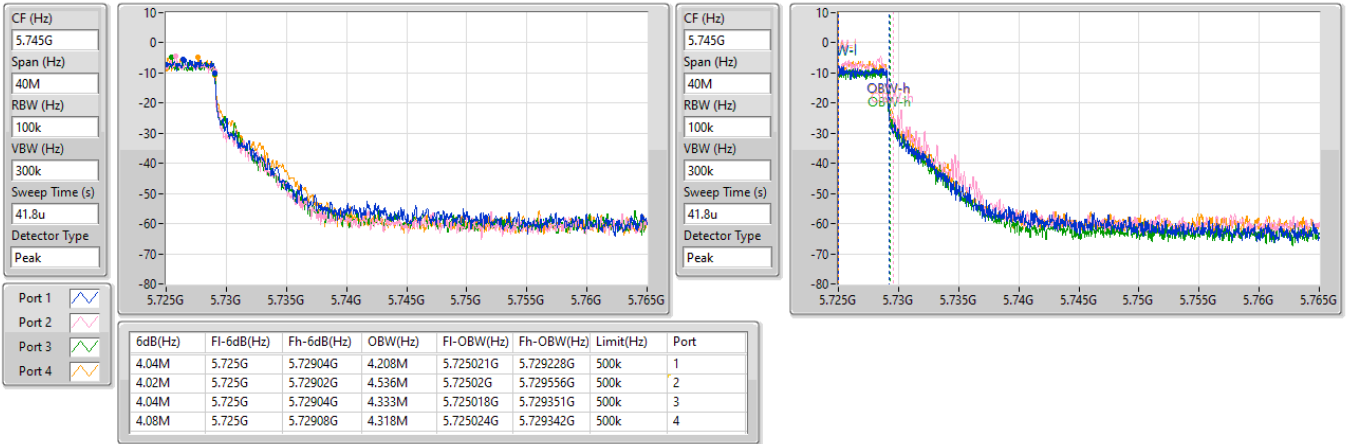


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

EBW

5710MHz Straddle 5.725-5.85GHz

20/12/2024


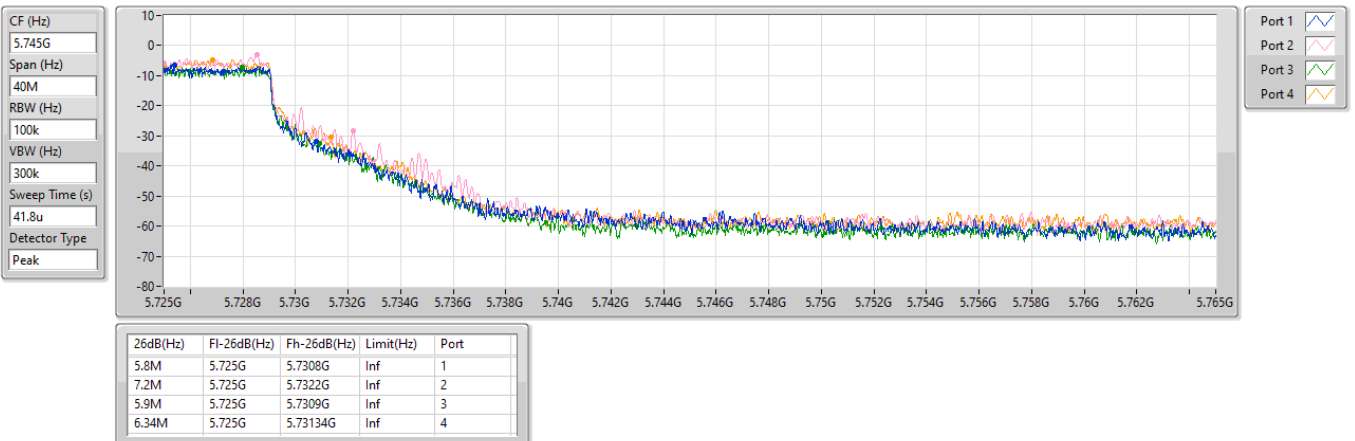


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5530MHz

20/12/2024

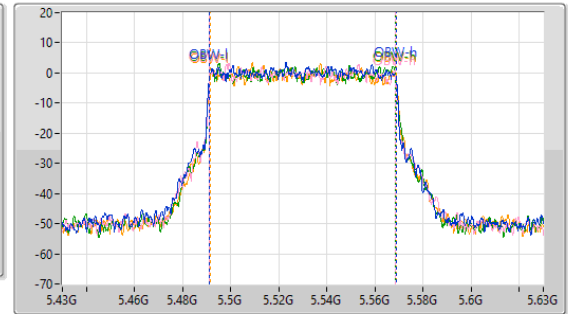
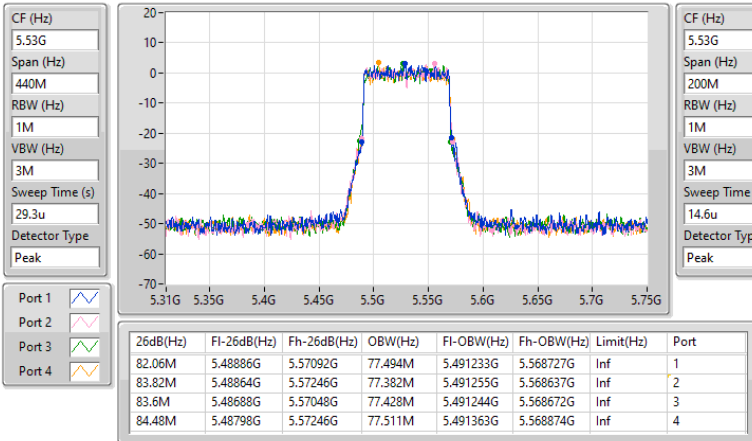


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5610MHz

20/12/2024

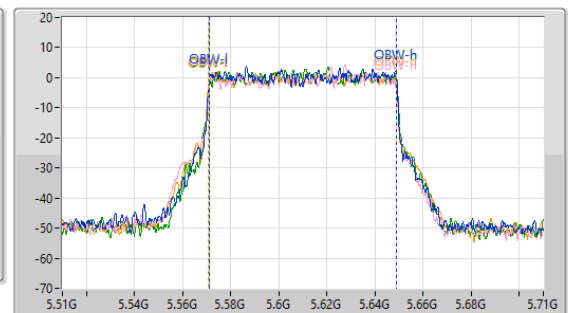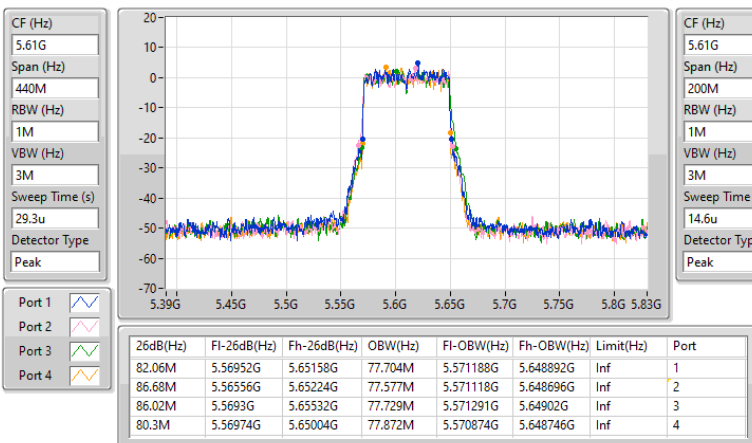


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.47-5.725GHz

20/12/2024

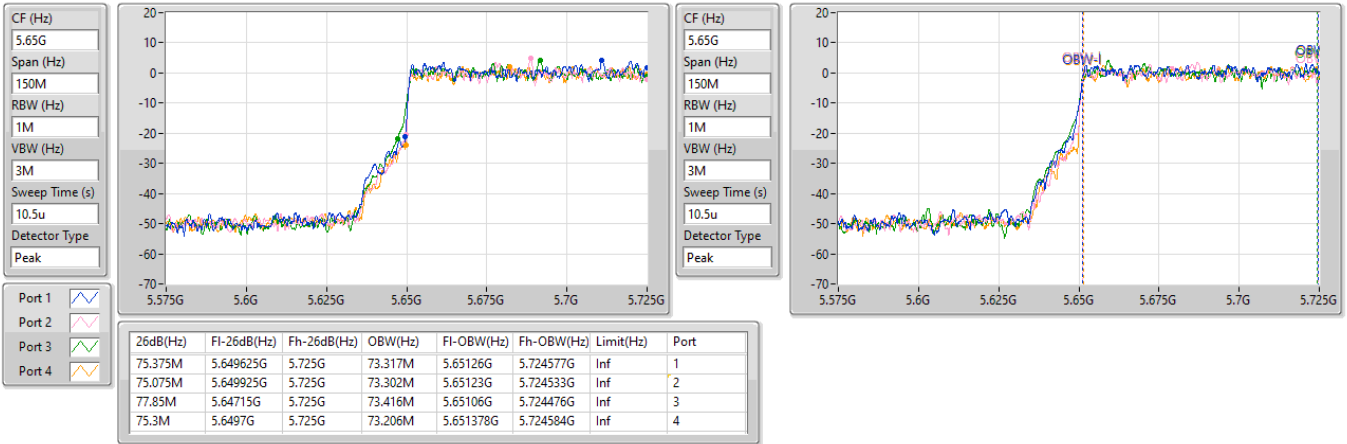


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

20/12/2024

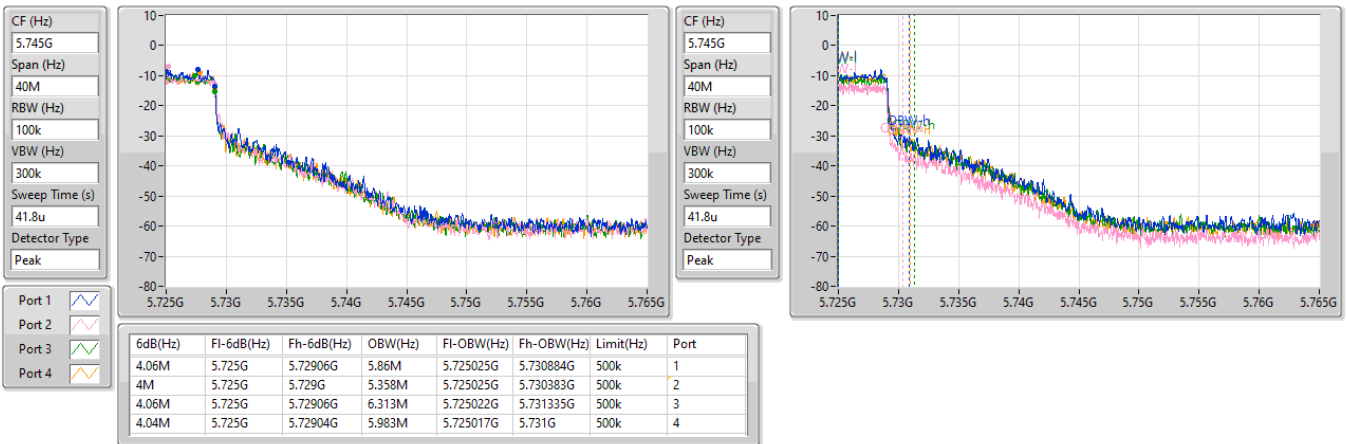


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

EBW

5690MHz Straddle 5.725-5.85GHz

20/12/2024

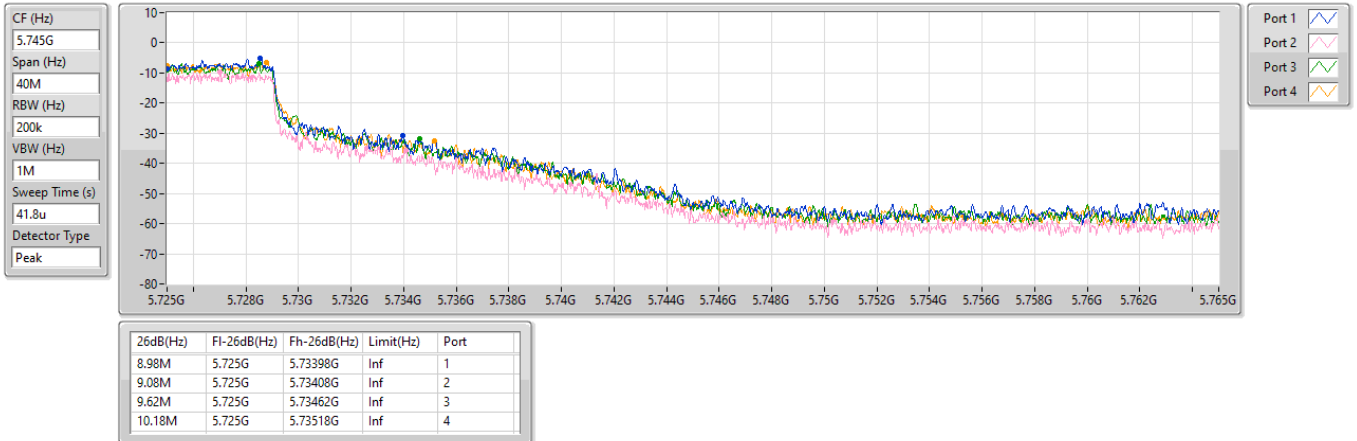


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

EBW

5570MHz

20/12/2024

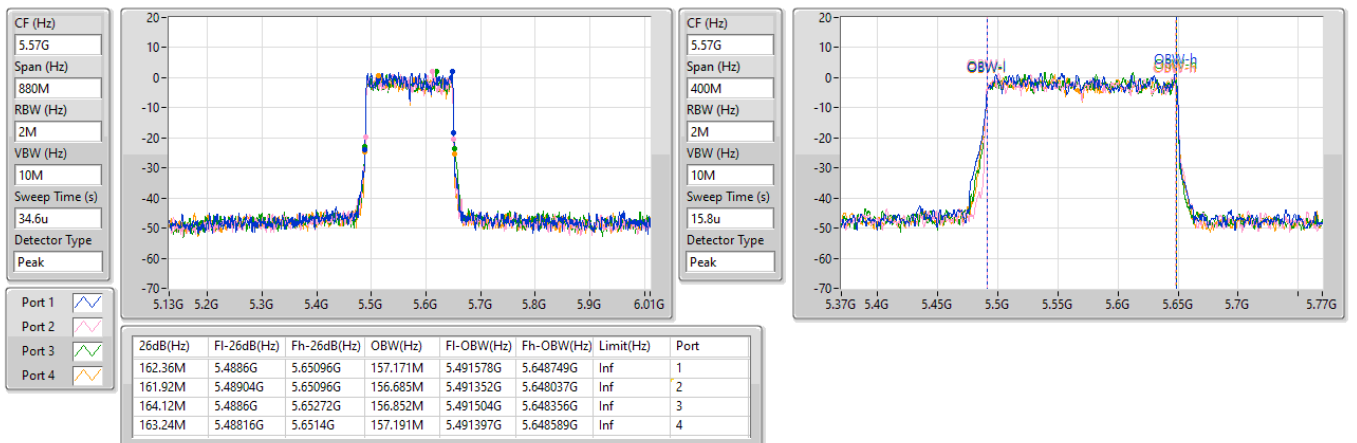



Average Power_R1
(Parent Device / FCC ID: UDX-600216010)

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	21.86	0.15346
802.11ax HEW20_Nss1,(MCS0)_1TX	22.29	0.16943
802.11ax HEW40_Nss1,(MCS0)_1TX	21.38	0.13740
802.11ax HEW80_Nss1,(MCS0)_1TX	20.31	0.10740
802.11ax HEW160_Nss1,(MCS0)_1TX	17.33	0.05408
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	14.36	0.02729
802.11ax HEW20_Nss1,(MCS0)_1TX	14.41	0.02761
802.11ax HEW40_Nss1,(MCS0)_1TX	11.20	0.01318
802.11ax HEW80_Nss1,(MCS0)_1TX	6.38	0.00435



Average Power_R1
(Parent Device / FCC ID: UDX-600216010)

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5500MHz	Pass	6.10	18.77	18.77	23.63
5580MHz	Pass	6.10	21.86	21.86	23.88
5700MHz	Pass	6.10	17.79	17.79	23.61
5720MHz Straddle 5.47-5.725GHz	Pass	6.10	20.83	20.83	23.88
5720MHz Straddle 5.725-5.85GHz	Pass	6.10	14.36	14.36	29.90
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5500MHz	Pass	6.10	18.66	18.66	23.88
5580MHz	Pass	6.10	22.29	22.29	23.88
5700MHz	Pass	6.10	17.55	17.55	23.88
5720MHz Straddle 5.47-5.725GHz	Pass	6.10	20.05	20.05	23.88
5720MHz Straddle 5.725-5.85GHz	Pass	6.10	14.41	14.41	29.90
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5510MHz	Pass	6.10	16.72	16.72	23.88
5550MHz	Pass	6.10	20.05	20.05	23.88
5670MHz	Pass	6.10	17.88	17.88	23.88
5710MHz Straddle 5.47-5.725GHz	Pass	6.10	21.38	21.38	23.88
5710MHz Straddle 5.725-5.85GHz	Pass	6.10	11.20	11.20	29.90
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5530MHz	Pass	6.10	16.37	16.37	23.88
5610MHz	Pass	6.10	18.45	18.45	23.88
5690MHz Straddle 5.47-5.725GHz	Pass	6.10	20.31	20.31	23.88
5690MHz Straddle 5.725-5.85GHz	Pass	6.10	6.38	6.38	29.90
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-
5570MHz	Pass	6.10	17.33	17.33	23.88


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

21/12/2024

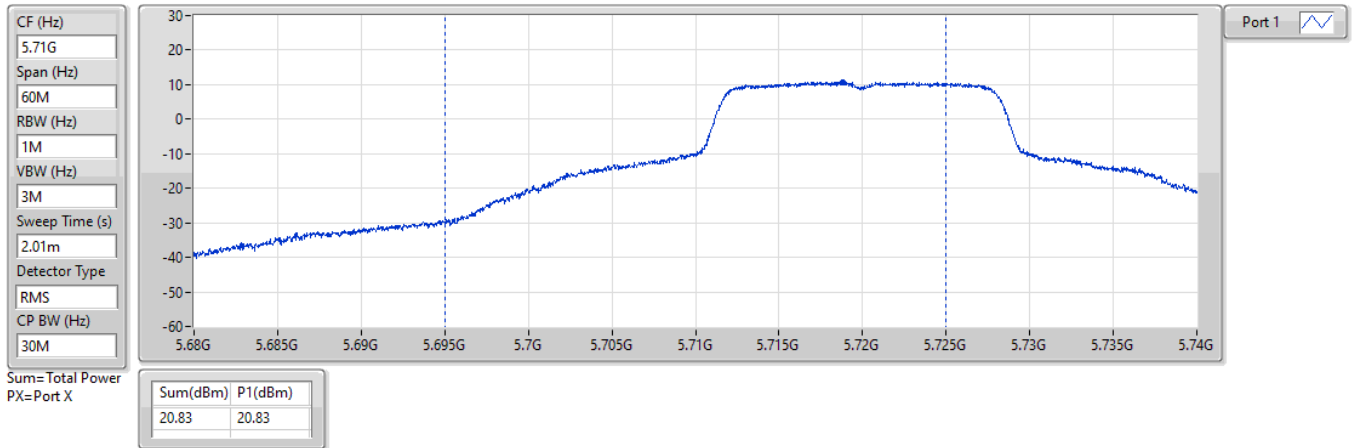


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

21/12/2024

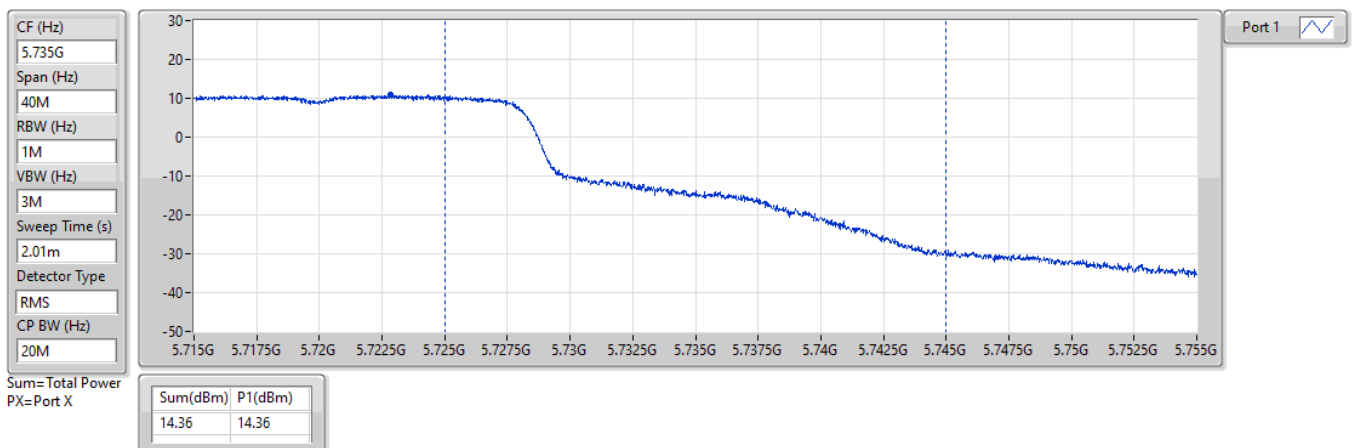


5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

21/12/2024

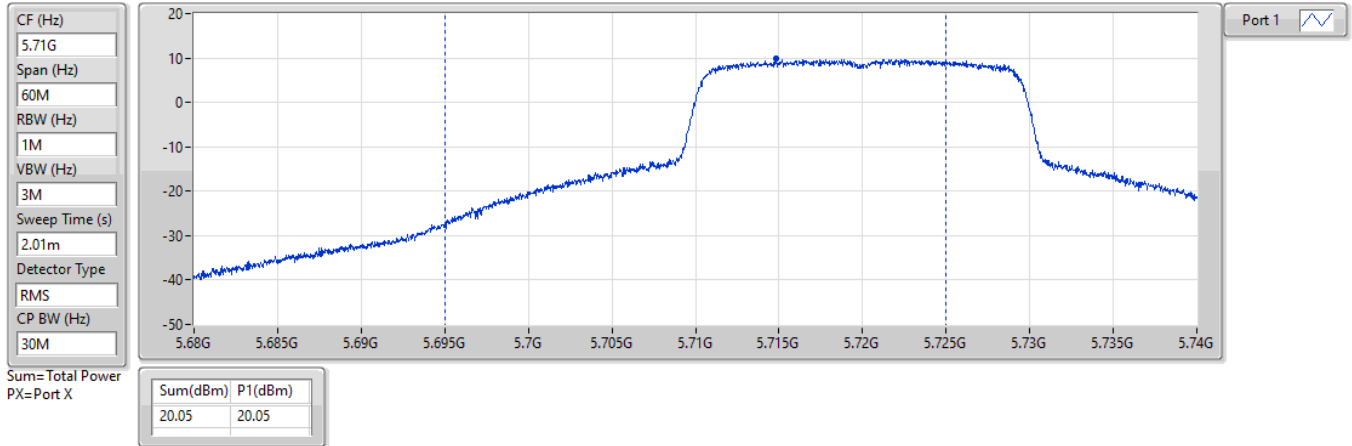


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

21/12/2024

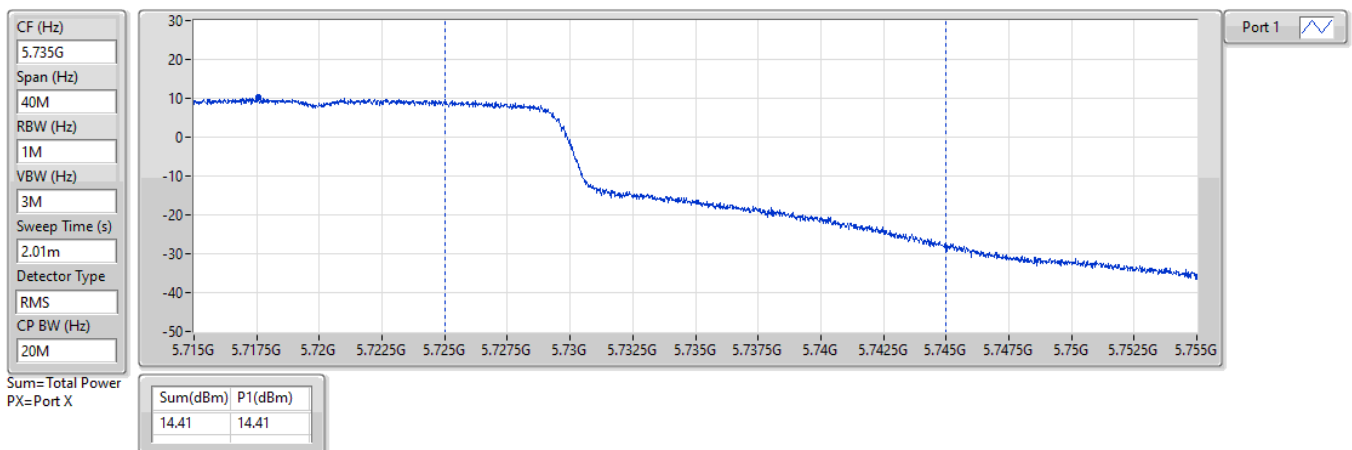


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

21/12/2024

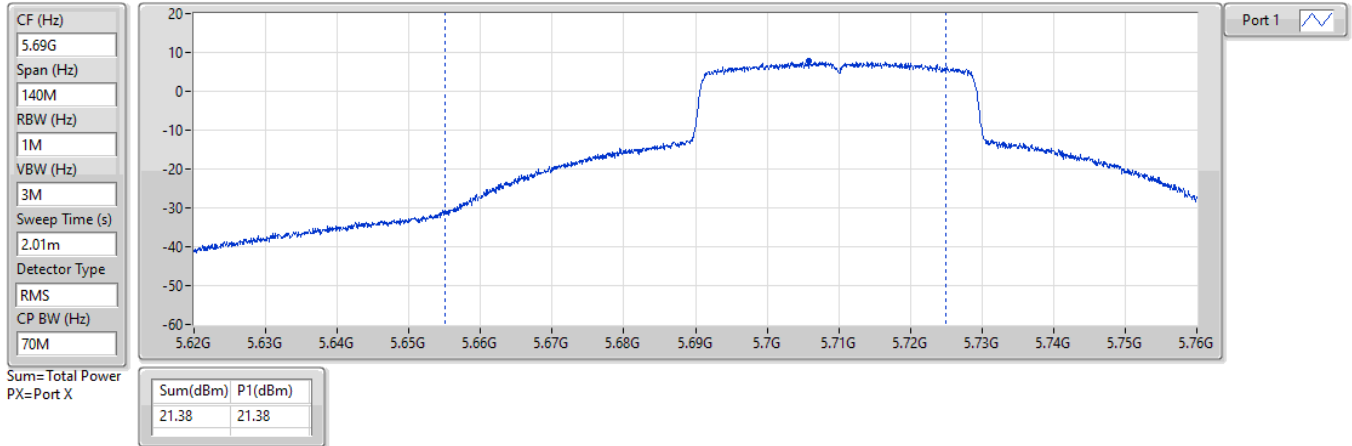


5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

21/12/2024

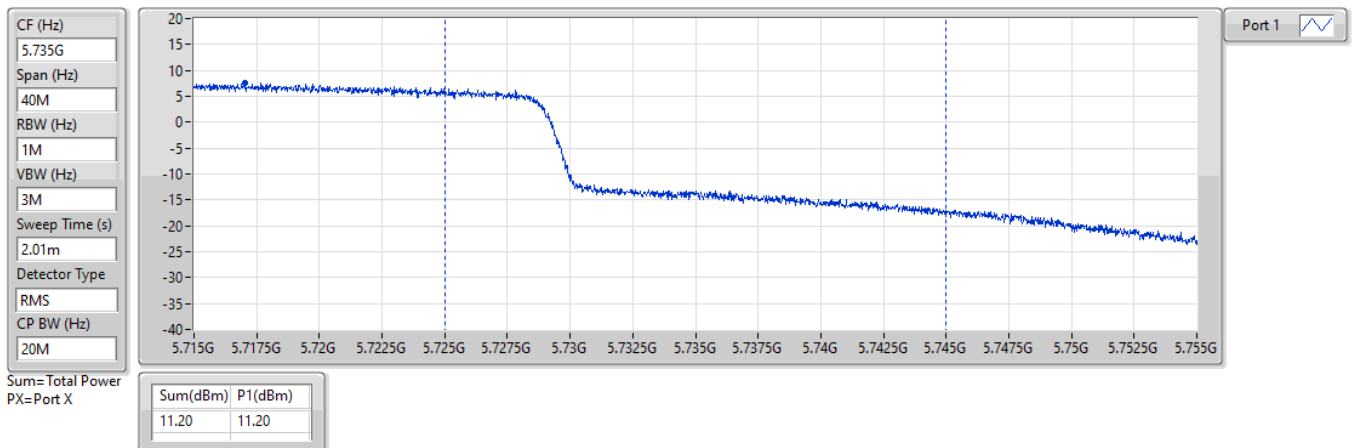


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

21/12/2024

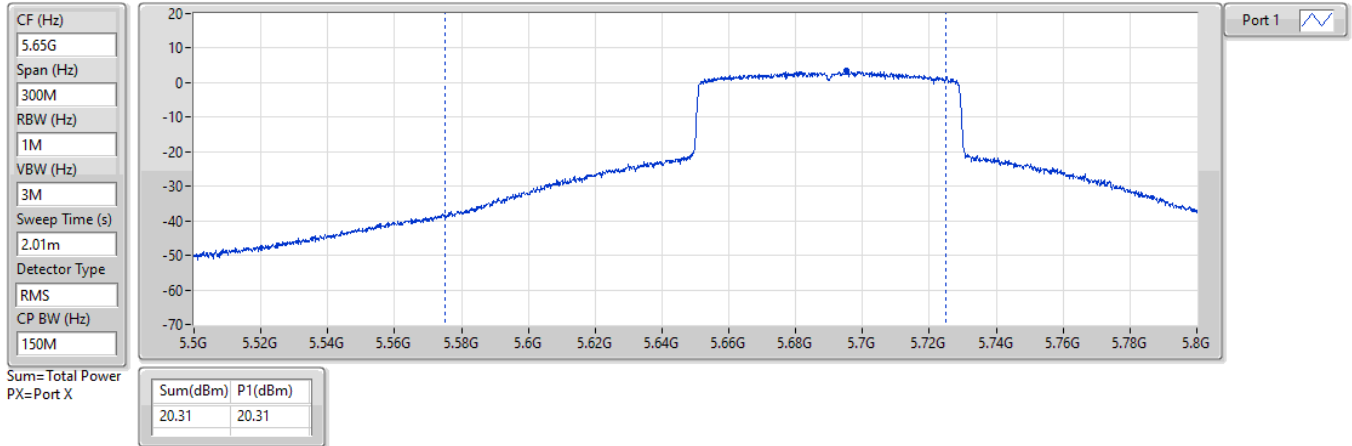


5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

21/12/2024

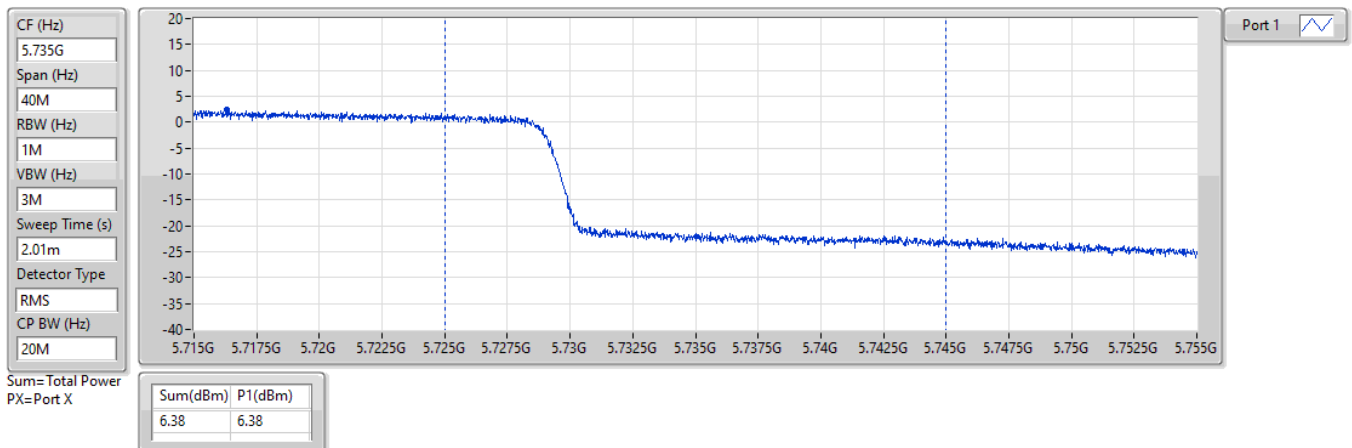



Average Power_R3
(Parent Device / FCC ID: UDX-600216010)

Appendix C.2

Summary

Mode	Total Power (dBm)	Total Power (W)
5.47-5.725GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	18.36	0.06855
802.11a_Nss1,(6Mbps)_2TX	19.10	0.08128
802.11a_Nss1,(6Mbps)_4TX	17.09	0.05117
802.11be EHT20_Nss1,(MCS0)_1TX	18.94	0.07834
802.11be EHT20_Nss1,(MCS0)_2TX	19.19	0.08299
802.11be EHT20_Nss1,(MCS0)_4TX	17.66	0.05834
802.11be EHT20-BF_Nss1,(MCS0)_2TX	19.19	0.08299
802.11be EHT20-BF_Nss1,(MCS0)_4TX	16.36	0.04325
802.11be EHT40_Nss1,(MCS0)_1TX	18.99	0.07925
802.11be EHT40_Nss1,(MCS0)_2TX	19.10	0.08128
802.11be EHT40_Nss1,(MCS0)_4TX	19.18	0.08279
802.11be EHT40-BF_Nss1,(MCS0)_2TX	19.10	0.08128
802.11be EHT40-BF_Nss1,(MCS0)_4TX	16.36	0.04325
802.11be EHT80_Nss1,(MCS0)_1TX	18.94	0.07834
802.11be EHT80_Nss1,(MCS0)_2TX	18.99	0.07925
802.11be EHT80_Nss1,(MCS0)_4TX	19.21	0.08337
802.11be EHT80-BF_Nss1,(MCS0)_2TX	18.99	0.07925
802.11be EHT80-BF_Nss1,(MCS0)_4TX	16.51	0.04477
802.11be EHT160_Nss1,(MCS0)_1TX	18.33	0.06808
802.11be EHT160_Nss1,(MCS0)_2TX	19.16	0.08241
802.11be EHT160_Nss1,(MCS0)_4TX	17.39	0.05483
802.11be EHT160-BF_Nss1,(MCS0)_2TX	19.16	0.08241
802.11be EHT160-BF_Nss1,(MCS0)_4TX	16.19	0.04159
5.725-5.85GHz	-	-
802.11a_Nss1,(6Mbps)_1TX	11.52	0.01419
802.11a_Nss1,(6Mbps)_2TX	12.11	0.01626
802.11a_Nss1,(6Mbps)_4TX	9.63	0.00918
802.11be EHT20_Nss1,(MCS0)_1TX	13.00	0.01995
802.11be EHT20_Nss1,(MCS0)_2TX	13.08	0.02032
802.11be EHT20_Nss1,(MCS0)_4TX	11.08	0.01282
802.11be EHT20-BF_Nss1,(MCS0)_2TX	13.08	0.02032
802.11be EHT20-BF_Nss1,(MCS0)_4TX	9.73	0.00940
802.11be EHT40_Nss1,(MCS0)_1TX	10.07	0.01016
802.11be EHT40_Nss1,(MCS0)_2TX	10.16	0.01038
802.11be EHT40_Nss1,(MCS0)_4TX	9.93	0.00984
802.11be EHT40-BF_Nss1,(MCS0)_2TX	10.16	0.01038
802.11be EHT40-BF_Nss1,(MCS0)_4TX	7.07	0.00509
802.11be EHT80_Nss1,(MCS0)_1TX	6.27	0.00424
802.11be EHT80_Nss1,(MCS0)_2TX	6.51	0.00448
802.11be EHT80_Nss1,(MCS0)_4TX	6.28	0.00425
802.11be EHT80-BF_Nss1,(MCS0)_2TX	6.51	0.00448
802.11be EHT80-BF_Nss1,(MCS0)_4TX	3.85	0.00243



Average Power_R3
(Parent Device / FCC ID: UDX-600216010)

Appendix C.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	18.26				18.26	19.28
5580MHz	Pass	10.70	18.10				18.10	19.28
5700MHz	Pass	10.70	18.36				18.36	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	17.47				17.47	19.04
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	11.52				11.52	25.60
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	18.94				18.94	19.28
5580MHz	Pass	10.70	18.78				18.78	19.28
5700MHz	Pass	10.70	18.19				18.19	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	17.87				17.87	19.28
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	13.00				13.00	25.60
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	18.45				18.45	19.28
5550MHz	Pass	10.70	18.83				18.83	19.28
5670MHz	Pass	10.70	18.83				18.83	19.28
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	18.99				18.99	19.28
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	10.07				10.07	25.60
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	17.76				17.76	19.28
5610MHz	Pass	10.70	18.94				18.94	19.28
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	18.83				18.83	19.28
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	6.27				6.27	25.60
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	18.33				18.33	19.28
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	16.35	15.41			18.92	19.28
5580MHz	Pass	10.70	16.10	15.96			19.04	19.28
5700MHz	Pass	10.70	16.33	15.83			19.10	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	15.32	14.72			18.04	18.34
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	9.43	8.75			12.11	25.60
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	16.48	15.55			19.05	19.28
5580MHz	Pass	10.70	16.29	16.01			19.16	19.28
5700MHz	Pass	10.70	16.42	15.92			19.19	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	15.24	14.50			17.90	18.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	10.36	9.76			13.08	25.60
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	16.42	15.62			19.05	19.28
5550MHz	Pass	10.70	16.27	15.54			18.93	19.28
5670MHz	Pass	10.70	16.10	15.47			18.81	19.28
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	16.44	15.70			19.10	19.28
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	7.59	6.66			10.16	25.60
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	16.26	15.41			18.87	19.28
5610MHz	Pass	10.70	16.16	15.79			18.99	19.28
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	16.27	15.63			18.97	19.28
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	3.82	3.15			6.51	25.60
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	16.45	15.82			19.16	19.28
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	11.29	10.52	10.72	10.44	16.78	19.28
5580MHz	Pass	10.70	10.96	10.64	10.62	10.37	16.67	19.28
5700MHz	Pass	10.70	11.58	10.81	11.13	10.69	17.09	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	10.06	9.24	9.28	9.44	15.54	18.27



Average Power_R3
(Parent Device / FCC ID: UDX-600216010)

Appendix C.2

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	4.03	3.27	3.57	3.52	9.63	25.60
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	11.99	11.11	11.26	11.05	17.39	19.28
5580MHz	Pass	10.70	11.70	11.25	11.36	10.94	17.34	19.28
5700MHz	Pass	10.70	12.07	11.47	11.68	11.32	17.66	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	10.48	9.66	9.72	9.68	15.92	18.23
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	5.49	4.75	5.04	4.91	11.08	25.60
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	13.71	12.84	13.18	12.85	19.18	19.28
5550MHz	Pass	10.70	13.52	12.64	12.98	12.76	19.01	19.28
5670MHz	Pass	10.70	13.49	12.67	13.00	12.50	18.95	19.28
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	13.42	12.93	13.11	12.82	19.10	19.28
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	4.34	3.66	3.74	3.88	9.93	25.60
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	13.63	12.79	13.02	12.79	19.09	19.28
5610MHz	Pass	10.70	13.57	13.06	13.20	12.92	19.21	19.28
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	13.56	12.66	12.84	12.66	18.97	19.28
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	0.92	-0.13	-0.08	0.24	6.28	25.60
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	11.91	11.10	11.32	11.08	17.39	19.28
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	16.48	15.55			19.05	19.28
5580MHz	Pass	10.70	16.29	16.01			19.16	19.28
5700MHz	Pass	10.70	16.42	15.92			19.19	19.28
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	15.24	14.50			17.90	18.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	10.36	9.76			13.08	25.60
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	16.42	15.62			19.05	19.28
5550MHz	Pass	10.70	16.27	15.54			18.93	19.28
5670MHz	Pass	10.70	16.10	15.47			18.81	19.28
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	16.44	15.70			19.10	19.28
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	7.59	6.66			10.16	25.60
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	16.26	15.41			18.87	19.28
5610MHz	Pass	10.70	16.16	15.79			18.99	19.28
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	16.27	15.63			18.97	19.28
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	3.82	3.15			6.51	25.60
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	16.45	15.82			19.16	19.28
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5500MHz	Pass	13.42	10.77	10.14	10.22	10.20	16.36	16.56
5580MHz	Pass	13.42	10.29	10.46	10.14	10.05	16.26	16.56
5700MHz	Pass	13.42	10.53	10.14	10.07	10.11	16.24	16.56
5720MHz Straddle 5.47-5.725GHz	Pass	13.42	9.51	8.87	8.71	9.13	15.09	15.51
5720MHz Straddle 5.725-5.85GHz	Pass	13.21	4.14	3.50	3.48	3.69	9.73	22.79
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5510MHz	Pass	13.42	10.79	10.02	10.26	10.26	16.36	16.56
5550MHz	Pass	13.42	10.57	9.94	9.72	9.96	16.08	16.56
5670MHz	Pass	13.42	10.57	9.91	9.93	9.83	16.09	16.56
5710MHz Straddle 5.47-5.725GHz	Pass	13.42	10.73	9.91	10.01	10.21	16.25	16.56
5710MHz Straddle 5.725-5.85GHz	Pass	13.21	1.61	0.71	0.63	1.19	7.07	22.79
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5530MHz	Pass	13.42	10.83	10.03	9.88	10.10	16.25	16.56
5610MHz	Pass	13.42	10.67	10.38	10.46	10.32	16.48	16.56
5690MHz Straddle 5.47-5.725GHz	Pass	13.42	11.11	10.14	10.35	10.27	16.51	16.56
5690MHz Straddle 5.725-5.85GHz	Pass	13.21	-1.48	-2.52	-2.65	-2.14	3.85	22.79



Average Power_R3
(Parent Device / FCC ID: UDX-600216010)

Appendix C.2

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	13.42	10.67	10.05	9.96	9.97	16.19	16.56


DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

18/12/2024

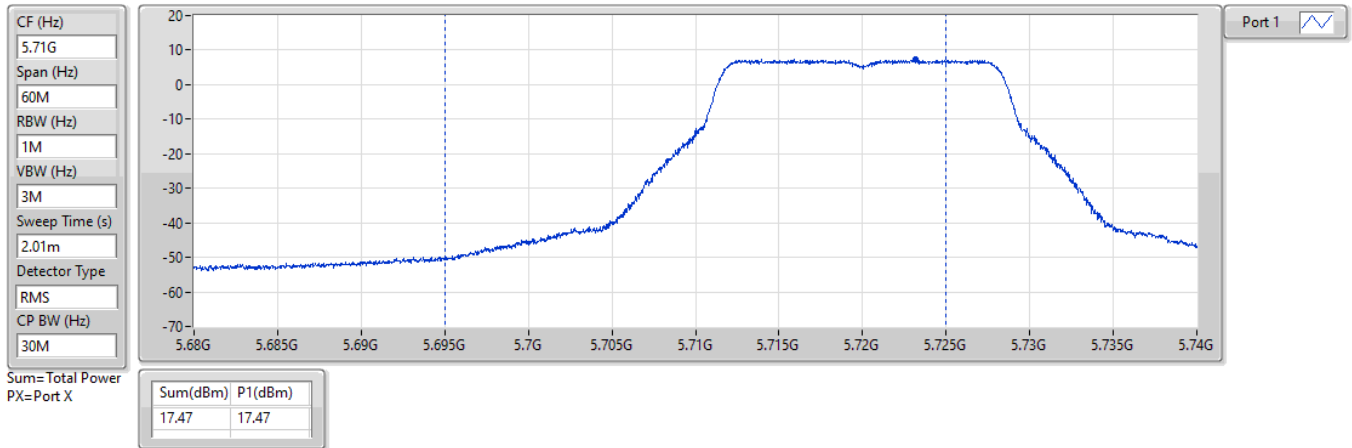


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

18/12/2024

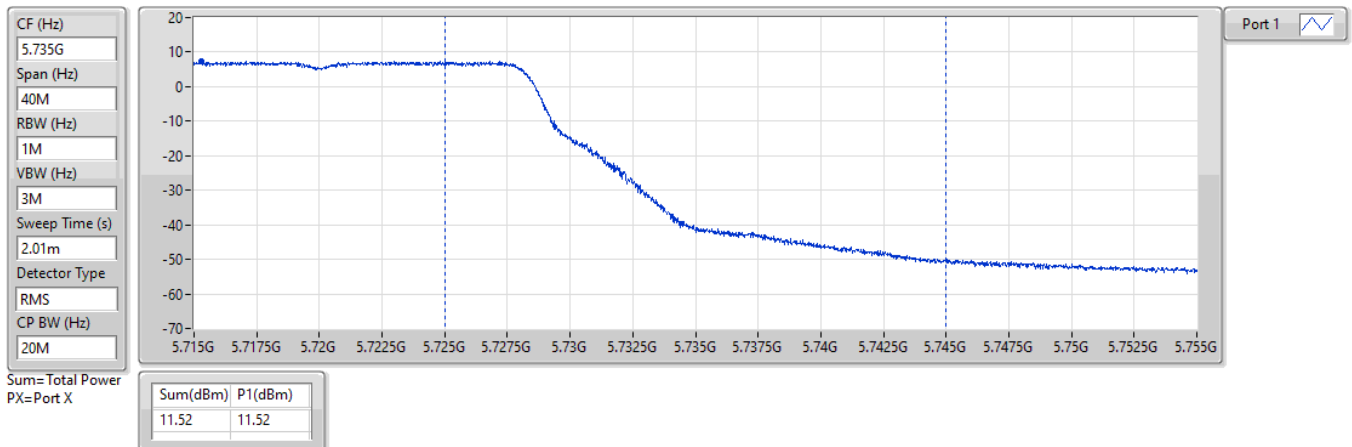


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

18/12/2024

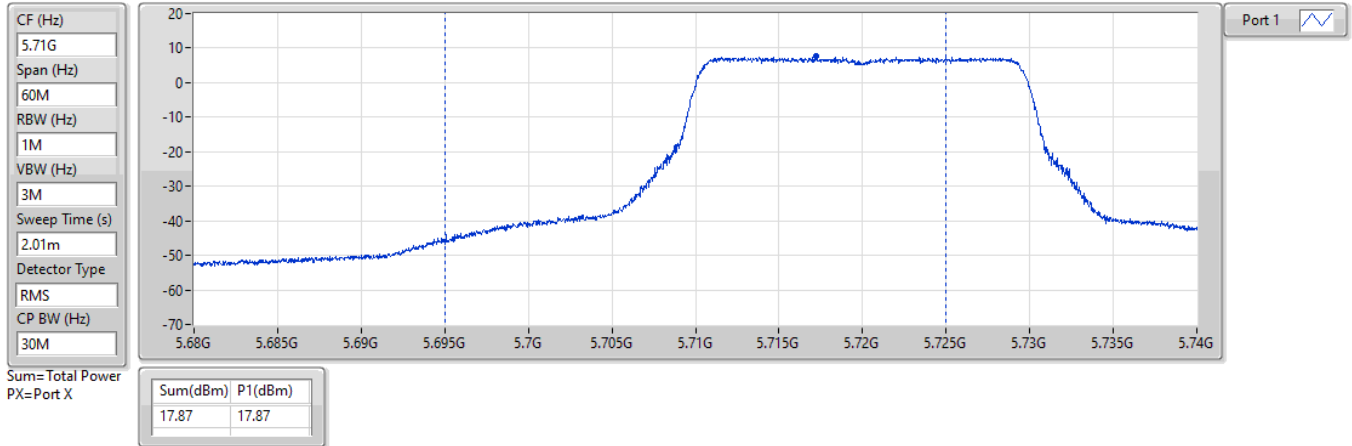


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

18/12/2024

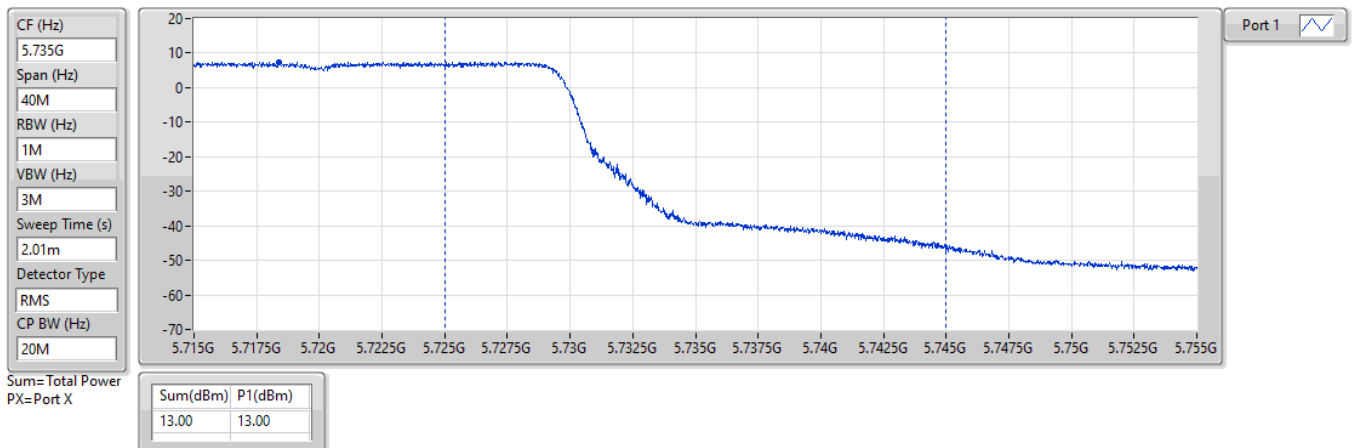


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

27/12/2024

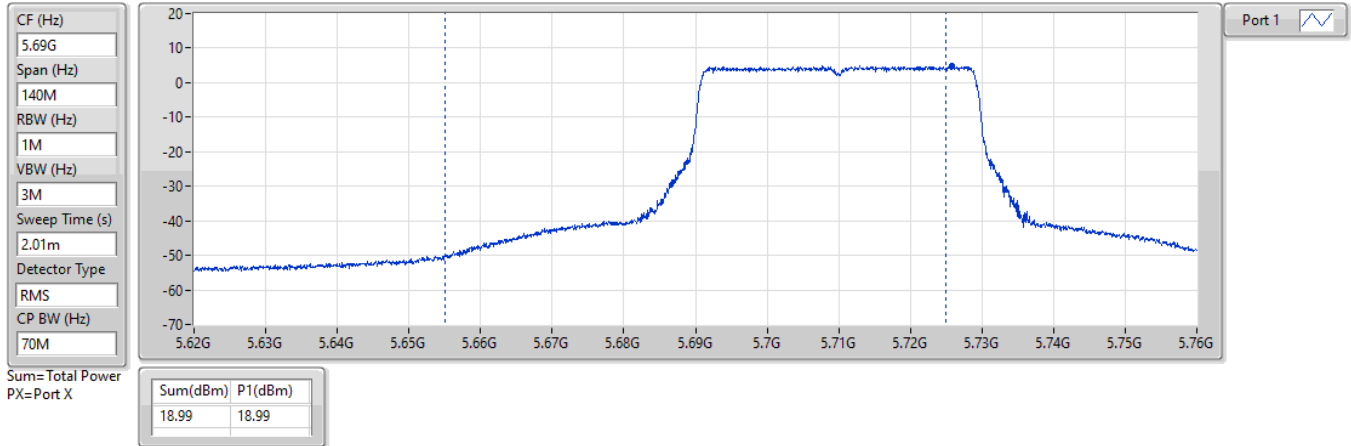


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

27/12/2024

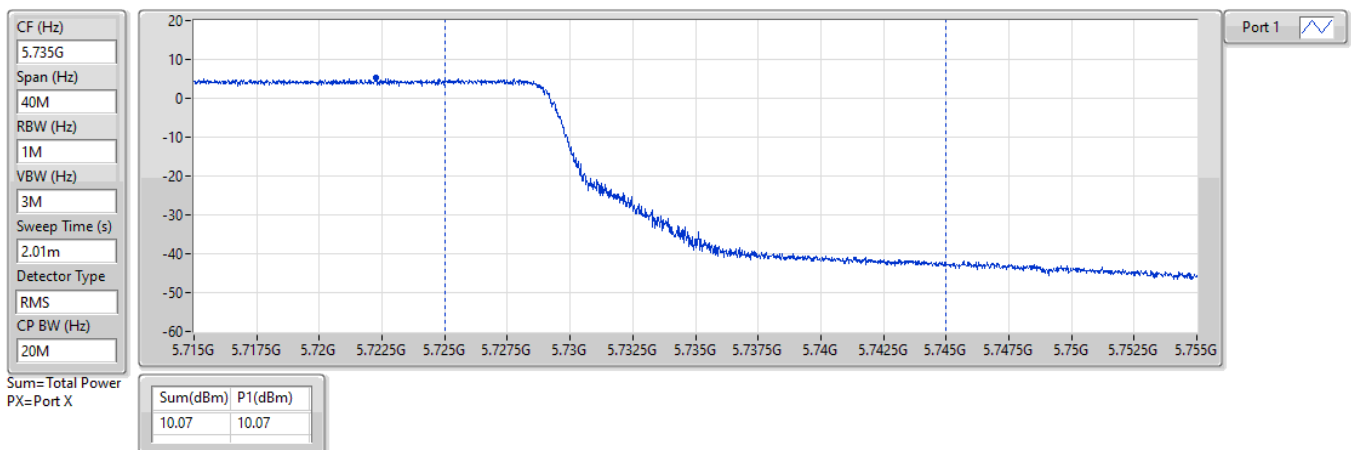


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

18/12/2024

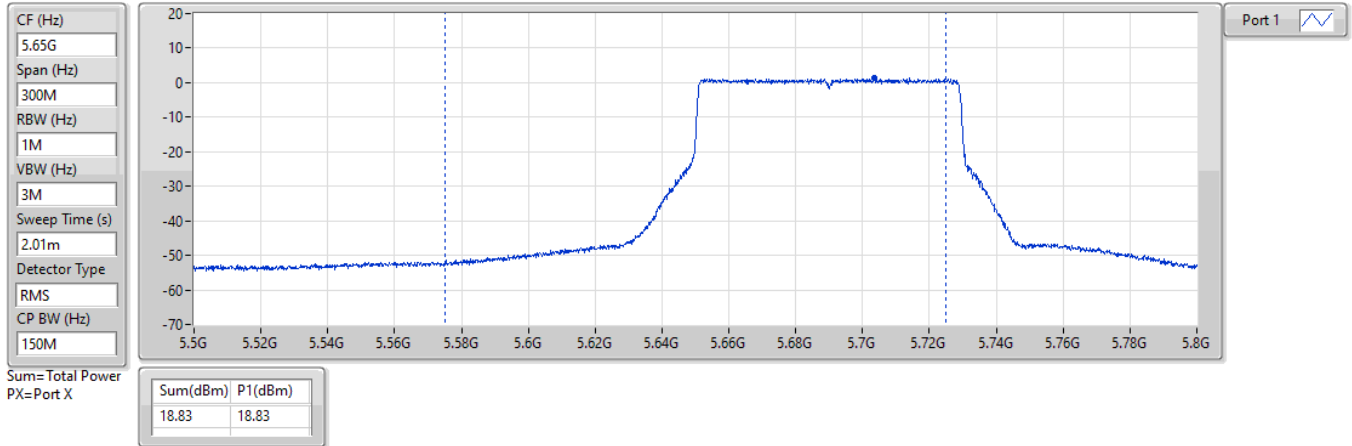


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

18/12/2024

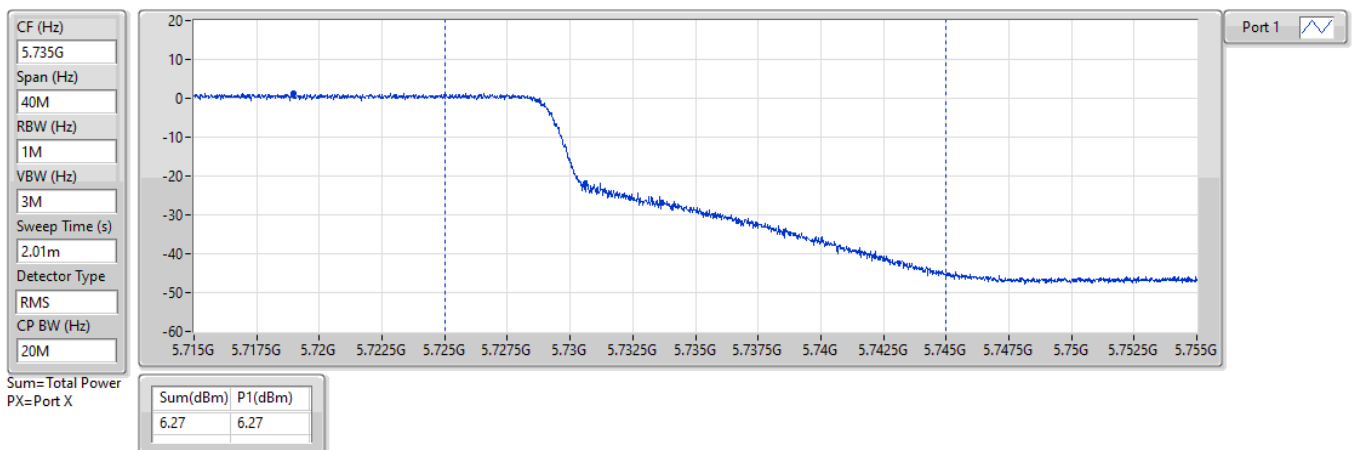


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

27/12/2024

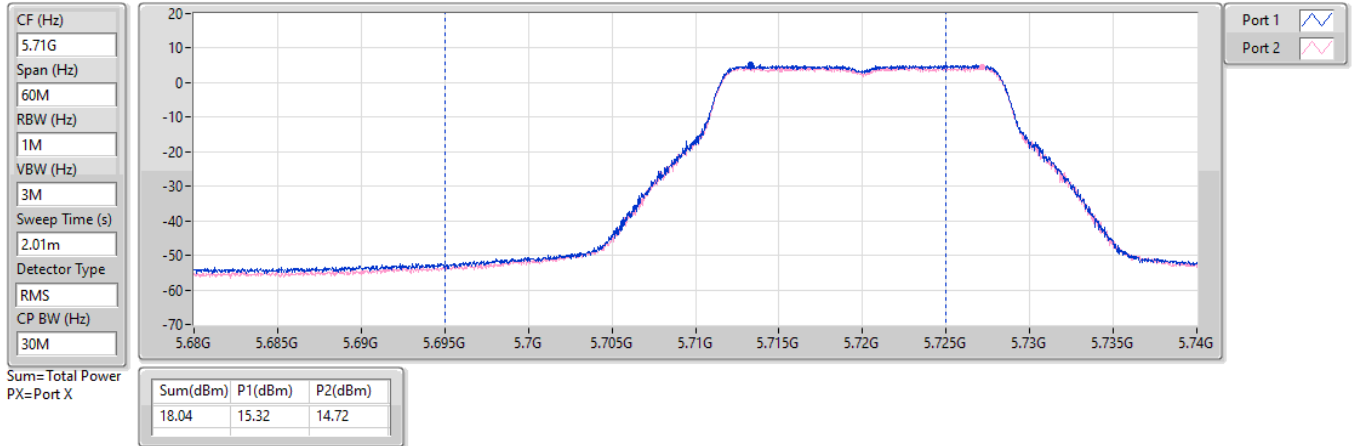


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

27/12/2024

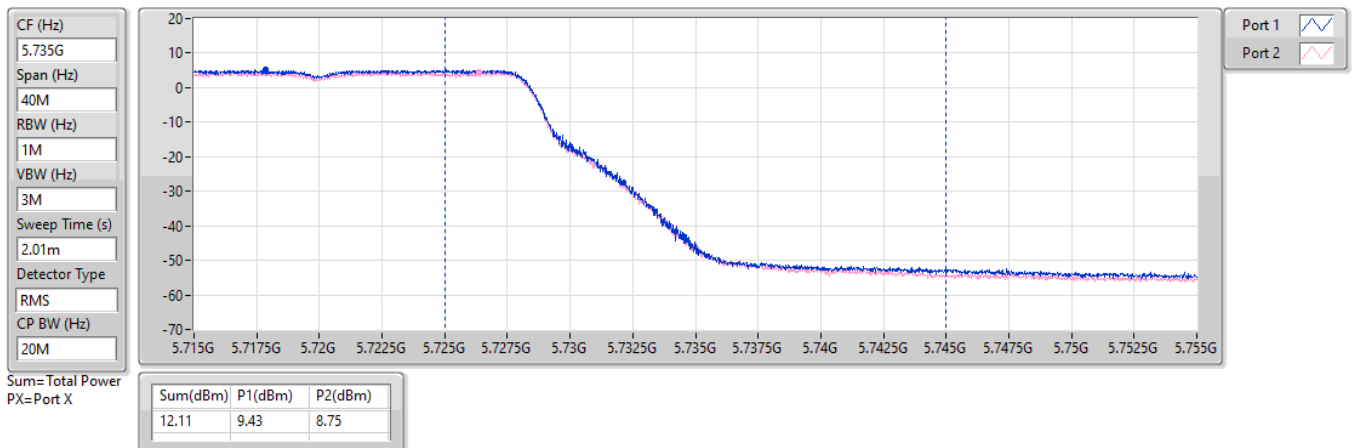


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

27/12/2024

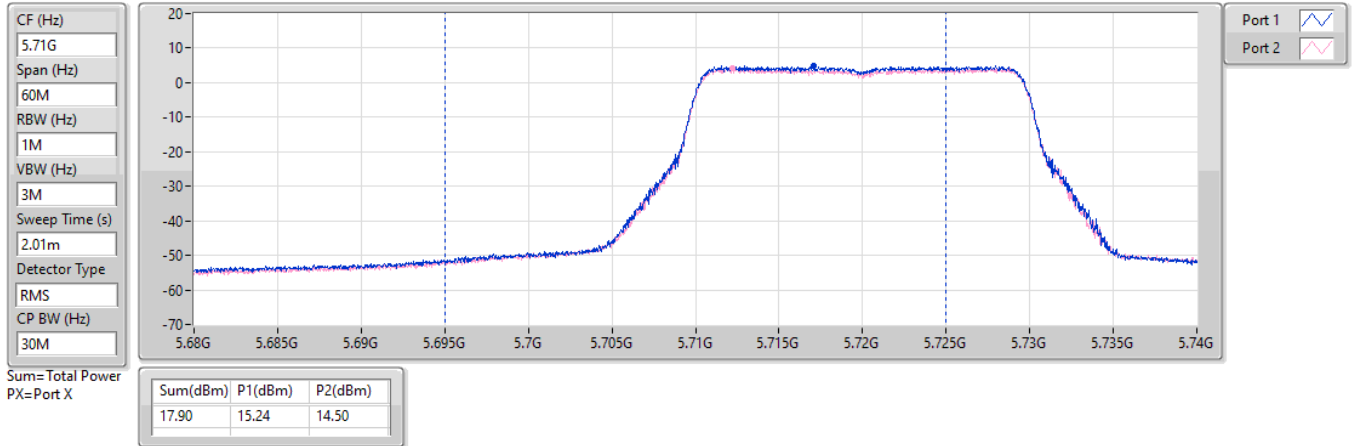


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

27/12/2024

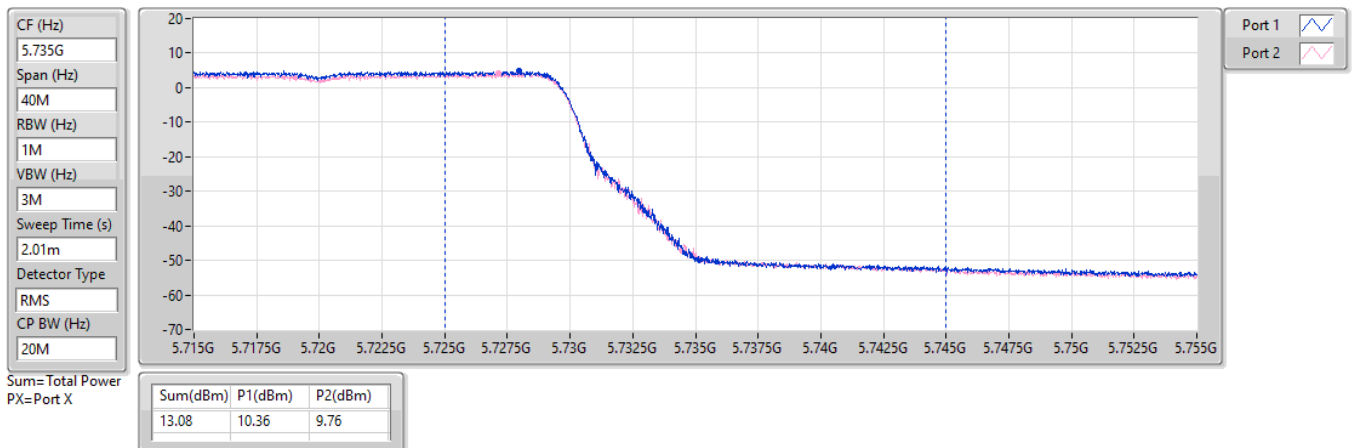


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

27/12/2024

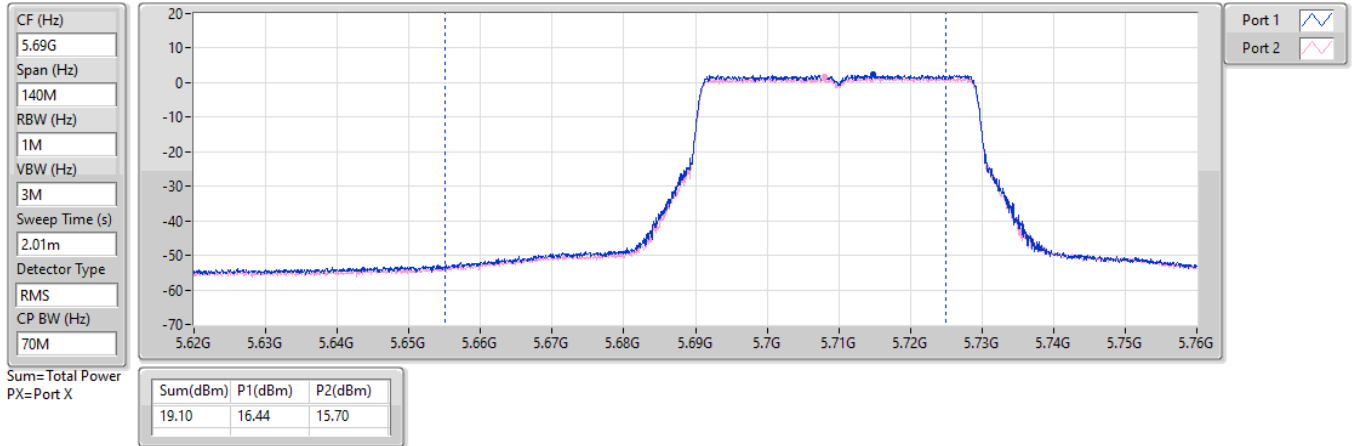


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

27/12/2024

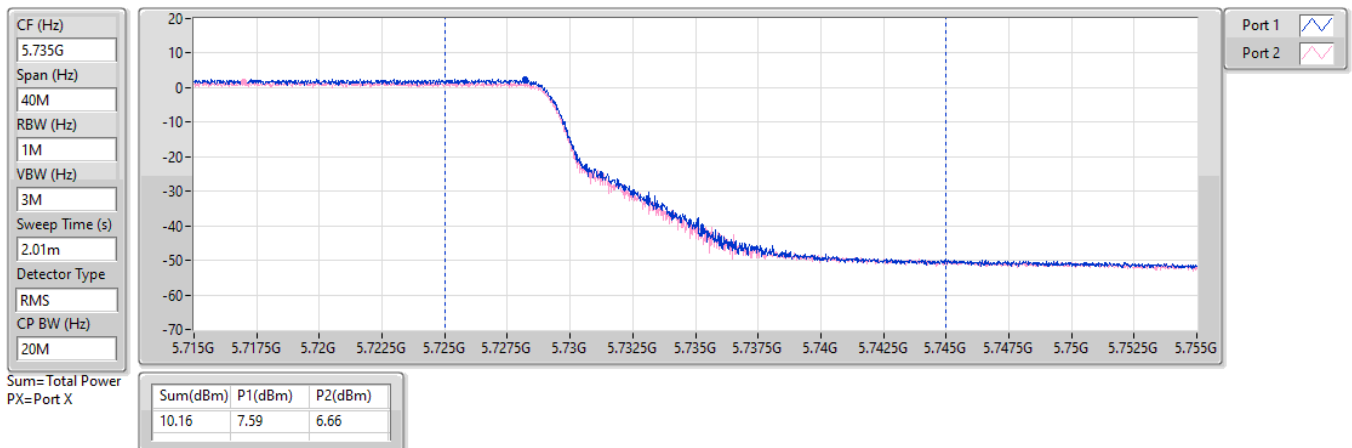


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

27/12/2024

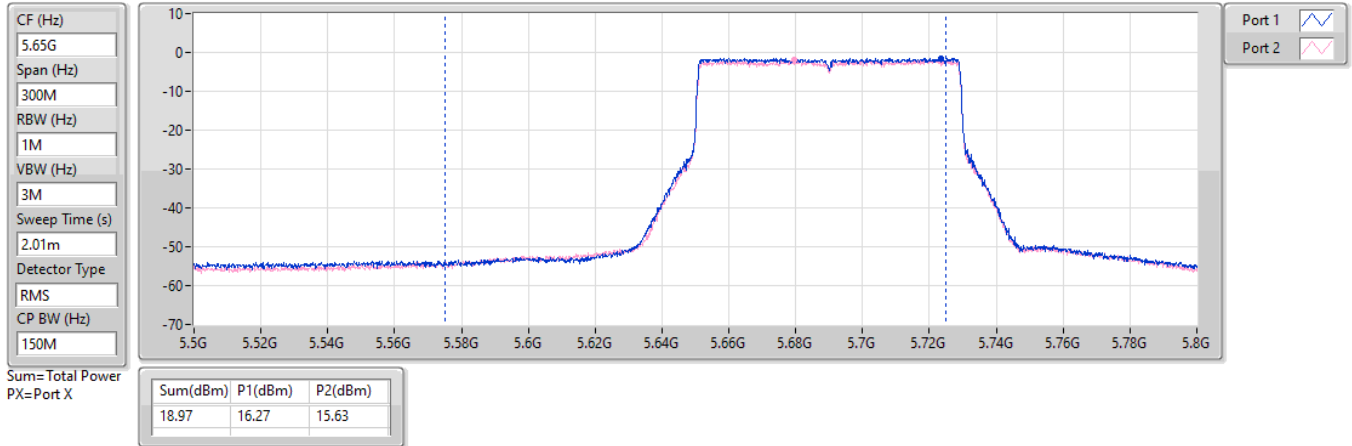


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

27/12/2024

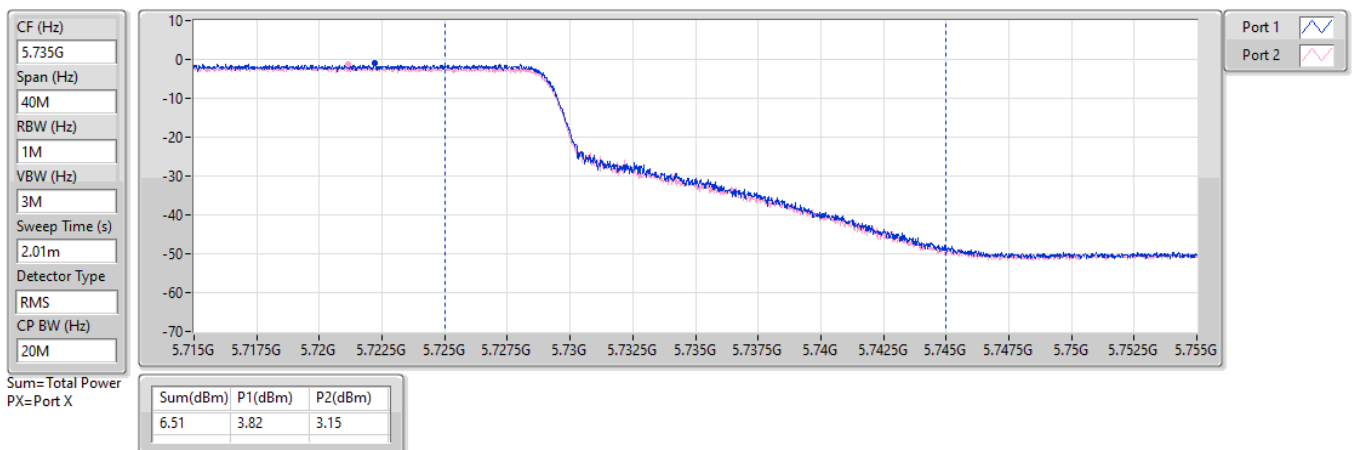


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

20/12/2024

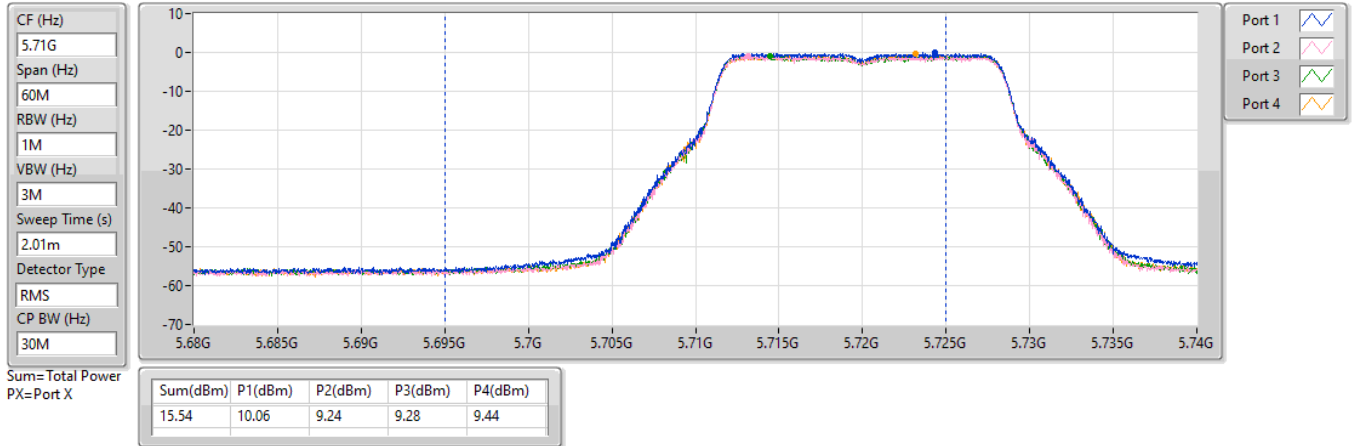


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

20/12/2024

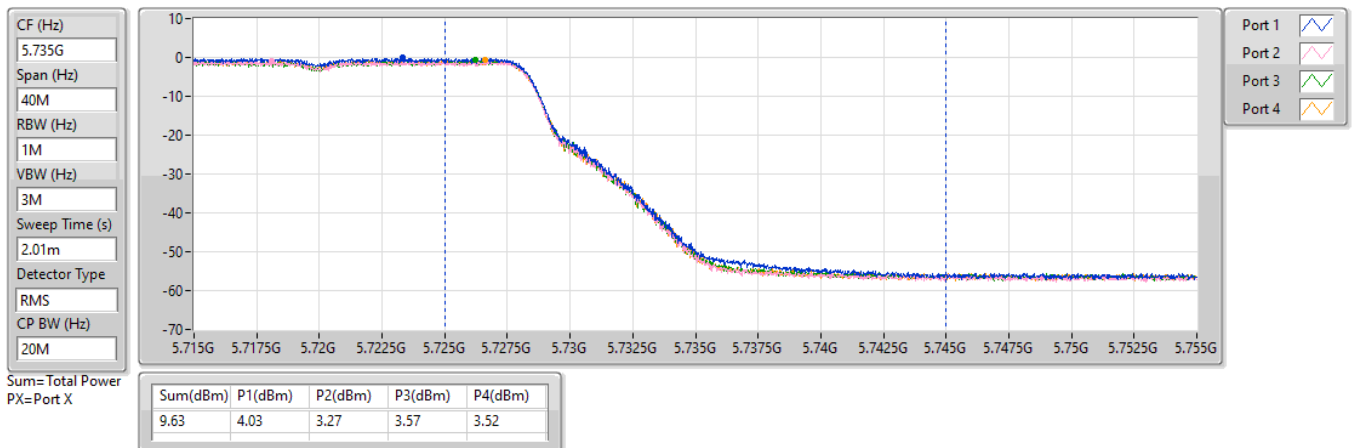


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

20/12/2024

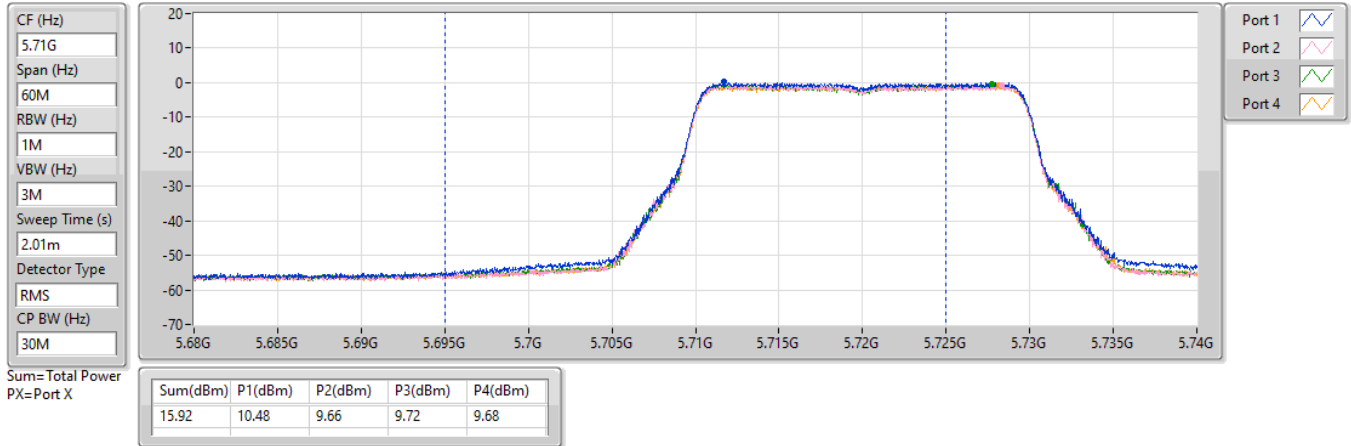


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

20/12/2024

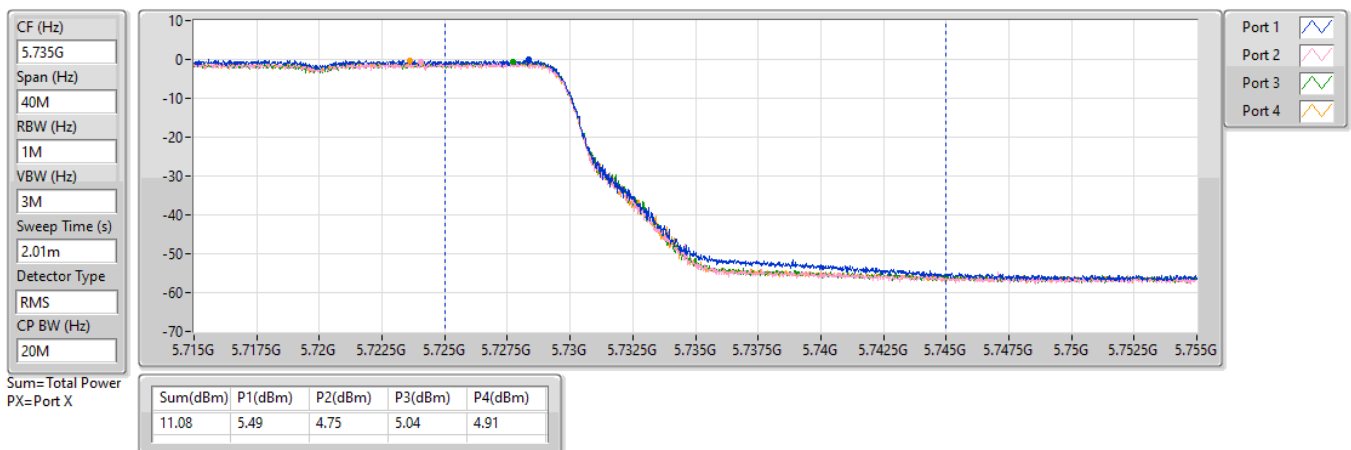


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

20/12/2024

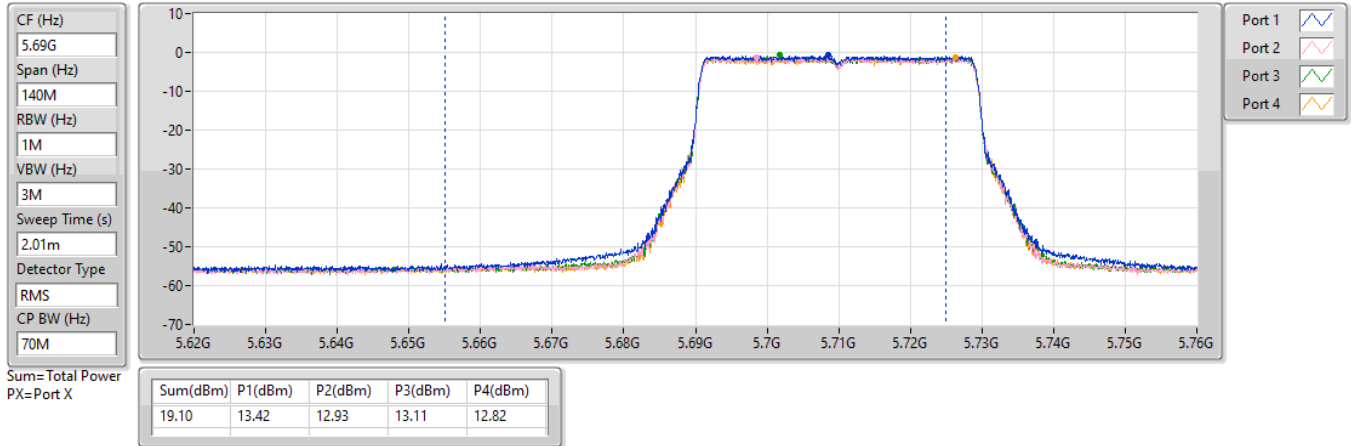


5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

20/12/2024

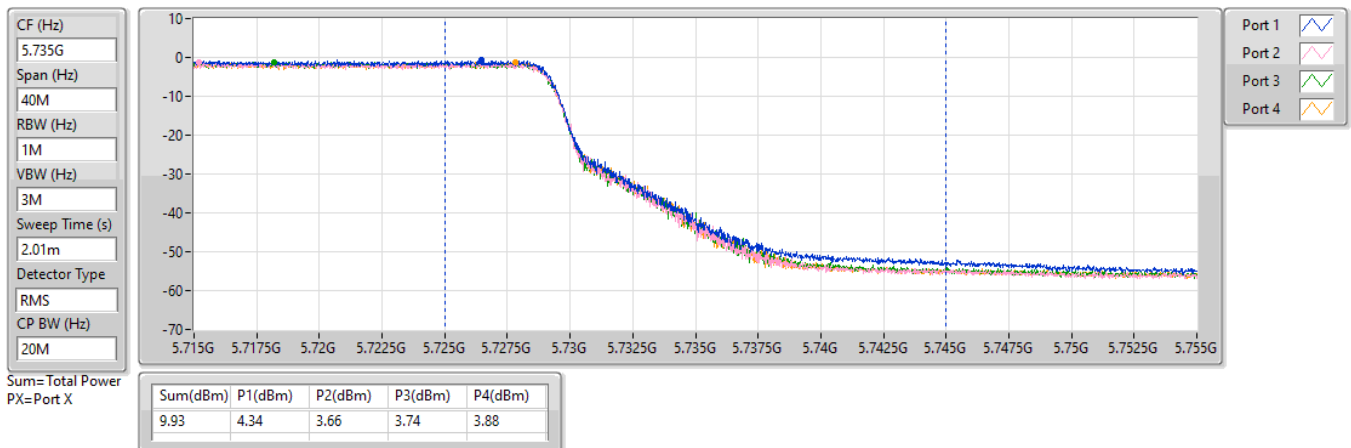


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

20/12/2024

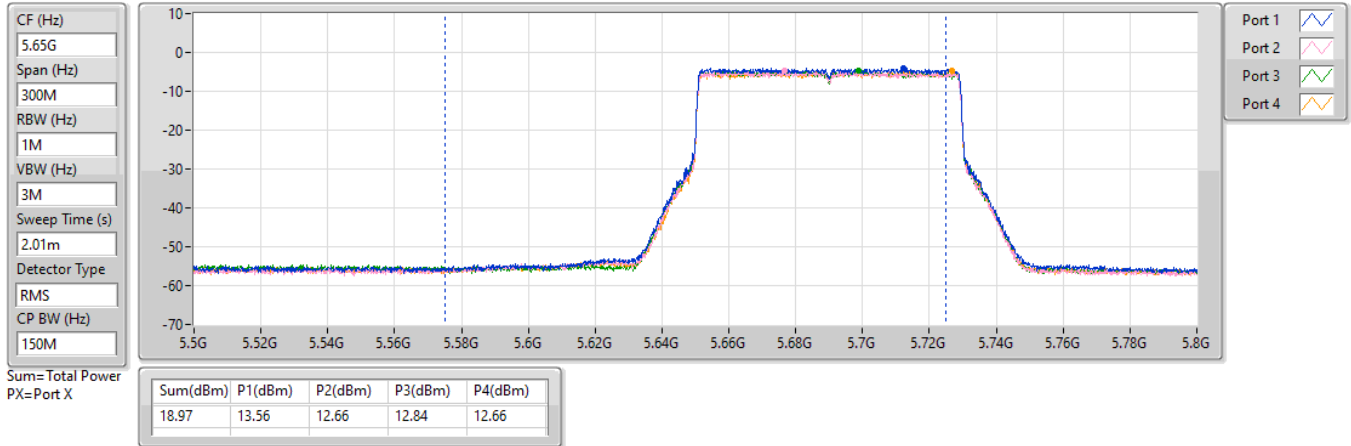


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

20/12/2024

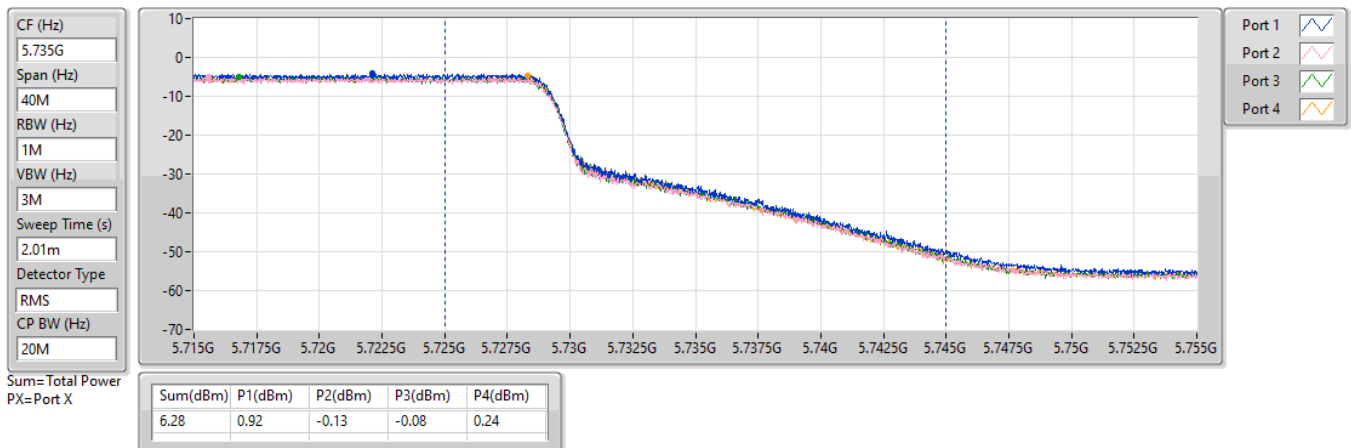


5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.47-5.725GHz_TX

28/12/2024

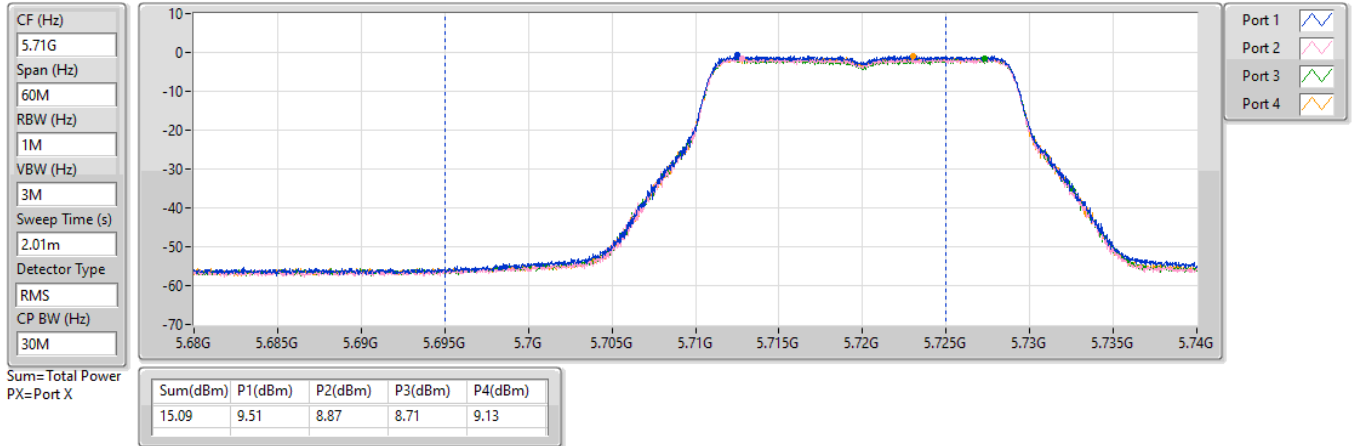


5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_4TX

AV Power

5720MHz Straddle 5.725-5.85GHz_TX

28/12/2024

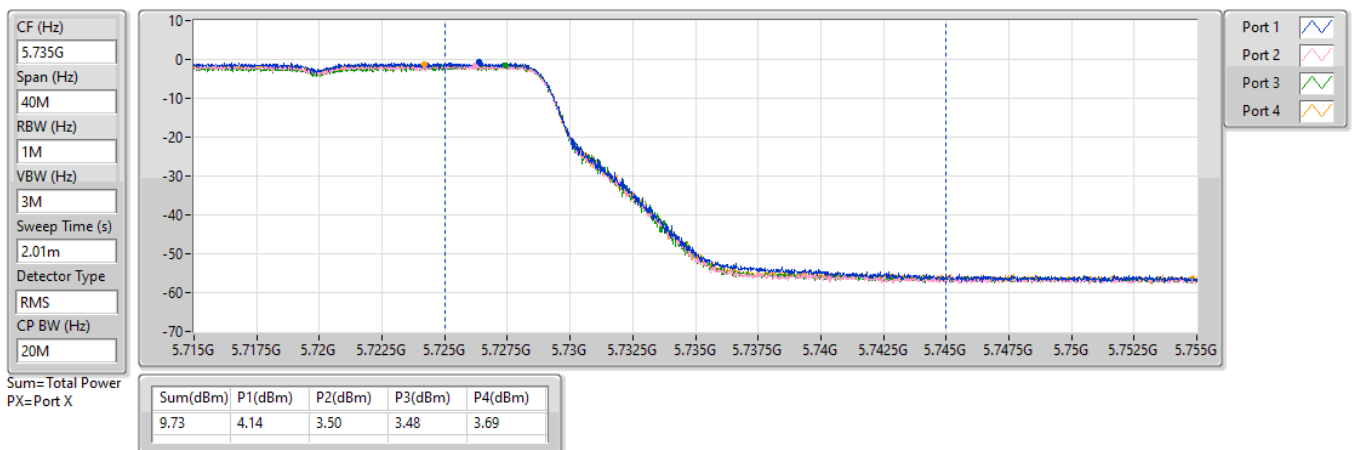


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.47-5.725GHz_TX

28/12/2024

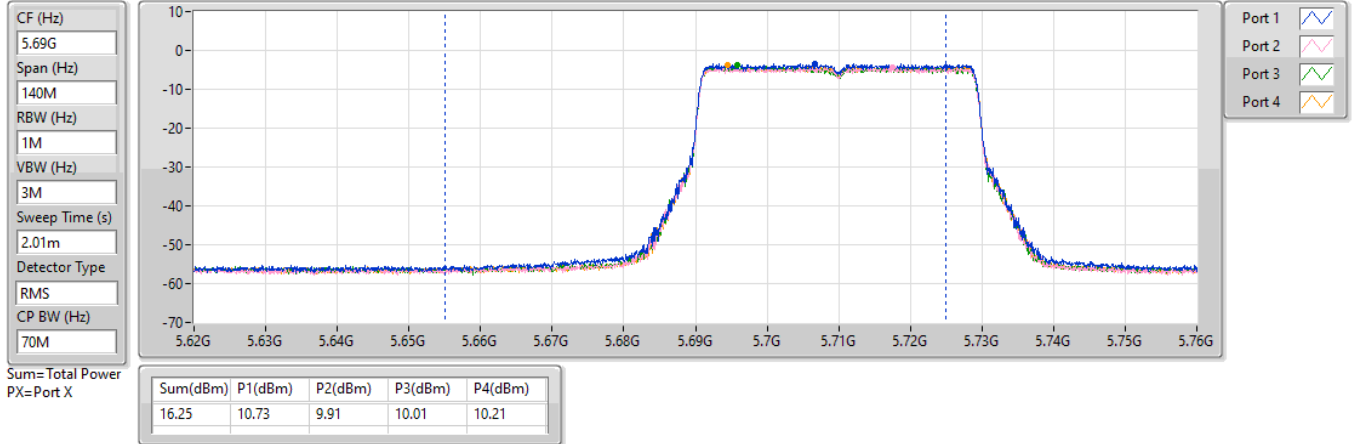


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_4TX

AV Power

5710MHz Straddle 5.725-5.85GHz_TX

28/12/2024

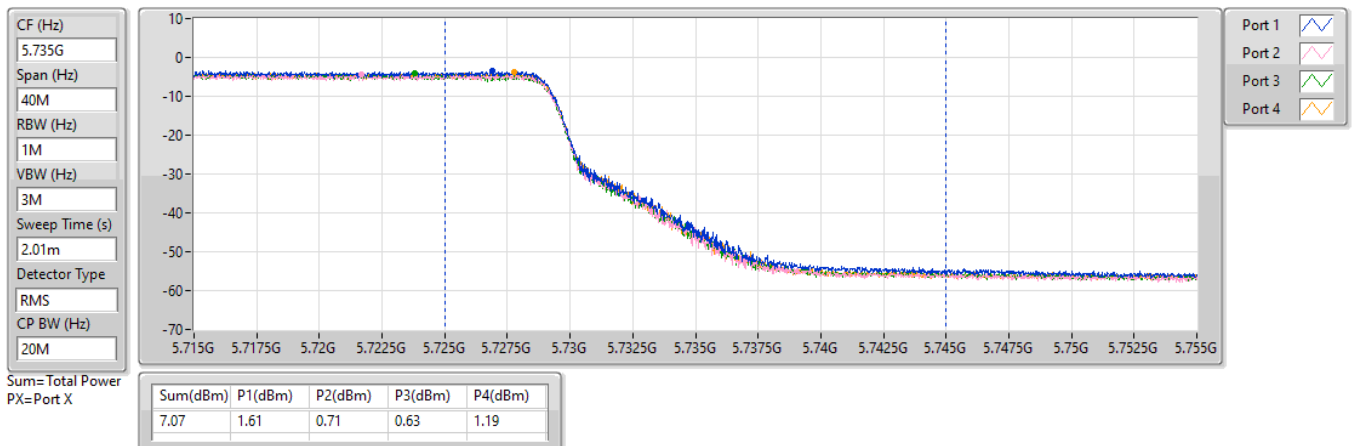


5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.47-5.725GHz_TX

28/12/2024

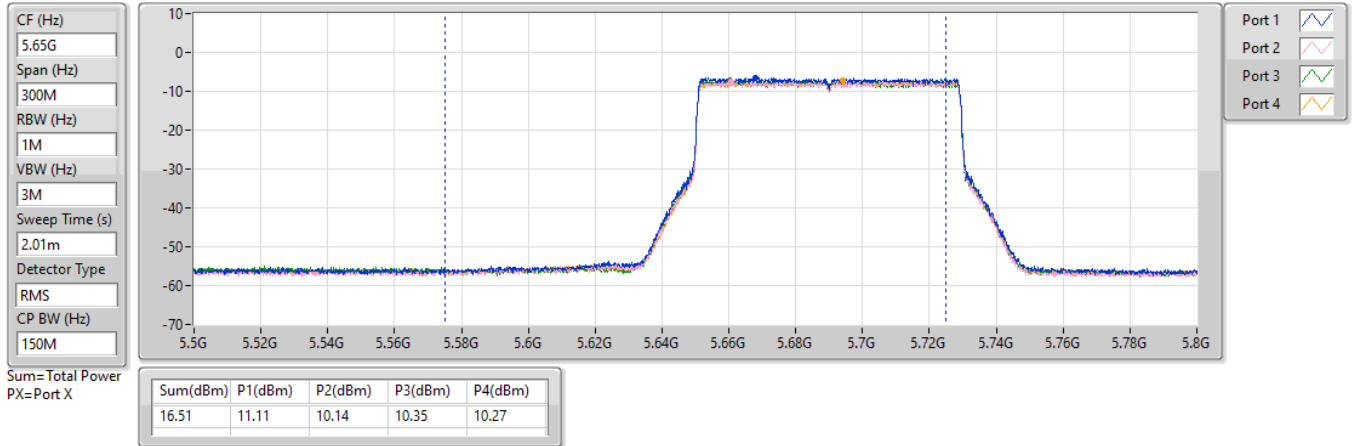


5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_4TX

AV Power

5690MHz Straddle 5.725-5.85GHz_TX

28/12/2024

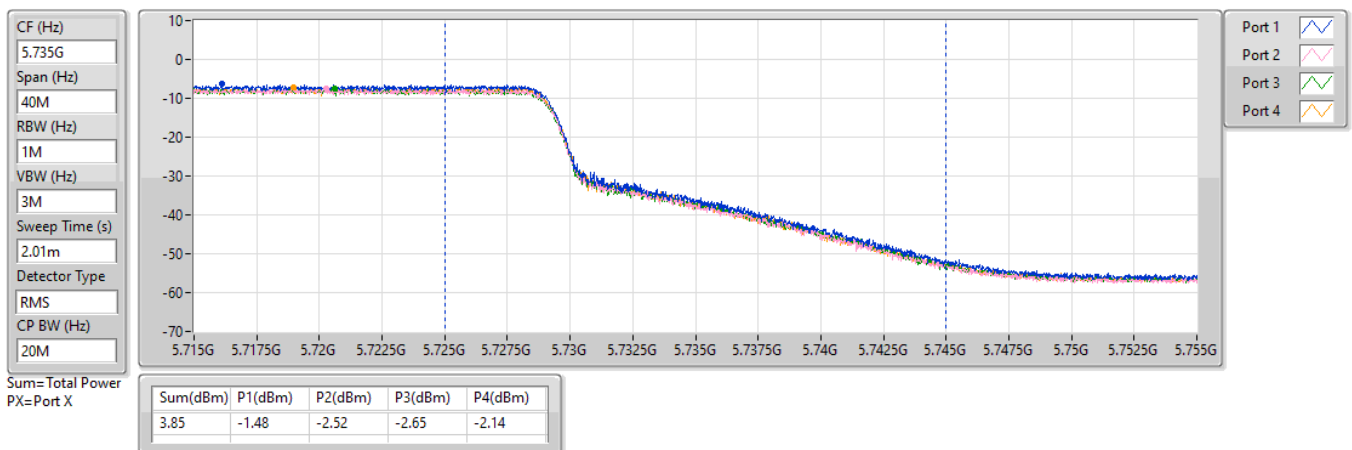



Summary

Mode	PD (dBm/RBW)
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	9.29
802.11ax HEW20_Nss1,(MCS0)_1TX	8.73
802.11ax HEW40_Nss1,(MCS0)_1TX	5.67
802.11ax HEW80_Nss1,(MCS0)_1TX	1.29
802.11ax HEW160_Nss1,(MCS0)_1TX	-4.60
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	7.16
802.11ax HEW20_Nss1,(MCS0)_1TX	5.95
802.11ax HEW40_Nss1,(MCS0)_1TX	2.99
802.11ax HEW80_Nss1,(MCS0)_1TX	-2.04

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5500MHz	Pass	6.10	5.99	5.99	10.90
5580MHz	Pass	6.10	9.29	9.29	10.90
5700MHz	Pass	6.10	4.94	4.94	10.90
5720MHz Straddle 5.47-5.725GHz	Pass	6.10	9.13	9.13	10.90
5720MHz Straddle 5.725-5.85GHz	Pass	6.10	7.16	7.16	29.90
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5500MHz	Pass	6.10	5.27	5.27	10.90
5580MHz	Pass	6.10	8.73	8.73	10.90
5700MHz	Pass	6.10	4.28	4.28	10.90
5720MHz Straddle 5.47-5.725GHz	Pass	6.10	7.86	7.86	10.90
5720MHz Straddle 5.725-5.85GHz	Pass	6.10	5.95	5.95	29.90
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5510MHz	Pass	6.10	0.46	0.46	10.90
5550MHz	Pass	6.10	3.85	3.85	10.90
5670MHz	Pass	6.10	1.52	1.52	10.90
5710MHz Straddle 5.47-5.725GHz	Pass	6.10	5.67	5.67	10.90
5710MHz Straddle 5.725-5.85GHz	Pass	6.10	2.99	2.99	29.90
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5530MHz	Pass	6.10	-3.07	-3.07	10.90
5610MHz	Pass	6.10	-0.77	-0.77	10.90
5690MHz Straddle 5.47-5.725GHz	Pass	6.10	1.29	1.29	10.90
5690MHz Straddle 5.725-5.85GHz	Pass	6.10	-2.04	-2.04	29.90
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-
5570MHz	Pass	6.10	-4.60	-4.60	10.90

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5500MHz

21/12/2024

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.446

Detector Type
RMS

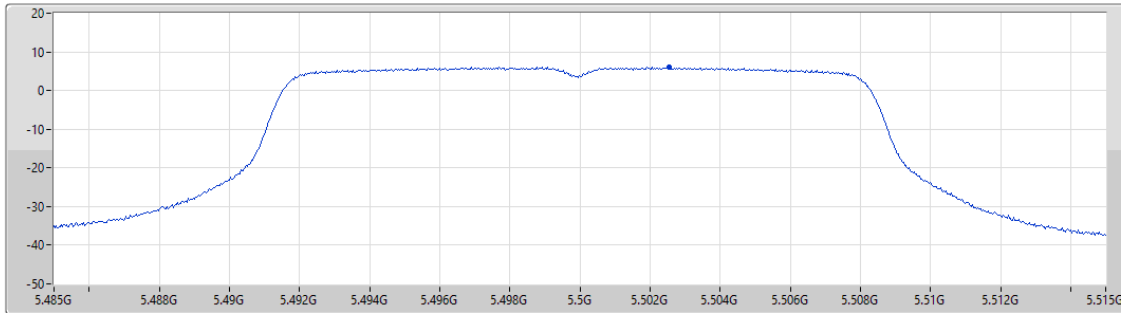

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.99	5.99	5.99

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5580MHz

21/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.446

Detector Type
RMS

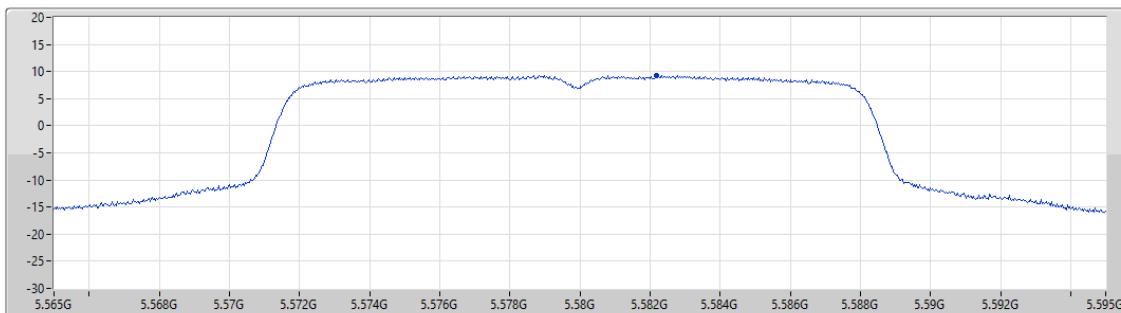

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.29	9.29	9.29

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5700MHz

21/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.446

Detector Type
RMS

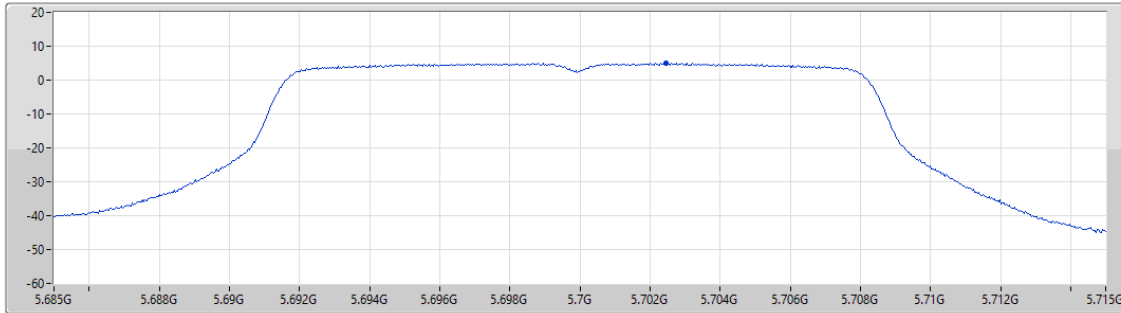

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.94	4.94	4.94

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

21/12/2024

CF (Hz)
5.71G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20.446

Detector Type
RMS

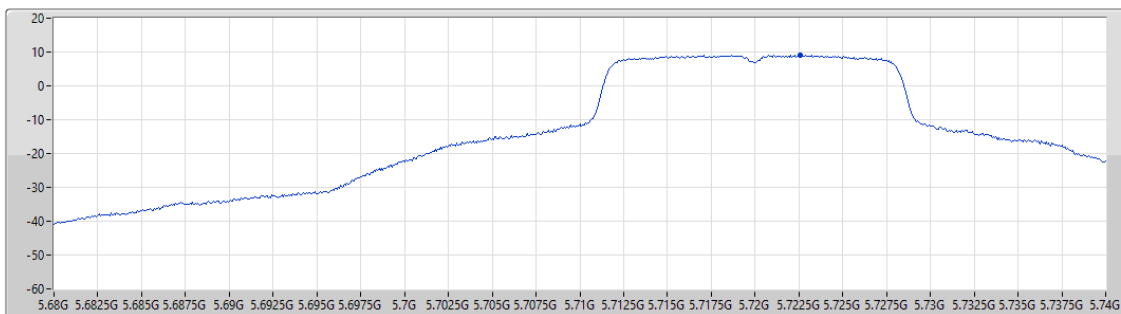

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
9.13	9.13	9.13

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

21/12/2024

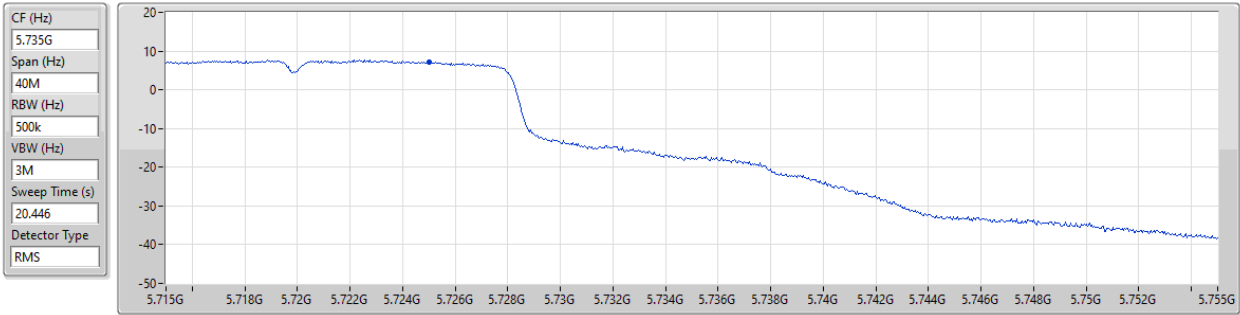


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.16	7.16	7.16

5.47-5.725GHz_802.11ax_HEW20_Nss1,(MCS0)_1TX

PSD

5500MHz

21/12/2024

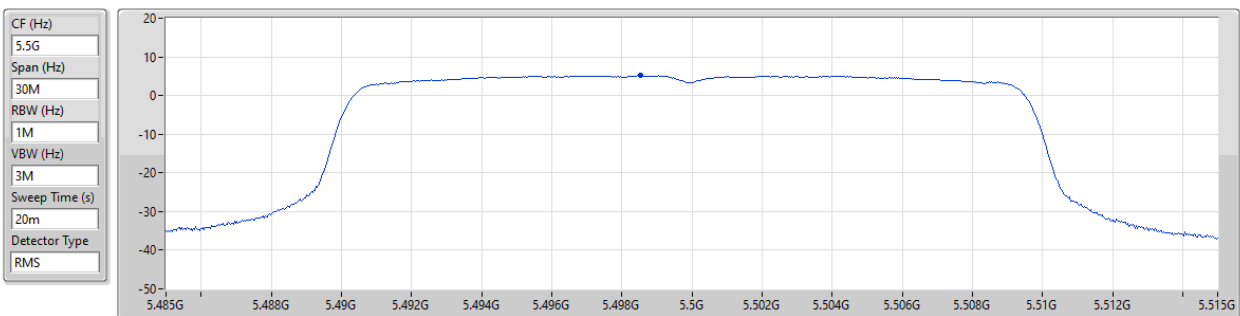

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.27	5.27	5.27

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5580MHz

21/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

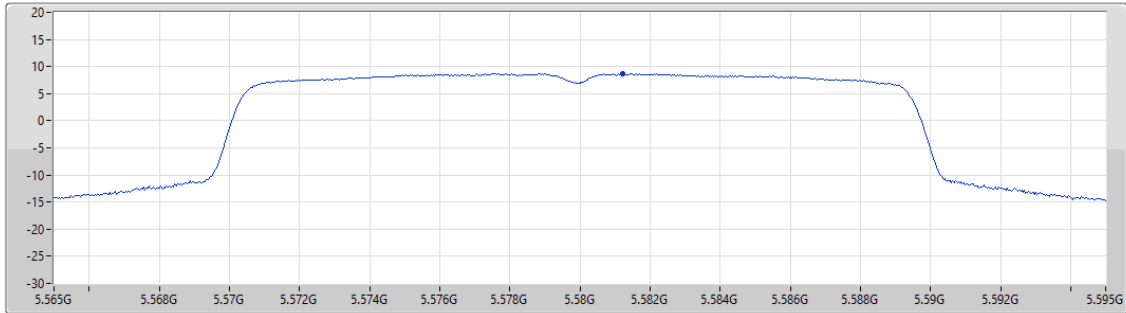

Port 1

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.73	8.73	8.73

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5700MHz

21/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

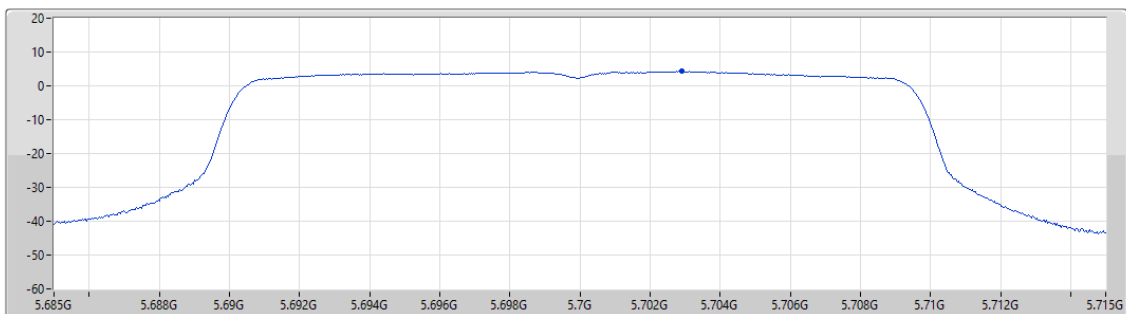

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.28	4.28	4.28

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

21/12/2024

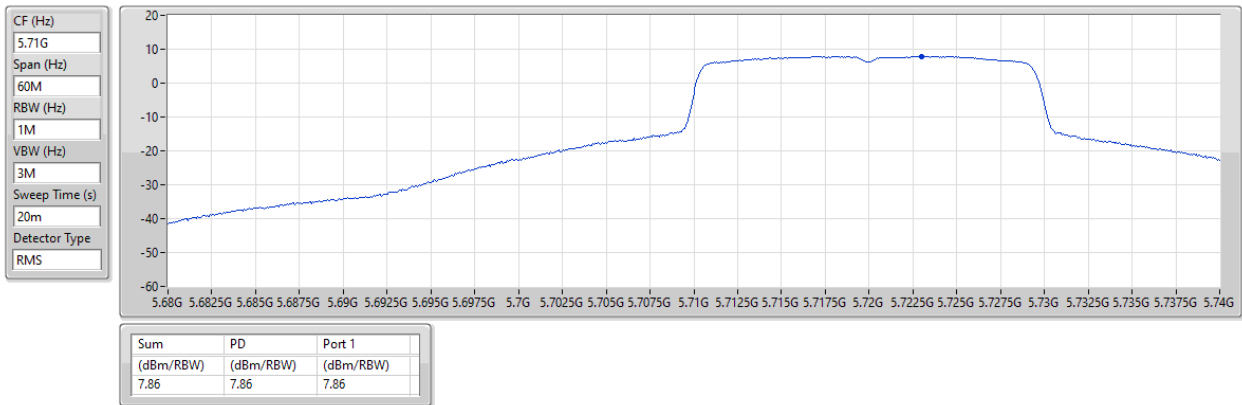


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

21/12/2024

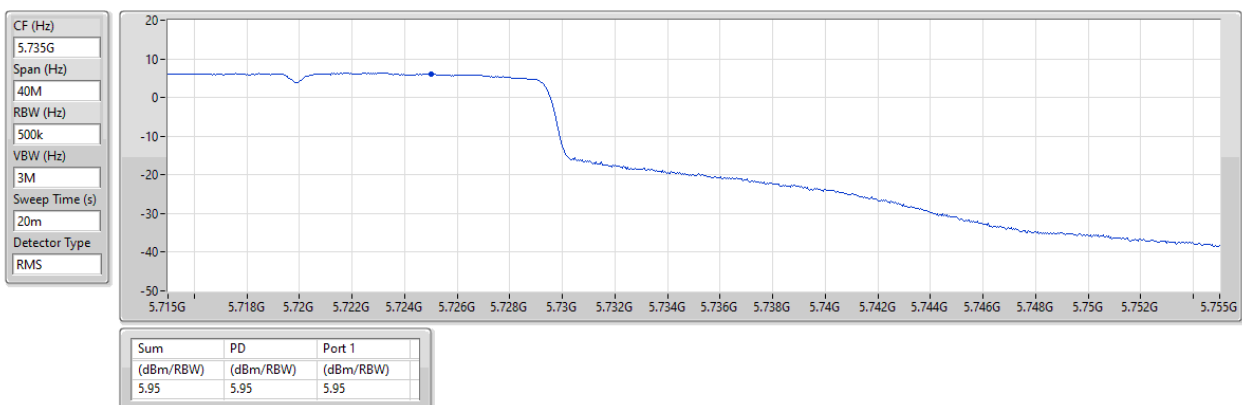


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5510MHz

21/12/2024

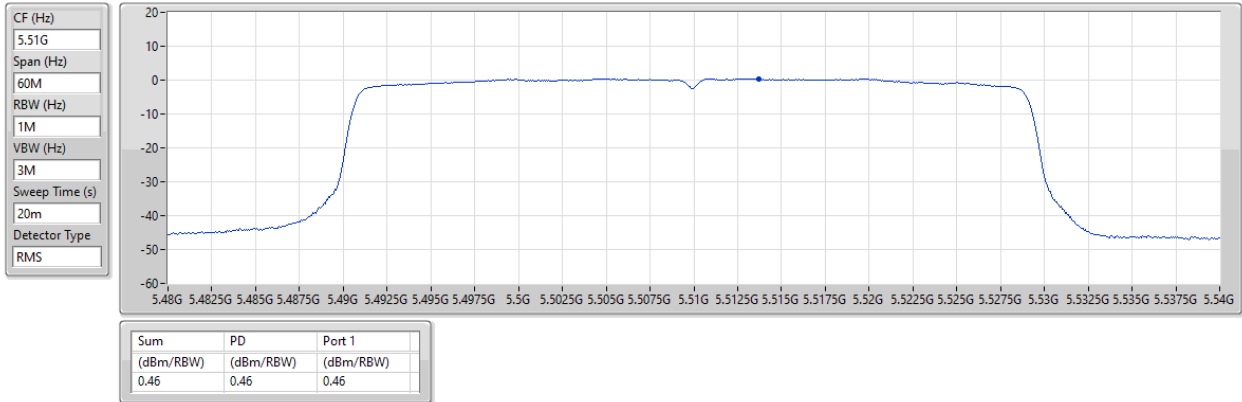


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5550MHz

21/12/2024

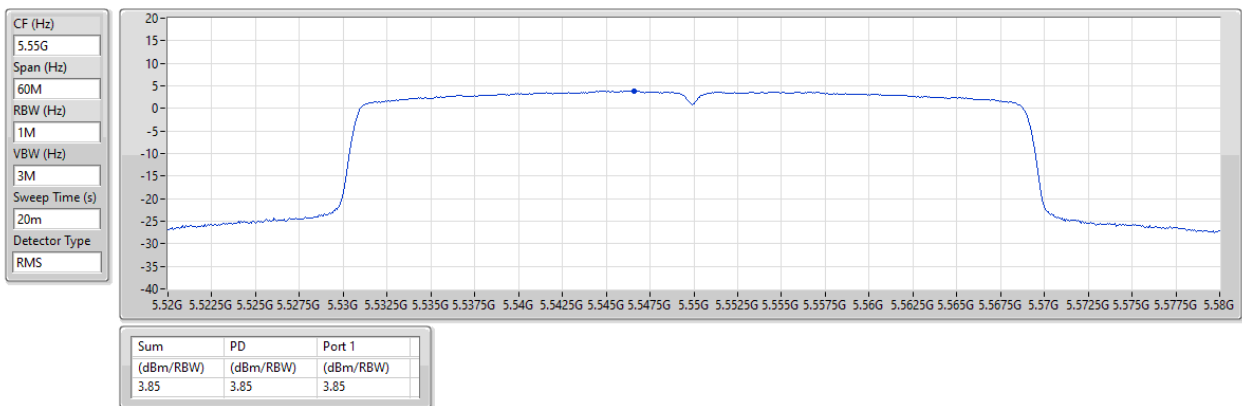

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5670MHz

21/12/2024

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

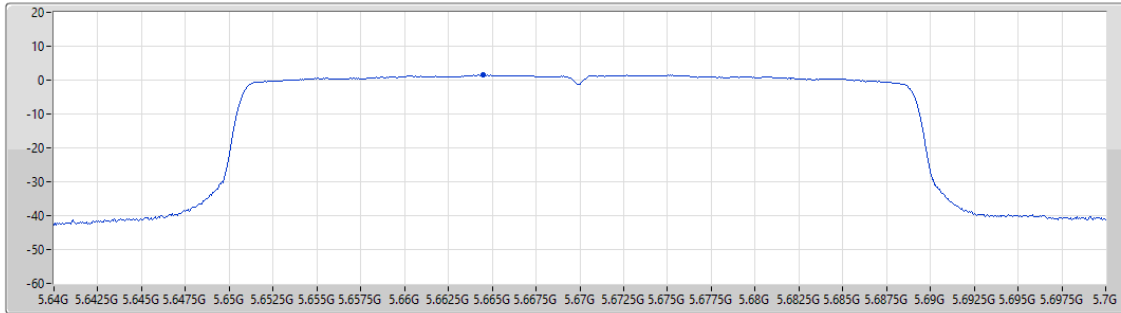

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.52	1.52	1.52

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.47-5.725GHz

21/12/2024

CF (Hz)
5.69G


Span (Hz)
140M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

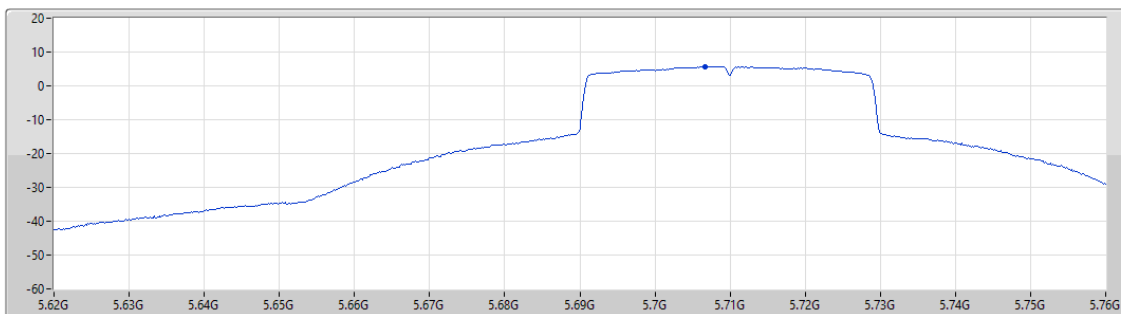

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.67	5.67	5.67

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.725-5.85GHz

21/12/2024




5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5530MHz

21/12/2024

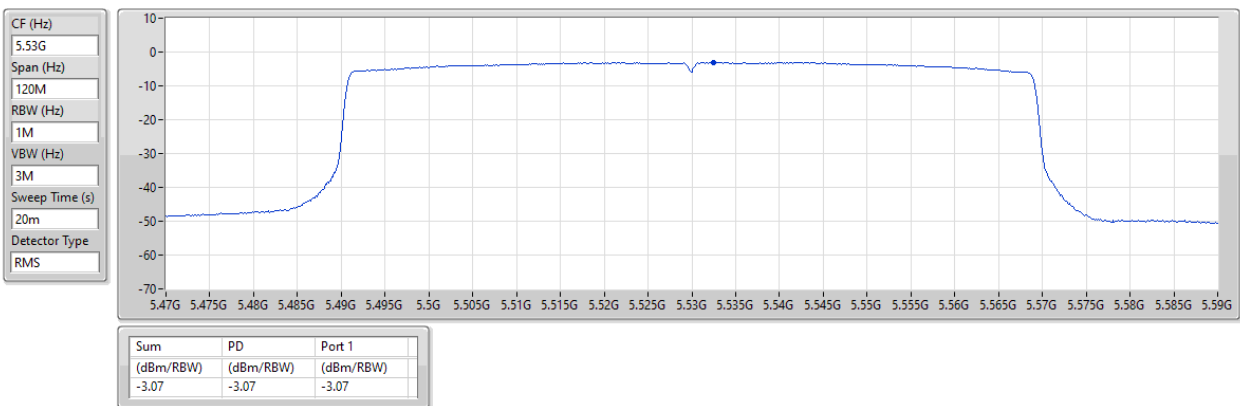


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5610MHz

21/12/2024

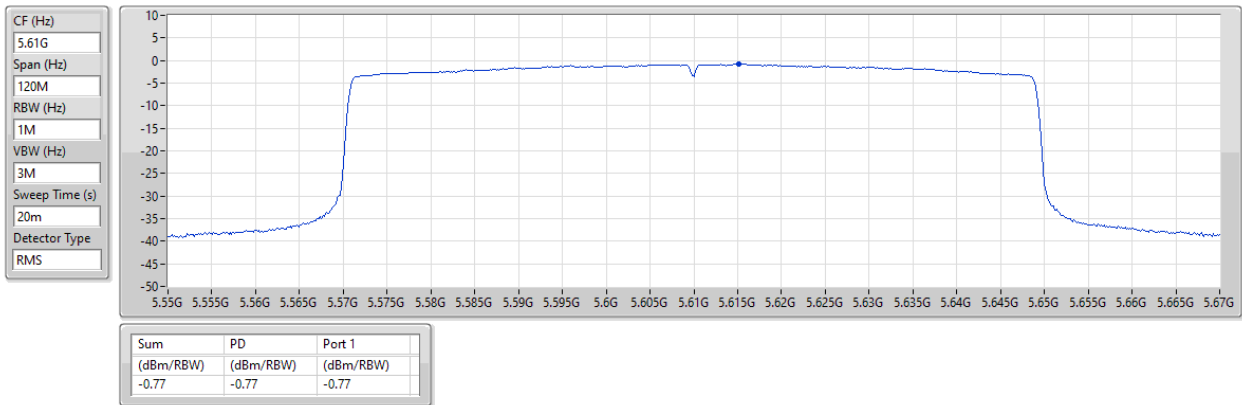


5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

21/12/2024

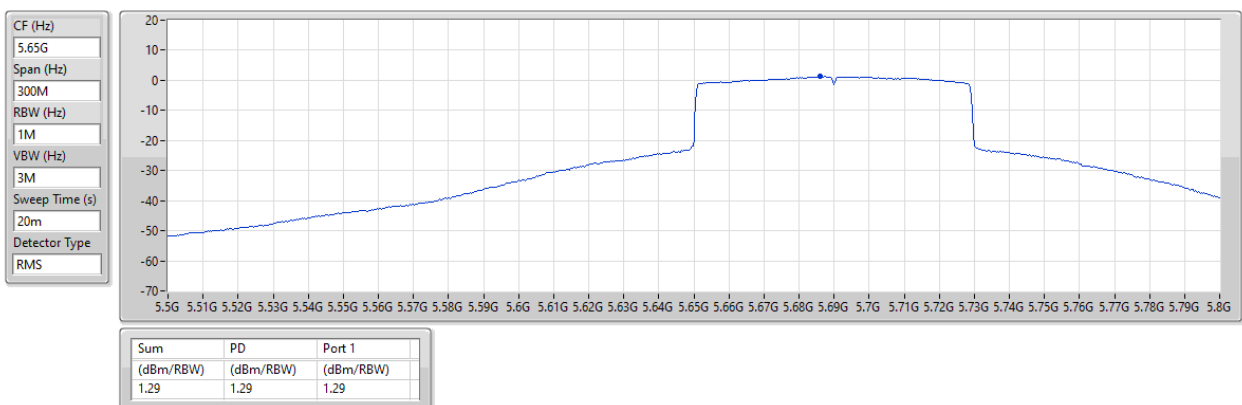


5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.725-5.85GHz

21/12/2024

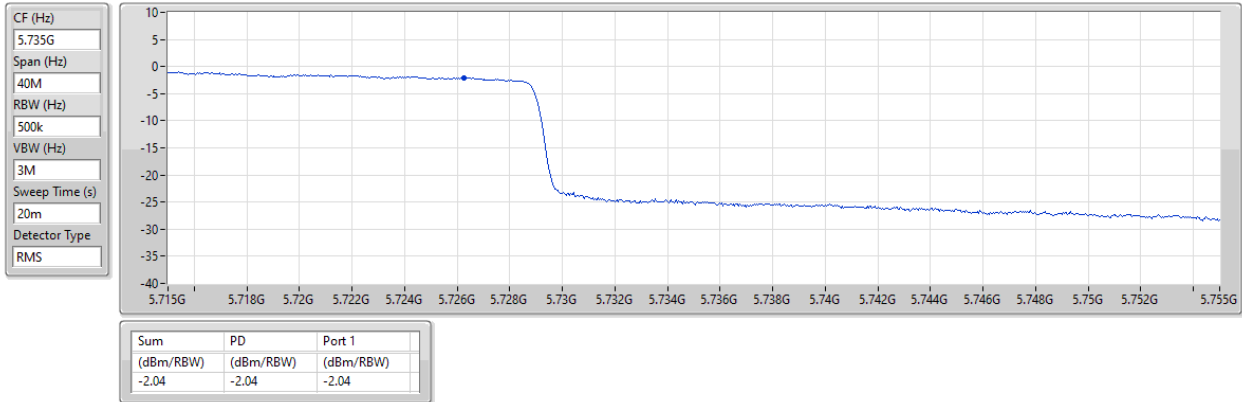


5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_1TX

PSD

5570MHz

21/12/2024

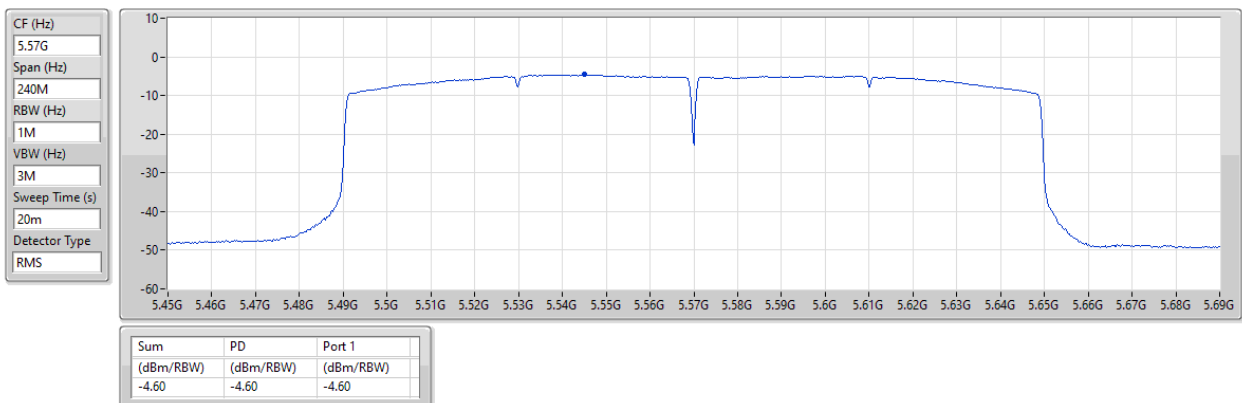



Summary

Mode	PD (dBm/RBW)
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	6.16
802.11a_Nss1,(6Mbps)_2TX	5.89
802.11a_Nss1,(6Mbps)_4TX	3.41
802.11be EHT20_Nss1,(MCS0)_1TX	6.29
802.11be EHT20_Nss1,(MCS0)_2TX	5.50
802.11be EHT20_Nss1,(MCS0)_4TX	3.45
802.11be EHT40_Nss1,(MCS0)_1TX	2.76
802.11be EHT40_Nss1,(MCS0)_2TX	2.85
802.11be EHT40_Nss1,(MCS0)_4TX	2.72
802.11be EHT80_Nss1,(MCS0)_1TX	2.58
802.11be EHT80_Nss1,(MCS0)_2TX	-0.71
802.11be EHT80_Nss1,(MCS0)_4TX	-0.84
802.11be EHT160_Nss1,(MCS0)_1TX	-3.73
802.11be EHT160_Nss1,(MCS0)_2TX	-3.45
802.11be EHT160_Nss1,(MCS0)_4TX	-5.56
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	3.98
802.11a_Nss1,(6Mbps)_2TX	4.41
802.11a_Nss1,(6Mbps)_4TX	1.92
802.11be EHT20_Nss1,(MCS0)_1TX	3.83
802.11be EHT20_Nss1,(MCS0)_2TX	3.98
802.11be EHT20_Nss1,(MCS0)_4TX	1.86
802.11be EHT40_Nss1,(MCS0)_1TX	1.39
802.11be EHT40_Nss1,(MCS0)_2TX	1.40
802.11be EHT40_Nss1,(MCS0)_4TX	1.14
802.11be EHT80_Nss1,(MCS0)_1TX	-2.45
802.11be EHT80_Nss1,(MCS0)_2TX	-2.24
802.11be EHT80_Nss1,(MCS0)_4TX	-2.53

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;



PSD_R3_Full RU
(Parent Device / FCC ID: UDX-600216010)

Appendix D.2

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	6.16				6.16	6.30
5580MHz	Pass	10.70	5.86				5.86	6.30
5700MHz	Pass	10.70	5.84				5.84	6.30
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	5.94				5.94	6.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	3.98				3.98	25.60
802.11be EHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	6.12				6.12	6.30
5580MHz	Pass	10.70	5.79				5.79	6.30
5700MHz	Pass	10.70	4.28				4.28	6.30
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	6.29				6.29	6.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	3.83				3.83	25.60
802.11be EHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	1.52				1.52	6.30
5550MHz	Pass	10.70	1.95				1.95	6.30
5670MHz	Pass	10.70	1.94				1.94	6.30
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	2.76				2.76	6.30
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	1.39				1.39	25.60
802.11be EHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-2.49				-2.49	6.30
5610MHz	Pass	10.70	1.45				1.45	6.30
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	2.58				2.58	6.30
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-2.45				-2.45	25.60
802.11be EHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-3.73				-3.73	6.30
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	3.14	2.42			5.75	6.30
5580MHz	Pass	10.70	3.04	2.74			5.89	6.30
5700MHz	Pass	10.70	3.04	2.71			5.86	6.30
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	3.13	2.53			5.81	6.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	1.73	1.13			4.41	25.60
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5500MHz	Pass	10.70	2.61	1.83			5.23	6.30
5580MHz	Pass	10.70	2.66	2.34			5.47	6.30
5700MHz	Pass	10.70	2.66	2.33			5.50	6.30
5720MHz Straddle 5.47-5.725GHz	Pass	10.70	2.71	2.07			5.36	6.30
5720MHz Straddle 5.725-5.85GHz	Pass	10.40	1.19	0.77			3.98	25.60
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5510MHz	Pass	10.70	-0.55	-1.31			2.07	6.30
5550MHz	Pass	10.70	-0.51	-1.28			2.05	6.30
5670MHz	Pass	10.70	-0.73	-1.38			1.86	6.30
5710MHz Straddle 5.47-5.725GHz	Pass	10.70	0.20	-0.41			2.85	6.30
5710MHz Straddle 5.725-5.85GHz	Pass	10.40	-1.13	-2.10			1.40	25.60
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-3.64	-4.51			-1.10	6.30
5610MHz	Pass	10.70	-3.57	-3.92			-0.83	6.30
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	-3.42	-3.90			-0.71	6.30
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-4.93	-5.57			-2.24	25.60
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-6.01	-6.80			-3.45	6.30
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-
5500MHz	Pass	13.42	-2.21	-3.04	-2.78	-3.12	3.19	3.58
5580MHz	Pass	13.42	-2.41	-2.82	-2.85	-3.18	3.18	3.58
5700MHz	Pass	13.42	-2.10	-2.77	-2.32	-2.95	3.41	3.58
5720MHz Straddle 5.47-5.725GHz	Pass	13.42	-2.10	-2.90	-2.74	-2.71	3.36	3.58



PSD_R3_Full RU
(Parent Device / FCC ID: UDX-600216010)

Appendix D.2

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5720MHz Straddle 5.725-5.85GHz	Pass	13.21	-3.64	-4.29	-4.06	-4.16	1.92	22.79
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5500MHz	Pass	13.42	-2.28	-3.03	-2.87	-3.17	3.15	3.58
5580MHz	Pass	13.42	-2.47	-2.73	-2.68	-3.11	3.25	3.58
5700MHz	Pass	13.42	-2.15	-2.69	-2.32	-2.87	3.45	3.58
5720MHz Straddle 5.47-5.725GHz	Pass	13.42	-2.08	-2.84	-2.61	-2.98	3.37	3.58
5720MHz Straddle 5.725-5.85GHz	Pass	13.21	-3.65	-4.43	-4.08	-4.30	1.86	22.79
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5510MHz	Pass	13.42	-3.27	-4.28	-3.87	-4.23	2.05	3.58
5550MHz	Pass	13.42	-3.41	-4.37	-4.08	-4.10	2.01	3.58
5670MHz	Pass	13.42	-3.54	-4.55	-4.18	-4.63	1.68	3.58
5710MHz Straddle 5.47-5.725GHz	Pass	13.42	-2.87	-3.39	-3.18	-3.40	2.72	3.58
5710MHz Straddle 5.725-5.85GHz	Pass	13.21	-4.40	-5.12	-5.02	-4.76	1.14	22.79
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5530MHz	Pass	13.42	-6.53	-7.42	-7.10	-7.29	-1.09	3.58
5610MHz	Pass	13.42	-6.31	-6.97	-6.77	-7.13	-0.91	3.58
5690MHz Straddle 5.47-5.725GHz	Pass	13.42	-6.07	-7.06	-6.72	-7.06	-0.84	3.58
5690MHz Straddle 5.725-5.85GHz	Pass	13.21	-7.84	-8.87	-8.78	-8.49	-2.53	22.79
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	13.42	-11.02	-11.73	-11.66	-11.70	-5.56	3.58

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5500MHz

18/12/2024

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

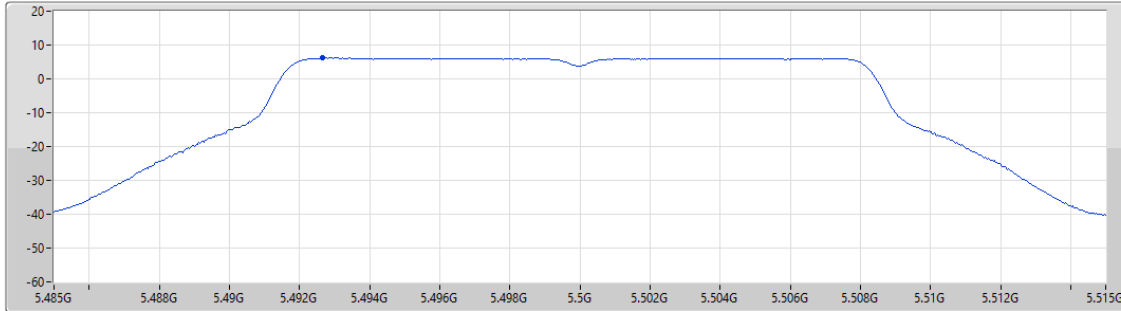

Port 1

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
6.16	6.16	6.16

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5580MHz

18/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

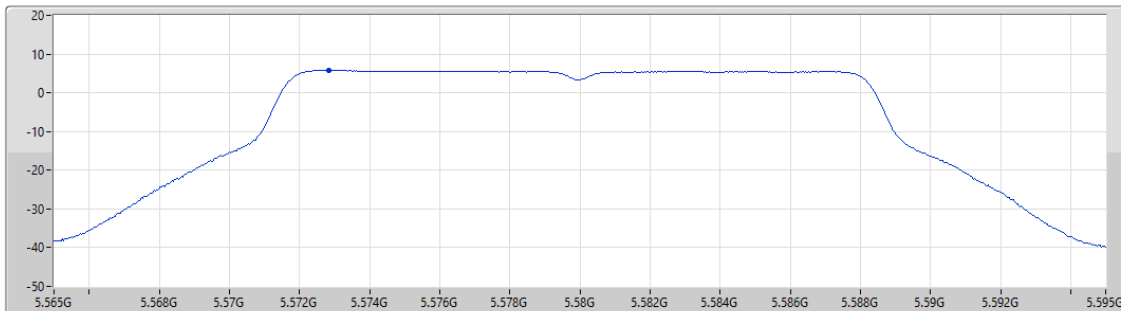

Port 1


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.86	5.86	5.86

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5700MHz

18/12/2024

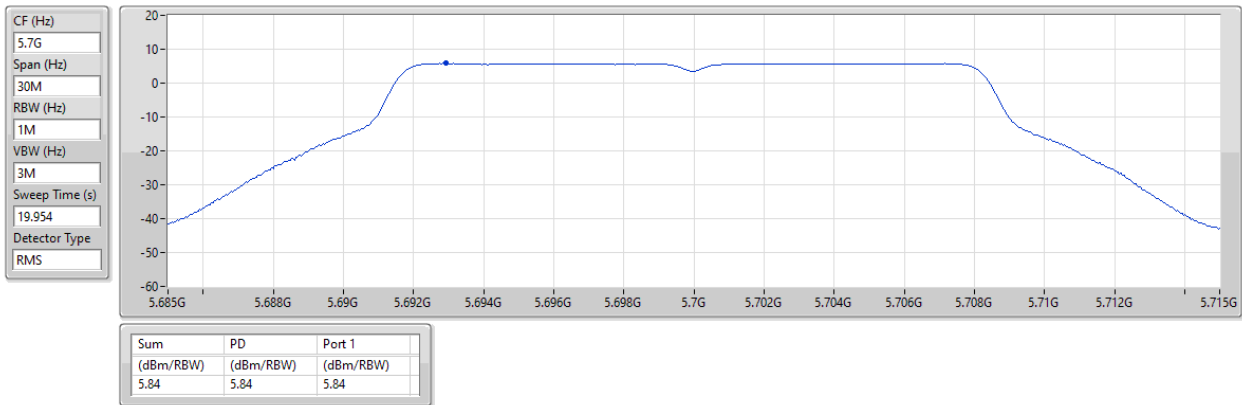


5.47-5.725GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

18/12/2024

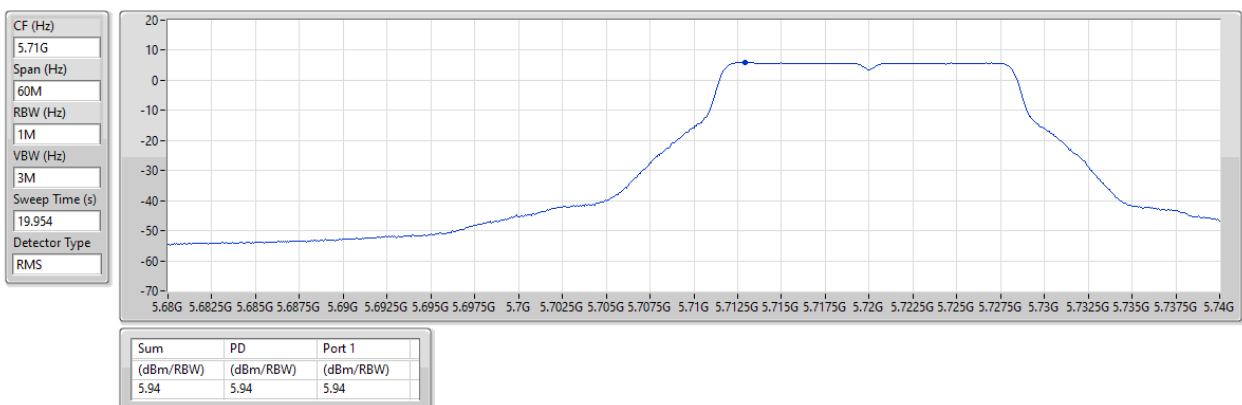


5.725-5.85GHz_802.11a_Nss1,(6Mbps)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

18/12/2024

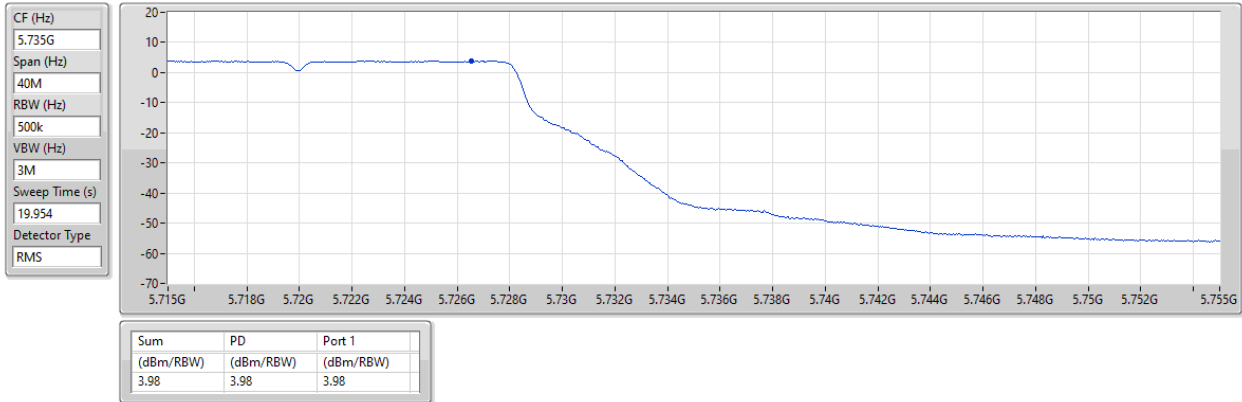


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5500MHz

18/12/2024

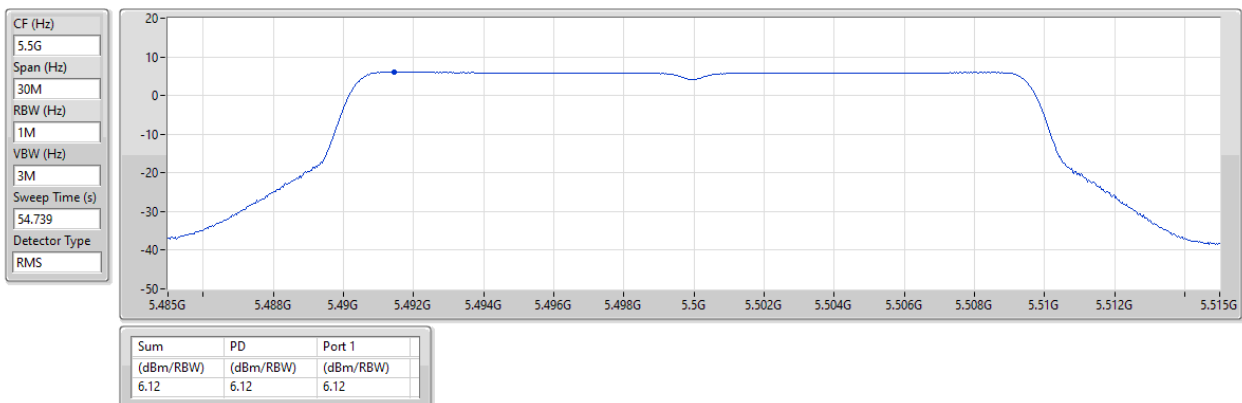


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5580MHz

18/12/2024

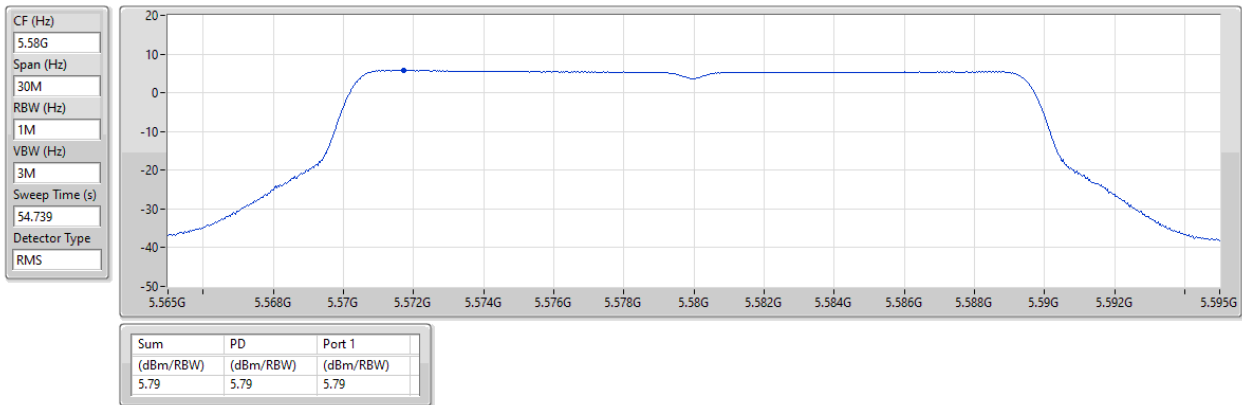


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5700MHz

27/12/2024

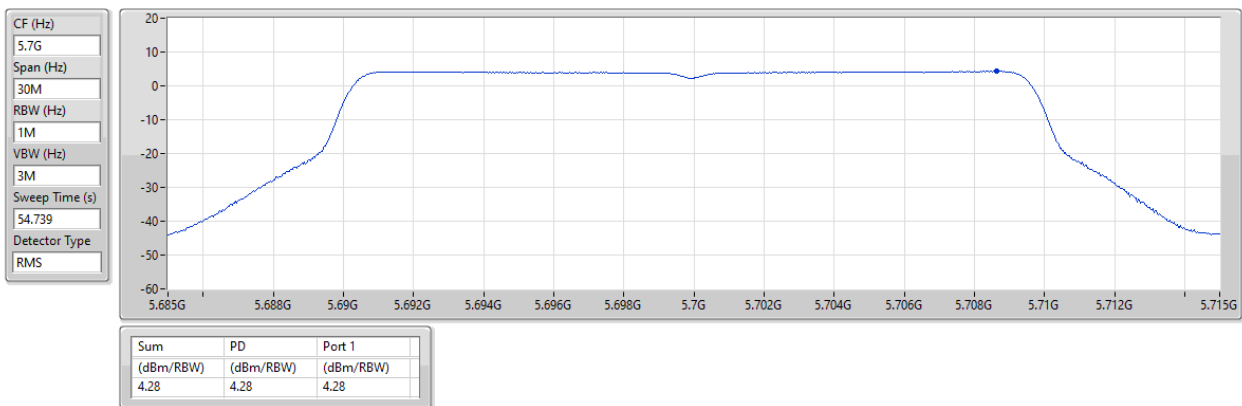


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.47-5.725GHz

18/12/2024

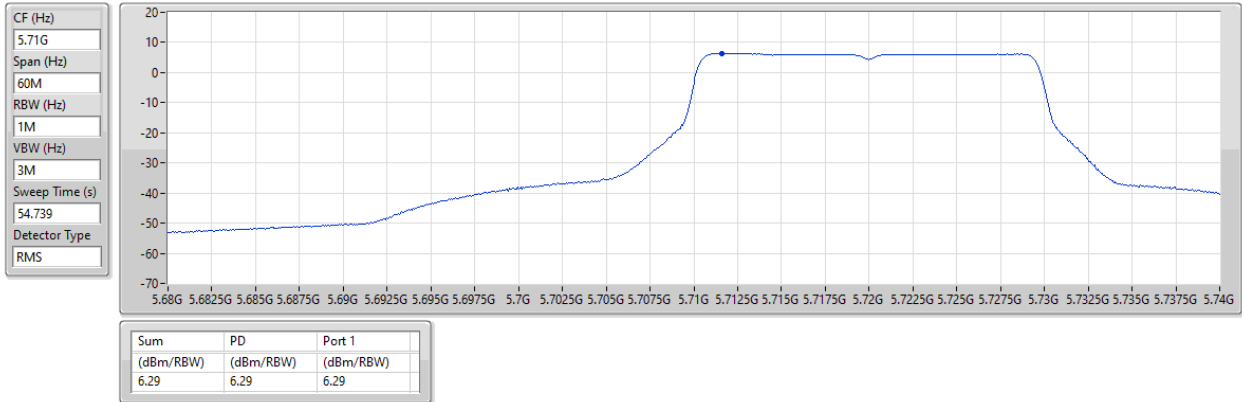


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_1TX

PSD

5720MHz Straddle 5.725-5.85GHz

18/12/2024

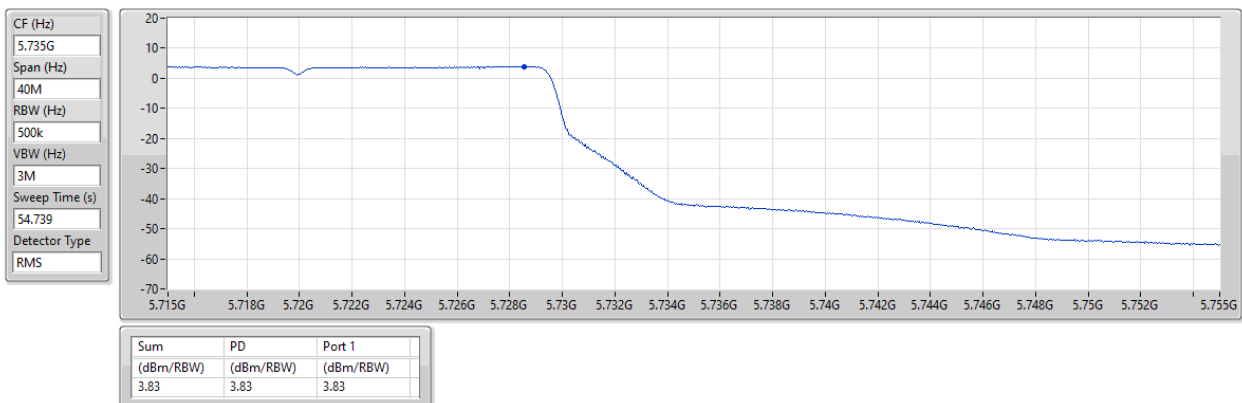


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5510MHz

27/12/2024

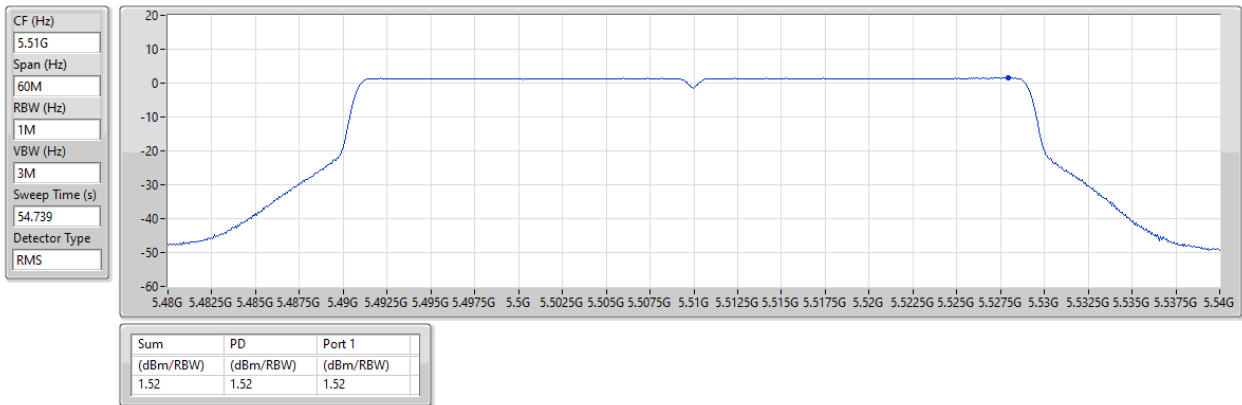


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5550MHz

27/12/2024

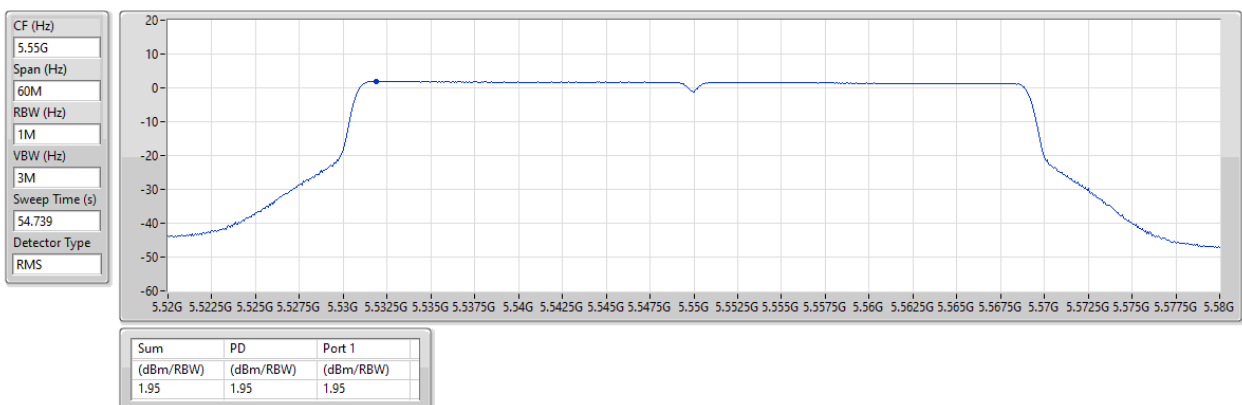


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5670MHz

27/12/2024

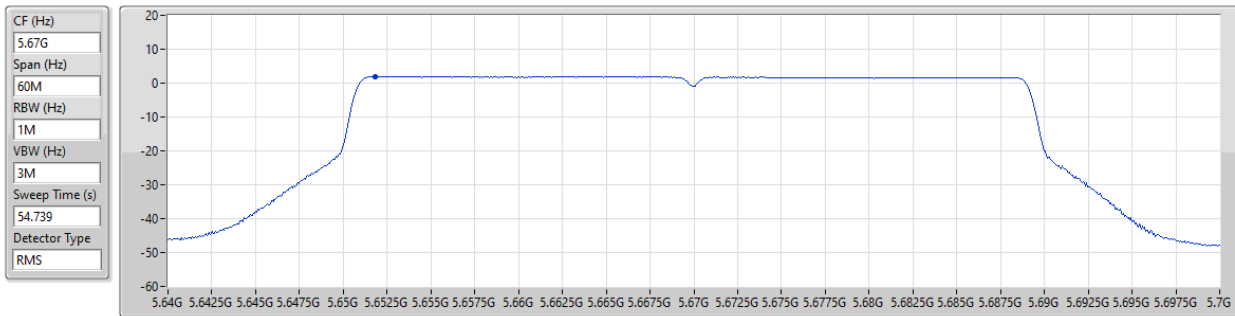

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.94	1.94	1.94

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.47-5.725GHz

27/12/2024

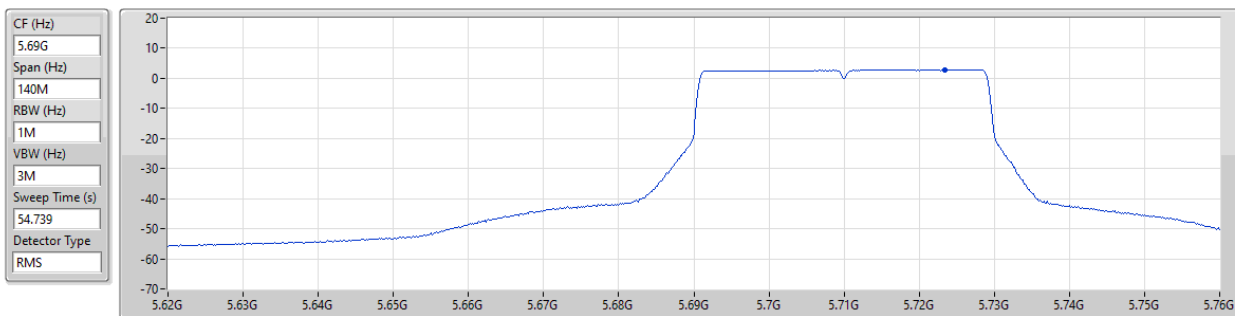

Port 1


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.76	2.76	2.76

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_1TX

PSD

5710MHz Straddle 5.725-5.85GHz

27/12/2024

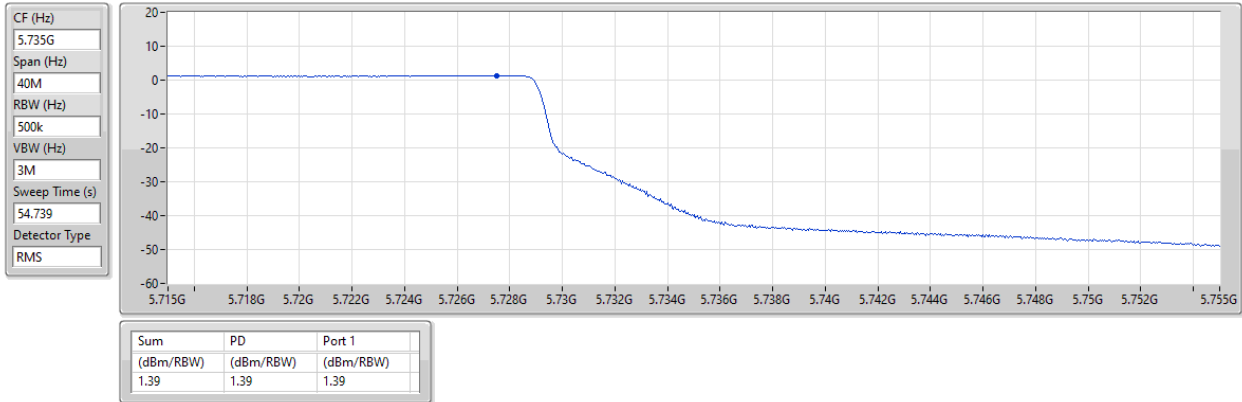


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5530MHz

18/12/2024

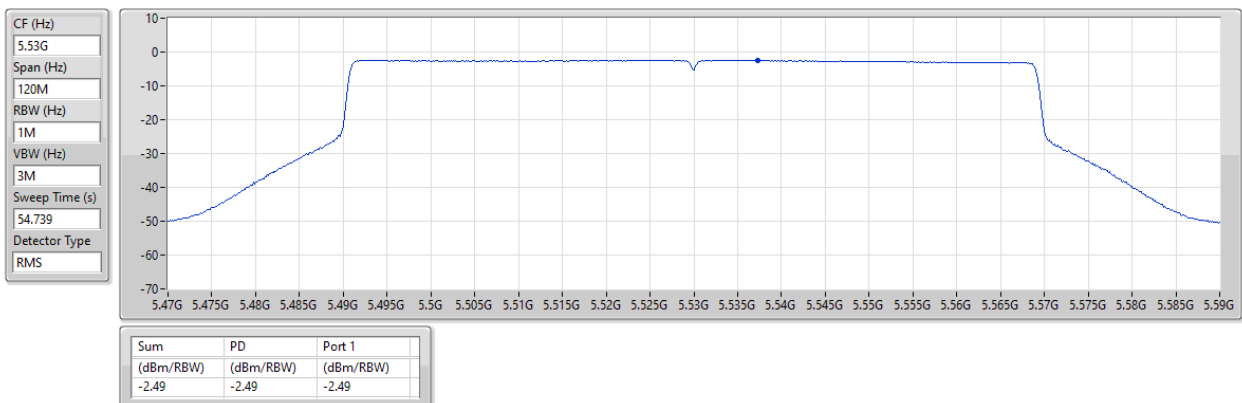


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5610MHz

18/12/2024

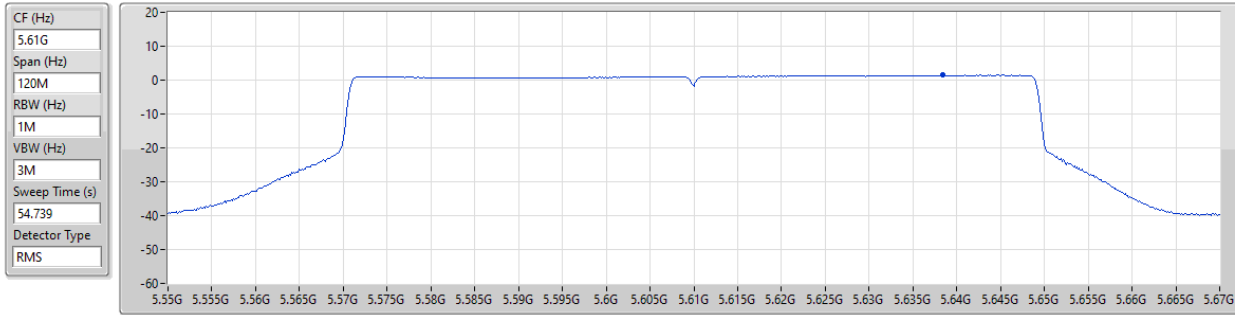


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.45	1.45	1.45

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

18/12/2024

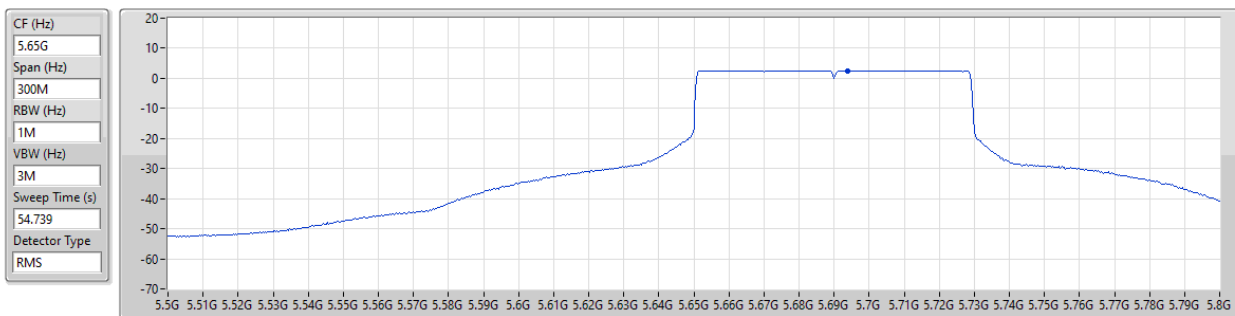


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.58	2.58	2.58

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_1TX

PSD

5690MHz Straddle 5.725-5.85GHz

18/12/2024

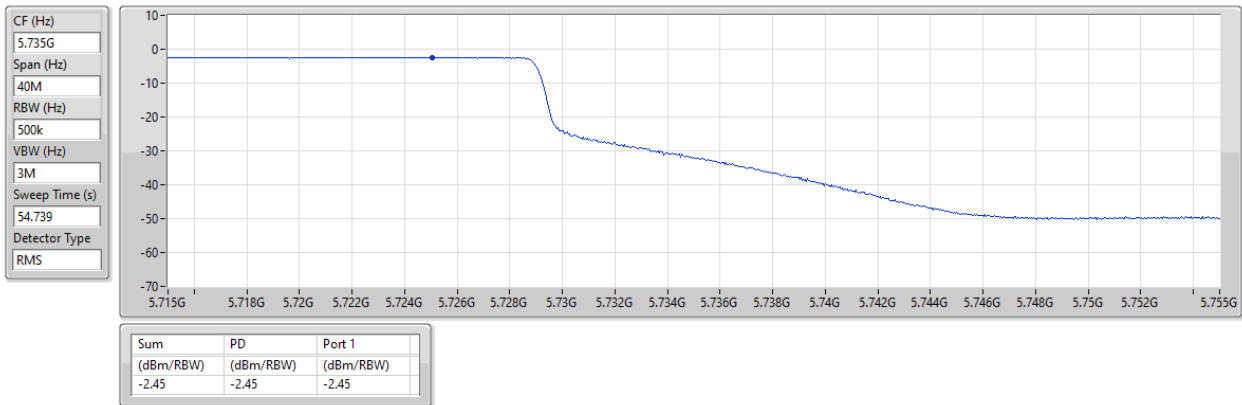


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_1TX

PSD

5570MHz

18/12/2024

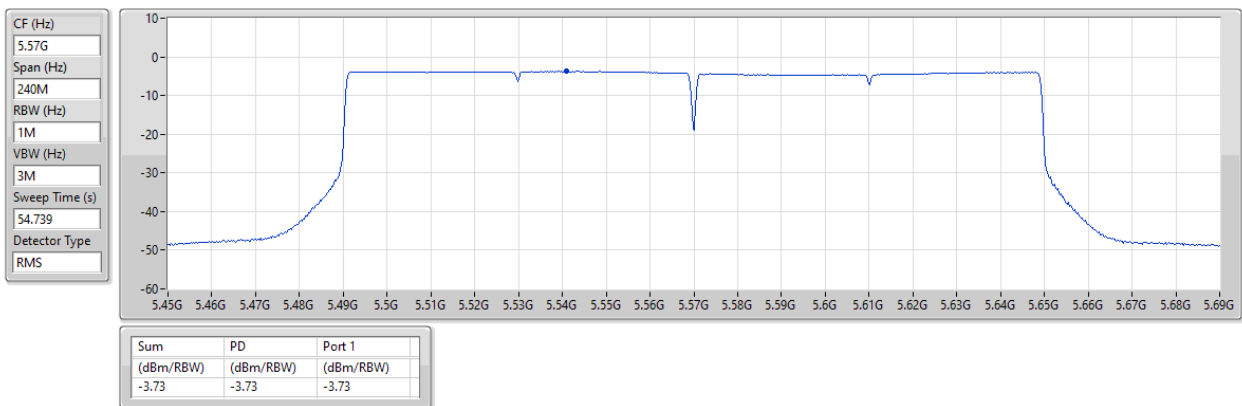

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5500MHz

27/12/2024

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

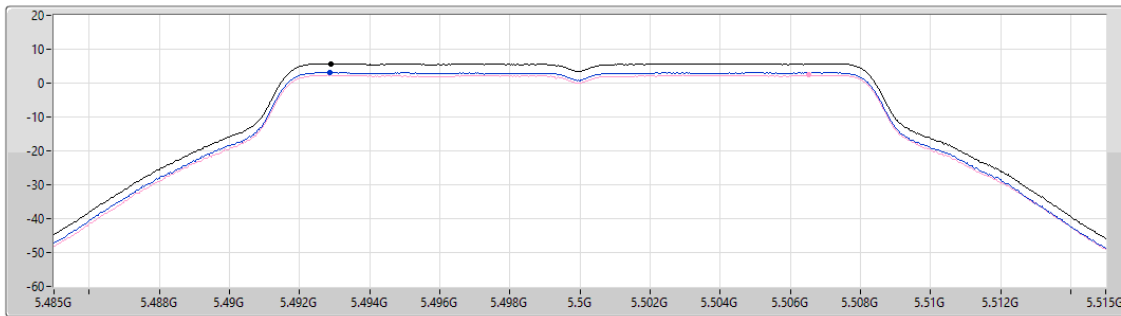

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.75	5.75	3.14	2.42

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5580MHz

27/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

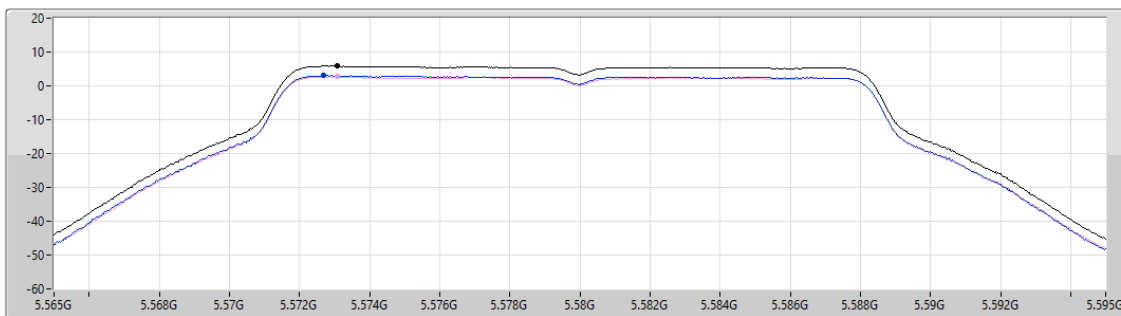

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.89	5.89	3.04	2.74

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5700MHz

27/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

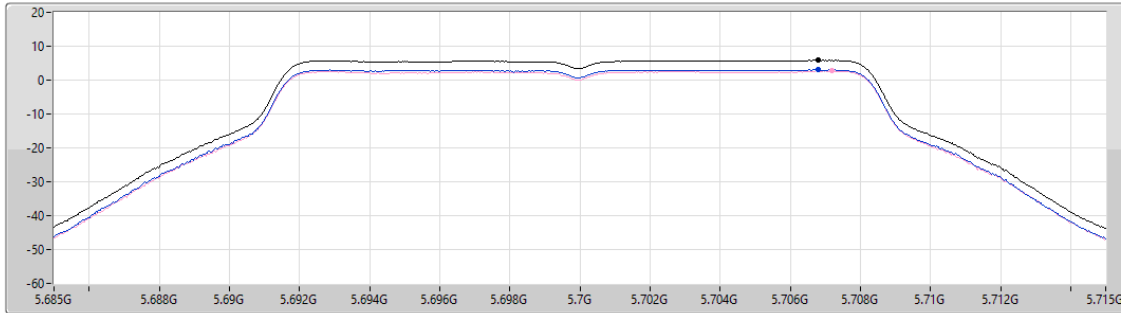

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.86	5.86	3.04	2.71

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

27/12/2024

CF (Hz)
5.71G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

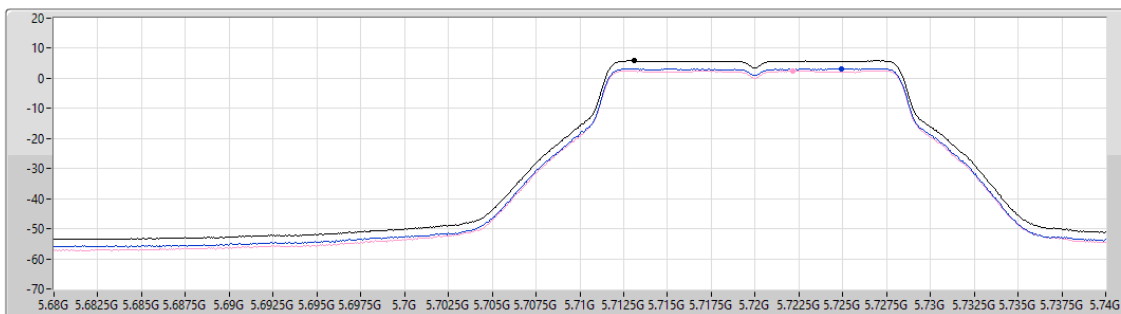

Sum 

Port 1 

Port 2 


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.81	5.81	3.13	2.53

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

27/12/2024

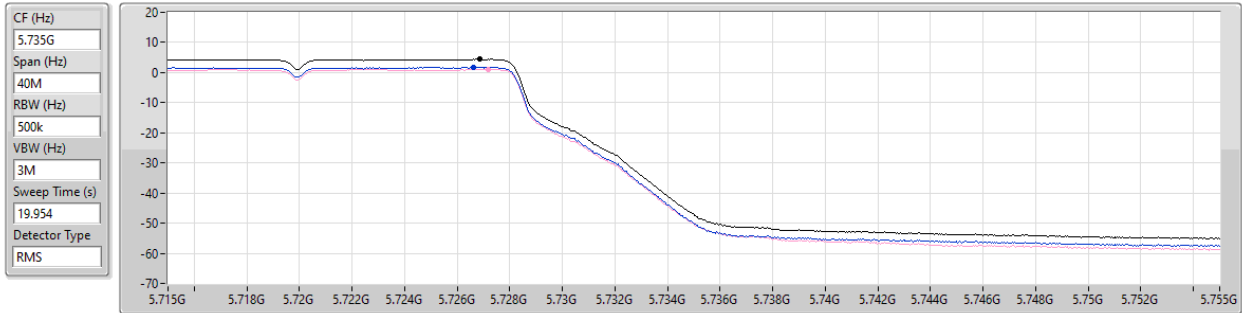


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
4.41	4.41	1.73	1.13

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5500MHz

27/12/2024

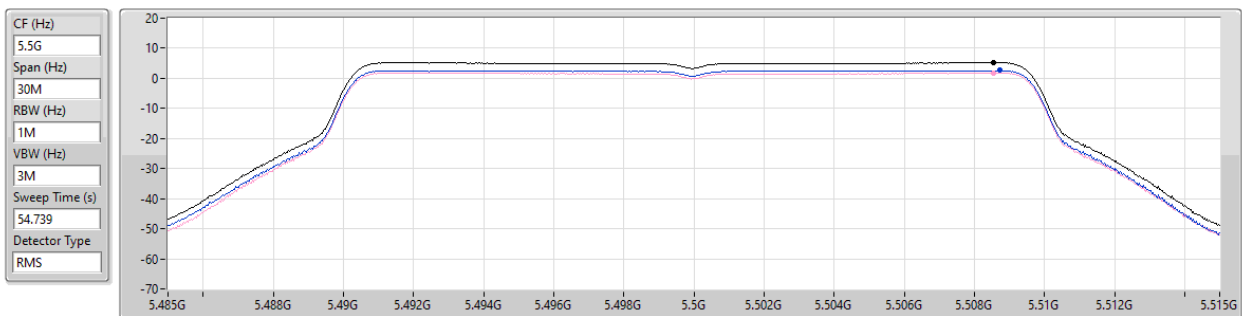

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.23	5.23	2.61	1.83

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5580MHz

27/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

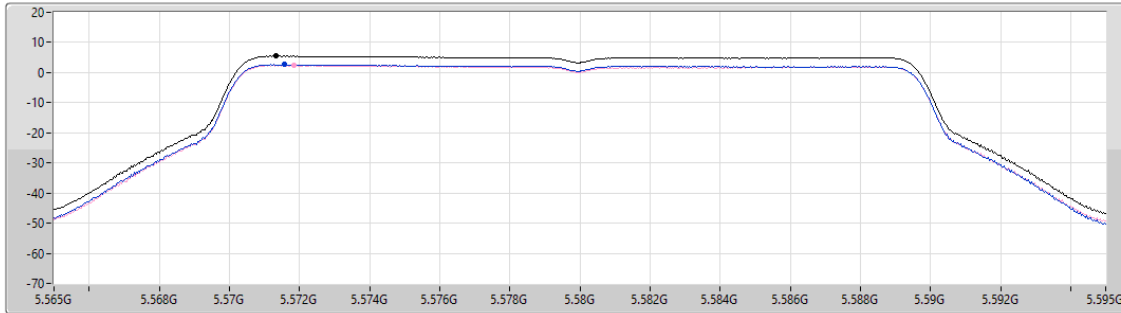

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.47	5.47	2.66	2.34

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5700MHz

27/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

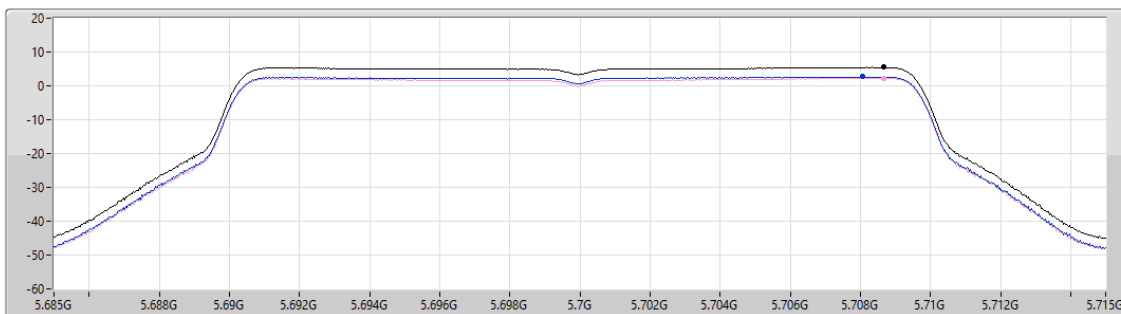

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.50	5.50	2.66	2.33

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

27/12/2024

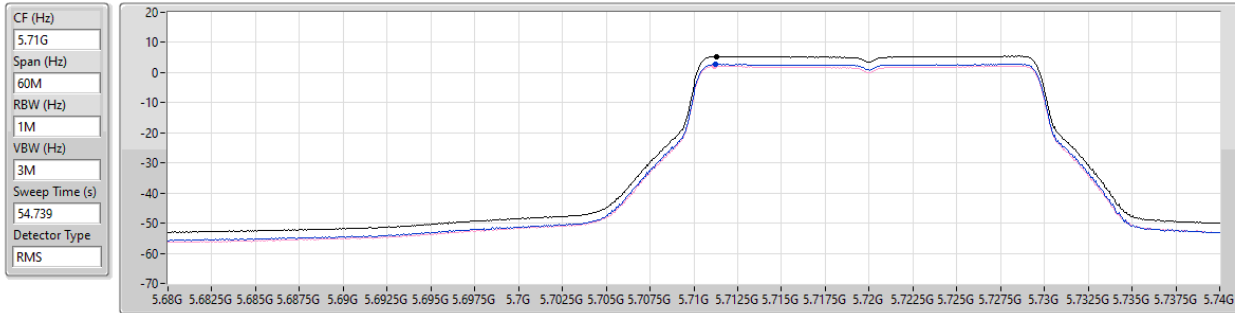


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
5.36	5.36	2.71	2.07

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.725-5.85GHz

27/12/2024

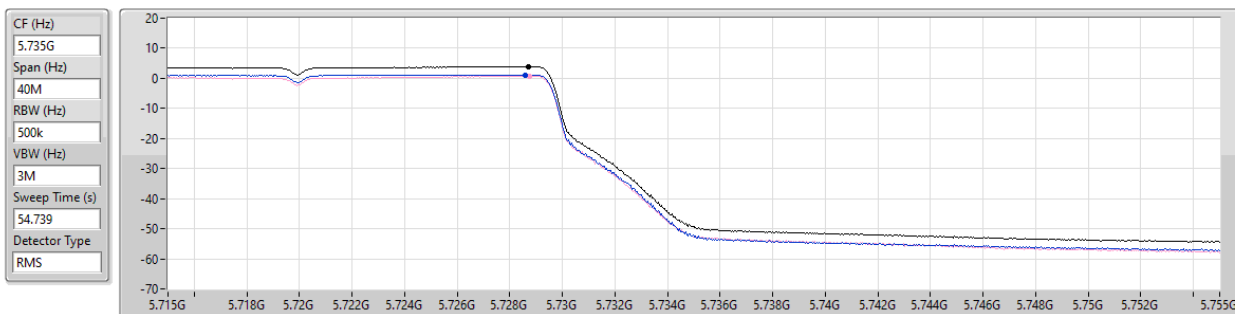

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.98	3.98	1.19	0.77

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5510MHz

27/12/2024

CF (Hz)
5.51G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

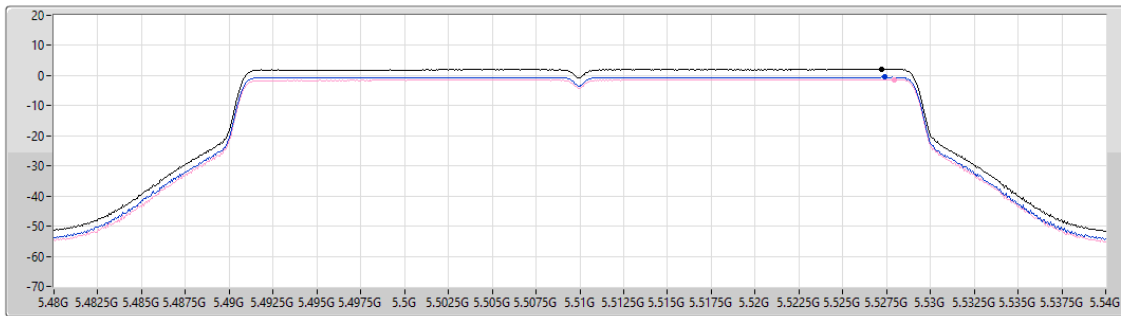

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.07	2.07	-0.55	-1.31

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5550MHz

27/12/2024

CF (Hz)
5.55G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

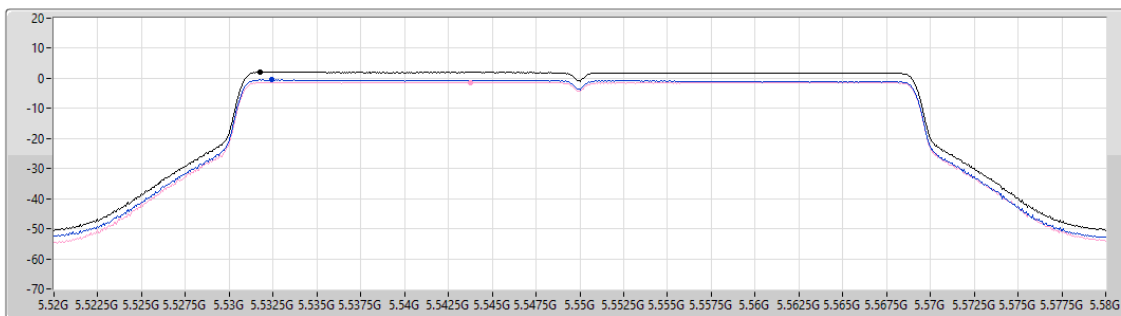

Sum 

Port 1 

Port 2 

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.05	2.05	-0.51	-1.28

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5670MHz

27/12/2024

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

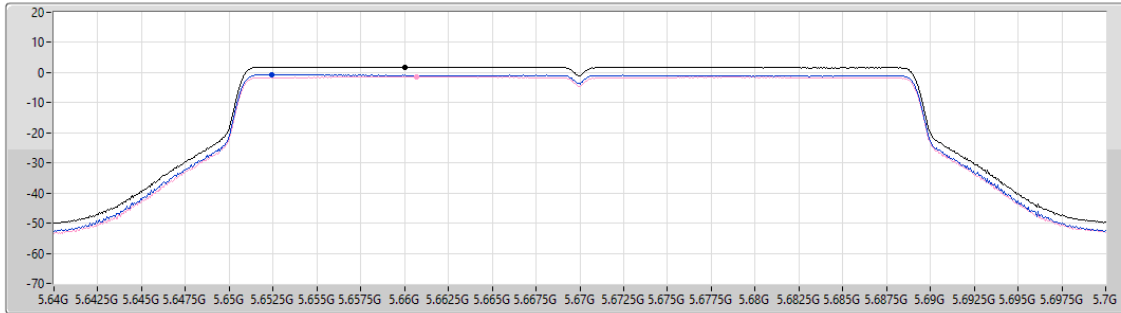

Sum ☐

Port 1 ☐

Port 2 ☐

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.86	1.86	-0.73	-1.38

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.47-5.725GHz

27/12/2024

CF (Hz)
5.69G


Span (Hz)
140M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

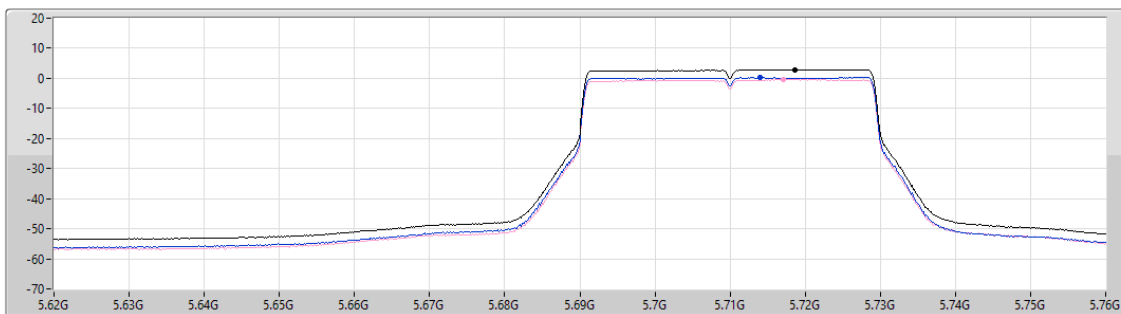

Sum ☐

Port 1 ☐

Port 2 ☐


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.85	2.85	0.20	-0.41

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

5710MHz Straddle 5.725-5.85GHz

27/12/2024

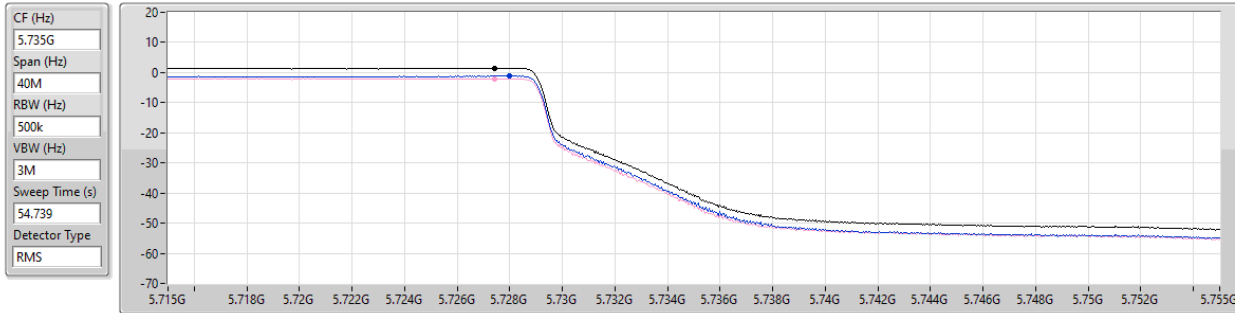


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.40	1.40	-1.13	-2.10

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5530MHz

27/12/2024

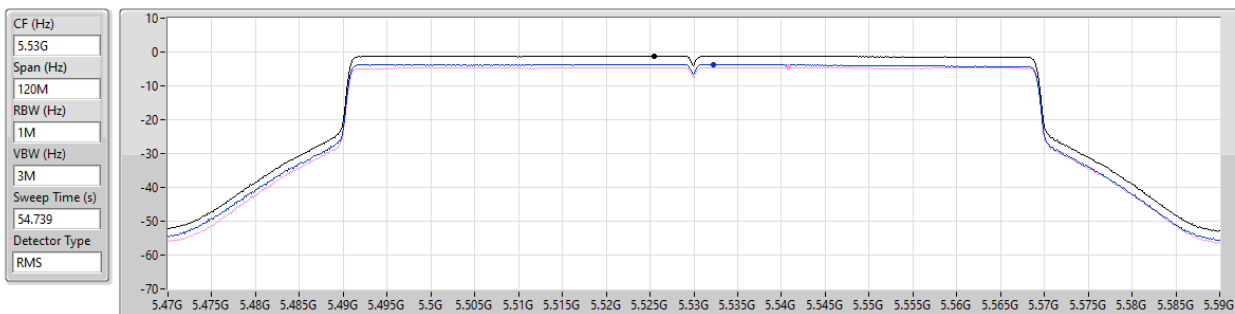


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.10	-1.10	-3.64	-4.51

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5610MHz

27/12/2024

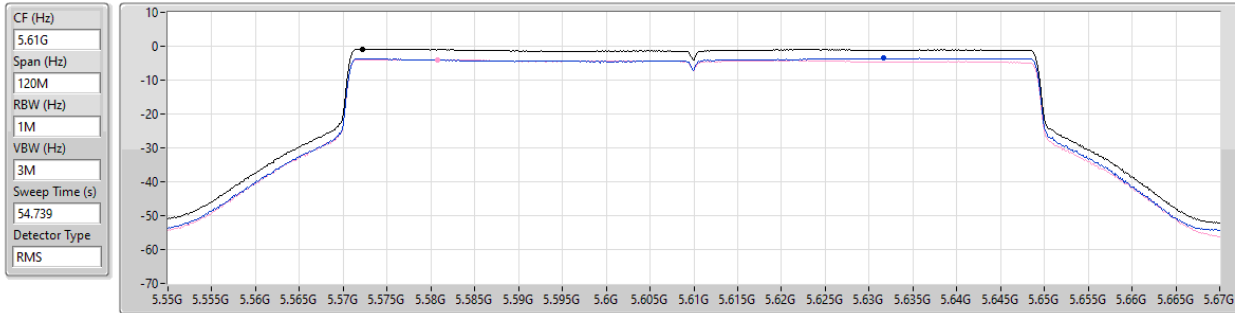

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.83	-0.83	-3.57	-3.92

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

27/12/2024

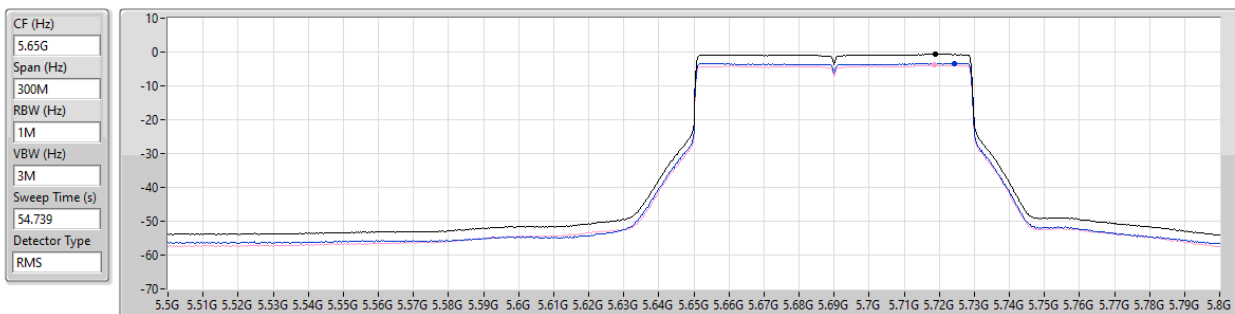

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.71	-0.71	-3.42	-3.90

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

27/12/2024

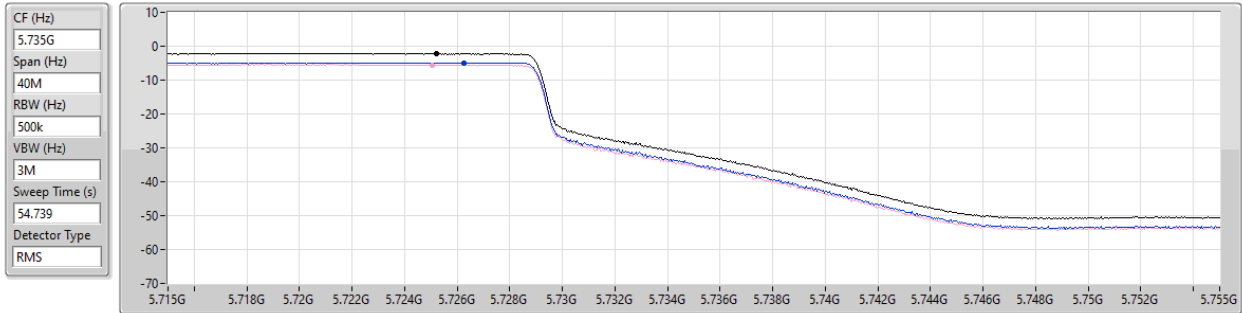


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.24	-2.24	-4.93	-5.57

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_2TX

PSD

5570MHz

27/12/2024

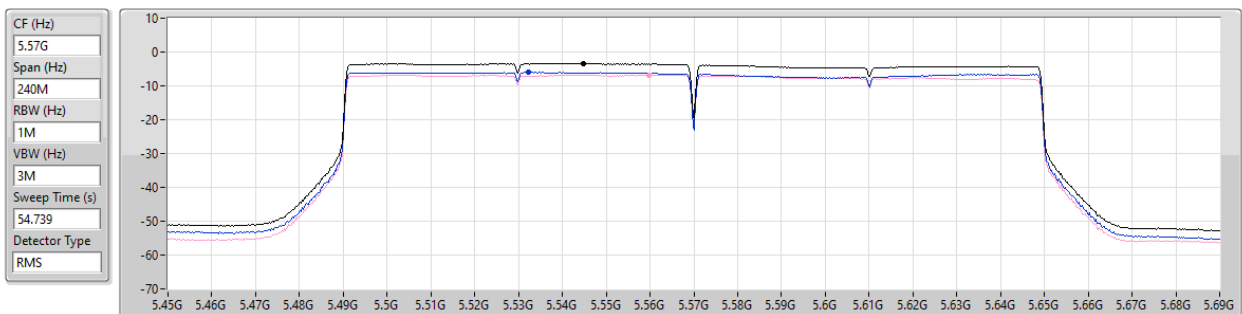

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.45	-3.45	-6.01	-6.80

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5500MHz

20/12/2024

CF (Hz)
5.5G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

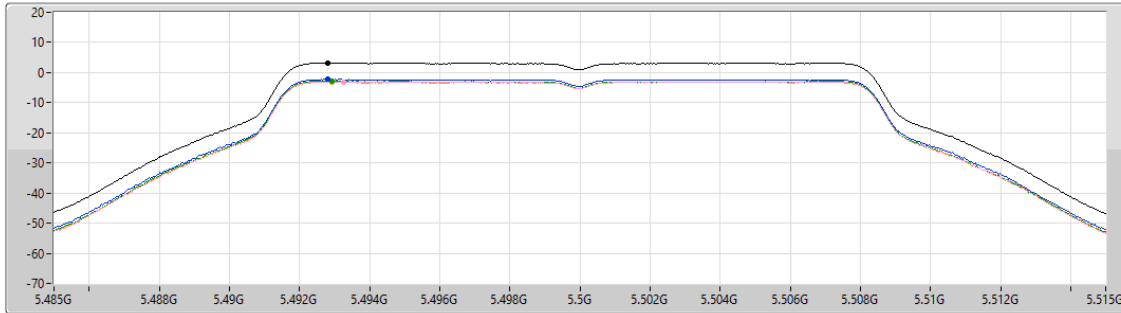

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.19	3.19	-2.21	-3.04	-2.78	-3.12

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5580MHz

20/12/2024

CF (Hz)
5.58G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

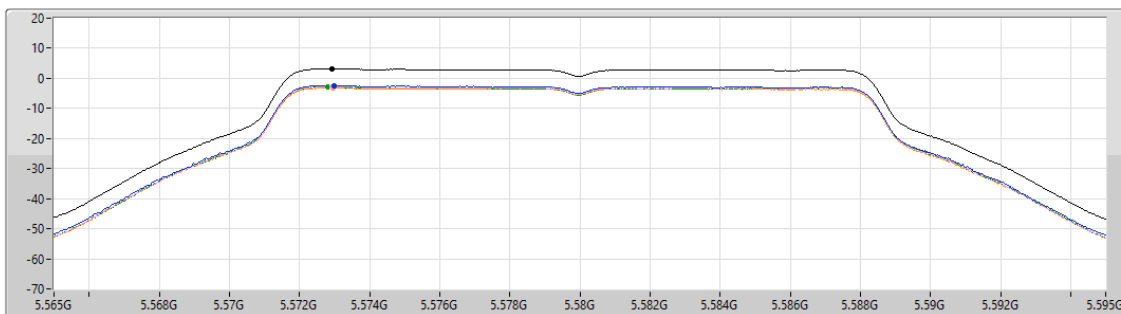

Sum 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.18	3.18	-2.41	-2.82	-2.85	-3.18

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5700MHz

20/12/2024

CF (Hz)
5.7G


Span (Hz)
30M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

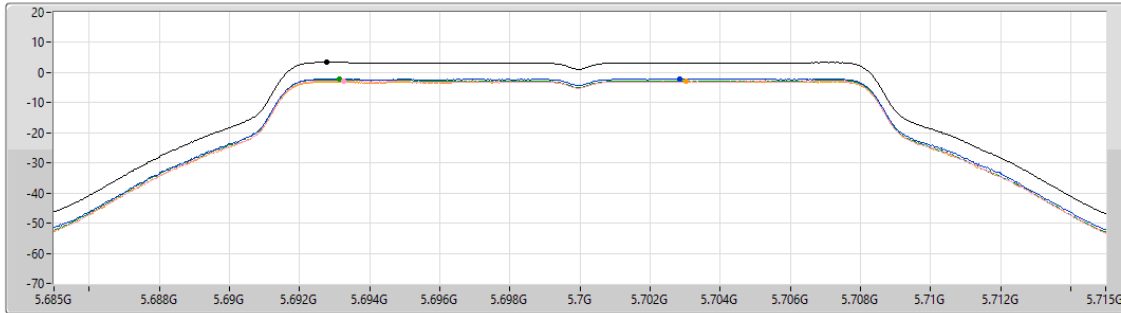

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.41	3.41	-2.10	-2.77	-2.32	-2.95

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

20/12/2024

CF (Hz)
5.71G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
19.954

Detector Type
RMS

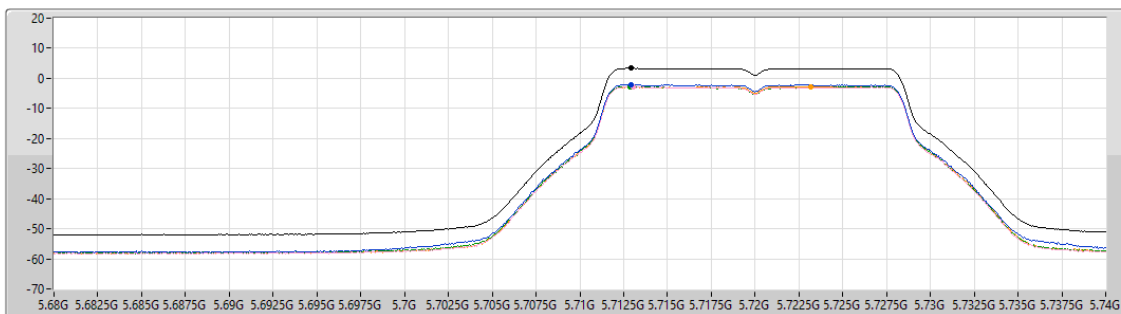

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
3.36	3.36	-2.10	-2.90	-2.74	-2.71

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

20/12/2024

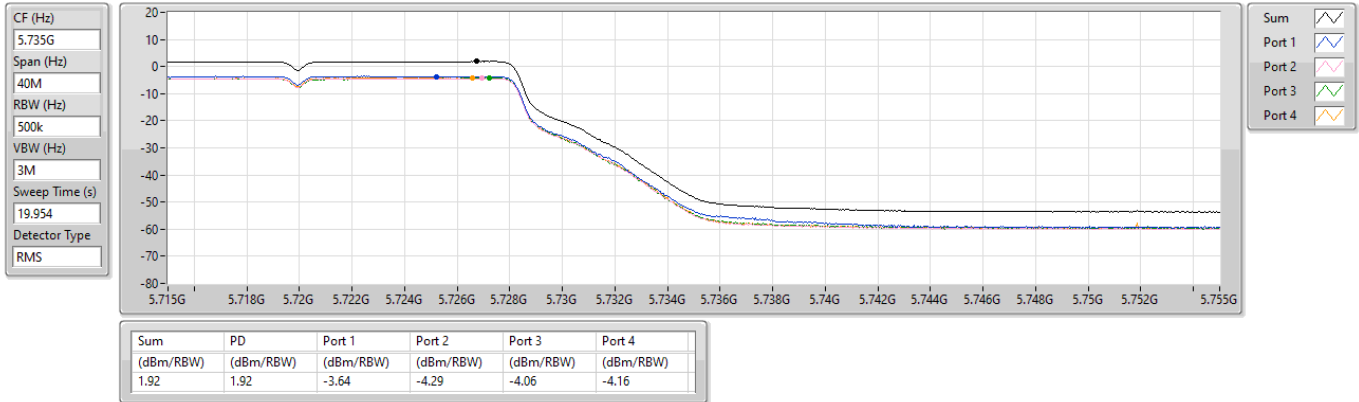


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5500MHz

20/12/2024

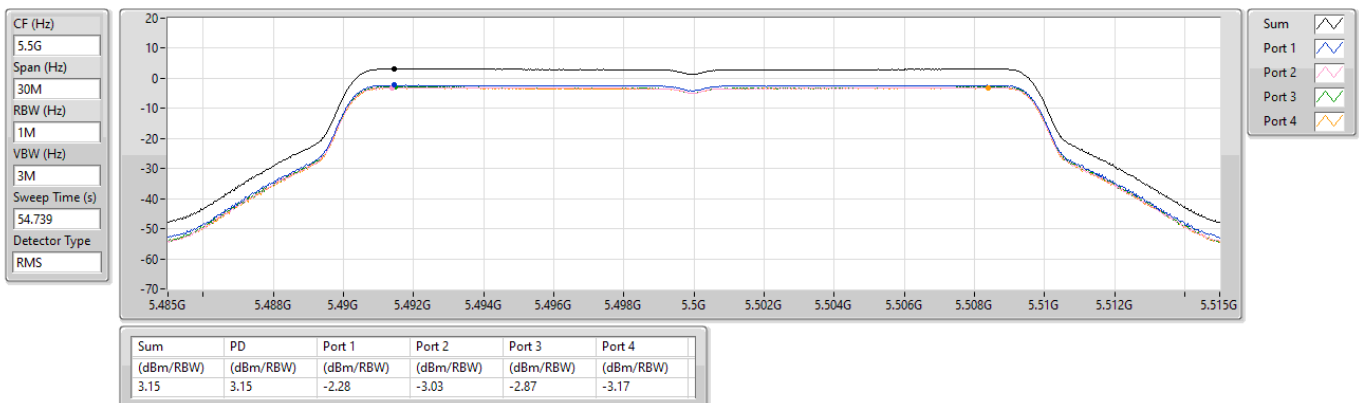


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5580MHz

20/12/2024

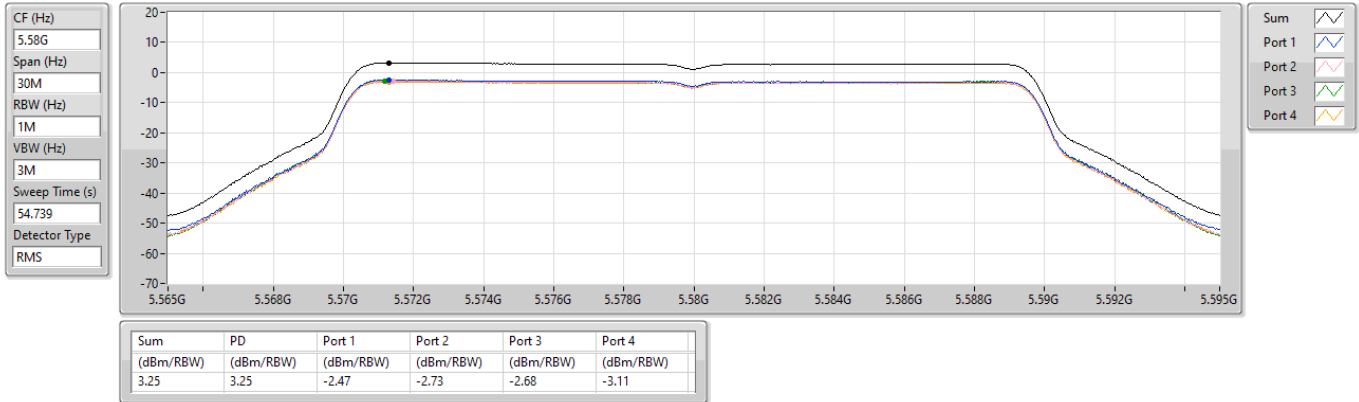


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5700MHz

20/12/2024

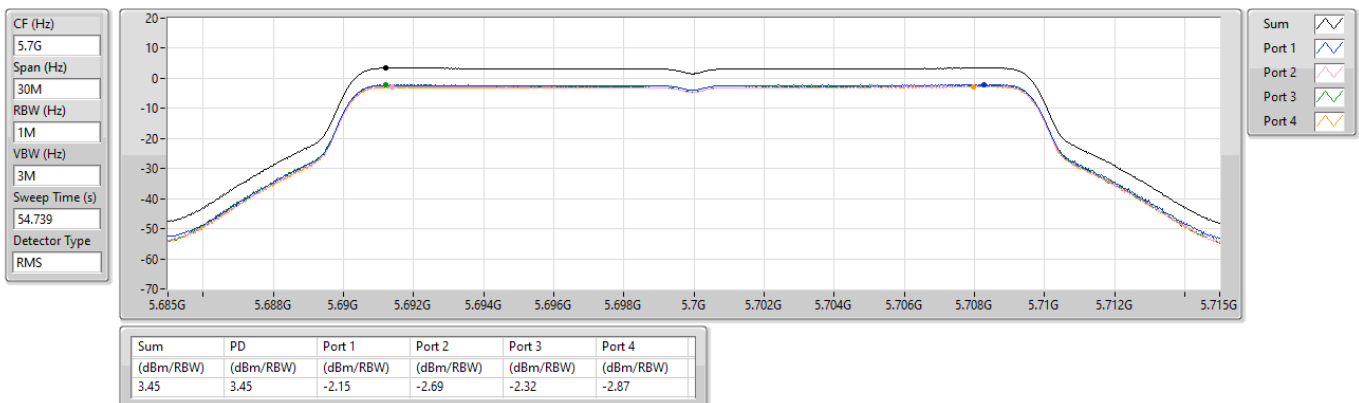


5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.47-5.725GHz

20/12/2024

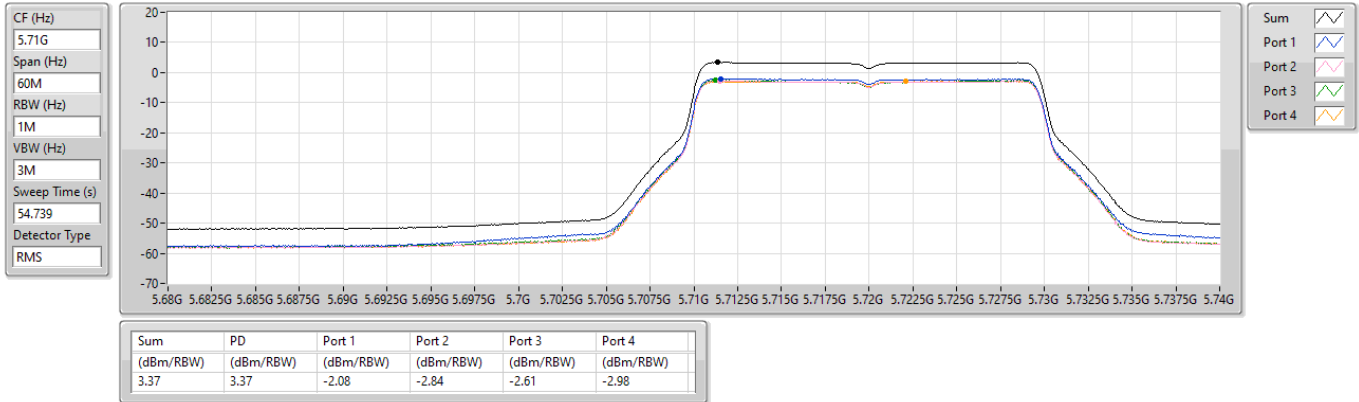


5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_4TX

PSD

5720MHz Straddle 5.725-5.85GHz

20/12/2024

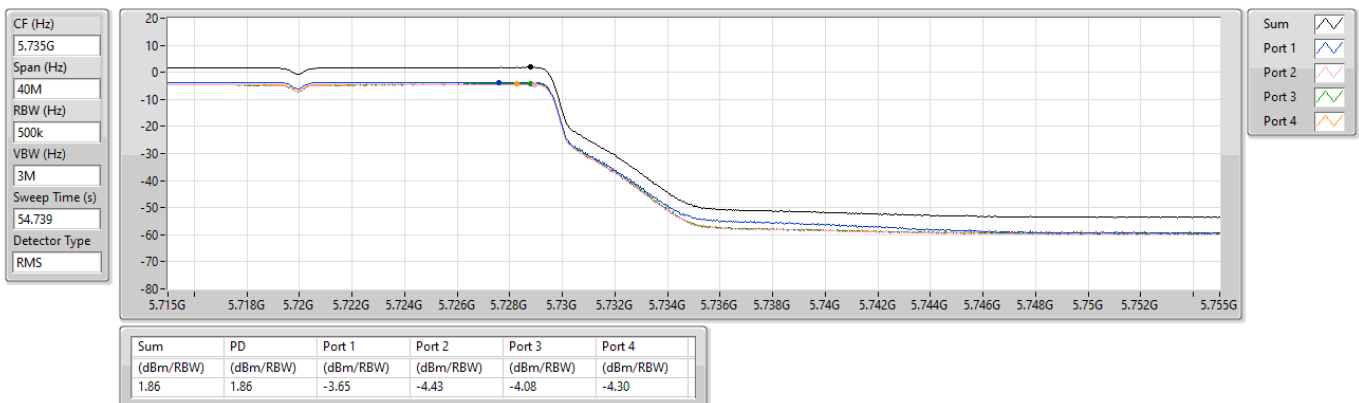


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5510MHz

20/12/2024

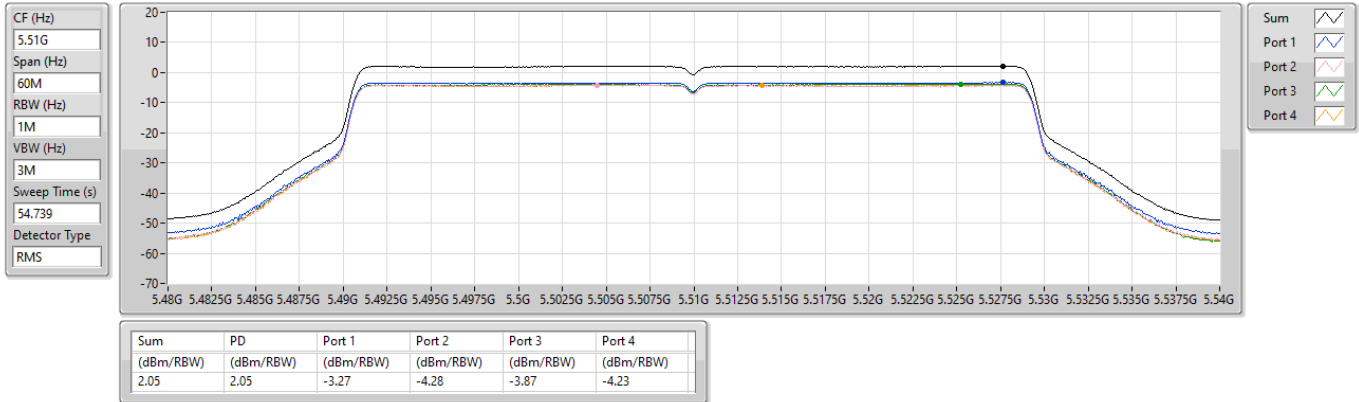


5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5550MHz

20/12/2024

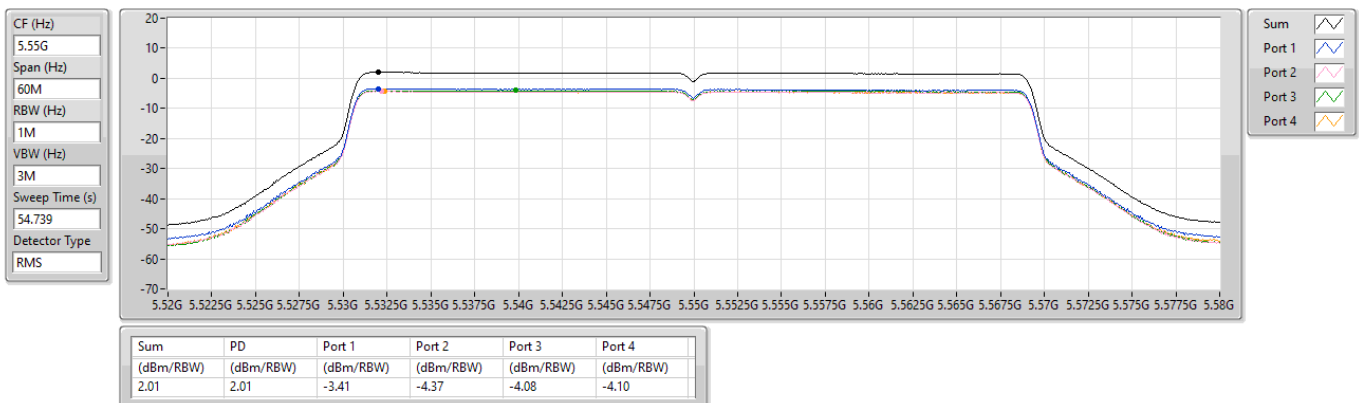

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5670MHz

20/12/2024

CF (Hz)
5.67G


Span (Hz)
60M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

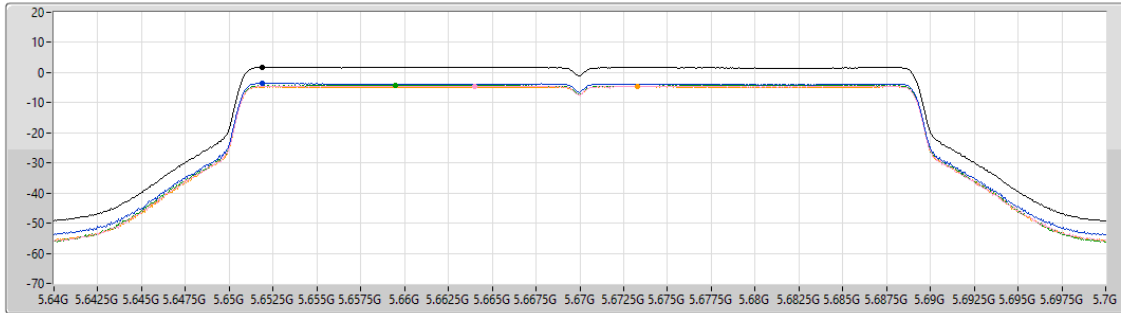

Sum

Port 1

Port 2

Port 3

Port 4

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.68	1.68	-3.54	-4.55	-4.18	-4.63

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.47-5.725GHz

20/12/2024

CF (Hz)
5.69G


Span (Hz)
140M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

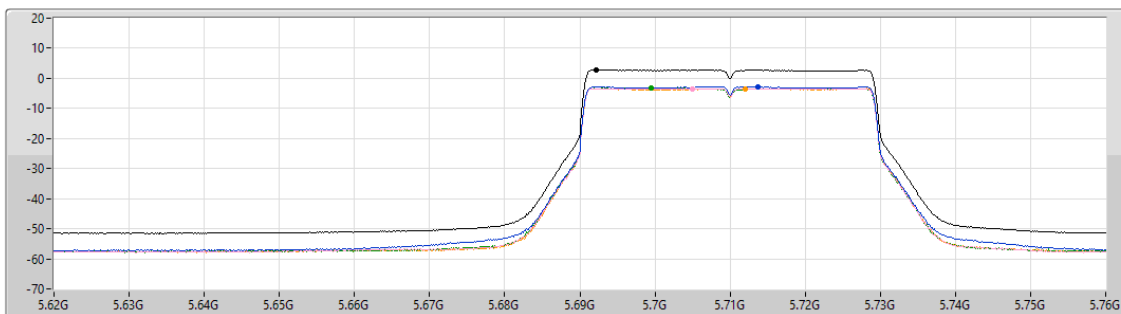

Sum

Port 1

Port 2

Port 3

Port 4


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.72	2.72	-2.87	-3.39	-3.18	-3.40

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_4TX

PSD

5710MHz Straddle 5.725-5.85GHz

20/12/2024

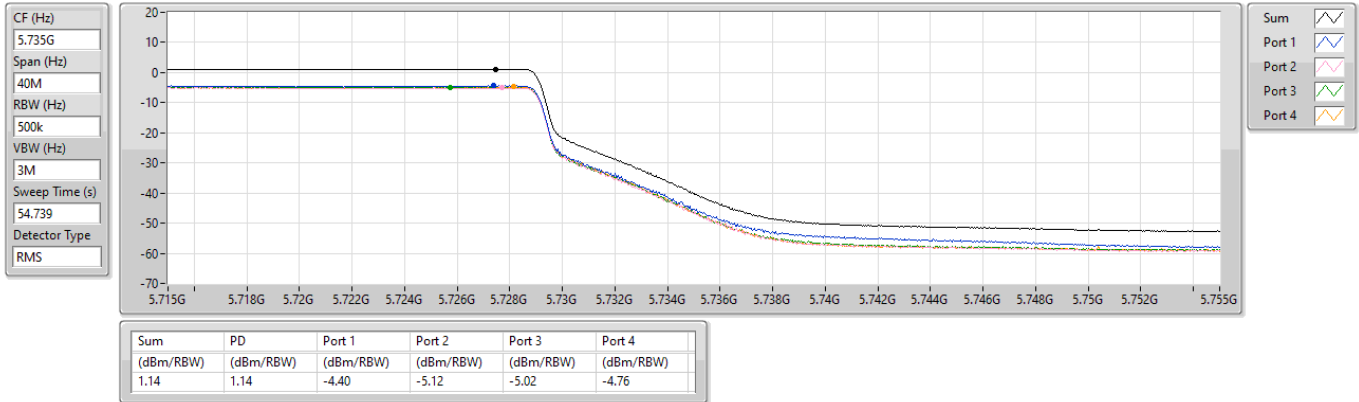


5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5530MHz

20/12/2024

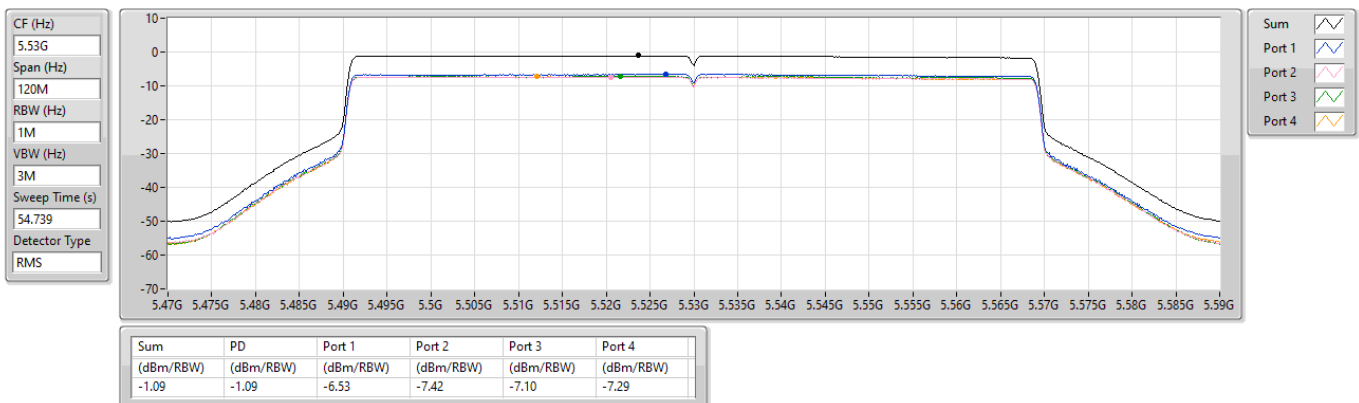

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5610MHz

20/12/2024

CF (Hz)
5.61G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

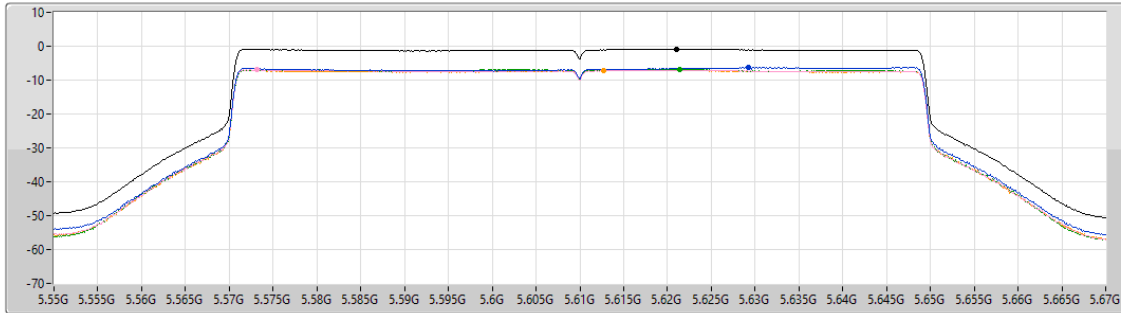

Sum 

Port 1 

Port 2 

Port 3 

Port 4 

Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.91	-0.91	-6.31	-6.97	-6.77	-7.13

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.47-5.725GHz

20/12/2024

CF (Hz)
5.65G


Span (Hz)
300M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
54.739

Detector Type
RMS

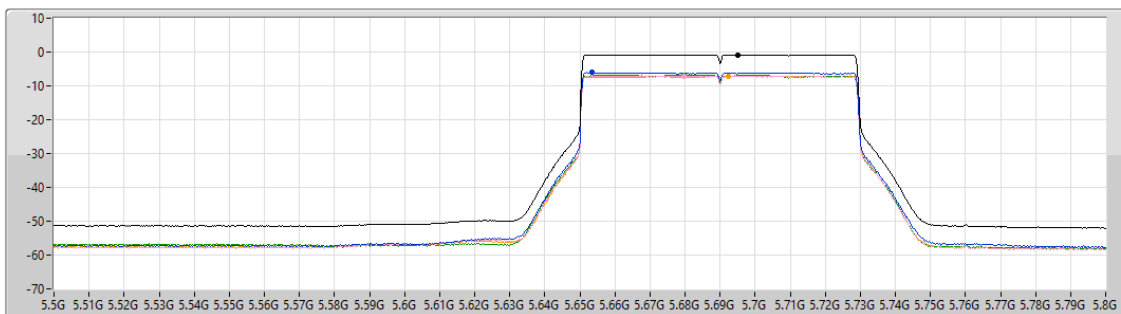

Sum 

Port 1 

Port 2 

Port 3 

Port 4 


Sum	PD	Port 1	Port 2	Port 3	Port 4
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.84	-0.84	-6.07	-7.06	-6.72	-7.06

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_4TX

PSD

5690MHz Straddle 5.725-5.85GHz

20/12/2024

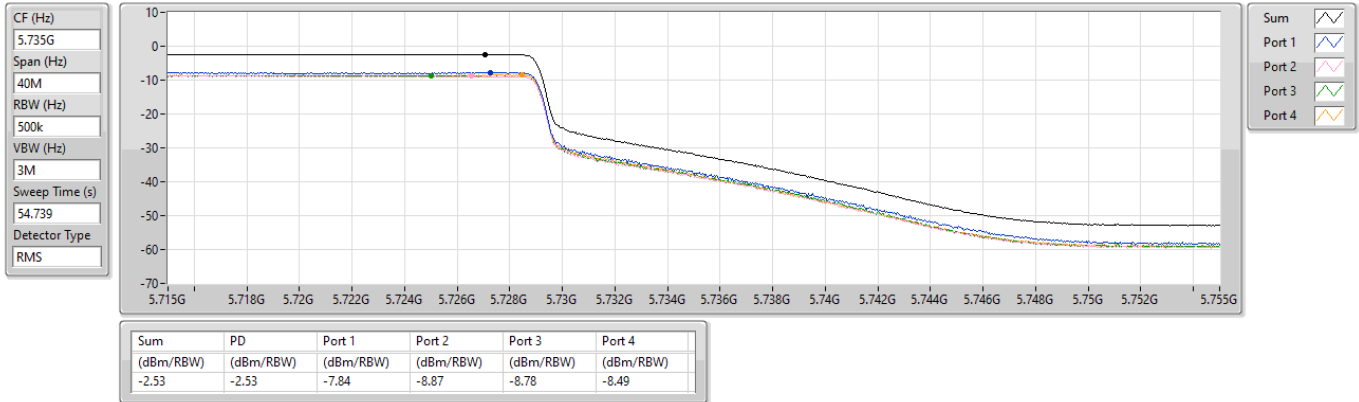


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_4TX

PSD

5570MHz

20/12/2024

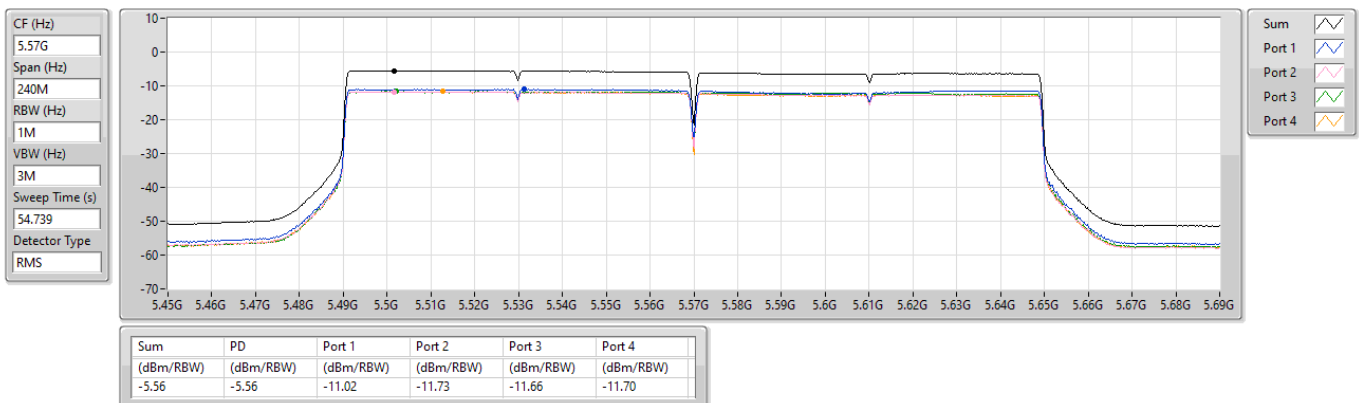



Summary

Mode	PD (dBm/RBW)
5.47-5.725GHz	-
802.11be EHT80_Nss1,(MCS0)_1TX	1.28
802.11be EHT80_Nss1,(MCS0)_2TX	-0.89
802.11be EHT80_Nss1,(MCS0)_4TX	-2.05
802.11be EHT160_Nss1,(MCS0)_1TX	-4.81
802.11be EHT160_Nss1,(MCS0)_2TX	-4.23
802.11be EHT160_Nss1,(MCS0)_4TX	-8.56
5.725-5.85GHz	-
802.11be EHT80_Nss1,(MCS0)_1TX	-2.58
802.11be EHT80_Nss1,(MCS0)_2TX	-2.34
802.11be EHT80_Nss1,(MCS0)_4TX	-3.82

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-2.91				-2.91	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-2.76				-2.76	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-
5610MHz	Pass	10.70	1.28				1.28	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5610MHz	Pass	10.70	1.23				1.23	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	-0.93				-0.93	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	-1.20				-1.20	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-2.58				-2.58	25.60
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-2.74				-2.74	25.60
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-4.81				-4.81	6.30
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-7.24				-7.24	6.30
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-6.48				-6.48	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-4.13	-4.39			-1.35	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5530MHz	Pass	10.70	-4.05	-4.16			-1.14	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5610MHz	Pass	10.70	-3.66	-4.03			-0.92	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5610MHz	Pass	10.70	-3.79	-3.90			-0.90	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	-3.75	-3.99			-0.89	6.30
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	10.70	-3.85	-3.80			-0.94	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-5.47	-5.52			-2.56	25.60
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	10.40	-5.28	-5.42			-2.34	25.60
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-8.57	-8.75			-5.79	6.30
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-8.07	-8.08			-5.10	6.30
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_2TX	-	-	-	-	-	-	-	-
5570MHz	Pass	10.70	-6.99	-7.32			-4.23	6.30
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5530MHz	Pass	13.42	-9.43	-9.45	-9.91	-9.43	-3.72	3.58
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5530MHz	Pass	13.42	-7.64	-8.36	-8.57	-7.90	-2.28	3.58
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5610MHz	Pass	13.42	-8.69	-9.60	-9.60	-9.40	-3.62	3.58
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5610MHz	Pass	13.42	-7.28	-8.00	-8.16	-7.88	-2.05	3.58
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-



PSD_R3_Multi-RU
(Parent Device / FCC ID: UDX-600216010)

Appendix D.3

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5690MHz Straddle 5.47-5.725GHz	Pass	13.42	-9.95	-10.43	-10.00	-10.16	-4.31	3.58
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.47-5.725GHz	Pass	13.42	-7.92	-8.58	-7.96	-8.07	-2.23	3.58
802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_4TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	13.21	-11.74	-12.10	-11.91	-12.04	-6.00	22.79
802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5690MHz Straddle 5.725-5.85GHz	Pass	13.21	-9.57	-10.01	-9.53	-9.76	-3.82	22.79
802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	13.42	-15.70	-16.53	-15.82	-16.40	-10.28	3.58
802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	13.42	-14.88	-15.55	-15.09	-15.31	-9.35	3.58
802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_4TX	-	-	-	-	-	-	-	-
5570MHz	Pass	13.42	-14.00	-14.55	-14.06	-14.26	-8.56	3.58


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

PSD

5530MHz

06/02/2025

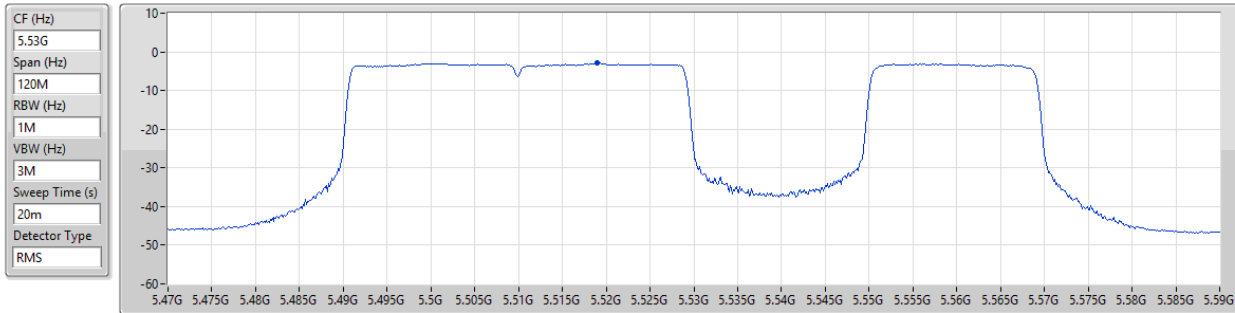


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.91	-2.91	-2.91

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

PSD

5530MHz

06/02/2025

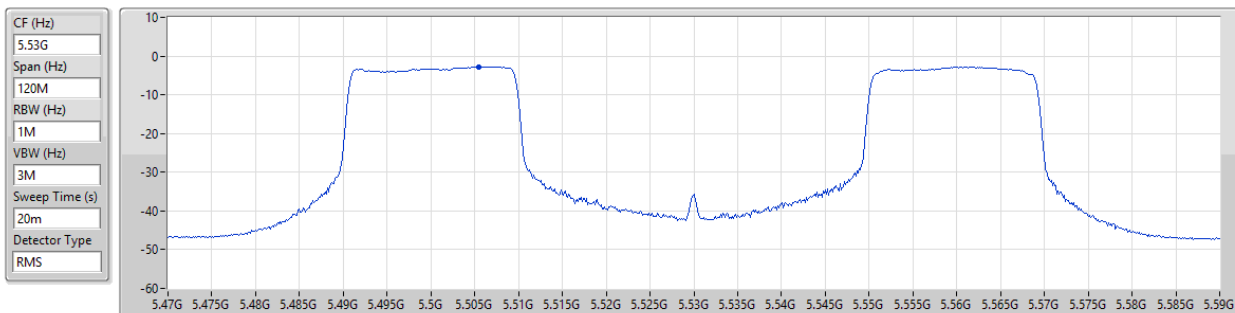


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.76	-2.76	-2.76

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

PSD

5610MHz

06/02/2025

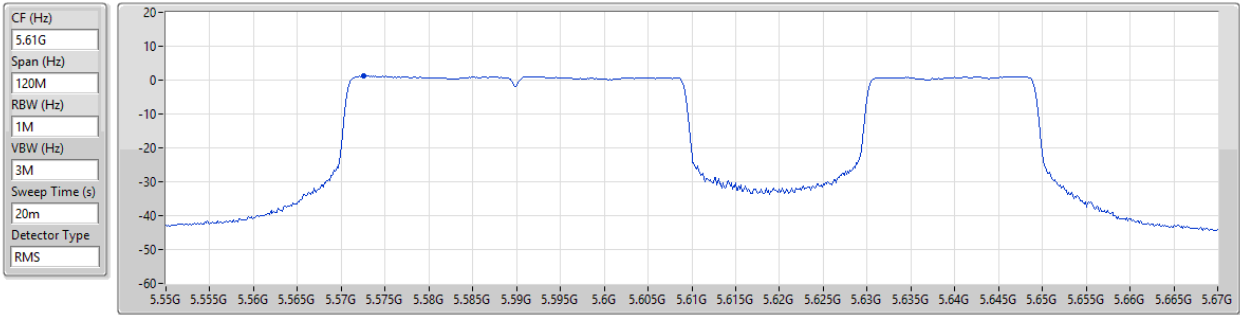


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.28	1.28	1.28

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

PSD

5610MHz

06/02/2025

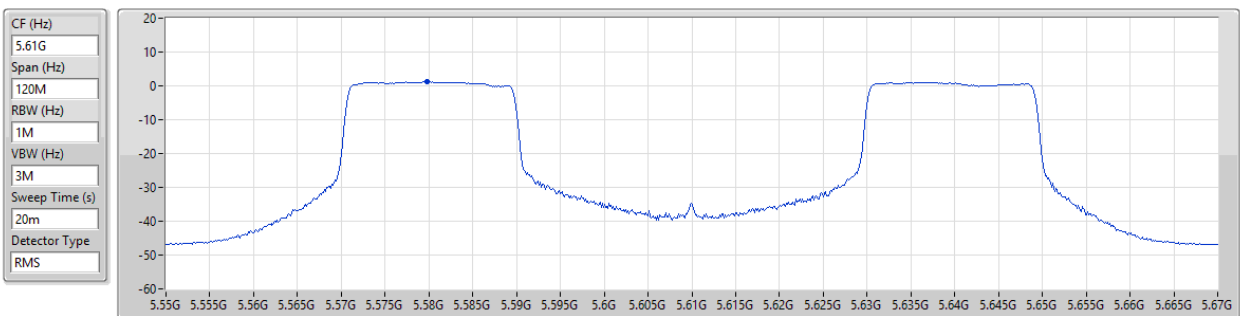


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
1.23	1.23	1.23

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

08/02/2025

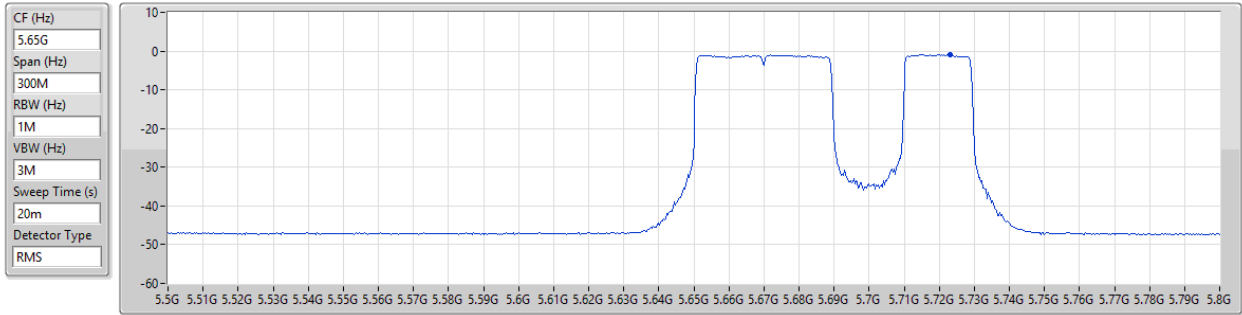


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.93	-0.93	-0.93

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

PSD

5690MHz Straddle 5.47-5.725GHz

08/02/2025

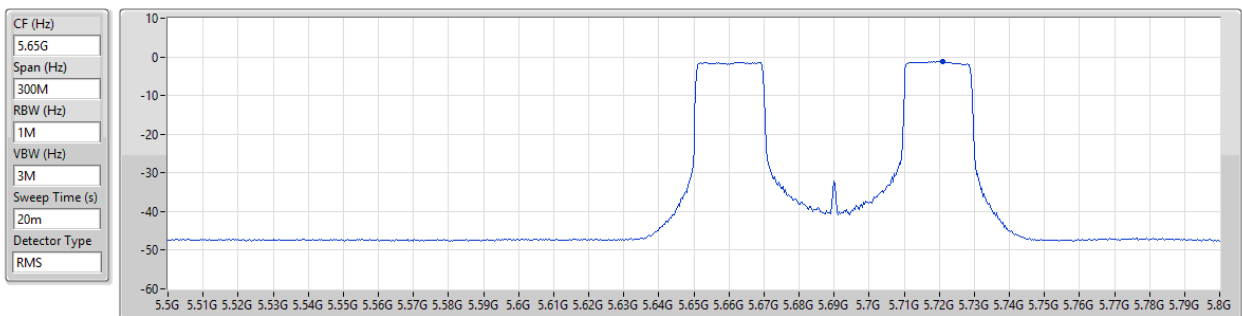


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.20	-1.20	-1.20

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_1TX

PSD

5690MHz Straddle 5.725-5.85GHz

08/02/2025

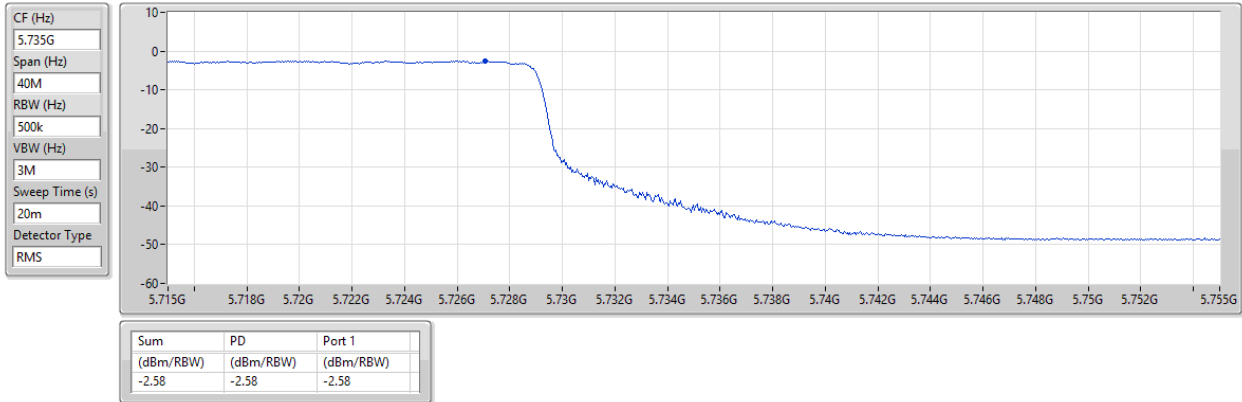


5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_1TX

PSD

5690MHz Straddle 5.725-5.85GHz

08/02/2025

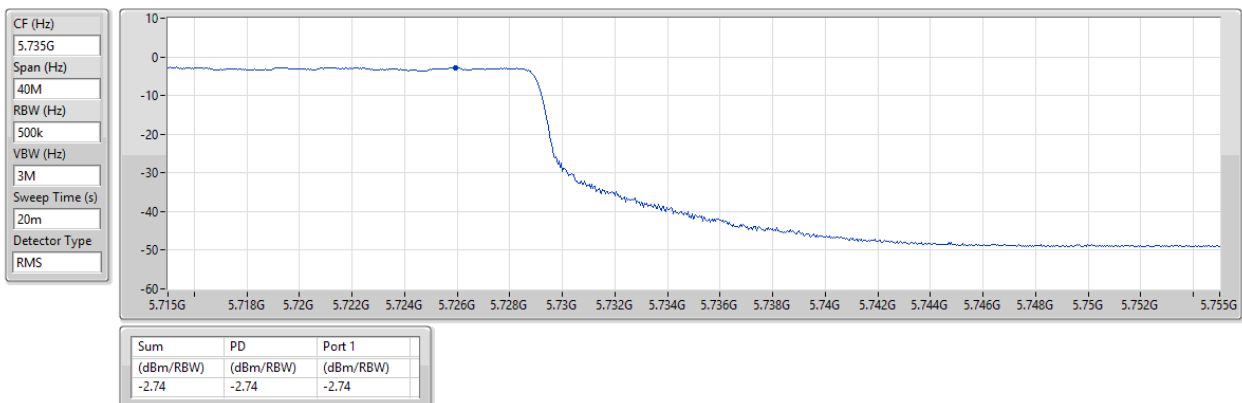


5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU996+RU484 MRU 2_1TX

PSD

5570MHz

08/02/2025

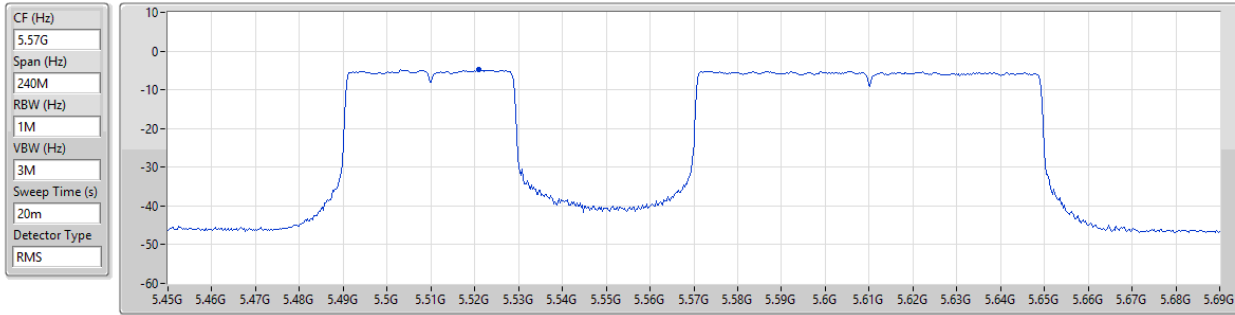


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.81	-4.81	-4.81

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+3xRU242 MRU 1_1TX

PSD

5570MHz

07/02/2025

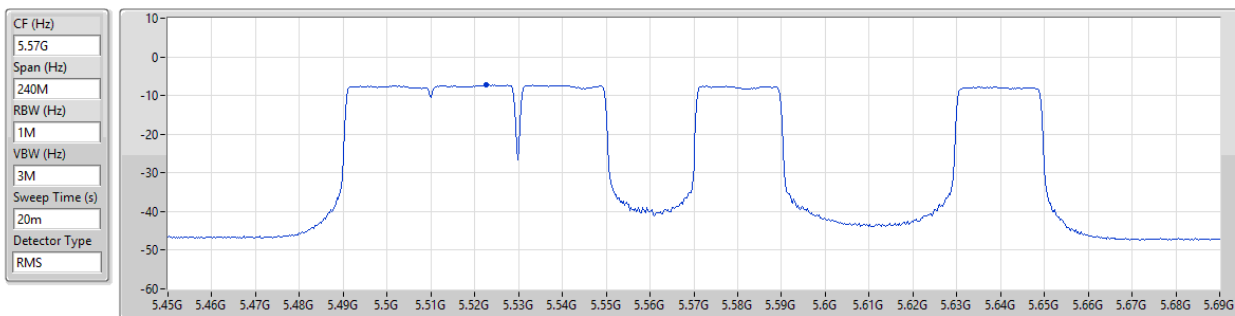


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.24	-7.24	-7.24

5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0),RU484+RU484 MRU 1_1TX

PSD

5570MHz

08/02/2025

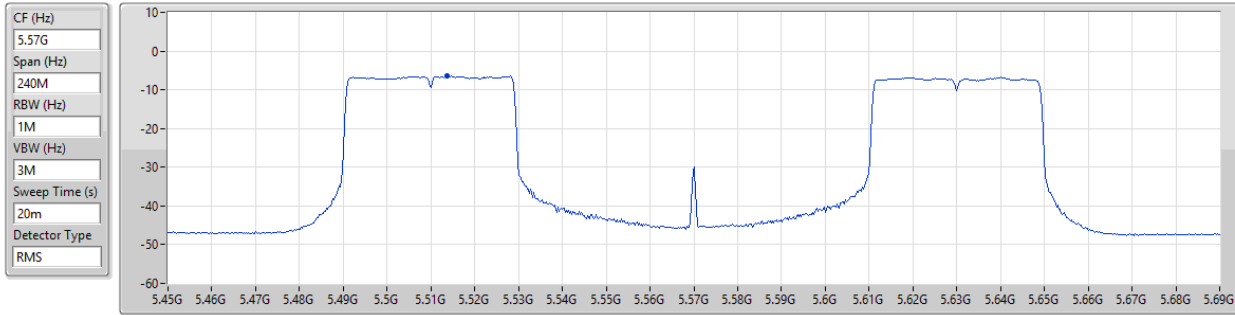


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.48	-6.48	-6.48

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5530MHz

07/02/2025

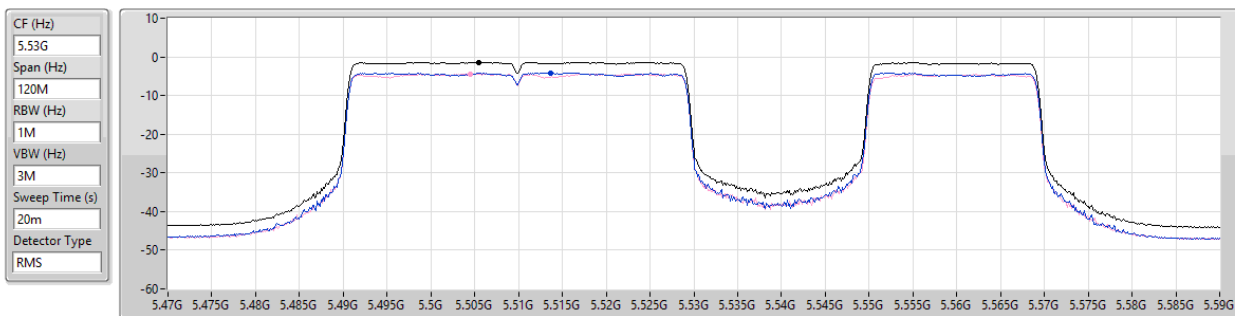

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.35	-1.35	-4.13	-4.39

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5530MHz

07/02/2025

CF (Hz)
5.53G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

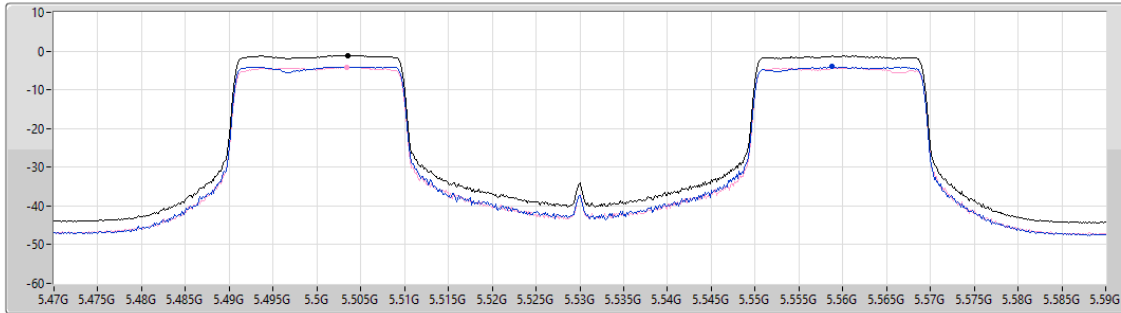

Sum ☒

Port 1 ☒

Port 2 ☒

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-1.14	-1.14	-4.05	-4.16

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5610MHz

07/02/2025

CF (Hz)
5.61G


Span (Hz)
120M

RBW (Hz)
1M

VBW (Hz)
3M

Sweep Time (s)
20m

Detector Type
RMS

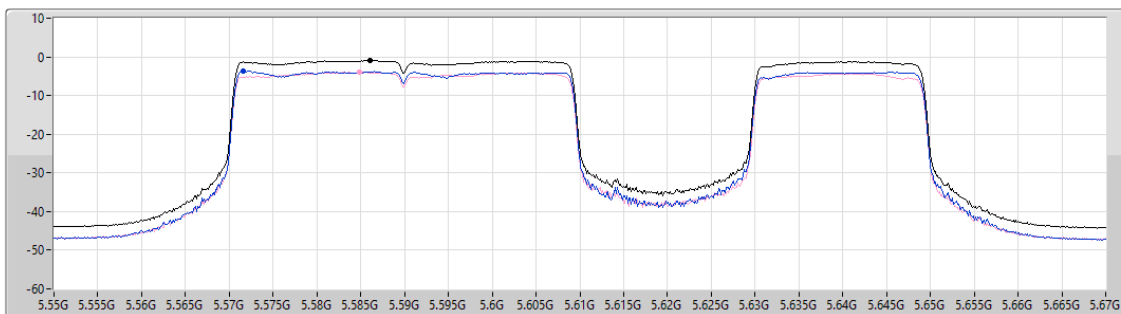

Sum ☒

Port 1 ☒

Port 2 ☒


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.92	-0.92	-3.66	-4.03

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5610MHz

07/02/2025

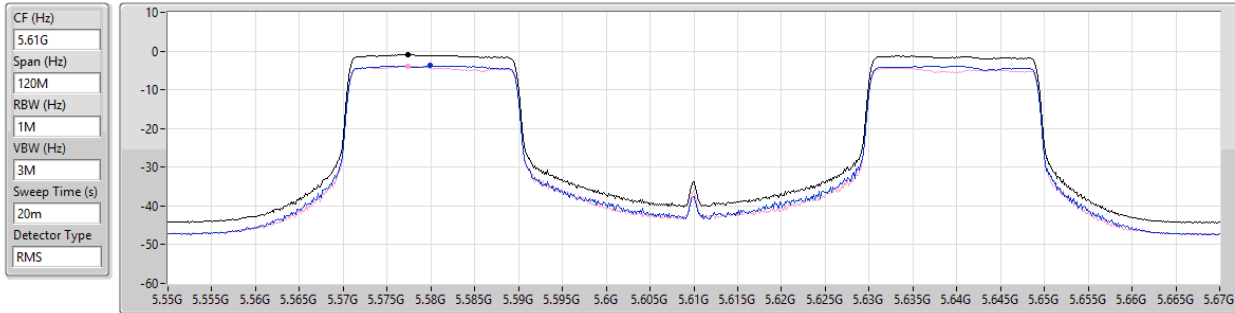


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.90	-0.90	-3.79	-3.90

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

07/02/2025

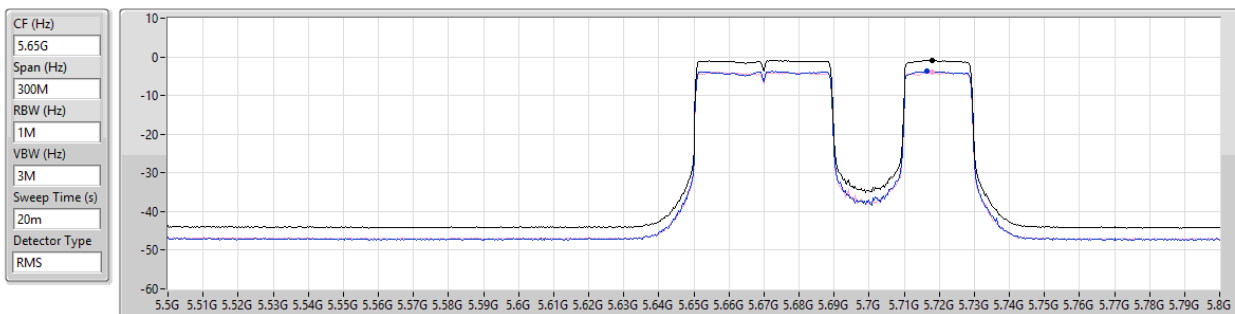


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-0.89	-0.89	-3.75	-3.99

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0),RU242+RU242 MRU 1_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

07/02/2025

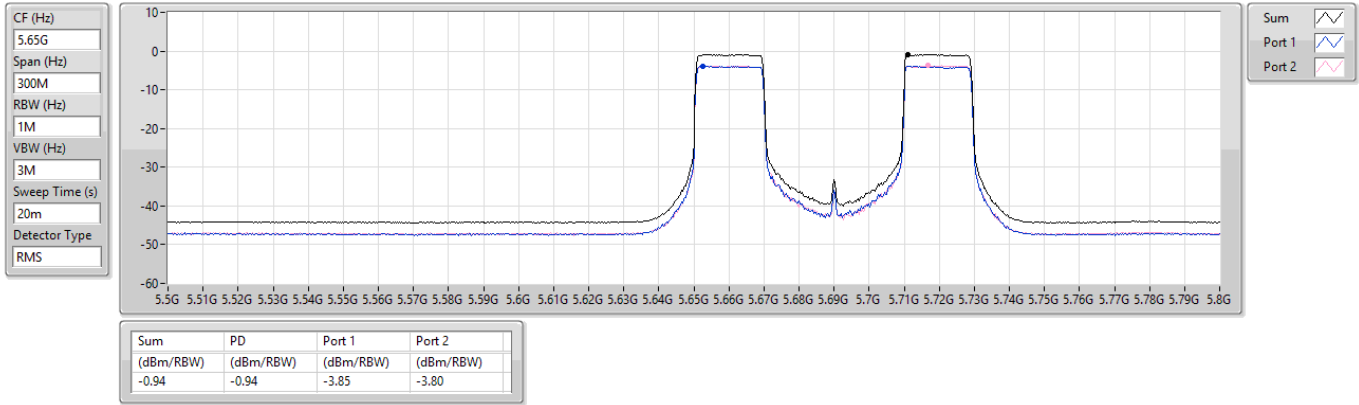

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0),RU484+RU242 MRU 3_2TX

PSD

5690MHz Straddle 5.725-5.85GHz

07/02/2025

