


Document MOT11047-02
FCC ID: UZ7FX7400
IC : 109AN-FX7400

RF Exposure Test Report
Washington Laboratories, Ltd

October 2009

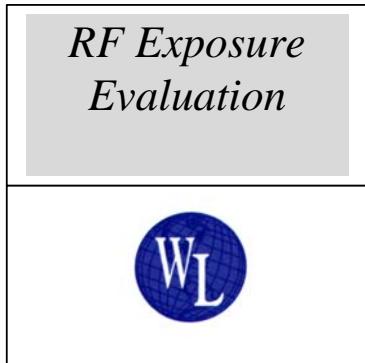

Maximum Permissible Exposure Evaluation
for
Motorola - Enterprise Mobility Solutions
FX7400

FCC ID: UZ7FX7400
IC: 109AN-FX7400

October 30, 2009

WLL PROJECT #: 11047-02

This report may not be reproduced, except in full, without the prior written consent of Washington Laboratories, Ltd.

Maximum Permissible Exposure Test Report

for

FCC ID: UZ7FX7400
IC: 109AN-FX7400

1.0 Introduction

This report has been prepared on behalf of Motorola - Enterprise Mobility Solutions FX7400 transmitter to show compliance with the RF exposure requirements as defined in FCC §1.1307 and RSS 210 issue 3.

1.1 Requirements

Three different categories of transmitters are defined by the FCC in OET Bulletin 65. These categories are fixed installation, mobile, and portable and are defined as follows:

- **Fixed Installations:** fixed location means that the device, including its antenna, is physically secured at a permanent location and is not able to be easily moved to another location. Additionally, distance to humans from the antenna is maintained to at least 2 meters.
- **Mobile Devices:** a mobile device is defined as a transmitting device designed to be used in other than fixed locations and to be generally used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structures and the body of the user or nearby persons. Transmitters designed to be used by consumers or workers that can be easily re-located, such as a wireless modem operating in a laptop computer, are considered mobile devices if they meet the 20 centimeter separation requirement. The FCC rules for evaluating mobile devices for RF compliance are found in 47 CFR §2.1091.
- **Portable Devices:** a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user. Portable device requirements are found in Section 2.1093 of the FCC's Rules (47 CFR§2.1093).

The FCC and Industry Canada also categorizes the use of the device as based upon the user's awareness and ability to exercise control over his or her exposure. The two categories defined are Occupational/ Controlled Exposure and General Population/Uncontrolled Exposure. These two categories are defined as follows:

- **Occupational/Controlled Exposure:** In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on methods to minimize such exposure risks.
- **General Population/Uncontrolled Exposure:** The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category, and the general population/uncontrolled exposure limits apply to these devices.

The Motorola - Enterprise Mobility Solutions FX7400 is evaluated to the General Population/Uncontrolled Exposure limits. Evaluation is done as a fixed device.

1.2 Radio Frequency Radiation Exposure Evaluation

The highest RF output power of the unit was measured at 29.97dBm at 902.75 MHz. According to §1.1310 of the FCC rules and IC RSS210 Table 4.2, the power density limit for General Population/Uncontrolled Exposure at 902.75 MHz is 0.602mW/cm^2 . The MPE is calculated to show the required separation distance that must be maintained during installation to maintain

compliance with the power density limit. The following formula was used to calculate the Power Density:

$$S = \frac{PG}{4\pi R^2}$$

Where:

S = Power Density

P = Output Power at the Antenna Terminals

G = Gain of Transmit Antenna (linear gain)

R = Distance from Transmitting Antenna

To solve for the minimum mounting distance required:

$$R = \sqrt{\frac{PG}{4\pi S}}$$

For this device, the calculation is as follows:

S = 0.602 mW/cm²

P = Output Power = 993.12 mW

G = Worst Case Gain = 6dBi = INVLOG(6/10) = 4

$$R = \sqrt{\frac{(993.12) \times (4)}{4 \times \pi \times 0.602}} = 22.9 \text{ cm (Based on continuous transmission)}$$

Based on the above calculation the Motorola FX7400 each antenna must be mounted such that it provides a minimum separation distance of 22.9 cm. The User's Manual Section 2 covering Installation and Communications addresses the mounting location in the instructions for mounting the reader.

The EUT has four antennas that in which the output is sequential (No simultaneous transmit) Thus only one antenna is active at a time. As the end-user can control the number of antennas active the worst case of 1 antenna was selected for RF evaluation (all data flowing though one antenna continuously).