

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1709-0102(1)

2. Customer

- Name : POINT MOBILE CO.,LTD
- Address : B-9F, Kabul Great Valley 32 Digital-ro 9-gil, Geumcheon-gu Seoul South Korea
153-709

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Mobile Computer / PM70

FCC ID : V2X-PM70G

5. Test Method Used : IEEE 1528-2013 , FCC SAR KDB Publications (Details in test report)

Test Specification : CFR §2.1093

6. Date of Test : 2017-07-03 ~ 2017-07-14

7. Testing Environment : Refer to attached test report

8. Test Result : Refer to attached test report.

Affirmation	Tested by Name : HoSik Sim		Technical Manager Name : HakMin Kim	
-------------	-------------------------------	---	--	---

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2017 . 10 . 19 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1709-0102	Sep. 07, 2017	Initial issue
DRRFCC1709-0102(1)	Oct. 19, 2017	Revised Simultaneous Transmission Scenarios

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 Guidance Applied	7
1.2 Device Overview	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	9
1.5 Near Field Communications (NFC) Antenna	9
1.6 SAR Test Exclusions Applied	9
1.7 Power Reduction for SAR	9
1.8 Device Serial Numbers	9
1.9 LTE Information	10
2. INTRODUCTION	11
3. DESCRIPTION OF TEST EQUIPMENT	12
3.1 SAR MEASUREMENT SETUP	12
3.2 EX3DV4Probe Specification	13
3.3 Probe Calibration Process	14
3.3.1 E-Probe Calibration	14
3.4 Data Extrapolation	15
3.5 SAM Twin PHANTOM	16
3.6 Device Holder for Transmitters	16
3.7 Brain & Muscle Simulation Mixture Characterization	17
3.8 SAR TEST EQUIPMENT	19
4. TEST SYSTEM SPECIFICATIONS	20
5. SAR MEASUREMENT PROCEDURE	21
5.1 Measurement Procedure	21
6. DEFINITION OF REFERENCE POINTS	23
6.1 Ear Reference Point	23
6.2 Handset Reference Points	23
7. TEST CONFIGURATION POSITIONS FOR HANDSETS	24
7.1 Device Holder	24
7.2 Positioning for Cheek/Touch	24
7.3 Positioning for Ear / 15 ° Tilt	24
7.4 Body-Worn Accessory Configurations	25
7.5 Extremity Exposure Configurations	25
8. RF EXPOSURE LIMITS	26
9. FCC MEASUREMENT PROCEDURES	27
9.1 Measured and Reported SAR	27
9.2 Procedures Used to Establish RF Signal for SAR	27
9.3 SAR Measurement Conditions for WCDMA (UMTS)	27
9.3.1 Output Power Verification	27
9.3.2 Head SAR Measurements for Handsets	27
9.3.3 Body SAR Measurements	28
9.3.4 Release 5 HSDPA Data Devices	28
9.3.5 Release 6 HSUPA Data Devices	28
9.4 SAR Measurement Conditions for LTE	29
9.4.1 Spectrum Plots for RB Configurations	29
9.4.2 MPR	29
9.4.3 Required RB Size and RB Offsets for SAR Testing	29
9.5 SAR Testing with 802.11 Transmitters	30
9.5.1 General Device Setup	30
9.5.2 U-NII and U-NII-2A	30
9.5.3 U-NII-2C and U-NII-3	30
9.5.4 Initial Test Position Procedure	30

9.5.5 2.4 GHz SAR Test Requirements	31
9.5.6 OFDM Transmission Mode and SAR Test Channel Selection	31
9.5.7 Initial Test Configuration Procedure	31
9.5.8 Subsequent Test Configuration Procedures	31
10. RF CONDUCTED POWERS	32
10.1 WCDMA Conducted Powers.....	32
10.2 LTE Conducted Powers	33
10.3 WLAN Conducted Powers	49
10.4 Bluetooth Conducted Powers	52
11. SYSTEM VERIFICATION	53
11.1 Tissue Verification	53
11.2 Test System Verification	55
12. SAR TEST RESULTS	57
12.1 Head SAR Results.....	57
12.2 Standalone Body-Worn SAR Worn SAR Results.....	61
12.3 SAR Test Notes	65
13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	68
13.1 Introduction.....	68
13.2 Simultaneous Transmission Procedures.....	68
13.3 Simultaneous Transmission Capabilities	68
13.4 Head SAR Simultaneous Transmission Analysis.....	70
13.5 Body-Worn Simultaneous Transmission Analysis.....	74
13.6 Simultaneous Transmission Conclusion	75
14. SAR MEASUREMENT VARIABILITY	76
14.1 Measurement Variability	76
15. IEEE Std 1528 –MEASUREMENT UNCERTAINTIES	77
16. CONCLUSION	93
17. REFERENCES	94
Attachment 1. – Probe Calibration Data	96
Attachment 2. – Dipole Calibration Data.....	173
Attachment 3. – SAR SYSTEM VALIDATION	230

1. DESCRIPTION OF DEVICE

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

General Information

EUT type	Mobile Computer			
FCC ID	V2X-PM70G			
Equipment model name	PM70			
Equipment add model name	N/A			
Equipment serial no.	Identical prototype			
Mode(s) of Operation	WCDMA 850, WCDMA1900, LTE Band 17, 5, 2, 7, 2.4 G W-LAN (802.11b/g/n HT20), 5 G W-LAN (802.11a/n HT20/n HT40), Bluetooth			
TX Frequency Range	Band	Mode	Bandwidth	Frequency
	WCDMA850	WCDMA	-	826.4 ~ 846.6 MHz
	WCDM1900	WCDMA	-	1852.4 ~ 1907.6 MHz
	LTE Band 17	LTE	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 5	LTE	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	LTE Band 2	LTE	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz
	LTE Band 7	LTE	5/10/15/20MHz	2502.5 ~ 2567.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	HT20	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n	HT20	5180 ~ 5240 MHz
		802.11n	HT40	5190 ~ 5230 MHz
	5.3 GHz W-LAN	802.11a/n	HT20	5260 ~ 5320 MHz
		802.11n	HT40	5270 ~ 5310 MHz
	5.6 GHz W-LAN	802.11a/n	HT20	5500 ~ 5700 MHz
		802.11n	HT40	5510 ~ 5670 MHz
	5.8 GHz W-LAN	802.11a/n	HT20	5745 ~ 5825 MHz
		802.11n	HT40	5755 ~ 5795 MHz
	Bluetooth	-	-	2402 ~ 2480 MHz
RX Frequency Range	WCDMA850	WCDMA	-	871.4 ~ 891.6 MHz
	WCDM1900	WCDMA	-	1932.4 ~ 1987.6 MHz
	LTE Band 17	LTE	5/10MHz	736.5 ~ 743.5 MHz
	LTE Band 5	LTE	1.4/3/5/10MHz	869.5 ~ 893.3 MHz
	LTE Band 2	LTE	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz
	LTE Band 7	LTE	5/10/15/20MHz	2622.5 ~ 2687.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	HT20	2412 ~ 2462 MHz
	5.2 GHz W-LAN	802.11a/n	HT20	5180 ~ 5240 MHz
		802.11n	HT40	5190 ~ 5230 MHz
	5.3 GHz W-LAN	802.11a/n	HT20	5260 ~ 5320 MHz
		802.11n	HT40	5270 ~ 5310 MHz
	5.6 GHz W-LAN	802.11a/n	HT20	5500 ~ 5700 MHz
		802.11n	HT40	5510 ~ 5670 MHz
	5.8 GHz W-LAN	802.11a/n	HT20	5745 ~ 5825 MHz
		802.11n	HT40	5755 ~ 5795 MHz
	Bluetooth	-	-	2402 ~ 2480 MHz

Equipment Class	Band	Reported SAR	
		1g SAR (W/kg)	
		Head	Body-Worn
PCE	WCDMA850	0.44	0.77
PCE	WCDMA1900	1.00	1.25
PCE	LTE Band 17	0.22	0.36
PCE	LTE Band 5	0.32	0.42
PCE	LTE Band 2	0.93	0.95
PCE	LTE Band 7	0.13	0.49
DTS	2.4 GHz W-LAN	0.18	0.12
U-NII-2A	5.3 GHz W-LAN	0.17	0.09
U-NII-2C	5.6 GHz W-LAN	0.25	0.16
U-NII-3	5.8 GHz W-LAN	0.15	0.22
DSS	Bluetooth	0.37 ^{Note}	0.13 ^{Note}
Simultaneous SAR per KDB 690783 D01v01r03		1.46	1.60
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)		
Date(s) of Tests	2017-07-03 ~ 2017-07-14		
Antenna Type	Internal Type Antenna		
Note	Bluetooth SAR was estimated.		
Functions	<ul style="list-style-type: none"> ● BT(2.4GHz) / W-LAN(2.4GHz 802.11b/g/n(HT20)) supported. W-LAN(5GHz 802.11a/n(HT20/HT40)) supported * No simultaneous transmission between BT & 2.4GHz WLAN ● Not support LTE Carrier Aggregation, LTE A-MPR, HSPA+, DC-HSDPA, GSM DTM, Wireless Charging (WPC), WiFi Mobile Hotspot. ● VoIP is supported. ● Simultaneous transmission between WCDMA voice & WLAN / WCDMA & WLAN / LTE & WLAN 		

1.1 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01 3G SAR Procedures v03r01
- FCC KDB Publication 941225 D05 SAR for LTE Devices v02r05
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04 Handset SAR v01r03
- FCC KDB Publication 690783 D01 SAR Listings on Grants v01r03
- FCC KDB Publication 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB Publication 865664 D02 RF Exposure Reporting v01r02
- October 2016 TCB Workshop Notes (DUT Holder)

1.2 Device Overview

Equipment Class	Mode	Operating Modes	Tx Frequency
PCE	WCDMA 850	Voice/Data	826.4 ~ 846.6 MHz
PCE	WCDMA 1900	Voice/Data	1852.4 ~ 1907.6 MHz
PCE	LTE Band 17	Data	706.5 ~ 713.5 MHz
PCE	LTE Band 5	Data	824.7 ~ 848.3 MHz
PCE	LTE Band 2	Data	1850.7 ~ 1909.3 MHz
PCE	LTE Band 7	Data	2502.5 ~ 2567.5 MHz
DTS	2.4 GHz WLAN	Data	2412 ~ 2462 MHz
U-NII-1	5.2 GHz WLAN	Data	5180 ~ 5240 MHz
U-NII-2A	5.3 GHz WLAN	Data	5260 ~ 5320 MHz
U-NII-2C	5.6 GHz WLAN	Data	5500 ~ 5700 MHz
U-NII-3	5.8 GHz WLAN	Data	5745 ~ 5825 MHz
DSS/DTS	Bluetooth	Data	2402 ~ 2480 MHz

1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

(A) WCDMA/HSDPA/HSUPA

Band & Mode		Modulated Average [dBm]			
		3GPP WCDMA	3GPP HSDPA		
			Rel. 5		
WCDMA 850	Maximum	24.0	23.0	23.0	22.5
	Nominal	23.5	22.5	22.5	22.0
WCDMA 1900	Maximum	24.0	23.0	23.0	22.5
	Nominal	23.5	22.5	22.5	22.0

Note : This device supports HSUPA but the manufacturer only declares on the tune-up procedure that the HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solution.

(B) LTE

Band & Mode		Modulated Average [dBm]
LTE Band 17	Maximum	23.0
	Nominal	22.5
LTE Band 5(Cell)	Maximum	23.5
	Nominal	23.0
LTE Band 2(PCS)	Maximum	24.0
	Nominal	23.5
LTE Band 7	Maximum	22.0
	Nominal	21.5

(C) 2.4G WLAN

Band & Mode		Modulated Average[dBm]
IEEE 802.11b (2.4 GHz)	Maximum	16.5
	Nominal	15.5
	Minimum	13.5
IEEE 802.11g (2.4 GHz)	Maximum	15.0
	Nominal	14.0
	Minimum	12.0
IEEE 802.11n HT20 (2.4 GHz)	Maximum	14.0
	Nominal	13.0
	Minimum	12.0

(D) 5G WLAN

Band & Mode		Modulated Average[dBm]
IEEE 802.11a (5 GHz)	Maximum	13.0
	Nominal	12.0
	Minimum	10.0
IEEE 802.11n HT20 (5 GHz)	Maximum	13.0
	Nominal	12.0
	Minimum	10.0
IEEE 802.11n HT40 (5 GHz)	Maximum	12.5
	Nominal	11.5
	Minimum	9.5

(E) BT

Band & Mode		Modulated Average[dBm]
Bluetooth 1 Mbps	Maximum	9.5
	Nominal	8.5
	Minimum	6.5
Bluetooth 2 Mbps	Maximum	6.5
	Nominal	5.5
	Minimum	3.5
Bluetooth 3 Mbps	Maximum	6.5
	Nominal	5.5
	Minimum	3.5
Bluetooth LE	Maximum	0.0
	Nominal	-1.0
	Minimum	-3.0

1.4 DUT Antenna Locations

The overall dimensions of this device are $> 9 \times 5$ cm. The overall diagonal dimension of the device is ≤ 160 mm and the diagonal display is ≤ 150 mm. A diagram showing the location of the device of the device antenna can be found in (PM70)_Antenna Location OpDesc.pdf. It is not considered a "phablet".

Note 1: WLAN Hotspot is not supported.

Note 2: The diversity antenna only supports the receiver mode (downlink only).

1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the back cover. The SAR tests were performed with the back cover with NFC antenna already incorporated. A diagram showing the location of the device of the device antenna can be found in (PM70)_Antenna Location OpDesc.pdf.

1.6 SAR Test Exclusions Applied

(A) BT

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Table 1.1 SAR exclusion threshold for distances < 50 mm

Mode	Equation	Result	SAR exclusion threshold	Required SAR
Bluetooth	$[(9/15)^* \sqrt{2.480}]$	0.9	3.0	X
Bluetooth LE	$[(1/15)^* \sqrt{2.480}]$	0.1	3.0	X

Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

1.7 Power Reduction for SAR

There is no power reduction used for any band mode implemented in this device for SAR purposes.

1.8 Device Serial Numbers

Band & Mode	Head Serial Number	Body Serial Number
WCDMA 850	FCC #1	FCC #1
WCDMA 1900	FCC #1	FCC #1
LTE Band 17	FCC #1	FCC #1
LTE Band 5	FCC #1	FCC #1
LTE Band 2	FCC #1	FCC #1
LTE Band 7	FCC #1	FCC #1
2.4 GHz WLAN	FCC #1	FCC #1
5 GHz WLAN	FCC #1	FCC #1

1.9 LTE Information

LTE Information			
FCC ID	V2X-PM70G		
Form Factor	Mobile Computer		
Frequency Range of each LTE transmission Band	LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz)		
Channel Bandwidths	LTE Band 17: 5 MHz, 10 MHz LTE Band 5: (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz		
Channel Number and Frequencies(MHz)	Low	Mid	High
LTE Band 17: 5 MHz	706.5(23755)	710.0(23790) ^{Note2}	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	710.0(23790) ^{Note2}	711.0(23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	836.5 (20525)	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	836.5 (20525)	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	836.5 (20525)	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	836.5 (20525) ^{Note1}	844.0 (20600)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	1880.0 (18900)	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	1880.0 (18900)	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	1880.0 (18900)	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	1880.0 (18900)	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	1880.0 (18900)	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	1880.0 (18900)	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	2535.0 (21100)	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	2535.0 (21100)	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	2535.0 (21100)	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	2535.0 (21100)	2560.0 (21350)
UE Category / Modulations Supported	UE Category 4 / QPSK, 16QAM		
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	Yes		
A-MPR (Additional MPR) disabled for SAR Testing?	LTE A-MPR is not supported.		
LTE Carrier Aggregation	This device does not support both UL and DL carrier aggregation.		

Note(s)

1. LTE Band 5 at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

2. LTE Band 17 at 10 MHz/5 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

2. INTRODUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 2.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dV} \right)$$

Fig. 2.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

3. DESCRIPTION OF TEST EQUIPMENT

3.1 SAR MEASUREMENT SETUP

Measurements are performed using the DASY5 automated dosimetric assessment system. The DASY5 is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland and consists of high precision robotics system (Staubli), robot controller, desktop computer, near-field probe, probe alignment sensor, and the generic twin phantom containing the brain equivalent material. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF) (see Fig. 3.1).

A cell controller system contains the power supply, robot controller each pendant (Joystick), and a remote control used to drive the robot motors. The PC consists of the Intel Core i7-3770 3.40 GHz desktop computer with Windows 7 system and SAR Measurement Software DASY5,A/D interface card, monitor, mouse, and keyboard. The Staubli Robotis connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit that performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

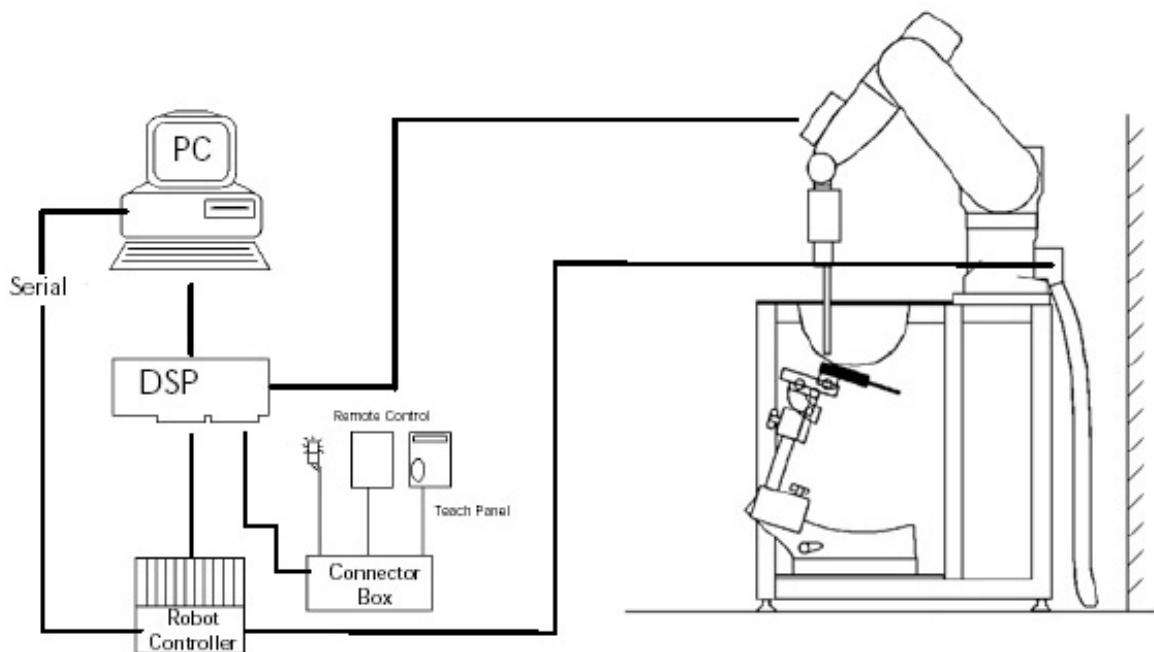


Figure 3.1 SAR Measurement System Setup

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer. The system is described in detail.

3.2 EX3DV4 Probe Specification

Calibration	In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at Frequencies of 750 MHz, 835 MHz, 900 MHz, 1750 MHz, 1900 MHz, 2300 MHz, 2450 MHz, 2600 MHz, 3500 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz In air from 10 MHz to 6 GHz In brain and muscle simulating tissue at Frequencies of 2450 MHz, 2600 MHz, 5200 MHz, 5300 MHz, 5500 MHz, 5600 MHz, 5800 MHz
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB(30 MHz to 6 GHz)
Dynamic	10 μ W/g to > 100 mW/g
Range	Linearity : ± 0.2 dB
Dimensions	Overall length : 337 mm
Tip length	20 mm
Body diameter	12 mm
Tip diameter	2.5 mm
Distance from probe tip to sensor center	1.0 mm
Application	SAR Dosimetry Testing Compliance tests of mobile phones




Figure 3.2 Triangular Probe Configurations



Figure 3.3 Probe Thick-Film Technique



The SAR measurements were conducted with the dosimetric probe EX3DV4, designed in the classical triangular configuration (see Fig. 3.2) and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multilayer line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY5 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped at reaching the maximum.

DAE System

3.3 Probe Calibration Process

3.3.1 E-Probe Calibration

Dosimetric Assessment Procedure

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure and found to be better than +/-0.25dB. The sensitivity parameters (Norm X, Norm Y, Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe is tested.

Free Space Assessment

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a waveguide above 1GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity at the proper orientation with the field. The probe is then rotated 360 degrees.

Temperature Assessment *

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium, correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent the remits or based temperature probe is used in conjunction with the E-field probe.

$$\text{SAR} = C \frac{\Delta T}{\Delta t}$$

where:

- Δt = exposure time (30 seconds),
- C = heat capacity of tissue (brain or muscle),
- ΔT = temperature increase due to RF exposure.

$$\text{SAR} = \frac{|E|^2 \cdot \sigma}{\rho}$$

where:

- σ = simulated tissue conductivity,
- ρ = Tissue density (1.25 g/cm³ for brain tissue)

SAR is proportional to $\Delta T / \Delta t$, the initial rate of tissue heating, before thermal diffusion takes place. Now it's possible to quantify the electric field in the simulated tissue by equating the thermally derived SAR to the E- field;

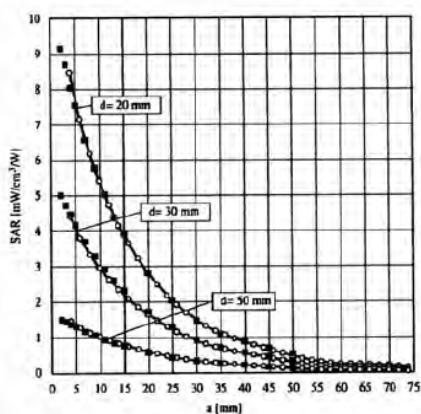


Figure 3.4 E-Field and Temperature Measurements at 900MHz

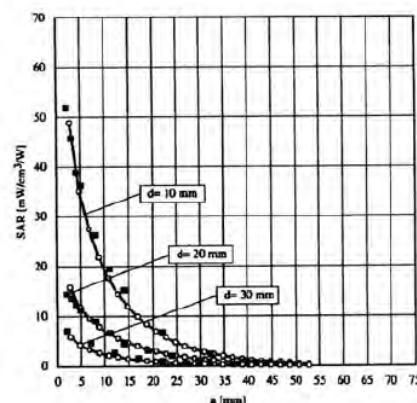


Figure 3.5 E-Field and Temperature Measurements at 1800MHz

3.4 Data Extrapolation

The DASY5 software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given like below;

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i (i=x,y,z)
 U_i = input signal of channel i (i=x,y,z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

with V_i = compensated signal of channel i (i = x,y,z)
 $Norm_i$ = sensor sensitivity of channel i (i = x,y,z)
 $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field probes
 $ConvF$ = sensitivity of enhancement in solution
 E_i = electric field strength of channel i in V/m

The RSS value of the field components gives the total field strength (Hermetian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770}$$

with P_{pwe} = equivalent power density of a plane wave in W/cm²
 E_{tot} = total electric field strength in V/m

3.5 SAM Twin PHANTOM

The SAM Twin Phantom V5.0 is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid.

Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. (see Fig. 3.6)



Figure 3.6 SAM Twin Phantom

SAM Twin Phantom Specification:

Construction

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

Shell Thickness

2 ± 0.2 mm

Filling Volume

Approx. 25 liters

Dimensions

Length: 1000 mm

Width: 500 mm

Height: adjustable feet

Specific Anthropomorphic Mannequin (SAM) Specifications:

The phantom for handset SAR assessment testing is a low-loss dielectric shell, with shape and dimensions derived from the anthropometric data of the 90th percentile adult male head dimensions as tabulated by the US Army. The SAM Twin Phantom shell is bisected along the mid-sagittal plane into right and left halves (see Fig. 3.7). The perimeter sidewalls of each phantom halves are extended to allow filling with liquid to a depth that is sufficient to minimize reflections from the upper surface. The liquid depth is maintained at a minimum depth of 15cm to minimize reflections from the upper surface.



Figure 3.7 Sam Twin Phantom shell

3.6 Device Holder for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c, V5.0 or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Note: A simulating human hand is not used due to the complex anatomical and geometrical structure of the hand that may produce infinite number of configurations. To produce the worst-case condition (the hand absorbs antenna output power), the hand is omitted during the tests.



Figure 3.8 Mounting Device

3.7 Brain & Muscle Simulation Mixture Characterization

The brain and muscle mixtures consist of a viscous gel using hydrox-ethylcellulose (HEC) gelling agent and saline solution (see Table 3.1). Preservation with a bactericide is added and visual inspection is made to make sure air bubbles are not trapped during the mixing process. The mixture is calibrated to obtain proper dielectric constant (permittivity) and conductivity of the desired tissue. The mixture characterizations used for the brain and muscle tissue simulating liquids are according to the data by C. Gabriel and G. Harts grove.



Figure 3.9 Simulated Tissue

Table 3.1 Composition of the Tissue Equivalent Matter

Ingredients (% by weight)	Frequency (MHz)							
	835		1900		2450		5200 ~ 5800	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.19	50.75	55.24	70.23	71.88	73.40	65.52	80.00
Salt (NaCl)	1.480	0.940	0.310	0.290	0.160	0.060	-	-
Sugar	57.90	48.21	-	-	-	-	-	-
HEC	0.250	-	-	-	-	-	-	-
Bactericide	0.180	0.100	-	-	-	-	-	-
Triton X-100	-	-	-	-	19.97	-	17.24	-
DGBE	-	-	44.45	29.48	7.990	26.54	-	-
Diethylene glycol hexyl ether	-	-	-	-	-	-	17.24	-
Polysorbate (Tween) 80	-	-	-	-	-	-		20.00
Target for Dielectric Constant	41.5	55.2	40.0	53.3	39.2	52.7	-	-
Target for Conductivity (S/m)	0.90	0.97	1.40	1.52	1.80	1.95	-	-

Salt:	99 % Pure Sodium Chloride	Sugar:	98 % Pure Sucrose
Water:	De-ionized, 16M resistivity	HEC:	Hydroxyethyl Cellulose
DGBE:	99 % Di(ethylene glycol) butyl ether,[2-(2-butoxyethoxy) ethanol]		
Triton X-100(ultra pure):	Polyethylene glycol mono[4-(1,1,3,3-tetramethylbutyl)phenyl] ether		

Table3.2 HSL/MSL750 (Head and Body liquids for 700 – 800 MHz)

Item	Head Tissue Simulation Liquids HSL750
	Muscle (body) Tissue Simulation Liquids MSL750
Type No	SL AAH 075, SL AAM 075
Manufacturer	SPEAG
The item is composed of the following ingredients:	
H ² O	Water, 35 – 58%
Sucrose	Sucrose, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), < 0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.6%

3.8 SAR TEST EQUIPMENT

Table 3.2 Test Equipment Calibration

Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
Robot	SCHMID	TX90XL	N/A	N/A	F13/5P9GA1/A/01
Robot Controller	SCHMID	CS8C	N/A	N/A	F13/5P9GA1/C/01
Joystick	SCHMID	N/A	N/A	N/A	S-12450905
IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
Device Holder	SCHMID	Holder	N/A	N/A	SD000H01HA
Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1783
Twin SAM Phantom	SCHMID	QD000P40CD	N/A	N/A	1782
Data Acquisition Electronics	SCHMID	DAE4V1	2016-09-19	2017-09-19	1453
Dosimetric E-Field Probe	SCHMID	EX3DV4	2017-05-31	2018-05-31	3866
Dosimetric E-Field Probe	SCHMID	EX3DV4	2017-04-28	2018-04-28	3916
750MHz SAR Dipole	SCHMID	D750V3	2017-01-18	2019-01-18	1049
835MHz SAR Dipole	SCHMID	D835V2	2016-09-28	2018-09-28	4d159
1900MHz SAR Dipole	SCHMID	D1900V2	2016-09-28	2018-09-28	5d176
2450MHz SAR Dipole	SCHMID	D2450V2	2016-09-23	2018-09-23	920
2600MHz SAR Dipole	SCHMID	D2600V2	2017-03-23	2019-03-23	1016
5GHz SAR Dipole	SCHMID	D5GHzV2	2017-03-17	2019-03-17	1103
Network Analyzer	Agilent	E5071C	2016-12-02	2017-12-02	MY46111534
Signal Generator	Agilent	E4438C	2016-09-09	2017-09-09	US41461520
Amplifier	EMPOWER	BBS3Q7ELU	2016-09-08	2017-09-08	1020
High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2016-10-18	2017-10-18	1005
Power Meter	HP	EPM-442A	2017-01-04	2018-01-04	GB37170267
Power Meter	HP	EPM-442A	2017-04-11	2018-04-11	GB37170413
Power Sensor	HP	8481A	2017-01-04	2018-01-04	3318A96566
Power Sensor	HP	8481A	2017-01-04	2018-01-04	2702A65976
Power Sensor	HP	8481A	2017-04-11	2018-04-11	3318A96332
Dual Directional Coupler	Agilent	778D-012	2017-01-05	2018-01-05	50228
Directional Coupler	HP	772D	2016-07-26 2017-07-13	2017-07-26 2018-07-13	2889A01064
Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2017-01-04	2018-01-04	N/A
Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2016-09-08	2017-09-08	N/A
Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2017-01-04	2018-01-04	03942
Attenuators(3 dB)	Agilent	8491B	2017-04-11	2018-04-11	MY39260700
Attenuators(10 dB)	WEINSCHEL	23-10-34	2017-01-04	2018-01-04	BP4387
Dielectric Probe kit	SCHMID	DAK-3.5	2016-11-17	2017-11-17	1092
Dielectric Probe kit	SCHMID	DAK-3.5	2016-07-26 2017-07-18	2017-07-26 2018-07-18	1046
8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2016-09-09	2017-09-09	GB43461134
Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2016-09-09	2017-09-09	101414
Power Splitter	Anritsu	K241B	2017-01-11	2018-01-11	1301183
Bluetooth Tester	TESCOM	TC-3000B	2017-01-04	2018-01-04	3000B770243

NOTE: The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain-equivalent material. Each equipment item was used solely within its respective calibration period.

4. TEST SYSTEM SPECIFICATIONS

Automated TEST SYSTEM SPECIFICATIONS:

Positioner

Robot	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	0.02 mm
No. of axis	6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor	Intel Core i7-3770
Clock Speed	3.40 GHz
Operating System	Windows 7 Professional
Data Card	DASY5 PC-Board

Data Converter

Features	Signal, multiplexer, A/D converter. & control logic
Software	DASY5
Connecting Lines	Optical downlink for data and status info Optical uplink for commands and clock

PC Interface Card

Function	24 bit (64 MHz) DSP for real time processing Link to DAE 4 16 bit A/D converter for surface detection system serial link to robot direct emergency stop output for robot
-----------------	--

E-Field Probes

Model	EX3DV4 S/N: 3866, 3916
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	± 0.2 dB (30 MHz to 6 GHz)

Phantom

Phantom	SAM Twin Phantom (V5.0)
Shell Material	Composite
Thickness	2.0 ± 0.2 mm



Figure 4.1 DASY5 Test System

5. SAR MEASUREMENT PROCEDURE

5.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 5.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 5.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 5.1
Sample SAR Area Scan

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
		$\leq 2 \text{ GHz: } \leq 15 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 12 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 12 \text{ mm}$ $4 - 6 \text{ GHz: } \leq 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz: } \leq 8 \text{ mm}$ $2 - 3 \text{ GHz: } \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz: } \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz: } \leq 4 \text{ mm}$ $4 - 5 \text{ GHz: } \leq 3 \text{ mm}$ $5 - 6 \text{ GHz: } \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1): \text{ between } 1^{\text{st}} \text{ two points closest to phantom surface}$ $\Delta z_{\text{Zoom}}(n>1): \text{ between subsequent points}$	$\leq 4 \text{ mm}$ $\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz: } \geq 28 \text{ mm}$ $4 - 5 \text{ GHz: } \geq 25 \text{ mm}$ $5 - 6 \text{ GHz: } \geq 22 \text{ mm}$

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

Table 5.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04 *

6. DEFINITION OF REFERENCE POINTS

6.1 Ear Reference Point

Figure 6.1 shows the front, back and side views of the SAM Twin Phantom. The point "M" is the reference point for the center of the mouth, "LE" is the left ear reference point(ERP), and "RE" is the right ERP. The ERPs are 15mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 6.1
Close-up side view
of ERP

6.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point" (See Fig. 6.3). The "test device reference point" was than located at the same level as the center of the ear reference point. The test device was positioned so that the "vertical centerline" was bisecting the front surface of the handset at it's top and bottom edges, positioning the "ear reference point" on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 6.2 Front, back and side view SAM Twin Phantom

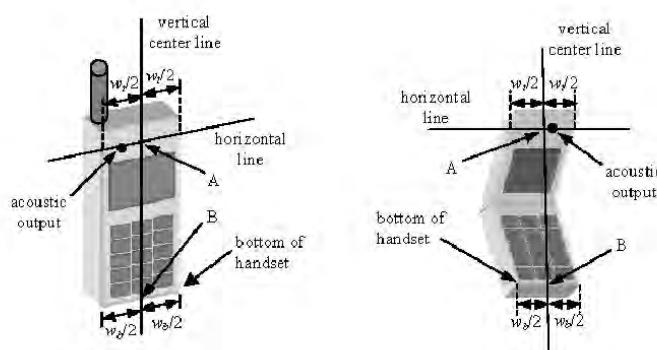


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

7. TEST CONFIGURATION POSITIONS FOR HANDSETS

7.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

7.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 7.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 7.2)

7.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the "Cheek/Touch Position":

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 7.3).




Figure 7.2 Side view w/relevant markings



Figure 7.3 Front, Side and Top View of Ear/15°Position

7.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 7.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

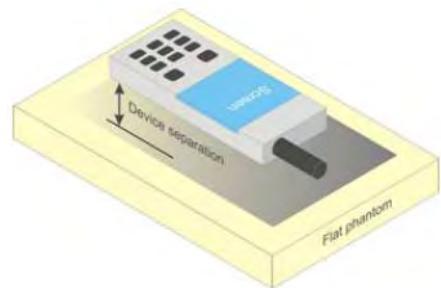


Figure 7.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

7.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498D01v06 should be applied to determine SAR test requirements.

8. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

HUMAN EXPOSURE LIMITS		
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

9. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

9.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

9.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

9.3 SAR Measurement Conditions for WCDMA (UMTS)

9.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

9.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

9.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all“1s”.

9.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.
Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 9.1 Table 1

9.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_a (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ec}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.
Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 9.2 Table 2

9.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The R&S CMW500 was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

9.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

9.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

9.4.3 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 4.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 4.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 4.2.1.
- c. Per Section 4.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 4.2.4 and 4.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 4.2.1 through 4.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

9.5 SAR Testing with 802.11 Transmitters

Normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

9.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

9.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is $\leq 1.2 \text{ W/kg}$, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is $\leq 1.2 \text{ W/kg}$, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

9.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

9.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is $\leq 0.4 \text{ W/kg}$, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is $\leq 0.8 \text{ W/kg}$ or all test position are measured.

9.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

9.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n or 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

9.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

9.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

10. RF CONDUCTED POWERS

10.1 WCDMA Conducted Powers

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.53	23.59	23.63	23.87	23.93	23.99	-
99		12.2 kbps AMR	23.47	23.53	23.61	23.83	23.82	23.98	-
5	HSDPA	Subtest 1	22.46	22.51	22.61	22.74	22.76	22.90	0
5		Subtest 2	22.56	22.55	22.56	22.77	22.77	22.96	0
5		Subtest 3	21.99	22.18	22.05	22.37	22.35	22.47	0.5
5		Subtest 4	22.05	22.14	22.14	22.33	22.36	22.52	0.5
6		Subtest 1	22.28	22.35	22.45	22.42	22.26	22.40	0
6	HSUPA	Subtest 2	21.13	21.13	21.16	21.88	21.88	21.96	2
6		Subtest 3	20.80	20.74	20.90	20.99	21.68	21.76	1
6		Subtest 4	21.93	22.12	21.48	22.07	22.30	22.30	2
6		Subtest 5	22.55	22.59	22.61	22.72	22.81	22.98	0

Table 10.1.1 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSUPA transmitter's power will not exceed the R99 maximum transmit power in devices based on Qualcomm's HSPA chipset solutions.

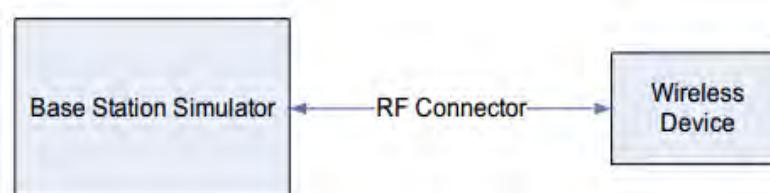


Figure 10.1 Power Measurement Setup

10.2 LTE Conducted Powers

1) LTE Band 17

Mode	Freq. (MHz)	Channel	LTE Band 17 Conducted Power– 10 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Mid	710	23790	10	QPSK	1	0	22.91	0	0
	710	23790	10	QPSK	1	25	22.90	0	0
	710	23790	10	QPSK	1	49	22.80	0	0
	710	23790	10	QPSK	25	0	21.87	0-1	1
	710	23790	10	QPSK	25	12	21.83	0-1	1
	710	23790	10	QPSK	25	25	21.74	0-1	1
	710	23790	10	QPSK	50	0	21.71	0-1	1
	710	23790	10	16QAM	1	0	22.39	0-1	1
	710	23790	10	16QAM	1	25	22.30	0-1	1
	710	23790	10	16QAM	1	49	22.13	0-1	1
	710	23790	10	16QAM	25	0	20.80	0-2	2
	710	23790	10	16QAM	25	12	20.84	0-2	2
	710	23790	10	16QAM	25	25	20.73	0-2	2
	710	23790	10	16QAM	50	0	20.77	0-2	2

Table 10.2.1 LTE Conducted Power

Note: LTE Band 17 at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Mode	Freq. (MHz)	Channel	LTE Band 17 Conducted Power– 5 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPRAccorded Per 3GPP(dB)	MPR (dB)
Mid	710	23790	5	QPSK	1	0	22.83	0	0
	710	23790	5	QPSK	1	12	22.59	0	0
	710	23790	5	QPSK	1	24	22.71	0	0
	710	23790	5	QPSK	12	0	21.73	0-1	1
	710	23790	5	QPSK	12	6	21.79	0-1	1
	710	23790	5	QPSK	12	13	21.79	0-1	1
	710	23790	5	QPSK	25	0	21.79	0-1	1
	710	23790	5	16QAM	1	0	22.29	0-1	1
	710	23790	5	16QAM	1	12	22.21	0-1	1
	710	23790	5	16QAM	1	24	22.38	0-1	1
	710	23790	5	16QAM	12	0	20.71	0-2	2
	710	23790	5	16QAM	12	6	20.71	0-2	2
	710	23790	5	16QAM	12	13	20.69	0-2	2
	710	23790	5	16QAM	25	0	20.83	0-2	2

Table 10.2.2 LTE Conducted Power

Note: LTE Band 17 at 5 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

2) LTE Band 5

Mode	Freq. (MHz)	Channel	LTE Band 5 Conducted Power- 10 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Mid	836.5	20525	10	QPSK	1	0	23.22	0	0
	836.5	20525	10	QPSK	1	25	23.34	0	0
	836.5	20525	10	QPSK	1	49	23.17	0	0
	836.5	20525	10	QPSK	25	0	21.98	0-1	1
	836.5	20525	10	QPSK	25	12	21.94	0-1	1
	836.5	20525	10	QPSK	25	25	21.86	0-1	1
	836.5	20525	10	QPSK	50	0	21.95	0-1	1
	836.5	20525	10	16QAM	1	0	22.43	0-1	1
	836.5	20525	10	16QAM	1	25	22.54	0-1	1
	836.5	20525	10	16QAM	1	49	22.48	0-1	1
	836.5	20525	10	16QAM	25	0	20.95	0-2	2
	836.5	20525	10	16QAM	25	12	21.03	0-2	2
	836.5	20525	10	16QAM	25	25	20.99	0-2	2
	836.5	20525	10	16QAM	50	0	20.86	0-2	2

Table 10.2.3 LTE Conducted Power

Note: LTE Band 5(Cell) at 10 MHz bandwidth does not support three non-overlapping channels.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

Mode	Freq. (MHz)	Channel	LTE Band 5 Conducted Power – 5 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	826.5	20425	5	QPSK	1	0	23.07	0	0
	826.5	20425	5	QPSK	1	12	22.96	0	0
	826.5	20425	5	QPSK	1	24	22.98	0	0
	826.5	20425	5	QPSK	12	0	21.88	0-1	1
	826.5	20425	5	QPSK	12	6	21.83	0-1	1
	826.5	20425	5	QPSK	12	13	21.78	0-1	1
	826.5	20425	5	QPSK	25	0	21.82	0-1	1
	826.5	20425	5	16QAM	1	0	22.33	0-1	1
	826.5	20425	5	16QAM	1	12	22.36	0-1	1
	826.5	20425	5	16QAM	1	24	22.22	0-1	1
	826.5	20425	5	16QAM	12	0	20.96	0-2	2
	826.5	20425	5	16QAM	12	6	20.85	0-2	2
	826.5	20425	5	16QAM	12	13	20.80	0-2	2
	826.5	20425	5	16QAM	25	0	20.93	0-2	2
Mid	836.5	20525	5	QPSK	1	0	23.26	0	0
	836.5	20525	5	QPSK	1	12	23.30	0	0
	836.5	20525	5	QPSK	1	24	23.23	0	0
	836.5	20525	5	QPSK	12	0	21.93	0-1	1
	836.5	20525	5	QPSK	12	6	22.00	0-1	1
	836.5	20525	5	QPSK	12	13	21.92	0-1	1
	836.5	20525	5	QPSK	25	0	21.99	0-1	1
	836.5	20525	5	16QAM	1	0	22.42	0-1	1
	836.5	20525	5	16QAM	1	12	22.37	0-1	1
	836.5	20525	5	16QAM	1	24	22.40	0-1	1
	836.5	20525	5	16QAM	12	0	20.92	0-2	2
	836.5	20525	5	16QAM	12	6	20.94	0-2	2
	836.5	20525	5	16QAM	12	13	20.78	0-2	2
	836.5	20525	5	16QAM	25	0	21.03	0-2	2
High	846.5	20625	5	QPSK	1	0	23.15	0	0
	846.5	20625	5	QPSK	1	12	23.05	0	0
	846.5	20625	5	QPSK	1	24	23.07	0	0
	846.5	20625	5	QPSK	12	0	21.89	0-1	1
	846.5	20625	5	QPSK	12	6	22.06	0-1	1
	846.5	20625	5	QPSK	12	13	21.99	0-1	1
	846.5	20625	5	QPSK	25	0	21.99	0-1	1
	846.5	20625	5	16QAM	1	0	22.25	0-1	1
	846.5	20625	5	16QAM	1	12	22.34	0-1	1
	846.5	20625	5	16QAM	1	24	22.51	0-1	1
	846.5	20625	5	16QAM	12	0	20.80	0-2	2
	846.5	20625	5	16QAM	12	6	20.93	0-2	2
	846.5	20625	5	16QAM	12	13	21.00	0-2	2
	846.5	20625	5	16QAM	25	0	21.10	0-2	2

Table 10.2.4 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 5 Conducted Power – 3 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	825.5	20415	3	QPSK	1	0	23.23	0	0
	825.5	20415	3	QPSK	1	7	22.88	0	0
	825.5	20415	3	QPSK	1	14	22.82	0	0
	825.5	20415	3	QPSK	8	0	22.06	0-1	1
	825.5	20415	3	QPSK	8	4	22.02	0-1	1
	825.5	20415	3	QPSK	8	7	22.03	0-1	1
	825.5	20415	3	QPSK	15	0	22.01	0-1	1
	825.5	20415	3	16QAM	1	0	22.50	0-1	1
	825.5	20415	3	16QAM	1	7	22.45	0-1	1
	825.5	20415	3	16QAM	1	14	22.42	0-1	1
	825.5	20415	3	16QAM	8	0	21.15	0-2	2
	825.5	20415	3	16QAM	8	4	21.05	0-2	2
	825.5	20415	3	16QAM	8	7	21.27	0-2	2
	825.5	20415	3	16QAM	15	0	20.91	0-2	2
Mid	836.5	20525	3	QPSK	1	0	23.25	0	0
	836.5	20525	3	QPSK	1	7	23.21	0	0
	836.5	20525	3	QPSK	1	14	23.16	0	0
	836.5	20525	3	QPSK	8	0	21.97	0-1	1
	836.5	20525	3	QPSK	8	4	21.97	0-1	1
	836.5	20525	3	QPSK	8	7	21.96	0-1	1
	836.5	20525	3	QPSK	15	0	22.04	0-1	1
	836.5	20525	3	16QAM	1	0	22.57	0-1	1
	836.5	20525	3	16QAM	1	7	22.46	0-1	1
	836.5	20525	3	16QAM	1	14	22.59	0-1	1
	836.5	20525	3	16QAM	8	0	21.23	0-2	2
	836.5	20525	3	16QAM	8	4	21.16	0-2	2
	836.5	20525	3	16QAM	8	7	21.26	0-2	2
	836.5	20525	3	16QAM	15	0	21.09	0-2	2
High	847.5	20635	3	QPSK	1	0	23.24	0	0
	847.5	20635	3	QPSK	1	7	23.13	0	0
	847.5	20635	3	QPSK	1	14	23.23	0	0
	847.5	20635	3	QPSK	8	0	22.02	0-1	1
	847.5	20635	3	QPSK	8	4	22.10	0-1	1
	847.5	20635	3	QPSK	8	7	22.14	0-1	1
	847.5	20635	3	QPSK	15	0	22.05	0-1	1
	847.5	20635	3	16QAM	1	0	22.57	0-1	1
	847.5	20635	3	16QAM	1	7	22.49	0-1	1
	847.5	20635	3	16QAM	1	14	22.57	0-1	1
	847.5	20635	3	16QAM	8	0	21.20	0-2	2
	847.5	20635	3	16QAM	8	4	21.18	0-2	2
	847.5	20635	3	16QAM	8	7	21.33	0-2	2
	847.5	20635	3	16QAM	15	0	21.09	0-2	2

Table 10.2.5 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 5 Conducted Power- 1.4 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	824.7	20407	1.4	QPSK	1	0	23.24	0	0
	824.7	20407	1.4	QPSK	1	2	23.22	0	0
	824.7	20407	1.4	QPSK	1	5	23.02	0	0
	824.7	20407	1.4	QPSK	3	0	22.98	0	0
	824.7	20407	1.4	QPSK	3	2	23.00	0	0
	824.7	20407	1.4	QPSK	3	3	23.06	0	0
	824.7	20407	1.4	QPSK	6	0	21.99	0-1	1
	824.7	20407	1.4	16QAM	1	0	22.53	0-1	1
	824.7	20407	1.4	16QAM	1	2	22.46	0-1	1
	824.7	20407	1.4	16QAM	1	5	22.54	0-1	1
	824.7	20407	1.4	16QAM	3	0	22.06	0-1	1
	824.7	20407	1.4	16QAM	3	2	22.11	0-1	1
	824.7	20407	1.4	16QAM	3	3	22.15	0-1	1
	824.7	20407	1.4	16QAM	6	0	21.08	0-2	2
Mid	836.5	20525	1.4	QPSK	1	0	23.15	0	0
	836.5	20525	1.4	QPSK	1	2	23.17	0	0
	836.5	20525	1.4	QPSK	1	5	23.17	0	0
	836.5	20525	1.4	QPSK	3	0	23.03	0	0
	836.5	20525	1.4	QPSK	3	2	22.88	0	0
	836.5	20525	1.4	QPSK	3	3	22.91	0	0
	836.5	20525	1.4	QPSK	6	0	22.02	0-1	1
	836.5	20525	1.4	16QAM	1	0	22.53	0-1	1
	836.5	20525	1.4	16QAM	1	2	22.43	0-1	1
	836.5	20525	1.4	16QAM	1	5	22.47	0-1	1
	836.5	20525	1.4	16QAM	3	0	21.86	0-1	1
	836.5	20525	1.4	16QAM	3	2	22.16	0-1	1
	836.5	20525	1.4	16QAM	3	3	22.16	0-1	1
	836.5	20525	1.4	16QAM	6	0	21.03	0-2	2
High	848.3	20643	1.4	QPSK	1	0	23.16	0	0
	848.3	20643	1.4	QPSK	1	2	23.29	0	0
	848.3	20643	1.4	QPSK	1	5	23.30	0	0
	848.3	20643	1.4	QPSK	3	0	23.11	0	0
	848.3	20643	1.4	QPSK	3	2	23.16	0	0
	848.3	20643	1.4	QPSK	3	3	22.94	0	0
	848.3	20643	1.4	QPSK	6	0	22.05	0-1	1
	848.3	20643	1.4	16QAM	1	0	22.64	0-1	1
	848.3	20643	1.4	16QAM	1	2	22.59	0-1	1
	848.3	20643	1.4	16QAM	1	5	22.63	0-1	1
	848.3	20643	1.4	16QAM	3	0	22.25	0-1	1
	848.3	20643	1.4	16QAM	3	2	22.26	0-1	1
	848.3	20643	1.4	16QAM	3	3	22.26	0-1	1
	848.3	20643	1.4	16QAM	6	0	21.12	0-2	2

Table 10.2.6 LTE Conducted Power

3) LTE Band 2

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power– 20 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1860.0	18700	20	QPSK	1	0	23.36	0	0
	1860.0	18700	20	QPSK	1	50	23.25	0	0
	1860.0	18700	20	QPSK	1	99	23.23	0	0
	1860.0	18700	20	QPSK	50	0	22.39	0-1	1
	1860.0	18700	20	QPSK	50	25	22.26	0-1	1
	1860.0	18700	20	QPSK	50	50	22.17	0-1	1
	1860.0	18700	20	QPSK	100	0	22.25	0-1	1
	1860.0	18700	20	16QAM	1	0	22.83	0-1	1
	1860.0	18700	20	16QAM	1	50	22.79	0-1	1
	1860.0	18700	20	16QAM	1	99	22.65	0-1	1
	1860.0	18700	20	16QAM	50	0	21.35	0-2	2
	1860.0	18700	20	16QAM	50	25	21.22	0-2	2
	1860.0	18700	20	16QAM	50	50	21.20	0-2	2
	1860.0	18700	20	16QAM	100	0	21.33	0-2	2
Mid	1880.0	18900	20	QPSK	1	0	23.50	0	0
	1880.0	18900	20	QPSK	1	50	23.34	0	0
	1880.0	18900	20	QPSK	1	99	23.31	0	0
	1880.0	18900	20	QPSK	50	0	22.32	0-1	1
	1880.0	18900	20	QPSK	50	25	22.42	0-1	1
	1880.0	18900	20	QPSK	50	50	22.29	0-1	1
	1880.0	18900	20	QPSK	100	0	22.33	0-1	1
	1880.0	18900	20	16QAM	1	0	22.92	0-1	1
	1880.0	18900	20	16QAM	1	50	23.18	0-1	1
	1880.0	18900	20	16QAM	1	99	23.05	0-1	1
	1880.0	18900	20	16QAM	50	0	21.29	0-2	2
	1880.0	18900	20	16QAM	50	25	21.36	0-2	2
	1880.0	18900	20	16QAM	50	50	21.26	0-2	2
	1880.0	18900	20	16QAM	100	0	21.25	0-2	2
High	1900.0	19100	20	QPSK	1	0	23.42	0	0
	1900.0	19100	20	QPSK	1	50	23.41	0	0
	1900.0	19100	20	QPSK	1	99	23.41	0	0
	1900.0	19100	20	QPSK	50	0	22.58	0-1	1
	1900.0	19100	20	QPSK	50	25	22.46	0-1	1
	1900.0	19100	20	QPSK	50	50	22.52	0-1	1
	1900.0	19100	20	QPSK	100	0	22.49	0-1	1
	1900.0	19100	20	16QAM	1	0	23.10	0-1	1
	1900.0	19100	20	16QAM	1	50	23.10	0-1	1
	1900.0	19100	20	16QAM	1	99	23.02	0-1	1
	1900.0	19100	20	16QAM	50	0	21.39	0-2	2
	1900.0	19100	20	16QAM	50	25	21.36	0-2	2
	1900.0	19100	20	16QAM	50	50	21.40	0-2	2
	1900.0	19100	20	16QAM	100	0	21.37	0-2	2

Table 10.2.7 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power- 15 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1857.5	18675	15	QPSK	1	0	23.21	0	0
	1857.5	18675	15	QPSK	1	36	23.18	0	0
	1857.5	18675	15	QPSK	1	74	23.25	0	0
	1857.5	18675	15	QPSK	36	0	22.14	0-1	1
	1857.5	18675	15	QPSK	36	18	22.15	0-1	1
	1857.5	18675	15	QPSK	36	37	22.12	0-1	1
	1857.5	18675	15	QPSK	75	0	22.27	0-1	1
	1857.5	18675	15	16QAM	1	0	22.89	0-1	1
	1857.5	18675	15	16QAM	1	36	22.69	0-1	1
	1857.5	18675	15	16QAM	1	74	22.78	0-1	1
	1857.5	18675	15	16QAM	36	0	21.22	0-2	2
	1857.5	18675	15	16QAM	36	18	21.28	0-2	2
	1857.5	18675	15	16QAM	36	37	21.15	0-2	2
	1857.5	18675	15	16QAM	75	0	21.18	0-2	2
Mid	1880.0	18900	15	QPSK	1	0	23.19	0	0
	1880.0	18900	15	QPSK	1	36	23.32	0	0
	1880.0	18900	15	QPSK	1	74	23.43	0	0
	1880.0	18900	15	QPSK	36	0	22.23	0-1	1
	1880.0	18900	15	QPSK	36	18	22.28	0-1	1
	1880.0	18900	15	QPSK	36	37	22.31	0-1	1
	1880.0	18900	15	QPSK	75	0	22.29	0-1	1
	1880.0	18900	15	16QAM	1	0	22.28	0-1	1
	1880.0	18900	15	16QAM	1	36	22.77	0-1	1
	1880.0	18900	15	16QAM	1	74	22.95	0-1	1
	1880.0	18900	15	16QAM	36	0	21.34	0-2	2
	1880.0	18900	15	16QAM	36	18	21.42	0-2	2
	1880.0	18900	15	16QAM	36	37	21.22	0-2	2
	1880.0	18900	15	16QAM	75	0	21.11	0-2	2
High	1902.5	19125	15	QPSK	1	0	23.47	0	0
	1902.5	19125	15	QPSK	1	36	23.44	0	0
	1902.5	19125	15	QPSK	1	74	23.49	0	0
	1902.5	19125	15	QPSK	36	0	22.63	0-1	1
	1902.5	19125	15	QPSK	36	18	22.38	0-1	1
	1902.5	19125	15	QPSK	36	37	22.34	0-1	1
	1902.5	19125	15	QPSK	75	0	22.44	0-1	1
	1902.5	19125	15	16QAM	1	0	23.16	0-1	1
	1902.5	19125	15	16QAM	1	36	22.79	0-1	1
	1902.5	19125	15	16QAM	1	74	23.00	0-1	1
	1902.5	19125	15	16QAM	36	0	21.50	0-2	2
	1902.5	19125	15	16QAM	36	18	21.39	0-2	2
	1902.5	19125	15	16QAM	36	37	21.34	0-2	2
	1902.5	19125	15	16QAM	75	0	21.43	0-2	2

Table 10.2.8 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power- 10 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1855.0	18650	10	QPSK	1	0	23.22	0	0
	1855.0	18650	10	QPSK	1	25	22.94	0	0
	1855.0	18650	10	QPSK	1	49	23.34	0	0
	1855.0	18650	10	QPSK	25	0	22.10	0-1	1
	1855.0	18650	10	QPSK	25	12	22.02	0-1	1
	1855.0	18650	10	QPSK	25	25	22.15	0-1	1
	1855.0	18650	10	QPSK	50	0	22.13	0-1	1
	1855.0	18650	10	16QAM	1	0	22.77	0-1	1
	1855.0	18650	10	16QAM	1	25	22.73	0-1	1
	1855.0	18650	10	16QAM	1	49	22.77	0-1	1
	1855.0	18650	10	16QAM	25	0	21.35	0-2	2
	1855.0	18650	10	16QAM	25	12	21.28	0-2	2
	1855.0	18650	10	16QAM	25	25	21.17	0-2	2
	1855.0	18650	10	16QAM	50	0	21.16	0-2	2
Mid	1880.0	18900	10	QPSK	1	0	23.17	0	0
	1880.0	18900	10	QPSK	1	25	23.55	0	0
	1880.0	18900	10	QPSK	1	49	23.36	0	0
	1880.0	18900	10	QPSK	25	0	22.33	0-1	1
	1880.0	18900	10	QPSK	25	12	22.29	0-1	1
	1880.0	18900	10	QPSK	25	25	22.31	0-1	1
	1880.0	18900	10	QPSK	50	0	22.28	0-1	1
	1880.0	18900	10	16QAM	1	0	22.82	0-1	1
	1880.0	18900	10	16QAM	1	25	22.81	0-1	1
	1880.0	18900	10	16QAM	1	49	22.82	0-1	1
	1880.0	18900	10	16QAM	25	0	21.50	0-2	2
	1880.0	18900	10	16QAM	25	12	21.40	0-2	2
	1880.0	18900	10	16QAM	25	25	21.48	0-2	2
	1880.0	18900	10	16QAM	50	0	21.32	0-2	2
High	1905.0	19150	10	QPSK	1	0	23.43	0	0
	1905.0	19150	10	QPSK	1	25	23.33	0	0
	1905.0	19150	10	QPSK	1	49	23.39	0	0
	1905.0	19150	10	QPSK	25	0	22.43	0-1	1
	1905.0	19150	10	QPSK	25	12	22.42	0-1	1
	1905.0	19150	10	QPSK	25	25	22.40	0-1	1
	1905.0	19150	10	QPSK	50	0	22.42	0-1	1
	1905.0	19150	10	16QAM	1	0	23.16	0-1	1
	1905.0	19150	10	16QAM	1	25	22.97	0-1	1
	1905.0	19150	10	16QAM	1	49	22.94	0-1	1
	1905.0	19150	10	16QAM	25	0	21.55	0-2	2
	1905.0	19150	10	16QAM	25	12	21.55	0-2	2
	1905.0	19150	10	16QAM	25	25	21.48	0-2	2
	1905.0	19150	10	16QAM	50	0	21.48	0-2	2

Table 10.2.9 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power– 5 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1852.5	18625	5	QPSK	1	0	22.90	0	0
	1852.5	18625	5	QPSK	1	12	23.16	0	0
	1852.5	18625	5	QPSK	1	24	23.24	0	0
	1852.5	18625	5	QPSK	12	0	22.07	0-1	1
	1852.5	18625	5	QPSK	12	6	21.95	0-1	1
	1852.5	18625	5	QPSK	12	13	21.97	0-1	1
	1852.5	18625	5	QPSK	25	0	22.02	0-1	1
	1852.5	18625	5	16QAM	1	0	22.59	0-1	1
	1852.5	18625	5	16QAM	1	12	22.55	0-1	1
	1852.5	18625	5	16QAM	1	24	22.57	0-1	1
	1852.5	18625	5	16QAM	12	0	21.03	0-2	2
	1852.5	18625	5	16QAM	12	6	21.01	0-2	2
	1852.5	18625	5	16QAM	12	13	21.08	0-2	2
	1852.5	18625	5	16QAM	25	0	21.21	0-2	2
Mid	1880	18900	5	QPSK	1	0	23.11	0	0
	1880	18900	5	QPSK	1	12	23.16	0	0
	1880	18900	5	QPSK	1	24	23.33	0	0
	1880	18900	5	QPSK	12	0	22.19	0-1	1
	1880	18900	5	QPSK	12	6	22.26	0-1	1
	1880	18900	5	QPSK	12	13	22.27	0-1	1
	1880	18900	5	QPSK	25	0	22.21	0-1	1
	1880	18900	5	16QAM	1	0	22.57	0-1	1
	1880	18900	5	16QAM	1	12	22.78	0-1	1
	1880	18900	5	16QAM	1	24	22.77	0-1	1
	1880	18900	5	16QAM	12	0	21.24	0-2	2
	1880	18900	5	16QAM	12	6	21.17	0-2	2
	1880	18900	5	16QAM	12	13	21.22	0-2	2
	1880	18900	5	16QAM	25	0	21.45	0-2	2
High	1907.5	19175	5	QPSK	1	0	23.47	0	0
	1907.5	19175	5	QPSK	1	12	23.44	0	0
	1907.5	19175	5	QPSK	1	24	23.42	0	0
	1907.5	19175	5	QPSK	12	0	22.36	0-1	1
	1907.5	19175	5	QPSK	12	6	22.36	0-1	1
	1907.5	19175	5	QPSK	12	13	22.41	0-1	1
	1907.5	19175	5	QPSK	25	0	22.45	0-1	1
	1907.5	19175	5	16QAM	1	0	22.95	0-1	1
	1907.5	19175	5	16QAM	1	12	22.92	0-1	1
	1907.5	19175	5	16QAM	1	24	22.81	0-1	1
	1907.5	19175	5	16QAM	12	0	21.34	0-2	2
	1907.5	19175	5	16QAM	12	6	21.31	0-2	2
	1907.5	19175	5	16QAM	12	13	21.34	0-2	2
	1907.5	19175	5	16QAM	25	0	21.53	0-2	2

Table 10.2.10 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1851.5	18615	3	QPSK	1	0	22.81	0	0
	1851.5	18615	3	QPSK	1	7	22.88	0	0
	1851.5	18615	3	QPSK	1	14	22.99	0	0
	1851.5	18615	3	QPSK	8	0	22.06	0-1	1
	1851.5	18615	3	QPSK	8	4	22.06	0-1	1
	1851.5	18615	3	QPSK	8	7	22.04	0-1	1
	1851.5	18615	3	QPSK	15	0	21.99	0-1	1
	1851.5	18615	3	16QAM	1	0	22.74	0-1	1
	1851.5	18615	3	16QAM	1	7	22.53	0-1	1
	1851.5	18615	3	16QAM	1	14	22.70	0-1	1
	1851.5	18615	3	16QAM	8	0	21.36	0-2	2
	1851.5	18615	3	16QAM	8	4	21.41	0-2	2
	1851.5	18615	3	16QAM	8	7	21.40	0-2	2
	1851.5	18615	3	16QAM	15	0	21.34	0-2	2
Mid	1880	18900	3	QPSK	1	0	23.13	0	0
	1880	18900	3	QPSK	1	7	23.10	0	0
	1880	18900	3	QPSK	1	14	23.17	0	0
	1880	18900	3	QPSK	8	0	22.20	0-1	1
	1880	18900	3	QPSK	8	4	22.26	0-1	1
	1880	18900	3	QPSK	8	7	22.17	0-1	1
	1880	18900	3	QPSK	15	0	22.19	0-1	1
	1880	18900	3	16QAM	1	0	22.90	0-1	1
	1880	18900	3	16QAM	1	7	22.77	0-1	1
	1880	18900	3	16QAM	1	14	22.79	0-1	1
	1880	18900	3	16QAM	8	0	21.46	0-2	2
	1880	18900	3	16QAM	8	4	21.53	0-2	2
	1880	18900	3	16QAM	8	7	21.50	0-2	2
	1880	18900	3	16QAM	15	0	21.48	0-2	2
High	1908.5	19185	3	QPSK	1	0	23.21	0	0
	1908.5	19185	3	QPSK	1	7	23.20	0	0
	1908.5	19185	3	QPSK	1	14	23.39	0	0
	1908.5	19185	3	QPSK	8	0	22.39	0-1	1
	1908.5	19185	3	QPSK	8	4	22.39	0-1	1
	1908.5	19185	3	QPSK	8	7	22.39	0-1	1
	1908.5	19185	3	QPSK	15	0	22.39	0-1	1
	1908.5	19185	3	16QAM	1	0	23.04	0-1	1
	1908.5	19185	3	16QAM	1	7	22.84	0-1	1
	1908.5	19185	3	16QAM	1	14	22.98	0-1	1
	1908.5	19185	3	16QAM	8	0	21.66	0-2	2
	1908.5	19185	3	16QAM	8	4	21.61	0-2	2
	1908.5	19185	3	16QAM	8	7	21.72	0-2	2
	1908.5	19185	3	16QAM	15	0	21.24	0-2	2

Table 10.2.11 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	1850.7	18607	1.4	QPSK	1	0	22.78	0	0
	1850.7	18607	1.4	QPSK	1	2	22.81	0	0
	1850.7	18607	1.4	QPSK	1	5	22.68	0	0
	1850.7	18607	1.4	QPSK	3	0	22.87	0	0
	1850.7	18607	1.4	QPSK	3	2	22.83	0	0
	1850.7	18607	1.4	QPSK	3	3	22.92	0	0
	1850.7	18607	1.4	QPSK	6	0	21.92	0-1	1
	1850.7	18607	1.4	16QAM	1	0	22.61	0-1	1
	1850.7	18607	1.4	16QAM	1	2	22.65	0-1	1
	1850.7	18607	1.4	16QAM	1	5	22.63	0-1	1
	1850.7	18607	1.4	16QAM	3	0	22.36	0-1	1
	1850.7	18607	1.4	16QAM	3	2	22.30	0-1	1
	1850.7	18607	1.4	16QAM	3	3	22.48	0-1	1
	1850.7	18607	1.4	16QAM	6	0	21.28	0-2	2
Mid	1880	18900	1.4	QPSK	1	0	22.97	0	0
	1880	18900	1.4	QPSK	1	2	23.27	0	0
	1880	18900	1.4	QPSK	1	5	23.17	0	0
	1880	18900	1.4	QPSK	3	0	23.09	0	0
	1880	18900	1.4	QPSK	3	2	23.15	0	0
	1880	18900	1.4	QPSK	3	3	23.15	0	0
	1880	18900	1.4	QPSK	6	0	22.21	0-1	1
	1880	18900	1.4	16QAM	1	0	22.80	0-1	1
	1880	18900	1.4	16QAM	1	2	22.84	0-1	1
	1880	18900	1.4	16QAM	1	5	22.79	0-1	1
	1880	18900	1.4	16QAM	3	0	22.20	0-1	1
	1880	18900	1.4	16QAM	3	2	22.15	0-1	1
	1880	18900	1.4	16QAM	3	3	22.58	0-1	1
	1880	18900	1.4	16QAM	6	0	21.38	0-2	2
High	1909.3	19193	1.4	QPSK	1	0	23.22	0	0
	1909.3	19193	1.4	QPSK	1	2	23.30	0	0
	1909.3	19193	1.4	QPSK	1	5	23.31	0	0
	1909.3	19193	1.4	QPSK	3	0	23.30	0	0
	1909.3	19193	1.4	QPSK	3	2	23.30	0	0
	1909.3	19193	1.4	QPSK	3	3	23.25	0	0
	1909.3	19193	1.4	QPSK	6	0	22.37	0-1	1
	1909.3	19193	1.4	16QAM	1	0	22.98	0-1	1
	1909.3	19193	1.4	16QAM	1	2	23.00	0-1	1
	1909.3	19193	1.4	16QAM	1	5	23.04	0-1	1
	1909.3	19193	1.4	16QAM	3	0	22.77	0-1	1
	1909.3	19193	1.4	16QAM	3	2	22.94	0-1	1
	1909.3	19193	1.4	16QAM	3	3	22.68	0-1	1
	1909.3	19193	1.4	16QAM	6	0	21.54	0-2	2

Table 10.2.12 LTE Conducted Power

4) LTE Band 7

Mode	Freq. (MHz)	Channel	LTE Band 7 Conducted Power- 20 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPR Allowed Per 3GPP(dB)	MPR (dB)
Low	2510	20850	20	QPSK	1	0	21.40	0	0
	2510	20850	20	QPSK	1	50	21.38	0	0
	2510	20850	20	QPSK	1	99	21.67	0	0
	2510	20850	20	QPSK	50	0	20.44	0-1	1
	2510	20850	20	QPSK	50	25	20.46	0-1	1
	2510	20850	20	QPSK	50	50	20.46	0-1	1
	2510	20850	20	QPSK	100	0	20.50	0-1	1
	2510	20850	20	16QAM	1	0	20.77	0-1	1
	2510	20850	20	16QAM	1	50	20.96	0-1	1
	2510	20850	20	16QAM	1	99	21.14	0-1	1
	2510	20850	20	16QAM	50	0	19.42	0-2	2
	2510	20850	20	16QAM	50	25	19.13	0-2	2
	2510	20850	20	16QAM	50	50	19.36	0-2	2
	2510	20850	20	16QAM	100	0	19.29	0-2	2
Mid	2535	21100	20	QPSK	1	0	21.65	0	0
	2535	21100	20	QPSK	1	50	21.61	0	0
	2535	21100	20	QPSK	1	99	21.48	0	0
	2535	21100	20	QPSK	50	0	20.51	0-1	1
	2535	21100	20	QPSK	50	25	20.52	0-1	1
	2535	21100	20	QPSK	50	50	20.50	0-1	1
	2535	21100	20	QPSK	100	0	20.48	0-1	1
	2535	21100	20	16QAM	1	0	21.20	0-1	1
	2535	21100	20	16QAM	1	50	21.33	0-1	1
	2535	21100	20	16QAM	1	99	20.92	0-1	1
	2535	21100	20	16QAM	50	0	19.62	0-2	2
	2535	21100	20	16QAM	50	25	19.66	0-2	2
	2535	21100	20	16QAM	50	50	19.52	0-2	2
	2535	21100	20	16QAM	100	0	19.42	0-2	2
High	2560	21350	20	QPSK	1	0	21.69	0	0
	2560	21350	20	QPSK	1	50	21.29	0	0
	2560	21350	20	QPSK	1	99	21.56	0	0
	2560	21350	20	QPSK	50	0	20.53	0-1	1
	2560	21350	20	QPSK	50	25	20.46	0-1	1
	2560	21350	20	QPSK	50	50	20.52	0-1	1
	2560	21350	20	QPSK	100	0	20.58	0-1	1
	2560	21350	20	16QAM	1	0	20.96	0-1	1
	2560	21350	20	16QAM	1	50	21.02	0-1	1
	2560	21350	20	16QAM	1	99	21.06	0-1	1
	2560	21350	20	16QAM	50	0	19.55	0-2	2
	2560	21350	20	16QAM	50	25	19.28	0-2	2
	2560	21350	20	16QAM	50	50	19.39	0-2	2
	2560	21350	20	16QAM	100	0	19.47	0-2	2

Table 10.2.13 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 7 Conducted Power- 15 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPRAccorded Per 3GPP(dB)	MPR (dB)
Low	2507.5	20825	15	QPSK	1	0	21.22	0	0
	2507.5	20825	15	QPSK	1	36	21.24	0	0
	2507.5	20825	15	QPSK	1	74	21.57	0	0
	2507.5	20825	15	QPSK	36	0	20.25	0-1	1
	2507.5	20825	15	QPSK	36	18	20.21	0-1	1
	2507.5	20825	15	QPSK	36	37	20.50	0-1	1
	2507.5	20825	15	QPSK	75	0	20.46	0-1	1
	2507.5	20825	15	16QAM	1	0	20.76	0-1	1
	2507.5	20825	15	16QAM	1	36	20.68	0-1	1
	2507.5	20825	15	16QAM	1	74	21.09	0-1	1
	2507.5	20825	15	16QAM	36	0	19.23	0-2	2
	2507.5	20825	15	16QAM	36	18	19.35	0-2	2
	2507.5	20825	15	16QAM	36	37	19.42	0-2	2
	2507.5	20825	15	16QAM	75	0	19.36	0-2	2
Mid	2535	21100	15	QPSK	1	0	21.63	0	0
	2535	21100	15	QPSK	1	36	21.67	0	0
	2535	21100	15	QPSK	1	74	21.61	0	0
	2535	21100	15	QPSK	36	0	20.53	0-1	1
	2535	21100	15	QPSK	36	18	20.53	0-1	1
	2535	21100	15	QPSK	36	37	20.48	0-1	1
	2535	21100	15	QPSK	75	0	20.64	0-1	1
	2535	21100	15	16QAM	1	0	21.28	0-1	1
	2535	21100	15	16QAM	1	36	21.44	0-1	1
	2535	21100	15	16QAM	1	74	21.37	0-1	1
	2535	21100	15	16QAM	36	0	19.59	0-2	2
	2535	21100	15	16QAM	36	18	19.65	0-2	2
	2535	21100	15	16QAM	36	37	19.57	0-2	2
	2535	21100	15	16QAM	75	0	19.53	0-2	2
High	2562.5	21375	15	QPSK	1	0	21.47	0	0
	2562.5	21375	15	QPSK	1	36	21.26	0	0
	2562.5	21375	15	QPSK	1	74	21.58	0	0
	2562.5	21375	15	QPSK	36	0	20.38	0-1	1
	2562.5	21375	15	QPSK	36	18	20.48	0-1	1
	2562.5	21375	15	QPSK	36	37	20.46	0-1	1
	2562.5	21375	15	QPSK	75	0	20.51	0-1	1
	2562.5	21375	15	16QAM	1	0	21.41	0-1	1
	2562.5	21375	15	16QAM	1	36	20.84	0-1	1
	2562.5	21375	15	16QAM	1	74	21.05	0-1	1
	2562.5	21375	15	16QAM	36	0	19.64	0-2	2
	2562.5	21375	15	16QAM	36	18	19.44	0-2	2
	2562.5	21375	15	16QAM	36	37	19.57	0-2	2
	2562.5	21375	15	16QAM	75	0	19.48	0-2	2

Table 10.2.14 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 7 Conducted Power- 10 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPRAccorded Per 3GPP(dB)	MPR (dB)
Low	2505	20800	10	QPSK	1	0	21.28	0	0
	2505	20800	10	QPSK	1	25	21.02	0	0
	2505	20800	10	QPSK	1	49	21.26	0	0
	2505	20800	10	QPSK	25	0	20.11	0-1	1
	2505	20800	10	QPSK	25	12	20.15	0-1	1
	2505	20800	10	QPSK	25	25	20.15	0-1	1
	2505	20800	10	QPSK	50	0	20.18	0-1	1
	2505	20800	10	16QAM	1	0	20.72	0-1	1
	2505	20800	10	16QAM	1	25	20.75	0-1	1
	2505	20800	10	16QAM	1	49	20.93	0-1	1
	2505	20800	10	16QAM	25	0	19.38	0-2	2
	2505	20800	10	16QAM	25	12	19.40	0-2	2
	2505	20800	10	16QAM	25	25	19.39	0-2	2
	2505	20800	10	16QAM	50	0	19.26	0-2	2
Mid	2535	21100	10	QPSK	1	0	21.48	0	0
	2535	21100	10	QPSK	1	25	21.59	0	0
	2535	21100	10	QPSK	1	49	21.63	0	0
	2535	21100	10	QPSK	25	0	20.59	0-1	1
	2535	21100	10	QPSK	25	12	20.59	0-1	1
	2535	21100	10	QPSK	25	25	20.52	0-1	1
	2535	21100	10	QPSK	50	0	20.57	0-1	1
	2535	21100	10	16QAM	1	0	21.04	0-1	1
	2535	21100	10	16QAM	1	25	21.24	0-1	1
	2535	21100	10	16QAM	1	49	21.06	0-1	1
	2535	21100	10	16QAM	25	0	19.75	0-2	2
	2535	21100	10	16QAM	25	12	19.68	0-2	2
	2535	21100	10	16QAM	25	25	19.70	0-2	2
	2535	21100	10	16QAM	50	0	19.50	0-2	2
High	2567.5	21400	10	QPSK	1	0	21.39	0	0
	2567.5	21400	10	QPSK	1	25	21.47	0	0
	2567.5	21400	10	QPSK	1	49	21.47	0	0
	2567.5	21400	10	QPSK	25	0	20.41	0-1	1
	2567.5	21400	10	QPSK	25	12	20.55	0-1	1
	2567.5	21400	10	QPSK	25	25	20.46	0-1	1
	2567.5	21400	10	QPSK	50	0	20.44	0-1	1
	2567.5	21400	10	16QAM	1	0	21.01	0-1	1
	2567.5	21400	10	16QAM	1	25	21.01	0-1	1
	2567.5	21400	10	16QAM	1	49	20.96	0-1	1
	2567.5	21400	10	16QAM	25	0	19.68	0-2	2
	2567.5	21400	10	16QAM	25	12	19.76	0-2	2
	2567.5	21400	10	16QAM	25	25	19.65	0-2	2
	2567.5	21400	10	16QAM	50	0	19.48	0-2	2

Table 10.2.15 LTE Conducted Power

Mode	Freq. (MHz)	Channel	LTE Band 7 Conducted Power– 5 MHz Bandwidth						
			Bandwidth (MHz)	Modulation	RB Size	RB Offset	Conducted Power(dBm)	MPRAccorded Per 3GPP(dB)	MPR (dB)
Low	2502.5	20775	5	QPSK	1	0	20.83	0	0
	2502.5	20775	5	QPSK	1	12	20.99	0	0
	2502.5	20775	5	QPSK	1	24	20.81	0	0
	2502.5	20775	5	QPSK	12	0	19.95	0-1	1
	2502.5	20775	5	QPSK	12	6	19.99	0-1	1
	2502.5	20775	5	QPSK	12	13	19.95	0-1	1
	2502.5	20775	5	QPSK	25	0	19.99	0-1	1
	2502.5	20775	5	16QAM	1	0	20.56	0-1	1
	2502.5	20775	5	16QAM	1	12	20.62	0-1	1
	2502.5	20775	5	16QAM	1	24	20.63	0-1	1
	2502.5	20775	5	16QAM	12	0	19.18	0-2	2
	2502.5	20775	5	16QAM	12	6	19.12	0-2	2
	2502.5	20775	5	16QAM	12	13	19.27	0-2	2
	2502.5	20775	5	16QAM	25	0	19.15	0-2	2
Mid	2535	21100	5	QPSK	1	0	21.31	0	0
	2535	21100	5	QPSK	1	12	21.46	0	0
	2535	21100	5	QPSK	1	24	21.40	0	0
	2535	21100	5	QPSK	12	0	20.33	0-1	1
	2535	21100	5	QPSK	12	6	20.50	0-1	1
	2535	21100	5	QPSK	12	13	20.52	0-1	1
	2535	21100	5	QPSK	25	0	20.48	0-1	1
	2535	21100	5	16QAM	1	0	21.04	0-1	1
	2535	21100	5	16QAM	1	12	21.02	0-1	1
	2535	21100	5	16QAM	1	24	21.05	0-1	1
	2535	21100	5	16QAM	12	0	19.44	0-2	2
	2535	21100	5	16QAM	12	6	19.48	0-2	2
	2535	21100	5	16QAM	12	13	19.45	0-2	2
	2535	21100	5	16QAM	25	0	19.64	0-2	2
High	2567.5	21425	5	QPSK	1	0	21.23	0	0
	2567.5	21425	5	QPSK	1	12	21.30	0	0
	2567.5	21425	5	QPSK	1	24	21.30	0	0
	2567.5	21425	5	QPSK	12	0	20.37	0-1	1
	2567.5	21425	5	QPSK	12	6	20.45	0-1	1
	2567.5	21425	5	QPSK	12	13	20.40	0-1	1
	2567.5	21425	5	QPSK	25	0	20.38	0-1	1
	2567.5	21425	5	16QAM	1	0	20.82	0-1	1
	2567.5	21425	5	16QAM	1	12	20.93	0-1	1
	2567.5	21425	5	16QAM	1	24	20.95	0-1	1
	2567.5	21425	5	16QAM	12	0	19.41	0-2	2
	2567.5	21425	5	16QAM	12	6	19.43	0-2	2
	2567.5	21425	5	16QAM	12	13	19.38	0-2	2
	2567.5	21425	5	16QAM	25	0	19.63	0-2	2

Table 10.2.16 LTE Conducted Power

10.3 WLAN Conducted Powers

Mode	Freq. (MHz)	Channel	802.11b (2.4 GHz) Conducted Power (dBm)			
			Data Rate (Mbps)			
			1	2	5.5	11
802.11b	2412	1	15.29	15.18	15.22	15.17
	2437	6	14.87	14.82	14.80	14.84
	2462	11	<u>16.10</u>	16.08	15.95	16.07

Table 10.3.1 IEEE 802.11b Average RF Power

Mode	Freq. (MHz)	Channel	802.11g (2.4 GHz) Conducted Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11g	2412	1	14.70	14.69	14.70	14.62	14.60	14.65	14.56	14.57
	2437	6	14.15	14.16	14.06	14.05	14.15	14.09	14.14	14.10
	2462	11	13.30	13.25	13.19	13.16	13.19	13.23	13.31	13.25

Table 10.3.2 IEEE 802.11g Average RF Power

Mode	Freq. (MHz)	Channel	802.11n HT20 (2.4 GHz) Conducted Power (dBm)							
			Data Rate (Mbps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT-20)	2412	1	13.84	13.72	13.72	13.73	13.67	13.64	13.75	13.75
	2437	6	13.23	13.12	13.16	13.13	13.12	13.25	13.16	13.13
	2462	11	12.46	12.40	12.35	12.33	12.28	12.35	12.31	12.41

Table 10.3.3 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	802.11a (5 GHz) Conducted Power (dBm)							
			Data Rate (Mbps)							
			6	9	12	18	24	36	48	54
802.11a	5180	36	12.65	12.56	12.58	12.42	12.56	12.59	12.52	12.62
	5200	40	12.84	12.74	12.70	12.60	12.75	12.74	12.82	12.77
	5220	44	12.83	12.71	12.68	12.64	12.61	12.82	12.64	12.61
	5240	48	12.78	12.60	12.63	12.74	12.76	12.66	12.69	12.71
	5260	52	12.84	12.65	12.72	12.80	12.67	12.81	12.68	12.60
	5280	56	12.79	12.68	12.70	12.55	12.73	12.77	12.73	12.72
	5300	60	<u>12.92</u>	12.76	12.80	12.81	12.66	12.77	12.69	12.68
	5320	64	12.46	12.41	12.45	12.41	12.30	12.22	12.38	12.27
	5500	100	12.55	12.43	12.45	12.39	12.46	12.41	12.48	12.31
	5560	112	12.35	12.29	12.19	12.33	12.15	12.19	12.29	12.32
	5580	116	12.39	12.25	12.20	12.36	12.33	12.24	12.13	12.22
	5700	140	<u>12.94</u>	12.64	12.70	12.70	12.90	12.89	12.84	12.68
	5745	149	12.43	12.19	12.26	12.24	12.42	12.42	12.40	12.35
	5785	157	12.54	12.38	12.33	12.43	12.43	12.53	12.33	12.49
	5825	165	<u>12.89</u>	12.69	12.72	12.71	12.82	12.85	12.74	12.72

Table 10.3.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	802.11n HT20 (5 GHz) Conducted Power (dBm)							
			Data Rate (Mbps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT-20)	5180	36	12.17	11.93	11.89	11.96	12.15	12.03	11.95	12.09
	5200	40	11.76	11.74	11.75	11.67	11.71	11.55	11.51	11.55
	5220	44	11.71	11.49	11.65	11.53	11.57	11.47	11.47	11.66
	5240	48	11.88	11.64	11.67	11.78	11.70	11.68	11.79	11.68
	5260	52	11.79	11.63	11.66	11.60	11.73	11.62	11.70	11.63
	5280	56	12.51	12.36	12.36	12.42	12.34	12.26	12.46	12.31
	5300	60	12.68	12.43	12.63	12.55	12.62	12.63	12.53	12.61
	5320	64	12.51	12.44	12.42	12.46	12.33	12.41	12.48	12.43
	5500	100	12.87	12.83	12.84	12.79	12.85	12.71	12.69	12.79
	5560	112	12.31	12.05	12.08	12.21	12.19	12.04	12.24	12.08
	5580	116	12.37	12.31	12.10	12.35	12.14	12.13	12.27	12.18
	5700	140	12.38	12.31	12.25	12.20	12.32	12.34	12.16	12.15
	5745	149	12.36	12.16	12.34	12.26	12.13	12.31	12.18	12.15
	5785	157	12.62	12.59	12.59	12.52	12.52	12.47	12.53	12.46
	5825	165	12.76	12.59	12.66	12.62	12.58	12.64	12.59	12.71

Table 10.3.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	802.11n HT40 (5 GHz) Conducted Power (dBm)							
			Data Rate (Mbps)							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT-40)	5190	38	12.48	12.42	12.32	12.36	12.40	12.39	12.36	12.34
	5230	46	12.45	12.33	12.40	12.34	12.30	12.39	12.41	12.30
	5270	54	12.37	12.07	12.18	12.17	12.27	12.17	12.31	12.18
	5310	62	12.00	11.97	11.98	11.93	11.98	11.91	11.97	11.94
	5510	102	11.95	11.76	11.87	11.79	11.87	11.76	11.94	11.93
	5550	110	12.46	12.28	12.26	12.36	12.37	12.43	12.26	12.41
	5670	134	12.46	12.34	12.21	12.36	12.23	12.32	12.33	12.31
	5755	151	12.40	12.16	12.25	12.38	12.25	12.30	12.22	12.20
	5795	159	12.44	12.31	12.41	12.36	12.42	12.33	12.30	12.41

Table 10.3.6 IEEE 802.11n HT40 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02 and October 2012 / April 2013 FCC/TCB Meeting Notes:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is $\leq 1.2 \text{ W/kg}$.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.

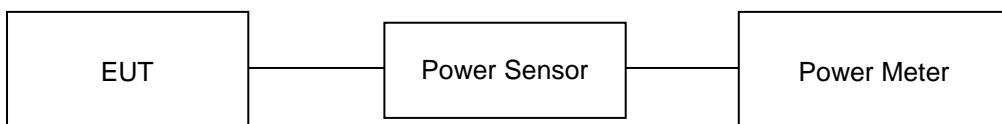


Figure 10.3 Power Measurement Setup

10.4 Bluetooth Conducted Powers

Channel	Frequency (MHz)	Frame AVG Output Power (1Mbps)		Frame AVG Output Power (2Mbps)		Frame AVG Output Power (3Mbps)	
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)
Low	2402	8.52	7.11	5.57	3.61	5.61	3.64
Mid	2441	8.43	6.97	5.74	3.75	5.77	3.78
High	2480	8.60	7.24	5.66	3.68	5.68	3.70

Table 10.4.1 Bluetooth Frame Average RF Power

Channel	Frequency (MHz)	Frame AVG Output Power (LE)	
		(dBm)	(mW)
Low	2402	-0.13	0.97
Mid	2440	-0.19	0.96
High	2480	-0.33	0.93

Table 10.4.2 Bluetooth LE Frame Average RF Power

- Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(A).

- The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- Enter LE mode in EUT and operate it.

When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.

2) Instruments and EUT were connected like Figure 10.4(B).

- The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- Power levels were measured by a Power Meter.

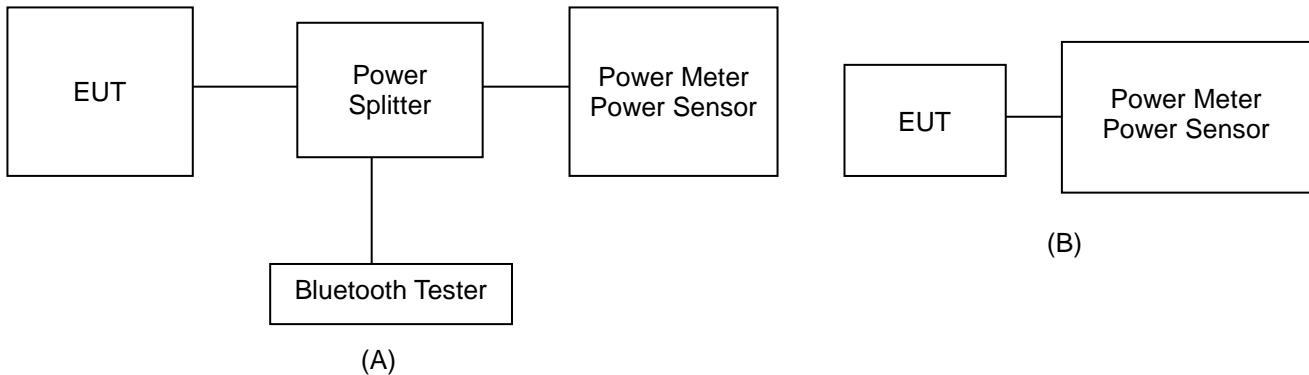


Figure 10.4.1 Average Power Measurement Setup

The average conducted output powers of Bluetooth were measured using above test setup and a wideband gated RF power meter when the EUT is transmitting at its maximum power level.

11. SYSTEM VERIFICATION

11.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jul. 10. 2017	750 Head	21.9	21.7	710.0	42.110	0.887	41.101	0.854	-2.40	-3.72
				750.0	41.900	0.890	40.639	0.891	-3.01	0.11
Jul. 10. 2017	750 Body	21.9	21.5	710.0	55.690	0.960	54.651	0.927	-1.87	-3.44
				750.0	55.530	0.963	54.056	0.961	-2.65	-0.21
Jul. 03. 2017	835 Head	22.1	22.0	826.4	41.540	0.899	40.137	0.878	-3.38	-2.34
				835.0	41.500	0.900	40.022	0.886	-3.56	-1.56
				836.6	41.500	0.901	40.001	0.888	-3.61	-1.44
				846.6	41.500	0.912	39.882	0.897	-3.90	-1.64
Jul. 03. 2017	835 Body	22.1	22.2	826.4	55.240	0.969	53.305	0.999	-3.50	3.10
				835.0	55.200	0.970	53.218	1.007	-3.59	3.81
				836.6	55.200	0.971	53.204	1.008	-3.62	3.81
				846.6	55.170	0.984	53.103	1.017	-3.75	3.35
Jul. 06. 2017	835 Head	21.7	21.5	829.0	41.530	0.899	40.160	0.875	-3.30	-2.67
				835.0	41.500	0.900	40.105	0.881	-3.36	-2.11
				836.5	41.500	0.901	40.091	0.882	-3.40	-2.11
				844.0	41.500	0.910	40.018	0.889	-3.57	-2.31
Jul. 06. 2017	835 Body	21.7	21.8	829.0	55.220	0.970	53.414	0.999	-3.27	2.99
				835.0	55.200	0.970	53.348	1.005	-3.36	3.61
				836.5	55.200	0.971	53.332	1.007	-3.38	3.71
				844.0	55.170	0.981	53.254	1.014	-3.47	3.36
Jul. 04. 2017	1900 Head	21.9	21.8	1852.4	40.000	1.400	39.557	1.352	-1.11	-3.43
				1880.0	40.000	1.400	39.497	1.382	-1.26	-1.29
				1900.0	40.000	1.400	39.437	1.403	-1.41	0.21
				1907.6	40.000	1.400	39.410	1.410	-1.48	0.71
Jul. 04. 2017	1900 Body	21.9	21.6	1852.4	53.300	1.520	51.452	1.518	-3.47	-0.13
				1880.0	53.300	1.520	51.398	1.547	-3.57	1.78
				1900.0	53.300	1.520	51.362	1.565	-3.64	2.96
				1907.6	53.300	1.520	51.349	1.572	-3.66	3.42
Jul. 05. 2017	1900 Head	22.0	21.7	1860.0	40.000	1.400	39.833	1.364	-0.42	-2.57
				1880.0	40.000	1.400	39.769	1.385	-0.58	-1.07
				1900.0	40.000	1.400	39.693	1.405	-0.77	0.36
				1860.0	53.300	1.520	52.439	1.536	-1.62	1.05
Jul. 05. 2017	1900 Body	22.0	21.9	1880.0	53.300	1.520	52.359	1.555	-1.77	2.30
				1900.0	53.300	1.520	52.290	1.575	-1.89	3.62
				2412.0	39.270	1.766	39.217	1.781	-0.13	0.85
				2437.0	39.220	1.788	39.136	1.810	-0.21	1.23
Jul. 11. 2017	2450 Head	22.1	22.0	2450.0	39.200	1.800	39.095	1.825	-0.27	1.39
				2462.0	39.180	1.813	39.062	1.838	-0.30	1.38
				2412.0	52.750	1.914	50.800	1.927	-3.70	0.68
				2437.0	52.720	1.938	50.740	1.957	-3.76	0.98
Jul. 11. 2017	2450 Body	22.1	22.2	2450.0	52.700	1.950	50.706	1.973	-3.78	1.18
				2462.0	52.680	1.967	50.680	1.987	-3.80	1.02

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jul. 07. 2017	2600 Head	21.6	21.4	2510.0	39.120	1.864	39.631	1.884	1.31	1.07
				2535.0	39.090	1.891	39.544	1.913	1.16	1.16
				2560.0	39.050	1.917	39.461	1.942	1.05	1.30
				2600.0	39.000	1.960	39.320	1.987	0.82	1.38
Jul. 07. 2017	2600 Body	21.6	21.7	2510.0	52.620	2.035	51.982	2.096	-1.21	3.00
				2535.0	52.590	2.071	51.907	2.128	-1.30	2.75
				2560.0	52.560	2.106	51.844	2.159	-1.36	2.52
				2600.0	52.510	2.163	51.717	2.208	-1.51	2.08
Jul. 12. 2017	5300 Head	21.3	21.0	5260.0	35.940	4.720	34.924	4.715	-2.83	-0.11
				5280.0	35.920	4.740	34.888	4.739	-2.87	-0.02
				5300.0	35.900	4.760	34.858	4.758	-2.90	-0.04
				5320.0	35.880	4.780	34.812	4.784	-2.98	0.08
Jul. 13. 2017	5300 Body	21.4	21.3	5260.0	48.930	5.369	47.878	5.358	-2.15	-0.20
				5280.0	48.910	5.393	47.844	5.387	-2.18	-0.11
				5300.0	48.880	5.416	47.809	5.411	-2.19	-0.09
				5320.0	48.850	5.439	47.764	5.440	-2.22	0.02
Jul. 13. 2017	5600 Head	21.4	21.1	5500.0	35.650	4.965	35.448	5.117	-0.57	3.06
				5560.0	35.560	5.028	35.335	5.192	-0.63	3.26
				5580.0	35.530	5.049	35.299	5.217	-0.65	3.33
				5600.0	35.500	5.070	35.264	5.244	-0.66	3.43
				5700.0	35.400	5.170	35.088	5.269	-0.88	1.91
Jul. 13. 2017	5600 Body	21.4	21.3	5500.0	48.610	5.650	47.437	5.689	-2.41	0.69
				5560.0	48.530	5.720	47.324	5.769	-2.49	0.86
				5580.0	48.500	5.743	47.284	5.798	-2.51	0.96
				5600.0	48.470	5.766	47.246	5.828	-2.53	1.08
				5700.0	48.340	5.883	47.068	5.966	-2.63	1.41
Jul. 14. 2017	5800 Head	21.2	21.1	5745.0	35.360	5.215	34.935	5.388	-1.20	3.32
				5785.0	35.320	5.255	34.858	5.438	-1.31	3.48
				5800.0	35.300	5.270	34.830	5.460	-1.33	3.61
				5825.0	35.280	5.296	34.794	5.492	-1.38	3.70
Jul. 14. 2017	5800 Body	21.2	21.0	5745.0	48.270	5.936	46.889	6.027	-2.86	1.53
				5785.0	48.220	5.982	46.819	6.086	-2.91	1.74
				5800.0	48.200	6.000	46.793	6.109	-2.92	1.82
				5825.0	48.170	6.029	46.752	6.148	-2.94	1.97

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ϵ_r for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

11.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at 750 MHz, 835 MHz, 1900 MHz, 2450 MHz, 2600 MHz and 5GHz by using the SAR Dipole kit(s). (Graphic Plots Attached)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
C	750	D750V3, SN:1049	Jul. 10. 2017	Head	21.9	21.7	3866	250	8.51	2.28	9.12	7.17
C	750	D750V3, SN:1049	Jul. 10. 2017	Body	21.9	21.5	3866	250	8.63	2.10	8.40	-2.67
C	835	D835V2, SN:4d159	Jul. 03. 2017	Head	22.1	22.0	3866	250	9.33	2.34	9.36	0.32
C	835	D835V2, SN:4d159	Jul. 03. 2017	Body	22.1	22.2	3866	250	9.57	2.49	9.96	4.08
C	835	D835V2, SN:4d159	Jul. 06. 2017	Head	21.7	21.5	3866	250	9.33	2.31	9.24	-0.96
C	835	D835V2, SN:4d159	Jul. 06. 2017	Body	21.7	21.8	3866	250	9.57	2.28	9.12	-4.70
C	1900	D1900V2, SN:5d176	Jul. 04. 2017	Head	21.9	21.8	3866	250	40.9	9.99	39.96	-2.30
C	1900	D1900V2, SN: 5d176	Jul. 04. 2017	Body	21.9	21.6	3866	250	39.3	9.98	39.92	1.58
C	1900	D1900V2, SN: 5d176	Jul. 05. 2017	Head	22.0	21.7	3866	250	40.9	10.30	41.20	0.73
C	1900	D1900V2, SN: 5d176	Jul. 05. 2017	Body	22.0	21.9	3866	250	39.3	10.10	40.40	2.80
C	2450	D2450V2, SN: 920	Jul. 11. 2017	Head	22.1	22.0	3866	250	52.5	13.90	55.60	5.90
C	2450	D2450V2, SN: 920	Jul. 11. 2017	Body	22.1	22.2	3866	250	51.0	13.60	54.40	6.67
C	2600	D2600V2, SN: 1016	Jul. 07. 2017	Head	21.6	21.4	3866	250	57.1	13.60	54.40	-4.73
C	2600	D2600V2, SN: 1016	Jul. 07. 2017	Body	21.6	21.7	3866	250	54.2	13.70	54.80	1.11

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole Kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
C	5300	D5GHzV2, SN:1103	Jul. 12. 2017	Head	21.3	21.0	3916	100	84.1	8.73	87.30	3.80
C	5300	D5GHzV2, SN:1103	Jul. 13. 2017	Body	21.4	21.3	3916	100	76.7	7.43	74.30	-3.13
C	5600	D5GHzV2, SN:1103	Jul. 13. 2017	Head	21.4	21.1	3916	100	84.5	8.96	89.60	6.04
C	5600	D5GHzV2, SN:1103	Jul. 13. 2017	Body	21.4	21.3	3916	100	80.1	7.92	79.20	-1.12
C	5800	D5GHzV2, SN:1103	Jul. 14. 2017	Head	21.2	21.1	3916	100	81.1	7.93	79.30	-2.22
C	5800	D5GHzV2, SN:1103	Jul. 14. 2017	Body	21.2	21.0	3916	100	77.5	7.22	72.20	-6.84

Note1 : System Verification was measured with input 250 mW, 100 mW (5200-5800 MHz) and normalized to 1W.

Note2 : To confirm the proper SAR liquid depth, the z-axis plots from the system verifications were included since the system verifications were performed using the same liquid, probe and DAE as the SAR tests in the same time period.

Note3: Full system validation status and results can be found in Attachment 3.

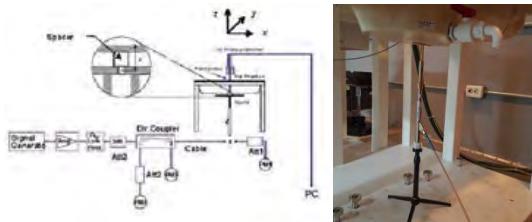


Figure 11.1 Dipole Verification Test Setup Diagram & Photo

12. SAR TEST RESULTS

12.1 Head SAR Results

Table 12.1.1 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	24.0	23.59	0.020	Left Touch	FCC #1	1:1	0.371	1.099	0.408	
836.6	4183	WCDMA 850	RMC	24.0	23.59	0.020	Right Touch	FCC #1	1:1	0.396	1.099	0.435	A1
836.6	4183	WCDMA 850	RMC	24.0	23.59	-0.130	Left Tilt	FCC #1	1:1	0.309	1.099	0.340	
836.6	4183	WCDMA 850	RMC	24.0	23.59	-0.100	Right Tilt	FCC #1	1:1	0.260	1.099	0.286	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Table 12.1.2 WCDMA 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1852.4	9262	WCDMA 1900	RMC	24.0	23.87	0.100	Left Touch	FCC #1	1:1	0.753	1.030	0.776	
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	0.180	Left Touch	FCC #1	1:1	0.917	1.016	0.932	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.060	Left Touch	FCC #1	1:1	1.000	1.002	1.002	A2
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	0.090	Right Touch	FCC #1	1:1	0.444	1.016	0.451	
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	-0.130	Left Tilt	FCC #1	1:1	0.193	1.016	0.196	
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	0.000	Right Tilt	FCC #1	1:1	0.185	1.016	0.188	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	-0.060	Left Touch	FCC #1	1:1	0.989	1.002	0.991	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Blue entries represent variability measurements.

Table 12.1.3 LTE Band 17 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
710.0	23790	LTE B17	10	23.0	22.91	0.090	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.218	1.021	0.223	A3
710.0	23790	LTE B17	10	22.0	21.87	0.170	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.164	1.030	0.169	
710.0	23790	LTE B17	10	23.0	22.91	0.060	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.215	1.021	0.220	
710.0	23790	LTE B17	10	22.0	21.87	0.080	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.155	1.030	0.160	
710.0	23790	LTE B17	10	23.0	22.91	0.090	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.143	1.021	0.146	
710.0	23790	LTE B17	10	22.0	21.87	-0.160	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.103	1.030	0.106	
710.0	23790	LTE B17	10	23.0	22.91	-0.070	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.132	1.021	0.135	
710.0	23790	LTE B17	10	22.0	21.87	0.030	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.108	1.030	0.111	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram									

Table 12.1.4 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	23.5	23.34	0.070	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.280	1.038	0.291	
836.5	20525	LTE B5	10	22.5	21.98	0.180	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.224	1.127	0.252	
836.5	20525	LTE B5	10	23.5	23.34	0.100	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.306	1.038	0.318	A4
836.5	20525	LTE B5	10	22.5	21.98	0.140	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.262	1.127	0.295	
836.5	20525	LTE B5	10	23.5	23.34	-0.150	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.220	1.038	0.228	
836.5	20525	LTE B5	10	22.5	21.98	0.120	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.181	1.127	0.204	
836.5	20525	LTE B5	10	23.5	23.34	-0.070	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.213	1.038	0.221	
836.5	20525	LTE B5	10	22.5	21.98	0.040	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.174	1.127	0.196	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.5 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	24.0	23.36	0.090	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.640	1.159	0.742	
1880.0	18900	LTE B2	20	24.0	23.50	0.160	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.829	1.122	0.930	A5
1900.0	19100	LTE B2	20	24.0	23.42	-0.040	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.792	1.143	0.905	
1880.0	18900	LTE B2	20	23.0	22.42	-0.050	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.586	1.143	0.670	
1880.0	18900	LTE B2	20	23.0	22.33	0.190	1	Left Touch	FCC #1	QPSK	100	0	1:1	0.608	1.167	0.710	
1880.0	18900	LTE B2	20	24.0	23.50	0.160	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.336	1.122	0.377	
1880.0	18900	LTE B2	20	23.0	22.42	0.140	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.263	1.143	0.301	
1880.0	18900	LTE B2	20	24.0	23.50	0.150	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.162	1.122	0.182	
1880.0	18900	LTE B2	20	23.0	22.42	0.150	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.126	1.143	0.144	
1880.0	18900	LTE B2	20	24.0	23.50	-0.130	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.149	1.122	0.167	
1880.0	18900	LTE B2	20	23.0	22.42	-0.190	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.114	1.143	0.130	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.6 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plot s #
MHz	Ch																
2560.0	21350	LTE B7	20	22.0	21.69	0.010	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.124	1.074	0.133	A6
2560.0	21350	LTE B7	20	21.0	20.53	0.000	1	Left Touch	FCC #1	QPSK	50	0	1:1	0.075	1.114	0.084	
2560.0	21350	LTE B7	20	22.0	21.69	-0.090	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.056	1.074	0.060	
2560.0	21350	LTE B7	20	21.0	20.53	0.160	1	Right Touch	FCC #1	QPSK	50	0	1:1	0.040	1.114	0.045	
2560.0	21350	LTE B7	20	22.0	21.69	-0.170	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.029	1.074	0.031	
2560.0	21350	LTE B7	20	21.0	20.53	-0.030	1	Left Tilt	FCC #1	QPSK	50	0	1:1	0.023	1.114	0.026	
2560.0	21350	LTE B7	20	22.0	21.69	-0.000	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.041	1.074	0.044	
2560.0	21350	LTE B7	20	21.0	20.53	0.140	1	Right Tilt	FCC #1	QPSK	50	0	1:1	0.027	1.114	0.030	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.1.7 DTS Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #		
MHz	Ch																
2462	11	802.11b	16.5	16.10	0.190	Left Touch	FCC #1	0.114	1	97.8	0.118	1.096	1.022	0.132			
2462	11	802.11b	16.5	16.10	-0.170	Right Touch	FCC #1	0.165	1	97.8	0.159	1.096	1.022	0.178		A7	
2462	11	802.11b	16.5	16.10	0.160	Left Tilt	FCC #1	0.115	1	97.8	0.116	1.096	1.022	0.130			
2462	11	802.11b	16.5	16.10	0.130	Right Tilt	FCC #1	0.159	1	97.8	0.155	1.096	1.022	0.174			
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for OFDM SAR														
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR		
MHz	Ch													
2462	11	802.11b	DSSS	16.5	0.178	2437	802.11g	OFDM	15.0	0.708	0.126			X
2462	11	802.11b	DSSS	16.5	0.178	2437	802.11n HT20	OFDM	14.0	0.562	0.100			X
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 10.1.8 UNII Head SAR
MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5300	60	802.11a	13.0	12.92	0.000	Left Touch	FCC #1	0.090	6	86.9	0.055	1.019	1.151	0.065	
5300	60	802.11a	13.0	12.92	-0.030	Right Touch	FCC #1	0.150	6	86.9	0.144	1.019	1.151	0.169	A8
5300	60	802.11a	13.0	12.92	0.000	Left Tilt	FCC #1	0.022	6	86.9	0.028	1.019	1.151	0.033	
5300	60	802.11a	13.0	12.92	0.180	Right Tilt	FCC #1	0.067	6	86.9	0.061	1.019	1.151	0.072	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5300	60	802.11a	OFDM	13.0	0.169	5200	802.11a	OFDM	13.0	1.000	0.169	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

1. U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 10.1.9 UNII Head SAR
MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5700	140	802.11a	13.0	12.94	-0.150	Left Touch	FCC #1	0.127	6	86.9	0.056	1.014	1.151	0.065	
5700	140	802.11a	13.0	12.94	0.060	Right Touch	FCC #1	0.211	6	86.9	0.213	1.014	1.151	0.249	A9
5700	140	802.11a	13.0	12.94	0.120	Left Tilt	FCC #1	0.087	6	86.9	0.039	1.014	1.151	0.046	
5700	140	802.11a	13.0	12.94	0.030	Right Tilt	FCC #1	0.122	6	86.9	0.138	1.014	1.151	0.161	
5825	165	802.11a	13.0	12.89	0.000	Left Touch	FCC #1	0.106	6	86.9	0.067	1.026	1.151	0.079	
5825	165	802.11a	13.0	12.89	0.100	Right Touch	FCC #1	0.172	6	86.9	0.129	1.026	1.151	0.152	A10
5825	165	802.11a	13.0	12.89	0.000	Left Tilt	FCC #1	0.025	6	86.9	0.033	1.026	1.151	0.039	
5825	165	802.11a	13.0	12.89	0.180	Right Tilt	FCC #1	0.078	6	86.9	0.074	1.026	1.151	0.087	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

12.2 Standalone Body-Worn SAR Worn SAR Results

Table 12.2.1 WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	4183	WCDMA 850	RMC	24.0	23.59	-0.070	15 mm [Front]	FCC #1	N/A	1:1	0.569	1.099	0.625	
836.6	4183	WCDMA 850	RMC	24.0	23.59	-0.030	15 mm [Rear]	FCC #1	N/A	1:1	0.697	1.099	0.766	A11
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	-0.010	15 mm [Front]	FCC #1	N/A	1:1	0.338	1.016	0.343	
1852.4	9262	WCDMA 1900	RMC	24.0	23.87	-0.020	15 mm [Rear]	FCC #1	N/A	1:1	0.934	1.030	0.962	
1880.0	9400	WCDMA 1900	RMC	24.0	23.93	-0.020	15 mm [Rear]	FCC #1	N/A	1:1	1.140	1.016	1.158	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.010	15 mm [Rear]	FCC #1	N/A	1:1	1.250	1.002	1.253	A12
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.110	15 mm [Rear]	FCC #1	N/A	1:1	1.040	1.002	1.042	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.040	15 mm [Rear]	FCC #1	N/A	1:1	1.000	1.002	1.002	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	-0.000	15 mm [Rear]	FCC #1	N/A	1:1	1.240	1.002	1.242	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.030	15 mm [Rear]	FCC #1	N/A	1:1	1.190	1.002	1.192	
1907.6	9538	WCDMA 1900	RMC	24.0	23.99	0.040	15 mm [Rear]	FCC #1	N/A	1:1	1.170	1.002	1.172	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Orange entries represent HSDPA measurements.
2. Yellow entries represent HSUPA measurements.
3. Blue entries represent variability measurements.
4. Purple entries represent DUT position measurement on a foam block(Styrofoam) to prevent holder perturbation.
5. Green entries represent headset measurements.

Table 12.2.2 LTE Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
710.0	23790	LTE B17	10	23.0	22.91	0.020	0	15 mm [Front]	FCC #1	QPSK	1	0	1:1	0.193	1.021	0.197	
710.0	23790	LTE B17	10	22.0	21.87	0.060	1	15 mm [Front]	FCC #1	QPSK	25	0	1:1	0.150	1.030	0.155	
710.0	23790	LTE B17	10	23.0	22.91	-0.030	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.354	1.021	0.361	A13
710.0	23790	LTE B17	10	22.0	21.87	0.020	1	15 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.292	1.030	0.301	
836.5	20525	LTE B5	10	23.5	23.34	-0.030	0	15 mm [Front]	FCC #1	QPSK	1	25	1:1	0.351	1.038	0.364	
836.5	20525	LTE B5	10	22.5	21.98	0.030	1	15 mm [Front]	FCC #1	QPSK	25	0	1:1	0.288	1.127	0.325	
836.5	20525	LTE B5	10	23.5	23.34	-0.020	0	15 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.404	1.038	0.419	A14
836.5	20525	LTE B5	10	22.5	21.98	0.040	1	15 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.333	1.127	0.375	
1860.0	18700	LTE B2	20	24.0	23.50	0.150	0	15 mm [Front]	FCC #1	QPSK	1	0	1:1	0.270	1.122	0.303	
1860.0	18700	LTE B2	20	23.0	22.42	0.020	1	15 mm [Front]	FCC #1	QPSK	50	25	1:1	0.218	1.143	0.249	
1860.0	18700	LTE B2	20	24.0	23.36	0.190	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.606	1.159	0.702	
1880.0	18900	LTE B2	20	24.0	23.50	0.100	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.850	1.122	0.954	A15
1900.0	19100	LTE B2	20	24.0	23.42	0.010	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.753	1.143	0.861	
1860.0	18700	LTE B2	20	23.0	22.42	0.020	1	15 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.683	1.143	0.781	
1860.0	18700	LTE B2	20	23.0	22.33	-0.090	1	15 mm [Rear]	FCC #1	QPSK	100	0	1:1	0.701	1.167	0.818	
2560.0	21350	LTE B7	20	22.0	21.69	-0.010	0	15 mm [Front]	FCC #1	QPSK	1	0	1:1	0.064	1.074	0.069	
2560.0	21350	LTE B7	20	21.0	20.53	-0.060	1	15 mm [Front]	FCC #1	QPSK	50	0	1:1	0.046	1.114	0.051	
2560.0	21350	LTE B7	20	22.0	21.69	-0.070	0	15 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.453	1.074	0.487	A16
2560.0	21350	LTE B7	20	21.0	20.53	0.030	1	15 mm [Rear]	FCC #1	QPSK	50	0	1:1	0.400	1.114	0.446	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Table 12.2.3 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2462	11	802.11b	16.5	16.10	-0.130	15 mm [Front]	FCC #1	0.082	1	97.8	0.068	1.096	1.022	0.076	
2462	11	802.11b	16.5	16.10	-0.150	15 mm [Rear]	FCC #1	0.112	1	97.8	0.105	1.096	1.022	0.118	A17
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Indicates a repeat measurement of the extended battery.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2462	11	802.11b	DSSS	16.5	0.118	2437	802.11g	OFDM	15.0	0.708	0.084	X
2462	11	802.11b	DSSS	16.5	0.118	2437	802.11n HT20	OFDM	14.0	0.562	0.066	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 12.2.4 UNII Body-Worn SAR
MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5300	60	802.11a	13.0	12.92	-0.080	15 mm [Front]	FCC #1	0.026	6	86.9	0.022	1.019	1.151	0.026	
5300	60	802.11a	13.0	12.92	0.080	15 mm [Rear]	FCC #1	0.086	6	86.9	0.077	1.019	1.151	0.090	A18
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Indicates a repeat measurement of the extended battery.

Adjusted SAR results for UNII-1 and UNII-2A SAR

FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5300	60	802.11a	OFDM	13.0	0.090	5200	802.11a	OFDM	13.0	1.000	0.090	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram		

Note(s):

1. U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 12.2.5 UNII Body-Worn SAR
MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5700	140	802.11a	13.0	12.94	-0.150	15 mm [Front]	FCC #1	0.101	6	86.9	0.075	1.014	1.151	0.088	
5700	140	802.11a	13.0	12.94	-0.140	15 mm [Rear]	FCC #1	0.142	6	86.9	0.138	1.014	1.151	0.161	A19
5825	165	802.11a	13.0	12.89	-0.150	15 mm [Front]	FCC #1	0.076	6	86.9	0.059	1.026	1.151	0.070	
5825	165	802.11a	13.0	12.89	0.070	15 mm [Rear]	FCC #1	0.187	6	86.9	0.184	1.026	1.151	0.217	A20
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.

12.3 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 15 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.

WCDMA(UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 5.
2. According to FCC KDB 941225 D05v02r05.

When the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.

Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.

3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. TDD LTE was tested using UL-DL configuration 0 with 6 UL sub frames and 2S sub frames using extended cyclic prefix only and special sub frame configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Sec. 4, the duty factor using extended cyclic prefix is 0.633 (cf=1.58).
6. SAR test reduction is applied using the following criteria:

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

13. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

13.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

13.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation Distance, mm}}$$

Table 13.2.1 Estimated SAR (Head)

Mode	Frequency	Maximum Allowed Power		Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]
Bluetooth	2480	9.5	9	5	0.374

Table 13.2.2 Estimated SAR (Body-Worn)

Mode	Frequency	Maximum Allowed Power		Separation Distance (Body)	Estimated SAR (Body)
	[MHz]	[dBm]	[mW]	[mm]	[W/kg]
Bluetooth	2480	9.5	9	15	0.125

13.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds. Possible transmission paths for the DUT are shown in Figure 13.1 and are color-coded to indicate communication modes which share the same path. Modes which share the same transmission path cannot transmit simultaneously with one another.

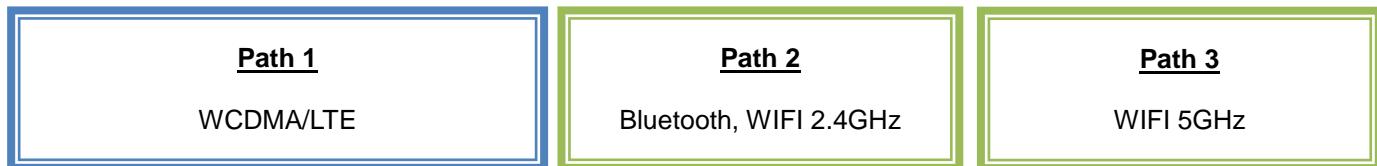


Figure 13.1 Simultaneous Transmission Paths

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 13.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	WCDMA 850/1900 Voice	WCDMA 850/1900 Data	LTE Band 17/5/2/7	WIFI 2.4GHz	WIFI 5GHz	Bluetooth 2.4GHz
1	WCDMA 850/1900 Voice		No	No	Yes	Yes	Yes
2	WCDMA 850/1900 Data	No		No	Yes	Yes	Yes
3	LTE Band 17/5/2/7	No	No		Yes	Yes	Yes
4	WIFI 2.4GHz	Yes	Yes	Yes		No	No
5	WIFI 5GHz	Yes	Yes	Yes	No		Yes
6	Bluetooth 2.4GHz	Yes	Yes	Yes	No	Yes	

Table 13.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Note
1	WCDMA 850 + 2.4 GHz WIFI	Yes	Yes	
2	WCDMA 1900 + 2.4 GHz WIFI	Yes	Yes	
3	LTE + 2.4 GHz WIFI	Yes	Yes	
4	WCDMA 850 + 5 GHz WIFI	Yes	Yes	
5	WCDMA 1900 + 5 GHz WIFI	Yes	Yes	
6	LTE + 5 GHz WIFI	Yes	Yes	
7	WCDMA 850 + Bluetooth	Yes	Yes	
8	WCDMA 1900 + Bluetooth	Yes	Yes	
9	LTE + Bluetooth	Yes	Yes	
10	WCDMA 850 + Bluetooth + 5 GHz WIFI	Yes	Yes	
11	WCDMA 1900 + Bluetooth + 5 GHz WIFI	Yes	Yes	
12	LTE + Bluetooth + 5 GHz WIFI	Yes	Yes	

Notes:

1. WIFI 2.4GHz/5 GHz not supported Hotspot.
2. VoIP is supported(e.g. 3rd part VoIP)
3. Bluetooth and WIFI 2.4GHz can not transmit simultaneously since they share the same chip.
4. WCDMA and LTE can not transmit simultaneously since they share the same chip.
5. When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
6. Per the manufacturer, WIFI Direct is not expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, there are no simultaneous transmission scenarios involving WIFI direct beyond that listed in the above table.

13.4 Head SAR Simultaneous Transmission Analysis

Table 13.4.1 Simultaneous Transmission Scenario for WCDMA with 2.4 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	WCDMA 1900 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.408	0.132	0.540	Head SAR	Left Touch	1.002	0.132	1.134
	Right Touch	0.435	0.178	0.613		Right Touch	0.451	0.178	0.629
	Left Tilt	0.340	0.130	0.470		Left Tilt	0.196	0.130	0.326
	Right Tilt	0.286	0.174	0.460		Right Tilt	0.188	0.174	0.362

Table 13.4.2 Simultaneous Transmission Scenario for LTE with 2.4 GHz W-LAN (Held to Ear)

Simult TX	Configuration	LTE Band 17 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 5 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.223	0.132	0.355	Head SAR	Left Touch	0.291	0.132	0.423
	Right Touch	0.220	0.178	0.398		Right Touch	0.318	0.178	0.496
	Left Tilt	0.146	0.130	0.276		Left Tilt	0.228	0.130	0.358
	Right Tilt	0.135	0.174	0.309		Right Tilt	0.221	0.174	0.395
Simult TX	Configuration	LTE Band 2 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 7 SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.930	0.132	1.062	Head SAR	Left Touch	0.133	0.132	0.265
	Right Touch	0.377	0.178	0.555		Right Touch	0.060	0.178	0.238
	Left Tilt	0.182	0.130	0.312		Left Tilt	0.031	0.130	0.161
	Right Tilt	0.167	0.174	0.341		Right Tilt	0.044	0.174	0.218

Table 13.4.3 Simultaneous Transmission Scenario for WCDMA with 5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	WCDMA 1900 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.408	0.079	0.487	Head SAR	Left Touch	1.002	0.079	1.081
	Right Touch	0.435	0.249	0.684		Right Touch	0.451	0.249	0.700
	Left Tilt	0.340	0.046	0.386		Left Tilt	0.196	0.046	0.242
	Right Tilt	0.286	0.161	0.447		Right Tilt	0.188	0.161	0.349

Table 13.4.4 Simultaneous Transmission Scenario for LTE with 5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	LTE Band 17 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 5 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.223	0.079	0.302	Head SAR	Left Touch	0.291	0.079	0.370
	Right Touch	0.220	0.249	0.469		Right Touch	0.318	0.249	0.567
	Left Tilt	0.146	0.046	0.192		Left Tilt	0.228	0.046	0.274
	Right Tilt	0.135	0.161	0.296		Right Tilt	0.221	0.161	0.382
Simult TX	Configuration	LTE Band 2 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 7 SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.930	0.079	1.009	Head SAR	Left Touch	0.133	0.079	0.212
	Right Touch	0.377	0.249	0.626		Right Touch	0.060	0.249	0.309
	Left Tilt	0.182	0.046	0.228		Left Tilt	0.031	0.046	0.077
	Right Tilt	0.167	0.161	0.328		Right Tilt	0.044	0.161	0.205

Table 13.4.5 Simultaneous Transmission Scenario for WCDMA with Bluetooth (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	WCDMA 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.408	0.374	0.782	Head SAR	Left Touch	1.002	0.374	1.376
	Right Touch	0.435	0.374	0.809		Right Touch	0.451	0.374	0.825
	Left Tilt	0.340	0.374	0.714		Left Tilt	0.196	0.374	0.570
	Right Tilt	0.286	0.374	0.660		Right Tilt	0.188	0.374	0.562

Table 13.4.6 Simultaneous Transmission Scenario for LTE with Bluetooth (Held to Ear)

Simult TX	Configuration	LTE Band 17 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 5 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.223	0.374	0.597	Head SAR	Left Touch	0.291	0.374	0.665
	Right Touch	0.220	0.374	0.594		Right Touch	0.318	0.374	0.692
	Left Tilt	0.146	0.374	0.520		Left Tilt	0.228	0.374	0.602
	Right Tilt	0.135	0.374	0.509		Right Tilt	0.221	0.374	0.595
Simult TX	Configuration	LTE Band 2 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 7 SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.930	0.374	1.304	Head SAR	Left Touch	0.133	0.374	0.507
	Right Touch	0.377	0.374	0.751		Right Touch	0.060	0.374	0.434
	Left Tilt	0.182	0.374	0.556		Left Tilt	0.031	0.374	0.405
	Right Tilt	0.167	0.374	0.541		Right Tilt	0.044	0.374	0.418

Table 13.4.7 Simultaneous Transmission Scenario for WCDMA with Bluetooth and 5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	WCDMA 850 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	WCDMA 1900 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.408	0.374	0.079	0.861	Head SAR	Left Touch	1.002	0.374	0.079	1.455
	Right Touch	0.435	0.374	0.249	1.058		Right Touch	0.451	0.374	0.249	1.074
	Left Tilt	0.340	0.374	0.046	0.760		Left Tilt	0.196	0.374	0.046	0.616
	Right Tilt	0.286	0.374	0.161	0.821		Right Tilt	0.188	0.374	0.161	0.723

Table 13.4.8 Simultaneous Transmission Scenario for LTE with Bluetooth and 5 GHz W-LAN (Held to Ear)

Simult TX	Configuration	LTE Band 17 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 5 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.223	0.374	0.079	0.676	Head SAR	Left Touch	0.291	0.374	0.079	0.744
	Right Touch	0.220	0.374	0.249	0.843		Right Touch	0.318	0.374	0.249	0.941
	Left Tilt	0.146	0.374	0.046	0.566		Left Tilt	0.228	0.374	0.046	0.648
	Right Tilt	0.135	0.374	0.161	0.670		Right Tilt	0.221	0.374	0.161	0.756
Simult TX	Configuration	LTE Band 2 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)	Simult TX	Configuration	LTE Band 7 SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Head SAR	Left Touch	0.930	0.374	0.079	1.383	Head SAR	Left Touch	0.133	0.374	0.079	0.586
	Right Touch	0.377	0.374	0.249	1.000		Right Touch	0.060	0.374	0.249	0.683
	Left Tilt	0.182	0.374	0.046	0.602		Left Tilt	0.031	0.374	0.046	0.451
	Right Tilt	0.167	0.374	0.161	0.702		Right Tilt	0.044	0.374	0.161	0.579

13.5 Body-Worn Simultaneous Transmission Analysis

Table 13.5.1 Simultaneous Transmission Scenario with 2.4 GHz W-LAN (Body-Worn at 15 mm)

Configuration	Mode	2G/3G SAR (W/kg)	2.4G W-LAN (802.11b) SAR (W/kg)	Σ SAR (W/kg)
Front Side	WCDMA 850	0.625	0.076	0.701
Rear Side	WCDMA 850	0.766	0.118	0.884
Front Side	WCDMA 1900	0.343	0.076	0.419
Rear Side	WCDMA 1900	1.253	0.118	1.371
Front Side	LTE Band 17	0.197	0.076	0.273
Rear Side	LTE Band 17	0.361	0.118	0.479
Front Side	LTE Band 5	0.364	0.076	0.440
Rear Side	LTE Band 5	0.419	0.118	0.537
Front Side	LTE Band 2	0.303	0.076	0.379
Rear Side	LTE Band 2	0.954	0.118	1.072
Front Side	LTE Band 7	0.069	0.076	0.145
Rear Side	LTE Band 7	0.487	0.118	0.605

Table 13.5.2 Simultaneous Transmission Scenario with 5 GHz W-LAN (Body-Worn at 15 mm)

Configuration	Mode	2G/3G SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Front Side	WCDMA 850	0.625	0.088	0.713
Rear Side	WCDMA 850	0.766	0.217	0.983
Front Side	WCDMA 1900	0.343	0.088	0.431
Rear Side	WCDMA 1900	1.253	0.217	1.470
Front Side	LTE Band 17	0.197	0.088	0.285
Rear Side	LTE Band 17	0.361	0.217	0.578
Front Side	LTE Band 5	0.364	0.088	0.452
Rear Side	LTE Band 5	0.419	0.217	0.636
Front Side	LTE Band 2	0.303	0.088	0.391
Rear Side	LTE Band 2	0.954	0.217	1.171
Front Side	LTE Band 7	0.069	0.088	0.157
Rear Side	LTE Band 7	0.487	0.217	0.704

Table 13.5.3 Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 15 mm)

Configuration	Mode	2G/3G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
Front Side	WCDMA 850	0.625	0.125	0.750
Rear Side	WCDMA 850	0.766	0.125	0.891
Front Side	WCDMA 1900	0.343	0.125	0.468
Rear Side	WCDMA 1900	1.253	0.125	1.378
Front Side	LTE Band 17	0.197	0.125	0.322
Rear Side	LTE Band 17	0.361	0.125	0.486
Front Side	LTE Band 5	0.364	0.125	0.489
Rear Side	LTE Band 5	0.419	0.125	0.544
Front Side	LTE Band 2	0.303	0.125	0.428
Rear Side	LTE Band 2	0.954	0.125	1.079
Front Side	LTE Band 7	0.069	0.125	0.194
Rear Side	LTE Band 7	0.487	0.125	0.612

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

Table 13.5.4 Simultaneous Transmission Scenario with Bluetooth and 5 GHz W-LAN (Body-Worn at 15 mm)

Configuration	Mode	2G/3G SAR (W/kg)	Bluetooth SAR (W/kg)	5G W-LAN (802.11a) SAR (W/kg)	Σ SAR (W/kg)
Front Side	WCDMA 850	0.625	0.125	0.088	0.838
Rear Side	WCDMA 850	0.766	0.125	0.217	1.108
Front Side	WCDMA 1900	0.343	0.125	0.088	0.556
Rear Side	WCDMA 1900	1.253	0.125	0.217	1.595
Front Side	LTE Band 17	0.197	0.125	0.088	0.410
Rear Side	LTE Band 17	0.361	0.125	0.217	0.703
Front Side	LTE Band 5	0.364	0.125	0.088	0.577
Rear Side	LTE Band 5	0.419	0.125	0.217	0.761
Front Side	LTE Band 2	0.303	0.125	0.088	0.516
Rear Side	LTE Band 2	0.954	0.125	0.217	1.296
Front Side	LTE Band 7	0.069	0.125	0.088	0.282
Rear Side	LTE Band 7	0.487	0.125	0.217	0.829

Note: Bluetooth SAR was not required to be measured per FCC KDB 447498 D01v06. Estimated SAR results were used in the above table to determine simultaneous transmission SAR test exclusion.

13.6 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

14. SAR MEASUREMENT VARIABILITY

14.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

Table 14.1 Head SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1907.6	9538	WCDMA 1900	RMC	-	Left Touch	1.000	0.837	1.01	-	-	-	-
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

Table 14.2 Body-Worn SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1907.6	9538	WCDMA 1900	RMC	-	15 mm [Rear]	1.250	1.240	1.01	-	-	-	-
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	± 4.2 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.6	± 4.1 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	± 1.2 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.64	± 4.3 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	± 3.8 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	± 3.7 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.6	± 4.3 %	∞
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	± 3.9 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	± 1.0 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	± 3.8 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	± 4.2 %	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	± 1.0 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Head (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.6	± 4.3 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	± 1.0 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Body (SN: 3866)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.0	Normal	1	1	± 6.0 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.64	± 3.7 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	± 3.9 %	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	± 1.2 %	∞
Combined Standard Uncertainty						± 12 %
Expanded Uncertainty (k=2)						330
						± 24 %

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	± 3.9 %	∞
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	± 1.2 %	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	± 1.1 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						330
						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.64	± 3.8 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.6	± 3.9 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	± 1.2 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.64	± 4.2 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.6	± 3.7 %	∞
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	± 1.2 %	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	± 1.0 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	± 3.9 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.6	± 4.2 %	∞
Temp. unc. - Conductivity	± 2.1	Rectangular	$\sqrt{3}$	0.78	± 1.2 %	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	± 1.2 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						330
						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.64	± 4.1 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	± 1.0 %	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	± 1.0 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3916)

Error Description	Uncertainty value ±%	Probability Distribution	Divisor	(Ci) 1g	Standard (1g)	vi 2 or Veff
Measurement System						
Probe calibration	± 6.55	Normal	1	1	± 6.6 %	∞
Axial isotropy	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Hemispherical isotropy	± 9.6	Rectangular	$\sqrt{3}$	1	± 5.5 %	∞
Boundary Effects	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Probe Linearity	± 4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %	∞
Probe modulation response	± 2.4	Rectangular	$\sqrt{3}$	1	± 1.4 %	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	± 0.14 %	∞
Readout Electronics	± 1.0	Normal	1	1	± 1.0 %	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	± 0.46 %	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Probe Positioner	± 0.4	Rectangular	$\sqrt{3}$	1	± 0.23 %	∞
Probe Positioning	± 2.9	Rectangular	$\sqrt{3}$	1	± 1.7 %	∞
Algorithms for Max. SAR Eval.	± 1.0	Rectangular	$\sqrt{3}$	1	± 0.58 %	∞
Test Sample Related						
Device Positioning	± 2.9	Normal	1	1	± 2.9 %	145
Device Holder	± 3.6	Normal	1	1	± 3.6 %	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %	∞
SAR Scaling	± 2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %	∞
Physical Parameters						
Phantom Shell	± 4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	± 2.9 %	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.64	± 3.9 %	∞
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.6	± 2.9 %	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.6	± 4.0 %	∞
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	± 1.1 %	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	± 1.2 %	∞
Combined Standard Uncertainty						± 13 %
Expanded Uncertainty (k=2)						± 25 %

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hoschschule Zürich, Dosimetric Evaluation of the Cellular Phone.

[20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.

[21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.

[22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009

[23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07

[24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02

[25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04

[26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04

[27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02

[28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02

[29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009

[30] Anexo à Resolução No. 533, de 10 de September de 2009.

[31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

Attachment 1. – Probe Calibration Data

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**Client **DT&C (Dymstec)**Certificate No: **EX3-3866_May17**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3866**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes

Calibration date: **May 31, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature
Approved by:	Katja Pokovic	Function Technical Manager	

Issued: May 31, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- $NORM_{x,y,z}$: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). $NORM_{x,y,z}$ are only intermediate values, i.e., the uncertainties of $NORM_{x,y,z}$ does not affect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency_response$ (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- $DCP_{x,y,z}$: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR*: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- $A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}$: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to $NORM_{x,y,z} * ConvF$ whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle*: The angle is assessed using the information gained by determining the *NORMx* (no uncertainty required).

EX3DV4 – SN:3866

May 31, 2017

Probe EX3DV4

SN:3866

Manufactured: February 2, 2012
Calibrated: May 31, 2017

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3866

May 31, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866**Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.41	0.32	0.36	$\pm 10.1\%$
DCP (mV) ^B	98.7	104.7	105.6	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	128.8	$\pm 3.8\%$
		Y	0.0	0.0	1.0		129.9	
		Z	0.0	0.0	1.0		116.6	

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V $^{-1}$	T1 ms.V $^{-2}$	T2 ms.V $^{-1}$	T3 ms	T4 V $^{-2}$	T5 V $^{-1}$	T6
X	80.45	604.4	36.15	27.57	2.71	5.008	0.000	0.922	1.011
Y	55.76	412.0	35.04	17.20	1.60	4.942	0.529	0.571	1.004
Z	46.51	343.2	34.91	16.57	1.418	4.95	1.280	0.347	1.004

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E 2 -field uncertainty inside TSL (see Pages 5 and 6).^B Numerical linearization parameter: uncertainty not required.^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3866

May 31, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.18	10.18	10.18	0.51	0.81	± 12.0 %
835	41.5	0.90	9.60	9.60	9.60	0.50	0.80	± 12.0 %
900	41.5	0.97	9.45	9.45	9.45	0.48	0.80	± 12.0 %
1750	40.1	1.37	8.32	8.32	8.32	0.38	0.85	± 12.0 %
1900	40.0	1.40	7.93	7.93	7.93	0.42	0.80	± 12.0 %
2300	39.5	1.67	7.84	7.84	7.84	0.36	0.80	± 12.0 %
2450	39.2	1.80	7.48	7.48	7.48	0.33	0.92	± 12.0 %
2600	39.0	1.96	7.28	7.28	7.28	0.45	0.80	± 12.0 %
3500	37.9	2.91	6.99	6.99	6.99	0.20	1.25	± 13.1 %
5200	36.0	4.66	5.34	5.34	5.34	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.25	5.25	5.25	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.77	4.77	4.77	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.68	4.68	4.68	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.90	4.90	4.90	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3866

May 31, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866**Calibration Parameter Determined in Body Tissue Simulating Media**

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	9.67	9.67	9.67	0.45	0.80	± 12.0 %
835	55.2	0.97	9.44	9.44	9.44	0.46	0.82	± 12.0 %
900	55.0	1.05	9.68	9.68	9.68	0.34	0.98	± 12.0 %
1750	53.4	1.49	8.16	8.16	8.16	0.31	0.88	± 12.0 %
1900	53.3	1.52	7.83	7.83	7.83	0.41	0.80	± 12.0 %
2300	52.9	1.81	7.65	7.65	7.65	0.36	0.90	± 12.0 %
2450	52.7	1.95	7.56	7.56	7.56	0.39	0.85	± 12.0 %
2600	52.5	2.16	7.21	7.21	7.21	0.29	0.92	± 12.0 %
3500	51.3	3.31	6.60	6.60	6.60	0.20	1.30	± 13.1 %
5200	49.0	5.30	4.98	4.98	4.98	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.78	4.78	4.78	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.21	4.21	4.21	0.45	1.90	± 13.1 %
5600	48.5	5.77	4.03	4.03	4.03	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.24	4.24	4.24	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3866

May 31, 2017




Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

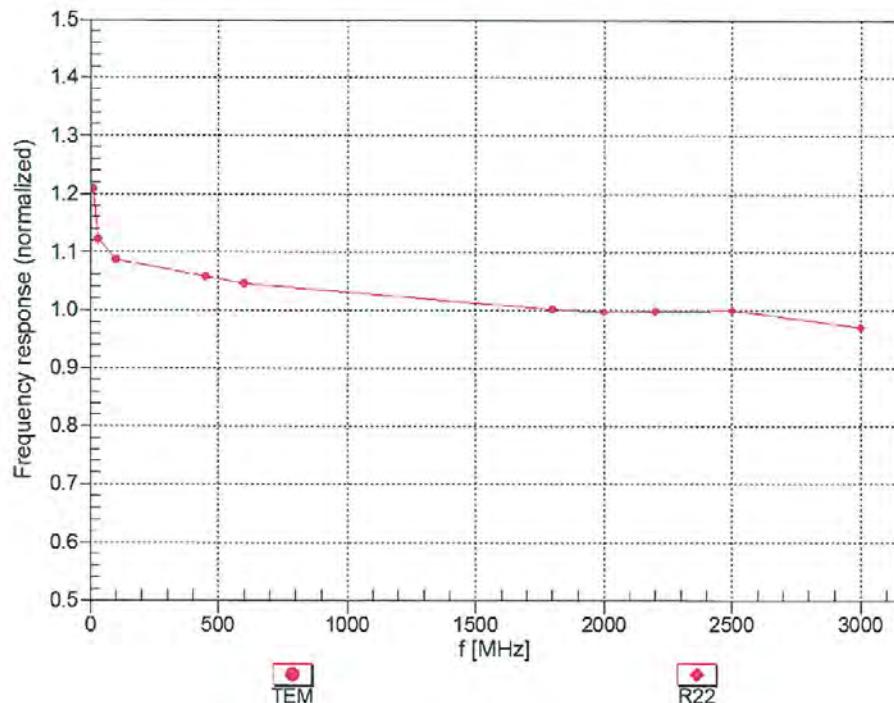Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)



EX3DV4- SN:3866

May 31, 2017

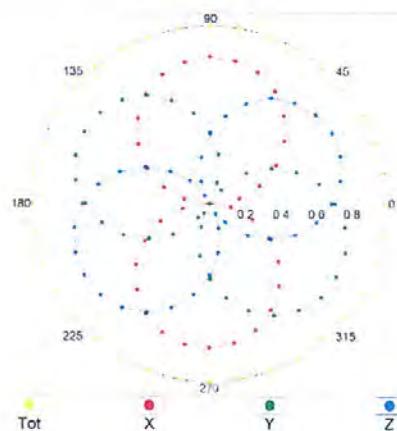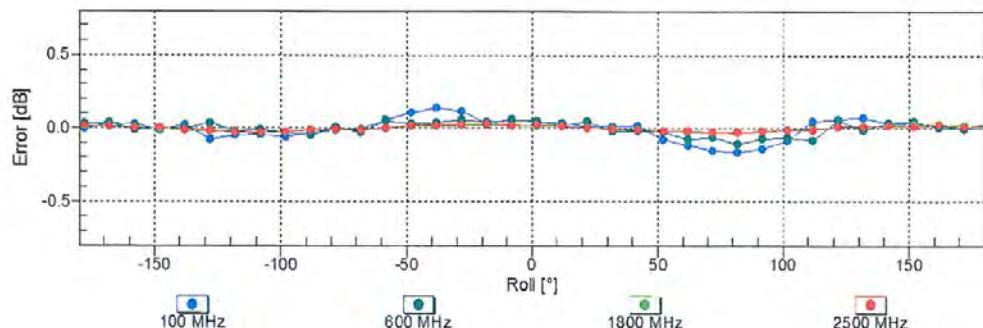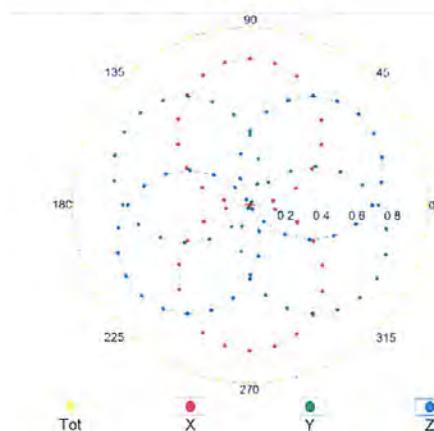Receiving Pattern (ϕ), $\theta = 0^\circ$ $f=600 \text{ MHz, TEM}$  $f=1800 \text{ MHz, R22}$ **Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)**

EX3DV4- SN:3866


May 31, 2017

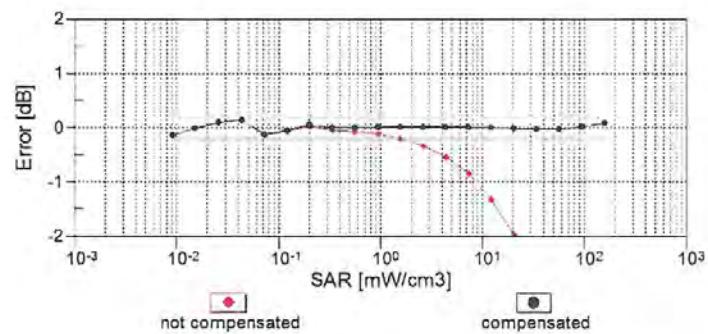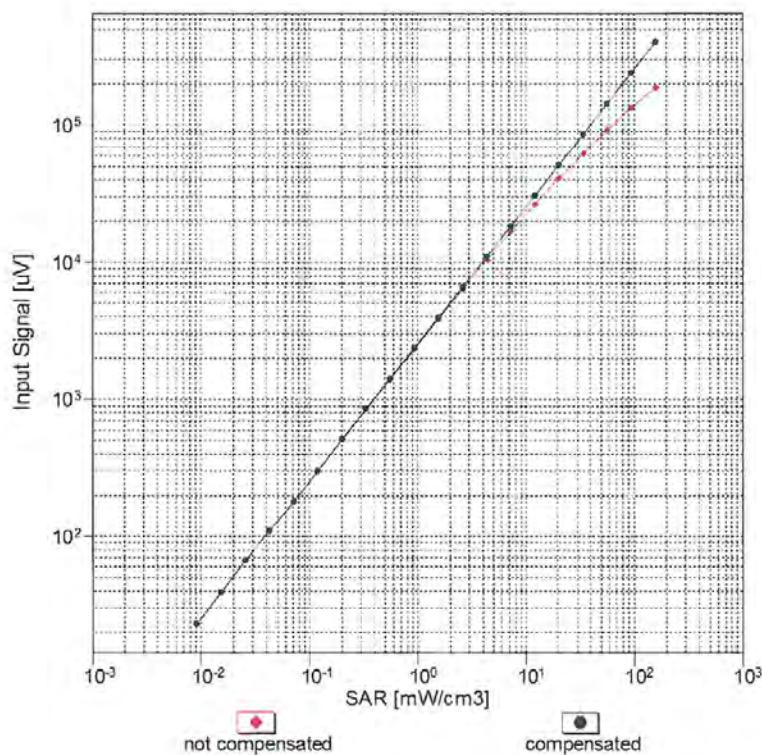Dynamic Range f(SAR_{head})
(TEM cell , f_{eval}= 1900 MHz)**Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)**


EX3DV4- SN:3866

May 31, 2017

Conversion Factor Assessment

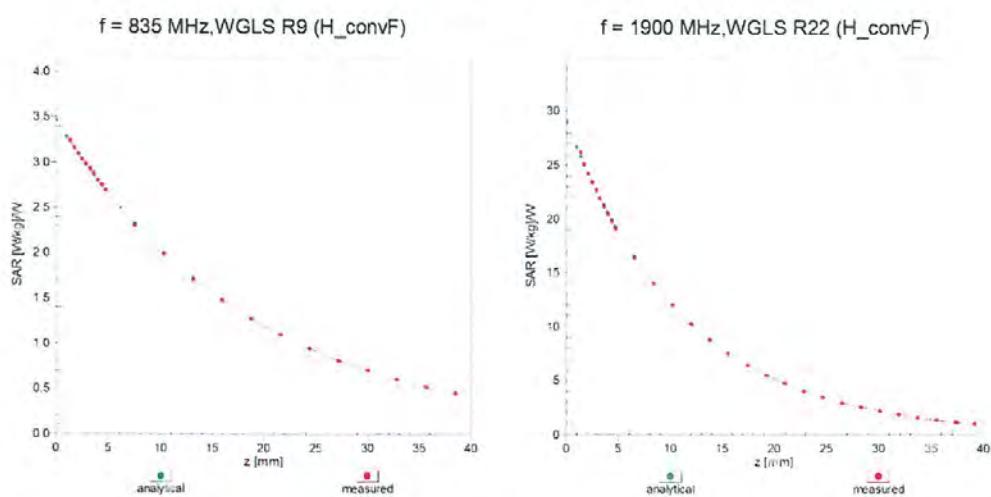

Deviation from Isotropy in Liquid Error (ϕ, θ), $f = 900 \text{ MHz}$

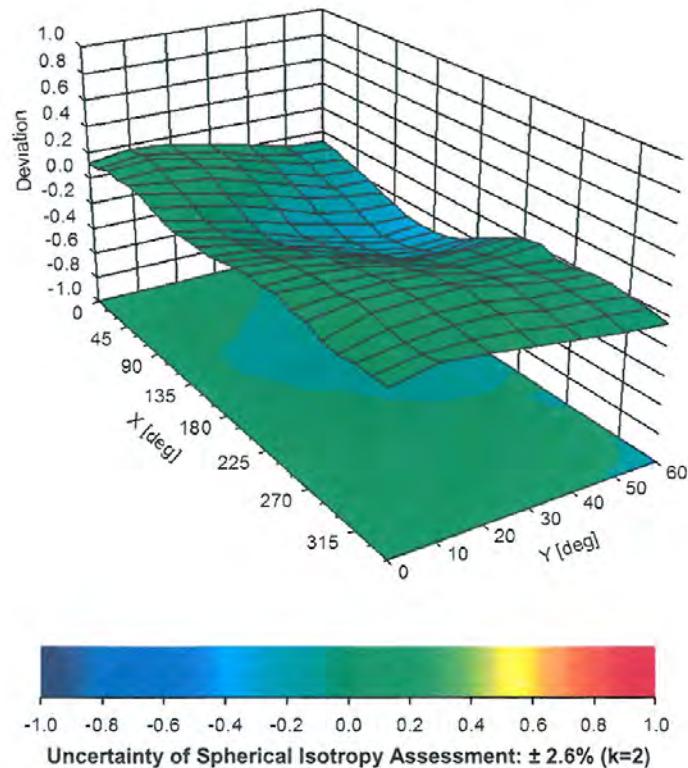

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

EX3DV4- SN:3866

May 31, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3866**Other Probe Parameters**

Sensor Arrangement	Triangular
Connector Angle (°)	61.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

EX3DV4- SN:3866

May 31, 2017

Appendix: Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB/ μ V	C	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	128.8	$\pm 3.8\%$
		Y	0.00	0.00	1.00		129.9	
		Z	0.00	0.00	1.00		116.6	
10010-CAA	SAR Validation (Square, 100ms, 10ms)	X	5.95	74.05	16.36	10.00	20.0	$\pm 9.6\%$
		Y	3.07	66.56	11.43		20.0	
		Z	2.99	66.54	11.31		20.0	
10011-CAB	UMTS-FDD (WCDMA)	X	1.28	70.56	17.37	0.00	150.0	$\pm 9.6\%$
		Y	1.08	68.10	15.82		150.0	
		Z	1.04	67.68	15.48		150.0	
10012-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.32	65.32	16.30	0.41	150.0	$\pm 9.6\%$
		Y	1.20	64.03	15.24		150.0	
		Z	1.19	63.96	15.11		150.0	
10013-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	5.19	66.67	17.18	1.46	150.0	$\pm 9.6\%$
		Y	4.90	66.40	16.75		150.0	
		Z	4.82	66.51	16.77		150.0	
10021-DAC	GSM-FDD (TDMA, GMSK)	X	12.15	85.52	22.11	9.39	50.0	$\pm 9.6\%$
		Y	6.07	75.16	16.30		50.0	
		Z	6.56	76.45	16.67		50.0	
10023-DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	11.50	84.56	21.84	9.57	50.0	$\pm 9.6\%$
		Y	5.84	74.50	16.08		50.0	
		Z	6.17	75.47	16.33		50.0	
10024-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	26.23	96.72	23.98	6.56	60.0	$\pm 9.6\%$
		Y	5.12	74.76	14.90		60.0	
		Z	5.82	76.45	15.41		60.0	
10025-DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	10.67	88.40	32.75	12.57	50.0	$\pm 9.6\%$
		Y	4.12	65.62	21.59		50.0	
		Z	6.56	79.23	28.97		50.0	
10026-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	14.94	95.03	32.08	9.56	60.0	$\pm 9.6\%$
		Y	9.51	87.13	28.83		60.0	
		Z	10.55	91.01	30.74		60.0	
10027-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	113.33	27.03	4.80	80.0	$\pm 9.6\%$
		Y	5.60	77.09	14.96		80.0	
		Z	7.37	80.07	15.84		80.0	
10028-DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	113.17	26.19	3.55	100.0	$\pm 9.6\%$
		Y	9.35	83.25	16.28		100.0	
		Z	18.35	89.71	17.97		100.0	
10029-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	10.87	88.71	28.82	7.80	80.0	$\pm 9.6\%$
		Y	6.75	80.75	25.47		80.0	
		Z	6.88	82.26	26.43		80.0	
10030-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	43.82	102.79	24.81	5.30	70.0	$\pm 9.6\%$
		Y	4.19	73.20	13.74		70.0	
		Z	4.51	74.19	14.00		70.0	
10031-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	114.49	25.34	1.88	100.0	$\pm 9.6\%$
		Y	12.27	86.90	16.08		100.0	
		Z	14.50	88.27	16.33		100.0	

EX3DV4- SN:3866

May 31, 2017

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	100.00	120.23	26.73	1.17	100.0	± 9.6 %
		Y	100.00	107.05	20.40		100.0	
		Z	100.00	107.01	20.33		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	10.94	88.62	24.03	5.30	70.0	± 9.6 %
		Y	4.82	76.42	18.22		70.0	
		Z	4.75	76.24	17.84		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	5.09	82.37	21.18	1.88	100.0	± 9.6 %
		Y	2.44	72.17	15.93		100.0	
		Z	2.33	71.44	15.08		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	3.40	78.37	19.72	1.17	100.0	± 9.6 %
		Y	1.93	70.75	15.37		100.0	
		Z	1.84	70.11	14.50		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	12.65	91.14	24.92	5.30	70.0	± 9.6 %
		Y	5.32	77.99	18.87		70.0	
		Z	5.25	77.78	18.47		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	4.98	82.11	21.03	1.88	100.0	± 9.6 %
		Y	2.35	71.76	15.72		100.0	
		Z	2.23	70.95	14.85		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	3.51	79.08	20.06	1.17	100.0	± 9.6 %
		Y	1.95	71.10	15.61		100.0	
		Z	1.86	70.41	14.73		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	2.56	75.42	18.82	0.00	150.0	± 9.6 %
		Y	2.30	75.01	17.60		150.0	
		Z	1.99	73.47	16.29		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	16.20	89.31	21.91	7.78	50.0	± 9.6 %
		Y	4.76	72.97	14.33		50.0	
		Z	5.04	73.85	14.55		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.00	102.20	0.07	0.00	150.0	± 9.6 %
		Y	0.00	102.73	3.92		150.0	
		Z	0.00	99.33	2.98		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	8.75	77.87	21.22	13.80	25.0	± 9.6 %
		Y	5.51	70.74	16.23		25.0	
		Z	5.63	71.35	16.31		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	9.70	81.24	21.09	10.79	40.0	± 9.6 %
		Y	5.71	73.25	15.92		40.0	
		Z	5.84	73.83	16.00		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	10.12	82.67	22.58	9.03	50.0	± 9.6 %
		Y	6.84	76.82	18.79		50.0	
		Z	7.14	77.75	18.94		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	8.43	84.30	26.55	6.55	100.0	± 9.6 %
		Y	5.31	76.88	23.34		100.0	
		Z	5.24	77.48	23.87		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.47	67.27	17.17	0.61	110.0	± 9.6 %
		Y	1.25	65.09	15.65		110.0	
		Z	1.24	65.01	15.54		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100.00	130.10	33.13	1.30	110.0	± 9.6 %
		Y	4.36	86.40	21.16		110.0	
		Z	4.61	87.44	21.51		110.0	

EX3DV4- SN:3866

May 31, 2017

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	6.73	88.90	24.38	2.04	110.0	± 9.6 %
		Y	2.67	75.57	19.02		110.0	
		Z	2.69	76.06	19.25		110.0	
10062-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.98	66.68	16.67	0.49	100.0	± 9.6 %
		Y	4.73	66.55	16.37		100.0	
		Z	4.63	66.59	16.34		100.0	
10063-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	5.01	66.81	16.78	0.72	100.0	± 9.6 %
		Y	4.74	66.60	16.43		100.0	
		Z	4.65	66.64	16.40		100.0	
10064-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	5.39	67.18	17.03	0.86	100.0	± 9.6 %
		Y	5.05	66.88	16.64		100.0	
		Z	4.92	66.88	16.60		100.0	
10065-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	5.25	67.10	17.11	1.21	100.0	± 9.6 %
		Y	4.91	66.74	16.67		100.0	
		Z	4.79	66.75	16.65		100.0	
10066-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	5.29	67.18	17.29	1.46	100.0	± 9.6 %
		Y	4.92	66.72	16.78		100.0	
		Z	4.81	66.75	16.77		100.0	
10067-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	5.60	67.22	17.68	2.04	100.0	± 9.6 %
		Y	5.20	66.76	17.12		100.0	
		Z	5.09	66.89	17.16		100.0	
10068-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.73	67.57	17.99	2.55	100.0	± 9.6 %
		Y	5.27	66.90	17.33		100.0	
		Z	5.15	66.94	17.34		100.0	
10069-CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.78	67.36	18.10	2.67	100.0	± 9.6 %
		Y	5.35	66.82	17.48		100.0	
		Z	5.23	66.94	17.52		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	5.31	66.82	17.48	1.99	100.0	± 9.6 %
		Y	4.99	66.45	16.98		100.0	
		Z	4.92	66.57	17.02		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	5.36	67.31	17.73	2.30	100.0	± 9.6 %
		Y	4.99	66.78	17.15		100.0	
		Z	4.90	66.87	17.19		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	5.46	67.54	18.06	2.83	100.0	± 9.6 %
		Y	5.05	66.89	17.40		100.0	
		Z	4.97	67.03	17.47		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	5.46	67.56	18.30	3.30	100.0	± 9.6 %
		Y	5.03	66.79	17.52		100.0	
		Z	4.97	66.96	17.60		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	5.61	68.07	18.77	3.82	90.0	± 9.6 %
		Y	5.10	67.00	17.83		90.0	
		Z	5.03	67.12	17.89		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	5.58	67.75	18.81	4.15	90.0	± 9.6 %
		Y	5.10	66.74	17.89		90.0	
		Z	5.05	66.96	18.02		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	5.60	67.82	18.90	4.30	90.0	± 9.6 %
		Y	5.12	66.79	17.97		90.0	
		Z	5.08	67.04	18.11		90.0	

EX3DV4- SN:3866

May 31, 2017

10081-CAB	CDMA2000 (1xRTT, RC3)	X	1.27	70.24	16.36	0.00	150.0	± 9.6 %
		Y	0.98	67.71	14.08		150.0	
		Z	0.86	66.59	12.87		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	1.73	62.11	7.60	4.77	80.0	± 9.6 %
		Y	0.89	58.75	4.35		80.0	
		Z	0.86	58.91	4.38		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	25.29	96.24	23.88	6.56	60.0	± 9.6 %
		Y	5.08	74.63	14.87		60.0	
		Z	5.76	76.30	15.37		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	2.01	68.55	16.75	0.00	150.0	± 9.6 %
		Y	1.89	68.09	16.11		150.0	
		Z	1.85	68.04	15.86		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.97	68.53	16.72	0.00	150.0	± 9.6 %
		Y	1.85	68.03	16.07		150.0	
		Z	1.81	67.98	15.83		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	14.91	94.93	32.04	9.56	60.0	± 9.6 %
		Y	9.53	87.13	28.81		60.0	
		Z	10.57	91.01	30.73		60.0	
10100-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.70	72.32	17.65	0.00	150.0	± 9.6 %
		Y	3.30	71.07	17.03		150.0	
		Z	3.15	70.59	16.83		150.0	
10101-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.59	68.49	16.54	0.00	150.0	± 9.6 %
		Y	3.34	67.87	16.11		150.0	
		Z	3.24	67.63	15.98		150.0	
10102-CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.68	68.35	16.59	0.00	150.0	± 9.6 %
		Y	3.45	67.84	16.22		150.0	
		Z	3.34	67.61	16.07		150.0	
10103-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	7.82	75.74	19.97	3.98	65.0	± 9.6 %
		Y	6.01	72.79	18.45		65.0	
		Z	6.25	74.01	19.06		65.0	
10104-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	8.19	75.35	20.72	3.98	65.0	± 9.6 %
		Y	6.66	73.01	19.41		65.0	
		Z	6.53	73.21	19.57		65.0	
10105-CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	7.58	73.89	20.39	3.98	65.0	± 9.6 %
		Y	6.04	71.14	18.90		65.0	
		Z	6.27	72.37	19.53		65.0	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	3.27	71.37	17.44	0.00	150.0	± 9.6 %
		Y	2.89	70.23	16.85		150.0	
		Z	2.74	69.80	16.65		150.0	
10109-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	3.27	68.30	16.53	0.00	150.0	± 9.6 %
		Y	3.01	67.74	16.08		150.0	
		Z	2.90	67.51	15.90		150.0	
10110-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.70	70.25	17.14	0.00	150.0	± 9.6 %
		Y	2.36	69.21	16.48		150.0	
		Z	2.22	68.90	16.25		150.0	
10111-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.98	68.82	16.94	0.00	150.0	± 9.6 %
		Y	2.76	68.70	16.56		150.0	
		Z	2.63	68.51	16.27		150.0	

EX3DV4- SN:3866

May 31, 2017

10112-CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.38	68.12	16.52	0.00	150.0	± 9.6 %
		Y	3.13	67.71	16.13		150.0	
		Z	3.02	67.52	15.96		150.0	
10113-CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	3.13	68.77	16.98	0.00	150.0	± 9.6 %
		Y	2.91	68.81	16.68		150.0	
		Z	2.79	68.66	16.40		150.0	
10114-CAB	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.38	67.36	16.61	0.00	150.0	± 9.6 %
		Y	5.19	67.25	16.45		150.0	
		Z	5.11	67.25	16.43		150.0	
10115-CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.86	67.90	16.87	0.00	150.0	± 9.6 %
		Y	5.54	67.52	16.58		150.0	
		Z	5.39	67.35	16.49		150.0	
10116-CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.53	67.63	16.85	0.00	150.0	± 9.6 %
		Y	5.31	67.49	16.49		150.0	
		Z	5.20	67.43	16.45		150.0	
10117-CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	5.38	67.35	16.62	0.00	150.0	± 9.6 %
		Y	5.18	67.22	16.45		150.0	
		Z	5.07	67.11	16.38		150.0	
10118-CAB	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.83	67.70	16.77	0.00	150.0	± 9.6 %
		Y	5.61	67.67	16.66		150.0	
		Z	5.46	67.54	16.59		150.0	
10119-CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.48	67.51	16.82	0.00	150.0	± 9.6 %
		Y	5.28	67.43	16.47		150.0	
		Z	5.18	67.38	16.43		150.0	
10140-CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.74	68.35	16.51	0.00	150.0	± 9.6 %
		Y	3.49	67.83	16.13		150.0	
		Z	3.38	67.61	15.99		150.0	
10141-CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.85	68.30	16.62	0.00	150.0	± 9.6 %
		Y	3.61	67.92	16.30		150.0	
		Z	3.50	67.72	16.16		150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	2.47	70.19	17.11	0.00	150.0	± 9.6 %
		Y	2.15	69.32	16.33		150.0	
		Z	2.01	68.99	15.96		150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.89	69.59	17.08	0.00	150.0	± 9.6 %
		Y	2.67	69.73	16.56		150.0	
		Z	2.52	69.44	16.05		150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.70	67.64	15.72	0.00	150.0	± 9.6 %
		Y	2.40	67.16	14.83		150.0	
		Z	2.24	66.84	14.28		150.0	
10145-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.97	70.10	16.38	0.00	150.0	± 9.6 %
		Y	1.52	67.65	13.88		150.0	
		Z	1.24	65.51	11.97		150.0	
10146-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	4.51	76.77	18.96	0.00	150.0	± 9.6 %
		Y	2.44	68.50	13.41		150.0	
		Z	1.88	65.68	11.07		150.0	
10147-CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	5.75	80.68	20.67	0.00	150.0	± 9.6 %
		Y	3.03	71.42	14.87		150.0	
		Z	2.20	67.48	12.06		150.0	

EX3DV4- SN:3866

May 31, 2017

10149-CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	3.28	68.36	16.57	0.00	150.0	± 9.6 %
		Y	3.02	67.81	16.13		150.0	
		Z	2.90	67.58	15.95		150.0	
10150-CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	3.39	68.17	16.56	0.00	150.0	± 9.6 %
		Y	3.14	67.77	16.18		150.0	
		Z	3.03	67.57	16.00		150.0	
10151-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	8.20	77.58	20.81	3.98	65.0	± 9.6 %
		Y	6.49	75.24	19.50		65.0	
		Z	6.49	75.92	19.85		65.0	
10152-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	7.78	75.36	20.58	3.98	65.0	± 9.6 %
		Y	6.15	72.70	19.01		65.0	
		Z	6.01	72.92	19.11		65.0	
10153-CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	8.10	76.01	21.20	3.98	65.0	± 9.6 %
		Y	6.53	73.66	19.80		65.0	
		Z	6.41	73.92	19.91		65.0	
10154-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.79	70.93	17.54	0.00	150.0	± 9.6 %
		Y	2.43	69.84	16.85		150.0	
		Z	2.28	69.36	16.54		150.0	
10155-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.97	68.79	16.93	0.00	150.0	± 9.6 %
		Y	2.75	68.70	16.56		150.0	
		Z	2.64	68.53	16.29		150.0	
10156-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	2.38	70.70	17.32	0.00	150.0	± 9.6 %
		Y	2.03	69.70	16.35		150.0	
		Z	1.86	69.17	15.79		150.0	
10157-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	2.56	68.45	16.06	0.00	150.0	± 9.6 %
		Y	2.27	67.99	15.08		150.0	
		Z	2.10	67.52	14.38		150.0	
10158-CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	3.14	68.82	17.02	0.00	150.0	± 9.6 %
		Y	2.92	68.88	16.73		150.0	
		Z	2.79	68.73	16.45		150.0	
10159-CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	2.69	68.91	16.37	0.00	150.0	± 9.6 %
		Y	2.41	68.63	15.46		150.0	
		Z	2.22	68.05	14.69		150.0	
10160-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	3.11	69.55	16.94	0.00	150.0	± 9.6 %
		Y	2.84	68.95	16.51		150.0	
		Z	2.74	68.78	16.38		150.0	
10161-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.28	68.03	16.53	0.00	150.0	± 9.6 %
		Y	3.04	67.71	16.14		150.0	
		Z	2.93	67.53	15.94		150.0	
10162-CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	3.37	67.94	16.52	0.00	150.0	± 9.6 %
		Y	3.15	67.79	16.21		150.0	
		Z	3.04	67.69	16.05		150.0	
10166-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	4.28	70.28	19.69	3.01	150.0	± 9.6 %
		Y	3.74	69.45	18.87		150.0	
		Z	3.63	69.87	19.11		150.0	
10167-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	5.55	73.25	20.22	3.01	150.0	± 9.6 %
		Y	4.69	72.31	19.32		150.0	
		Z	4.63	73.35	19.75		150.0	

EX3DV4- SN:3866

May 31, 2017

10168-CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	6.00	74.91	21.24	3.01	150.0	± 9.6 %
		Y	5.28	74.84	20.79		150.0	
		Z	5.27	76.11	21.29		150.0	
10169-CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	4.34	73.27	20.82	3.01	150.0	± 9.6 %
		Y	3.28	69.91	19.02		150.0	
		Z	3.11	69.87	19.09		150.0	
10170-CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	6.52	79.56	22.99	3.01	150.0	± 9.6 %
		Y	4.86	76.70	21.63		150.0	
		Z	4.75	77.55	22.02		150.0	
10171-AAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	5.30	75.06	20.34	3.01	150.0	± 9.6 %
		Y	3.78	71.45	18.41		150.0	
		Z	3.67	72.20	18.78		150.0	
10172-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	14.20	92.21	27.61	6.02	65.0	± 9.6 %
		Y	6.31	80.40	22.75		65.0	
		Z	7.75	85.93	25.05		65.0	
10173-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	15.48	90.10	25.55	6.02	65.0	± 9.6 %
		Y	9.20	83.52	22.24		65.0	
		Z	10.68	87.60	23.70		65.0	
10174-CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	12.86	86.06	23.83	6.02	65.0	± 9.6 %
		Y	5.38	74.78	18.72		65.0	
		Z	8.28	82.76	21.60		65.0	
10175-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	4.26	72.82	20.52	3.01	150.0	± 9.6 %
		Y	3.23	69.49	18.71		150.0	
		Z	3.07	69.51	18.82		150.0	
10176-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	6.53	79.58	23.00	3.01	150.0	± 9.6 %
		Y	4.87	76.73	21.64		150.0	
		Z	4.75	77.58	22.03		150.0	
10177-CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	4.31	73.06	20.67	3.01	150.0	± 9.6 %
		Y	3.26	69.71	18.85		150.0	
		Z	3.10	69.68	18.92		150.0	
10178-CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	6.40	79.18	22.81	3.01	150.0	± 9.6 %
		Y	4.78	76.35	21.45		150.0	
		Z	4.69	77.29	21.89		150.0	
10179-CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	5.82	77.04	21.48	3.01	150.0	± 9.6 %
		Y	4.23	73.75	19.80		150.0	
		Z	4.14	74.64	20.22		150.0	
10180-CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	5.26	74.91	20.25	3.01	150.0	± 9.6 %
		Y	3.76	71.33	18.33		150.0	
		Z	3.66	72.12	18.72		150.0	
10181-CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	4.30	73.03	20.65	3.01	150.0	± 9.6 %
		Y	3.26	69.69	18.83		150.0	
		Z	3.09	69.66	18.91		150.0	
10182-CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	6.39	79.15	22.80	3.01	150.0	± 9.6 %
		Y	4.77	76.32	21.44		150.0	
		Z	4.68	77.26	21.88		150.0	
10183-AAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	5.26	74.89	20.24	3.01	150.0	± 9.6 %
		Y	3.75	71.31	18.32		150.0	
		Z	3.65	72.09	18.71		150.0	

EX3DV4- SN:3866

May 31, 2017

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	4.32	73.09	20.68	3.01	150.0	± 9.6 %
		Y	3.27	69.74	18.86		150.0	
		Z	3.10	69.71	18.94		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	6.42	79.23	22.83	3.01	150.0	± 9.6 %
		Y	4.80	76.41	21.48		150.0	
		Z	4.71	77.35	21.92		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	5.28	74.95	20.27	3.01	150.0	± 9.6 %
		Y	3.77	71.37	18.36		150.0	
		Z	3.67	72.16	18.75		150.0	
10187-CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	4.32	73.09	20.70	3.01	150.0	± 9.6 %
		Y	3.28	69.77	18.91		150.0	
		Z	3.11	69.77	19.00		150.0	
10188-CAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	6.69	80.08	23.26	3.01	150.0	± 9.6 %
		Y	5.03	77.38	21.99		150.0	
		Z	4.91	78.22	22.37		150.0	
10189-AAD	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	5.42	75.48	20.58	3.01	150.0	± 9.6 %
		Y	3.87	71.90	18.68		150.0	
		Z	3.77	72.68	19.06		150.0	
10193-CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.82	66.68	16.41	0.00	150.0	± 9.6 %
		Y	4.61	66.69	16.22		150.0	
		Z	4.51	66.70	16.15		150.0	
10194-CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	5.04	67.10	16.51	0.00	150.0	± 9.6 %
		Y	4.80	67.04	16.34		150.0	
		Z	4.68	67.00	16.27		150.0	
10195-CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	5.08	67.07	16.50	0.00	150.0	± 9.6 %
		Y	4.84	67.06	16.35		150.0	
		Z	4.72	67.03	16.29		150.0	
10196-CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.85	66.81	16.45	0.00	150.0	± 9.6 %
		Y	4.63	66.78	16.25		150.0	
		Z	4.51	66.75	16.16		150.0	
10197-CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	5.06	67.11	16.51	0.00	150.0	± 9.6 %
		Y	4.81	67.06	16.35		150.0	
		Z	4.69	67.02	16.28		150.0	
10198-CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	5.09	67.08	16.50	0.00	150.0	± 9.6 %
		Y	4.84	67.07	16.36		150.0	
		Z	4.72	67.05	16.30		150.0	
10219-CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.81	66.84	16.43	0.00	150.0	± 9.6 %
		Y	4.58	66.79	16.22		150.0	
		Z	4.46	66.77	16.13		150.0	
10220-CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	5.07	67.12	16.52	0.00	150.0	± 9.6 %
		Y	4.81	67.04	16.34		150.0	
		Z	4.68	66.99	16.27		150.0	
10221-CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	5.09	67.03	16.50	0.00	150.0	± 9.6 %
		Y	4.85	67.00	16.34		150.0	
		Z	4.73	66.97	16.28		150.0	
10222-CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	5.37	67.40	16.64	0.00	150.0	± 9.6 %
		Y	5.16	67.24	16.45		150.0	
		Z	5.05	67.12	16.38		150.0	

EX3DV4- SN:3866

May 31, 2017

10223-CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)	X	5.74	67.56	16.72	0.00	150.0	± 9.6 %
		Y	5.49	67.44	16.57		150.0	
		Z	5.34	67.30	16.48		150.0	
10224-CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)	X	5.45	67.58	16.65	0.00	150.0	± 9.6 %
		Y	5.21	67.34	16.43		150.0	
		Z	5.10	67.24	16.36		150.0	
10225-CAB	UMTS-FDD (HSPA+)	X	3.09	66.39	16.04	0.00	150.0	± 9.6 %
		Y	2.90	66.33	15.61		150.0	
		Z	2.80	66.28	15.36		150.0	
10226-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	16.00	90.76	25.85	6.02	65.0	± 9.6 %
		Y	9.66	84.39	22.63		65.0	
		Z	11.34	88.68	24.14		65.0	
10227-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	14.05	87.61	24.43	6.02	65.0	± 9.6 %
		Y	8.75	81.87	21.28		65.0	
		Z	10.02	85.56	22.56		65.0	
10228-CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	16.43	95.41	28.75	6.02	65.0	± 9.6 %
		Y	8.49	85.80	24.72		65.0	
		Z	9.08	88.93	26.11		65.0	
10229-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	15.52	90.13	25.57	6.02	65.0	± 9.6 %
		Y	9.26	83.61	22.28		65.0	
		Z	10.75	87.69	23.74		65.0	
10230-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	13.65	87.05	24.18	6.02	65.0	± 9.6 %
		Y	8.41	81.19	20.97		65.0	
		Z	9.53	84.70	22.20		65.0	
10231-CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	15.89	94.70	28.45	6.02	65.0	± 9.6 %
		Y	8.15	85.00	24.36		65.0	
		Z	8.68	88.03	25.73		65.0	
10232-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	15.51	90.13	25.57	6.02	65.0	± 9.6 %
		Y	9.24	83.59	22.27		65.0	
		Z	10.74	87.68	23.73		65.0	
10233-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	13.64	87.05	24.18	6.02	65.0	± 9.6 %
		Y	8.39	81.18	20.97		65.0	
		Z	9.51	84.69	22.19		65.0	
10234-CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	15.33	93.90	28.11	6.02	65.0	± 9.6 %
		Y	7.84	84.19	23.97		65.0	
		Z	8.32	87.14	25.32		65.0	
10235-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	15.52	90.15	25.58	6.02	65.0	± 9.6 %
		Y	9.24	83.60	22.28		65.0	
		Z	10.74	87.70	23.74		65.0	
10236-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	13.71	87.13	24.20	6.02	65.0	± 9.6 %
		Y	8.44	81.24	20.98		65.0	
		Z	9.58	84.78	22.22		65.0	
10237-CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	15.95	94.80	28.48	6.02	65.0	± 9.6 %
		Y	8.16	85.03	24.37		65.0	
		Z	8.69	88.09	25.75		65.0	
10238-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	15.50	90.13	25.57	6.02	65.0	± 9.6 %
		Y	9.23	83.56	22.26		65.0	
		Z	10.71	87.65	23.72		65.0	

EX3DV4- SN:3866

May 31, 2017

10239-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	13.64	87.06	24.18	6.02	65.0	± 9.6 %
		Y	8.38	81.16	20.96		65.0	
		Z	9.49	84.66	22.18		65.0	
10240-CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	15.91	94.76	28.47	6.02	65.0	± 9.6 %
		Y	8.13	84.99	24.36		65.0	
		Z	8.67	88.05	25.74		65.0	
10241-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	11.13	82.41	25.70	6.98	65.0	± 9.6 %
		Y	8.34	78.68	23.38		65.0	
		Z	8.64	80.88	24.34		65.0	
10242-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	9.91	79.85	24.58	6.98	65.0	± 9.6 %
		Y	7.20	75.75	22.09		65.0	
		Z	7.99	79.38	23.68		65.0	
10243-CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	8.27	77.94	24.58	6.98	65.0	± 9.6 %
		Y	5.98	73.27	21.82		65.0	
		Z	6.43	76.20	23.27		65.0	
10244-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	8.97	79.15	21.15	3.98	65.0	± 9.6 %
		Y	5.58	72.44	16.74		65.0	
		Z	5.08	71.38	15.69		65.0	
10245-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	8.92	78.82	20.99	3.98	65.0	± 9.6 %
		Y	5.56	72.17	16.58		65.0	
		Z	5.02	71.01	15.49		65.0	
10246-CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	7.93	79.91	21.09	3.98	65.0	± 9.6 %
		Y	4.97	73.86	17.47		65.0	
		Z	4.55	72.94	16.66		65.0	
10247-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	7.23	76.19	20.23	3.98	65.0	± 9.6 %
		Y	5.17	72.08	17.43		65.0	
		Z	4.86	71.50	16.77		65.0	
10248-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	7.29	75.82	20.08	3.98	65.0	± 9.6 %
		Y	5.24	71.81	17.31		65.0	
		Z	4.89	71.20	16.64		65.0	
10249-CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	8.41	80.65	21.74	3.98	65.0	± 9.6 %
		Y	5.79	76.14	19.09		65.0	
		Z	5.65	76.27	18.90		65.0	
10250-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	7.86	77.32	21.56	3.98	65.0	± 9.6 %
		Y	6.11	74.47	19.80		65.0	
		Z	5.97	74.64	19.74		65.0	
10251-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	7.54	75.43	20.55	3.98	65.0	± 9.6 %
		Y	5.90	72.73	18.76		65.0	
		Z	5.74	72.89	18.69		65.0	
10252-CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	8.41	79.71	21.76	3.98	65.0	± 9.6 %
		Y	6.35	76.72	20.07		65.0	
		Z	6.39	77.53	20.37		65.0	
10253-CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	7.57	74.80	20.44	3.98	65.0	± 9.6 %
		Y	6.02	72.23	18.84		65.0	
		Z	5.91	72.49	18.92		65.0	
10254-CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	7.91	75.46	21.02	3.98	65.0	± 9.6 %
		Y	6.39	73.13	19.56		65.0	
		Z	6.27	73.41	19.63		65.0	

EX3DV4- SN:3866

May 31, 2017

10255-CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	7.97	77.29	20.97	3.98	65.0	± 9.6 %
		Y	6.28	74.88	19.59		65.0	
		Z	6.29	75.56	19.91		65.0	
10256-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	8.49	78.25	20.21	3.98	65.0	± 9.6 %
		Y	4.62	69.68	14.65		65.0	
		Z	3.97	67.90	13.13		65.0	
10257-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	8.47	77.86	20.00	3.98	65.0	± 9.6 %
		Y	4.61	69.35	14.43		65.0	
		Z	3.94	67.51	12.87		65.0	
10258-CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	7.49	79.02	20.38	3.98	65.0	± 9.6 %
		Y	4.13	71.05	15.63		65.0	
		Z	3.55	69.20	14.22		65.0	
10259-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	7.45	76.46	20.64	3.98	65.0	± 9.6 %
		Y	5.53	72.93	18.27		65.0	
		Z	5.29	72.68	17.86		65.0	
10260-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	7.53	76.34	20.62	3.98	65.0	± 9.6 %
		Y	5.60	72.83	18.25		65.0	
		Z	5.33	72.52	17.80		65.0	
10261-CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	8.18	79.85	21.65	3.98	65.0	± 9.6 %
		Y	5.83	75.89	19.33		65.0	
		Z	5.75	76.27	19.31		65.0	
10262-CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	7.86	77.29	21.53	3.98	65.0	± 9.6 %
		Y	6.10	74.42	19.75		65.0	
		Z	5.95	74.58	19.70		65.0	
10263-CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.54	75.44	20.55	3.98	65.0	± 9.6 %
		Y	5.89	72.72	18.75		65.0	
		Z	5.73	72.88	18.68		65.0	
10264-CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	8.37	79.61	21.70	3.98	65.0	± 9.6 %
		Y	6.30	76.58	19.99		65.0	
		Z	6.33	77.37	20.28		65.0	
10265-CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	7.78	75.36	20.58	3.98	65.0	± 9.6 %
		Y	6.14	72.70	19.01		65.0	
		Z	6.01	72.92	19.12		65.0	
10266-CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	8.10	76.01	21.19	3.98	65.0	± 9.6 %
		Y	6.53	73.65	19.79		65.0	
		Z	6.41	73.91	19.90		65.0	
10267-CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	8.19	77.55	20.80	3.98	65.0	± 9.6 %
		Y	6.48	75.21	19.49		65.0	
		Z	6.48	75.89	19.83		65.0	
10268-CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	8.29	75.07	20.77	3.98	65.0	± 9.6 %
		Y	6.83	72.94	19.54		65.0	
		Z	6.70	73.16	19.68		65.0	
10269-CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	8.21	74.70	20.71	3.98	65.0	± 9.6 %
		Y	6.81	72.63	19.48		65.0	
		Z	6.69	72.85	19.62		65.0	
10270-CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	8.08	75.76	20.23	3.98	65.0	± 9.6 %
		Y	6.62	73.80	19.12		65.0	
		Z	6.57	74.24	19.38		65.0	

EX3DV4- SN:3866

May 31, 2017

10274-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.76	66.59	15.87	0.00	150.0	± 9.6 %
		Y	2.64	66.60	15.48		150.0	
		Z	2.59	66.69	15.30		150.0	
10275-CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.90	69.79	16.94	0.00	150.0	± 9.6 %
		Y	1.69	68.48	15.99		150.0	
		Z	1.62	68.20	15.71		150.0	
10277-CAA	PHS (QPSK)	X	5.02	68.20	13.47	9.03	50.0	± 9.6 %
		Y	3.07	63.14	8.94		50.0	
		Z	2.83	62.55	8.24		50.0	
10278-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	8.60	78.91	20.42	9.03	50.0	± 9.6 %
		Y	4.73	69.97	14.69		50.0	
		Z	4.23	68.38	13.48		50.0	
10279-CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	8.80	79.14	20.52	9.03	50.0	± 9.6 %
		Y	4.84	70.19	14.82		50.0	
		Z	4.32	68.59	13.61		50.0	
10290-AAB	CDMA2000, RC1, SO55, Full Rate	X	2.08	72.13	17.20	0.00	150.0	± 9.6 %
		Y	1.73	70.79	15.54		150.0	
		Z	1.49	69.39	14.25		150.0	
10291-AAB	CDMA2000, RC3, SO55, Full Rate	X	1.23	69.84	16.17	0.00	150.0	± 9.6 %
		Y	0.95	67.41	13.92		150.0	
		Z	0.84	66.34	12.73		150.0	
10292-AAB	CDMA2000, RC3, SO32, Full Rate	X	1.63	75.37	19.05	0.00	150.0	± 9.6 %
		Y	1.33	73.19	16.99		150.0	
		Z	1.19	71.89	15.72		150.0	
10293-AAB	CDMA2000, RC3, SO3, Full Rate	X	2.37	81.78	22.06	0.00	150.0	± 9.6 %
		Y	2.51	83.07	21.32		150.0	
		Z	2.33	81.64	20.01		150.0	
10295-AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	8.12	78.82	22.36	9.03	50.0	± 9.6 %
		Y	6.35	75.25	19.41		50.0	
		Z	6.85	76.57	19.54		50.0	
10297-AAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	3.29	71.49	17.51	0.00	150.0	± 9.6 %
		Y	2.91	70.36	16.93		150.0	
		Z	2.78	69.91	16.72		150.0	
10298-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	2.19	70.68	16.97	0.00	150.0	± 9.6 %
		Y	1.81	69.34	15.44		150.0	
		Z	1.58	68.11	14.28		150.0	
10299-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	4.44	75.75	18.97	0.00	150.0	± 9.6 %
		Y	3.00	70.72	15.22		150.0	
		Z	2.65	69.43	13.85		150.0	
10300-AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	3.42	70.62	16.09	0.00	150.0	± 9.6 %
		Y	2.26	66.10	12.36		150.0	
		Z	1.94	64.85	10.97		150.0	
10301-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	5.45	66.39	18.27	4.17	50.0	± 9.6 %
		Y	4.76	65.03	17.30		50.0	
		Z	4.59	65.00	17.17		50.0	
10302-AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	X	5.95	67.03	18.97	4.96	50.0	± 9.6 %
		Y	5.29	65.83	18.09		50.0	
		Z	5.20	66.17	18.17		50.0	

EX3DV4- SN:3866

May 31, 2017

10303- AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.78	67.02	19.02	4.96	50.0	± 9.6 %
		Y	5.06	65.55	17.98		50.0	
		Z	4.97	65.86	18.03		50.0	
10304- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	5.48	66.51	18.31	4.17	50.0	± 9.6 %
		Y	4.84	65.37	17.46		50.0	
		Z	4.75	65.67	17.49		50.0	
10305- AAA	IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	6.08	72.50	22.89	6.02	35.0	± 9.6 %
		Y	4.70	67.98	19.95		35.0	
		Z	4.73	69.00	20.20		35.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	5.79	68.34	20.52	6.02	35.0	± 9.6 %
		Y	4.91	66.57	19.26		35.0	
		Z	4.87	67.25	19.44		35.0	
10307- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	5.95	70.24	21.57	6.02	35.0	± 9.6 %
		Y	4.86	66.96	19.34		35.0	
		Z	4.81	67.58	19.49		35.0	
10308- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	5.95	70.59	21.77	6.02	35.0	± 9.6 %
		Y	4.83	67.14	19.47		35.0	
		Z	4.80	67.86	19.67		35.0	
10309- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	5.89	68.57	20.63	6.02	35.0	± 9.6 %
		Y	4.98	66.81	19.41		35.0	
		Z	4.92	67.45	19.58		35.0	
10310- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	X	5.76	68.46	20.49	6.02	35.0	± 9.6 %
		Y	4.87	66.70	19.27		35.0	
		Z	4.84	67.39	19.46		35.0	
10311- AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	3.67	70.83	17.17	0.00	150.0	± 9.6 %
		Y	3.29	69.70	16.59		150.0	
		Z	3.13	69.21	16.37		150.0	
10313- AAA	iDEN 1:3	X	5.42	73.66	16.54	6.99	70.0	± 9.6 %
		Y	3.23	68.66	13.57		70.0	
		Z	3.24	69.09	13.89		70.0	
10314- AAA	iDEN 1:6	X	6.44	77.53	20.45	10.00	30.0	± 9.6 %
		Y	3.71	71.31	17.32		30.0	
		Z	3.76	72.02	17.68		30.0	
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	X	1.19	65.03	16.23	0.17	150.0	± 9.6 %
		Y	1.10	64.01	15.31		150.0	
		Z	1.09	63.89	15.13		150.0	
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	4.88	66.71	16.46	0.17	150.0	± 9.6 %
		Y	4.64	66.59	16.19		150.0	
		Z	4.54	66.61	16.15		150.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.88	66.71	16.46	0.17	150.0	± 9.6 %
		Y	4.64	66.59	16.19		150.0	
		Z	4.54	66.61	16.15		150.0	
10400- AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	5.07	67.13	16.48	0.00	150.0	± 9.6 %
		Y	4.80	67.07	16.31		150.0	
		Z	4.66	67.04	16.26		150.0	
10401- AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.65	67.18	16.52	0.00	150.0	± 9.6 %
		Y	5.44	67.12	16.38		150.0	
		Z	5.36	67.17	16.39		150.0	

EX3DV4-SN:3866

May 31, 2017

10402-AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.95	67.81	16.67	0.00	150.0	± 9.6 %
		Y	5.73	67.64	16.50		150.0	
		Z	5.61	67.51	16.42		150.0	
10403-AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	2.08	72.13	17.20	0.00	115.0	± 9.6 %
		Y	1.73	70.79	15.54		115.0	
		Z	1.49	69.39	14.25		115.0	
10404-AAB	CDMA2000 (1xEV-DO, Rev. A)	X	2.08	72.13	17.20	0.00	115.0	± 9.6 %
		Y	1.73	70.79	15.54		115.0	
		Z	1.49	69.39	14.25		115.0	
10406-AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	25.96	105.00	28.55	0.00	100.0	± 9.6 %
		Y	35.97	107.39	27.34		100.0	
		Z	100.00	117.41	28.38		100.0	
10410-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	39.66	105.40	27.14	3.23	80.0	± 9.6 %
		Y	5.60	78.79	17.37		80.0	
		Z	6.13	80.71	17.76		80.0	
10415-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.05	63.68	15.52	0.00	150.0	± 9.6 %
		Y	1.02	63.25	14.93		150.0	
		Z	1.01	63.14	14.73		150.0	
10416-AAA	IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)	X	4.81	66.68	16.41	0.00	150.0	± 9.6 %
		Y	4.61	66.73	16.27		150.0	
		Z	4.51	66.73	16.21		150.0	
10417-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.81	66.68	16.41	0.00	150.0	± 9.6 %
		Y	4.61	66.73	16.27		150.0	
		Z	4.51	66.73	16.21		150.0	
10418-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)	X	4.80	66.82	16.41	0.00	150.0	± 9.6 %
		Y	4.60	66.88	16.28		150.0	
		Z	4.50	66.90	16.24		150.0	
10419-AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)	X	4.82	66.78	16.43	0.00	150.0	± 9.6 %
		Y	4.62	66.83	16.29		150.0	
		Z	4.52	66.84	16.24		150.0	
10422-AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	X	4.96	66.79	16.43	0.00	150.0	± 9.6 %
		Y	4.75	66.83	16.30		150.0	
		Z	4.64	66.83	16.25		150.0	
10423-AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	5.21	67.23	16.59	0.00	150.0	± 9.6 %
		Y	4.94	67.18	16.43		150.0	
		Z	4.80	67.14	16.36		150.0	
10424-AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	5.10	67.16	16.55	0.00	150.0	± 9.6 %
		Y	4.85	67.13	16.40		150.0	
		Z	4.72	67.09	16.33		150.0	
10425-AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.64	67.50	16.68	0.00	150.0	± 9.6 %
		Y	5.42	67.40	16.52		150.0	
		Z	5.31	67.34	16.48		150.0	
10426-AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	X	5.66	67.55	16.69	0.00	150.0	± 9.6 %
		Y	5.42	67.41	16.52		150.0	
		Z	5.32	67.37	16.49		150.0	

EX3DV4- SN:3866

May 31, 2017

10427- AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.70	67.63	16.73	0.00	150.0	± 9.6 %
		Y	5.44	67.42	16.53		150.0	
		Z	5.33	67.35	16.48		150.0	
10430- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.61	70.13	18.46	0.00	150.0	± 9.6 %
		Y	4.54	71.62	18.84		150.0	
		Z	4.34	71.47	18.45		150.0	
10431- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.62	67.28	16.57	0.00	150.0	± 9.6 %
		Y	4.33	67.30	16.34		150.0	
		Z	4.19	67.30	16.21		150.0	
10432- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.90	67.21	16.56	0.00	150.0	± 9.6 %
		Y	4.62	67.17	16.36		150.0	
		Z	4.49	67.16	16.28		150.0	
10433- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	5.13	67.24	16.60	0.00	150.0	± 9.6 %
		Y	4.86	67.17	16.42		150.0	
		Z	4.73	67.13	16.35		150.0	
10434- AAA	W-CDMA (BS Test Model 1, 64 DPCH)	X	4.70	70.75	18.51	0.00	150.0	± 9.6 %
		Y	4.71	72.68	18.95		150.0	
		Z	4.48	72.50	18.48		150.0	
10435- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	37.53	104.49	26.87	3.23	80.0	± 9.6 %
		Y	5.44	78.34	17.17		80.0	
		Z	5.88	80.12	17.53		80.0	
10447- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.97	67.39	16.31	0.00	150.0	± 9.6 %
		Y	3.65	67.40	15.84		150.0	
		Z	3.48	67.35	15.53		150.0	
10448- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.41	67.05	16.43	0.00	150.0	± 9.6 %
		Y	4.16	67.08	16.20		150.0	
		Z	4.03	67.09	16.08		150.0	
10449- AAA	LTE-FDD (QOFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	X	4.65	67.03	16.47	0.00	150.0	± 9.6 %
		Y	4.42	67.01	16.27		150.0	
		Z	4.30	66.99	16.19		150.0	
10450- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.81	66.98	16.46	0.00	150.0	± 9.6 %
		Y	4.61	66.94	16.28		150.0	
		Z	4.50	66.91	16.21		150.0	
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.93	67.73	16.20	0.00	150.0	± 9.6 %
		Y	3.57	67.69	15.58		150.0	
		Z	3.37	67.51	15.13		150.0	
10456- AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.49	68.19	16.87	0.00	150.0	± 9.6 %
		Y	6.27	67.99	16.68		150.0	
		Z	6.17	67.89	16.63		150.0	
10457- AAA	UMTS-FDD (DC-HSDPA)	X	3.92	65.38	16.20	0.00	150.0	± 9.6 %
		Y	3.83	65.36	16.00		150.0	
		Z	3.78	65.38	15.92		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	X	3.67	66.56	15.63	0.00	150.0	± 9.6 %
		Y	3.38	66.92	15.01		150.0	
		Z	3.18	66.77	14.47		150.0	
10459- AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	X	4.75	64.52	15.97	0.00	150.0	± 9.6 %
		Y	4.38	64.72	15.57		150.0	
		Z	4.28	65.18	15.52		150.0	

EX3DV4- SN:3866

May 31, 2017

10460-AAA	UMTS-FDD (WCDMA, AMR)	X	1.12	71.77	18.52	0.00	150.0	± 9.6 %
		Y	0.94	69.07	16.80		150.0	
		Z	0.91	68.55	16.38		150.0	
10461-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	119.31	30.82	3.29	80.0	± 9.6 %
		Y	3.10	73.05	16.04		80.0	
		Z	2.89	73.54	16.13		80.0	
10462-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	18.95	88.90	20.75	3.23	80.0	± 9.6 %
		Y	1.38	61.26	8.79		80.0	
		Z	1.06	60.00	7.67		80.0	
10463-AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	10.36	80.77	17.93	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.78		80.0	
		Z	1.08	60.00	7.25		80.0	
10464-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.71	29.93	3.23	80.0	± 9.6 %
		Y	2.52	70.33	14.54		80.0	
		Z	2.25	70.28	14.39		80.0	
10465-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	14.09	85.26	19.62	3.23	80.0	± 9.6 %
		Y	1.33	60.91	8.56		80.0	
		Z	1.06	60.00	7.62		80.0	
10466-AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.41	78.26	17.06	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.74		80.0	
		Z	1.08	60.00	7.21		80.0	
10467-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.87	30.00	3.23	80.0	± 9.6 %
		Y	2.60	70.71	14.71		80.0	
		Z	2.33	70.74	14.59		80.0	
10468-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	15.00	86.04	19.87	3.23	80.0	± 9.6 %
		Y	1.34	60.98	8.61		80.0	
		Z	1.05	60.00	7.63		80.0	
10469-AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.49	78.39	17.10	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.73		80.0	
		Z	1.08	60.00	7.21		80.0	
10470-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.89	30.01	3.23	80.0	± 9.6 %
		Y	2.59	70.68	14.70		80.0	
		Z	2.32	70.72	14.58		80.0	
10471-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	14.99	86.02	19.85	3.23	80.0	± 9.6 %
		Y	1.33	60.96	8.58		80.0	
		Z	1.05	60.00	7.62		80.0	
10472-AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.47	78.36	17.08	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.72		80.0	
		Z	1.08	60.00	7.20		80.0	
10473-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	117.86	30.00	3.23	80.0	± 9.6 %
		Y	2.58	70.66	14.68		80.0	
		Z	2.32	70.69	14.56		80.0	
10474-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	14.86	85.93	19.82	3.23	80.0	± 9.6 %
		Y	1.33	60.94	8.58		80.0	
		Z	1.05	60.00	7.62		80.0	
10475-AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.43	78.30	17.07	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.73		80.0	
		Z	1.07	60.00	7.20		80.0	

EX3DV4- SN:3866

May 31, 2017

10477-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	14.24	85.37	19.64	3.23	80.0	± 9.6 %
		Y	1.32	60.87	8.52		80.0	
		Z	1.05	60.00	7.60		80.0	
10478-AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.34	78.16	17.01	3.23	80.0	± 9.6 %
		Y	1.23	60.00	7.72		80.0	
		Z	1.08	60.00	7.19		80.0	
10479-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	7.58	82.44	22.68	3.23	80.0	± 9.6 %
		Y	3.59	72.16	17.26		80.0	
		Z	3.82	73.96	17.62		80.0	
10480-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	8.66	80.46	20.82	3.23	80.0	± 9.6 %
		Y	3.62	69.25	14.74		80.0	
		Z	3.25	68.73	13.95		80.0	
10481-AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.32	79.39	20.20	3.23	80.0	± 9.6 %
		Y	3.30	67.75	13.82		80.0	
		Z	2.81	66.70	12.77		80.0	
10482-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.61	74.84	18.74	2.23	80.0	± 9.6 %
		Y	2.45	67.42	14.54		80.0	
		Z	2.17	66.40	13.61		80.0	
10483-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	7.04	78.01	20.15	2.23	80.0	± 9.6 %
		Y	3.22	67.65	14.25		80.0	
		Z	2.72	66.06	12.91		80.0	
10484-AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	6.88	77.42	19.95	2.23	80.0	± 9.6 %
		Y	3.19	67.33	14.13		80.0	
		Z	2.68	65.67	12.75		80.0	
10485-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.87	75.43	19.35	2.23	80.0	± 9.6 %
		Y	2.80	68.87	15.89		80.0	
		Z	2.65	68.70	15.57		80.0	
10486-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.39	71.11	17.61	2.23	80.0	± 9.6 %
		Y	2.97	66.86	14.77		80.0	
		Z	2.74	66.32	14.11		80.0	
10487-AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.42	70.85	17.52	2.23	80.0	± 9.6 %
		Y	3.01	66.70	14.70		80.0	
		Z	2.77	66.11	14.01		80.0	
10488-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.15	74.67	19.27	2.23	80.0	± 9.6 %
		Y	3.29	69.38	16.67		80.0	
		Z	3.18	69.51	16.70		80.0	
10489-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.57	70.52	17.95	2.23	80.0	± 9.6 %
		Y	3.41	67.34	16.01		80.0	
		Z	3.29	67.38	15.90		80.0	
10490-AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.64	70.21	17.86	2.23	80.0	± 9.6 %
		Y	3.52	67.30	16.03		80.0	
		Z	3.39	67.34	15.91		80.0	
10491-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.16	72.89	18.65	2.23	80.0	± 9.6 %
		Y	3.65	68.85	16.62		80.0	
		Z	3.54	68.96	16.70		80.0	
10492-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.86	69.73	17.79	2.23	80.0	± 9.6 %
		Y	3.83	67.17	16.24		80.0	
		Z	3.72	67.23	16.22		80.0	

EX3DV4- SN:3866

May 31, 2017

10493-AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.93	69.55	17.75	2.23	80.0	± 9.6 %
		Y	3.91	67.12	16.25		80.0	
		Z	3.79	67.17	16.21		80.0	
10494-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.74	74.72	19.14	2.23	80.0	± 9.6 %
		Y	3.85	69.89	16.87		80.0	
		Z	3.73	69.95	16.96		80.0	
10495-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.96	70.37	18.01	2.23	80.0	± 9.6 %
		Y	3.85	67.52	16.39		80.0	
		Z	3.74	67.53	16.38		80.0	
10496-AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.01	69.97	17.90	2.23	80.0	± 9.6 %
		Y	3.95	67.37	16.38		80.0	
		Z	3.83	67.39	16.37		80.0	
10497-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.01	73.25	17.74	2.23	80.0	± 9.6 %
		Y	1.93	64.71	12.56		80.0	
		Z	1.59	62.88	11.00		80.0	
10498-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	3.65	69.30	15.53	2.23	80.0	± 9.6 %
		Y	1.84	62.00	10.41		80.0	
		Z	1.45	60.03	8.60		80.0	
10499-AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	3.67	69.04	15.33	2.23	80.0	± 9.6 %
		Y	1.83	61.70	10.14		80.0	
		Z	1.46	60.00	8.46		80.0	
10500-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	4.83	74.54	19.13	2.23	80.0	± 9.6 %
		Y	2.97	68.88	16.15		80.0	
		Z	2.85	68.93	16.01		80.0	
10501-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.45	70.72	17.68	2.23	80.0	± 9.6 %
		Y	3.17	67.08	15.27		80.0	
		Z	2.99	66.87	14.86		80.0	
10502-AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.49	70.49	17.57	2.23	80.0	± 9.6 %
		Y	3.24	67.03	15.21		80.0	
		Z	3.05	66.79	14.78		80.0	
10503-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.08	74.48	19.18	2.23	80.0	± 9.6 %
		Y	3.26	69.22	16.59		80.0	
		Z	3.14	69.35	16.62		80.0	
10504-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.55	70.45	17.91	2.23	80.0	± 9.6 %
		Y	3.39	67.26	15.96		80.0	
		Z	3.27	67.30	15.84		80.0	
10505-AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.62	70.13	17.82	2.23	80.0	± 9.6 %
		Y	3.50	67.21	15.98		80.0	
		Z	3.38	67.26	15.86		80.0	
10506-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.70	74.57	19.08	2.23	80.0	± 9.6 %
		Y	3.82	69.76	16.81		80.0	
		Z	3.70	69.84	16.89		80.0	
10507-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.94	70.30	17.97	2.23	80.0	± 9.6 %
		Y	3.84	67.45	16.35		80.0	
		Z	3.72	67.47	16.34		80.0	

EX3DV4- SN:3866

May 31, 2017

10508-AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.00	69.91	17.86	2.23	80.0	± 9.6 %
		Y	3.94	67.30	16.34		80.0	
		Z	3.82	67.33	16.33		80.0	
10509-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.79	72.95	18.48	2.23	80.0	± 9.6 %
		Y	4.26	69.29	16.69		80.0	
		Z	4.14	69.32	16.77		80.0	
10510-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.42	70.01	17.89	2.23	80.0	± 9.6 %
		Y	4.37	67.55	16.52		80.0	
		Z	4.25	67.52	16.53		80.0	
10511-AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.43	69.67	17.81	2.23	80.0	± 9.6 %
		Y	4.43	67.38	16.51		80.0	
		Z	4.31	67.37	16.51		80.0	
10512-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.25	74.86	19.04	2.23	80.0	± 9.6 %
		Y	4.32	70.27	16.92		80.0	
		Z	4.20	70.27	16.99		80.0	
10513-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.36	70.54	18.07	2.23	80.0	± 9.6 %
		Y	4.24	67.74	16.56		80.0	
		Z	4.12	67.67	16.56		80.0	
10514-AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.30	69.96	17.91	2.23	80.0	± 9.6 %
		Y	4.27	67.44	16.51		80.0	
		Z	4.16	67.39	16.51		80.0	
10515-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	X	1.02	63.96	15.65	0.00	150.0	± 9.6 %
		Y	0.98	63.45	15.00		150.0	
		Z	0.97	63.33	14.80		150.0	
10516-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.94	78.96	21.94	0.00	150.0	± 9.6 %
		Y	0.63	71.55	18.18		150.0	
		Z	0.60	70.68	17.59		150.0	
10517-AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.92	67.01	16.91	0.00	150.0	± 9.6 %
		Y	0.84	65.58	15.77		150.0	
		Z	0.82	65.26	15.47		150.0	
10518-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.82	66.79	16.42	0.00	150.0	± 9.6 %
		Y	4.61	66.81	16.26		150.0	
		Z	4.50	66.81	16.20		150.0	
10519-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	5.08	67.12	16.56	0.00	150.0	± 9.6 %
		Y	4.81	67.06	16.38		150.0	
		Z	4.68	67.02	16.30		150.0	
10520-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	X	4.92	67.13	16.50	0.00	150.0	± 9.6 %
		Y	4.67	67.05	16.31		150.0	
		Z	4.53	66.99	16.23		150.0	
10521-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.85	67.15	16.50	0.00	150.0	± 9.6 %
		Y	4.60	67.05	16.30		150.0	
		Z	4.47	66.98	16.22		150.0	
10522-AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.87	66.98	16.46	0.00	150.0	± 9.6 %
		Y	4.65	67.07	16.35		150.0	
		Z	4.53	67.08	16.31		150.0	

EX3DV4- SN:3866

May 31, 2017

10523- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.75	66.99	16.37	0.00	150.0	± 9.6 %
		Y	4.53	66.97	16.21		150.0	
		Z	4.42	66.97	16.17		150.0	
10524- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.84	66.98	16.47	0.00	150.0	± 9.6 %
		Y	4.60	67.01	16.33		150.0	
		Z	4.47	67.00	16.27		150.0	
10525- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.77	66.04	16.07	0.00	150.0	± 9.6 %
		Y	4.57	66.07	15.93		150.0	
		Z	4.47	66.07	15.88		150.0	
10526- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	5.00	66.46	16.21	0.00	150.0	± 9.6 %
		Y	4.76	66.45	16.07		150.0	
		Z	4.63	66.42	16.01		150.0	
10527- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.92	66.48	16.20	0.00	150.0	± 9.6 %
		Y	4.67	66.43	16.03		150.0	
		Z	4.55	66.38	15.96		150.0	
10528- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.94	66.50	16.23	0.00	150.0	± 9.6 %
		Y	4.69	66.44	16.06		150.0	
		Z	4.56	66.40	15.99		150.0	
10529- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.94	66.50	16.23	0.00	150.0	± 9.6 %
		Y	4.69	66.44	16.06		150.0	
		Z	4.56	66.40	15.99		150.0	
10531- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.97	66.67	16.25	0.00	150.0	± 9.6 %
		Y	4.70	66.57	16.08		150.0	
		Z	4.55	66.49	16.00		150.0	
10532- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.82	66.62	16.25	0.00	150.0	± 9.6 %
		Y	4.55	66.44	16.02		150.0	
		Z	4.42	66.35	15.93		150.0	
10533- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.96	66.50	16.19	0.00	150.0	± 9.6 %
		Y	4.70	66.48	16.04		150.0	
		Z	4.58	66.46	15.98		150.0	
10534- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.43	66.70	16.27	0.00	150.0	± 9.6 %
		Y	5.21	66.56	16.10		150.0	
		Z	5.10	66.47	16.03		150.0	
10535- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	X	5.52	66.87	16.33	0.00	150.0	± 9.6 %
		Y	5.27	66.70	16.15		150.0	
		Z	5.16	66.64	16.11		150.0	
10536- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.37	66.84	16.31	0.00	150.0	± 9.6 %
		Y	5.14	66.69	16.13		150.0	
		Z	5.03	66.60	16.07		150.0	
10537- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.44	66.79	16.28	0.00	150.0	± 9.6 %
		Y	5.20	66.65	16.12		150.0	
		Z	5.09	66.56	16.06		150.0	
10538- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.57	66.89	16.36	0.00	150.0	± 9.6 %
		Y	5.31	66.69	16.18		150.0	
		Z	5.17	66.57	16.10		150.0	
10540- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)	X	5.44	66.79	16.33	0.00	150.0	± 9.6 %
		Y	5.22	66.67	16.18		150.0	
		Z	5.10	66.57	16.12		150.0	

EX3DV4- SN:3866

May 31, 2017

10541- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.46	66.82	16.35	0.00	150.0	± 9.6 %
		Y	5.20	66.57	16.13		150.0	
		Z	5.08	66.47	16.05		150.0	
10542- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.58	66.75	16.33	0.00	150.0	± 9.6 %
		Y	5.35	66.62	16.16		150.0	
		Z	5.24	66.54	16.10		150.0	
10543- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.72	66.87	16.39	0.00	150.0	± 9.6 %
		Y	5.43	66.64	16.19		150.0	
		Z	5.31	66.56	16.13		150.0	
10544- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.68	66.81	16.25	0.00	150.0	± 9.6 %
		Y	5.50	66.67	16.09		150.0	
		Z	5.41	66.59	16.03		150.0	
10545- AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.89	67.14	16.34	0.00	150.0	± 9.6 %
		Y	5.69	67.04	16.21		150.0	
		Z	5.59	66.96	16.17		150.0	
10546- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.81	67.15	16.37	0.00	150.0	± 9.6 %
		Y	5.58	66.92	16.17		150.0	
		Z	5.47	66.77	16.09		150.0	
10547- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.91	67.23	16.39	0.00	150.0	± 9.6 %
		Y	5.66	66.98	16.19		150.0	
		Z	5.54	66.81	16.10		150.0	
10548- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	X	6.14	68.03	16.76	0.00	150.0	± 9.6 %
		Y	5.88	67.79	16.56		150.0	
		Z	5.73	67.57	16.45		150.0	
10550- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5.82	67.06	16.33	0.00	150.0	± 9.6 %
		Y	5.60	66.89	16.16		150.0	
		Z	5.50	66.80	16.11		150.0	
10551- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.83	67.13	16.32	0.00	150.0	± 9.6 %
		Y	5.61	66.96	16.16		150.0	
		Z	5.50	66.84	16.09		150.0	
10552- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.74	66.94	16.25	0.00	150.0	± 9.6 %
		Y	5.52	66.75	16.07		150.0	
		Z	5.43	66.67	16.02		150.0	
10553- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.83	66.97	16.29	0.00	150.0	± 9.6 %
		Y	5.61	66.80	16.12		150.0	
		Z	5.50	66.69	16.05		150.0	
10554- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	X	6.06	67.19	16.34	0.00	150.0	± 9.6 %
		Y	5.90	67.03	16.17		150.0	
		Z	5.82	66.94	16.11		150.0	
10555- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	X	6.26	67.62	16.52	0.00	150.0	± 9.6 %
		Y	6.03	67.32	16.29		150.0	
		Z	5.93	67.21	16.22		150.0	
10556- AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	X	6.24	67.53	16.47	0.00	150.0	± 9.6 %
		Y	6.05	67.36	16.30		150.0	
		Z	5.96	67.26	16.24		150.0	
10557- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	X	6.24	67.54	16.50	0.00	150.0	± 9.6 %
		Y	6.03	67.30	16.29		150.0	
		Z	5.92	67.17	16.22		150.0	

EX3DV4- SN:3866

May 31, 2017

10558- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	6.30	67.71	16.59	0.00	150.0	± 9.6 %
		Y	6.08	67.47	16.38		150.0	
		Z	5.97	67.32	16.31		150.0	
10560- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.32	67.63	16.59	0.00	150.0	± 9.6 %
		Y	6.08	67.33	16.36		150.0	
		Z	5.97	67.18	16.28		150.0	
10561- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	6.21	67.53	16.58	0.00	150.0	± 9.6 %
		Y	5.99	67.28	16.37		150.0	
		Z	5.89	67.14	16.29		150.0	
10562- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.36	67.97	16.80	0.00	150.0	± 9.6 %
		Y	6.12	67.67	16.56		150.0	
		Z	5.99	67.47	16.46		150.0	
10563- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.56	68.09	16.80	0.00	150.0	± 9.6 %
		Y	6.44	68.16	16.75		150.0	
		Z	6.14	67.53	16.44		150.0	
10564- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle)	X	5.15	66.88	16.56	0.46	150.0	± 9.6 %
		Y	4.93	66.82	16.35		150.0	
		Z	4.82	66.84	16.31		150.0	
10565- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle)	X	5.46	67.42	16.90	0.46	150.0	± 9.6 %
		Y	5.18	67.32	16.70		150.0	
		Z	5.04	67.27	16.63		150.0	
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	X	5.28	67.29	16.72	0.46	150.0	± 9.6 %
		Y	5.01	67.17	16.51		150.0	
		Z	4.88	67.12	16.44		150.0	
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	X	5.30	67.69	17.07	0.46	150.0	± 9.6 %
		Y	5.04	67.62	16.90		150.0	
		Z	4.91	67.53	16.81		150.0	
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	X	5.16	66.90	16.42	0.46	150.0	± 9.6 %
		Y	4.90	66.84	16.21		150.0	
		Z	4.78	66.86	16.19		150.0	
10569- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	X	5.23	67.67	17.07	0.46	150.0	± 9.6 %
		Y	4.99	67.67	16.93		150.0	
		Z	4.87	67.63	16.87		150.0	
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	X	5.28	67.45	16.98	0.46	150.0	± 9.6 %
		Y	5.03	67.51	16.88		150.0	
		Z	4.90	67.48	16.81		150.0	
10571- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.35	66.13	16.64	0.46	130.0	± 9.6 %
		Y	1.19	64.43	15.36		130.0	
		Z	1.18	64.35	15.23		130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.38	66.86	17.05	0.46	130.0	± 9.6 %
		Y	1.20	65.01	15.71		130.0	
		Z	1.19	64.89	15.56		130.0	
10573- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	11.19	110.54	30.57	0.46	130.0	± 9.6 %
		Y	1.73	81.41	21.20		130.0	
		Z	1.63	80.44	20.78		130.0	
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.76	75.02	20.84	0.46	130.0	± 9.6 %
		Y	1.35	70.98	18.69		130.0	
		Z	1.30	70.28	18.27		130.0	

EX3DV4- SN:3866

May 31, 2017

10575- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	4.93	66.62	16.56	0.46	130.0	± 9.6 %
		Y	4.69	66.49	16.28		130.0	
		Z	4.59	66.53	16.25		130.0	
10576- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	4.96	66.79	16.64	0.46	130.0	± 9.6 %
		Y	4.72	66.67	16.36		130.0	
		Z	4.61	66.70	16.32		130.0	
10577- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	X	5.24	67.17	16.82	0.46	130.0	± 9.6 %
		Y	4.94	67.00	16.54		130.0	
		Z	4.81	66.98	16.49		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	X	5.13	67.36	16.93	0.46	130.0	± 9.6 %
		Y	4.84	67.19	16.67		130.0	
		Z	4.71	67.15	16.60		130.0	
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	X	4.90	66.75	16.31	0.46	130.0	± 9.6 %
		Y	4.59	66.39	15.91		130.0	
		Z	4.46	66.37	15.86		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	X	4.95	66.65	16.27	0.46	130.0	± 9.6 %
		Y	4.63	66.38	15.90		130.0	
		Z	4.51	66.41	15.89		130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	X	5.05	67.49	16.90	0.46	130.0	± 9.6 %
		Y	4.73	67.22	16.59		130.0	
		Z	4.61	67.17	16.53		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle)	X	4.87	66.47	16.10	0.46	130.0	± 9.6 %
		Y	4.53	66.11	15.67		130.0	
		Z	4.40	66.12	15.64		130.0	
10583- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.93	66.62	16.56	0.46	130.0	± 9.6 %
		Y	4.69	66.49	16.28		130.0	
		Z	4.59	66.53	16.25		130.0	
10584- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.96	66.79	16.64	0.46	130.0	± 9.6 %
		Y	4.72	66.67	16.36		130.0	
		Z	4.61	66.70	16.32		130.0	
10585- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	X	5.24	67.17	16.82	0.46	130.0	± 9.6 %
		Y	4.94	67.00	16.54		130.0	
		Z	4.81	66.98	16.49		130.0	
10586- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	5.13	67.36	16.93	0.46	130.0	± 9.6 %
		Y	4.84	67.19	16.67		130.0	
		Z	4.71	67.15	16.60		130.0	
10587- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.90	66.75	16.31	0.46	130.0	± 9.6 %
		Y	4.59	66.39	15.91		130.0	
		Z	4.46	66.37	15.86		130.0	
10588- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	X	4.95	66.65	16.27	0.46	130.0	± 9.6 %
		Y	4.63	66.38	15.90		130.0	
		Z	4.51	66.41	15.89		130.0	
10589- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	5.05	67.49	16.90	0.46	130.0	± 9.6 %
		Y	4.73	67.22	16.59		130.0	
		Z	4.61	67.17	16.53		130.0	
10590- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.87	66.47	16.10	0.46	130.0	± 9.6 %
		Y	4.53	66.11	15.67		130.0	
		Z	4.40	66.12	15.64		130.0	

EX3DV4- SN:3866

May 31, 2017

10591- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	5.09	66.69	16.66	0.46	130.0	± 9.6 %
		Y	4.84	66.58	16.40		130.0	
		Z	4.74	66.60	16.36		130.0	
10592- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	5.29	67.05	16.77	0.46	130.0	± 9.6 %
		Y	5.01	66.92	16.53		130.0	
		Z	4.89	66.93	16.49		130.0	
10593- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	X	5.23	67.04	16.70	0.46	130.0	± 9.6 %
		Y	4.93	66.84	16.41		130.0	
		Z	4.80	66.82	16.36		130.0	
10594- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.27	67.16	16.83	0.46	130.0	± 9.6 %
		Y	4.99	67.01	16.57		130.0	
		Z	4.86	66.99	16.52		130.0	
10595- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle)	X	5.27	67.18	16.76	0.46	130.0	± 9.6 %
		Y	4.95	66.95	16.45		130.0	
		Z	4.82	66.94	16.41		130.0	
10596- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	5.19	67.13	16.73	0.46	130.0	± 9.6 %
		Y	4.89	66.93	16.44		130.0	
		Z	4.76	66.93	16.41		130.0	
10597- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	5.15	67.11	16.67	0.46	130.0	± 9.6 %
		Y	4.84	66.84	16.33		130.0	
		Z	4.71	66.82	16.28		130.0	
10598- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	5.13	67.41	16.95	0.46	130.0	± 9.6 %
		Y	4.83	67.13	16.63		130.0	
		Z	4.70	67.07	16.55		130.0	
10599- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.77	67.42	16.87	0.46	130.0	± 9.6 %
		Y	5.50	67.15	16.59		130.0	
		Z	5.39	67.08	16.55		130.0	
10600- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.99	68.01	17.13	0.46	130.0	± 9.6 %
		Y	5.64	67.53	16.75		130.0	
		Z	5.50	67.43	16.69		130.0	
10601- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.84	67.66	16.97	0.46	130.0	± 9.6 %
		Y	5.53	67.30	16.65		130.0	
		Z	5.41	67.23	16.61		130.0	
10602- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.96	67.73	16.92	0.46	130.0	± 9.6 %
		Y	5.61	67.25	16.54		130.0	
		Z	5.51	67.30	16.56		130.0	
10603- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	6.09	68.14	17.25	0.46	130.0	± 9.6 %
		Y	5.71	67.64	16.87		130.0	
		Z	5.58	67.56	16.83		130.0	
10604- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.79	67.43	16.89	0.46	130.0	± 9.6 %
		Y	5.50	67.09	16.59		130.0	
		Z	5.43	67.15	16.61		130.0	
10605- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.88	67.61	16.98	0.46	130.0	± 9.6 %
		Y	5.60	67.34	16.70		130.0	
		Z	5.50	67.35	16.70		130.0	
10606- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.64	67.11	16.61	0.46	130.0	± 9.6 %
		Y	5.38	66.83	16.31		130.0	
		Z	5.25	66.71	16.24		130.0	

EX3DV4- SN:3866

May 31, 2017

10607- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.91	65.98	16.27	0.46	130.0	± 9.6 %
		Y	4.67	65.88	16.01		130.0	
		Z	4.58	65.91	15.98		130.0	
10608- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	5.16	66.42	16.42	0.46	130.0	± 9.6 %
		Y	4.87	66.29	16.18		130.0	
		Z	4.75	66.30	16.14		130.0	
10609- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	5.04	66.34	16.31	0.46	130.0	± 9.6 %
		Y	4.76	66.13	16.01		130.0	
		Z	4.64	66.13	15.97		130.0	
10610- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	5.10	66.49	16.46	0.46	130.0	± 9.6 %
		Y	4.81	66.31	16.18		130.0	
		Z	4.69	66.30	16.14		130.0	
10611- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	5.04	66.38	16.34	0.46	130.0	± 9.6 %
		Y	4.73	66.11	16.02		130.0	
		Z	4.61	66.09	15.98		130.0	
10612- AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	5.05	66.47	16.34	0.46	130.0	± 9.6 %
		Y	4.74	66.23	16.04		130.0	
		Z	4.61	66.23	16.01		130.0	
10613- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	5.07	66.42	16.27	0.46	130.0	± 9.6 %
		Y	4.75	66.14	15.94		130.0	
		Z	4.61	66.10	15.89		130.0	
10614- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	X	5.00	66.68	16.54	0.46	130.0	± 9.6 %
		Y	4.69	66.38	16.21		130.0	
		Z	4.56	66.32	16.14		130.0	
10615- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	X	5.03	66.12	16.09	0.46	130.0	± 9.6 %
		Y	4.72	65.88	15.77		130.0	
		Z	4.60	65.91	15.74		130.0	
10616- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.57	66.66	16.47	0.46	130.0	± 9.6 %
		Y	5.32	66.41	16.21		130.0	
		Z	5.21	66.36	16.18		130.0	
10617- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.66	66.81	16.51	0.46	130.0	± 9.6 %
		Y	5.37	66.51	16.23		130.0	
		Z	5.28	66.52	16.23		130.0	
10618- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.53	66.83	16.55	0.46	130.0	± 9.6 %
		Y	5.27	66.59	16.29		130.0	
		Z	5.17	66.54	16.25		130.0	
10619- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.55	66.62	16.38	0.46	130.0	± 9.6 %
		Y	5.29	66.38	16.11		130.0	
		Z	5.18	66.32	16.08		130.0	
10620- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.70	66.80	16.51	0.46	130.0	± 9.6 %
		Y	5.39	66.47	16.20		130.0	
		Z	5.27	66.37	16.15		130.0	
10621- AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	X	5.67	66.88	16.66	0.46	130.0	± 9.6 %
		Y	5.39	66.61	16.40		130.0	
		Z	5.28	66.53	16.35		130.0	
10622- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.64	66.90	16.67	0.46	130.0	± 9.6 %
		Y	5.39	66.71	16.44		130.0	
		Z	5.28	66.67	16.42		130.0	

EX3DV4- SN:3866

May 31, 2017

10623- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	X	5.58	66.69	16.45	0.46	130.0	± 9.6 %
		Y	5.27	66.24	16.08		130.0	
		Z	5.16	66.20	16.05		130.0	
10624- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	X	5.72	66.66	16.50	0.46	130.0	± 9.6 %
		Y	5.46	66.44	16.25		130.0	
		Z	5.35	66.40	16.21		130.0	
10625- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)	X	6.02	67.31	16.86	0.46	130.0	± 9.6 %
		Y	5.83	67.39	16.77		130.0	
		Z	5.66	67.19	16.66		130.0	
10626- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.80	66.70	16.41	0.46	130.0	± 9.6 %
		Y	5.59	66.47	16.17		130.0	
		Z	5.51	66.43	16.14		130.0	
10627- AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X	6.04	67.10	16.54	0.46	130.0	± 9.6 %
		Y	5.82	66.97	16.37		130.0	
		Z	5.73	66.93	16.35		130.0	
10628- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X	5.89	66.92	16.41	0.46	130.0	± 9.6 %
		Y	5.64	66.58	16.10		130.0	
		Z	5.53	66.47	16.06		130.0	
10629- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	6.00	67.02	16.44	0.46	130.0	± 9.6 %
		Y	5.73	66.66	16.13		130.0	
		Z	5.60	66.52	16.07		130.0	
10630- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.47	68.52	17.19	0.46	130.0	± 9.6 %
		Y	6.14	68.04	16.82		130.0	
		Z	5.94	67.72	16.68		130.0	
10631- AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.47	68.60	17.41	0.46	130.0	± 9.6 %
		Y	6.09	68.05	17.04		130.0	
		Z	5.91	67.74	16.88		130.0	
10632- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	6.09	67.42	16.84	0.46	130.0	± 9.6 %
		Y	5.81	67.11	16.59		130.0	
		Z	5.71	67.03	16.54		130.0	
10633- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	X	6.02	67.23	16.58	0.46	130.0	± 9.6 %
		Y	5.72	66.79	16.24		130.0	
		Z	5.61	66.68	16.19		130.0	
10634- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	6.01	67.25	16.65	0.46	130.0	± 9.6 %
		Y	5.71	66.84	16.34		130.0	
		Z	5.59	66.71	16.27		130.0	
10635- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.88	66.55	16.04	0.46	130.0	± 9.6 %
		Y	5.57	66.09	15.67		130.0	
		Z	5.46	66.00	15.63		130.0	
10636- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	6.19	67.09	16.50	0.46	130.0	± 9.6 %
		Y	6.00	66.85	16.26		130.0	
		Z	5.92	66.78	16.22		130.0	
10637- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.42	67.60	16.73	0.46	130.0	± 9.6 %
		Y	6.15	67.20	16.41		130.0	
		Z	6.07	67.13	16.38		130.0	
10638- AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	X	6.36	67.41	16.61	0.46	130.0	± 9.6 %
		Y	6.15	67.18	16.37		130.0	
		Z	6.07	67.12	16.35		130.0	

EX3DV4- SN:3866

May 31, 2017

10639- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.39	67.51	16.71	0.46	130.0	± 9.6 %
		Y	6.15	67.18	16.43		130.0	
		Z	6.05	67.07	16.37		130.0	
10640- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.42	67.57	16.68	0.46	130.0	± 9.6 %
		Y	6.15	67.18	16.36		130.0	
		Z	6.04	67.05	16.30		130.0	
10641- AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.42	67.34	16.58	0.46	130.0	± 9.6 %
		Y	6.17	67.01	16.29		130.0	
		Z	6.09	66.98	16.28		130.0	
10642- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.53	67.76	16.96	0.46	130.0	± 9.6 %
		Y	6.25	67.39	16.66		130.0	
		Z	6.14	67.25	16.60		130.0	
10643- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	6.32	67.36	16.66	0.46	130.0	± 9.6 %
		Y	6.06	66.99	16.35		130.0	
		Z	5.97	66.91	16.32		130.0	
10644- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.56	68.07	17.04	0.46	130.0	± 9.6 %
		Y	6.25	67.56	16.65		130.0	
		Z	6.11	67.33	16.55		130.0	
10645- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.75	68.14	17.02	0.46	130.0	± 9.6 %
		Y	6.64	68.25	16.94		130.0	
		Z	6.31	67.55	16.62		130.0	
10646- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	17.14	96.60	31.35	9.30	60.0	± 9.6 %
		Y	11.66	91.33	28.76		60.0	
		Z	14.54	98.42	31.68		60.0	
10647- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	17.01	97.08	31.61	9.30	60.0	± 9.6 %
		Y	11.05	90.83	28.68		60.0	
		Z	13.46	97.50	31.51		60.0	
10648- AAA	CDMA2000 (1x Advanced)	X	1.00	66.85	14.21	0.00	150.0	± 9.6 %
		Y	0.78	64.69	11.99		150.0	
		Z	0.68	63.70	10.81		150.0	

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.