


FCC Radio Test Report

FCC ID: V7TMESH12


This report concerns: Original Grant

Project No. : 2003C093
Equipment : AC2100 Tri-band Whole Home Mesh WiFi System
Brand Name : Tenda
Test Model : Mesh12
Series Model : MW12, MW12a, MW12c, CM12
Applicant : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Manufacturer : SHENZHEN TENDA TECHNOLOGY CO.,LTD
Address : 6-8 Floor, Tower E3, No. 1001, Zhongshanyuan Road, Nanshan District, Shenzhen, China. 518052
Date of Receipt : Mar. 12, 2020
Date of Test : Mar. 19, 2020 ~ Apr. 09, 2020
Issued Date : Jun. 28, 2020
Report Version : R00
Test Sample : Engineering Sample No.: DG2020031237
Standard(s) : FCC Part15, Subpart C (15.247)
ANSI C63.10-2013
FCC KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Nick Chen



Approved by : Ethan Ma



Certificate #5123.02

Add: No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	13
2.4 DUTY CYCLE	14
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
2.6 SUPPORT UNITS	15
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	16
3.1 LIMIT	16
3.2 TEST PROCEDURE	16
3.3 DEVIATION FROM TEST STANDARD	16
3.4 TEST SETUP	17
3.5 EUT OPERATION CONDITIONS	17
3.6 TEST RESULTS	17
4 . RADIATED EMISSIONS TEST	18
4.1 LIMIT	18
4.2 TEST PROCEDURE	19
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	20
4.5 EUT OPERATION CONDITIONS	21
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	21
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	21
4.8 TEST RESULTS - ABOVE 1000 MHZ	21
5 . BANDWIDTH TEST	22
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM STANDARD	22
5.4 TEST SETUP	22

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	22
5.6 TEST RESULTS	22
6 . MAXIMUM OUTPUT POWER TEST	23
6.1 LIMIT	23
6.2 TEST PROCEDURE	23
6.3 DEVIATION FROM STANDARD	23
6.4 TEST SETUP	23
6.5 EUT OPERATION CONDITIONS	23
6.6 TEST RESULTS	23
7 . CONDUCTED SPURIOUS EMISSIONS	24
7.1 LIMIT	24
7.2 TEST PROCEDURE	24
7.3 DEVIATION FROM STANDARD	24
7.4 TEST SETUP	24
7.5 EUT OPERATION CONDITIONS	24
7.6 TEST RESULTS	24
8 . POWER SPECTRAL DENSITY TEST	25
8.1 LIMIT	25
8.2 TEST PROCEDURE	25
8.3 DEVIATION FROM STANDARD	25
8.4 TEST SETUP	25
8.5 EUT OPERATION CONDITIONS	25
8.6 TEST RESULTS	25
9 . MEASUREMENT INSTRUMENTS LIST	26
10 . EUT TEST PHOTO	28
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	32
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	37
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	42
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	45
APPENDIX E - BANDWIDTH	96
APPENDIX F - MAXIMUM OUTPUT POWER	101
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	107

Table of Contents	Page
APPENDIX H - POWER SPECTRAL DENSITY	114

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jun. 28, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart C (15.247)				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st

Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's Test Firm Registration Number for FCC: 357015

BTL's Designation Number for FCC: CN1240

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U, (dB)
DG-C02	CISPR	150kHz ~ 30MHz	2.60

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9kHz ~ 30MHz	V	3.79
		9kHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	4.88
		30MHz ~ 200MHz	H	4.14
		200MHz ~ 1,000MHz	V	4.62
		200MHz ~ 1,000MHz	H	4.80
		1GHz ~ 6GHz	-	4.58
		6GHz ~ 18GHz	-	5.18
		18GHz ~ 26.5GHz	-	3.62
		26.5GHz ~ 40GHz	-	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	55%	AC 120V/60Hz AC 240V/60Hz	Sheldon Ou
Radiated Emissions-9K-30MHz	25°C	60%	AC 120V/60Hz	Sheldon Ou
Radiated Emissions-30 MHz to 1GHz	24°C	68%	AC 120V/60Hz	Sheldon Ou
Radiated Emissions-Above 1000 MHz	24°C	68%	AC 120V/60Hz	Sheldon Ou
Bandwidth	25°C	60%	DC 12V	Hayden Chen
Maximum output power	25°C	60%	DC 12V	Laughing Zhang
Conducted Spurious Emissions	25°C	60%	DC 12V	Hayden Chen
Power Spectral Density	25°C	60%	DC 12V	Hayden Chen

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AC2100 Tri-band Whole Home Mesh WiFi System
Brand Name	Tenda
Test Model	Mesh12
Series Model	MW12, MW12a, MW12c, CM12
Model Difference(s)	Only differ in model name.
Power Source	DC Voltage supplied from AC adapter. Model: BN067-A18012U
Power Rating	I/P: 100-240V~ 50/60Hz 0.6A O/P: 12V — 1.5A
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps
Maximum Output Power Non-Beamforming	IEEE 802.11b: 26.19 dBm (0.4159 W) IEEE 802.11g: 29.03 dBm (0.7998 W) IEEE 802.11n (HT20): 29.98 dBm (0.9954 W) IEEE 802.11n (HT40): 29.42 dBm (0.8750 W)
Maximum Output Power Beamforming	IEEE 802.11n (HT20): 26.42 dBm (0.0439 W) IEEE 802.11n (HT40): 26.41 dBm (0.0428 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n (HT20) CH03 - CH09 for IEEE 802.11n (HT40)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	3.52
2	N/A	N/A	Internal	N/A	3.52

Note: This EUT supports CDD, and all antennas have the same gain, so,

- 1) For Non Beamforming, Directional gain= $G_{ANT} + \text{Array Gain}$.
For output power measurements, Array Gain=0 ($N_{ANT} \leq 4$), so the Directional gain=3.52.
For power spectral density measurements, Array Gain=10log(N_{ANT}/N_{SS}) dB, so the Directional gain=3.52+10log(2/1)=6.53. So, the power spectral density limit is 8-(6.53-6)=7.47.
- 2) For Beamforming, Beamforming Gain: 3dB. So the Directional gain=3+3.52=6.52. So the output power limit is 30-(6.52-6)=29.48

4. Table for Antenna Configuration:

Non Beamforming:

Operating Mode \ TX Mode	1TX	2TX
IEEE 802.11b	V (Ant. 1)	-
IEEE 802.11g	V (Ant. 1)	-
IEEE 802.11n(HT20)	-	V (Ant. 1+ Ant. 2)
IEEE 802.11n(HT40)	-	V (Ant. 1+ Ant. 2)

Beamforming:

Operating Mode \ TX Mode	2TX
IEEE 802.11n(HT20)	V (Ant. 1+ Ant. 2)
IEEE 802.11n(HT40)	V (Ant. 1+ Ant. 2)

2.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09
Mode 5	TX N-20 Mode Channel 06

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode:	Description
Mode 5	TX N-20 Mode Channel 06

Radiated emissions test - Below 1GHz	
Final Test Mode:	Description
Mode 5	TX N-20 Mode Channel 06

Radiated emissions test- Above 1GHz	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Output Power test_Non Beamforming	
Final Test Mode	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Maximum Output Power test_ Beamforming	
Final Test Mode	Description
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

Conducted test	
Final Test Mode:	Description
Mode 1	TX B Mode Channel 01/06/11
Mode 2	TX G Mode Channel 01/06/11
Mode 3	TX N-20 MHz Mode Channel 01/06/11
Mode 4	TX N-40 MHz Mode Channel 03/06/09

NOTE:

- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: CCK (1 Mbps)
802.11g mode: OFDM (6 Mbps)
802.11n HT20 mode : BPSK (6.5 Mbps)
802.11n HT40 mode : BPSK (13.5 Mbps)
For radiated emission tests, the highest output powers were set for final test.
- (3) For radiated emission below 1 GHz test, the IEEE 802.11n20 Channel 06 is found to be the worst case and recorded.
- (4) For radiated emission above 1 GHz test, 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (5) The measurements for Power were tested, the Non Beamforming and Beamforming were recorded in this report. The worst case was Non Beamforming and only the worst case was documented for other test items.
- (6) For radiated emissions, the TX WLAN 2.4G N20 Mode 2437 + WLAN 5G N40 Mode 5755MHz was found the worst case of simultaneous transmission and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

Non-Beamforming

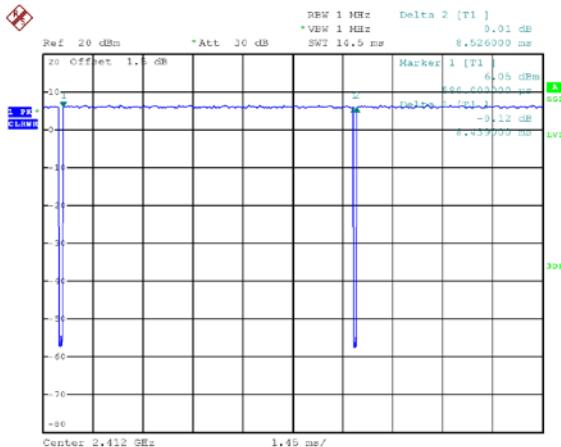
Test Software	MP-v3.6		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	44	46	46
IEEE 802.11g	42	48	42
IEEE 802.11n (HT20)	38	42	38
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	35	44	35

Beamforming

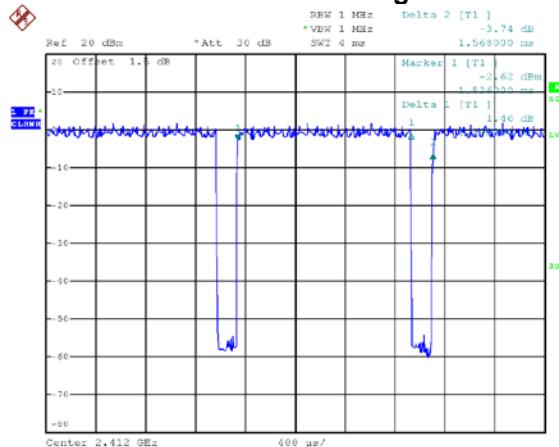
Test Software	MP-v3.6		
Frequency (MHz)	2412	2437	2462
IEEE 802.11n (HT20)	34	34	34
Frequency (MHz)	2422	2437	2452
IEEE 802.11n (HT40)	34	33	34

2.4 DUTY CYCLE

IEEE 802.11b



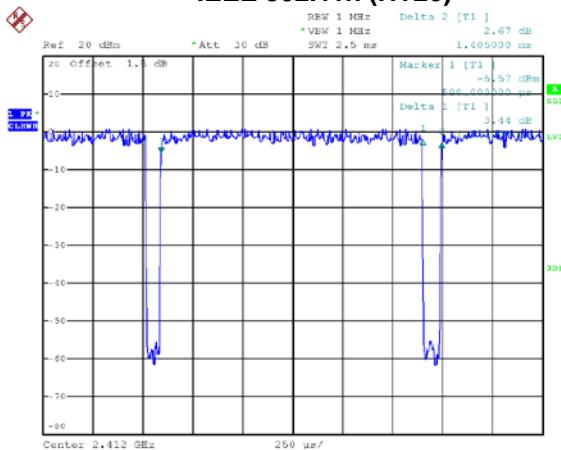
IEEE 802.11g



Date: 16.MAR.2020 09:48:35

Duty cycle = 8.439 ms / 8.526 ms = 98.98%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

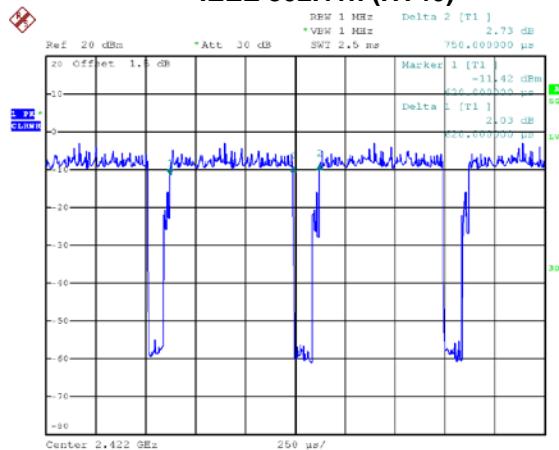
IEEE 802.11n (HT20)



Date: 16.MAR.2020 09:49:30

Duty cycle = 1.392 ms / 1.568 ms = 88.78%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.52$

IEEE 802.11n (HT40)



Date: 16.MAR.2020 09:49:50

Duty cycle = 1.310 ms / 1.405 ms = 93.24%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.30$

Date: 16.MAR.2020 09:51:13

Duty cycle = 0.620 ms / 0.750 ms = 82.67%
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.83$

NOTE:

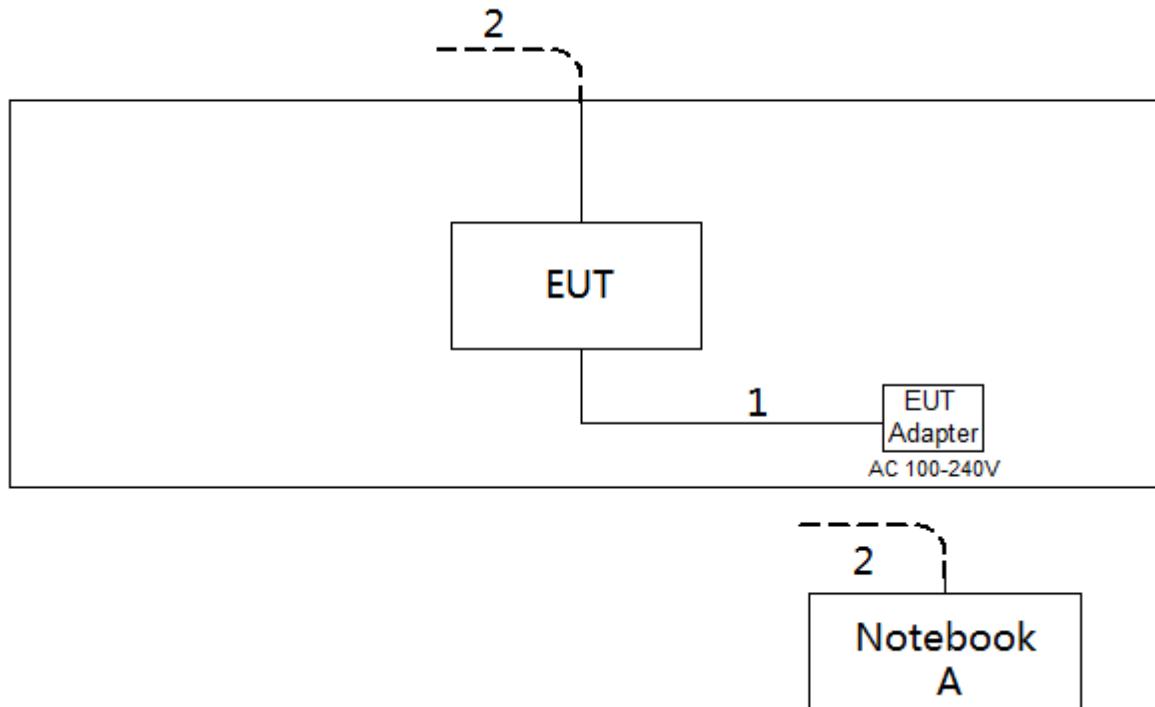
For IEEE 802.11g and IEEE 802.11n (HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz (Duty cycle < 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Dell	Inspiron 15-7559	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

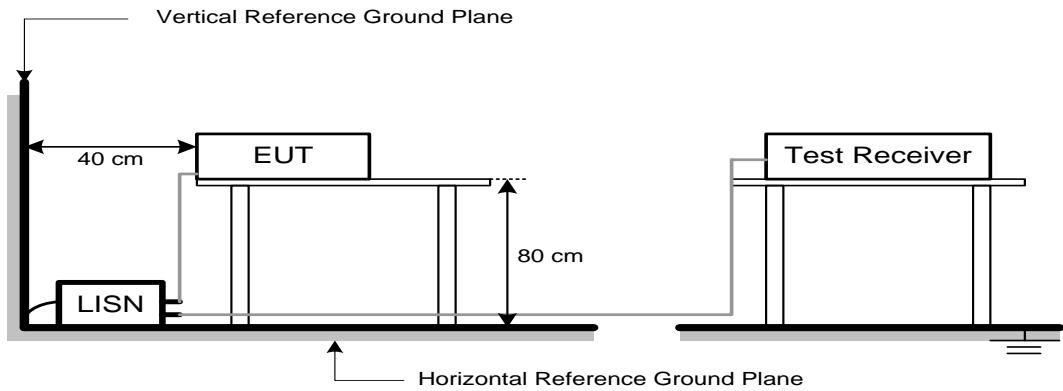
3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP



3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	(dBuV/m at 3 m)	
	Peak	Average
Above 1000	74	54

NOTE:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector

4.2 TEST PROCEDURE

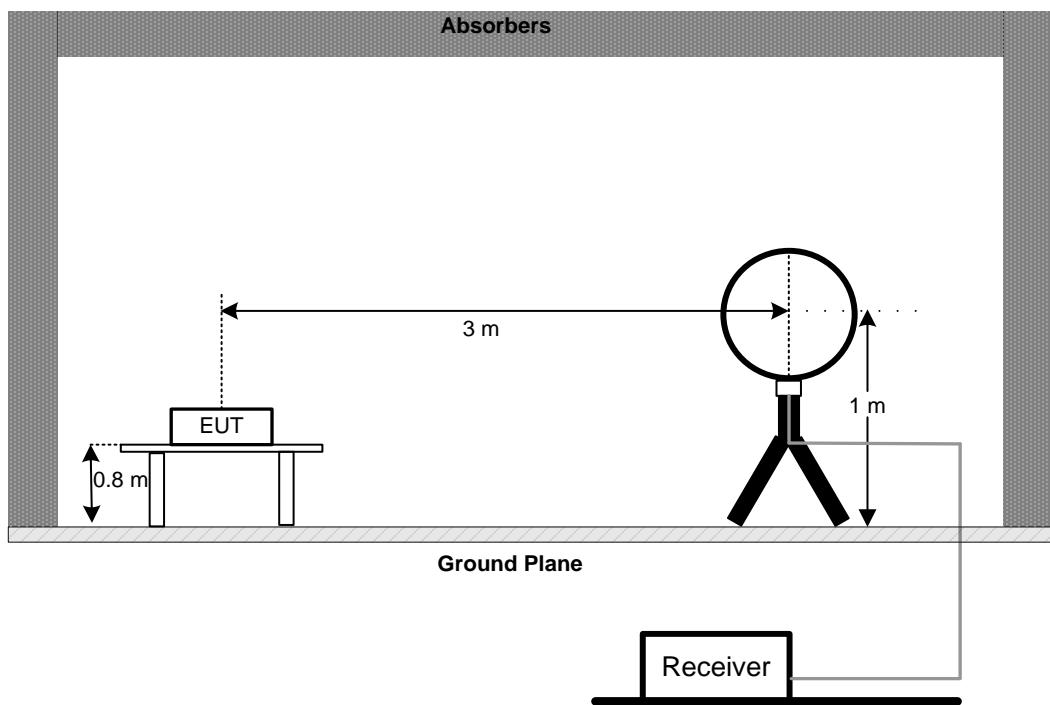
- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

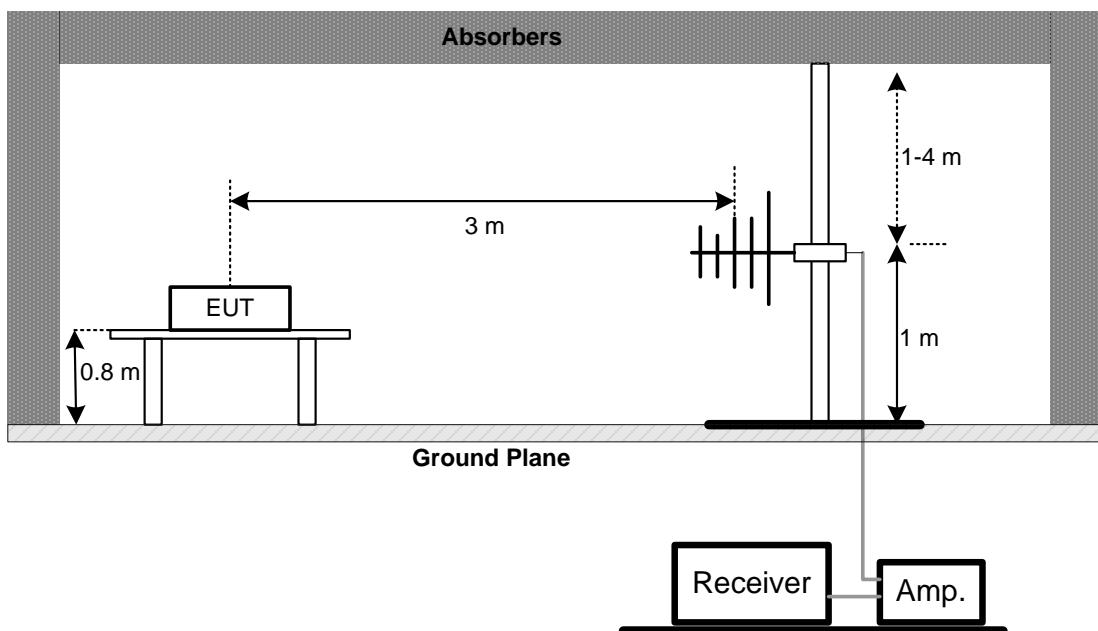
No deviation

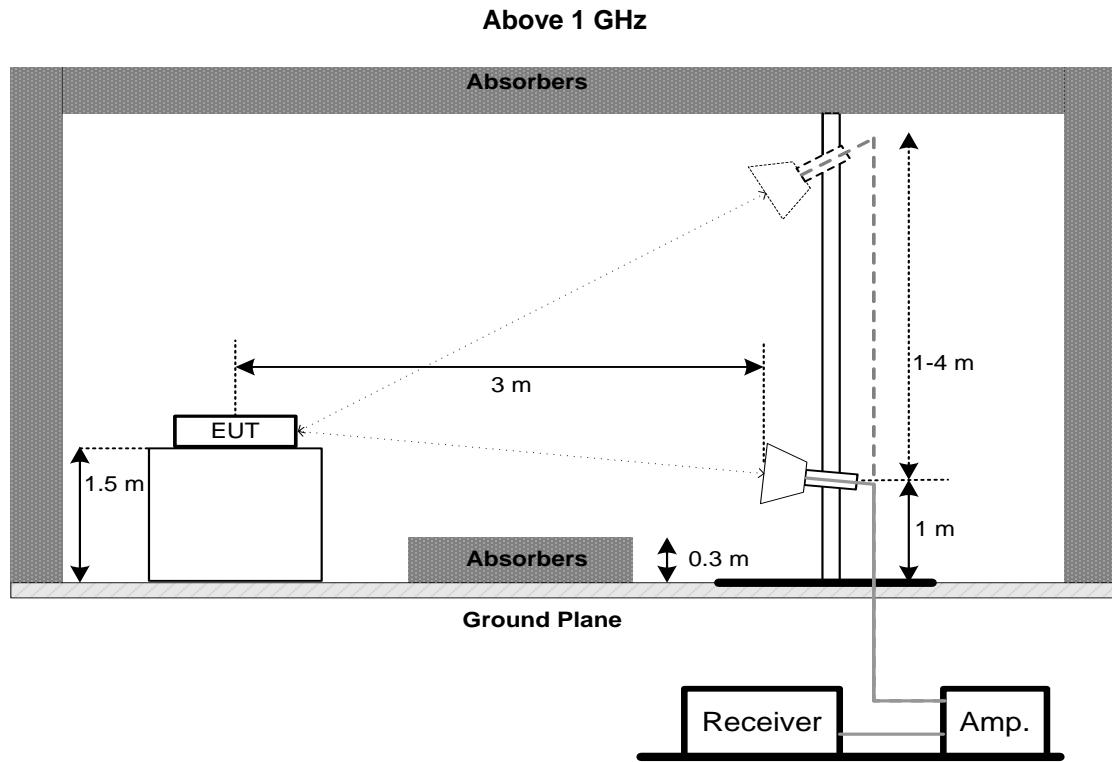
4.4 TEST SETUP

9 kHz-30 MHz



30 MHz to 1 GHz





4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting:
For 6 dB Bandwidth : RBW= 100 kHz, VBW=300 kHz, Sweep time = auto.
For 99% Emission Bandwidth B/G/N-20 Mode: RBW= 300 KHz, VBW=1 MHz, Sweep time = 2.5 ms.
For 99% Emission Bandwidth N-40 Mode: RBW= 1 MHz, VBW=3 MHz, Sweep time = 2.5 ms.
- c. The bandwidth was performed in accordance with method 11.8.1 of ANSI C63.10-2013.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- b. The maximum conducted output power was performed in accordance with method 11.9.1.3 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW= 100 kHz, VBW=300 kHz, Sweep time = Auto.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY TEST

8.1 LIMIT

FCC Part15, Subpart C (15.247)		
Section	Test Item	Limit
15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting: RBW=3 kHz, VBW=10 kHz, Sweep time = Auto.
- c. The Power Spectral Density was performed in accordance with method 11.10.2 of ANSI C63.10-2013.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI Test Receiver	R&S	ESCI	100382	Feb. 28, 2021
2	LISN	EMCO	3816/2	52765	Mar. 01, 2021
3	TWO-LINE V-NETWORK	R&S	ENV216	101447	May 19, 2020
4	50Ω Terminator	SHX	TF5-3	15041305	Mar. 01, 2021
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	Cable	N/A	RG223	12m	Mar. 10, 2021

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1*	Antenna	EM	EM-6876-1	230	Jan. 15, 2022
2	Cable	N/A	RG 213/U	C-102	May 31, 2020
3	EMI Test Receiver	R&S	ESCI	100895	Feb. 28, 2021
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarzbeck	VULB9160	9160-3232	Mar. 09, 2021
2	Amplifier	HP	8447D	2944A08742	Mar. 01, 2021
3	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2020
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75846	Mar. 19, 2021
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 23, 2020
3	Amplifier	Agilent	8449B	3008A02584	Aug. 03, 2020
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 07, 2021
5	Receiver	Agilent	N9038A	MY52130039	Aug. 03, 2020
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jun. 29, 2020
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

**Bandwidth &
Antenna Conducted Spurious Emissions &
Power Spectral Density**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	Aug. 03, 2020

Maximum Output Power

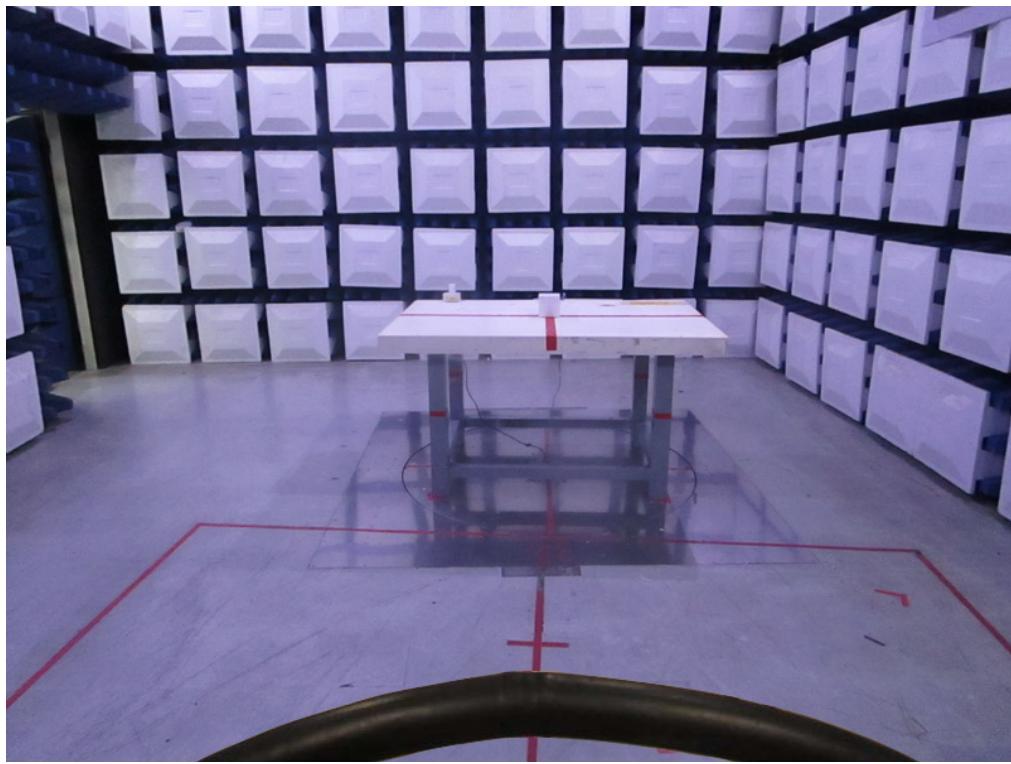
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	Aug. 03, 2020
2	Wideband power sensor	Keysight	N1923A	MY58310004	Aug. 03, 2020

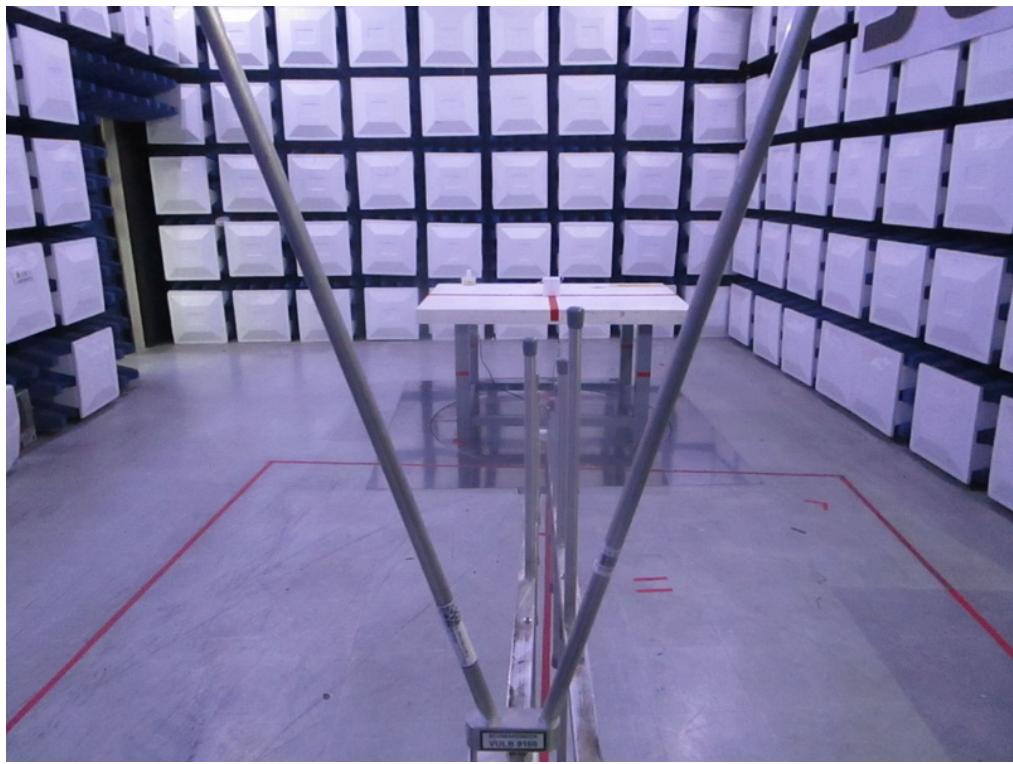
Remark: "N/A" denotes no model name, serial no. or calibration specified.

** calibration period of equipment list is three year.

Except * item, all calibration period of equipment list is one year.

10. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

Radiated Emissions Test Photos**9 kHz to 30 MHz**

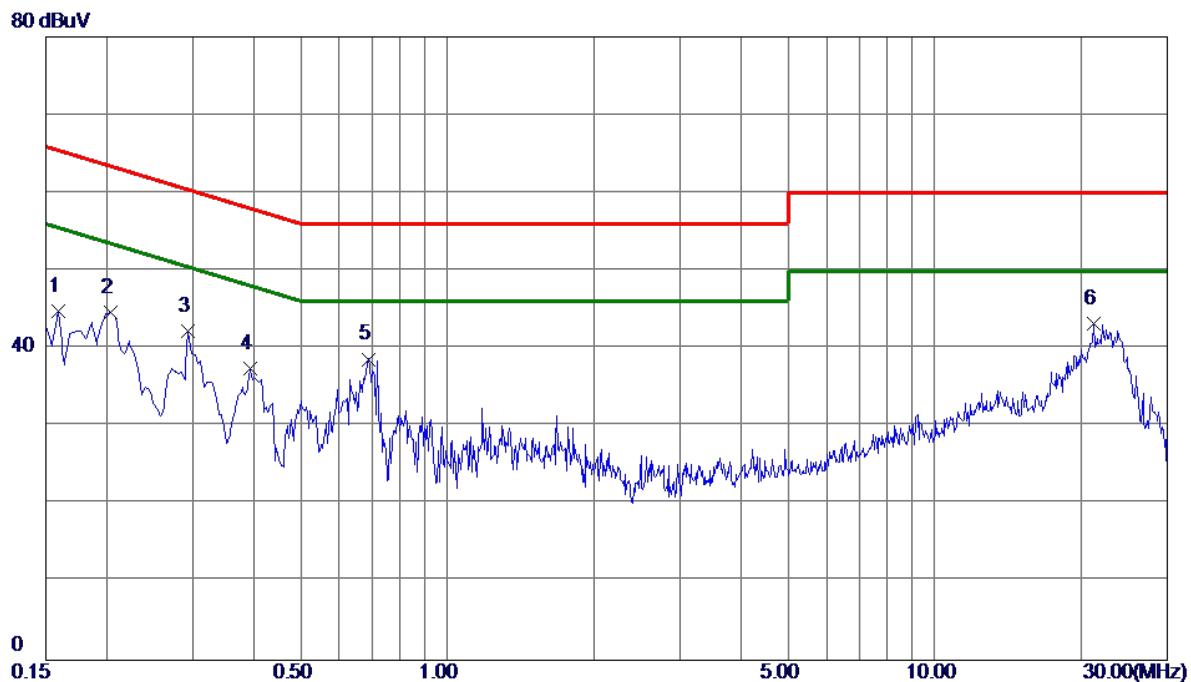
Radiated Emissions Test Photos**30 MHz to 1 GHz**

Radiated Emissions Test Photos**Above 1 GHz**

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode:	TX N-20 Mode Channel 06
Test Voltage:	AC 120V/60Hz

Line

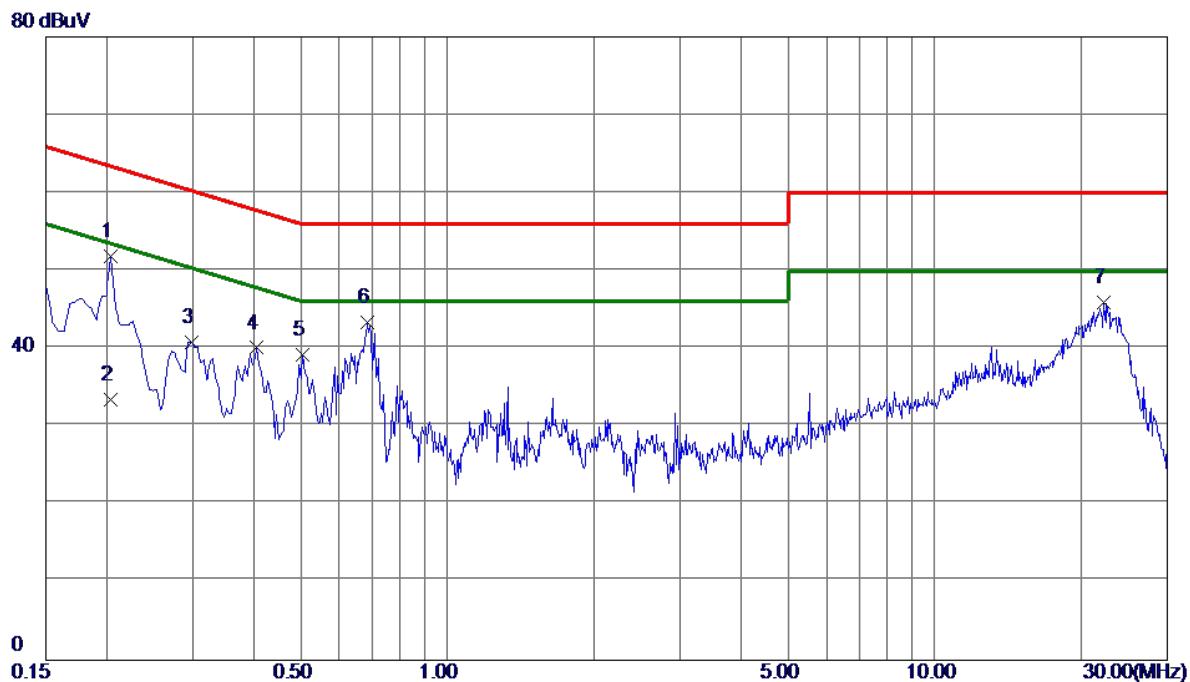


No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1590	34.96	9.82	44.78	65.52	-20.74	Peak	
2	0.2040	34.77	9.83	44.60	63.45	-18.85	Peak	
3	0.2940	32.45	9.86	42.31	60.41	-18.10	Peak	
4	0.3930	27.57	9.89	37.46	58.00	-20.54	Peak	
5	0.6900	28.72	9.92	38.64	56.00	-17.36	Peak	
6 *	21.2505	31.98	11.20	43.18	60.00	-16.82	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20 Mode Channel 06
Test Voltage:	AC 120V/60Hz

Neutral

No.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1 *	0.2040	41.89	9.92	51.81	63.45	-11.64	Peak	
2	0.2040	23.50	9.92	33.42	53.45	-20.03	AVG	
3	0.2985	30.89	9.97	40.86	60.28	-19.42	Peak	
4	0.4065	30.05	10.03	40.08	57.72	-17.64	Peak	
5	0.5055	29.13	10.05	39.18	56.00	-16.82	Peak	
6	0.6855	33.27	10.09	43.36	56.00	-12.64	Peak	
7	22.2495	34.44	11.51	45.95	60.00	-14.05	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20 Mode Channel 06
Test Voltage:	AC 240V/60Hz

Line

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2040	34.16	9.83	43.99	63.45	-19.46	peak	
2		0.2985	29.41	9.86	39.27	60.28	-21.01	peak	
3		0.4020	31.10	9.89	40.99	57.81	-16.82	peak	
4		0.5910	28.31	9.91	38.22	56.00	-17.78	peak	
5		0.6855	31.39	9.92	41.31	56.00	-14.69	peak	
6	*	24.2250	35.73	11.16	46.89	60.00	-13.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX N-20 Mode Channel 06
Test Voltage:	AC 240V/60Hz

Neutral

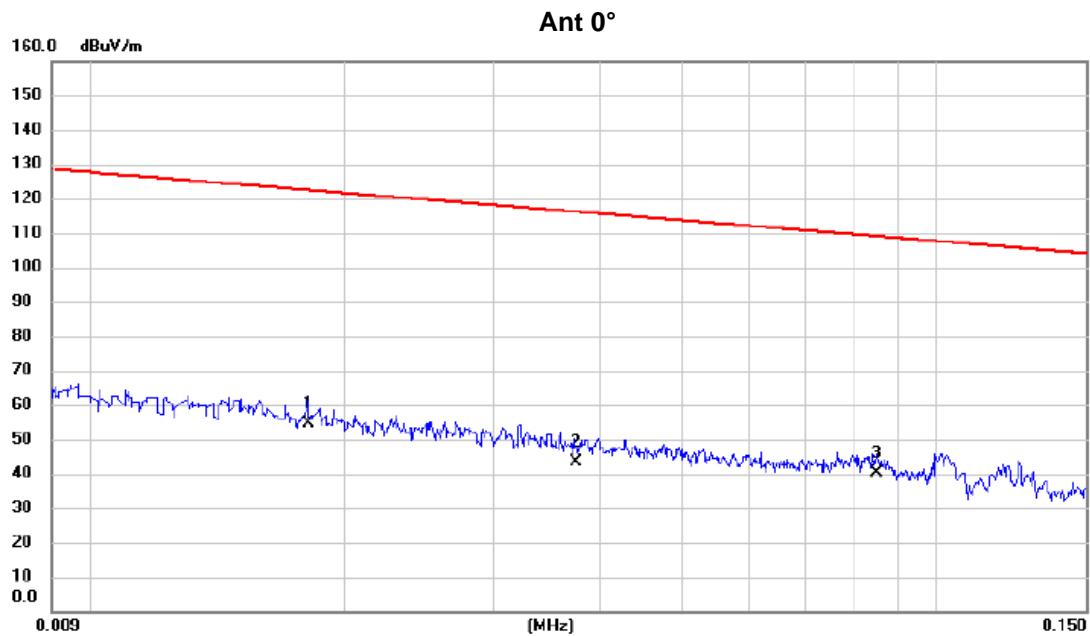
No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2040	38.16	9.92	48.08	63.45	-15.37	peak	
2		0.3030	31.73	9.97	41.70	60.16	-18.46	peak	
3		0.4065	32.84	10.03	42.87	57.72	-14.85	peak	
4		0.7125	32.73	10.09	42.82	56.00	-13.18	peak	
5	*	21.8940	40.09	11.51	51.60	60.00	-8.40	peak	
6		21.8940	20.50	11.51	32.01	50.00	-17.99	AVG	
7		24.2835	38.21	11.51	49.72	60.00	-10.28	peak	
8		24.2835	21.10	11.51	32.61	50.00	-17.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode: TX N-20 Mode Channel 06

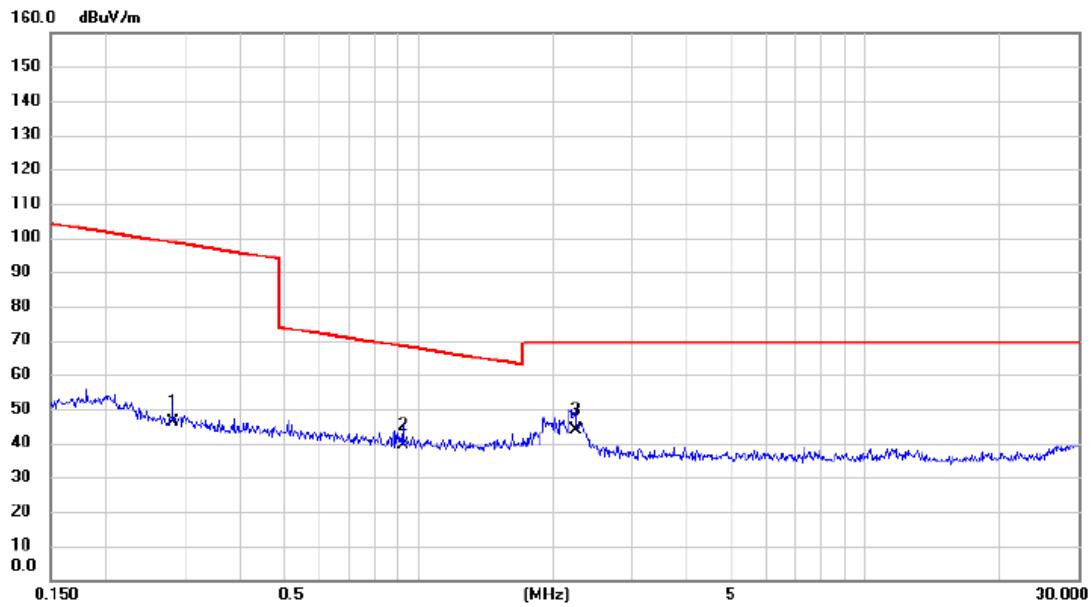


No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
		Level	Factor	ment				
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1 *	0.0181	40.32	14.39	54.71	122.45	-67.74	AVG	
2	0.0375	29.41	13.89	43.30	116.12	-72.82	AVG	
3	0.0851	26.83	13.54	40.37	109.01	-68.64	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode Channel 06

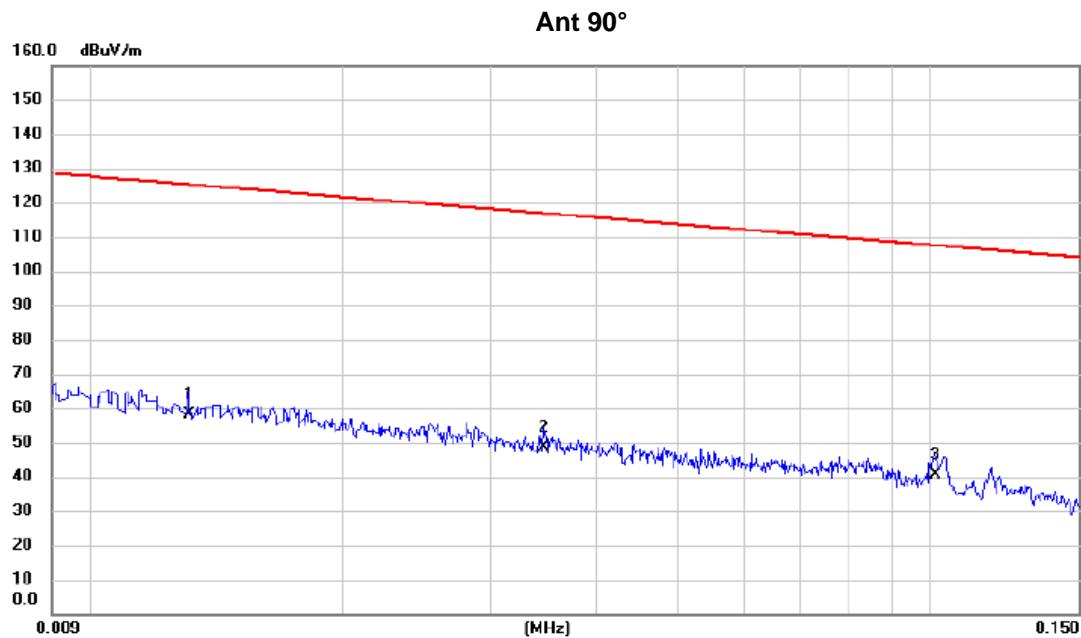
Ant 0°

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.2818	32.56	13.58	46.14	98.61	-52.47	AVG	
2		0.9233	26.84	12.52	39.36	68.30	-28.94	QP	
3	*	2.2486	32.18	11.67	43.85	69.54	-25.69	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode Channel 06

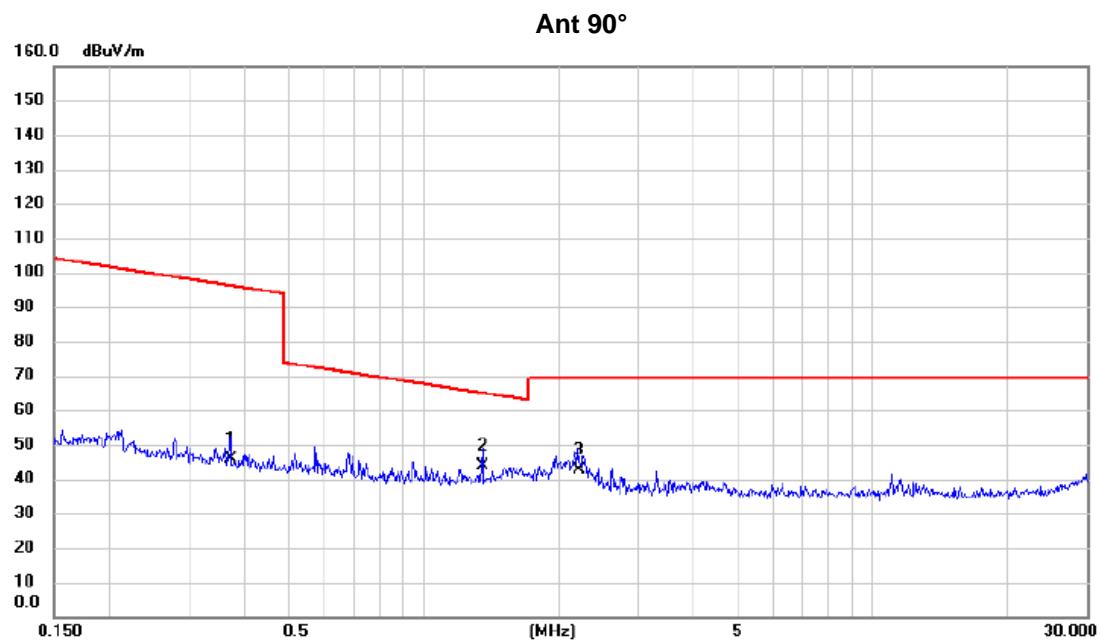


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0131	42.51	15.89	58.40	125.26	-66.86	AVG	
2		0.0347	34.82	13.88	48.70	116.80	-68.10	AVG	
3		0.1012	26.94	13.54	40.48	107.50	-67.02	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode Channel 06



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.3712	32.61	13.37	45.98	96.21	-50.23	AVG	
2	*	1.3521	31.65	12.26	43.91	64.98	-21.07	QP	
3		2.2132	30.82	11.69	42.51	69.54	-27.03	QP	

REMARKS:

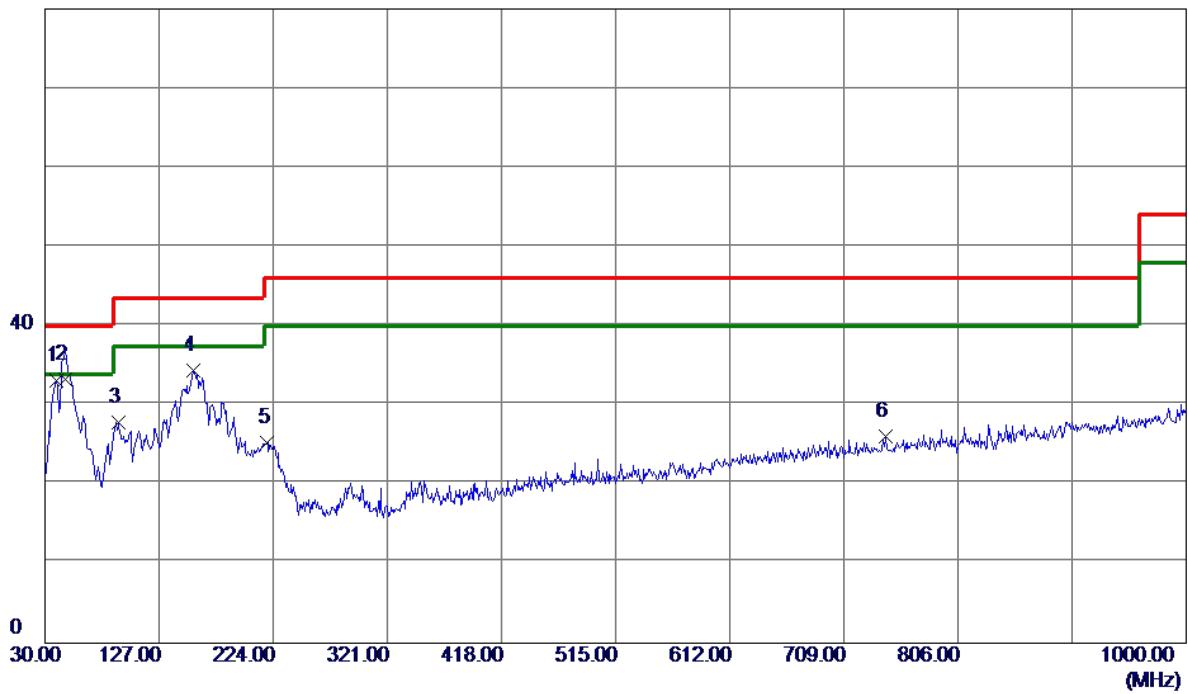
- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode: TX N-20 Mode Channel 06

Vertical

80 dBuV/m



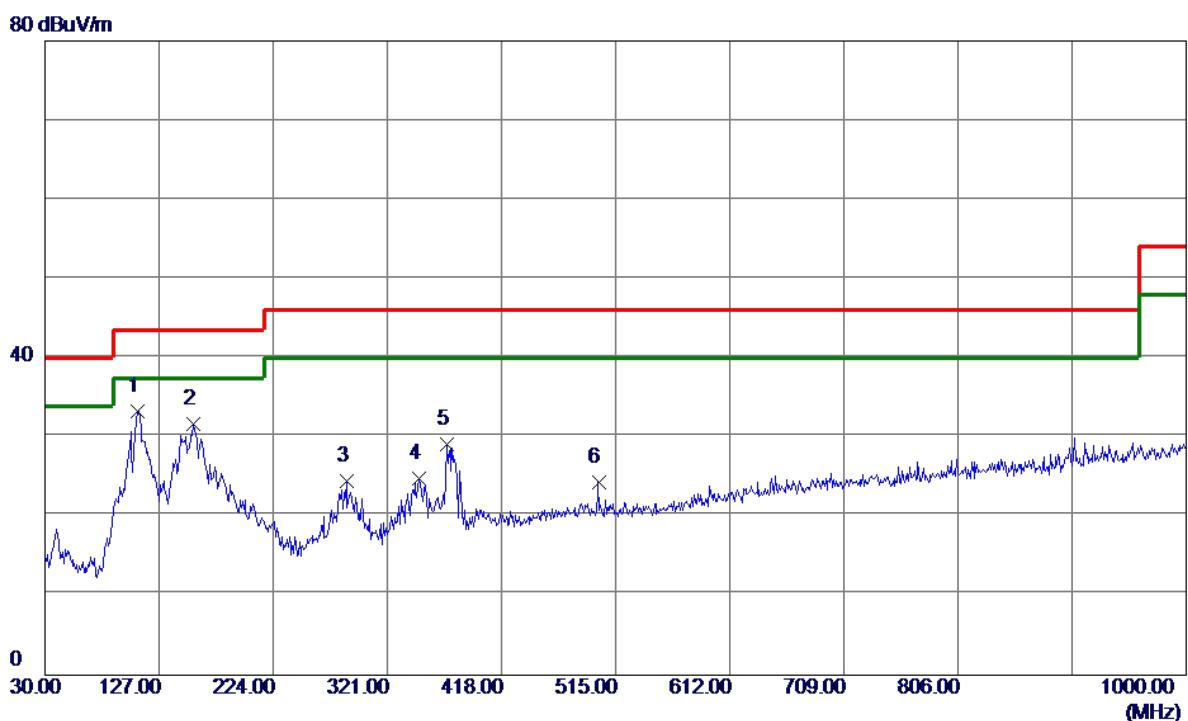
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	39.7000	46.76	-13.71	33.05	40.00	-6.95	Peak		
2 *	47.4600	47.48	-14.13	33.35	40.00	-6.65	QP		
3	92.0800	43.71	-15.85	27.86	43.50	-15.64	Peak		
4	156.1000	46.05	-11.62	34.43	43.50	-9.07	Peak		
5	219.1500	40.16	-14.87	25.29	46.00	-20.71	Peak		
6	744.8900	30.22	-4.15	26.07	46.00	-19.93	Peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20 Mode Channel 06

Horizontal



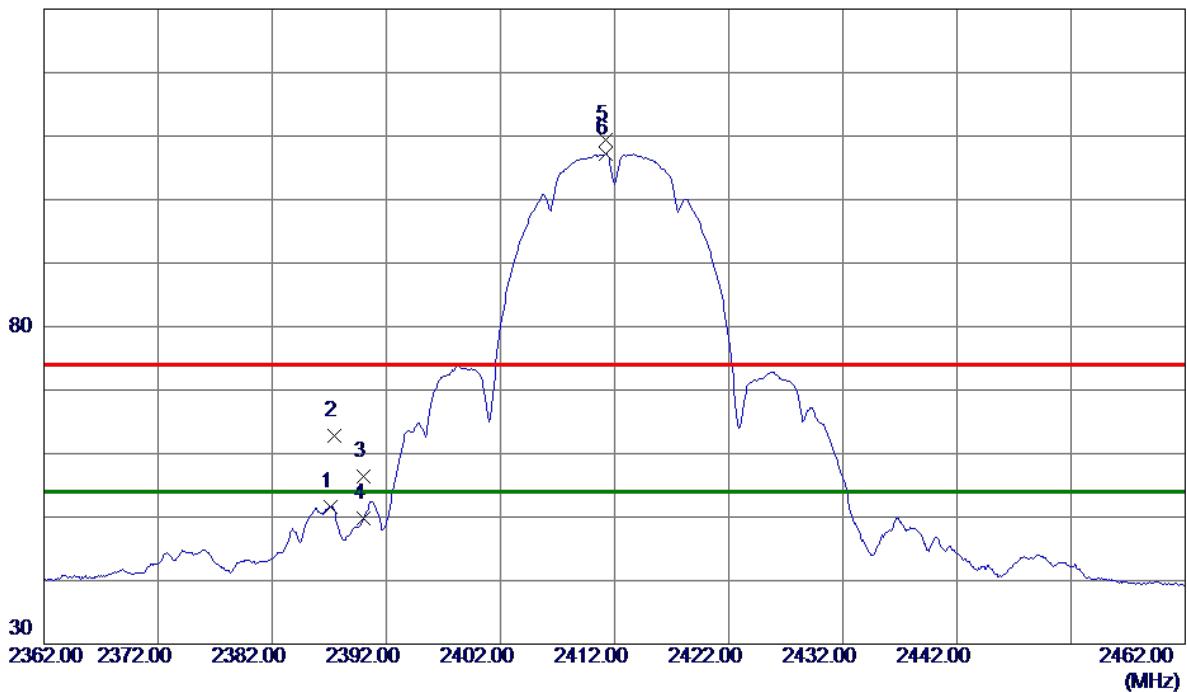
No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit Margin		Detector	Comment
					MHz	dBuV/m	dB	dBuV/m
1 *	108. 5700	48. 00	-14. 69	33. 31	43. 50	-10. 19	Peak	
2	156. 1000	43. 24	-11. 62	31. 62	43. 50	-11. 88	Peak	
3	286. 0799	36. 91	-12. 36	24. 55	46. 00	-21. 45	Peak	
4	348. 1600	35. 77	-10. 90	24. 87	46. 00	-21. 13	Peak	
5	371. 4400	39. 47	-10. 38	29. 09	46. 00	-16. 91	Peak	
6	500. 4500	32. 37	-8. 03	24. 34	46. 00	-21. 66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode: TX B Mode 2412 MHz

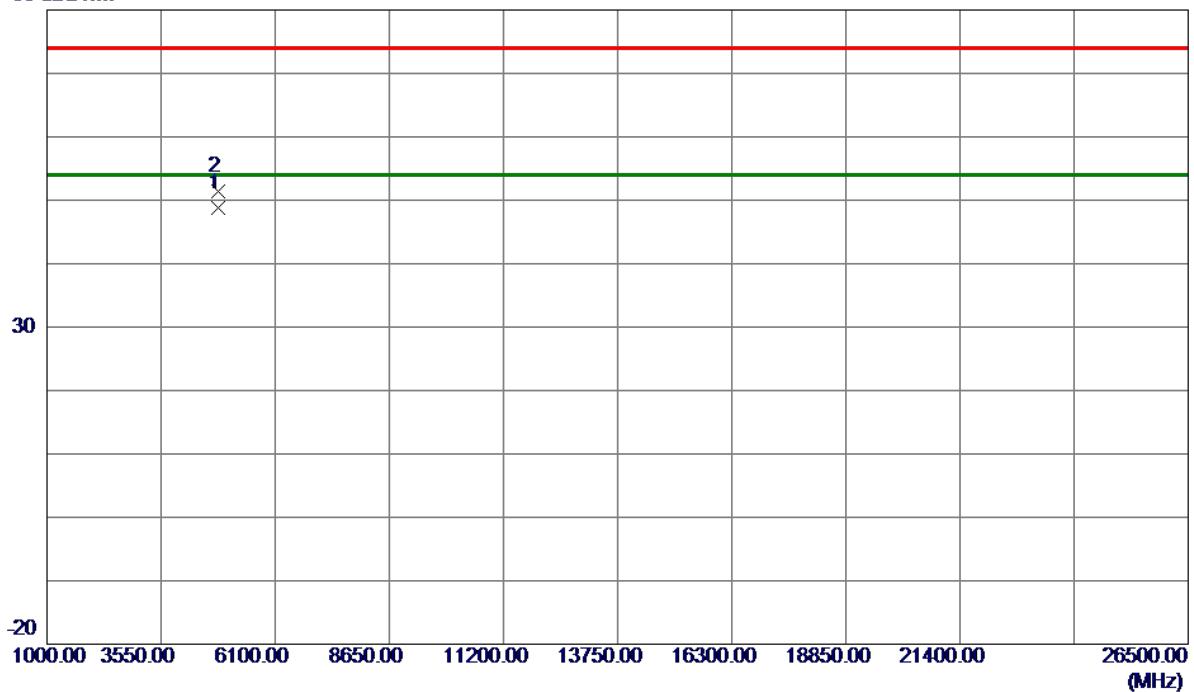
Vertical**130 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2387.1000	44.78	6.90	51.68	54.00	-2.32	AVG	
2	2387.4000	55.82	6.90	62.72	74.00	-11.28	Peak	
3	2390.0000	49.57	6.89	56.46	74.00	-17.54	Peak	
4	2390.0000	42.99	6.89	49.88	54.00	-4.12	AVG	
5	2411.2000	102.59	6.87	109.46	74.00	35.46	Peak	No Limit
6 *	2411.2000	100.27	6.87	107.14	54.00	53.14	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9500	45.13	3.60	48.73	54.00	-5.27	AVG	
2	4824.0550	47.76	3.60	51.36	74.00	-22.64	Peak	

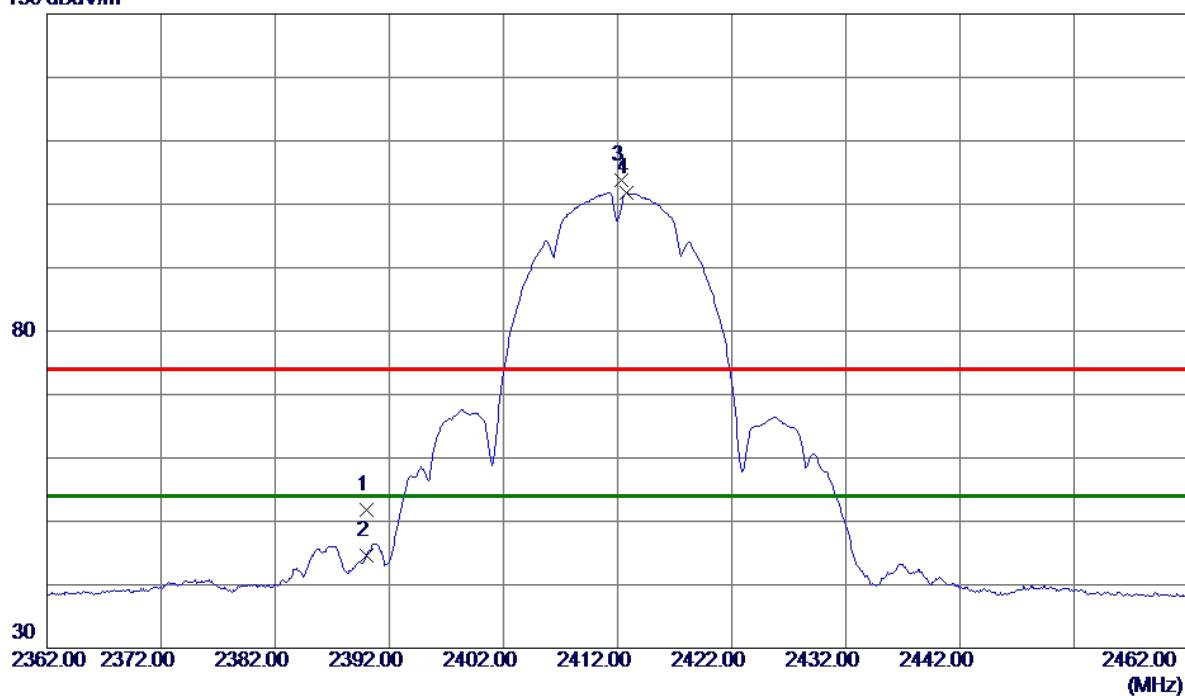
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

Horizontal

130 dBuV/m

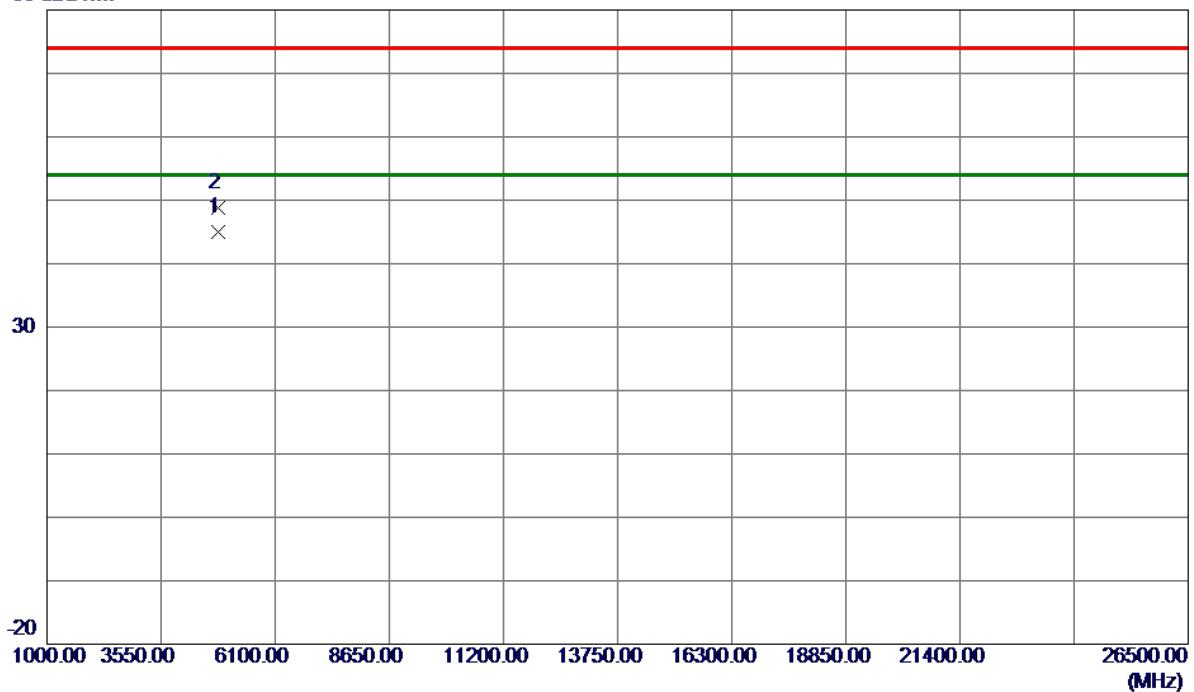


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	44.92	6.89	51.81	74.00	-22.19	Peak		
2	2390.0000	37.66	6.89	44.55	54.00	-9.45	AVG		
3	2412.3000	96.95	6.87	103.82	74.00	29.82	Peak	No Limit	
4 *	2412.8000	95.02	6.87	101.89	54.00	47.89	AVG	No Limit	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2412 MHz

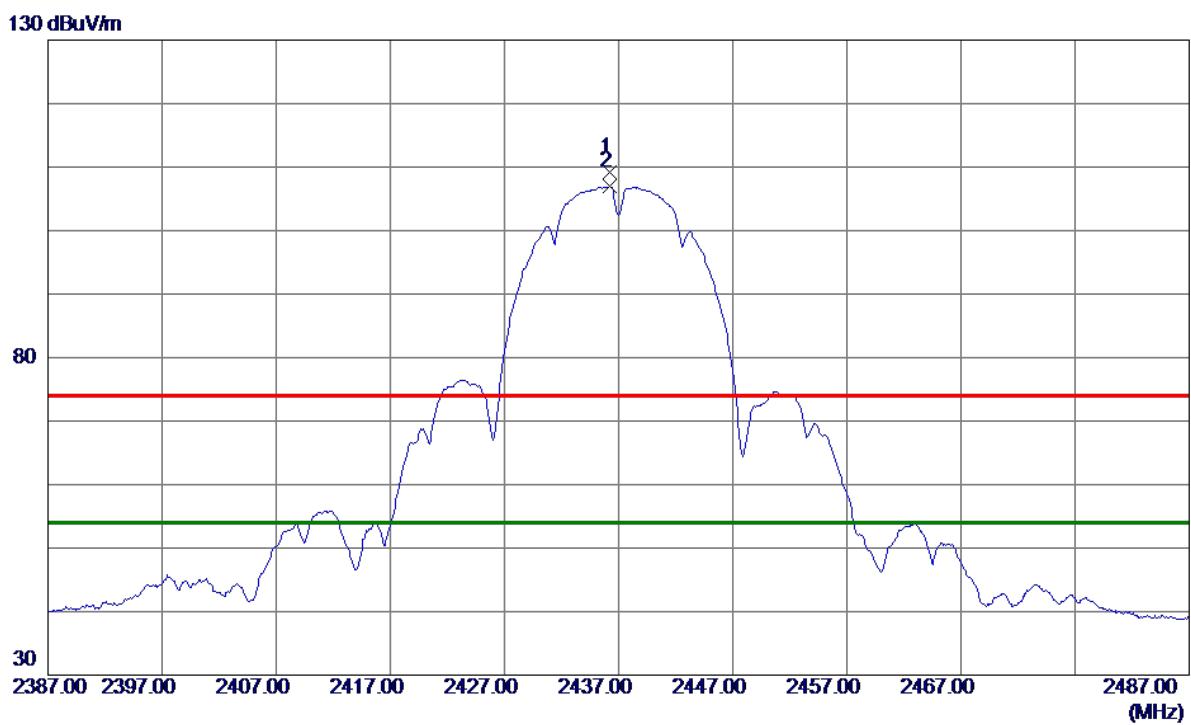
Horizontal**80 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4823.9400	41.35	3.60	44.95	54.00	-9.05	AVG	
2	4824.0550	45.23	3.60	48.83	74.00	-25.17	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

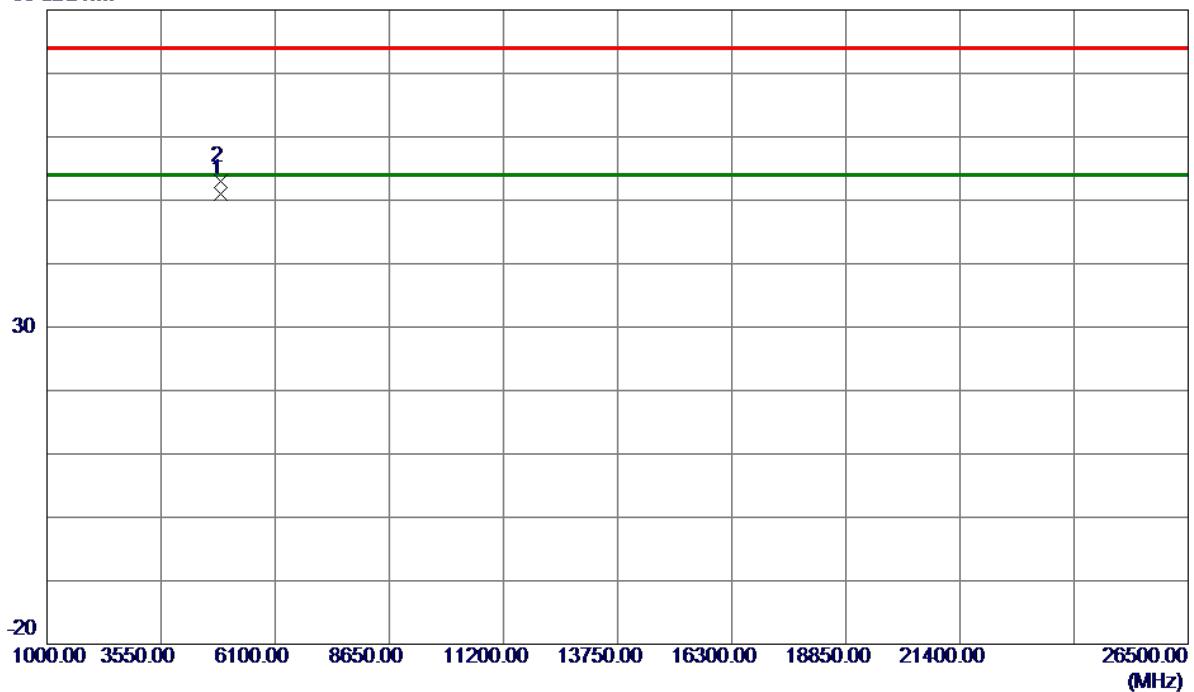
Vertical

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dB	Detector	Comment
1	2436.2000	102.33	6.84	109.17	74.00	35.17	Peak No Limit
2 *	2436.2000	100.10	6.84	106.94	54.00	52.94	AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9700	47.30	3.75	51.05	54.00	-2.95	AVG	
2	4873.9950	49.33	3.75	53.08	74.00	-20.92	Peak	

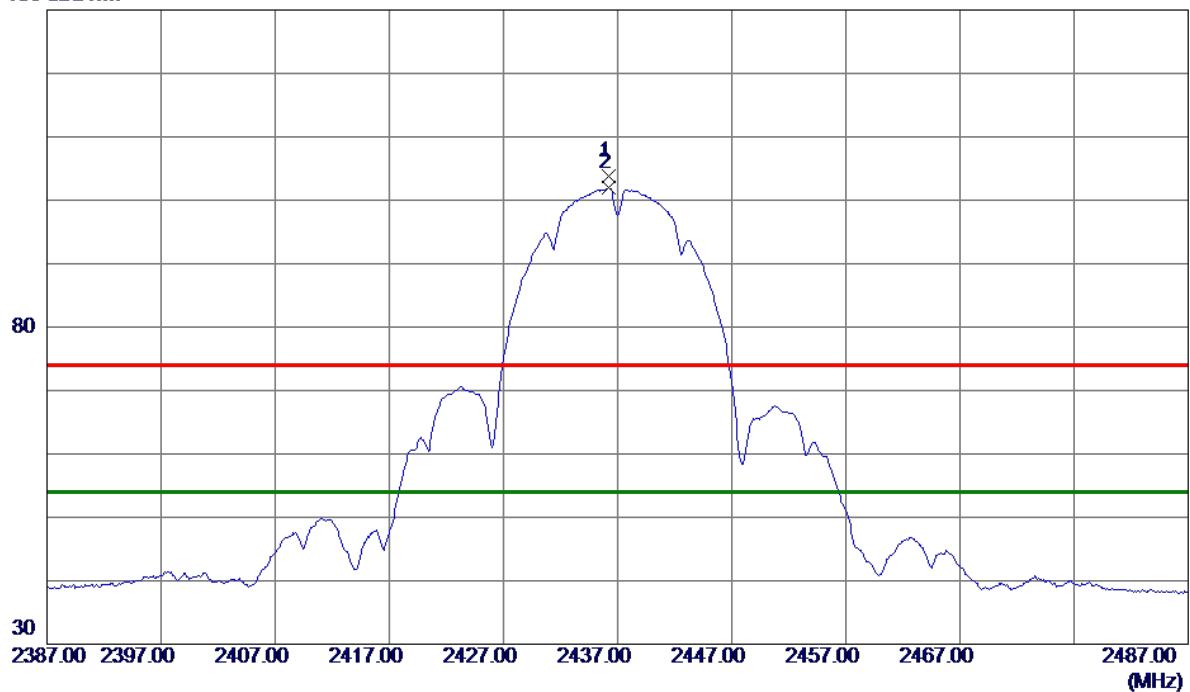
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

Horizontal

130 dBuV/m

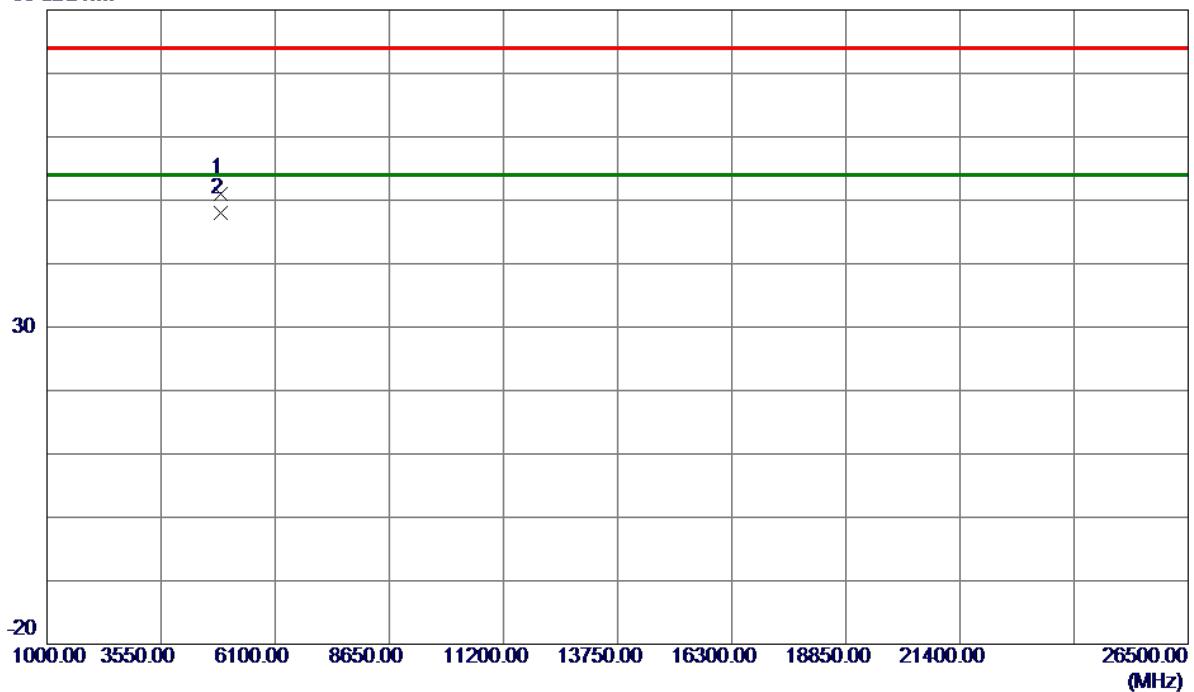


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2436.2000	97.02	6.84	103.86	74.00	29.86	Peak	No Limit
2 *	2436.2000	95.07	6.84	101.91	54.00	47.91	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2437 MHz

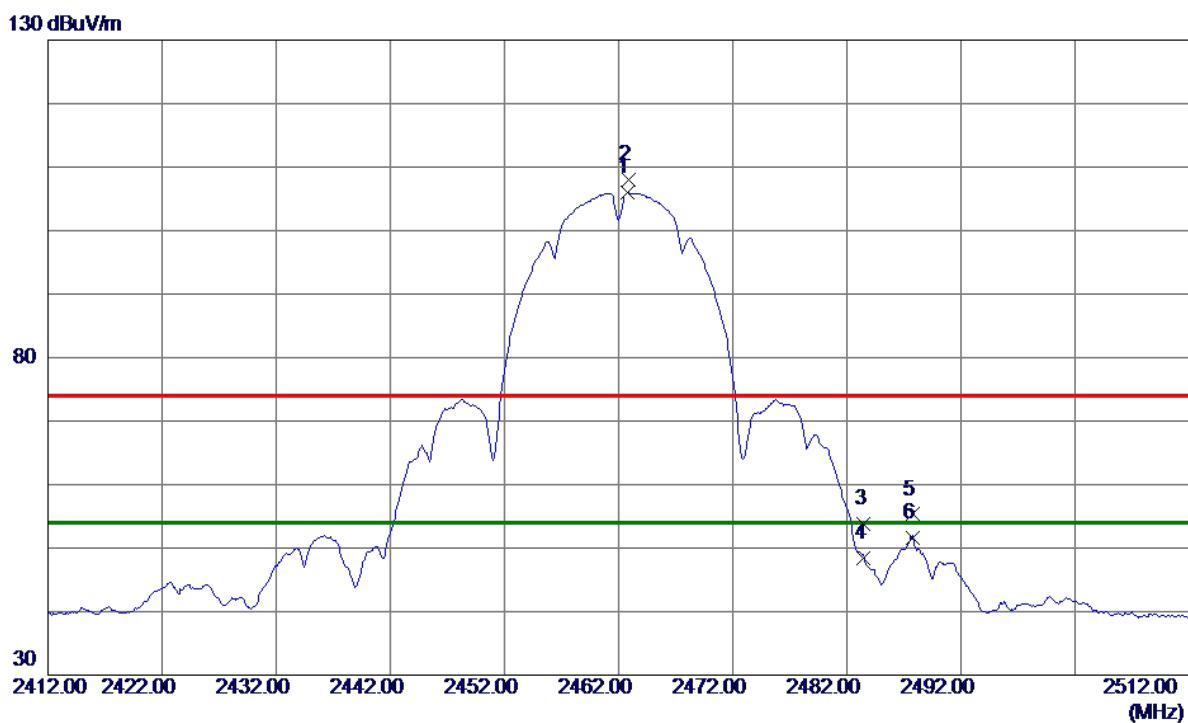
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9550	47.35	3.75	51.10	74.00	-22.90	Peak	
2 *	4873.9650	44.19	3.75	47.94	54.00	-6.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

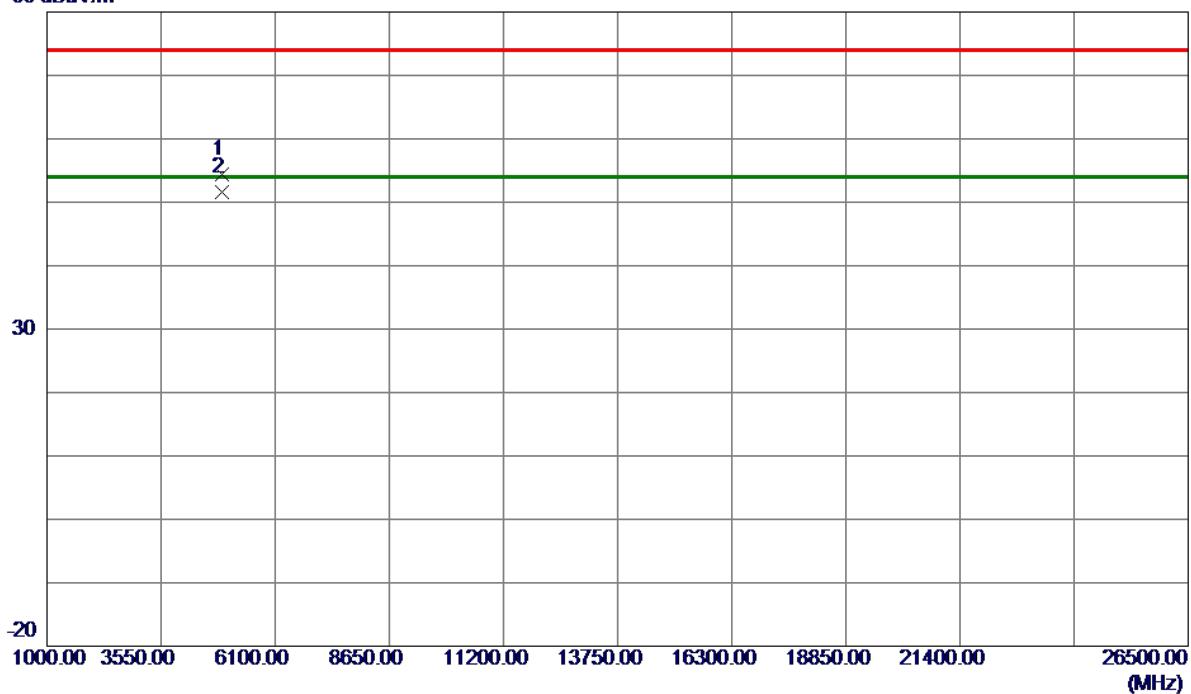
Vertical

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	2462.8000	99.12	6.81	105.93	54.00	51.93	AVG	No Limit
2	2462.9000	101.18	6.81	107.99	74.00	33.99	Peak	No Limit
3	2483.5000	47.08	6.79	53.87	74.00	-20.13	Peak	
4	2483.5000	41.66	6.79	48.45	54.00	-5.55	AVG	
5	2487.8000	48.51	6.79	55.30	74.00	-18.70	Peak	
6	2487.8000	44.85	6.79	51.64	54.00	-2.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9100	50.42	3.90	54.32	74.00	-19.68	Peak	
2 *	4923.9700	47.66	3.90	51.56	54.00	-2.44	AVG	

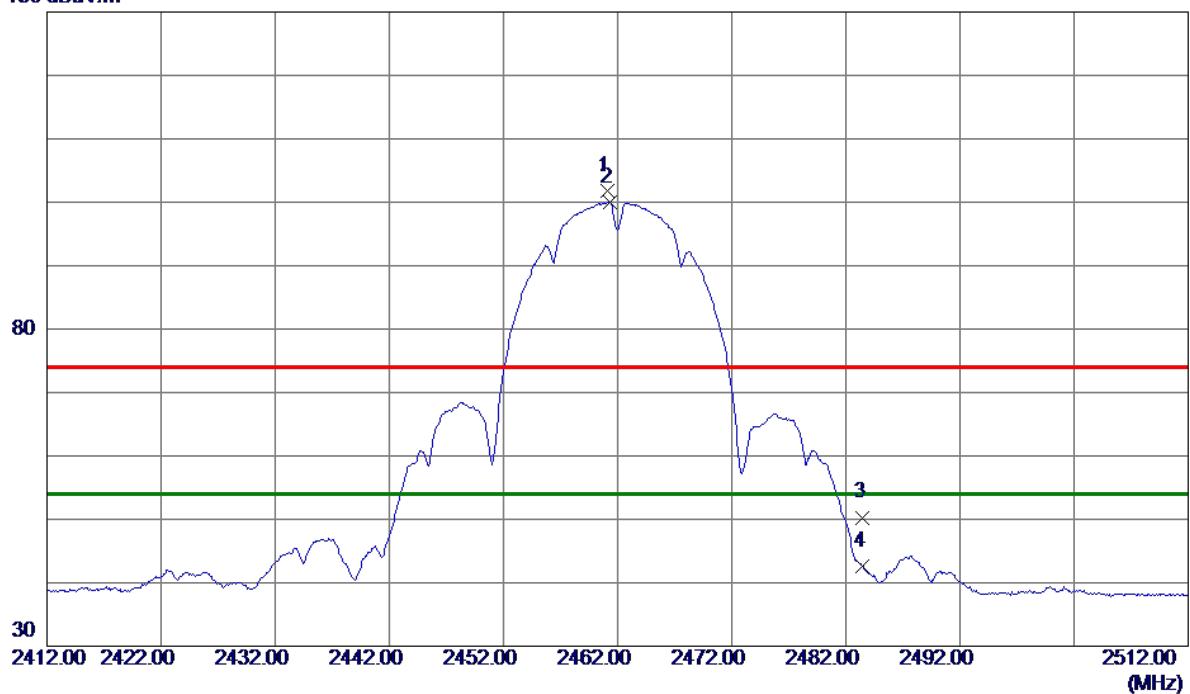
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal

130 dBuV/m

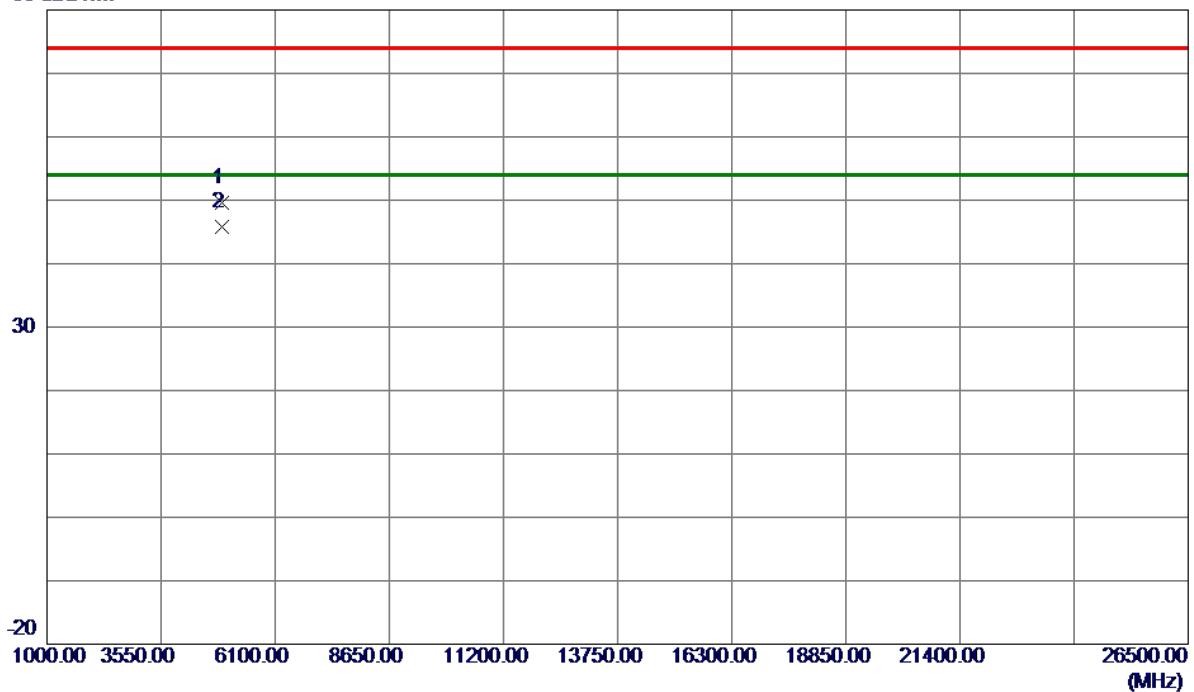


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Detector	Comment
1	2461.1000	95.04	6.82	101.86	74.00	27.86	Peak	No Limit
2 *	2461.3000	93.16	6.82	99.98	54.00	45.98	AVG	No Limit
3	2483.5000	43.51	6.79	50.30	74.00	-23.70	Peak	
4	2483.5000	35.73	6.79	42.52	54.00	-11.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX B Mode 2462 MHz

Horizontal**80 dBuV/m**

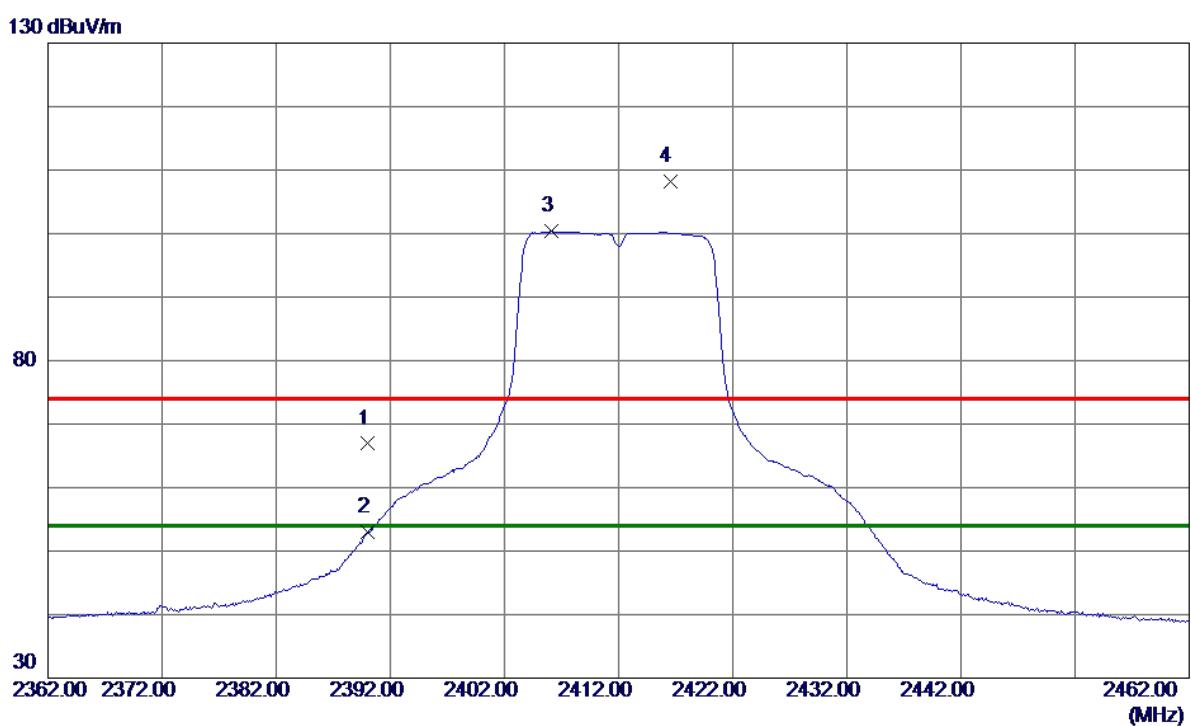
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8050	45.63	3.90	49.53	74.00	-24.47	Peak	
2 *	4923.9800	41.90	3.90	45.80	54.00	-8.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

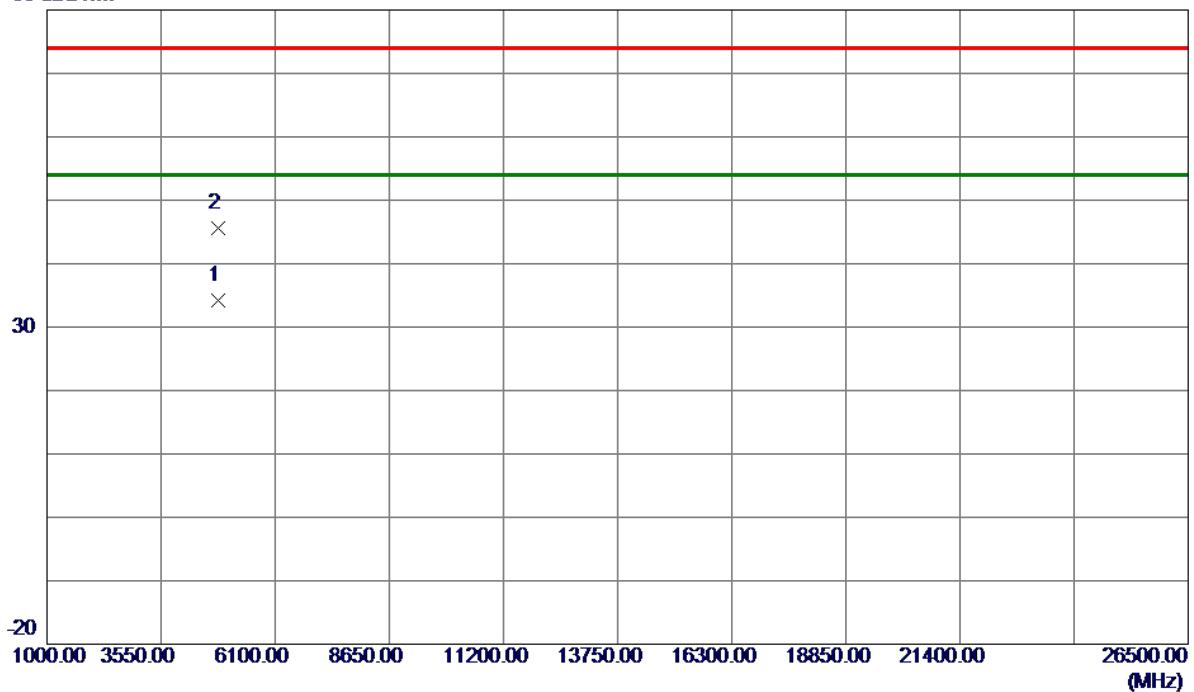
Vertical



REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Vertical**80 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4822.5650	30.53	3.60	34.13	54.00	-19.87	AVG	
2	4824.3700	41.97	3.60	45.57	74.00	-28.43	Peak	

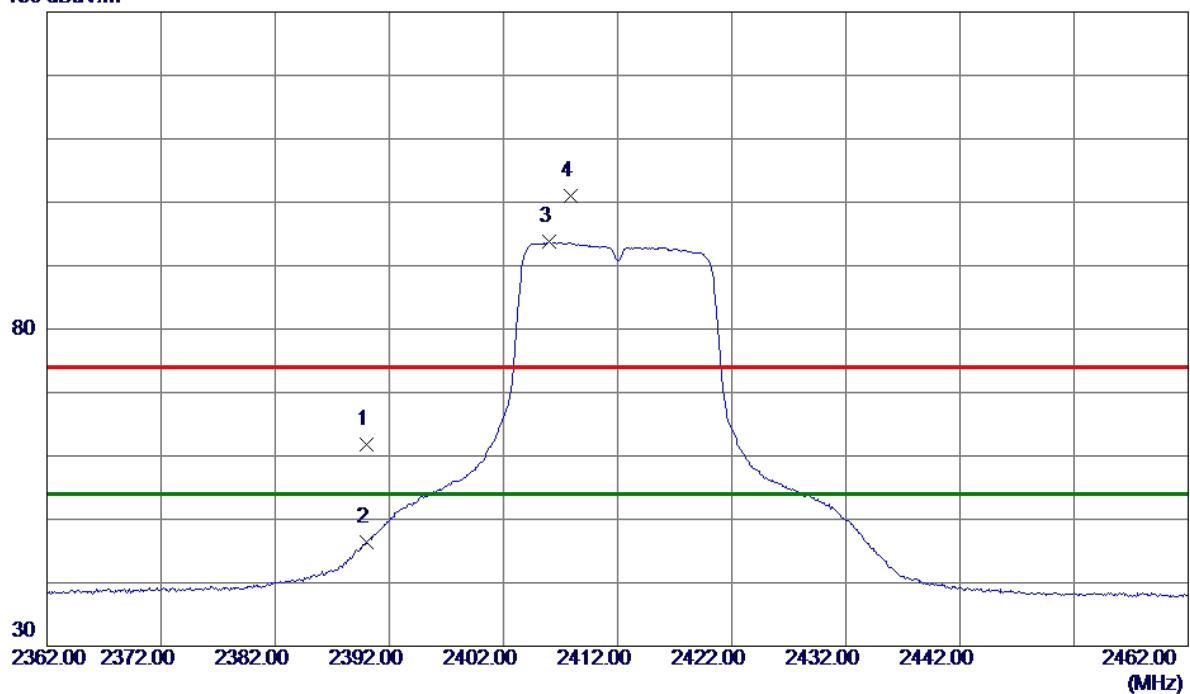
REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

Horizontal

130 dBuV/m

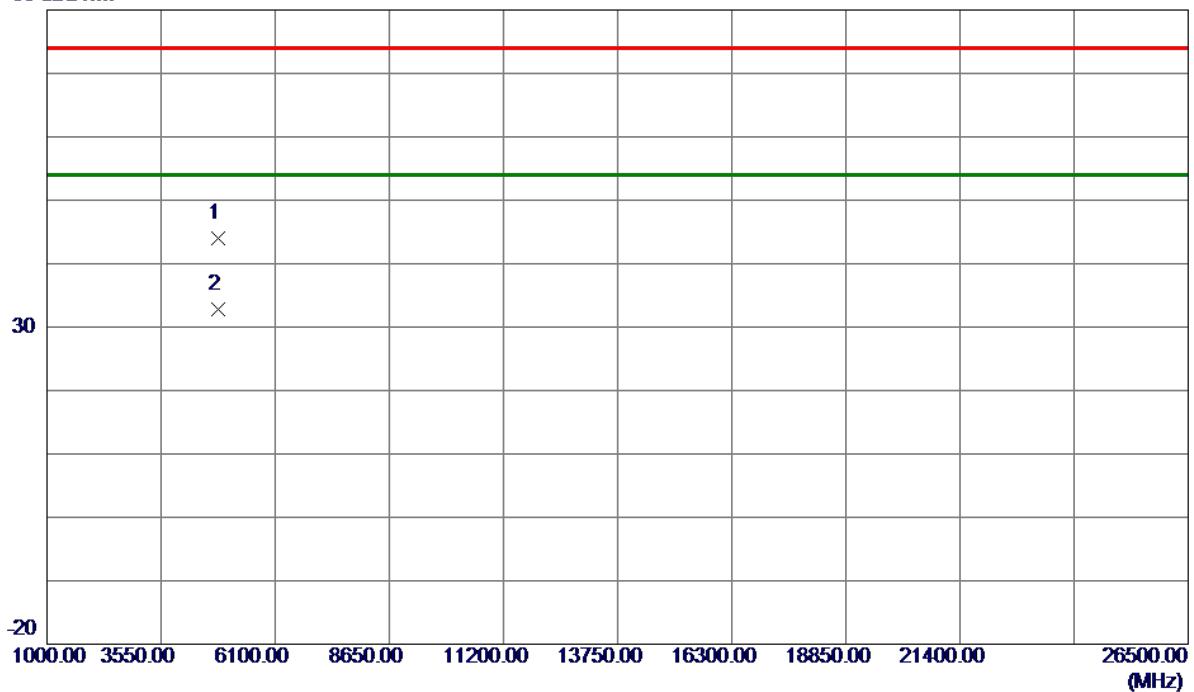


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2390.000	54.89	6.89	61.78	74.00	-12.22	Peak	
2	2390.000	39.48	6.89	46.37	54.00	-7.63	AVG	
3 *	2406.000	86.84	6.88	93.72	54.00	39.72	AVG	No Limit
4	2407.900	94.07	6.87	100.94	74.00	26.94	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2412 MHz

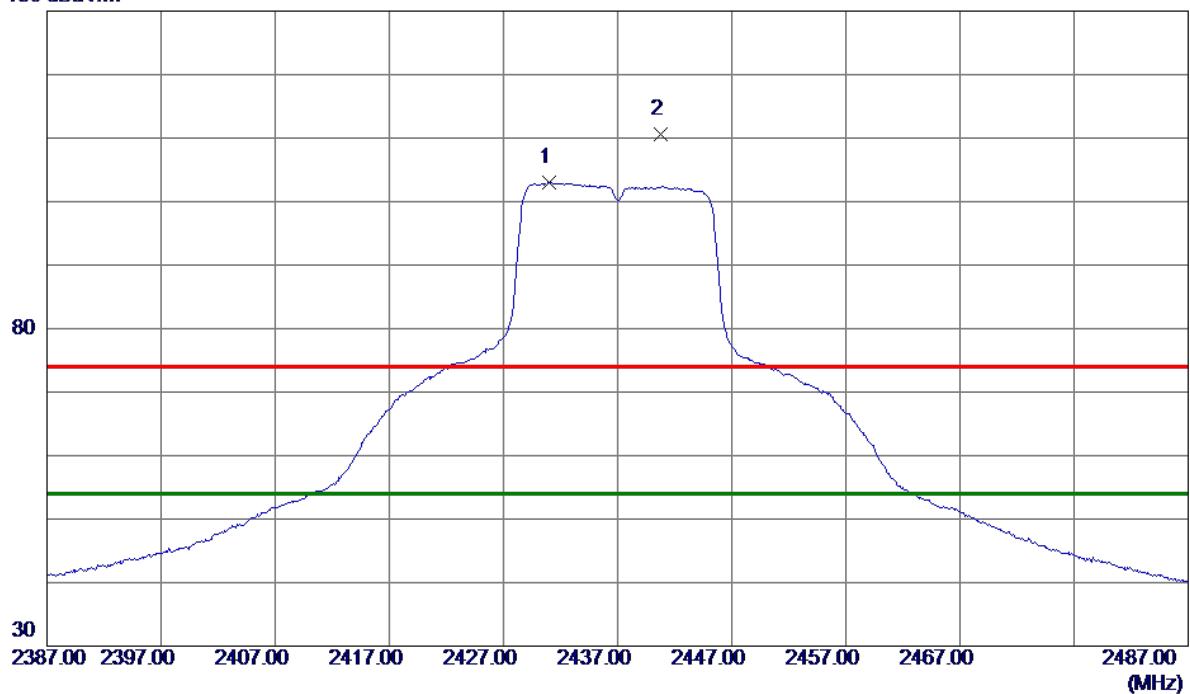
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Detector	Comment
1	4821.8750	40.32	3.59	43.91	74.00	-30.09	Peak	
2 *	4826.0550	29.23	3.61	32.84	54.00	-21.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

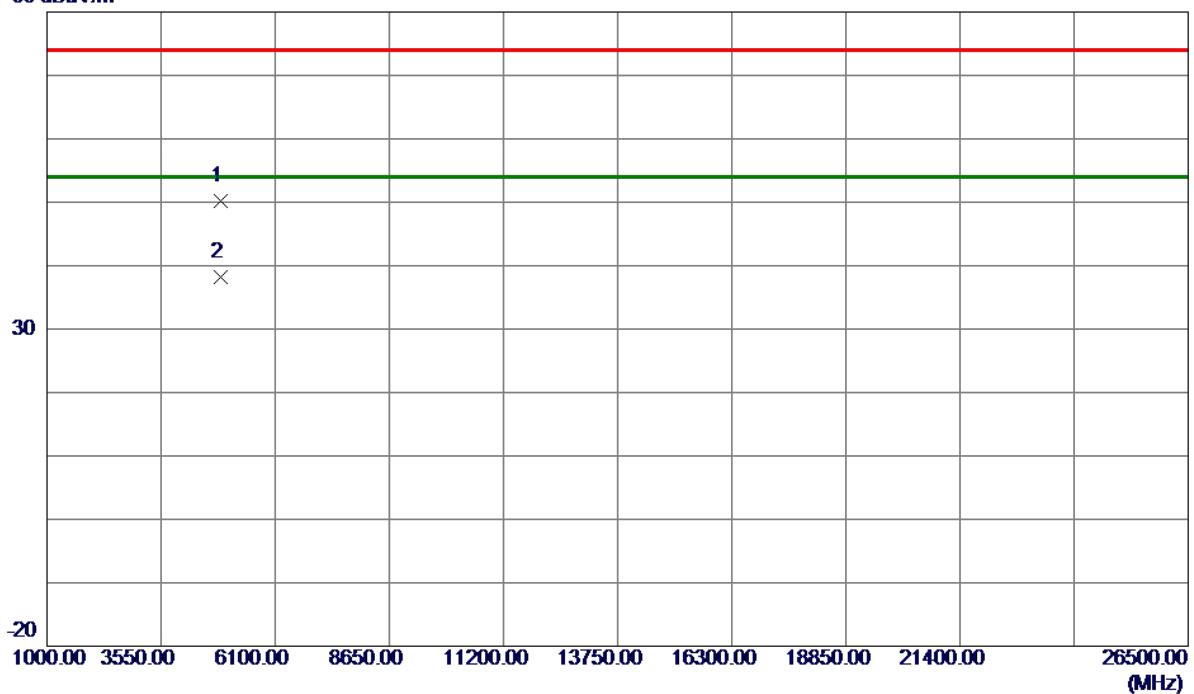
Vertical**130 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1 *	2431.0000	96.12	6.85	102.97	54.00	48.97	AVG
2	2440.8000	103.85	6.84	110.69	74.00	36.69	Peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Vertical**80 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	4873.3600	46.45	3.75	50.20	74.00	-23.80	Peak	
2 *	4874.0099	34.39	3.75	38.14	54.00	-15.86	AVG	

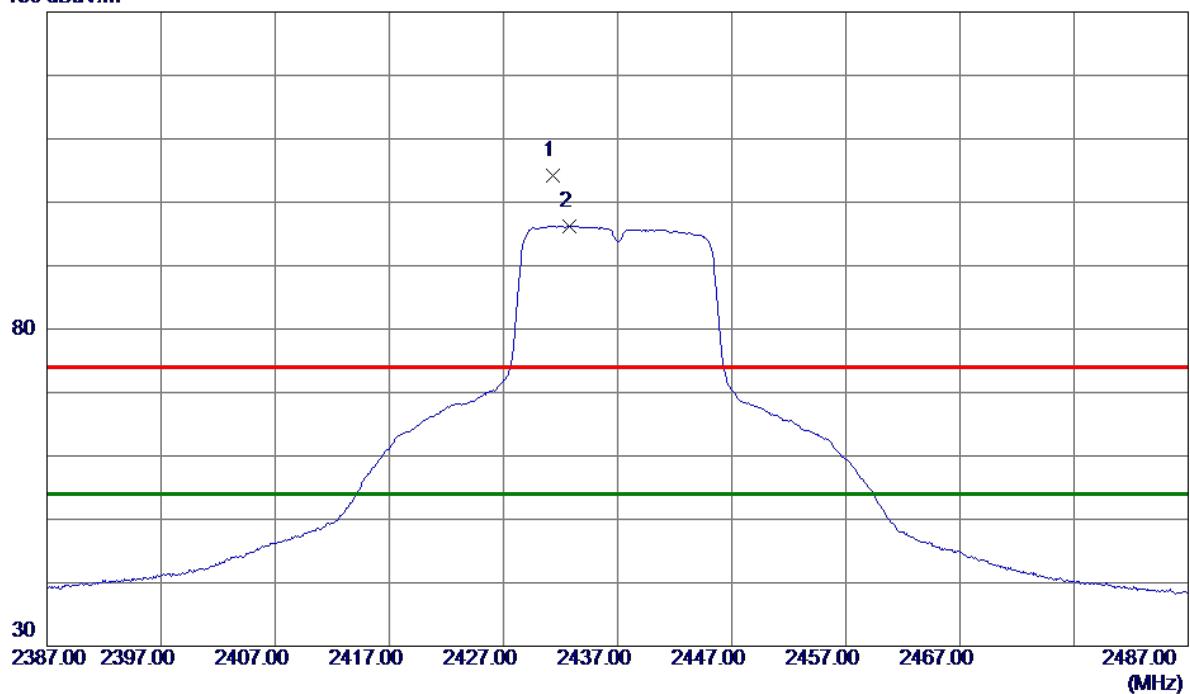
REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

Horizontal

130 dBuV/m

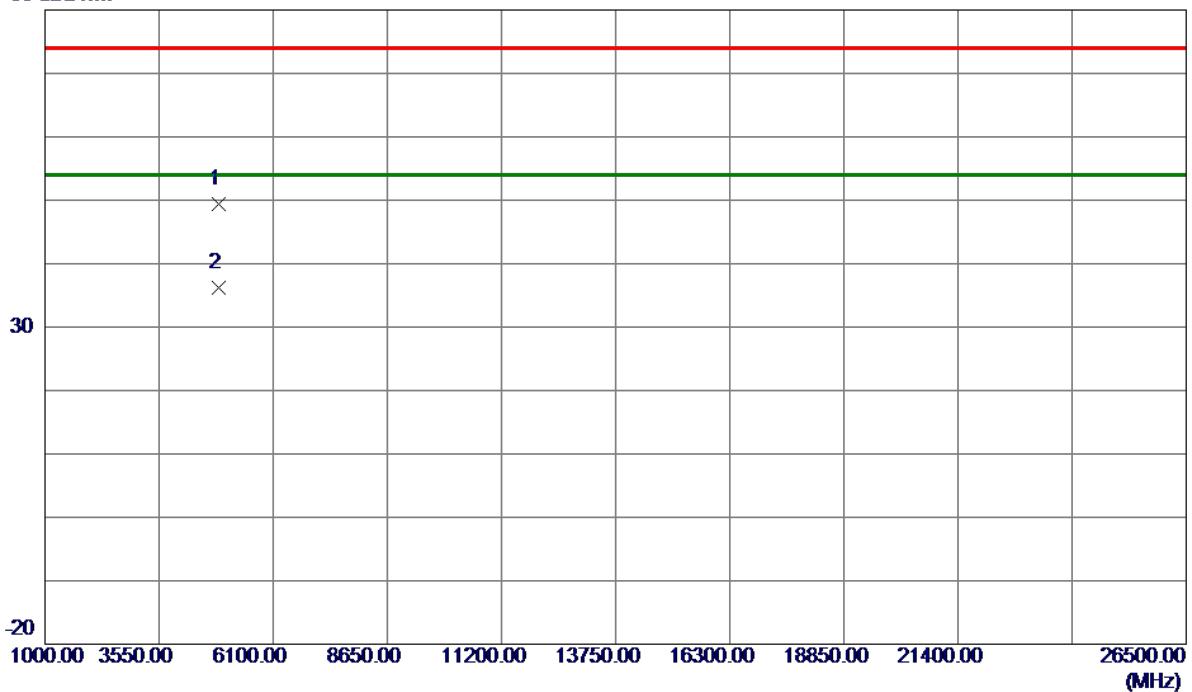


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2431.3000	97.26	6.85	104.11	74.00	30.11	Peak	No Limit
2 *	2432.8000	89.40	6.85	96.25	54.00	42.25	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2437 MHz

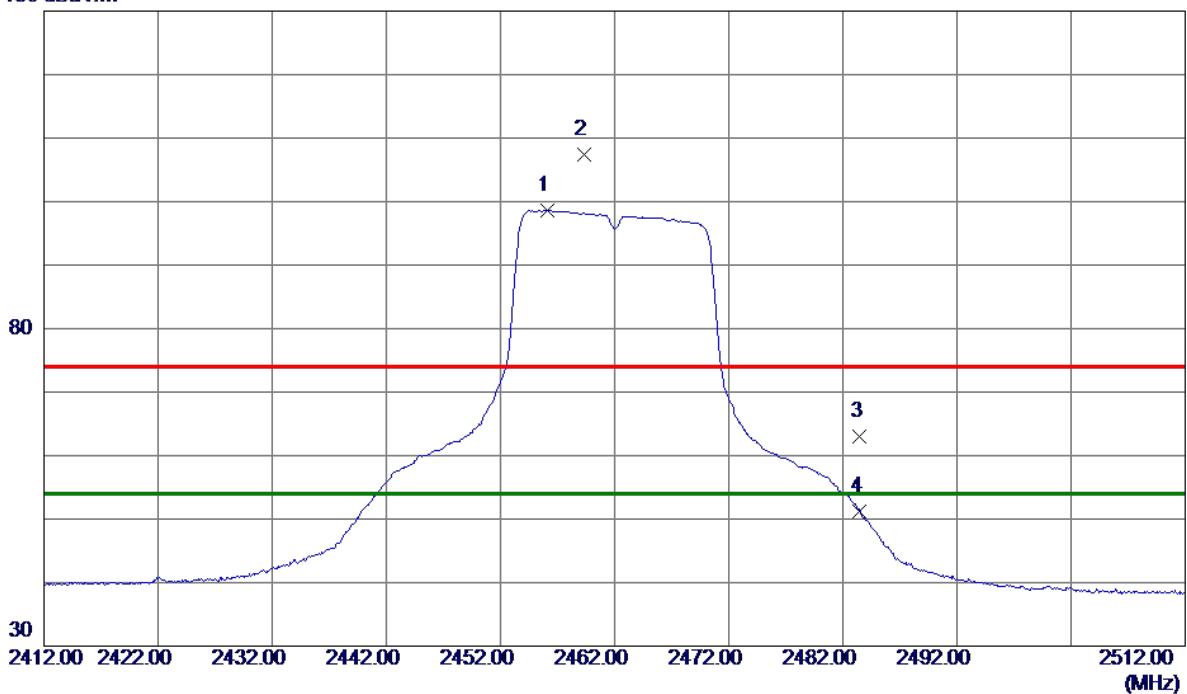
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	
							Detector	Comment
1	4873.1850	45.58	3.75	49.33	74.00	-24.67	Peak	
2 *	4875.0200	32.43	3.75	36.18	54.00	-17.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

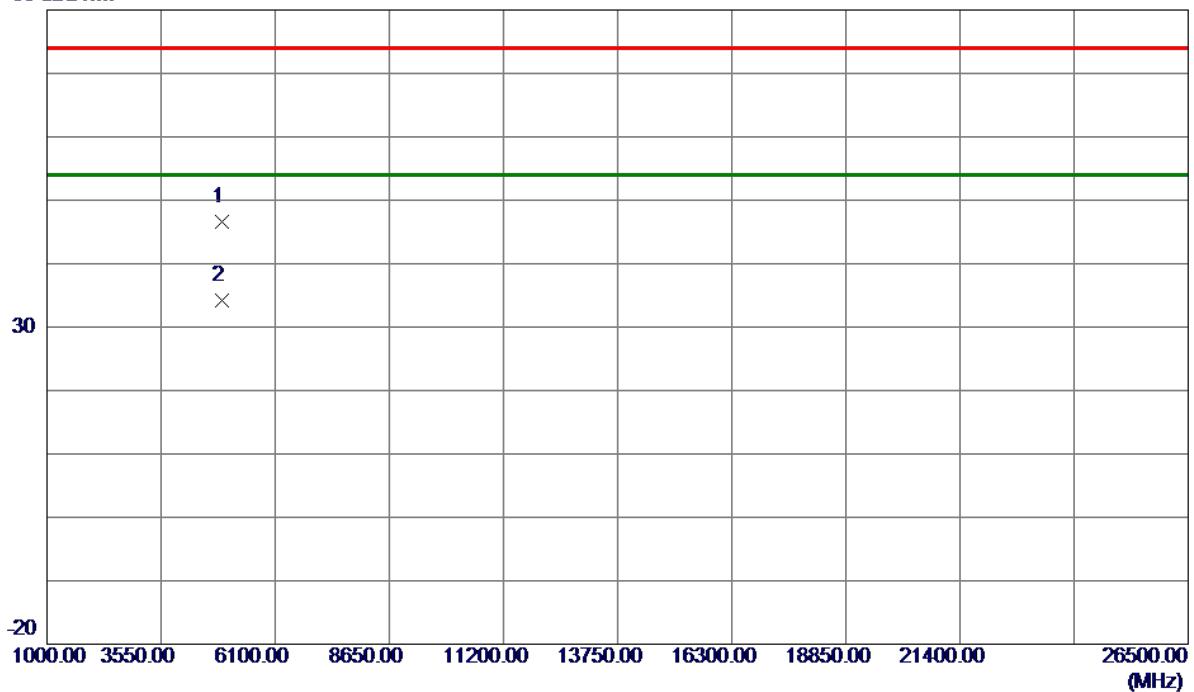
Vertical**130 dBuV/m**

No.	Freq.	Reading	Correct	Measure	Limit	Margin	Detector	Comment
		Level	Factor	ment	dBuV/m	dB		
1 *	2456.1000	91.85	6.82	98.67	54.00	44.67	AVG	No Limit
2	2459.3000	100.65	6.82	107.47	74.00	33.47	Peak	No Limit
3	2483.5000	56.26	6.79	63.05	74.00	-10.95	Peak	
4	2483.5000	44.41	6.79	51.20	54.00	-2.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4922.5850	42.76	3.90	46.66	74.00	-27.34	Peak	
2 *	4923.6750	30.25	3.90	34.15	54.00	-19.85	AVG	

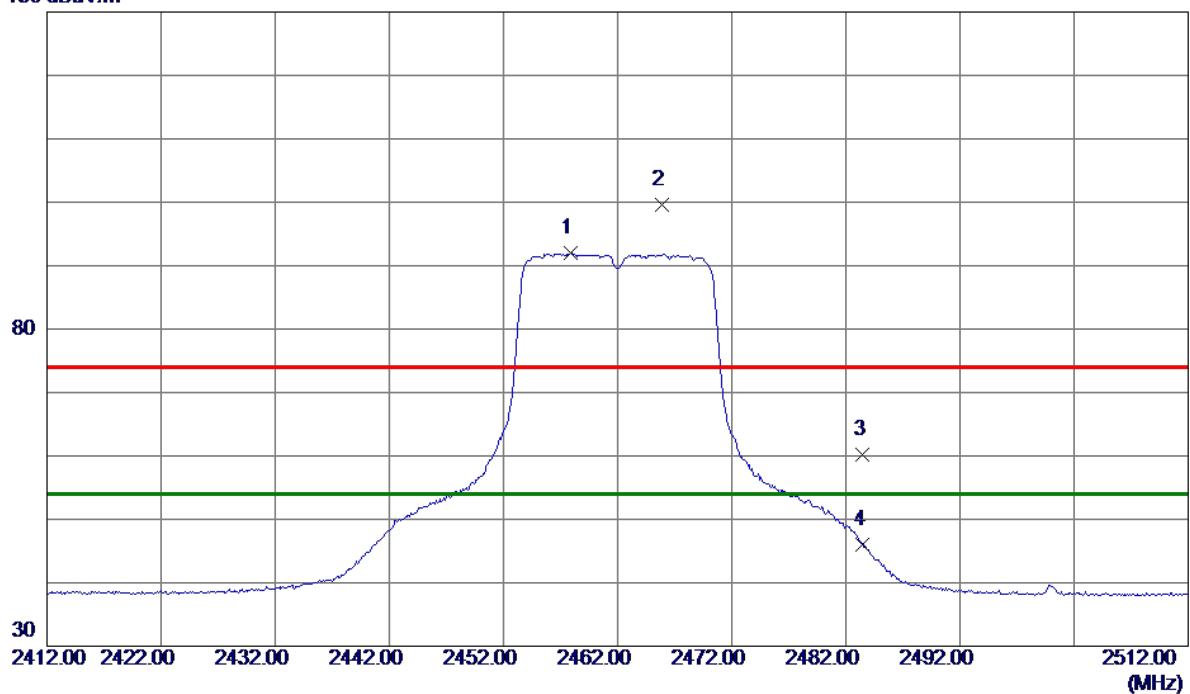
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

Horizontal

130 dBuV/m

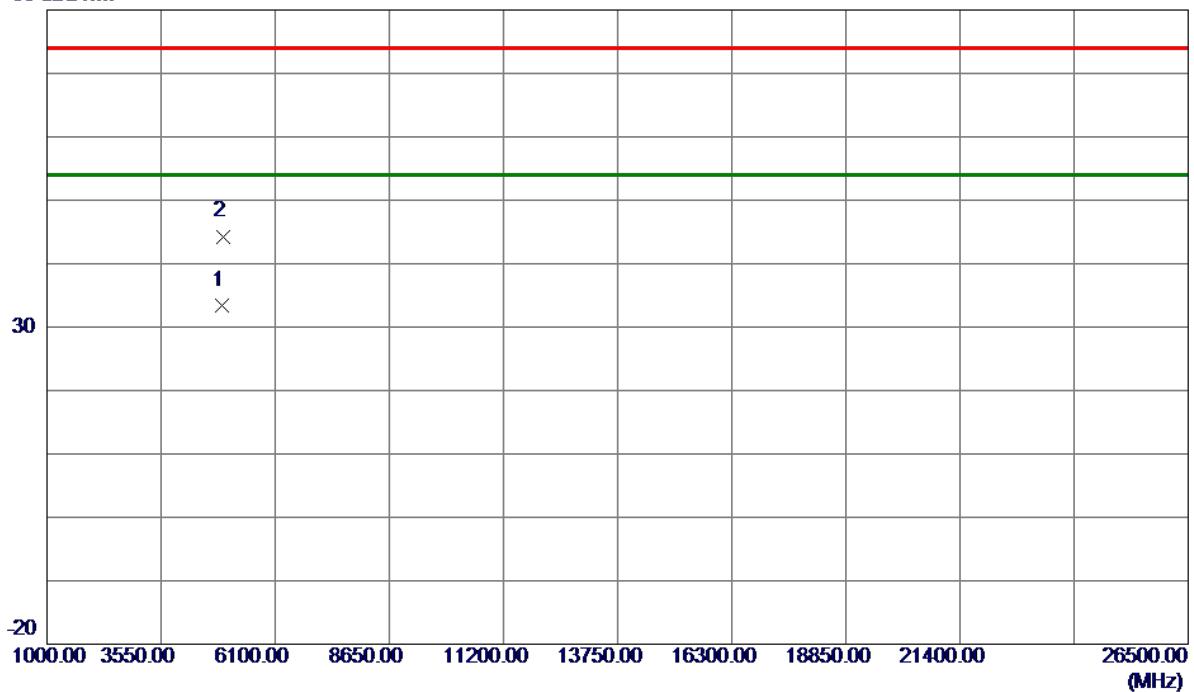


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1 *	2457.9000	85.14	6.82	91.96	54.00	37.96	AVG	No Limit	
2	2465.9000	92.78	6.81	99.59	74.00	25.59	Peak	No Limit	
3	2483.5000	53.43	6.79	60.22	74.00	-13.78	Peak		
4	2483.5000	39.17	6.79	45.96	54.00	-8.04	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX G Mode 2462 MHz

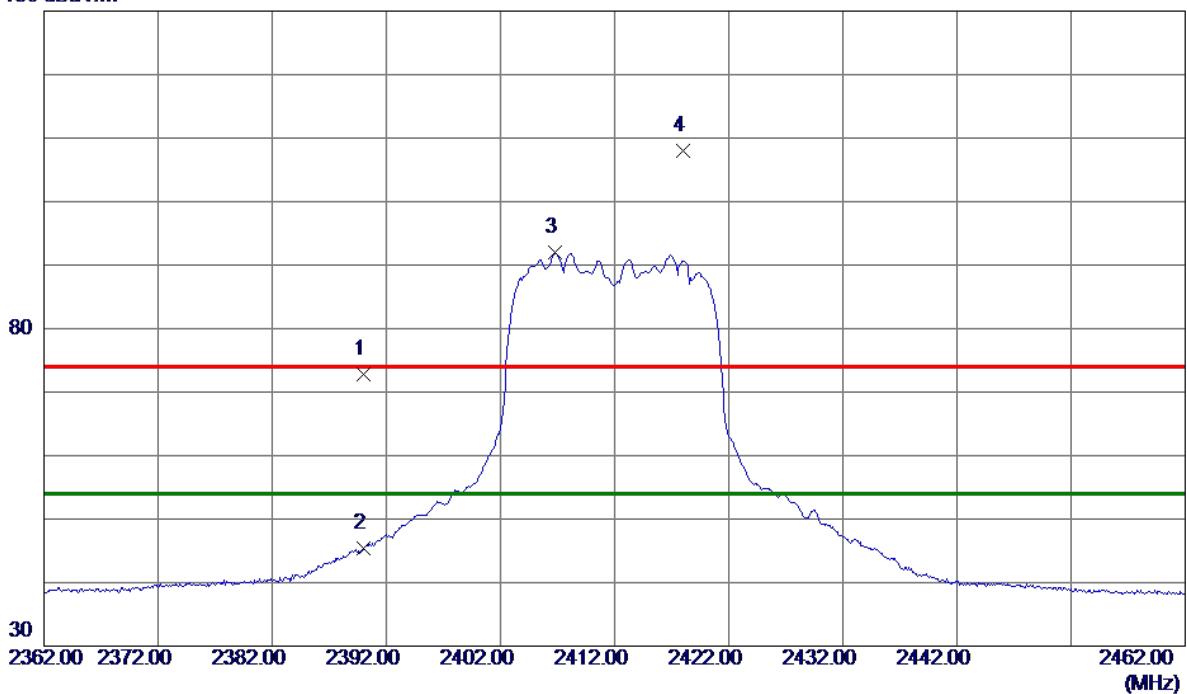
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.7000	29.41	3.90	33.31	54.00	-20.69	AVG	
2	4925.3550	40.39	3.91	44.30	74.00	-29.70	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

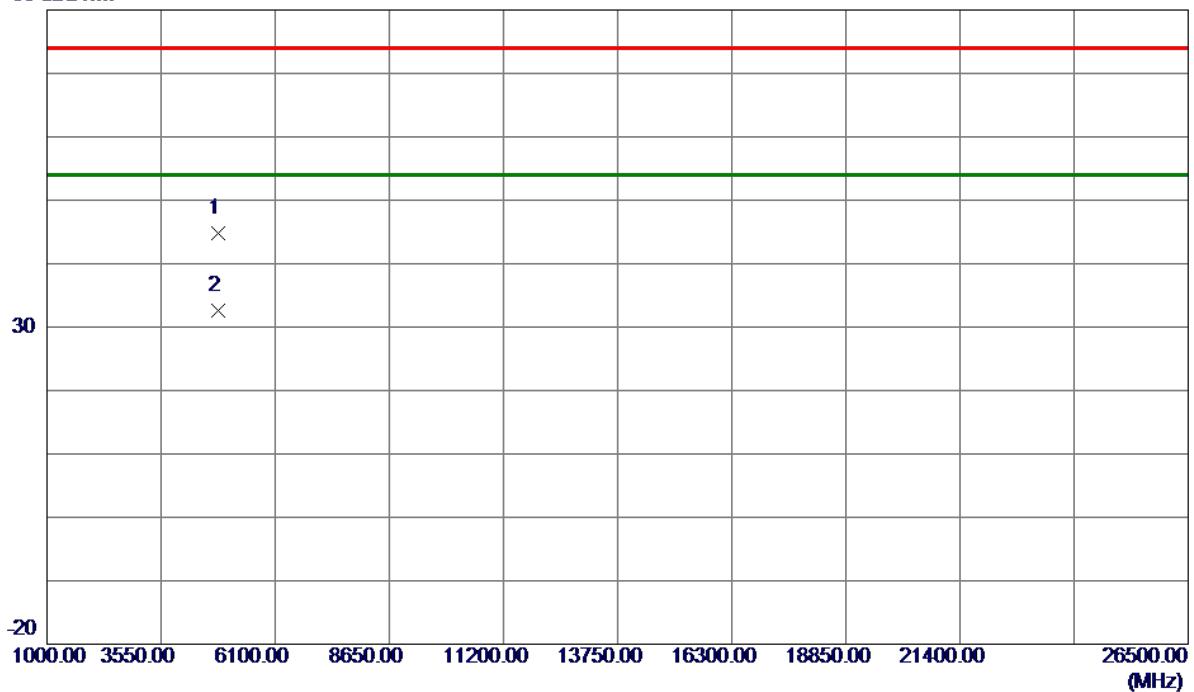
Vertical**130 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measure ment	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2390.0000	65.95	6.89	72.84	74.00	-1.16	Peak	
2	2390.0000	38.47	6.89	45.36	54.00	-8.64	AVG	
3 *	2406.8000	85.03	6.87	91.90	54.00	37.90	AVG	No Limit
4	2418.0000	101.24	6.86	108.10	74.00	34.10	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Vertical**80 dBuV/m**

No.	Freq. (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Comment
1	4822.7200	41.25	3.60	44.85	74.00	-29.15	Peak	
2 *	4825.2900	28.98	3.60	32.58	54.00	-21.42	AVG	

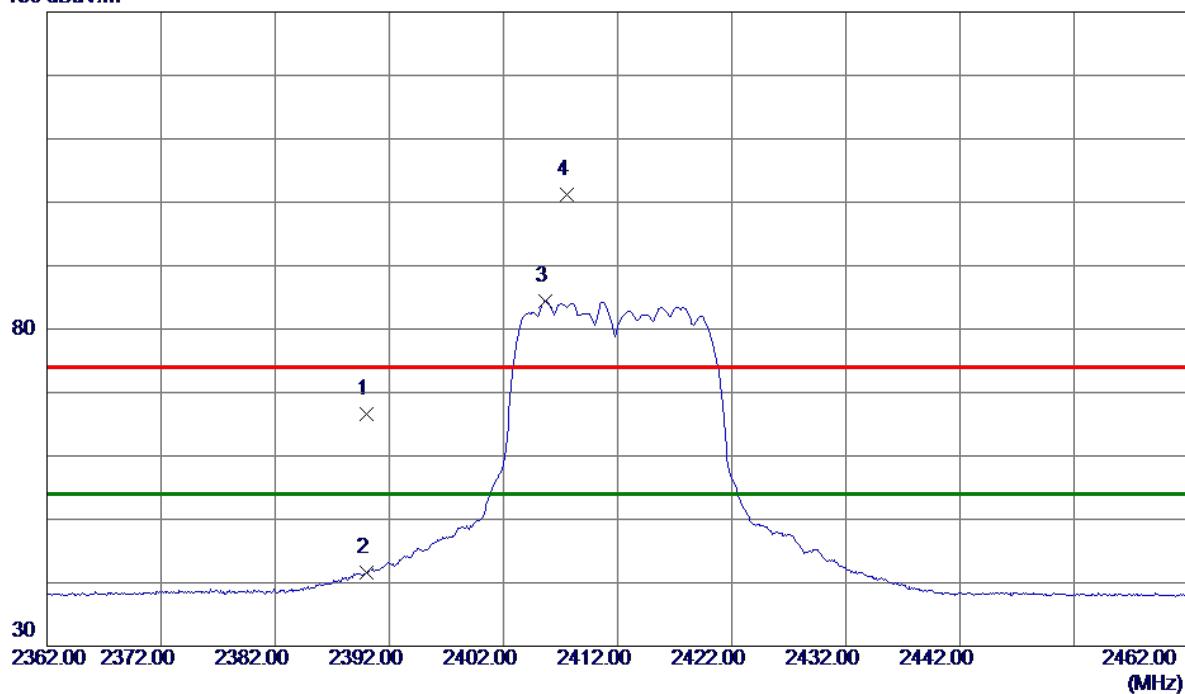
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

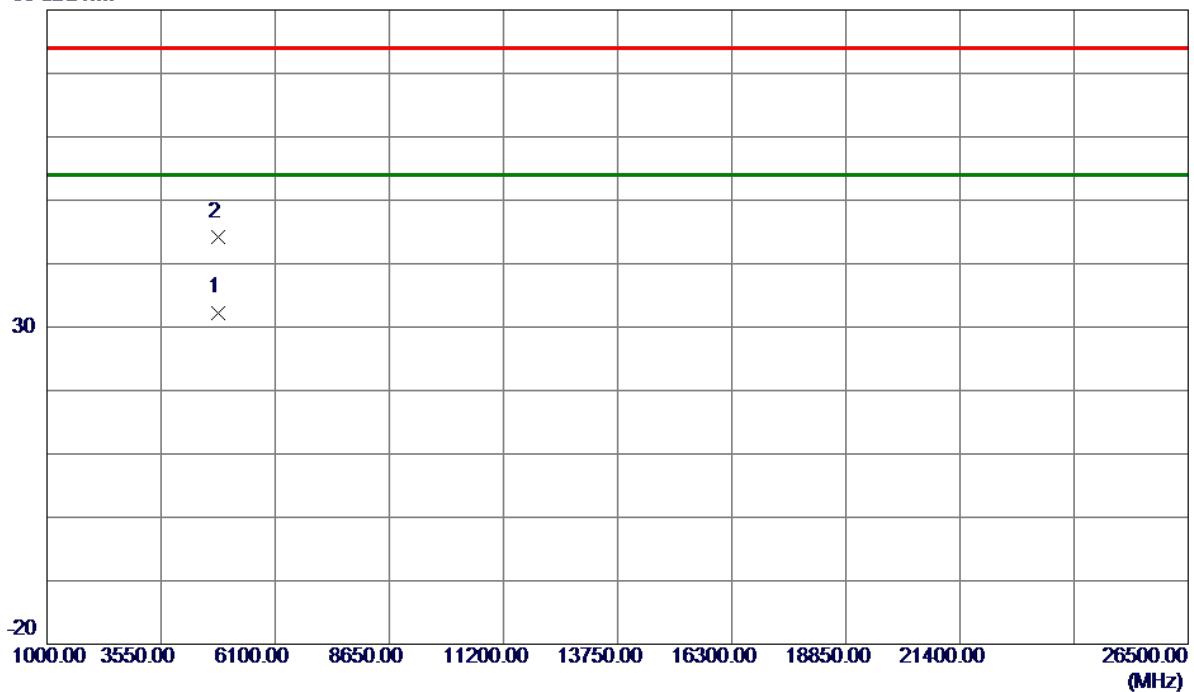


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	59.78	6.89	66.67	74.00	-7.33	Peak		
2	2390.0000	34.78	6.89	41.67	54.00	-12.33	AVG		
3 *	2405.7000	77.61	6.88	84.49	54.00	30.49	AVG	No Limit	
4	2407.6000	94.28	6.87	101.15	74.00	27.15	Peak	No Limit	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2412 MHz

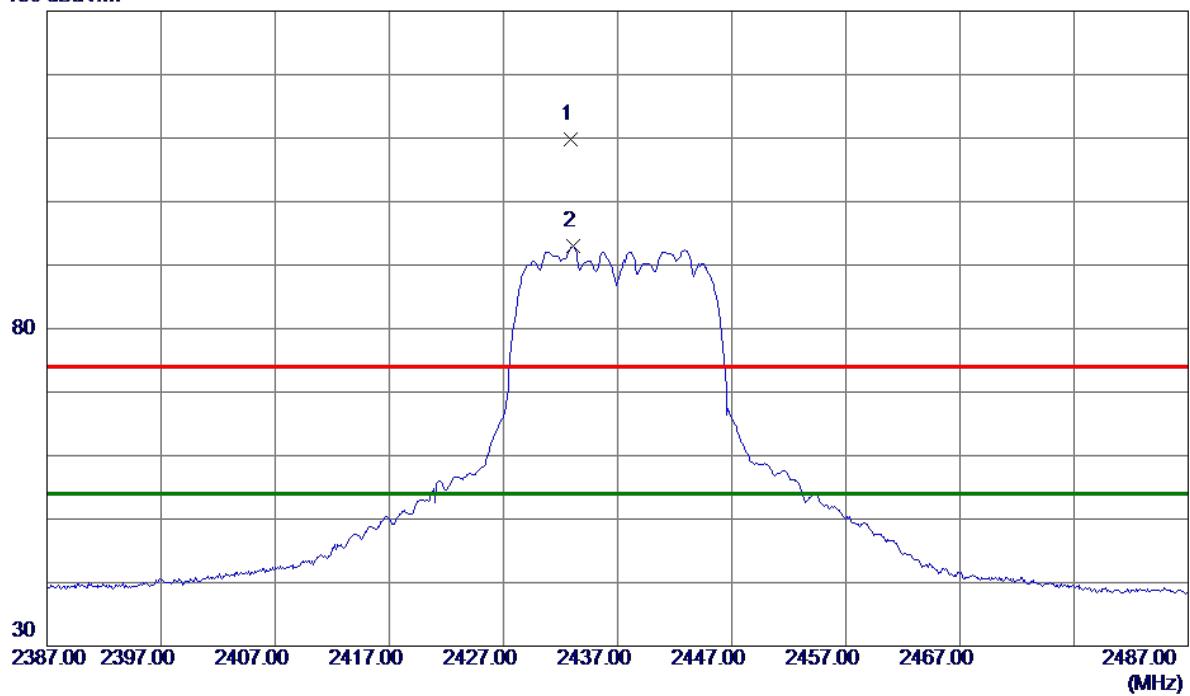
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.8550	28.70	3.60	32.30	54.00	-21.70	AVG	
2	4826.0950	40.63	3.61	44.24	74.00	-29.76	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

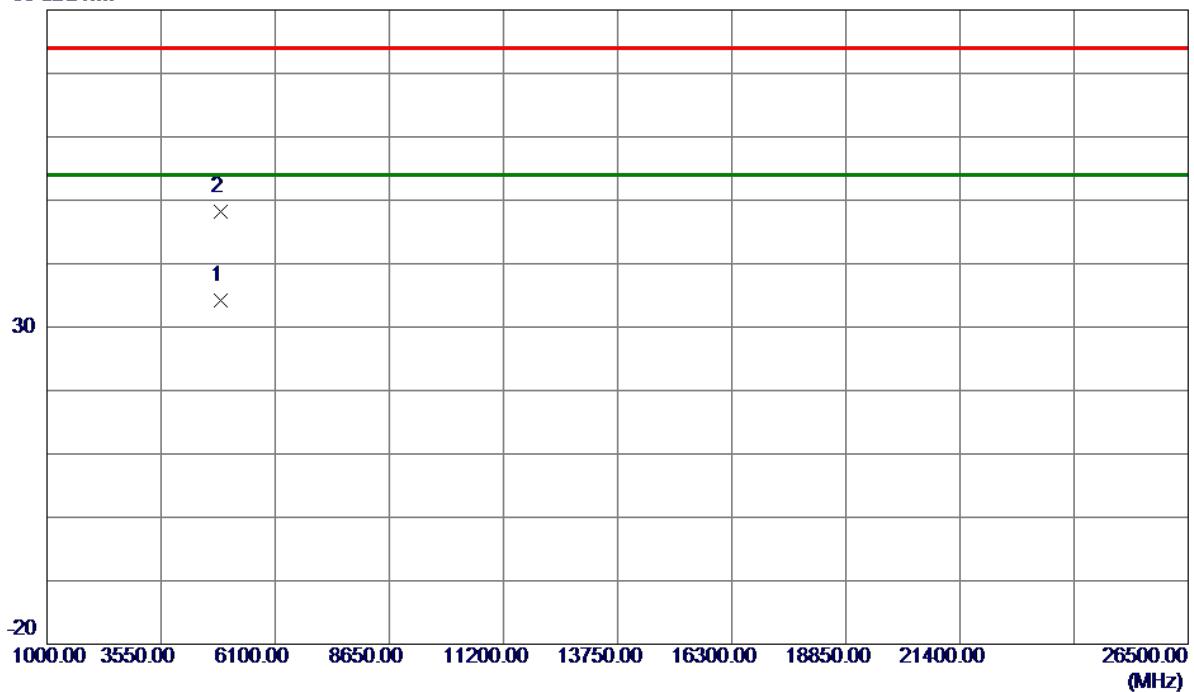
Vertical**130 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector
1	2432.9000	103.03	6.85	109.88	74.00	35.88	Peak
2 *	2433.1000	86.06	6.85	92.91	54.00	38.91	AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

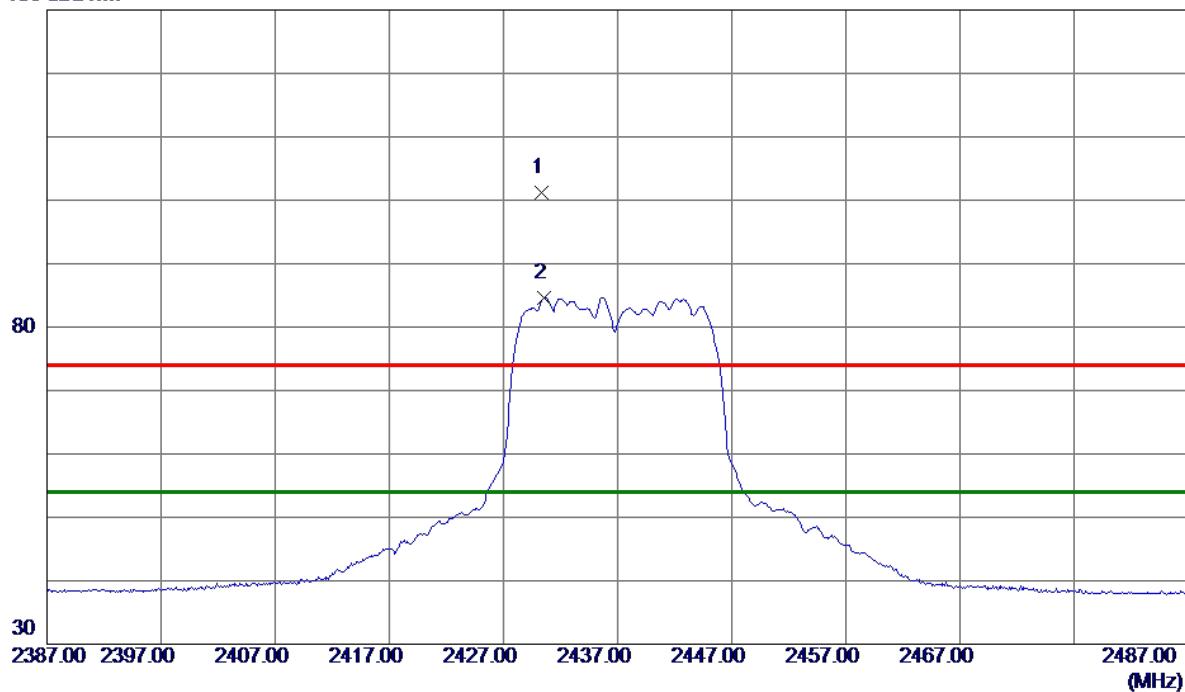
Vertical**80 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4872.8000	30.47	3.75	34.22	54.00	-19.78	AVG	
2	4875.8600	44.52	3.76	48.28	74.00	-25.72	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

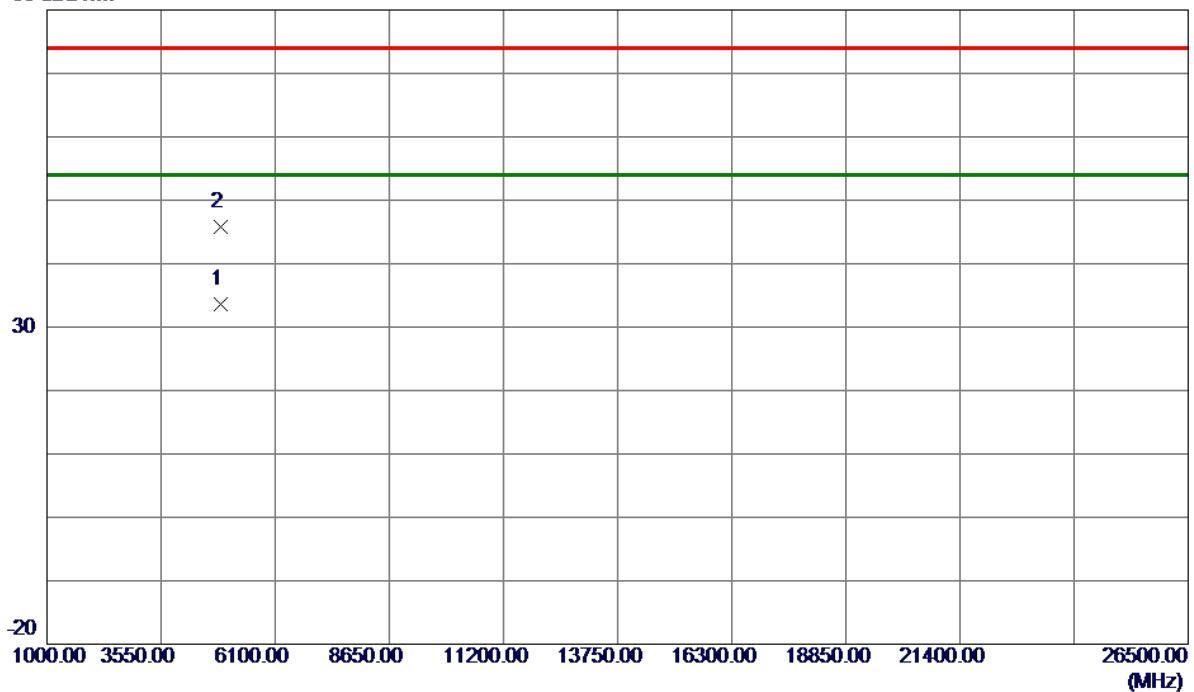
Horizontal**130 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	2430.3000	94.26	6.85	101.11	74.00	27.11	Peak	No Limit
2 *	2430.6000	77.84	6.85	84.69	54.00	30.69	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz

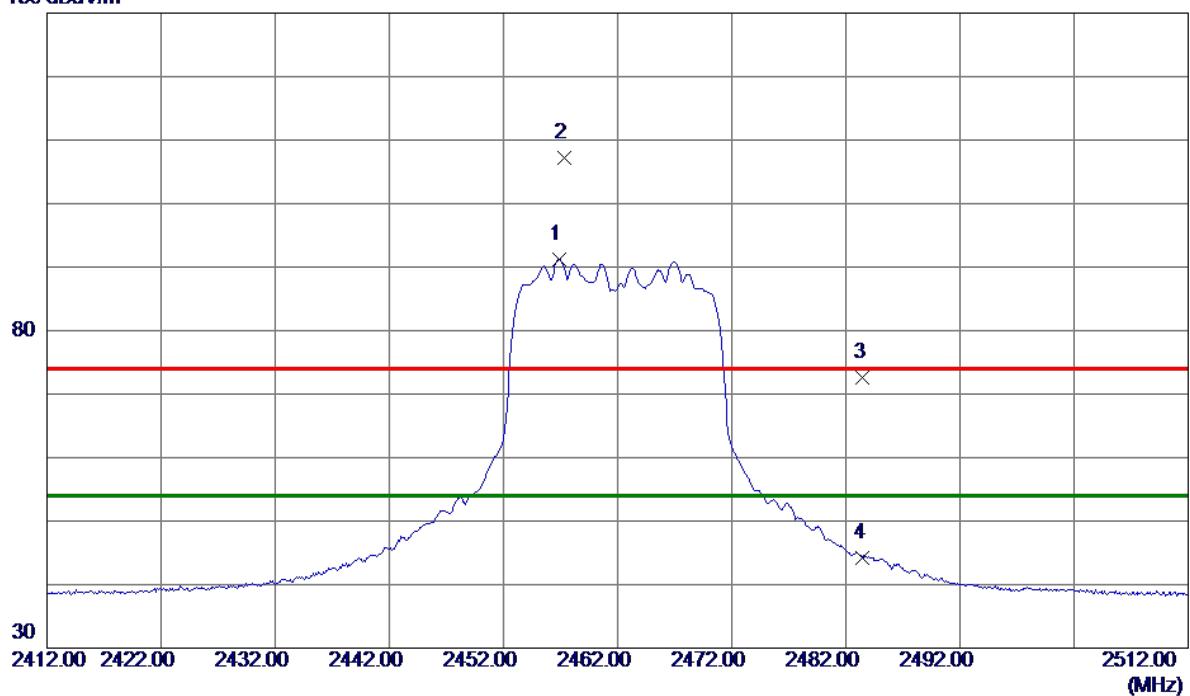
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4872.8700	29.77	3.75	33.52	54.00	-20.48	AVG	
2	4876.2300	42.02	3.76	45.78	74.00	-28.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

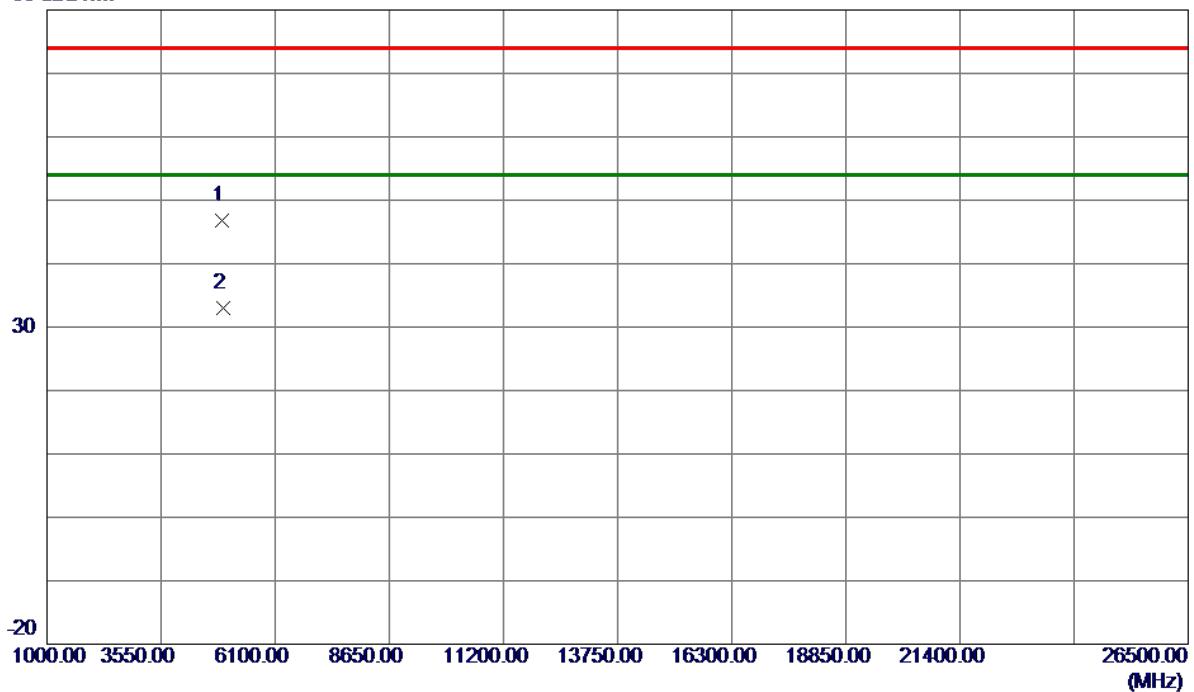
Vertical**130 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor	Measure- ment dBuV/m	Limit dB	Margin dB	Detector	Comment
1 *	2456.9000	84.40	6.82	91.22	54.00	37.22	AVG	No Limit
2	2457.3000	100.35	6.82	107.17	74.00	33.17	Peak	No Limit
3	2483.5000	65.77	6.79	72.56	74.00	-1.44	Peak	
4	2483.5000	37.43	6.79	44.22	54.00	-9.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9000	42.86	3.90	46.76	74.00	-27.24	Peak	
2 *	4925.6150	29.00	3.91	32.91	54.00	-21.09	AVG	

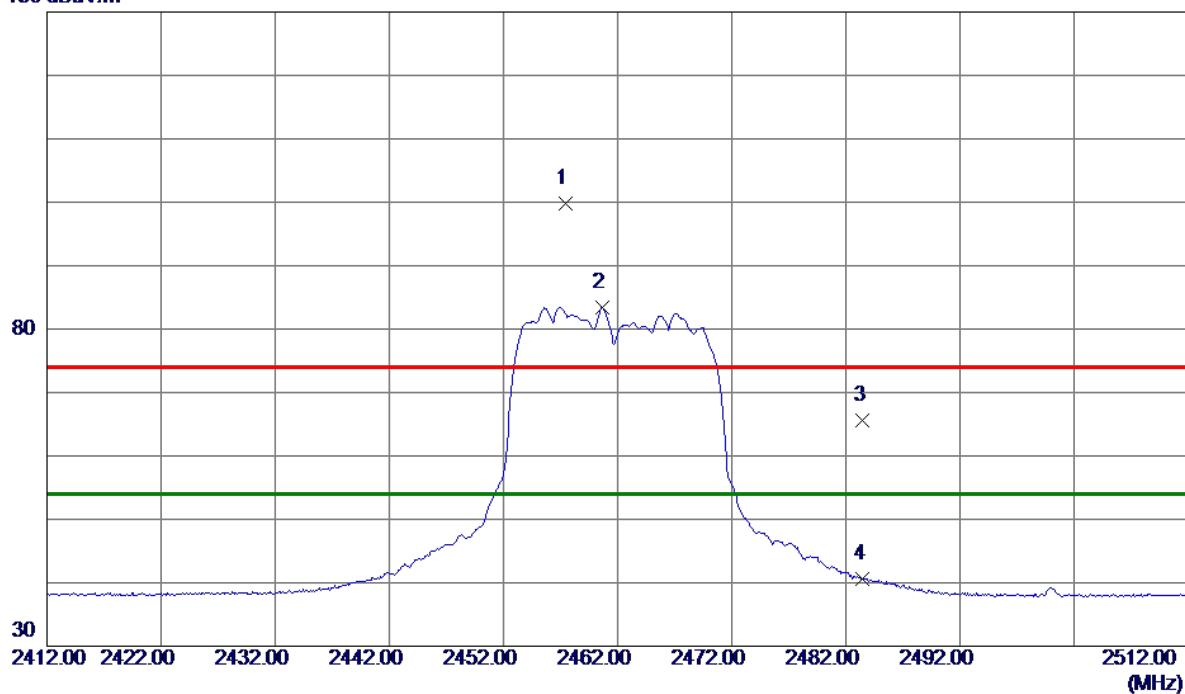
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

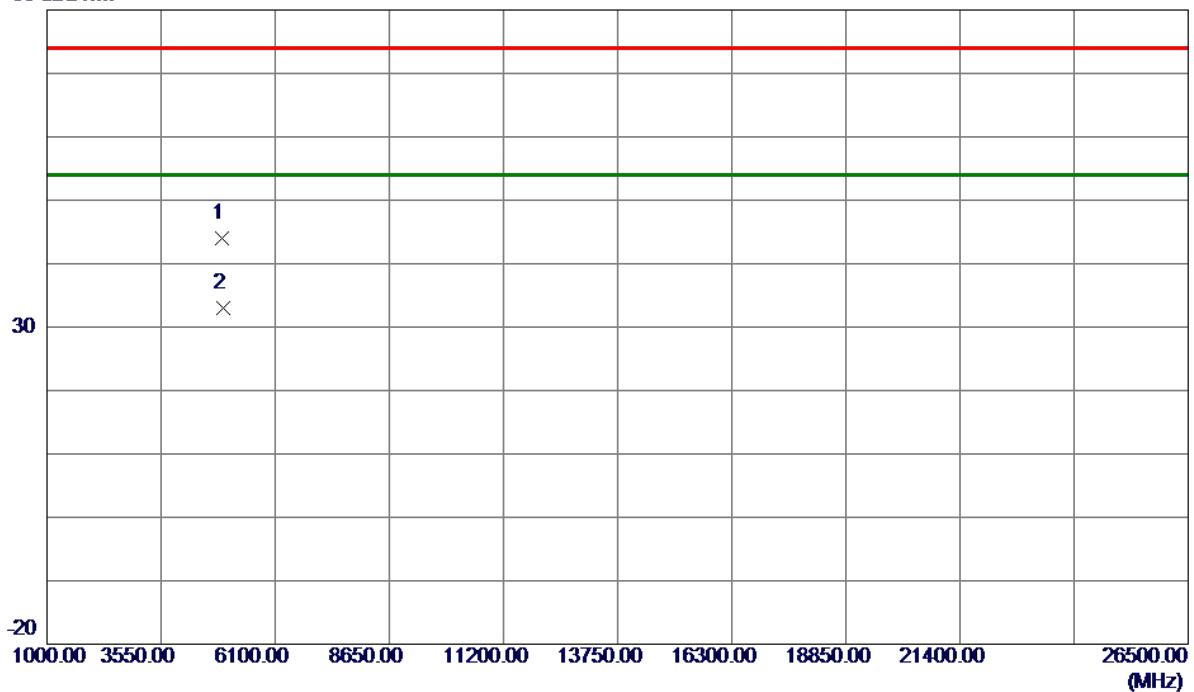


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2457.4000	92.95	6.82	99.77	74.00	25.77	Peak	No Limit
2 *	2460.7000	76.52	6.82	83.34	54.00	29.34	AVG	No Limit
3	2483.5000	58.89	6.79	65.68	74.00	-8.32	Peak	
4	2483.5000	33.86	6.79	40.65	54.00	-13.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2462 MHz

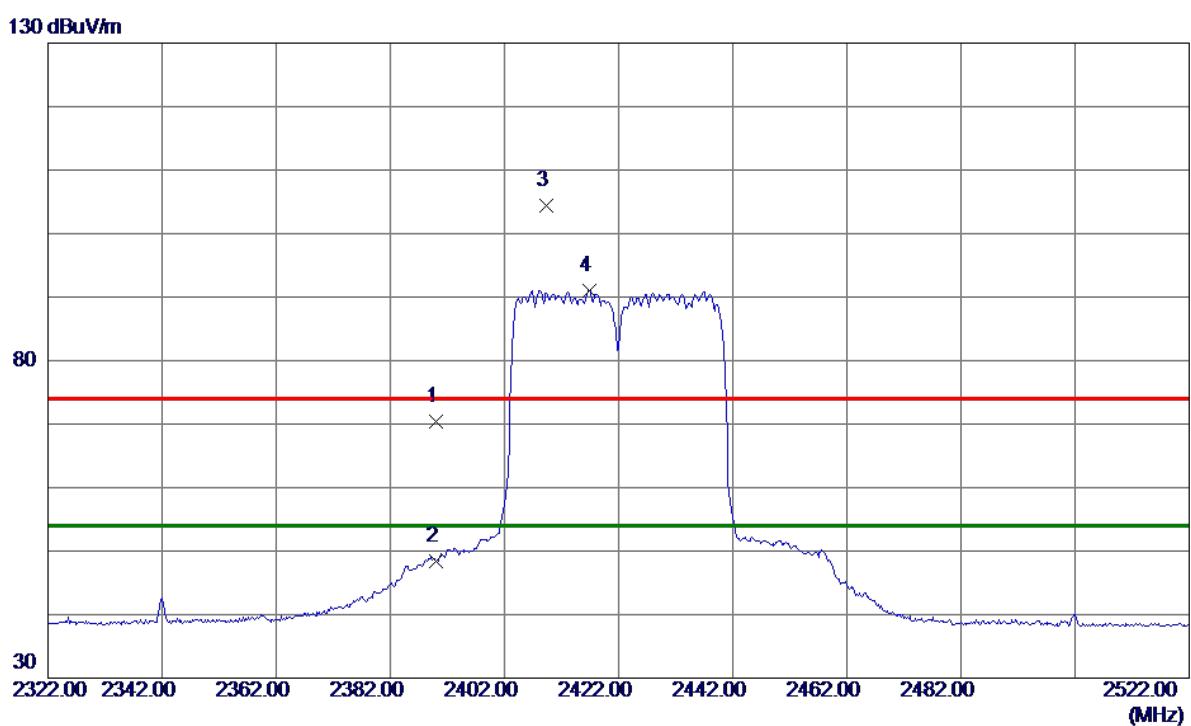
Horizontal**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8350	40.18	3.90	44.08	74.00	-29.92	Peak	
2 *	4925.5750	29.06	3.91	32.97	54.00	-21.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

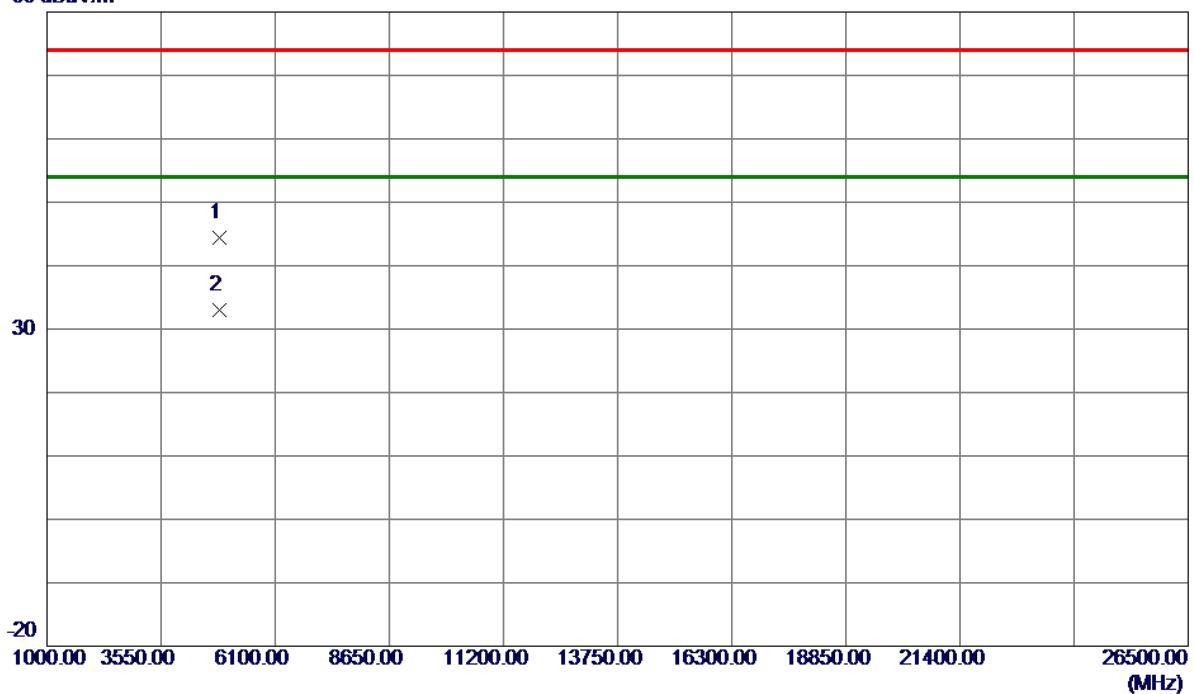
Vertical

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	63.50	6.89	70.39	74.00	-3.61	Peak	
2	2390.0000	41.59	6.89	48.48	54.00	-5.52	Avg	
3	2409.4000	97.51	6.87	104.38	74.00	30.38	Peak	No Limit
4 *	2416.8000	84.17	6.86	91.03	54.00	37.03	Avg	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4841.6900	40.75	3.65	44.40	74.00	-29.60	Peak	
2 *	4842.8849	29.43	3.66	33.09	54.00	-20.91	AVG	

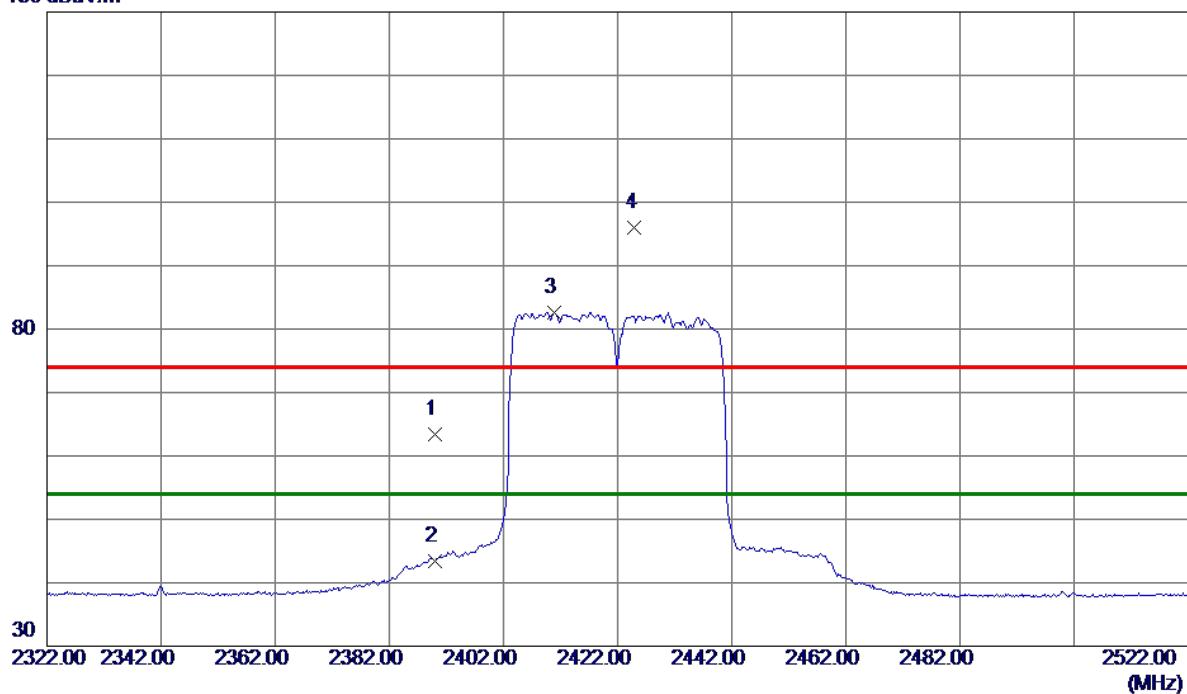
REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

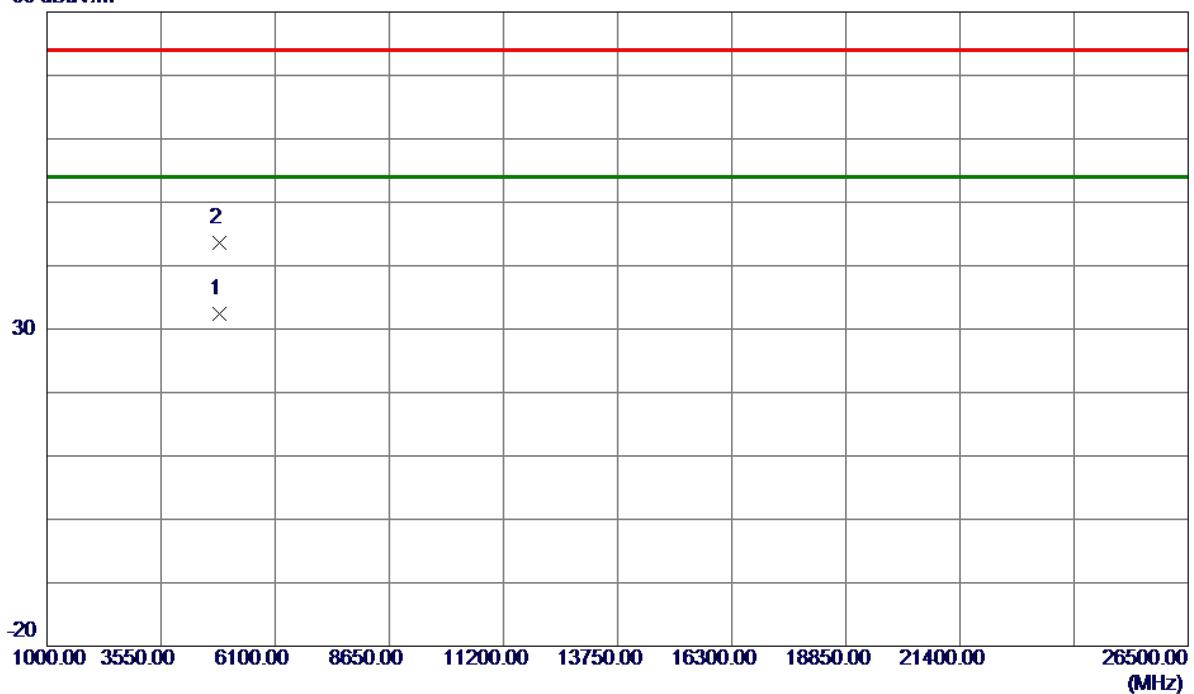


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector		Comment
							Detector	Comment	
1	2390.0000	56.56	6.89	63.45	74.00	-10.55	Peak		
2	2390.0000	36.57	6.89	43.46	54.00	-10.54	AVG		
3 *	2410.8000	75.80	6.87	82.67	54.00	28.67	AVG	No Limit	
4	2425.0000	89.12	6.86	95.98	74.00	21.98	Peak	No Limit	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2422MHz

Horizontal**80 dBuV/m**

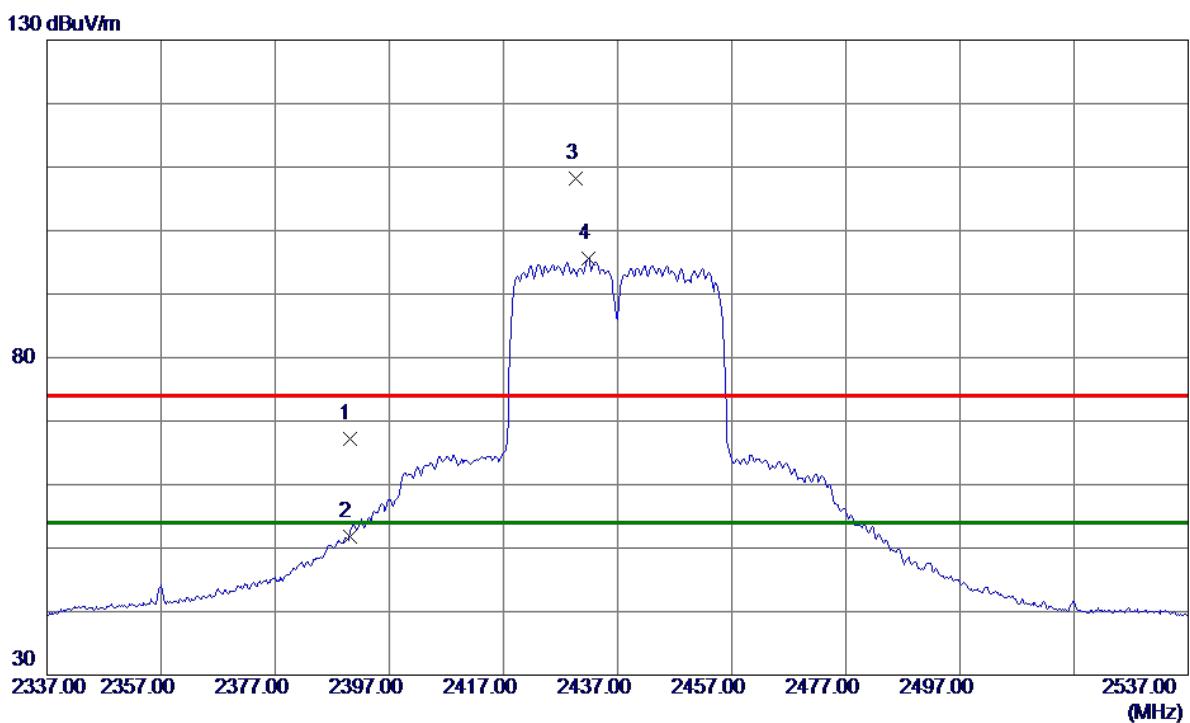
No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	4841.8350	28.79	3.65	32.44	54.00	-21.56	AVG	
2	4842.3700	40.01	3.66	43.67	74.00	-30.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical

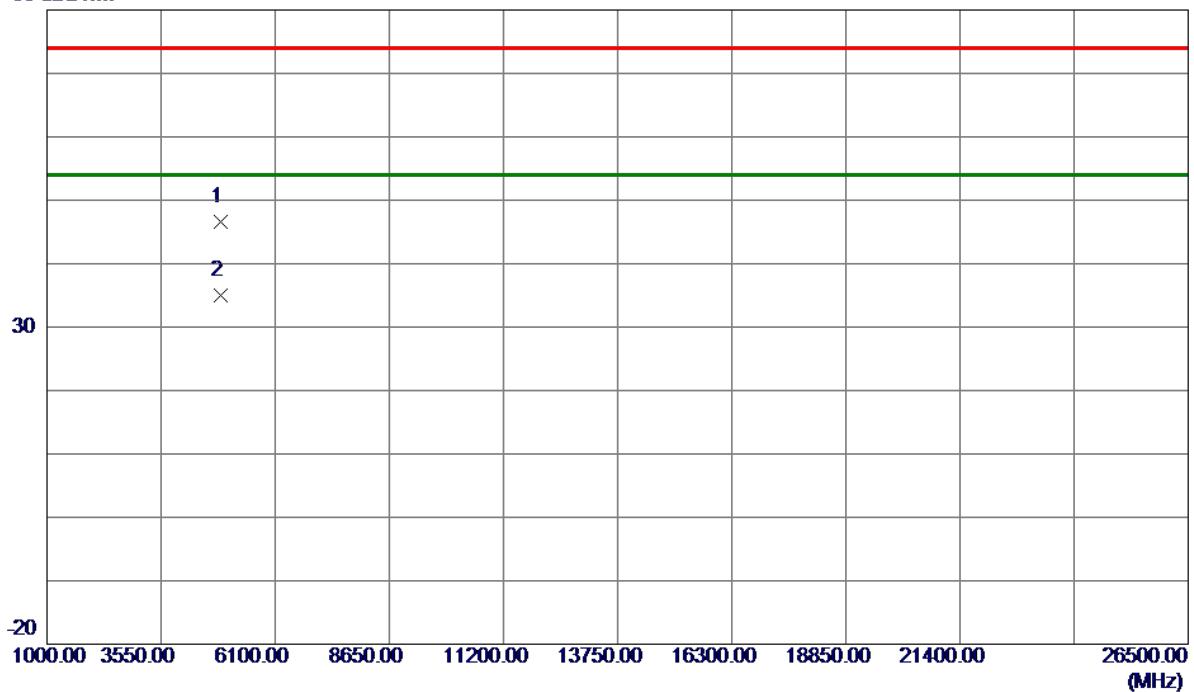


No.	Freq.	Reading Level	Correct Factor	Measure	Limit	Margin		Detector	Comment
						dBuV/m	dB		
1	2390.0000	60.36	6.89	67.25	74.00	-6.75	Peak		
2	2390.0000	44.88	6.89	51.77	54.00	-2.23	AVG		
3	2429.6000	101.30	6.85	108.15	74.00	34.15	Peak	No Limit	
4 *	2431.8000	88.67	6.85	95.52	54.00	41.52	AVG	No Limit	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4872.5350	42.86	3.75	46.61	74.00	-27.39	Peak	
2 *	4872.6750	31.18	3.75	34.93	54.00	-19.07	AVG	

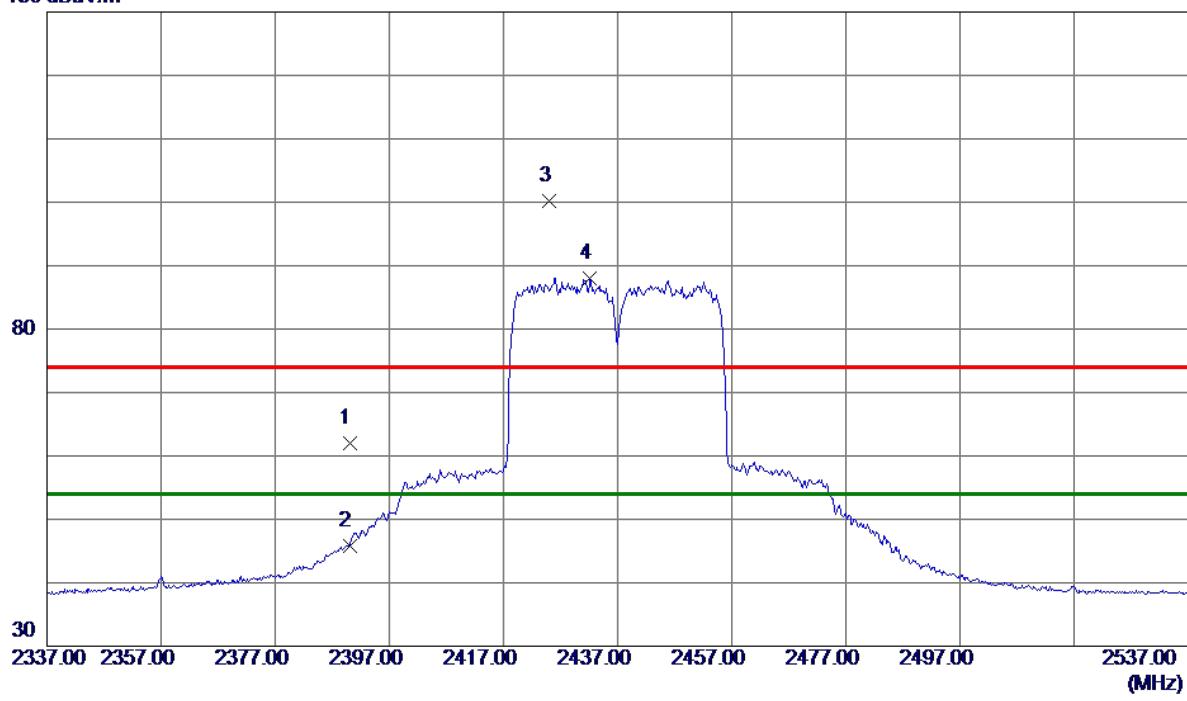
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

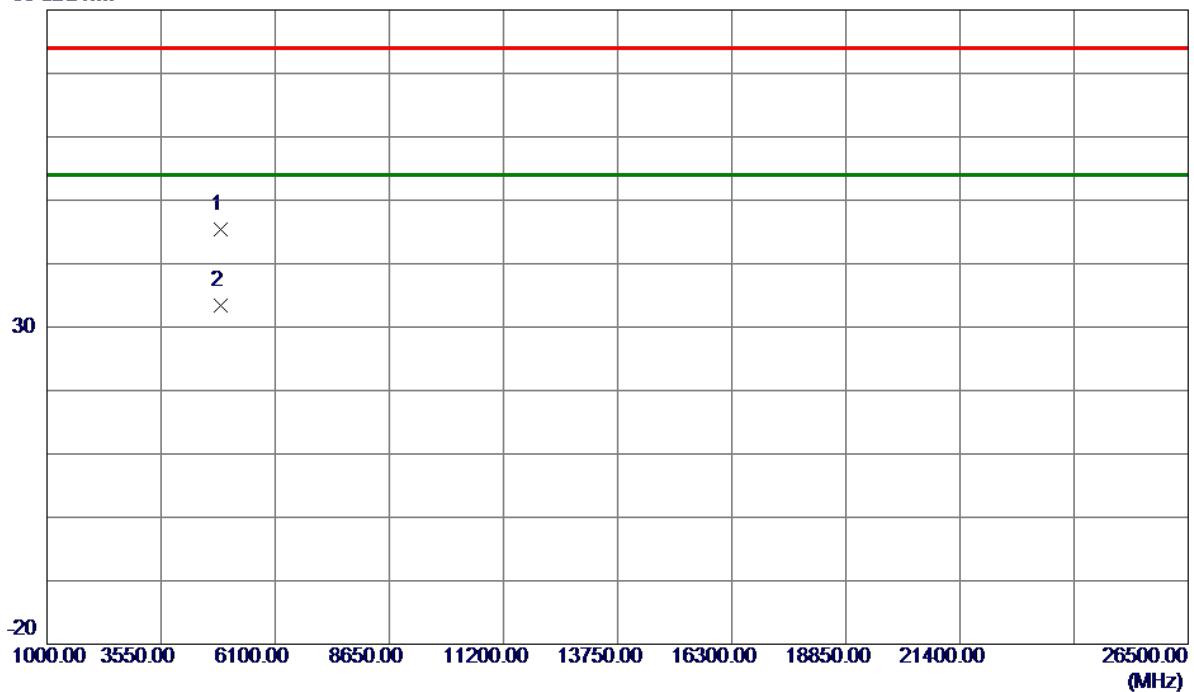


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Margin	
							Detector	Comment
1	2390.0000	55.12	6.89	62.01	74.00	-11.99	Peak	
2	2390.0000	38.85	6.89	45.74	54.00	-8.26	AVG	
3	2425.0000	93.26	6.86	100.12	74.00	26.12	Peak	No Limit
4 *	2432.2000	81.14	6.85	87.99	54.00	33.99	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2437 MHz

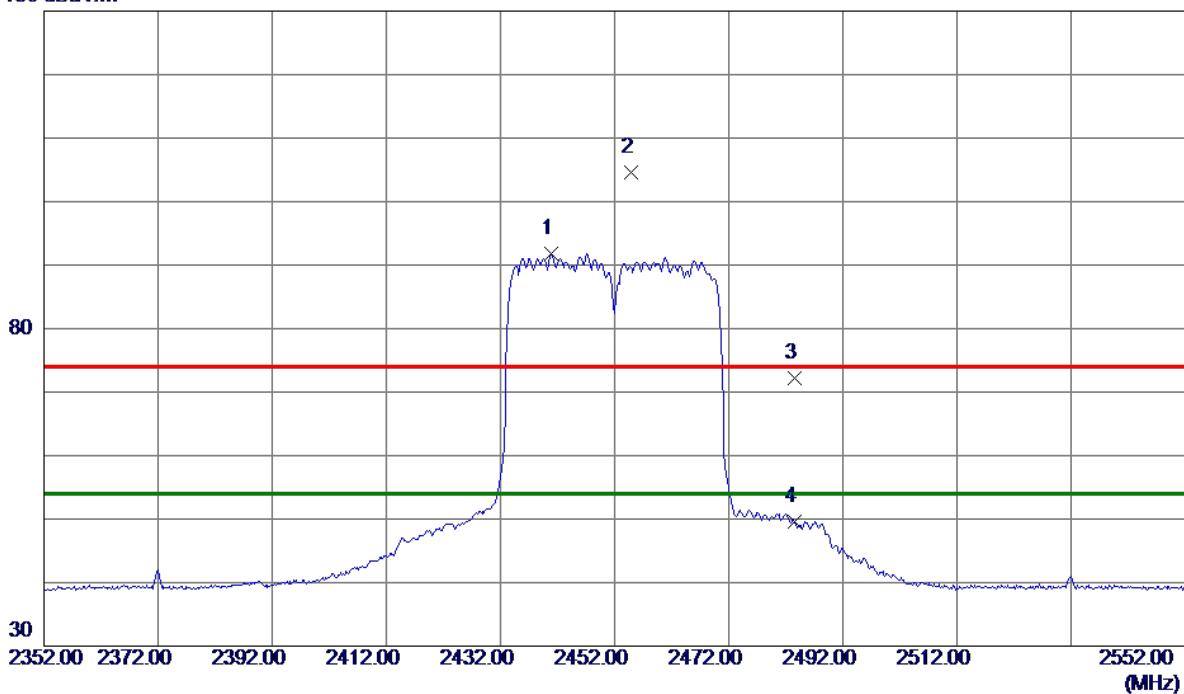
Horizontal**80 dBuV/m**

No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1	4872.5250	41.59	3.75	45.34	74.00	-28.66	Peak	
2 *	4872.8350	29.62	3.75	33.37	54.00	-20.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

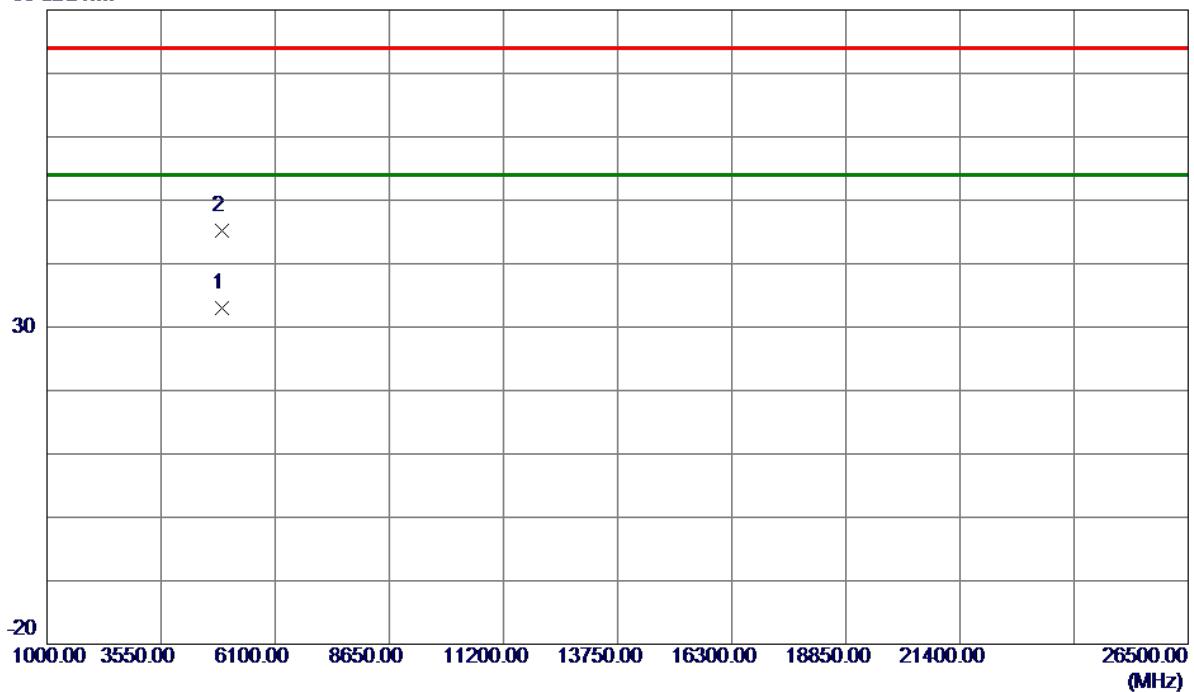
Vertical**130 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measurement dBuV/m	Limit dB	Margin	Detector	Comment
1 *	2440.8000	84.94	6.84	91.78	54.00	37.78	AVG	No Limit
2	2454.8000	97.78	6.82	104.60	74.00	30.60	Peak	No Limit
3	2483.5000	65.48	6.79	72.27	74.00	-1.73	Peak	
4	2483.5000	42.81	6.79	49.60	54.00	-4.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Vertical**80 dBuV/m**

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4902.4900	29.25	3.84	33.09	54.00	-20.91	AVG	
2	4903.3600	41.42	3.84	45.26	74.00	-28.74	Peak	

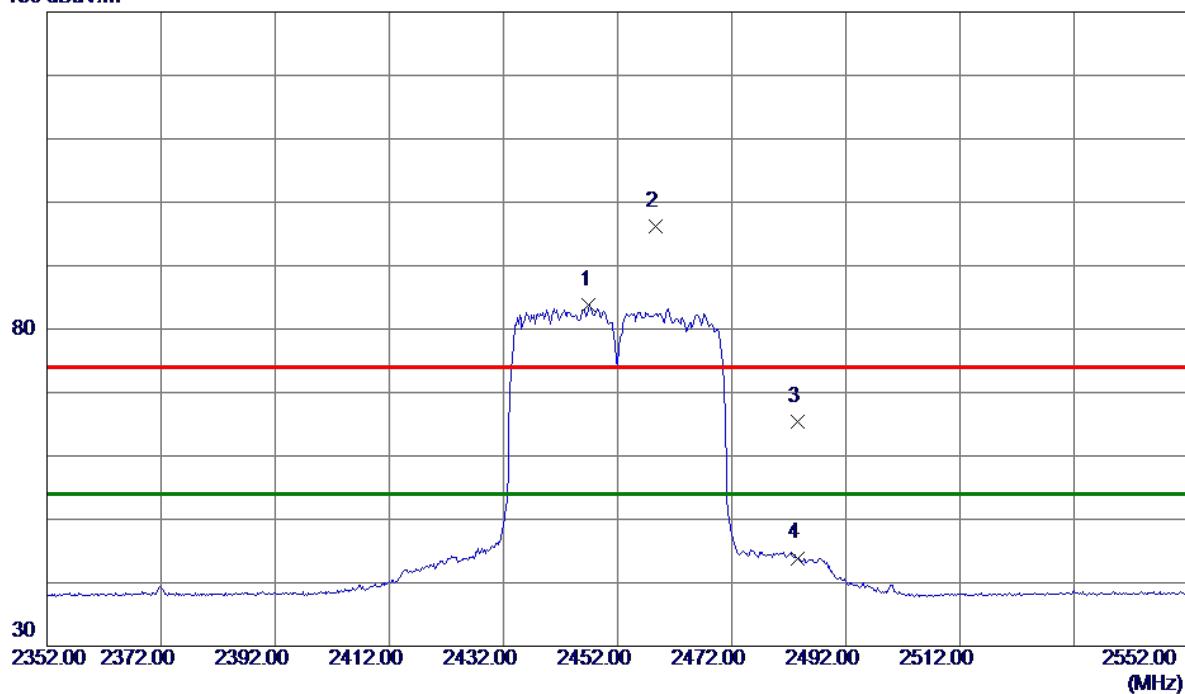
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal

130 dBuV/m

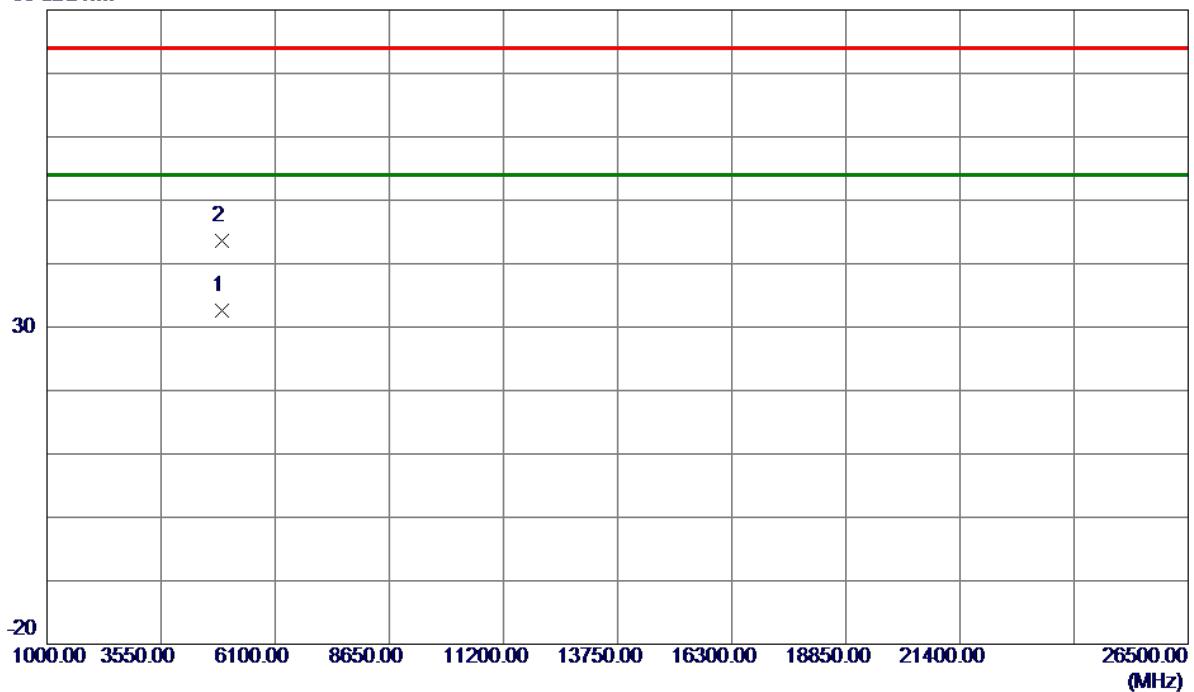


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2447.000	76.92	6.83	83.75	54.00	29.75	AVG	No Limit
2	2458.600	89.46	6.82	96.28	74.00	22.28	Peak	No Limit
3	2483.500	58.69	6.79	65.48	74.00	-8.52	Peak	
4	2483.500	37.11	6.79	43.90	54.00	-10.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-40M Mode 2452 MHz

Horizontal**80 dBuV/m**

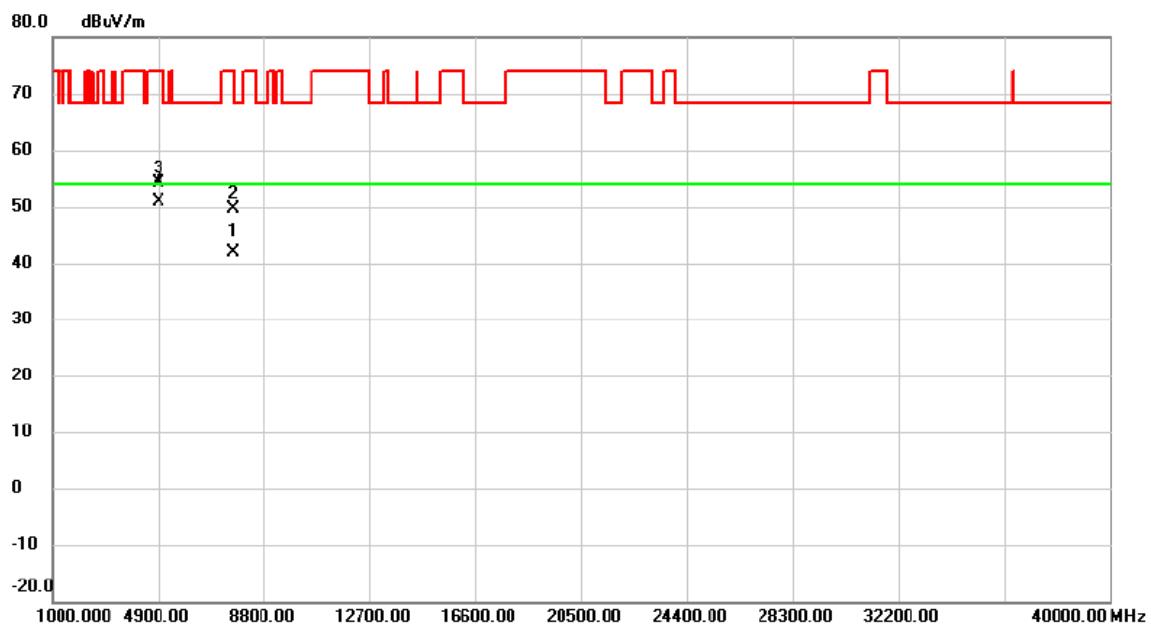
No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4902.5350	28.72	3.84	32.56	54.00	-21.44	AVG	
2	4903.7200	39.83	3.84	43.67	74.00	-30.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

The worst case of simultaneous transmission:

Test Mode: TX N-20M Mode 2437 MHz+ N-40 Mode 5755MHz

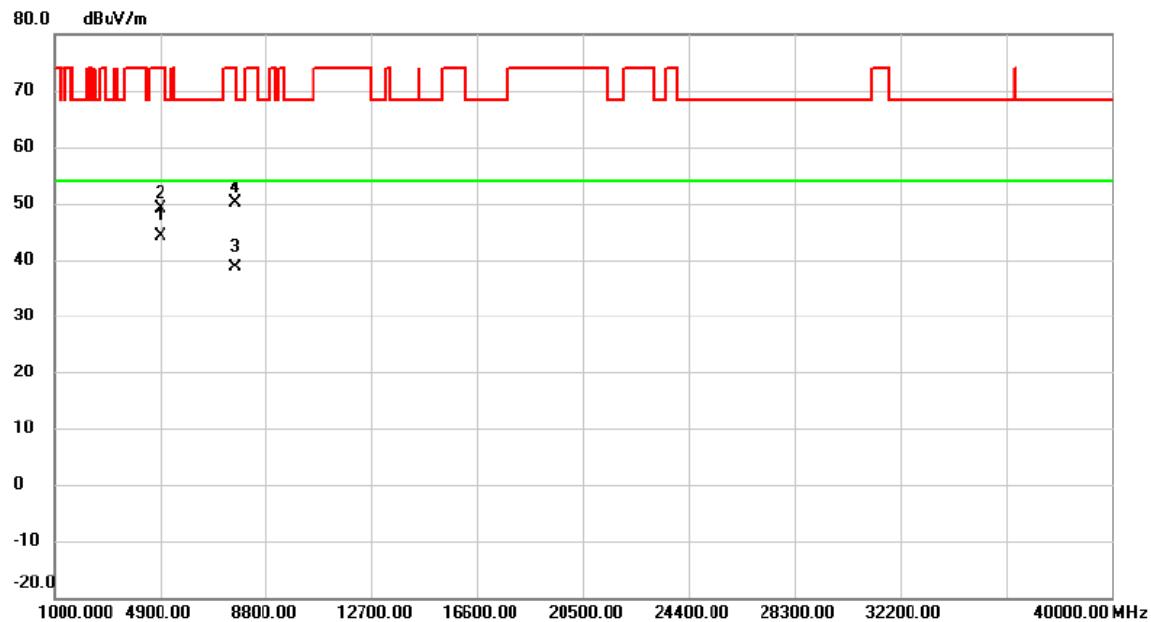
Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		7660.162	32.25	9.53	41.78	54.00	-12.22	AVG
2		7660.248	40.11	9.53	49.64	74.00	-24.36	peak
3		4923.174	50.24	3.89	54.13	74.00	-19.87	peak
4	*	4923.946	46.98	3.90	50.88	54.00	-3.12	AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX N-20M Mode 2437 MHz+ N-40 Mode 5755MHz

Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4923.587	40.27	3.89	44.16	54.00	-9.84	AVG	
2		4923.814	45.18	3.89	49.07	74.00	-24.93	peak	
3		7660.165	29.14	9.53	38.67	54.00	-15.33	AVG	
4		7660.350	40.57	9.53	50.10	74.00	-23.90	peak	

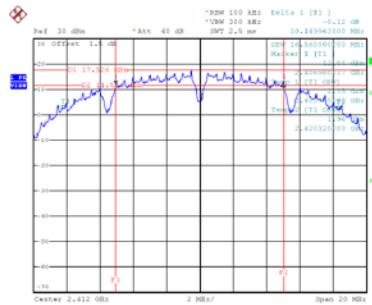
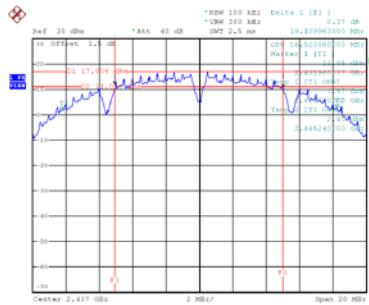
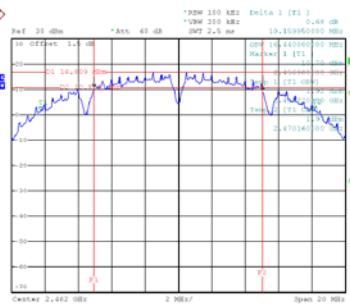
REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

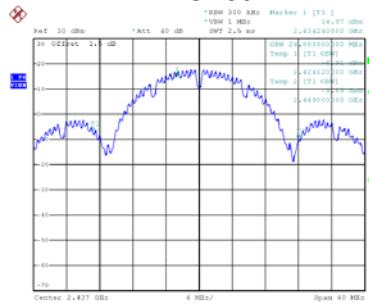
Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	10.15	500	Complies
06	2437	10.11	500	Complies
11	2462	10.16	500	Complies

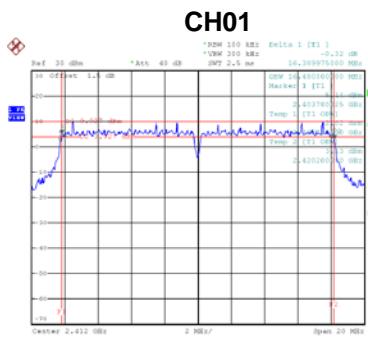
CH01

CH06

CH11


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	26.16	Complies
06	2437	24.88	Complies
11	2462	21.68	Complies

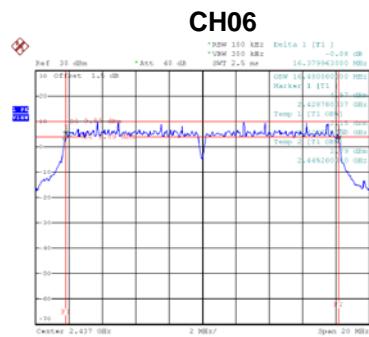
CH01

CH06

CH11

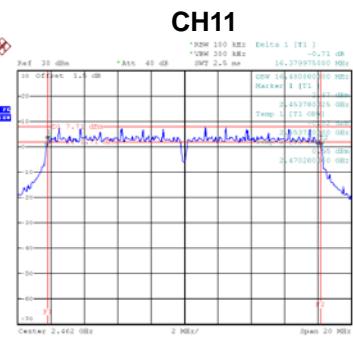

Test Mode	TX G Mode	Channel 11 Test Results		
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	16.39	500	Complies
06	2437	16.38	500	Complies
11	2462	16.38	500	Complies



Date: 24.MAR.2020 16:16:26

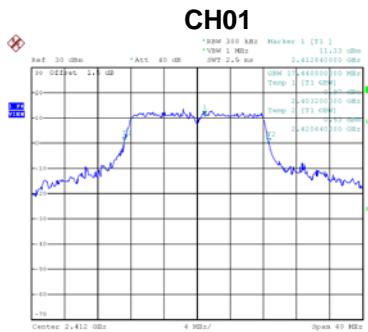


Date: 24.MAR.2020 16:17:56

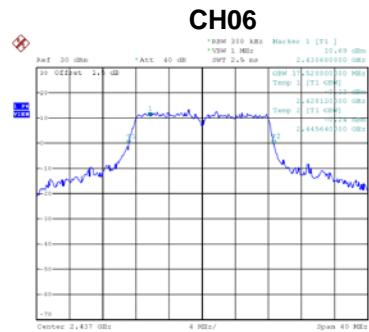


Date: 24.MAR.2020 16:31:47

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	17.44	Complies
06	2437	17.52	Complies
11	2462	17.12	Complies



Date: 24.MAR.2020 16:16:33



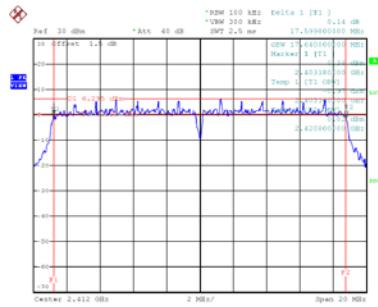
Date: 24.MAR.2020 16:18:03



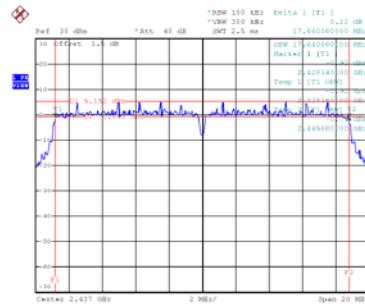
Date: 24.MAR.2020 16:31:55

Test Mode	TX N-20M Mode
-----------	---------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.60	500	Complies
06	2437	17.66	500	Complies
11	2462	17.59	500	Complies

CH01


Date: 24.MAR.2020 16:35:00

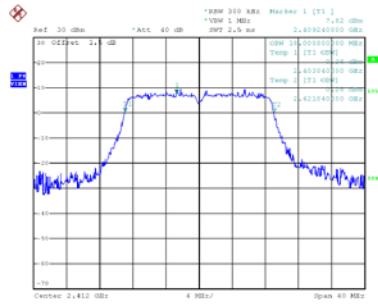
CH06


Date: 24.MAR.2020 16:36:22

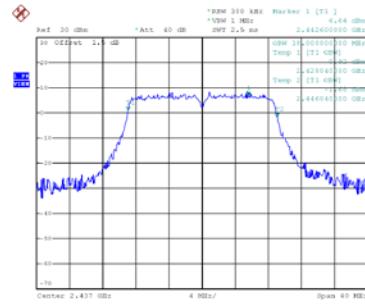
CH11


Date: 24.MAR.2020 16:39:13


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
01	2412	18.00	Complies
06	2437	18.00	Complies
11	2462	18.08	Complies

CH01


Date: 24.MAR.2020 16:35:00

CH06


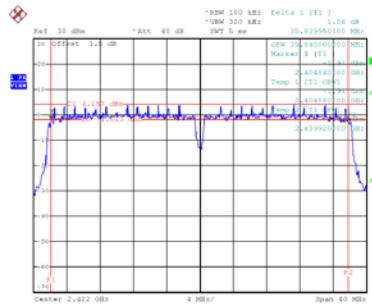
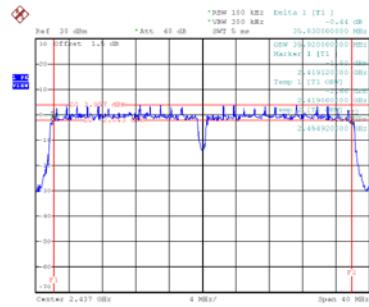

Date: 24.MAR.2020 16:36:30

CH11


Date: 24.MAR.2020 16:39:21

Test Mode	TX N-40M Mode
-----------	---------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.84	500	Complies
06	2437	35.83	500	Complies
09	2452	35.52	500	Complies

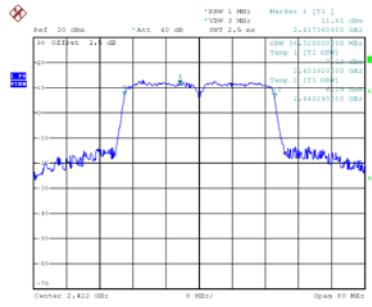
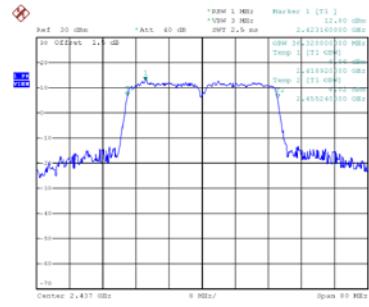

CH03

CH06

CH09


Date: 24.MAR.2020 16:40:35

Date: 24.MAR.2020 16:42:42

Date: 24.MAR.2020 16:45:16

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)	Result
03	2422	36.32	Complies
06	2437	36.32	Complies
09	2452	36.32	Complies

CH03

CH06

CH09


Date: 24.MAR.2020 16:40:43

Date: 24.MAR.2020 16:42:50

Date: 24.MAR.2020 16:45:24

APPENDIX F - MAXIMUM OUTPUT POWER

Non-Beamforming

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	26.19	1.0000	Complies
06	2437	25.83	1.0000	Complies
11	2462	25.05	1.0000	Complies

Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	28.81	1.0000	Complies
06	2437	29.03	1.0000	Complies
11	2462	27.83	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	25.02	1.0000	Complies
06	2437	26.78	1.0000	Complies
11	2462	24.72	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	24.94	1.0000	Complies
06	2437	27.15	1.0000	Complies
11	2462	24.22	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	27.99	30.00	1.0000	Complies
06	2437	29.98	30.00	1.0000	Complies
11	2462	27.49	30.00	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
03	2422	23.47	1.0000	Complies
06	2437	26.32	1.0000	Complies
09	2452	22.96	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
03	2422	23.01	1.0000	Complies
06	2437	26.49	1.0000	Complies
09	2452	22.86	1.0000	Complies

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	26.26	30.00	1.0000	Complies
06	2437	29.42	30.00	1.0000	Complies
09	2452	25.92	30.00	1.0000	Complies

Beamforming

Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	23.22	1.0000	Complies
06	2437	23.52	1.0000	Complies
11	2462	23.28	1.0000	Complies

Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
01	2412	23.25	1.0000	Complies
06	2437	23.29	1.0000	Complies
11	2462	23.29	1.0000	Complies

Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	26.25	29.48	0.8872	Complies
06	2437	26.42	29.48	0.8872	Complies
11	2462	26.30	29.48	0.8872	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
03	2422	23.05	1.0000	Complies
06	2437	23.02	1.0000	Complies
09	2452	23.12	1.0000	Complies

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (W)	Result
03	2422	23.72	1.0000	Complies
06	2437	23.22	1.0000	Complies
09	2452	23.62	1.0000	Complies

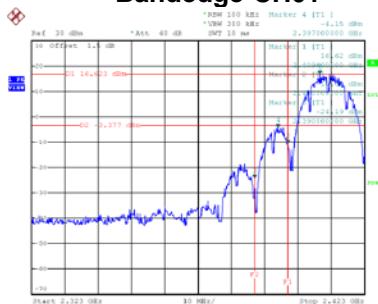
Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Peak Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	26.41	29.48	0.8872	Complies
06	2437	26.13	29.48	0.8872	Complies
09	2452	26.39	29.48	0.8872	Complies

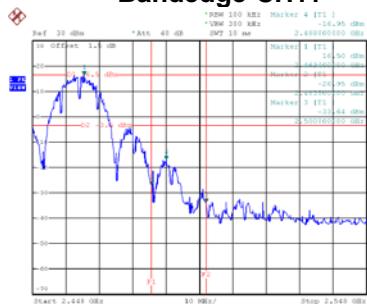
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Test Mode

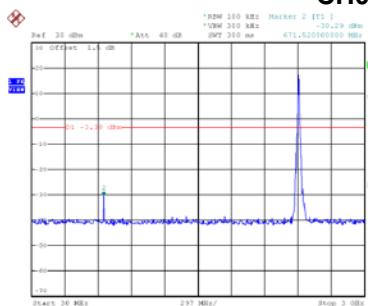
TX B Mode

Bandedge-CH01


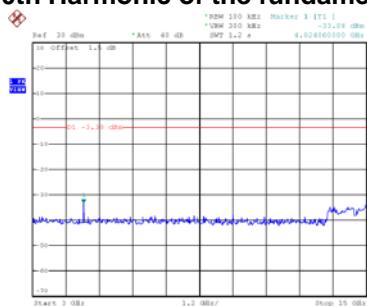
Date: 24.MAR.2020 17:23:32

Bandedge-CH11



Date: 24.MAR.2020 16:14:58

CH01 – 10th Harmonic of the fundamental frequency


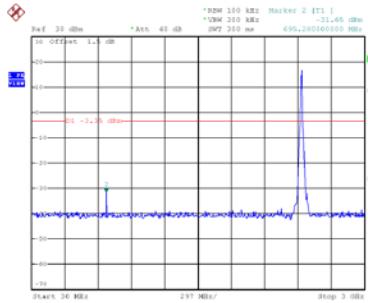
Date: 24.MAR.2020 17:23:45



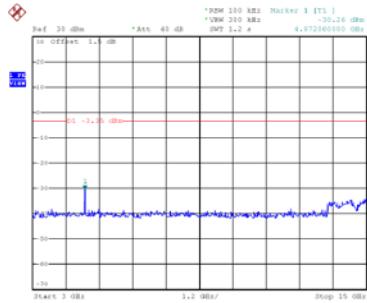
Date: 24.MAR.2020 17:23:52




Date: 24.MAR.2020 17:23:59

CH06 – 10th Harmonic of the fundamental frequency


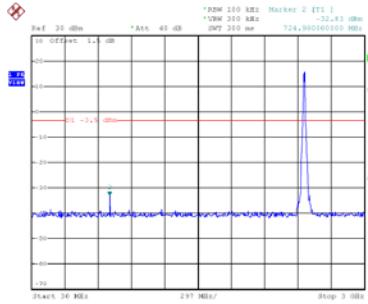
Date: 24.MAR.2020 16:13:42



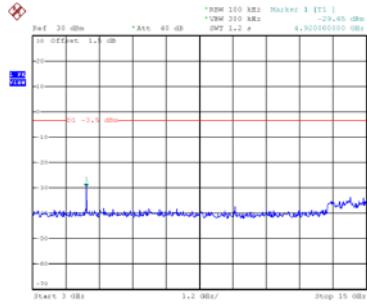
Date: 24.MAR.2020 16:13:49




Date: 24.MAR.2020 16:13:57

CH11 – 10th Harmonic of the fundamental frequency


Date: 24.MAR.2020 16:15:11



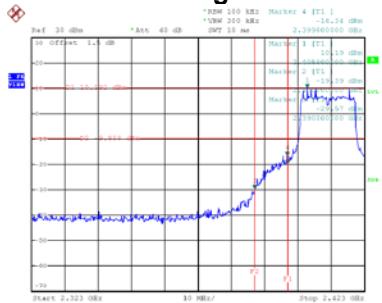
Date: 24.MAR.2020 16:15:19



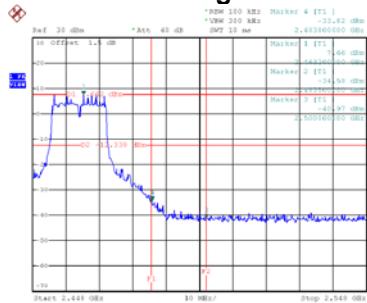
Date: 24.MAR.2020 16:15:26

Test Mode

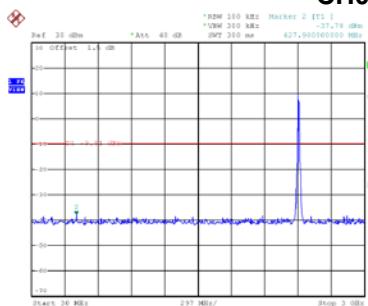
TX G Mode

Bandedge-CH01

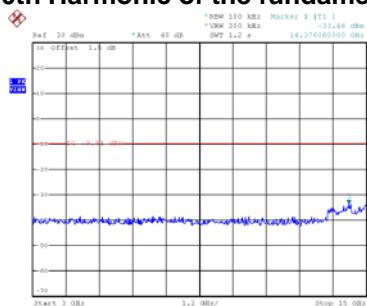
Date: 24.MAR.2020 16:16:41

Bandedge-CH11

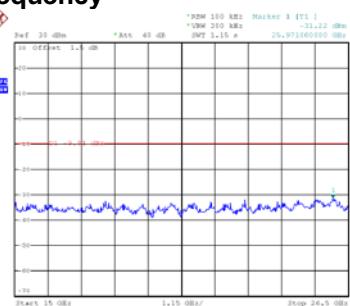
Date: 24.MAR.2020 16:17:03

CH01 – 10th Harmonic of the fundamental frequency

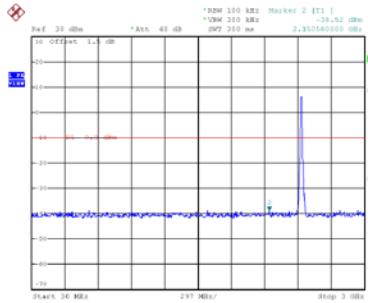
Date: 24.MAR.2020 16:16:54



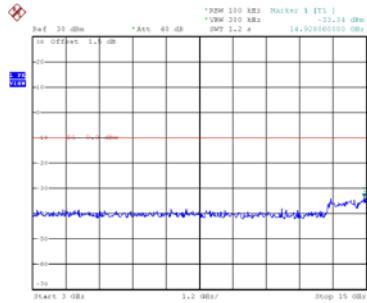
Date: 24.MAR.2020 16:17:01



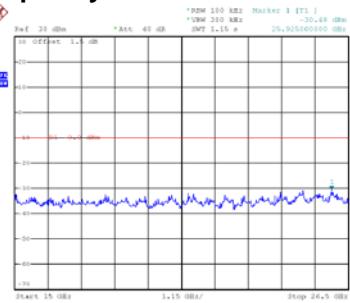
Date: 24.MAR.2020 16:17:09

CH06 – 10th Harmonic of the fundamental frequency

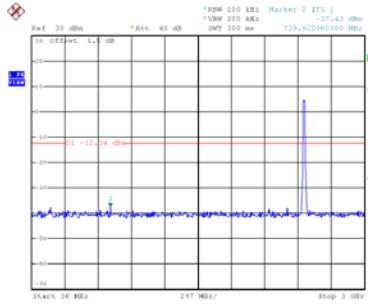
Date: 24.MAR.2020 16:18:24



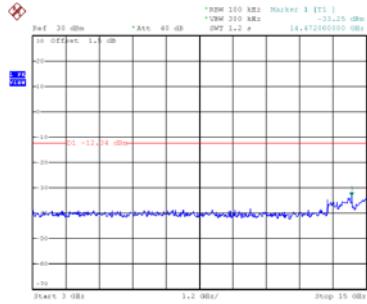
Date: 24.MAR.2020 16:18:31



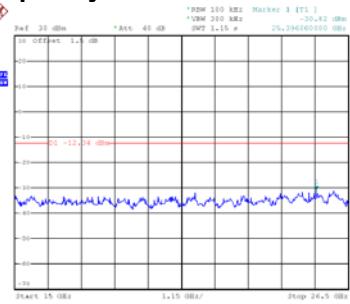
Date: 24.MAR.2020 16:18:39

CH11 – 10th Harmonic of the fundamental frequency

Date: 24.MAR.2020 16:32:17



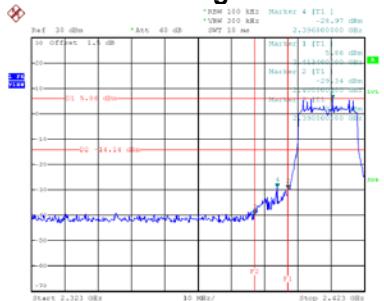
Date: 24.MAR.2020 16:32:25



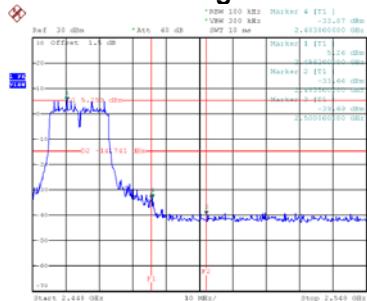
Date: 24.MAR.2020 16:32:33

Test Mode

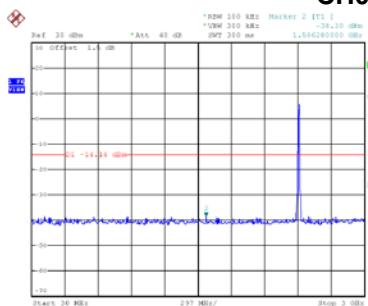
TX N-20M Mode_Ant. 2

Bandedge-CH01

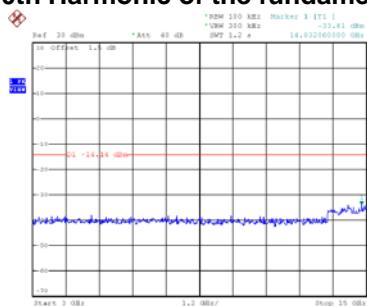
Date: 24.MAR.2020 16:49:12

Bandedge-CH11


Date: 24.MAR.2020 16:55:12

CH01 – 10th Harmonic of the fundamental frequency

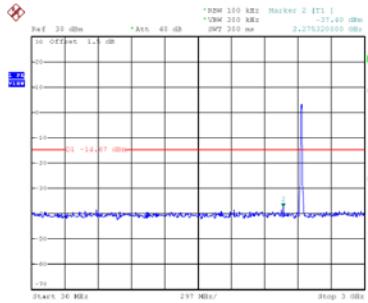
Date: 24.MAR.2020 16:49:26



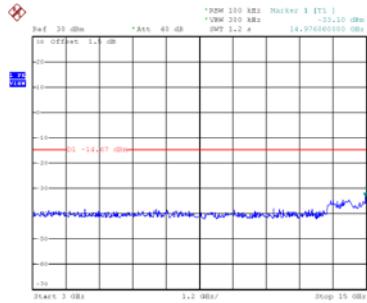
Date: 24.MAR.2020 16:49:34




Date: 24.MAR.2020 16:49:42

CH06 – 10th Harmonic of the fundamental frequency

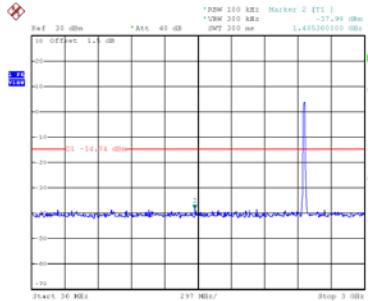
Date: 24.MAR.2020 16:53:02



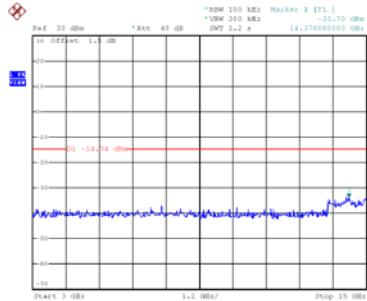
Date: 24.MAR.2020 16:53:10




Date: 24.MAR.2020 16:53:18

CH11 – 10th Harmonic of the fundamental frequency

Date: 24.MAR.2020 16:55:26



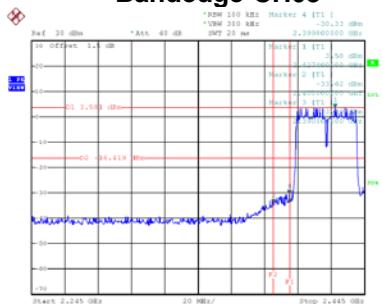
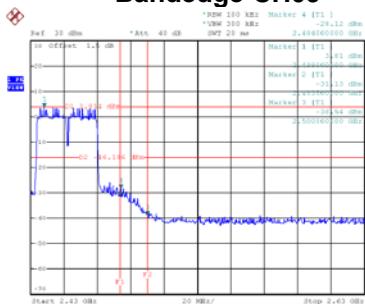
Date: 24.MAR.2020 16:55:34



Date: 24.MAR.2020 16:55:41


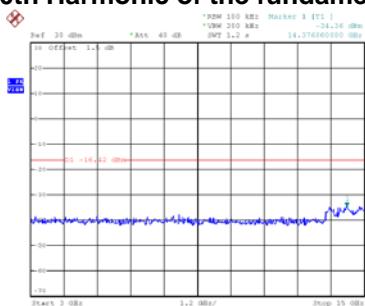
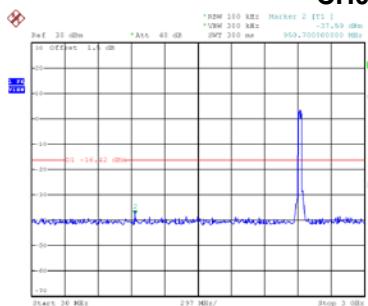
Test Mode

TX N-40M Mode_Ant. 2

Bandedge-CH03**Bandedge-CH09**

Date: 24.MAR.2020 16:56:50


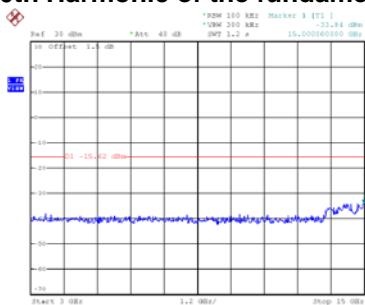
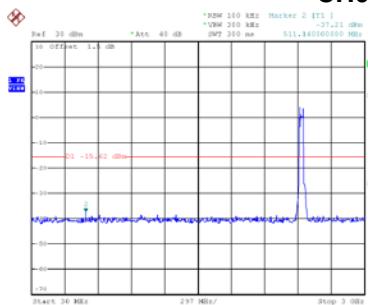
Date: 24.MAR.2020 17:00:54

CH03 – 10th Harmonic of the fundamental frequency

Date: 24.MAR.2020 16:57:12

Date: 24.MAR.2020 16:57:20


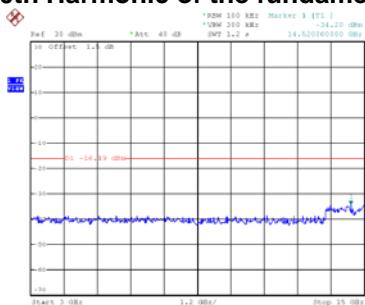
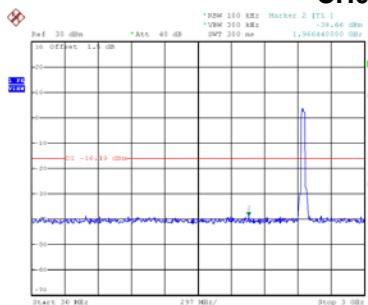
Date: 24.MAR.2020 16:57:28

CH06 – 10th Harmonic of the fundamental frequency

Date: 24.MAR.2020 16:58:42

Date: 24.MAR.2020 16:58:50

Date: 24.MAR.2020 16:58:57

CH09 – 10th Harmonic of the fundamental frequency

Date: 24.MAR.2020 17:01:07

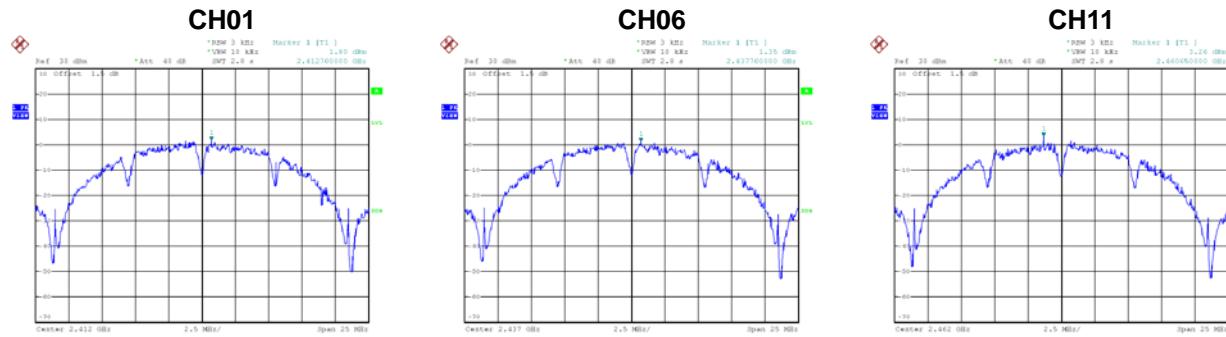
Date: 24.MAR.2020 17:01:15

Date: 24.MAR.2020 17:01:23

APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	TX B Mode
-----------	-----------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	1.80	8	Complies
06	2437	1.35	8	Complies
11	2462	3.26	8	Complies



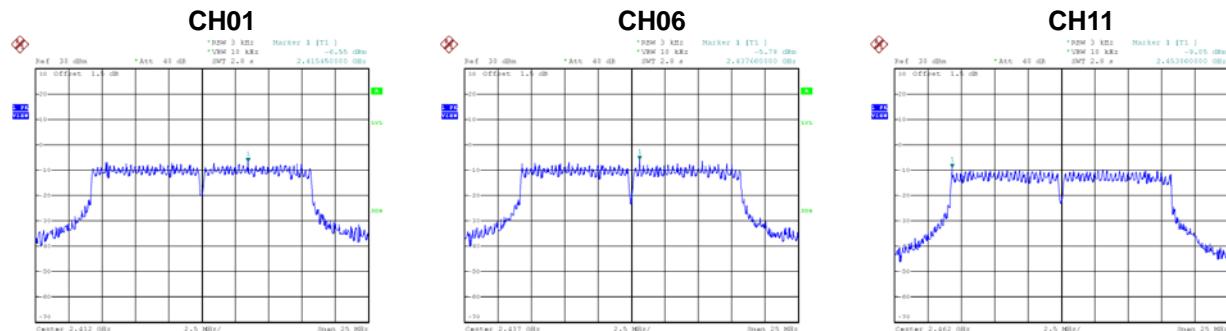
Date: 24.MAR.2020 16:11:51

Date: 24.MAR.2020 16:14:06

Date: 24.MAR.2020 16:15:35

Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.55	8	Complies
06	2437	-5.78	8	Complies
11	2462	-9.05	8	Complies



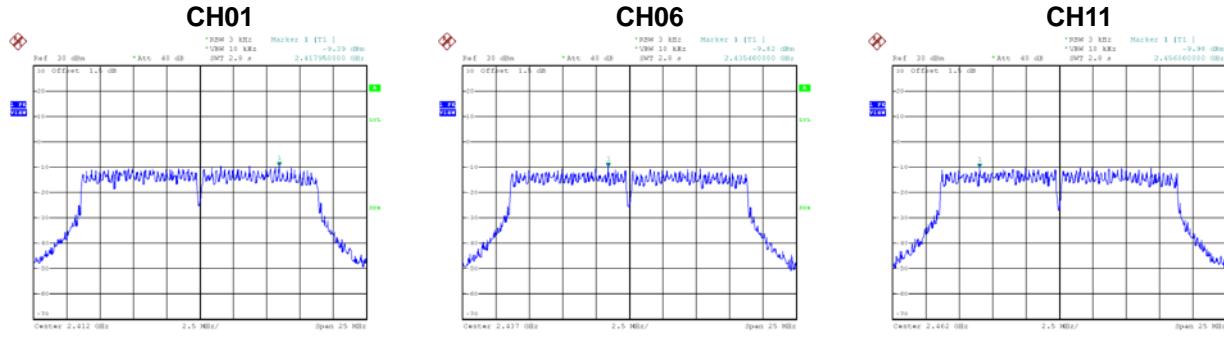
Date: 24.MAR.2020 16:17:18

Date: 24.MAR.2020 16:18:48

Date: 24.MAR.2020 16:32:42

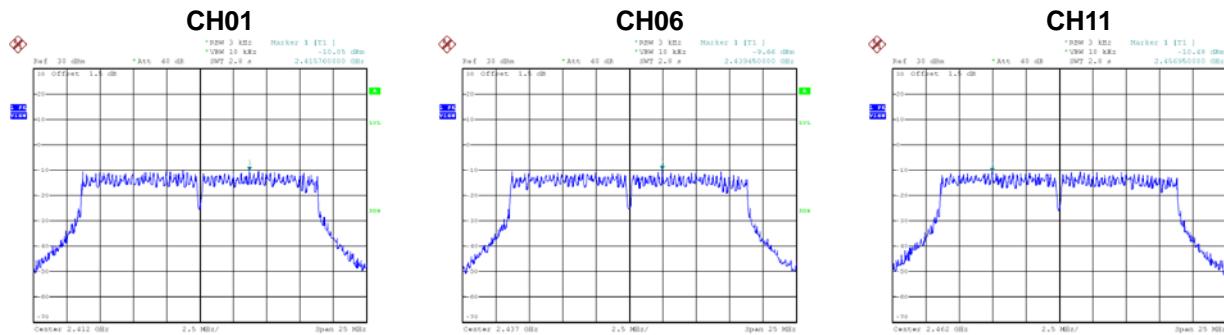
Test Mode	TX N-20M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-9.39	8	Complies
06	2437	-9.82	8	Complies
11	2462	-9.98	8	Complies



Test Mode	TX N-20M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-10.05	8	Complies
06	2437	-9.66	8	Complies
11	2462	-10.48	8	Complies

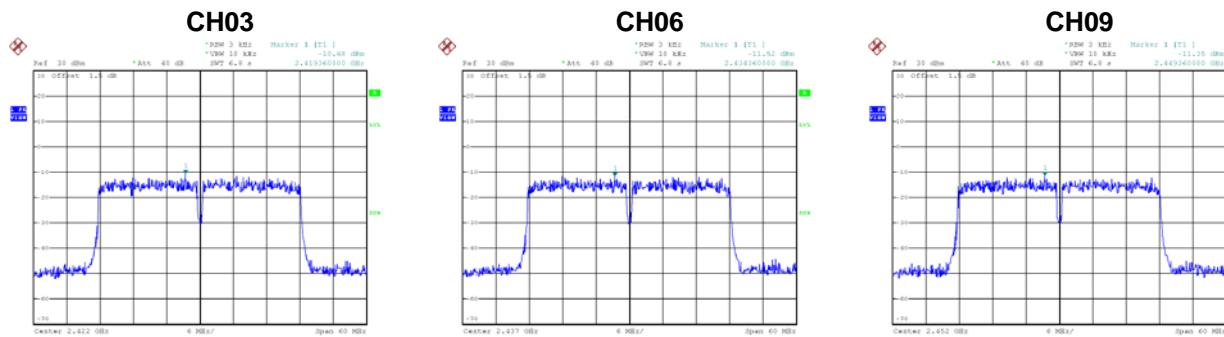


Test Mode	TX N-20M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.70	7.47	Complies
06	2437	-6.73	7.47	Complies
11	2462	-7.21	7.47	Complies

Test Mode	TX N-40M Mode_Ant. 1
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-10.68	8	Complies
06	2437	-11.52	8	Complies
09	2452	-11.35	8	Complies



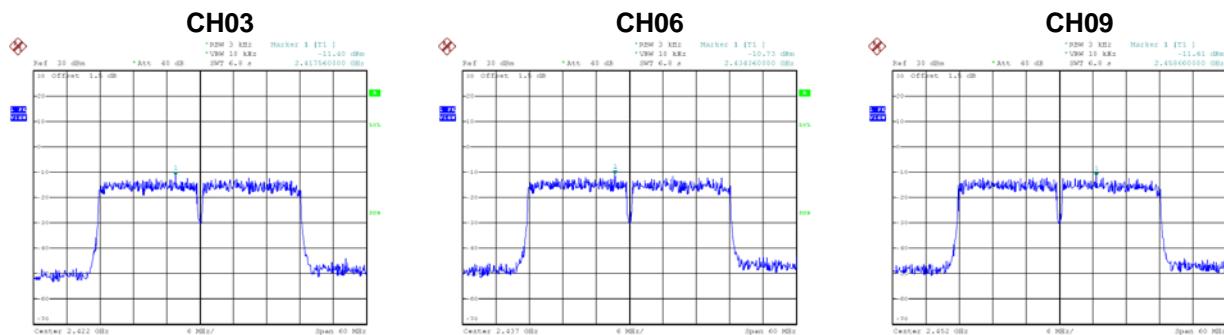
Date: 24.MAR.2020 16:41:34

Date: 24.MAR.2020 16:43:41

Date: 24.MAR.2020 16:46:15

Test Mode	TX N-40M Mode_Ant. 2
-----------	----------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-11.40	8	Complies
06	2437	-10.73	8	Complies
09	2452	-11.61	8	Complies



Date: 24.MAR.2020 16:57:40

Date: 24.MAR.2020 16:59:10

Date: 24.MAR.2020 17:01:35

Test Mode	TX N-40M Mode_Total
-----------	---------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-8.01	7.47	Complies
06	2437	-8.10	7.47	Complies
09	2452	-8.47	7.47	Complies

End of Test Report