

Radio Test Report

Application for Grant of Equipment Authorization

FCC Part 24, and IC RSS-133
[1930MHz – 1995MHz]



CERTIFICATE #: 0214.19

FCC ID: VBNAAFB-01
IC ID: 661W-AAFB

Product Name: Airscale Base Transceiver Station Radio Module
Model: AAFB

Applicant: Nokia Solutions and Networks
6000 Connection Drive
Irving, TX 75039

Test Sites: Nokia Solutions and Networks
6000 Connection Drive
Irving, TX 75039
and
National Technical Systems – Plano
1701 E Plano Pkwy #150
Plano, TX 75074


Test Dates: August 1-15, 2018
Total Number of pages: 116

Prepared By:



Christian Booker
EMI Engineer

Approved By:



Chelsie Morrow
Quality Assurance

Reviewed By:



Jeffrey Viel
General Manager

This report and the information contained herein represent the results of testing of only those articles/products identified in this document and selected by the client. The tests were performed to specifications and/or procedures approved by the client. National Technical Systems ("NTS") makes no representations expressed or implied that such testing fully demonstrates efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it present any statement whatsoever as to the merchantability or fitness of the test article or similar products for a particular purpose. This document shall not be reproduced except in full without written approval from NTS.

REVISION HISTORY

Rev#	Date	Comments	Modified By
0	08/23/2018	Initial Draft	
1	08/27/2018	Revised Per Customer Redlines	C. Booker

TABLE OF CONTENTS

REVISION HISTORY	2
TABLE OF CONTENTS	3
SCOPE	5
OBJECTIVE	6
STATEMENT OF COMPLIANCE	6
DEVIATIONS FROM THE STANDARDS	6
TEST RESULTS SUMMARY	7
FCC Part 24 and IC RSS-133 (Base Stations Operating in the 1930MHz to 1995MHz Band)	7
EXTREME CONDITIONS	8
MEASUREMENT UNCERTAINTIES	8
EQUIPMENT UNDER TEST (EUT) DETAILS	9
General	9
EUT Hardware	11
Enclosure	11
Support Equipment	11
Auxillary Equipment	11
EUT Interface Ports	12
EUT External Interfaces	12
EUT Operation	14
EUT Software	14
Modifications	14
TESTING	15
GENERAL INFORMATION	15
MEASUREMENT PROCEDURES	15
Antenna Port Conducted RF Measurement Test Setup Diagrams	17
Test Measurement Equipment	19

APPENDIX A: ANTENNA PORT TEST DATA FOR THE PCS BAND.....	20
RF Output Power.....	21
EIRP Calculations.....	33
Emission Bandwidth (26 dB down and 99%)	35
Antenna Port Conducted Band Edge	38
Transmitter Antenna Port Conducted Emissions.....	63
Transmitter Radiated Spurious Emissions	97
Frequency Stability/Accuracy	115

SCOPE

Tests have been performed on Nokia Solutions and Networks product Airscale Base Station Radio Module Model AAFB, pursuant to the relevant requirements of the following standard(s) to obtain device certification against the regulatory requirements of the Federal Communications Commission and Innovation, Science and Economic Development Canada (ISED).

- Code of Federal Regulations (CFR) Title 47 Part 2
- (Radio Standards Specification) RSS-Gen Issue 5 – April 2018
- CFR 47 Part 24 Subpart E – Broadband PCS
- RSS-133 Issue 6, Amendment 1 - January 18, 2018 (2GHz Personal Communications Services)

Conducted and radiated emissions data has been collected, reduced, and analyzed within this report in accordance with measurement guidelines set forth in the following reference standards:

ANSI C63.26-2015
ANSI C63.4-2014
ANSI TIA-603-E
FCC KDB 971168 D01v03r01
FCC KDB 971168 D03v01
FCC KDB 662911 D01v02r01
FCC KDB 662911 D02v01
TIA-102.CAAA-D

The intentional radiator above has been tested in a simulated typical installation to demonstrate compliance with the relevant FCC and ISED requirements.

Every practical effort was made to perform an impartial test using appropriate test equipment of known calibration. All pertinent factors have been applied to reach the determination of compliance.

The test results recorded herein are based on a single type test of Nokia Solutions and Networks product Airscale Base Station Radio Module Model AAFB and therefore apply only to the tested sample. The sample was selected and prepared by Hobert Smith and John Rattanavong of Nokia Solutions and Networks.

OBJECTIVE

The primary objective of the manufacturer is compliance with the regulations outlined in the previous section.

Prior to marketing in the USA and Canada, the device requires certification.

Certification is a procedure where the manufacturer submits test data and technical information to a certification body and receives a certificate or grant of equipment authorization upon successful completion of the certification body's review of the submitted documents. Once the equipment authorization has been obtained, the label indicating compliance must be attached to all identical units, which are subsequently manufactured.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product which may result in increased emissions should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing or I/O cable changes, etc.).

Testing was performed only on Model AAFB. No additional models were described or supplied for testing.

STATEMENT OF COMPLIANCE

The tested sample of Nokia Solutions and Networks product Airscale Base Transceiver Station Radio Module Model AAFB complied with the requirements of the standards and frequency bands declared in the scope of this test report.

Maintenance of compliance is the responsibility of the manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the device with respect to the standards detailed in this test report.

DEVIATIONS FROM THE STANDARDS

No deviations were made from the published requirements listed in the scope of this report.

TEST RESULTS SUMMARY

The following tables provide a summary of the test results:

FCC Part 24 and IC RSS-133 (Base Stations Operating in the 1930MHz to 1995MHz Band)

AAFB operating in the PCS Band											
FCC	IC	Description	Measured		Limit	Results					
Transmitter Modulation, output power and other characteristics											
24.229	RSS-133 Section 6.1	Frequency Ranges	LTE5: 1932.5 – 1992.5MHz LTE10: 1935.0 – 1990.0MHz LTE15: 1937.5 – 1987.5MHz LTE20: 1940.0 – 1985.0MHz		1930.0 – 1995.0MHz	Pass					
2.1047	RSS-133 Section 6.2	Modulation Type	QPSK, 16QAM, 64QAM and 256QAM for LTE5, LTE10, LTE15 & LTE20		Digital	Pass					
24.232	RSS-133 Section 6.4	Output Power	Highest Conducted Power Output RMS: 38.14dBm EIRP/MHz depends on antenna gain and bandwidth. (See EIRP Calculations Section)		1640W/MHz EIRP/MHz	Pass					
24.232	RSS-133 Section 6.4	Peak to Average Power Ratio	Highest Measured PAPR: 7.30dB		13dB	Pass					
	RSS-133 Section 2.3	99% Emission Bandwidth	LTE5: 4.4996MHz LTE10: 8.9828MHz LTE15: 13.5070MHz LTE20: 17.9775MHz		Remain in Block	Pass					
24.238		26dB down Emission Bandwidth	LTE5: 4.844MHz LTE10: 9.678MHz LTE15: 14.531MHz LTE20: 19.389MHz		Remain in Block	Pass					
Transmitter Spurious Emissions¹											
24.238	RSS-133 Section 6.5.1	At the antenna terminals	< -25dBm		-25dBm per Transmit Chain	Pass					
		Field Strength	50.62dBuV/m at 1m Eq. to -54.1dBm EIRP		-13dBm EIRP	Pass					
Other Details											
24.235	RSS-133 Section 6.3	Frequency Stability	Stays within authorized frequency block (0.001ppm)		Stays within block ±1.0ppm	Pass					
1.1310	RSS102	RF Exposure	N/A			Pass ²					
Note 1: Based on 1MHz RBW. In the 1MHz immediately outside and adjacent to the frequency block a RBW of at least 1% of the emission bandwidth was used. The measurement bandwidth is 1MHz for measurements more than 1MHz from the band edge.											
Note 2: Applicant's declaration on a separate exhibit based on hypothetical antenna gains.											

Emission Designators								
Channel Bandwidth	LTE-QPSK		LTE-16QAM		LTE-64QAM		LTE-256QAM	
	FCC	IC	FCC	IC	FCC	IC	FCC	IC
5M	4M83F9W	4M49F9W	4M80F9W	4M49F9W	4M84F9W	4M49F9W	4M84F9W	4M50F9W
10M	9M66F9W	8M97F9W	9M65F9W	8M98F9W	9M68F9W	8M98F9W	9M65F9W	8M98F9W
15M	14M49F9W	13M44F9W	14M44F9W	13M51F9W	14M48F9W	13M46F9W	14M53F9W	13M47F9W
20M	19M34F9W	17M94F9W	19M27F9W	17M94F9W	19M34F9W	17M95F9W	19M39F9W	17M98F9W

Note: FCC based on 26dB emission bandwidth; IC based on 99% emission bandwidth.

EXTREME CONDITIONS

Frequency stability is determined over extremes of temperature and voltage. The extremes of voltage were 85 to 115 percent of the nominal value.

The extremes of temperature were -30°C to +50°C as specified in FCC §2.1055(a)(1).

MEASUREMENT UNCERTAINTIES

Measurement uncertainties of the test facility based on a 95% confidence level are as follows:

Test	Uncertainty
Radio frequency	± 0.2ppm
RF power conducted	±1.2 dB
RF power radiated	±3.3 dB
RF power density conducted	±1.2 dB
Spurious emissions conducted	±1.2 dB
Adjacent channel power	±0.4 dB
Spurious emissions radiated	±4 dB
Temperature	±1°C
Humidity	±1.6 %
Voltage (DC)	±0.2 %
Voltage (AC)	±0.3 %

EQUIPMENT UNDER TEST (EUT) DETAILS

General

The equipment under test (EUT) is a Nokia Solutions and Networks AirScale Base Transceiver Station (BTS) radio module, model AAFB. The AAFB radio module is a subassembly of the massive MIMO adaptive antenna (MMAA) assembly. The MMAA integrates the radio module variants with various antenna variants into one assembly. The MMAA assembly/antenna variants are not directly used/part of this radio approval test effort (i.e.: The radio module is tested under this effort. The antenna assembly is not part of the test under this effort). There are three versions of the MMAA assembly that contain the AAFB radio module that are listed below. These MMAA assemblies also contain the AAIB and AAIC radio modules whose certification/testing are documented elsewhere.

- (1) AAFIA Dual 16T16R 100W +100W (8 column antenna) _ contains the AAIB and AAFB
- (2) AAFIB Dual 16T16R 150W +100W (4 column antenna) _ contains the AAIC and AAFB
- (3) AAFIC Dual 16T16R 100W +100W (4 column antenna) _ contains the AAIB and AAFB

The AAFB has 16 transmit/receive antenna ports that supports 3GPP frequency band 25 operations (BTS RX: 1850 to 1915 MHz/BTS TX: 1930 to 1995 MHz). The maximum RF output power of the radio module antenna port is 6.25 watts. The total RF output power for the AAFB radio module is 100 watts (16 x 6.25 watts). The radio module supports LTE-FDD, and narrow band IoT (internet of things) operations (in-band, guard band, standalone). The TX and RX instantaneous bandwidth cover the full operational (Band 25) bandwidth. The radio module supports 5, 10, 15, and 20MHz LTE bandwidths. The radio module supports four LTE downlink modulation types (QPSK, 16QAM, 64QAM and 256QAM) and NB-IoT. Multi-carrier operation is supported with the maximum bandwidth for all carriers of 40MHz. The scope of testing in this effort is for LTE-FDD operations.

The radio module has external interfaces including DC power (DC In), ground, transmit/receive (ANT), and optical (OPT). The massive MIMO adaptive antenna assembly (configured with AAFB and AAIB/AAIC radios) may be pole or wall mounted. The radio module may be configured with an optional cooling fan.

The AAFB LTE channel numbers and frequencies are as follows:

	Downlink EARFCN	Downlink Frequency (MHz)	LTE Channel Bandwidth			
			5 MHz	10 MHz	15 MHz	20 MHz
AAFB Band 25 (Antennas 1 through 16)	8040	1930.0	Band Edge	Band Edge	Band Edge	Band Edge
					
	8065	1932.5	Bottom Ch			
					
	8090	1935.0		Bottom Ch		
					
	8115	1937.5			Bottom Ch	
					
	8140	1940.0				Bottom Ch
					
	8365	1962.5	Middle Ch	Middle Ch	Middle Ch	Middle Ch
					
	8590	1985.0				Top Channel
					
	8615	1987.5			Top Channel	
					
	8640	1990.0		Top Channel		
					
	8665	1992.5	Top Channel			
					
	8690	1995.0	Band Edge	Band Edge	Band Edge	Band Edge

AAFB Downlink Band Edge LTE Band 25 Frequency Channels

Multicarrier Test Cases:

- (1) Two LTE5 carriers with minimum spacing at the lower band edge (1932.5MHz and 1937.5MHz).
- (2) Two LTE5 carriers with maximum spacing at the lower band edge (1932.5MHz and 1967.5MHz).
- (3) Two LTE5 carriers with minimum spacing at the upper band edge (1987.5MHz and 1992.5MHz).
- (4) Two LTE5 carriers with maximum spacing at the upper band edge (1957.5MHz and 1992.5MHz).

EUT Hardware

The EUT hardware used in testing between August 1 -15, 2018.

Company	Model	Description	Part/Serial Number	FCC ID/IC Number
Nokia Solutions and Networks	AAFB	AirScale BTS Band 25 Radio Module	Part#: 090148A.x31 Serial#: YK182600043	FCC ID: VBNAAFB-01 IC ID: 661W-AAFB

Enclosure

The EUT enclosure is made of heavy duty aluminum.

Support Equipment

Company	Model	Description	Part/Serial Number	FCC ID/IC Number
Nokia Solutions and Networks	ASIA	Airscale System Module	Part#: 473095A.203 Serial#: AH173111443	N/A
HP	Elite Book 6930p	Laptop PC	N/A	N/A
Dell	Studio XPS	Instrumentation PC	N/A	N/A

Auxillary Equipment

Company	Description	Part Number	Serial Number
Nokia	FORVB 10GHz SFP Module (Plugs into Optical Ports)	473544B.101	FR173524644
Nokia	Cover Plate Test Fixture (Simulates mechanical interface to MMAA and provides RF interface to radio module antenna ports.)	None	None
RLC Electronics	2.5GHz High Pass Filter ¹	F-100-3000-5-R	0028
Microwave Circuits	1400MHz Low Pass Filter ¹	L13502G1	2454-01
Weinschel	Attenuator 10dB-100 Watt ¹	48-10-34-LIM	BJ1771
Narda	Attenuator 30dB-50 Watt ¹	7768-30	-
Huber & Suhner	RF Cable – 0.5 meter ¹	Sucoflex 104	553624/4
Huber & Suhner	RF Cable - 1 meter ¹	Sucoflex 106	297370

Note 1: Used only in antenna port RF conducted emission testing.

EUT Interface Ports




The I/O cabling configuration during testing was as follows:

Cable	Type	Shield	Length	Used in Test	Quantity	Termination
Power Input	Power	No	~ 3 m	Yes	1	Power Supply
Earth	Earth	No	~ 1 m	Yes	1	Lab earth ground
Antenna	RF	Yes	~ 2 m	Yes	16	50Ω Loads
Optical	Optical	No	>6 m	Yes	1	System Module

EUT External Interfaces

Name	Qty	Connector Type	Purpose (and Description)
DC In	1	Quick Disconnect	2-pole Power Circular Connector
GND	1	Screw lug (2xM5/1xM8)	Ground
ANT	16	4.3-10 Blind Mate/Quick Disconnect	RF signal for Transmitter/Receiver (50 Ohm)
Unit	1	LED	Unit Status LED
OPT	2	SFP+ cage	Optical Interface
Fan	1	Microfit	Power for fan on the side of radio module.

AAFB Connector Layout:

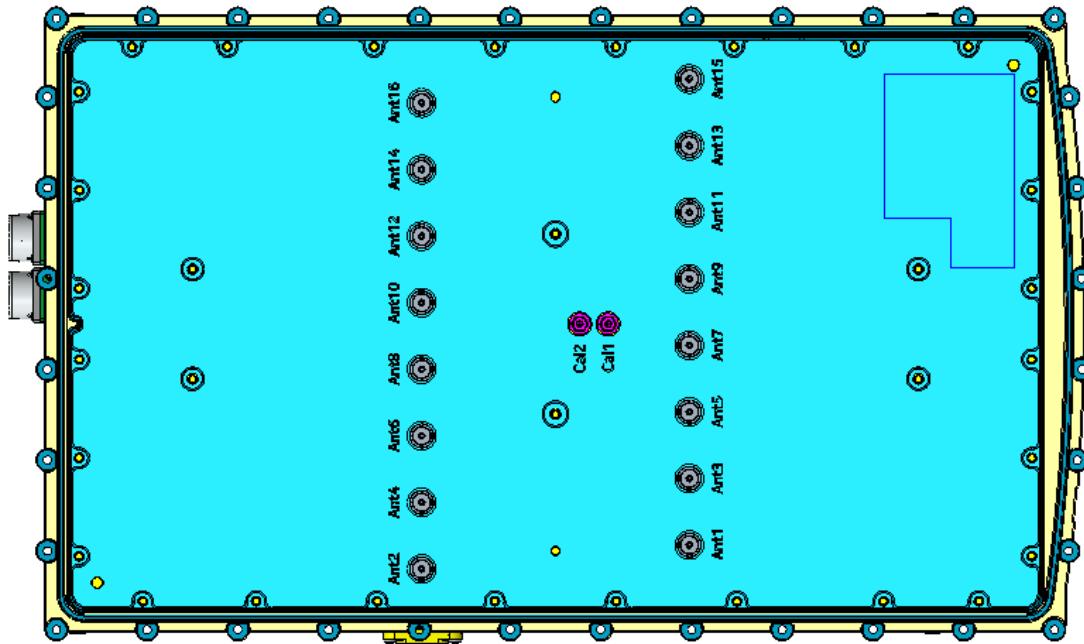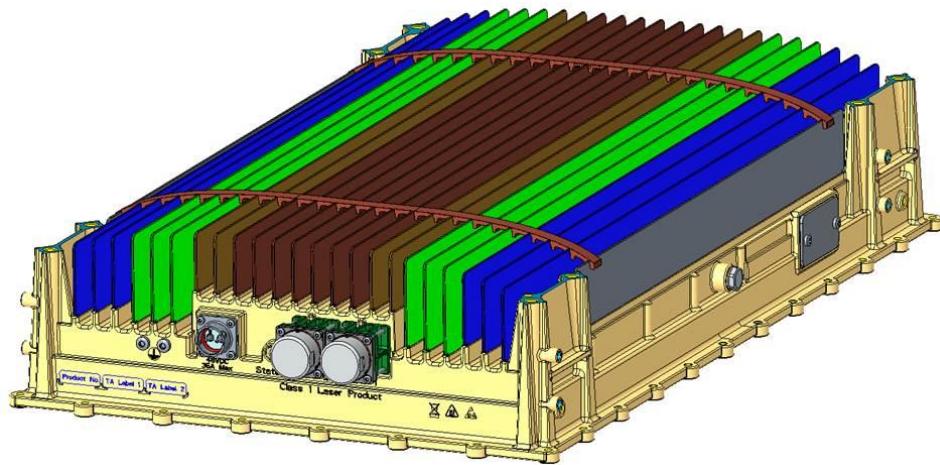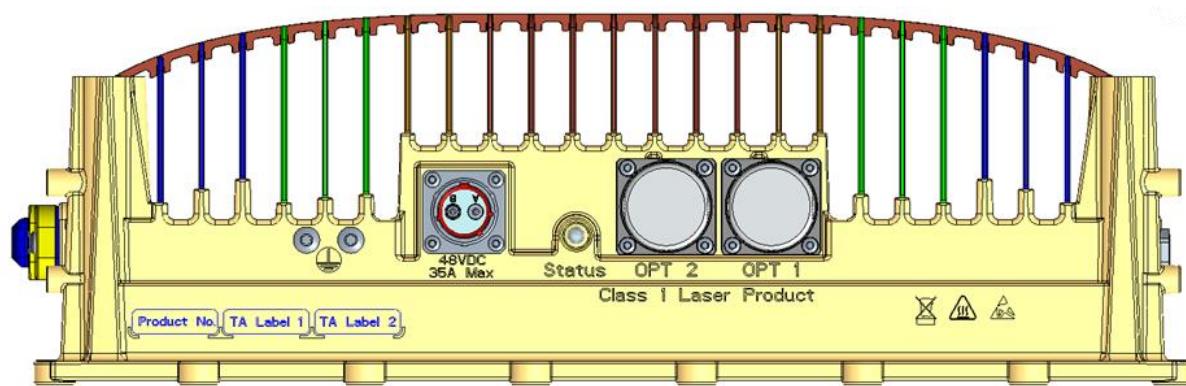

EUT Operation

During testing, the EUT was transmitting continuously with 100% duty-cycle at full power on all chains.

EUT Software

The laptop PC connects to the System Module over the LMP (Ethernet) port. The system module controls the radio module via the optical interface. The laptop is used for changing configuration settings, monitoring tests and controlling the BTS. The following software versions are used for the testing:

- (1) Radio Module Software: SRM58.07.R01-D(3.4)
- (2) System Module Software: FB_PS_REL_2016_03_210

Modifications

No modifications were made to the EUT during testing.

TESTING

GENERAL INFORMATION

Antenna port measurements were taken with NTS personnel (Jose Mendez) at Nokia premises located at 6000 Connection Drive; Irving, Texas 75309.

Radiated emissions and frequency accuracy/stability measurements were taken at NTS Plano branch located at 1701 E Plano Pkwy #150 Plano, TX 75074.

Radiated spurious emissions measurements were taken at the NTS Plano Anechoic Chamber listed below. The site conforms to the requirements of ANSI C63.4-2014: "*American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*" and CISPR 16-1-4:2010-04: "*Specification for radio disturbance and immunity measuring apparatus and methods - Part 1-4: Radio disturbance and immunity measuring apparatus – Antennas and test sites for radiated disturbance measurements*". The site is on file with the FCC and Industry Canada.

Site	Registration Numbers		Location
	FCC	Canada	
Chamber 1	A2LA Accredited Designation Number US1077	IC 4319A-2	1701 E Plano Pkwy #150 Plano, TX 75074.

Considerable engineering effort has been expended to ensure that the facilities conform to all pertinent requirements.

MEASUREMENT PROCEDURES

The RMS average output power, emission bandwidth, conducted spurious and conducted band edge measurements were performed with a spectrum analyzer. The carrier frequency accuracy/stability and complementary cumulative distribution function (CCDF) measurements were performed with a LTE signal analyzer. The EUT was operated at maximum RF output power for all tests. While measuring one transmit chain, the other ones were terminated with termination blocks. All measurements were corrected for the insertion loss of the RF network (attenuators, couplers, filters, and cables) inserted between the RF port of the EUT and the spectrum analyzer. Block diagrams and photographs of the test setups are provided below.

The 26dB emission bandwidth was measured in accordance with section 4 of FCC KDB 971168 D01v03r01 and ANSI C63.26 section 5.4. The 99% occupied bandwidth was measured in accordance with section 6.7 of RSS-Gen Issue 4. For both measurements, an occupied bandwidth built-in function in the spectrum analyzer was used and Keysight BenchVue Software was used to capture the spectrum analyzer screenshots. Spectrum analyzer settings are shown on their corresponding plots in test results section.

The emissions at the band edges were captured with Keysight BenchVue Software with settings described in the corresponding sections of the FCC and IC regulatory requirements. Spectrum analyzer settings are shown on their corresponding plots in test results section.

Average output power measurements were performed in accordance with sections 5.4 of FCC KDB 971168 D01 v03r01 and ANSI C63.26. Measurements were performed with the built-in channel power function found in the spectrum analyzer and the screenshots were captured using Keysight BenchVue Software. Peak to average power ratio (PAPR) was measured in accordance with Section 5.7.2 of FCC KDB 971168 D01 v03r01 and ANSI C63.26 section 5.2.3.4. Signal Analyzer CCDF screenshots were captured using Keysight BenchVue Software. Analyzer settings are shown on their corresponding plots in test results section.

Conducted spurious emissions were captured with Keysight BenchVue Software across the 9kHz-20GHz frequency span. A low pass was used to reduce measurement instrumentation noise floor for the frequency ranges less than 20MHz. A high pass filter was used to reduce measurement instrumentation noise floor for the frequency ranges above 3GHz. The total measurement RF path loss of the test setup (attenuators, low pass filter, high pass filter and test cables) were accounted for by the spectrum analyzer reference level offset. Spectrum analyzer settings are described in the corresponding test result section.

For frequency stability/accuracy measurements, the EUT was placed inside a temperature chamber with all support and test equipment located outside of the chamber. Temperature was varied across the specified range in 10-degree increments and EUT was allowed enough time to stabilize at each temperature step (a minimum of 30 minutes per step). The input voltage was varied as required by FCC/IC regulatory requirements. An LTE signal analyzer as detailed in the test equipment section was used for frequency stability/accuracy measurements.


Transmitter radiated spurious emissions measurements were made in accordance with ANSI C63.4-2014 by measuring the field strength of the emissions from the device at 3m test distance for emissions below 10 GHz and at 1m test distance for emissions above 10 GHz. The eirp limit as specified in the relevant rule part(s) is converted to a field strength at the test distance and the emissions from the EUT are then compared to that limit. Only emissions within 20dB of this limit are subjected to a substitution measurement in accordance with TIA-603. Both preliminary and final measurements were performed at the same FCC listed test chamber. Preliminary scans were performed with TILE6 software. This software corrected the measurements for antenna factors, cable losses and pre-amplifier gains. Both polarizations of the receiving antenna were scanned from 30MHz to 20GHz with a peak detector (RBW=1MHz, VBW=3MHz, with trace max hold over multiple sweeps). Based on the preliminary scan results, frequencies of interest have been maximized via rotating the EUT 360 degrees and varying the height of the test antenna (1m to 4m). Final measurements were also taken with the peak detector as described above. A biconilog antenna was used for 30MHz-1GHz range. A double ridged waveguide horn antenna was used for 1-18GHz range and a smaller horn antenna was used for 18-20GHz range. The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor-drive to vary the antenna height. EUT was placed on a non-conductive RF transparent structure to provide 80cm height from the ground floor. A motorized turntable allowed it to be rotated during testing to determine the angle with the highest level of emissions.

Antenna Port Conducted RF Measurement Test Setup Diagrams

The following are the setups used in the RF conducted emissions testing. Photographs of the test setups are also provided.




Setup for 9kHz to 150kHz and 150kHz to 20MHz Measurements

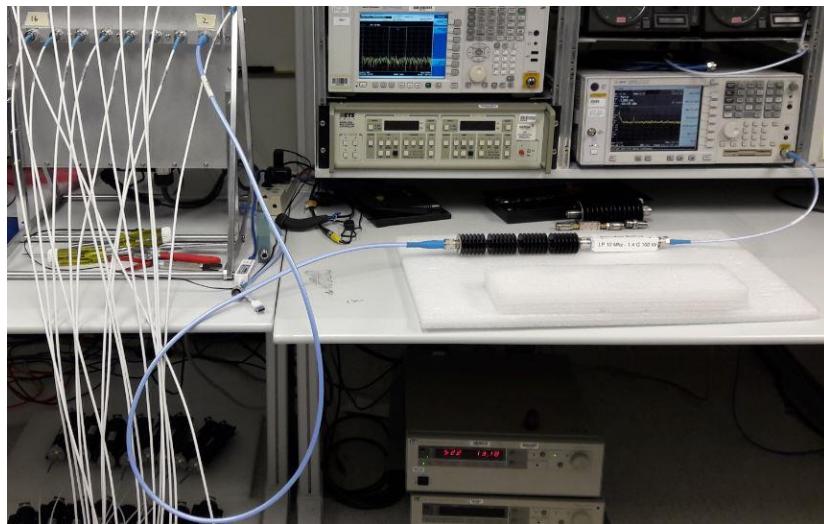


Photograph of 9kHz to 150kHz and 150kHz to 20MHz Test Setup




Setup for 20MHz to 3GHz Measurements

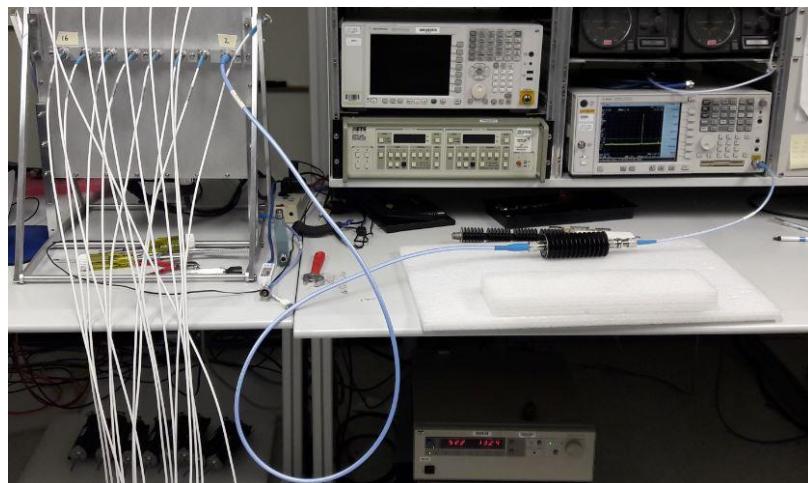


Photograph of 20MHz to 3GHz Test Setup




Setup for 3GHz to 10GHz, 10GHz to 18GHz and 18GHz to 20GHz Measurements

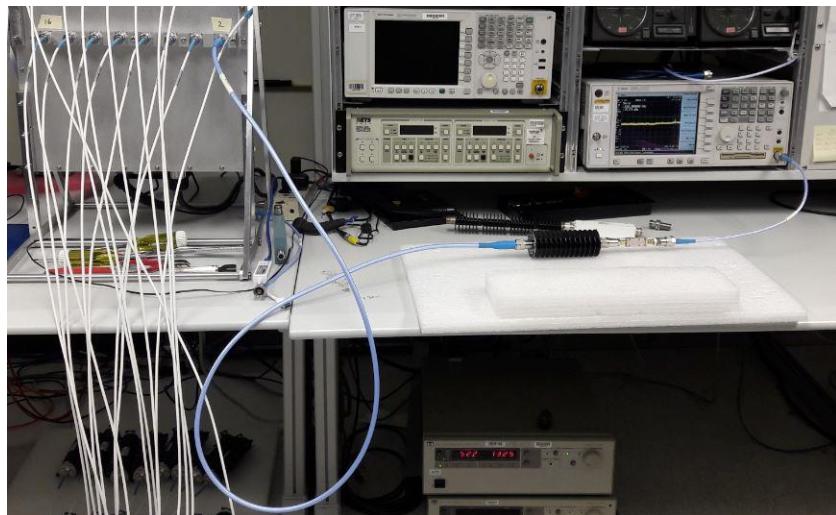

Photograph of 3GHz to 10GHz, 10GHz to 18GHz and 18GHz to 22GHz Test Setup

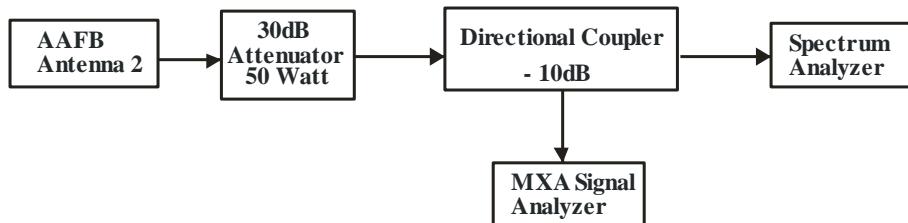

Setup for PCS Band Measurements

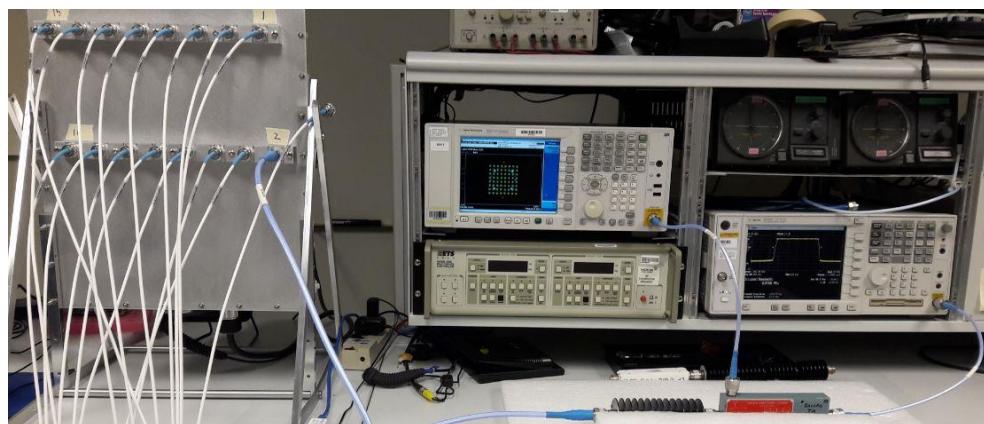


Photograph of PCS Band Test Setup

Test Measurement Equipment

NTS Equipment #	Description	Manufacturer	Model	Calibration Duration	Calibration Due Date
WC020917	Antenna	ETS	3142D	24 Months	1/15/2019
WC025240	Spectrum Analyzer	Agilent	E4446A	12 Months	3/3/2019
WC021471	Preamp	MITEQ	AM-1431-N11975C	12 Months	2/6/2019
WC021478	Preamp	HP	8449B	12 Months	3/19/2019
WC020885	Antenna	ETS	3115	12 Months	3/14/2019
WC021208	Antenna	EMCO	3116	12 Months	11/15/2018
WC038434	Preamp 10-40GHz	MITEQ	JS32-00104000-62-5P	12 Months	10/13/2018
WC027005	Multimeter	Fluke	87	12 Months	7/17/2019
WC021684	Temperature / Humidity Chamber	Russells Technical Products	RD45-5-5	No Calibration Required	No Calibration Required
WC038459	Temperature Controller	Watlow	F4	12 Months	11/28/2018
120194 ¹	PSA Spectrum Analyzer	Agilent	E4440A	12 Months	10/25/2018
NM06345 ¹	ENA Network Analyzer	Keysight	E5063A	12 Months	11/20/2018
NM04509 ¹	Network Analyzer	Rohde & Schwarz	ZVL 3	12 Months	2/03/2019
NM06374 ¹	MXG Analog Signal Gen	Keysight	N5183B	36 Months	02/04/2021
NM04508 ¹	MXA Signal Analyzer	Agilent	N9020A	24 Months	5/2/2019
Note 1: Customer equipment					

APPENDIX A: ANTENNA PORT TEST DATA FOR THE PCS BAND

All conducted RF measurements in this section were made at AAFB antenna ports. The test setup used is provided below.

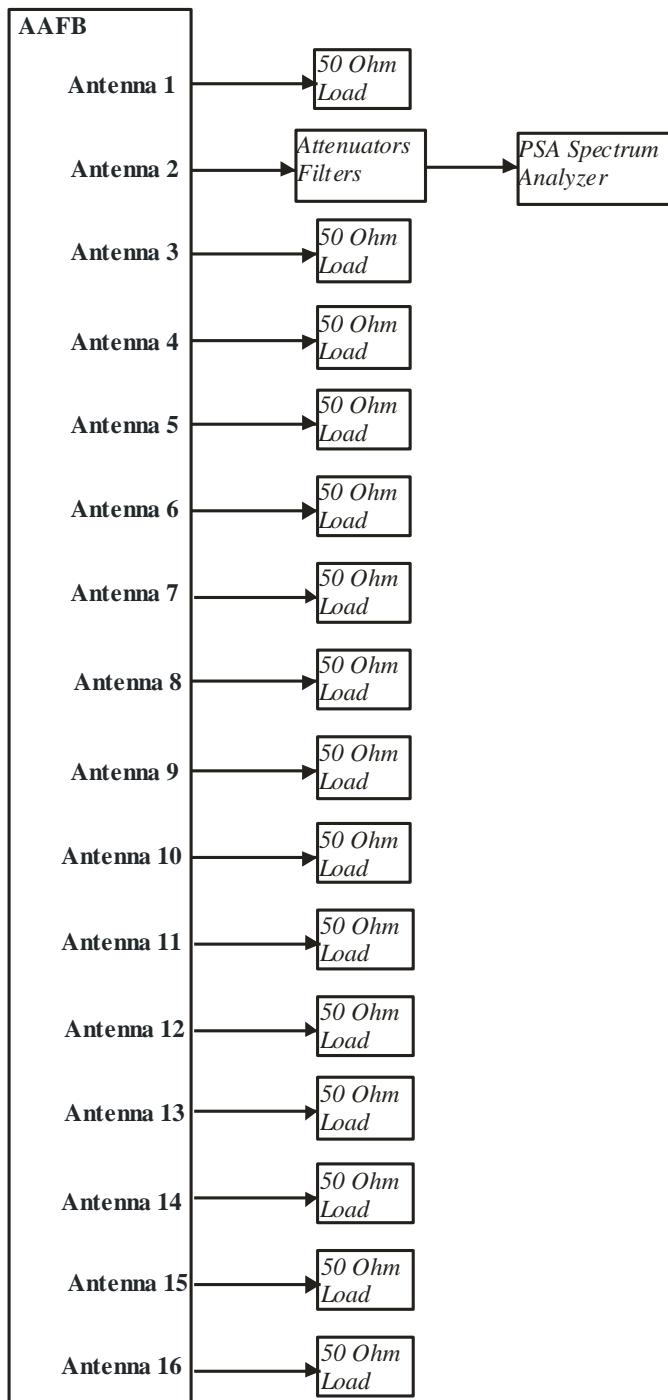

Test Setup Used for Conducted RF Measurements on AAFB

RF Output Power

RF output power has been measured in RMS Average terms for each PCS transmit chain at the middle channel for 256QAM modulation and LTE5 bandwidth as described in section 5.2 of KDB 971168 D01v03r01 and ANSI C63.26-2015 section 5.2.4.4. The peak to average power ratio (PAPR) has been measured using the signal analyzer complementary cumulative distribution function (CCDF) for a probability of 0.1% as described in section 5.7.2 of KDB 971168 D01v03r01 and ANSI C63.26-2015 section 5.2.3.4. All results are presented in tabular form below.

Antenna (LTE Channel)	LTE BW	LTE - 256QAM		
		PAPR (dB)	Average Power	
			dBm	Watts
Port 1 (Mid Ch)	5M	7.18	37.86	6.11
Port 2 (Mid Ch)	5M	7.19	38.03	6.35
Port 3 (Mid Ch)	5M	7.18	37.72	5.92
Port 4 (Mid Ch)	5M	7.19	37.97	6.27
Port 5 (Mid Ch)	5M	7.19	37.57	5.71
Port 6 (Mid Ch)	5M	7.18	37.91	6.18
Port 7 (Mid Ch)	5M	7.18	37.62	5.78
Port 8 (Mid Ch)	5M	7.18	37.96	6.25
Port 9 (Mid Ch)	5M	7.18	37.75	5.96
Port 10 (Mid Ch)	5M	7.19	37.98	6.28
Port 11 (Mid Ch)	5M	7.18	37.84	6.08
Port 12 (Mid Ch)	5M	7.18	37.92	6.19
Port 13 (Mid Ch)	5M	7.19	37.84	6.08
Port 14 (Mid Ch)	5M	7.18	37.79	6.01
Port 15 (Mid Ch)	5M	7.19	37.85	6.10
Port 16 (Mid Ch)	5M	7.18	37.92	6.19
Total Power Middle Channel	5M	-	49.89	97.46

The variation in RMS output power levels between the antenna ports is 0.46 dB per data sample provided above. Pre-compliance testing (and testing of similar EUTs) shows that the output power variation between antenna ports is small (the output ports are essentially electrically identical). The highest power port was selected as the worst case.

Pre-compliance testing has shown that the output power variation between modulation types is small. Antenna port 2 power output measurements for the LTE5 bandwidth for all modulation types on the middle (center) channel are provided below.

	Modulation Type							
	QPSK		16QAM		64QAM		256QAM	
	PAPR (dB)	Ave (dBm)	PAPR (dB)	Ave (dBm)	PAPR (dB)	Ave (dBm)	PAPR (dB)	Ave (dBm)
Antenna Port 2 Middle Channel LTE5	7.18	38.03	7.18	38.06	7.17	38.01	7.19	38.03

The output power variation between modulation types is small in this measurement snapshot (and from past efforts on similar hardware as well). The variation of average power output versus modulation type is 0.05dB for the data snapshot provided. The variation of PAPR versus modulation type is 0.02dB for the data snapshot provided. All power measurements in this report (except the sample test noted above) were performed with the EUT operating with 256QAM modulation.

Based on the results above, Port 2 had the highest RMS average power (represents the worst case) and therefore it was selected for all the remaining antenna port tests.


Subsequently output power levels on bottom, middle, and top channels in all 4 LTE channel bandwidths and 256QAM modulation type were tested only at Port 2. The results are presented below. The highest measured values are highlighted.


Antenna LTE Channel	LTE Bandwidth	LTE - 256QAM		
		PAPR (dB)	Average	
			dBm	Watts
Port 2 Bottom Channel	5M	7.19	37.90	6.17
	10M	7.22	38.07	6.41
	15M	7.27	38.08	6.43
	20M	7.30	38.14	6.52
Port 2 Middle Channel	5M	7.19	38.03	6.35
	10M	7.17	38.02	6.34
	15M	7.14	38.03	6.35
	20M	7.11	38.02	6.34
Port 2 Top Channel	5M	7.18	38.03	6.35
	10M	7.16	38.12	6.49
	15M	7.17	38.06	6.40
	20M	7.16	38.09	6.44


The data provided in the table shows (and testing of similar EUTs) that the output RMS power variation between channel bandwidths at the center frequency channel is small (0.01dB).


All measurement results are provided in the following pages. The total measurement RF path loss of the test setup (attenuator, coupler and test cables) was 30.8 dB for the average power path & 40.0 dB for the peak power path and is accounted for by the spectrum/signal analyzer reference level offset.

LTE5 Channel Power Plots at Middle Channel and 256QAM Modulation:
Port 1 - LTE5_Middle Channel_CCDF

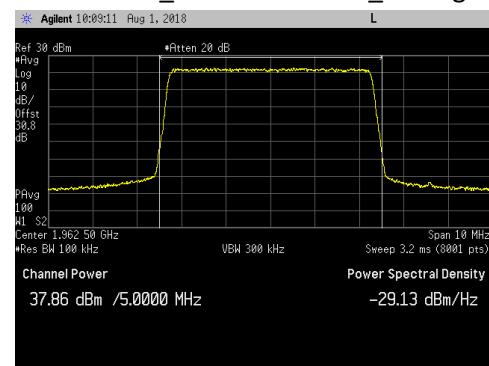
Port 1 - LTE5_Middle Channel_Average

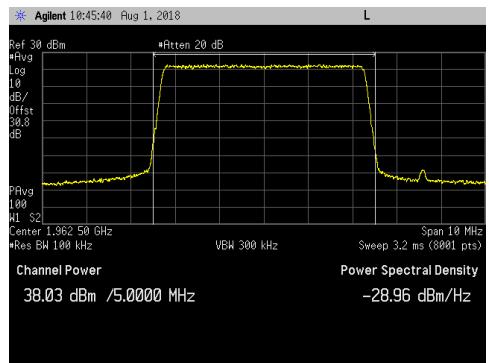Port 2 - LTE5_Middle Channel_CCDF

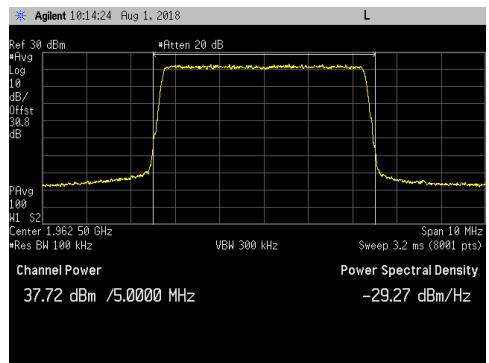
Port 2 - LTE5_Middle Channel_Average

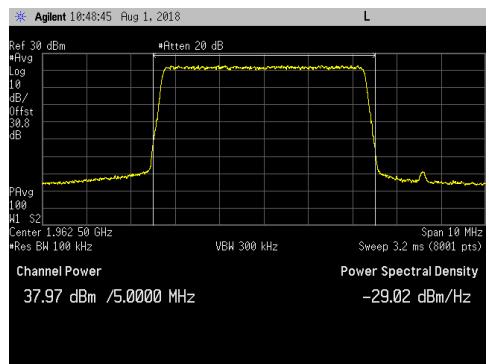Port 3 - LTE5_Middle Channel_CCDF




Port 3 - LTE5_Middle Channel_Average

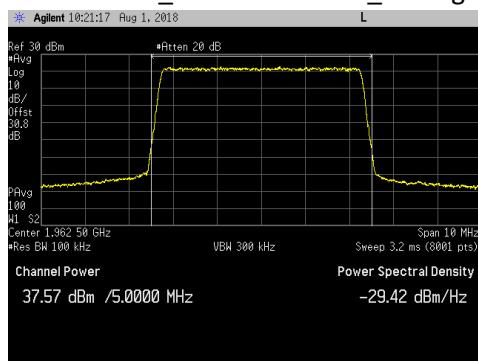Port 4 - LTE5_Middle Channel_CCDF

Port 4 - LTE5_Middle Channel_Average

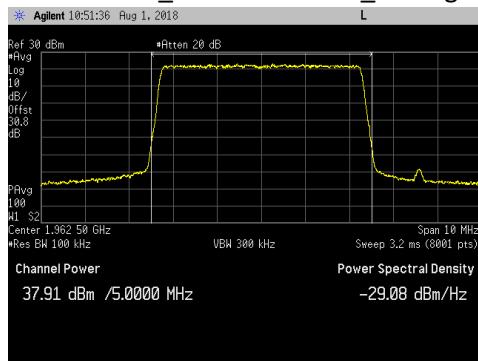
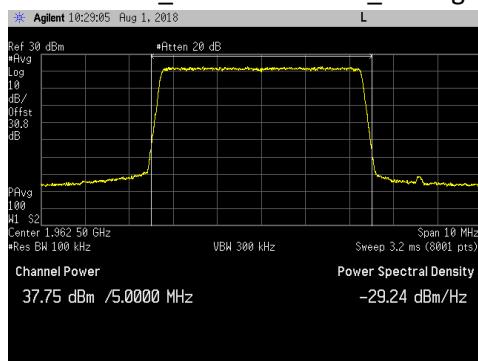
LTE5 Channel Power Plots at Middle Channel and 256QAM Modulation:
Port 5 - LTE5_Middle Channel_CCDF


Port 5 - LTE5_Middle Channel_Average

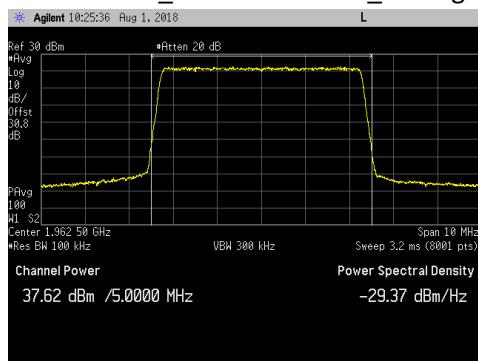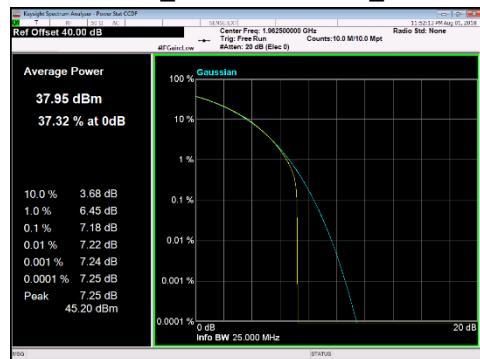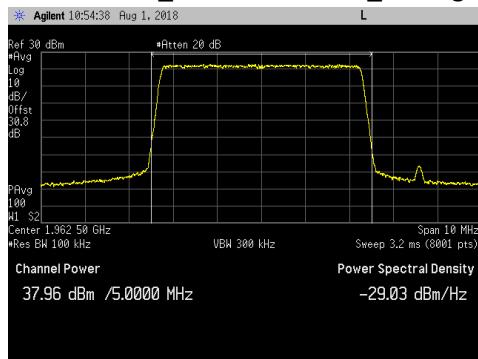Port 6 - LTE5_Middle Channel_CCDF


Port 6 - LTE5_Middle Channel_Average

Port 7 - LTE5_Middle Channel_CCDF


Port 7 - LTE5_Middle Channel_Average

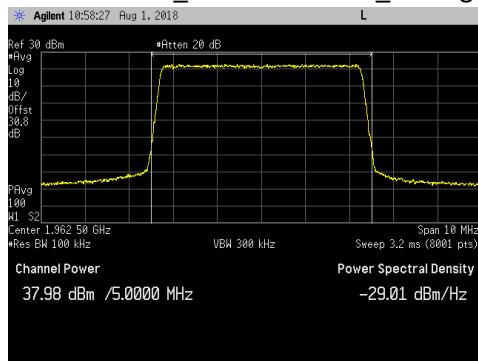Port 8 - LTE5_Middle Channel_CCDF

Port 8 - LTE5_Middle Channel_Average

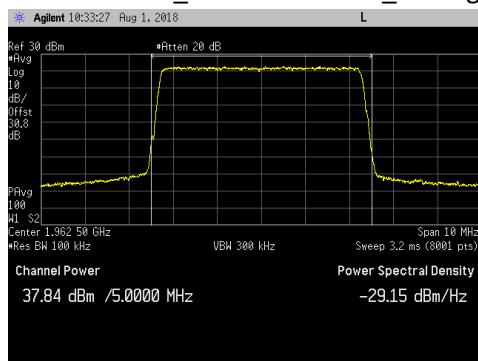
LTE5 Channel Power Plots at Middle Channel and 256QAM Modulation:
Port 9 - LTE5_Middle Channel_CCDF




Port 9 - LTE5_Middle Channel_Average

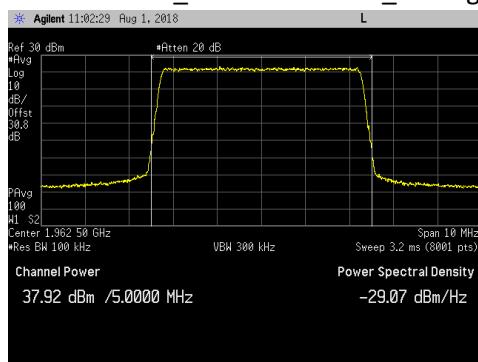Port 10 - LTE5_Middle Channel_CCDF


Port 10 - LTE5_Middle Channel_Average

Port 11 - LTE5_Middle Channel_CCDF


Port 11 - LTE5_Middle Channel_Average

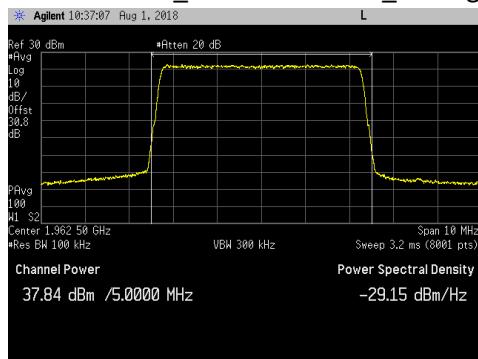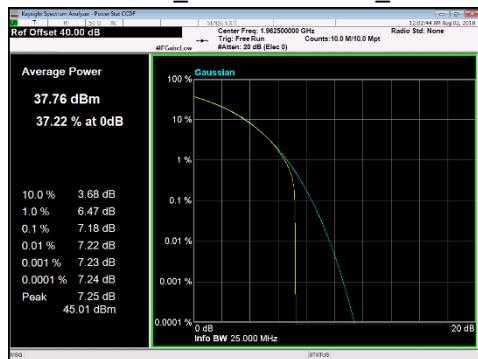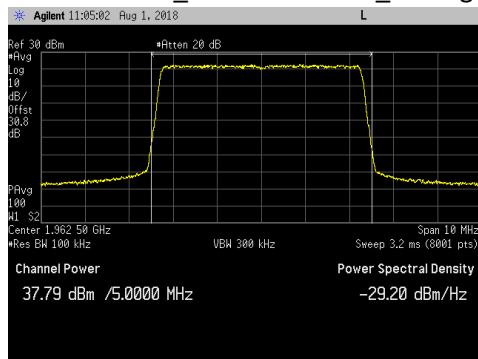Port 12 - LTE5_Middle Channel_CCDF



Port 12 - LTE5_Middle Channel_Average

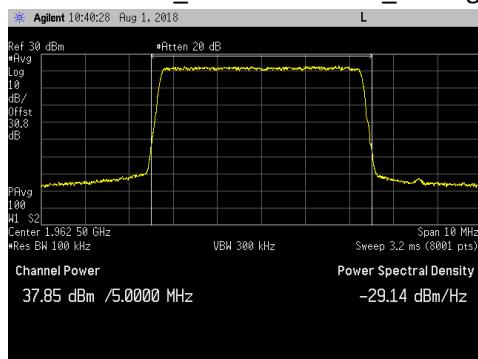
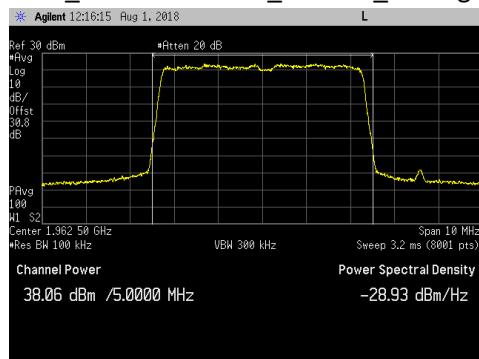
LTE5 Channel Power Plots at Middle Channel and 256QAM Modulation:
Port 13 - LTE5_Middle Channel_CCDF


Port 13 - LTE5_Middle Channel_Average

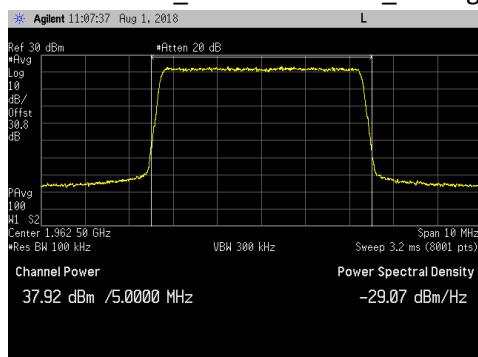Port 14 - LTE5_Middle Channel_CCDF

Port 14 - LTE5_Middle Channel_Average

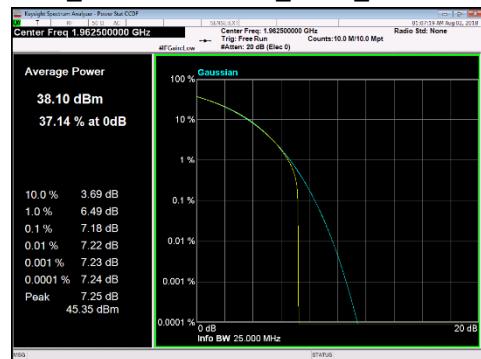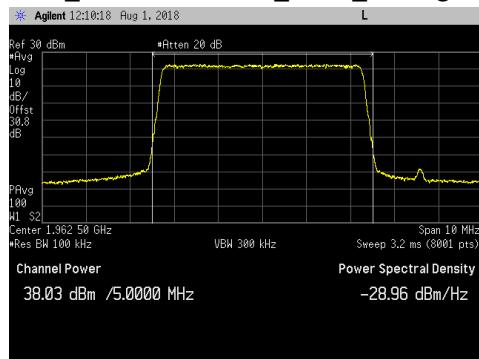Port 15 - LTE5_Middle Channel_CCDF


Port 15 - LTE5_Middle Channel_Average

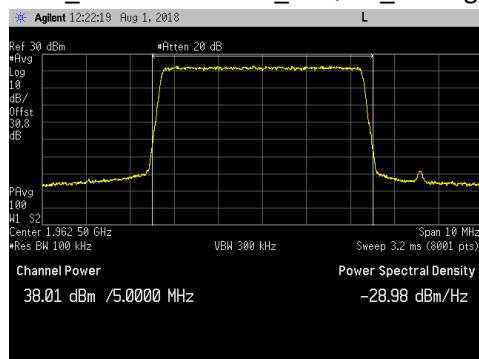Port 16 - LTE5_Middle Channel_CCDF





Port 16 - LTE5_Middle Channel_Average


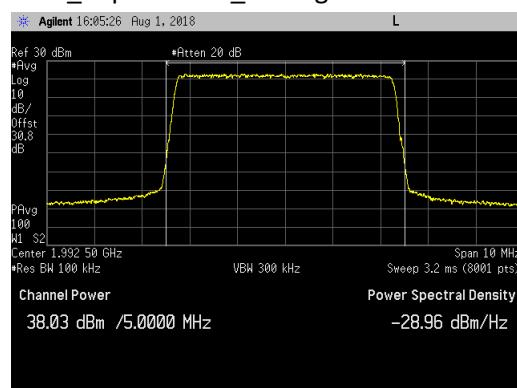
LTE5 Channel Power Plots for Antenna Port 2 at Middle Channel and all Modulation Types:
LTE5_Middle Channel_QPSK_CCDF

LTE5_Middle Channel_QPSK_Average

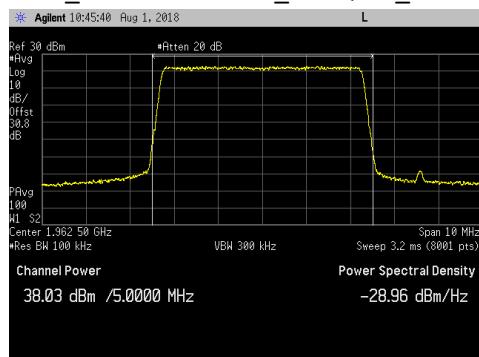LTE5_Middle Channel_16QAM_CCDF







LTE5_Middle Channel_16QAM_Average

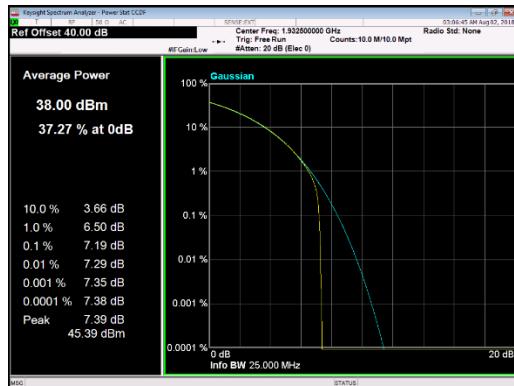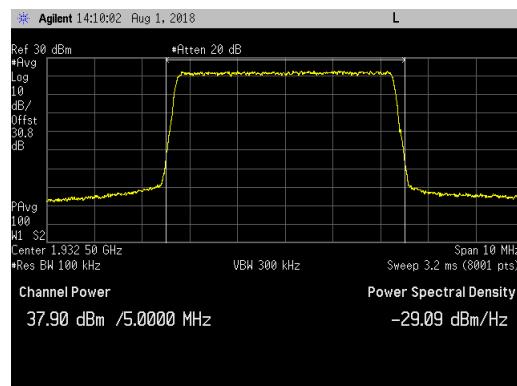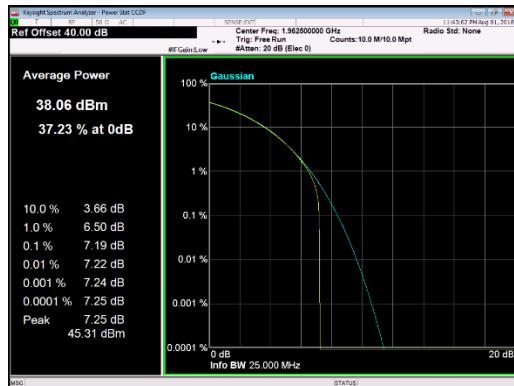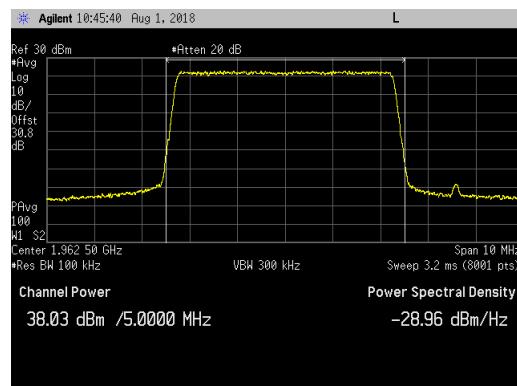LTE5_Middle Channel_64QAM_CCDF







LTE5_Middle Channel_64QAM_Average

LTE5_Middle Channel_256QAM_CCDF







LTE5_Middle Channel_256QAM_Average

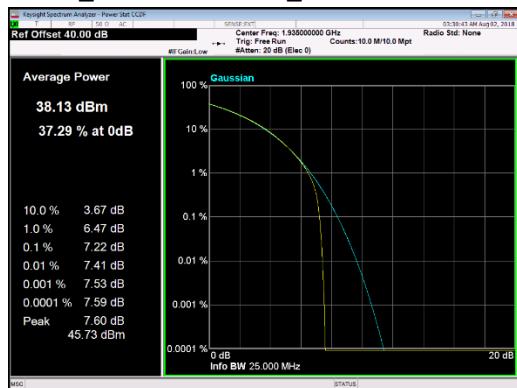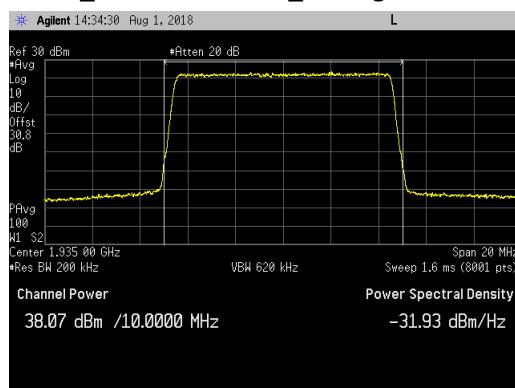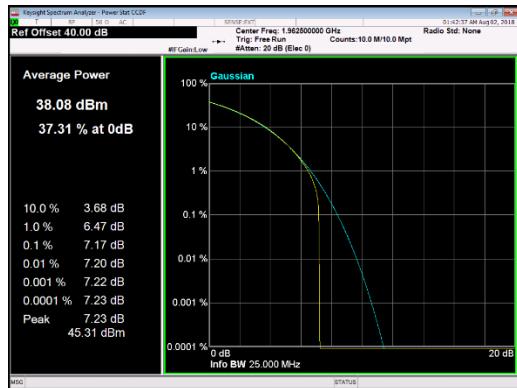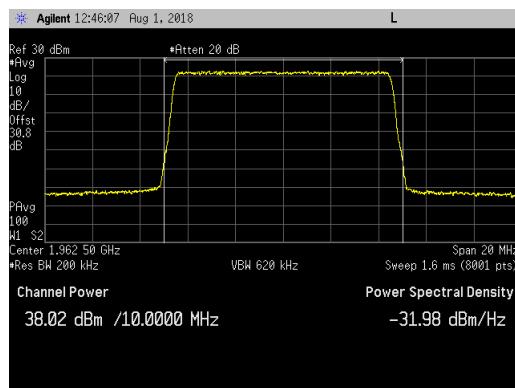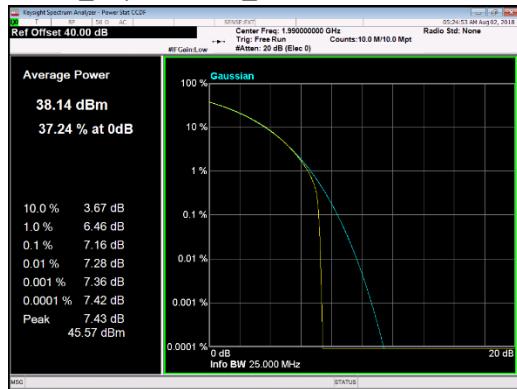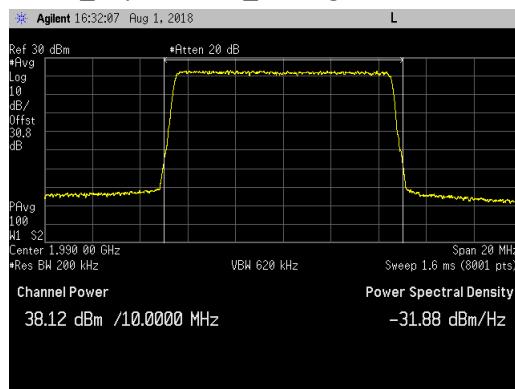
LTE5 Channel Power Plots for Antenna Port 2 and 256QAM Modulation:
LTE5_Bottom Channel_CCDF

LTE5_Bottom Channel_Average

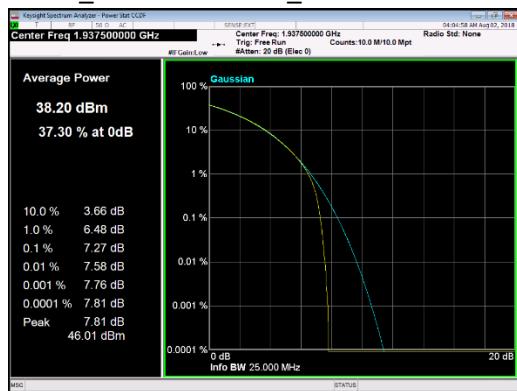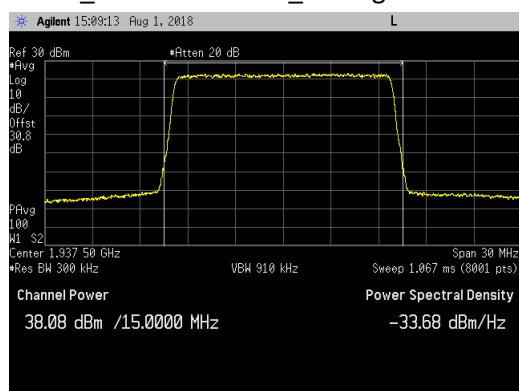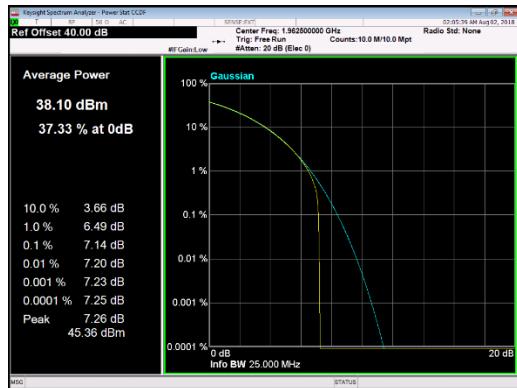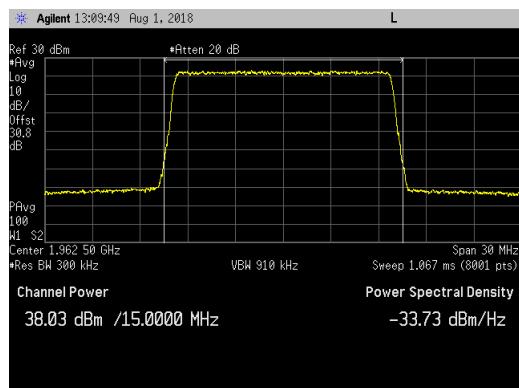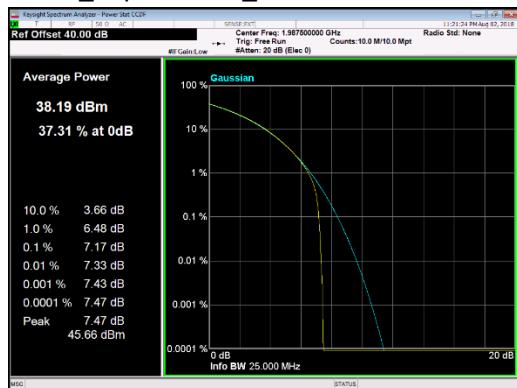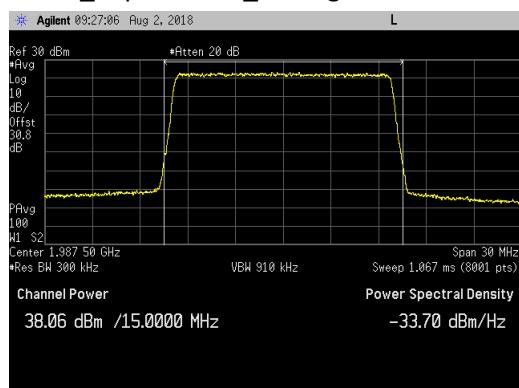LTE5_Middle Channel_CCDF

LTE5_Middle Channel_Average

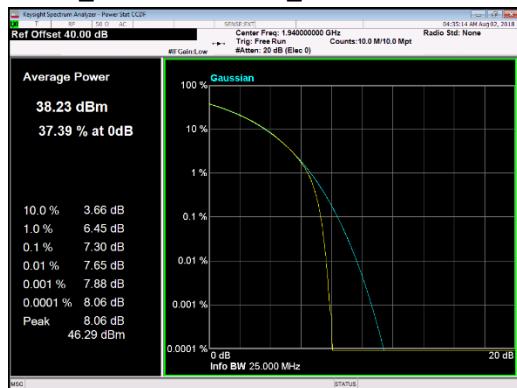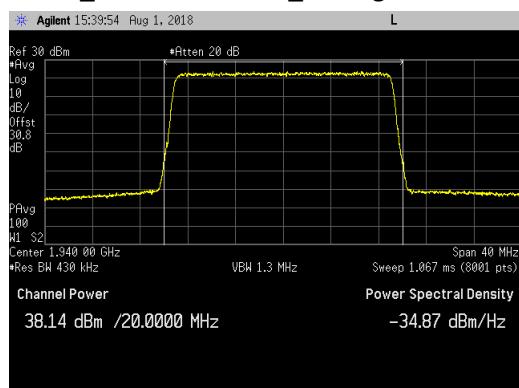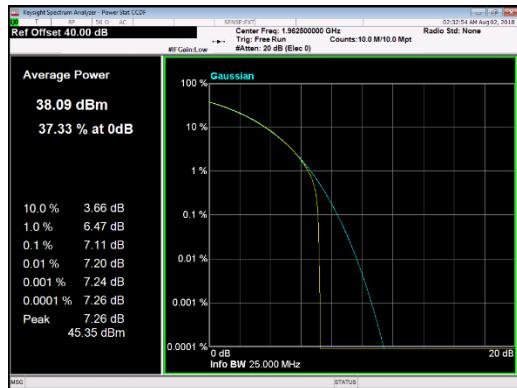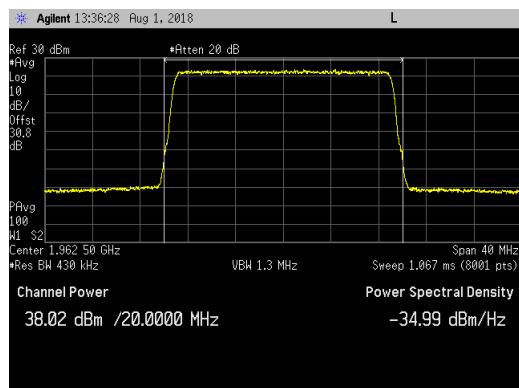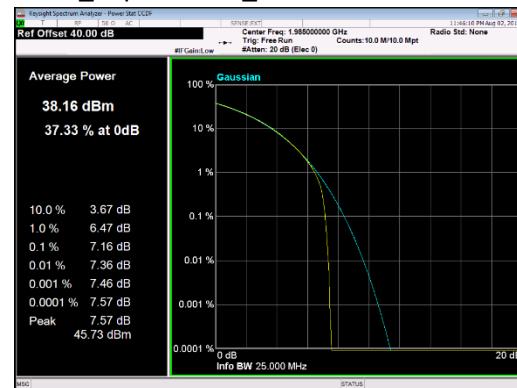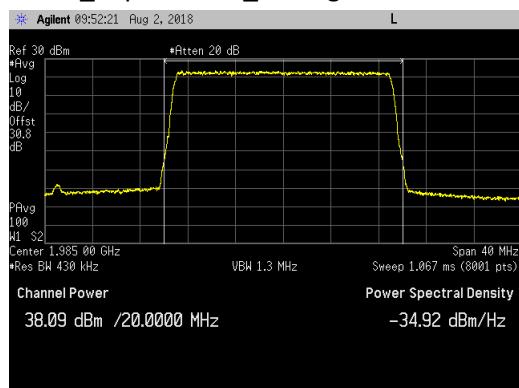LTE5_Top Channel_CCDF

LTE5_Top Channel_Average


LTE10 Channel Power Plots for Antenna Port 2 and 256QAM Modulation:
LTE10_Bottom Channel_CCDF

LTE10_Bottom Channel_Average

LTE10_Middle Channel_CCDF

LTE10_Middle Channel_Average

LTE10_Top Channel_CCDF

LTE10_Top Channel_Average


LTE15 Channel Power Plots for Antenna Port 2 and 256QAM Modulation:
LTE15_Bottom Channel_CCDF

LTE15_Bottom Channel_Average

LTE15_Middle Channel_CCDF

LTE15_Middle Channel_Average

LTE15_Top Channel_CCDF

LTE15_Top Channel_Average


LTE20 Channel Power Plots for Antenna Port 2 and 256QAM Modulation:
LTE20_Bottom Channel_CCDF

LTE20_Bottom Channel_Average

LTE20_Middle Channel_CCDF

LTE20_Middle Channel_Average

LTE20_Top Channel_CCDF

LTE20_Top Channel_Average


EIRP Calculations

The RF conducted output power has been measured on the radio modules highest output antenna port for all four LTE channel bandwidths (5, 10, 15 & 20MHz) at the bottom, middle and top channel frequencies (See table in previous section for results summary of power measurements). The RF conducted power was measured in RMS Average terms as described in section 5.2 of KDB 971168 D01v03r01 and ANSI C63.26-2015 section 5.2.4.4. The worst-case/highest power output measurement was 38.14 dBm or 6.52 watts.

There are currently two antenna types (8-column and 4-column) with different beamforming gains that may be used with the AAFB radio module. The 8-column antenna maximum beamforming gain is 24 dBi. The 4-column antenna maximum beamforming gain is 21 dBi. The columns within the antenna have $\pm 45^\circ$ cross-polarized (orthogonal) radiators. The sixteen AAFB transmitter outputs are connected to the columns (eight are connected to $+45^\circ$ radiators/antennas and eight are connected to the -45° radiators/antennas). The AAFB radio module provides transmitter outputs for one 8-column antenna or two 4-column antennas.

Equivalent Isotropically Radiated Power (EIRP) is calculated (as specified in KDB 662911 D02v01 for a system of correlated output signals) from the results of power measurements (highest measured output power). Calculation of worst-case EIRP is as follows:

Parameter	8-Column Antenna	4-Column Antenna
P_{out/Tx}	38.14 dBm	38.14 dBm
P_{out/Tx}	6.516 Watts	6.516 Watts
Cable Loss	0 dB	0 dB
Number of TRXs/Polarization	8	4
P_{out/Polarization}	52.13 Watts	26.07 Watts
P_{out/Polarization}	47.17 dBm	44.16 dBm
Maximum Antenna Beamforming Gain/Polarization	24 dBi	21 dBi
EIRP/Polarization	71.17 dBm	65.16 dBm
EIRP/Polarization	13094 Watts	3281 Watts
Number of Polarizations	2	2
EIRP Total (See Note)	13094 Watts	3281 Watts
EIRP Total (See Note)	71.17 dBm	65.16 dBm

Note: The EIRP per antenna polarity is required to be below the regulatory limit as described in KDB 662911 D02v01 page 3 example (2) since the two transmitter outputs to each antenna are 90 degree-phase shifted relative to each other (cross-polarized radiators).

The regulatory requirement for EIRP density (W/MHz) of 1640Watts/MHz or 62.15dBm/MHz is provided in FCC 24.232(a) and IC RSS-133 section 6.4/SRSP-510 section 5.1.1. The EIRP density is dependent on the channel bandwidth and is calculated for each LTE bandwidth as follows.

For the 8-column Antenna:

LTE Ch BW	EIRP Total	EIRP/LTE Ch BW	EIRP/LTE Ch BW	Tx Power Output Reduction needed to meet Regulatory Requirements
20 MHz	13094 W	655 W/MHz	58.16 dBm/MHz	0 dB
15 MHz	13094 W	873 W/MHz	59.41 dBm/MHz	0 dB
10 MHz	13094 W	1309 W/MHz	61.17 dBm/MHz	0 dB
5 MHz	13094 W	2619 W/MHz	64.18 dBm/MHz	64.18 – 62.15 = 2.03 dB

For the 4-column Antenna:

LTE Ch BW	EIRP Total	EIRP/LTE Ch BW	EIRP/LTE Ch BW	Tx Power Output Reduction needed to meet Regulatory Requirements
20 MHz	3281 W	164 W/MHz	52.15 dBm/MHz	0 dB
15 MHz	3281 W	219 W/MHz	53.40 dBm/MHz	0 dB
10 MHz	3281 W	328 W/MHz	55.16 dBm/MHz	0 dB
5 MHz	3281 W	656 W/MHz	58.17 dBm/MHz	0 dB

Several variables are used to determine the maximum regulatory EIRP limits (such as antenna height and population density). Refer to FCC 24.232 and IC SRSP-510 section 5.1.1 for details of regulatory EIRP limits on base stations. Base station antenna characteristics are a major contributor for EIRP determination as well. Due to these factors, EIRP calculations are needed at each transmitter location to optimize base station operational performance while meeting regulatory requirements.

Emission Bandwidth (26 dB down and 99%)


Emission bandwidth measurements were made at antenna port 2 on the middle channel with maximum RF output power. All available LTE modulations (QPSK, 16QAM, 64QAM and 256QAM) were used. All available LTE channel bandwidths (5MHz, 10MHz, 15MHz, and 20MHz) were used. The results are provided in the following table. The largest emission bandwidths in each channel type are highlighted.

LTE Channel Bandwidth	Modulation Type							
	QPSK		16QAM		64QAM		256QAM	
	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)	26dB (MHz)	99% (MHz)
5M	4.831	4.4882	4.804	4.4855	4.844	4.4948	4.836	4.4996
10M	9.655	8.9681	9.651	8.9802	9.678	8.9760	9.650	8.9828
15M	14.487	13.4390	14.436	13.5070	14.482	13.4594	14.531	13.4697
20M	19.341	17.9378	19.271	17.9427	19.336	17.9510	19.389	17.9775


Emission bandwidth measurement data are provided in the following pages.

LTE5 and LTE10 Emission Bandwidth Plots on the Middle Channel for Antenna Port 2:


LTE5 QPSK

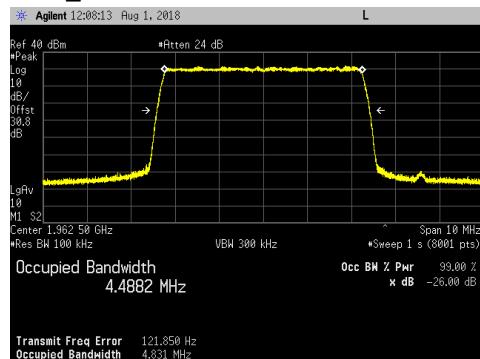


LTE10 QPSK

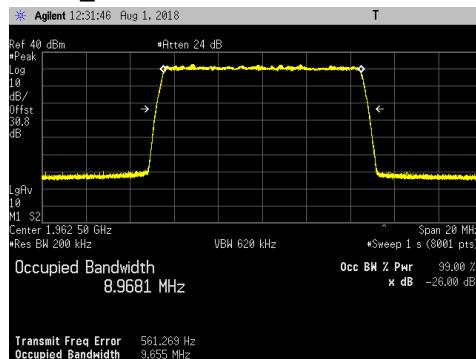


LTE5 16QAM

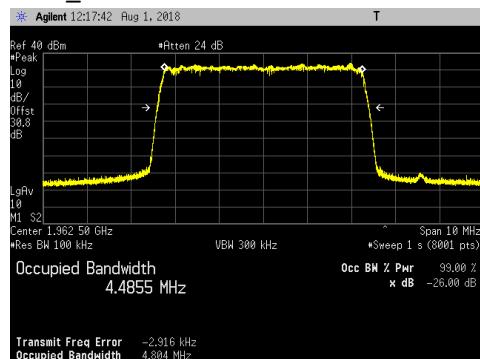


LTE10 16QAM

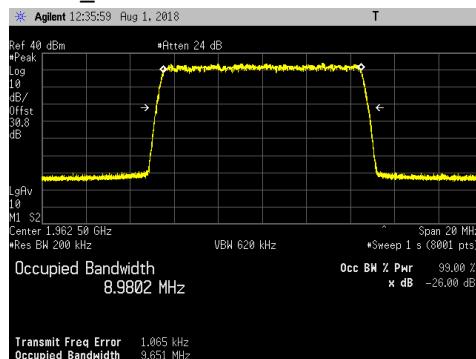


LTE5 64QAM

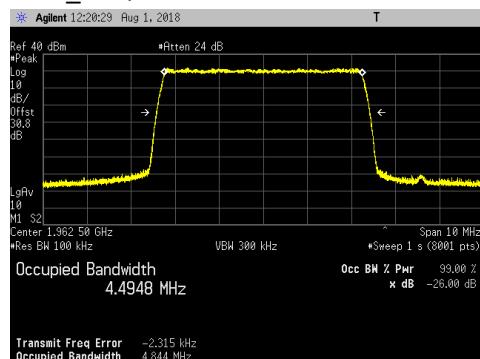


LTE10 64QAM








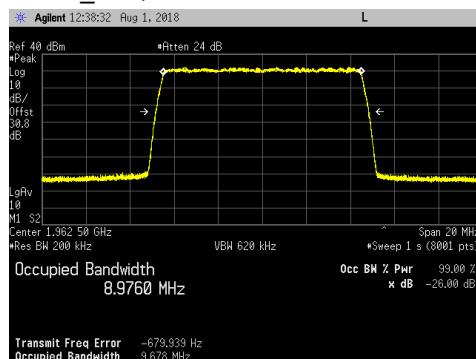


LTE5 256QAM

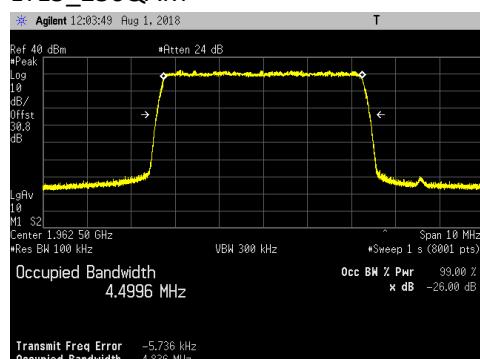

LTE10 256QAM

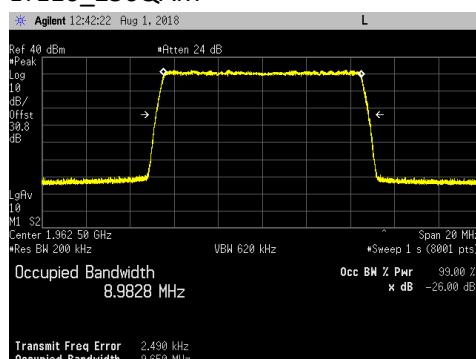

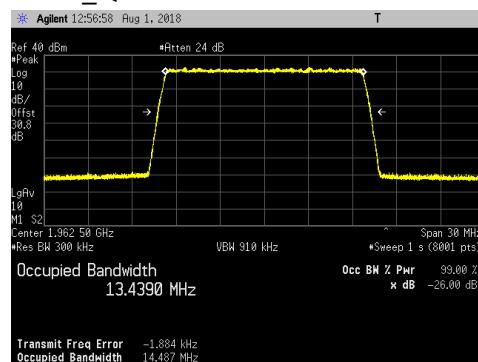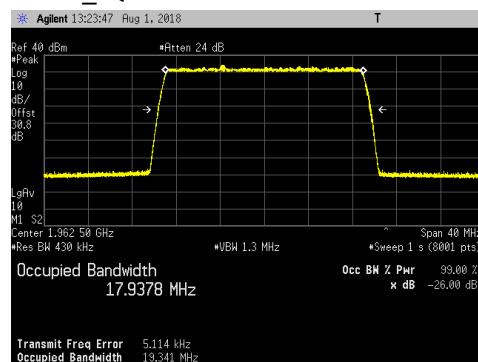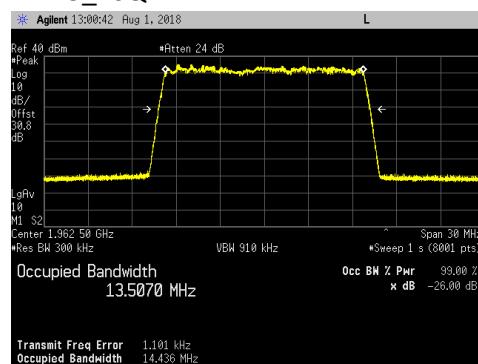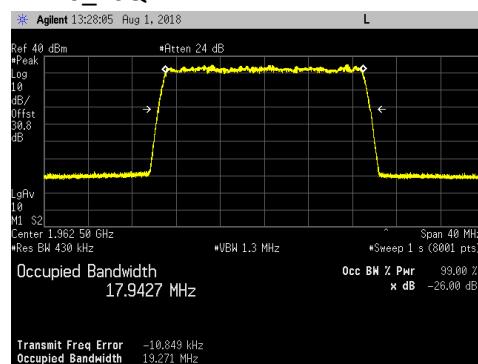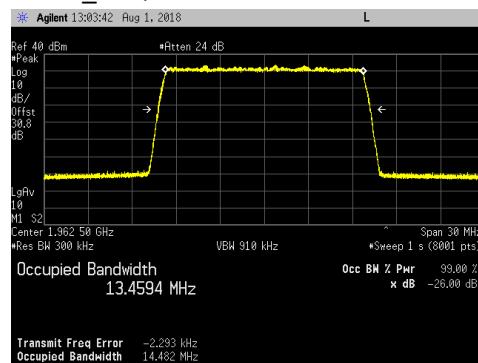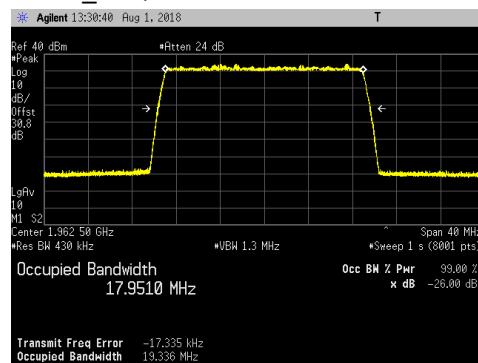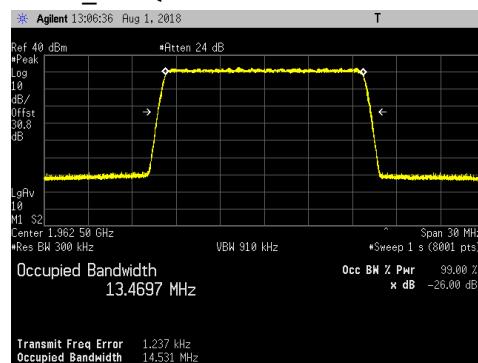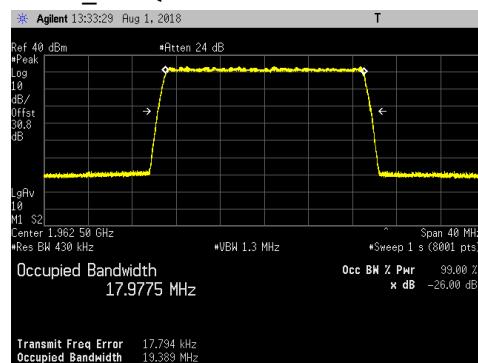LTE15 and LTE20 Emission Bandwidth Plots on the Middle Channel for Antenna Port 2:
LTE15_QPSK

LTE20_QPSK

LTE15_16QAM

LTE20_16QAM

LTE15_64QAM

LTE20_64QAM

LTE15_256QAM

LTE20_256QAM


Antenna Port Conducted Band Edge

Conducted band edge measurements were made at radio module antenna port 2. The radio module was operated with a single carrier at the band edge frequencies with all modulation types (QPSK, 16QAM, 64QAM and 256QAM) for 5MHz, 10MHz, 15MHz and 20MHz LTE bandwidths. In addition, multicarrier operation was verified using LTE5 bandwidth and all modulation types using two carriers with minimum spacing at the bottom end of the band (1932.5MHz and 1937.5MHz), two carriers with minimum spacing at the top end of the band (1987.5MHz and 1992.5MHz), two carriers with maximum spacing at the bottom end of the band (1932.5MHz and 1967.5MHz), and two carriers with maximum spacing at the top end of the band (1957.5MHz and 1992.5MHz). The multicarrier test cases are based upon KDB 971168 D03v01 requirements using two carriers.

The limit of -25dBm was used in the certification testing. The limit is adjusted to -25dBm [-13dBm -10 log (16)] per FCC KDB 662911 D01v02r01 because the BTS may operate as a 16 port MIMO transmitter.

Measurements were performed with the spectrum analyzer in the RMS average mode over 100 traces. In the 1MHz bands outside and adjacent to the frequency block, a resolution bandwidth of 1% of the emission bandwidth was used. In the 1 to 2MHz frequency range outside the band edge (i.e.: 1928 to 1929MHz and 1996 to 1997MHz bands) the RBW was again reduced to 1% of the emission bandwidth and the power integrated over 1MHz. In the 2 to 22MHz frequency range outside the band edge (i.e.: 1908 to 1928MHz and 1997 to 2017MHz bands) a 1MHz RBW and 3MHz VBW was used.

The results are summarized in the following table. The highest (worst case) emissions from the measurement data are provided.


LTE Carrier Bandwidth	LTE - QPSK		LTE - 16QAM		LTE - 64QAM		LTE - 256QAM							
	Bottom (dBm)	Top (dBm)												
5M	-31.869	-	33.495	-	-31.757	-	33.026	-31.992	-	33.604	-	-30.799	-	33.087
10M	-33.909	-	35.110	-	-33.865	-	34.647	-34.388	-	35.174	-	-34.074	-	34.855
15M	-30.566	-	32.149	-	-33.100	-	31.066	-31.835	-	33.594	-	-33.618	-	33.245
20M	-34.126	-	34.247	-	-34.976	-	35.744	-35.072	-	33.437	-	-34.945	-	34.913
Dual 5M (Min Carrier Spacing)	-27.870	-	27.485	-	-28.140	-	28.376	-28.350	-	27.553	-	-28.875	-	27.072
Dual 5M (Max Carrier Spacing)	-26.371	-	26.039	-	-27.105	-	27.631	-26.795	-	26.511	-	-26.718	-	26.166

The total measurement RF path loss of the test setup (attenuator, coupler and test cables) was 30.8 dB and is accounted for by the spectrum analyzer reference level offset. The display line on the plots reflects the required limit.

Conducted band edge measurements are provided in the following pages.

LTE5 Band Edge Plots for Antenna Port 2 and QPSK Modulation:


LTE5_Bottom Channel_LBE_1929 to 1931MHz

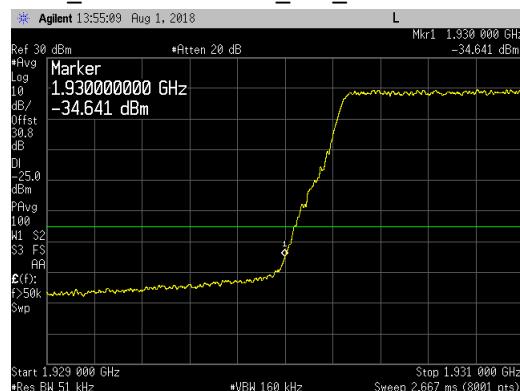


LTE5_Top Channel_UBE_1994 to 1996MHz




LTE5_Bottom Channel_LBE_1928 to 1929MHz

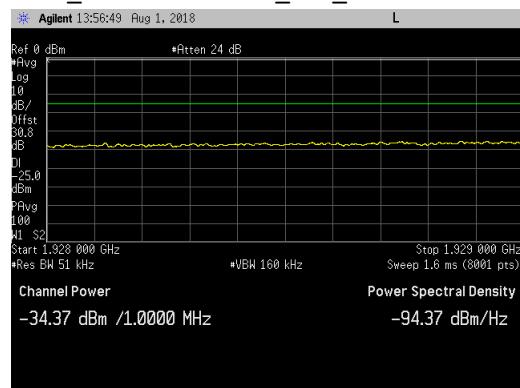


LTE5_Top Channel_UBE_1996 to 1997MHz

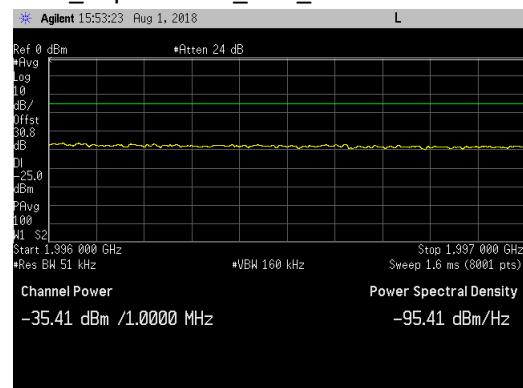

LTE5_Bottom Channel_LBE_1908 to 1928MHz

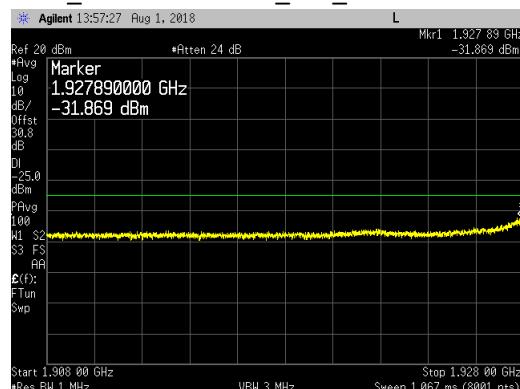

LTE5_Top Channel_UBE_1997 to 2017MHz

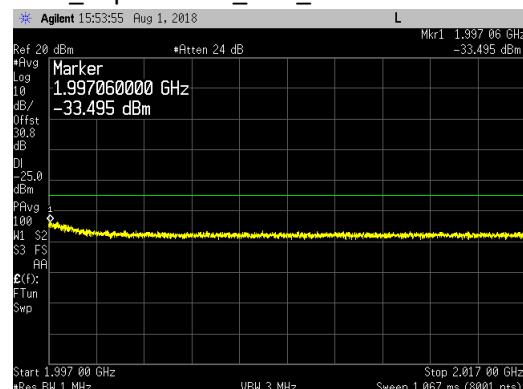

LTE5 Band Edge Plots for Antenna Port 2 and 16QAM Modulation:


LTE5_Bottom Channel_LBE_1929 to 1931MHz




LTE5_Top Channel_UBE_1994 to 1996MHz




LTE5_Bottom Channel_LBE_1928 to 1929MHz

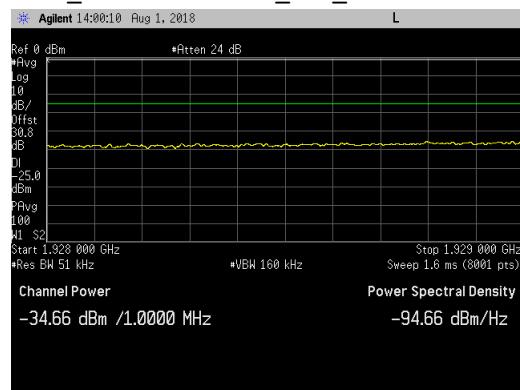


LTE5_Top Channel_UBE_1996 to 1997MHz

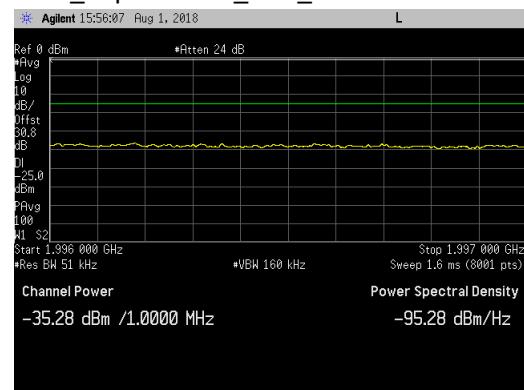

LTE5_Bottom Channel_LBE_1908 to 1928MHz

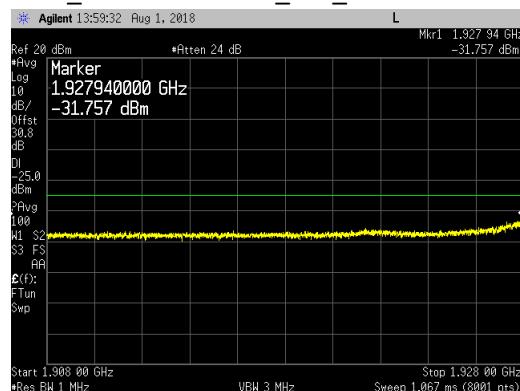


LTE5_Top Channel_UBE_1997 to 2017MHz

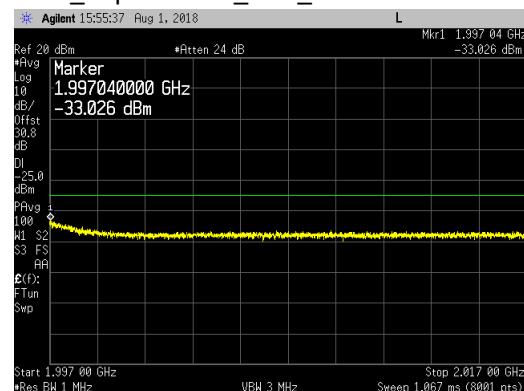

LTE5 Band Edge Plots for Antenna Port 2 and 64QAM Modulation:


LTE5_Bottom Channel_LBE_1929 to 1931MHz

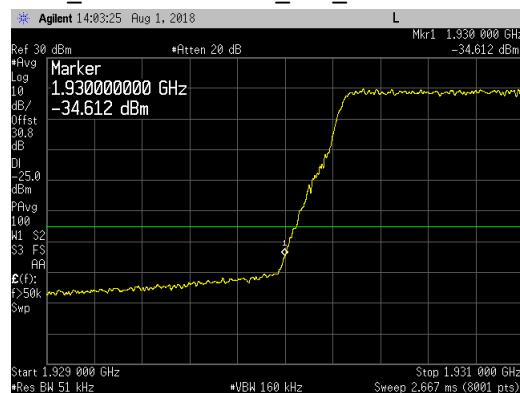


LTE5_Top Channel_UBE_1994 to 1996MHz




LTE5_Bottom Channel_LBE_1928 to 1929MHz

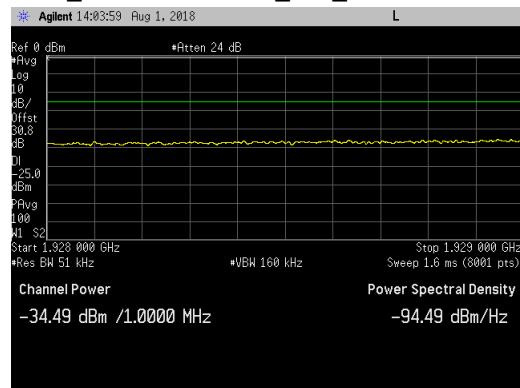


LTE5_Top Channel_UBE_1996 to 1997MHz

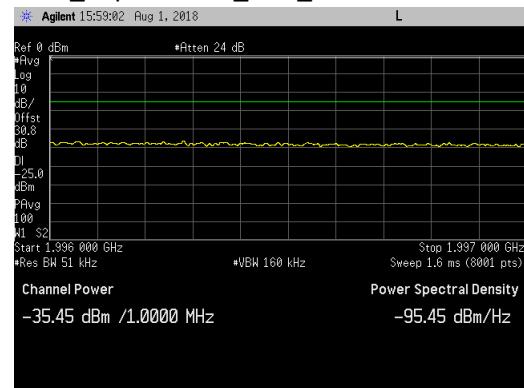

LTE5_Bottom Channel_LBE_1908 to 1928MHz

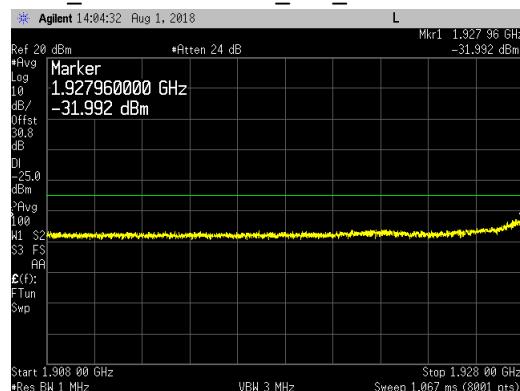


LTE5_Top Channel_UBE_1997 to 2017MHz

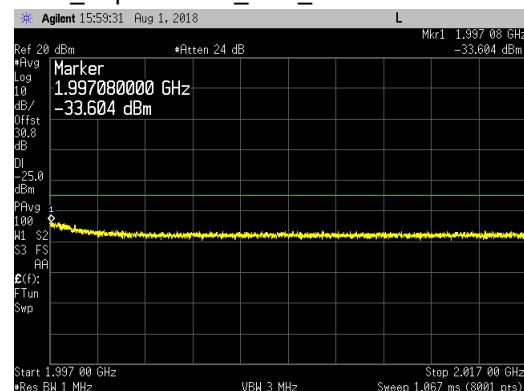


LTE5 Band Edge Plots for Antenna Port 2 and 256QAM Modulation:


LTE5_Bottom Channel_LBE_1929 to 1931MHz

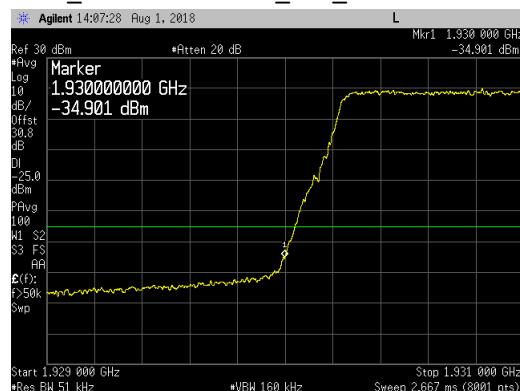


LTE5_Top Channel_UBE_1994 to 1996MHz

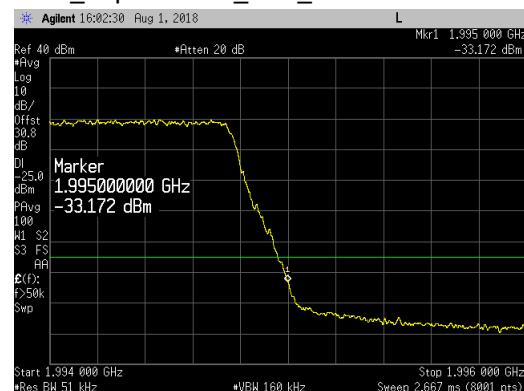


LTE5_Bottom Channel_LBE_1928 to 1929MHz

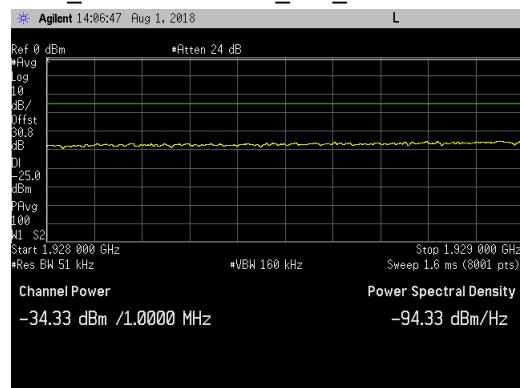


LTE5_Top Channel_UBE_1996 to 1997MHz

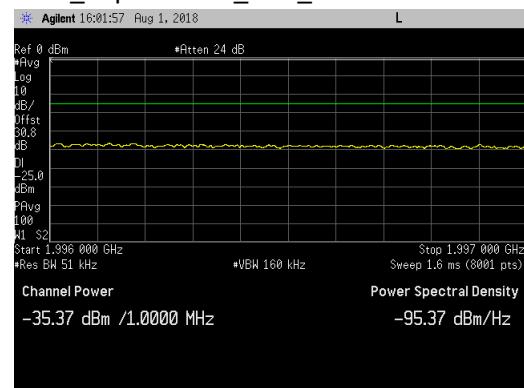

LTE5_Bottom Channel_LBE_1908 to 1928MHz

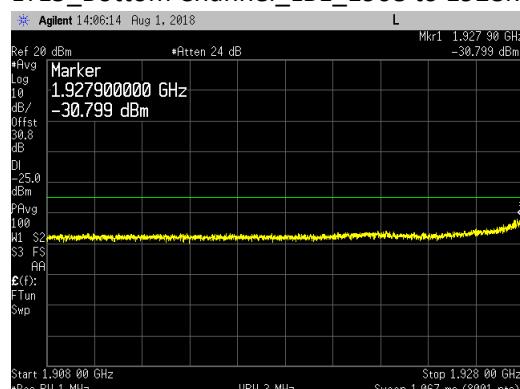

LTE5_Top Channel_UBE_1997 to 2017MHz

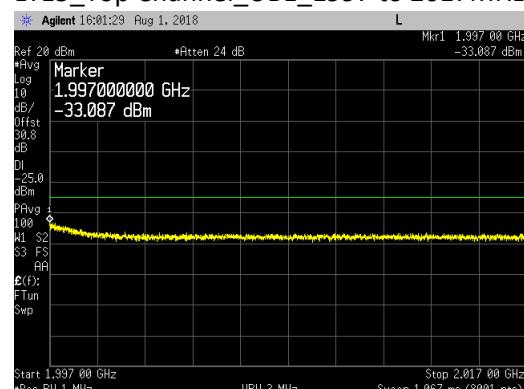

LTE10 Band Edge Plots for Antenna Port 2 and QPSK Modulation:


LTE10_Bottom Channel_LBE_1929 to 1931MHz




LTE10_Top Channel_UBE_1994 to 1996MHz



LTE10_Bottom Channel_LBE_1928 to 1929MHz

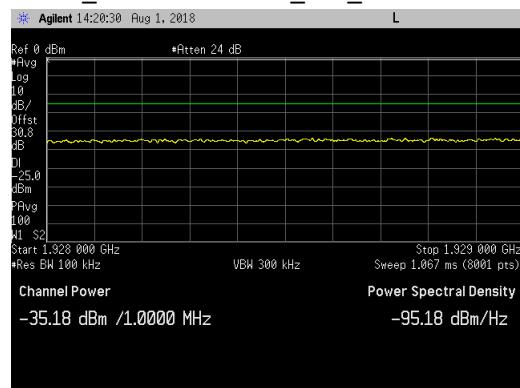


LTE10_Top Channel_UBE_1996 to 1997MHz

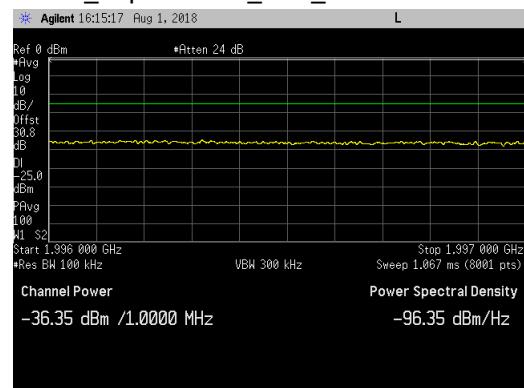

LTE10_Bottom Channel_LBE_1908 to 1928MHz



LTE10_Top Channel_UBE_1997 to 2017MHz

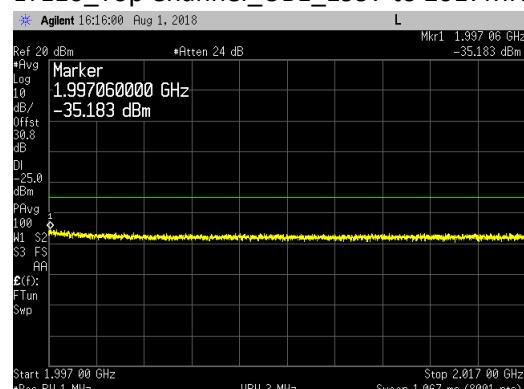

LTE10 Band Edge Plots for Antenna Port 2 and 16QAM Modulation:


LTE10_Bottom Channel_LBE_1929 to 1931MHz




LTE10_Top Channel_UBE_1994 to 1996MHz




LTE10_Bottom Channel_LBE_1928 to 1929MHz

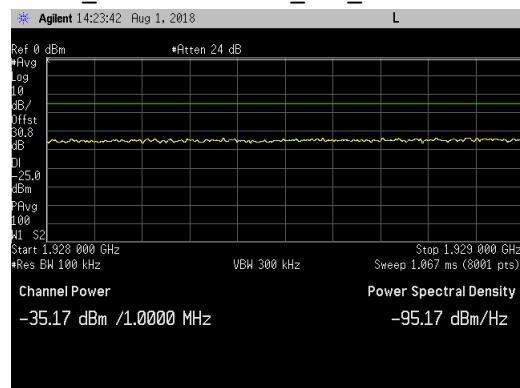


LTE10_Top Channel_UBE_1996 to 1997MHz

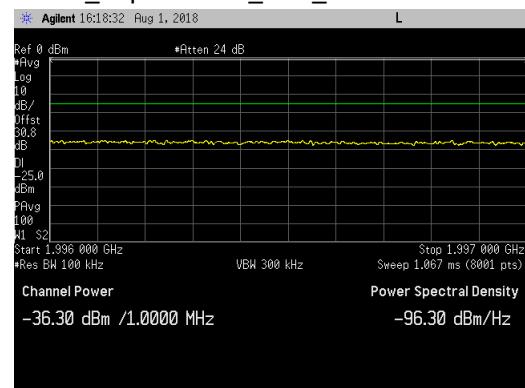

LTE10_Bottom Channel_LBE_1908 to 1928MHz

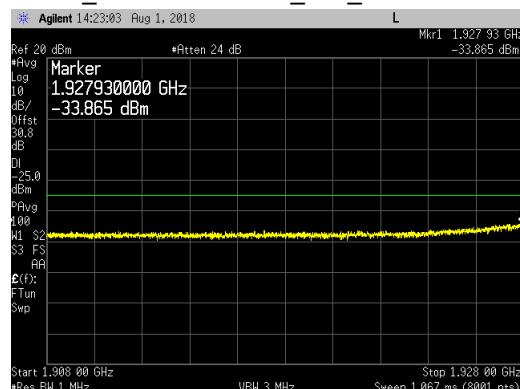

LTE10_Top Channel_UBE_1997 to 2017MHz

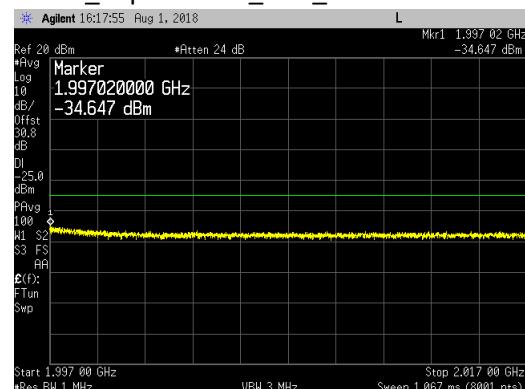


LTE10 Band Edge Plots for Antenna Port 2 and 64QAM Modulation:


LTE10_Bottom Channel_LBE_1929 to 1931MHz




LTE10_Top Channel_UBE_1994 to 1996MHz

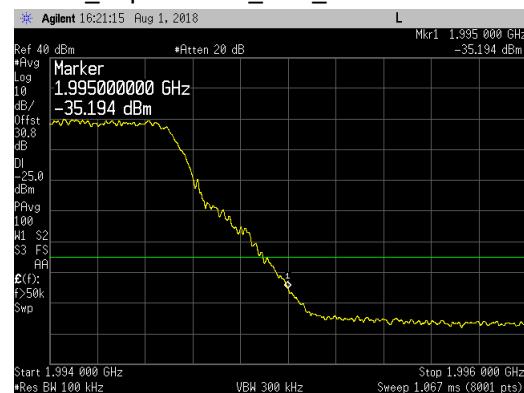


LTE10_Bottom Channel_LBE_1928 to 1929MHz

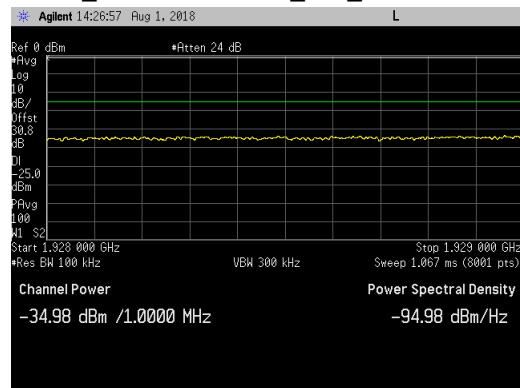


LTE10_Top Channel_UBE_1996 to 1997MHz

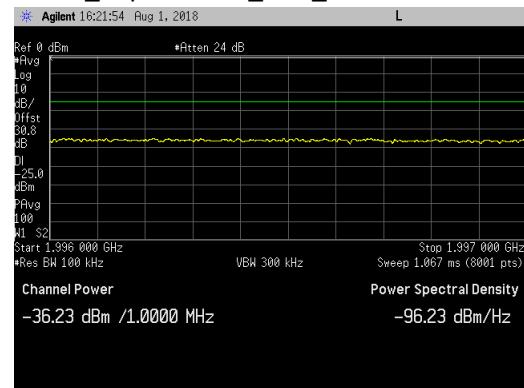

LTE10_Bottom Channel_LBE_1908 to 1928MHz

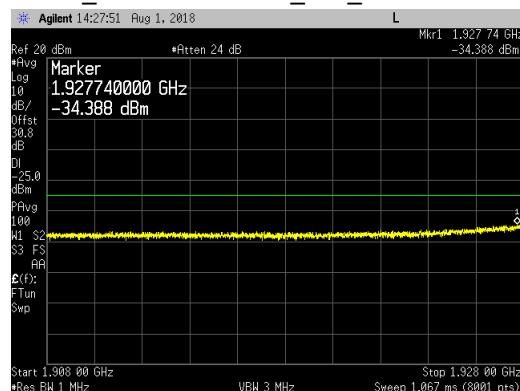

LTE10_Top Channel_UBE_1997 to 2017MHz

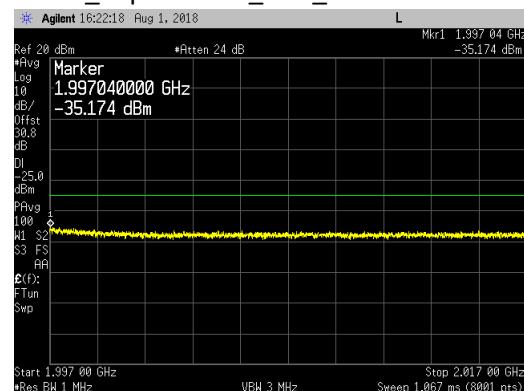

LTE10 Band Edge Plots for Antenna Port 2 and 256QAM Modulation:


LTE10_Bottom Channel_LBE_1929 to 1931MHz




LTE10_Top Channel_UBE_1994 to 1996MHz




LTE10_Bottom Channel_LBE_1928 to 1929MHz

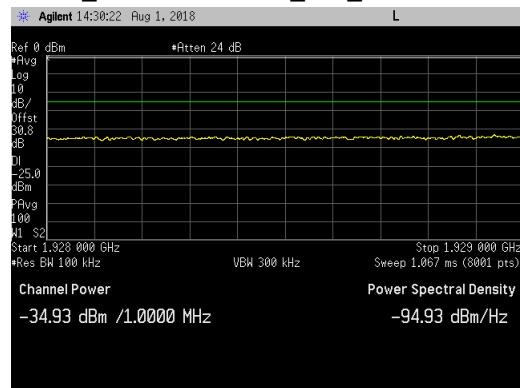


LTE10_Top Channel_UBE_1996 to 1997MHz

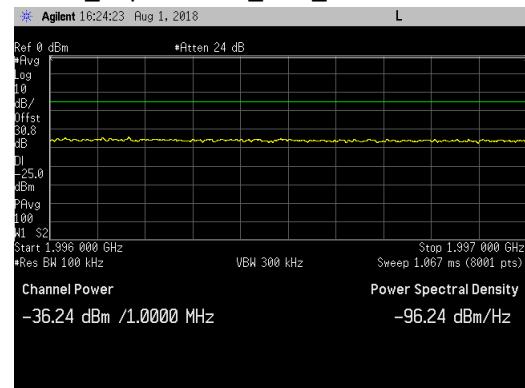

LTE10_Bottom Channel_LBE_1908 to 1928MHz

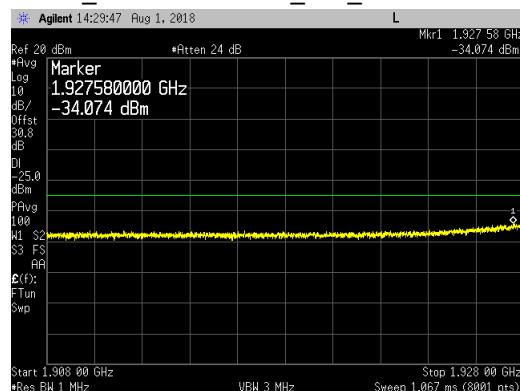

LTE10_Top Channel_UBE_1997 to 2017MHz

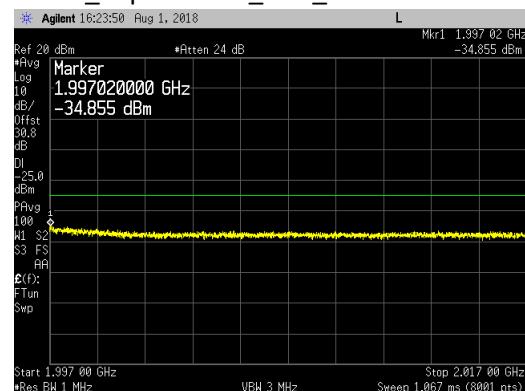

LTE15 Band Edge Plots for Antenna Port 2 and QPSK Modulation:


LTE15_Bottom Channel_LBE_1929 to 1931MHz




LTE15_Top Channel_UBE_1994 to 1996MHz



LTE15_Bottom Channel_LBE_1928 to 1929MHz

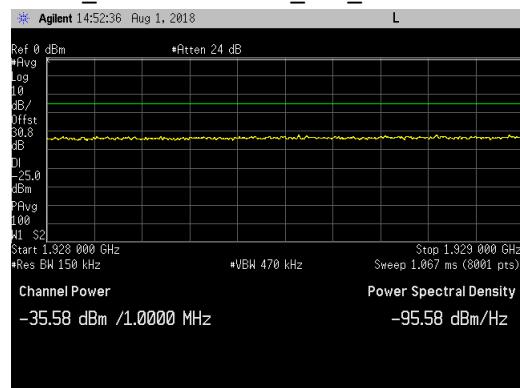


LTE15_Top Channel_UBE_1996 to 1997MHz

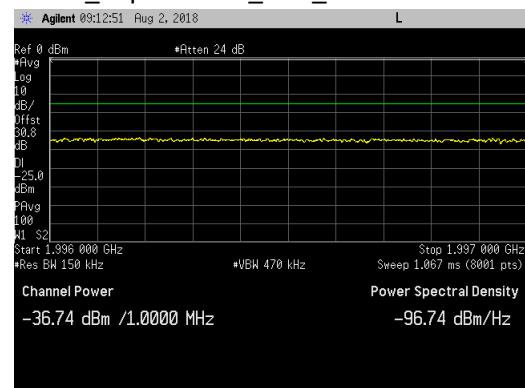

LTE15_Bottom Channel_LBE_1908 to 1928MHz



LTE15_Top Channel_UBE_1997 to 2017MHz

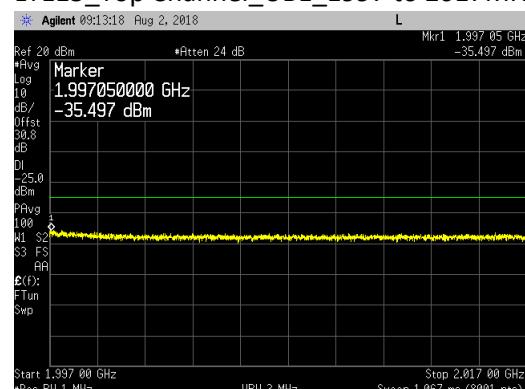

LTE15 Band Edge Plots for Antenna Port 2 and 16QAM Modulation:


LTE15_Bottom Channel_LBE_1929 to 1931MHz




LTE15_Top Channel_UBE_1994 to 1996MHz



LTE15_Bottom Channel_LBE_1928 to 1929MHz

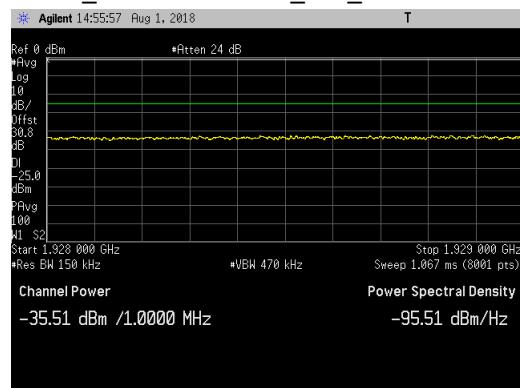


LTE15_Top Channel_UBE_1996 to 1997MHz

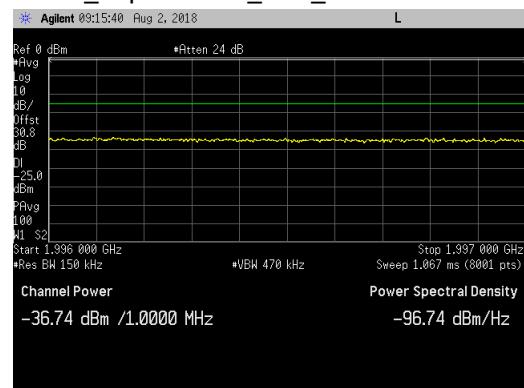

LTE15_Bottom Channel_LBE_1908 to 1928MHz



LTE15_Top Channel_UBE_1997 to 2017MHz

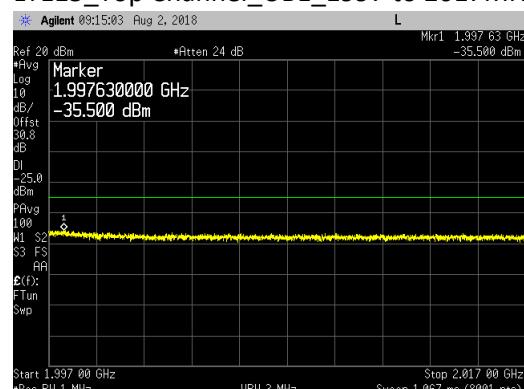

LTE15 Band Edge Plots for Antenna Port 2 and 64QAM Modulation:


LTE15_Bottom Channel_LBE_1929 to 1931MHz




LTE15_Top Channel_UBE_1994 to 1996MHz




LTE15_Bottom Channel_LBE_1928 to 1929MHz

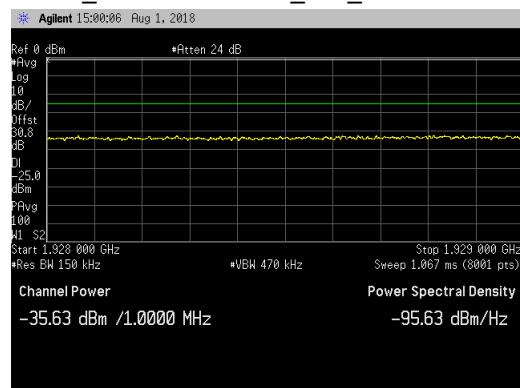


LTE15_Top Channel_UBE_1996 to 1997MHz

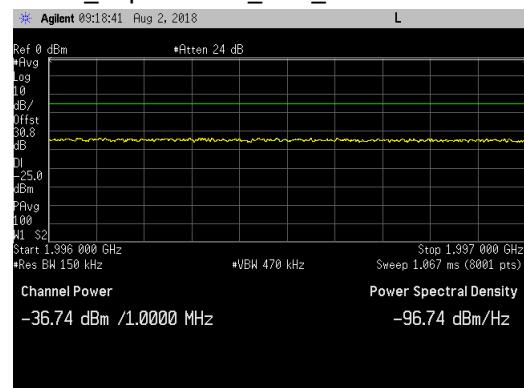

LTE15_Bottom Channel_LBE_1908 to 1928MHz

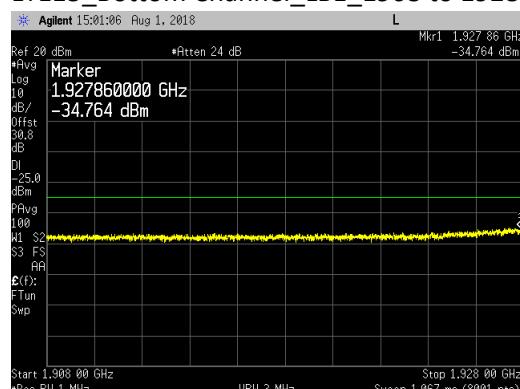

LTE15_Top Channel_UBE_1997 to 2017MHz

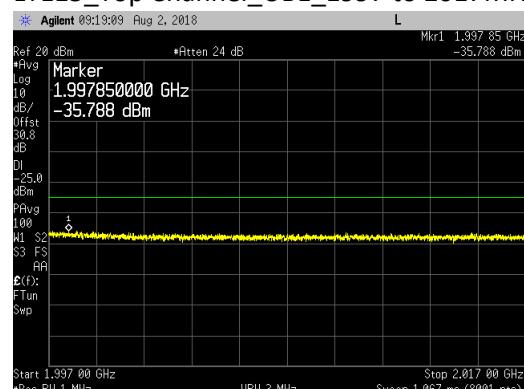

LTE15 Band Edge Plots for Antenna Port 2 and 256QAM Modulation:


LTE15_Bottom Channel_LBE_1929 to 1931MHz




LTE15_Top Channel_UBE_1994 to 1996MHz




LTE15_Bottom Channel_LBE_1928 to 1929MHz

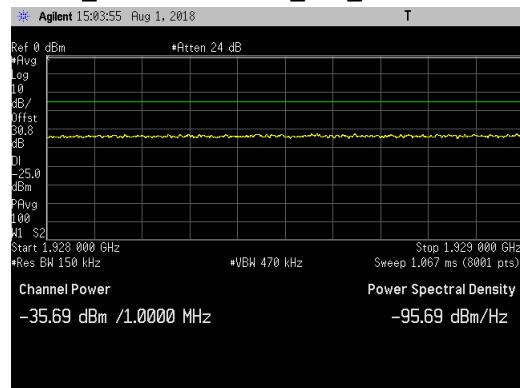


LTE15_Top Channel_UBE_1996 to 1997MHz

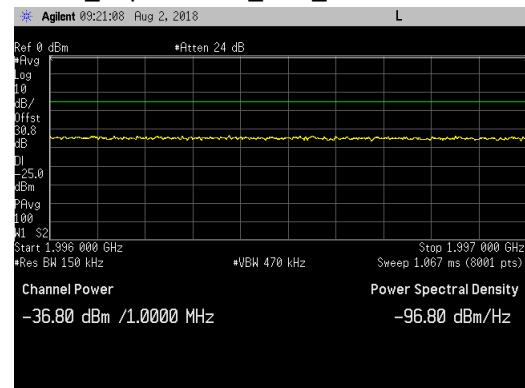

LTE15_Bottom Channel_LBE_1908 to 1928MHz

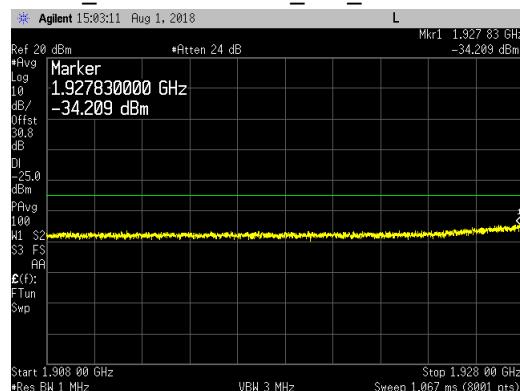

LTE15_Top Channel_UBE_1997 to 2017MHz

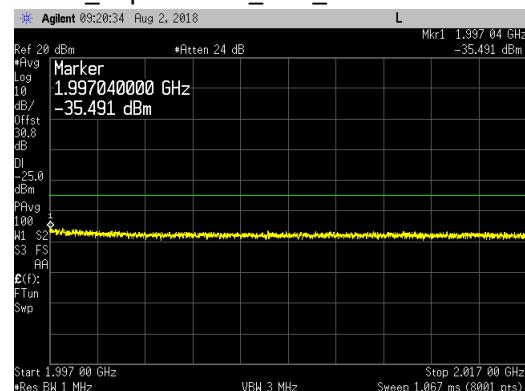

LTE20 Band Edge Plots for Antenna Port 2 and QPSK Modulation:


LTE20_Bottom Channel_LBE_1929 to 1931MHz




LTE20_Top Channel_UBE_1994 to 1996MHz




LTE20_Bottom Channel_LBE_1928 to 1929MHz

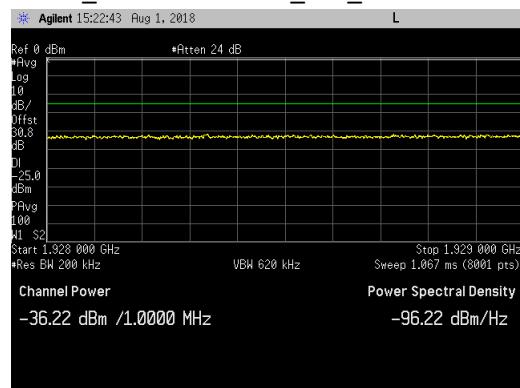


LTE20_Top Channel_UBE_1996 to 1997MHz

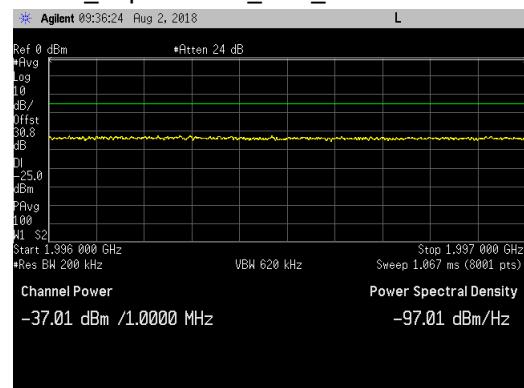

LTE20_Bottom Channel_LBE_1908 to 1928MHz

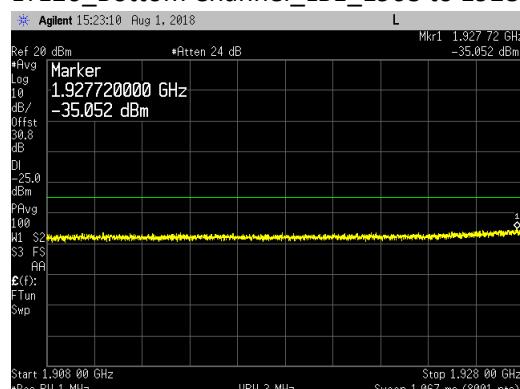

LTE20_Top Channel_UBE_1997 to 2017MHz

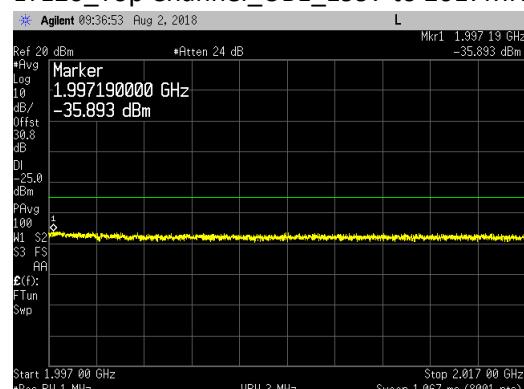


LTE20 Band Edge Plots for Antenna Port 2 and 16QAM Modulation:


LTE20_Bottom Channel_LBE_1929 to 1931MHz




LTE20_Top Channel_UBE_1994 to 1996MHz

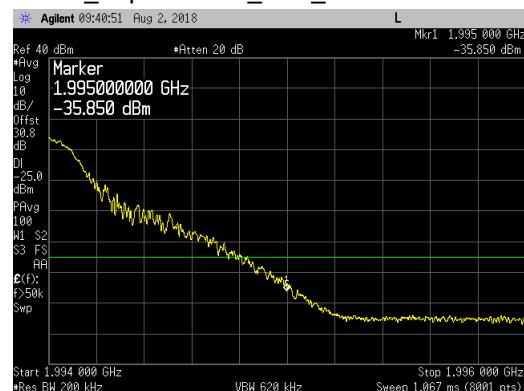


LTE20_Bottom Channel_LBE_1928 to 1929MHz

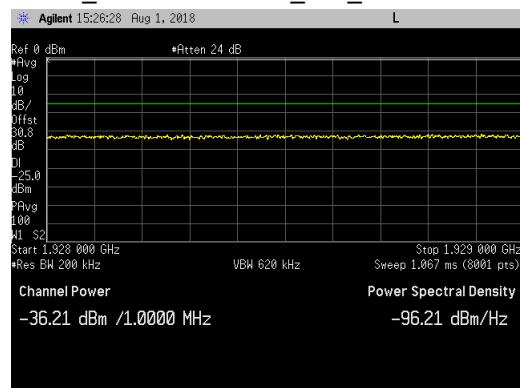

LTE20_Top Channel_UBE_1996 to 1997MHz

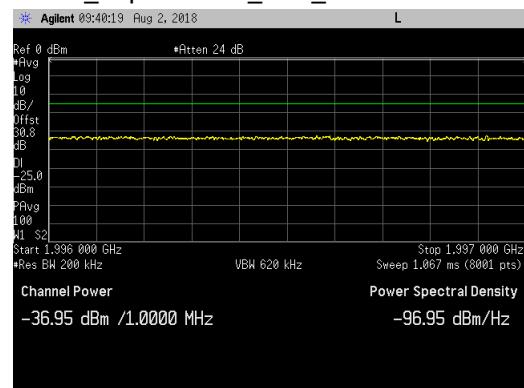

LTE20_Bottom Channel_LBE_1908 to 1928MHz

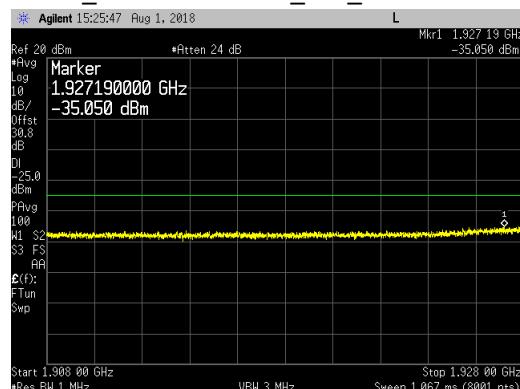

LTE20_Top Channel_UBE_1997 to 2017MHz



LTE20 Band Edge Plots for Antenna Port 2 and 64QAM Modulation:


LTE20_Bottom Channel_LBE_1929 to 1931MHz




LTE20_Top Channel_UBE_1994 to 1996MHz



LTE20_Bottom Channel_LBE_1928 to 1929MHz

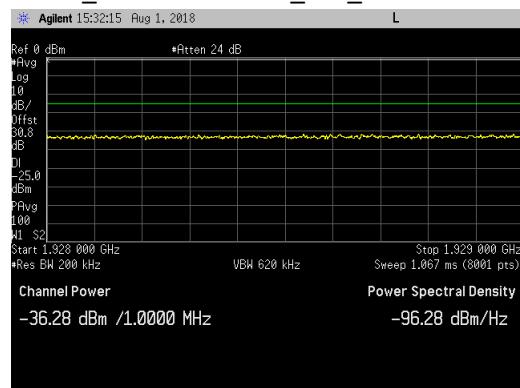


LTE20_Top Channel_UBE_1996 to 1997MHz

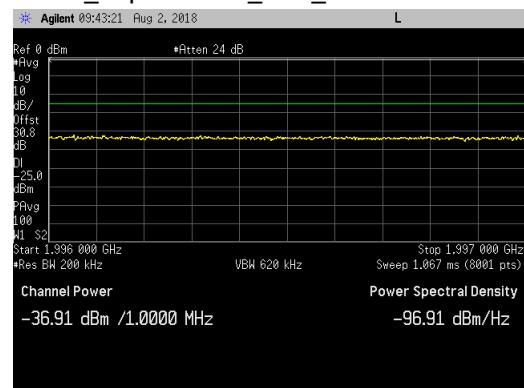

LTE20_Bottom Channel_LBE_1908 to 1928MHz



LTE20_Top Channel_UBE_1997 to 2017MHz

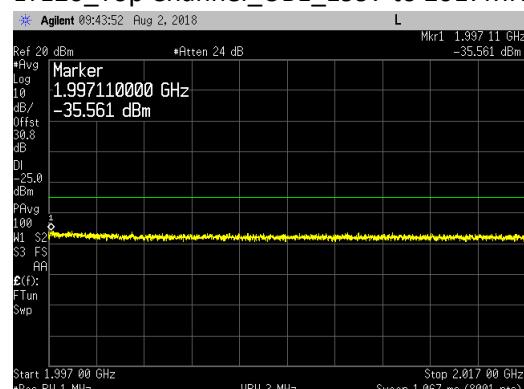

LTE20 Band Edge Plots for Antenna Port 2 and 256QAM Modulation:


LTE20_Bottom Channel_LBE_1929 to 1931MHz




LTE20_Top Channel_UBE_1994 to 1996MHz



LTE20_Bottom Channel_LBE_1928 to 1929MHz

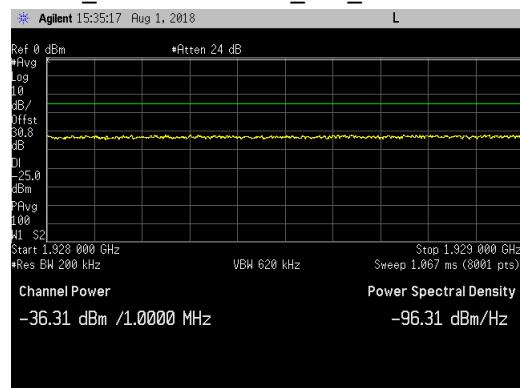


LTE20_Top Channel_UBE_1996 to 1997MHz

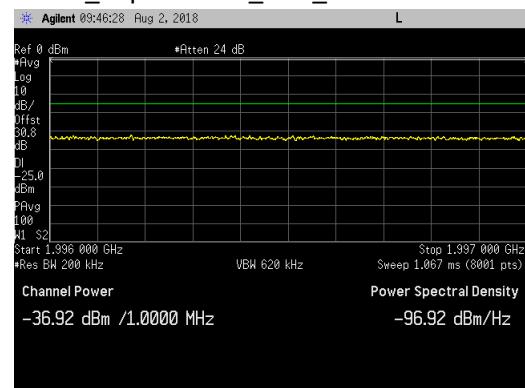

LTE20_Bottom Channel_LBE_1908 to 1928MHz




LTE20_Top Channel_UBE_1997 to 2017MHz

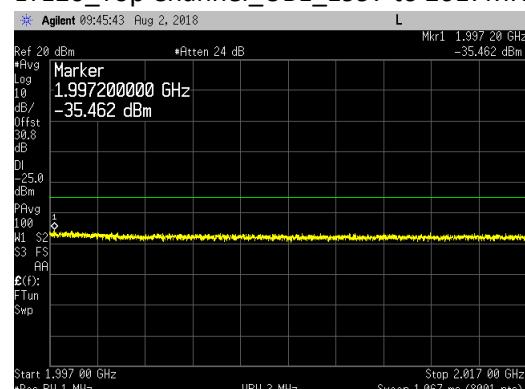


Dual LTE5_Min Spacing_Band Edge Plots for Antenna Port 2 and QPSK Modulation:


Dual LTE5_Bot Ch_LBE_1929 to 1936MHz

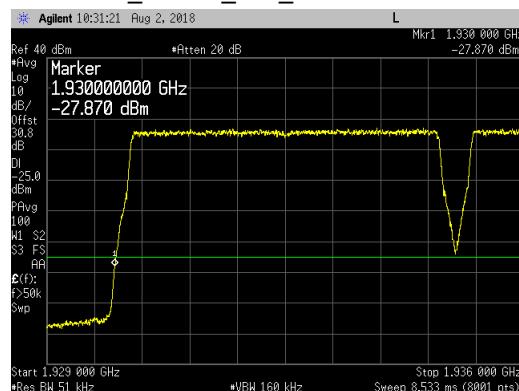


Dual LTE5_Top Ch_UBE_1989 to 1996MHz

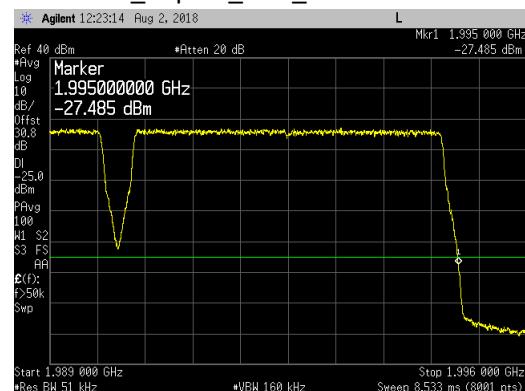


Dual LTE5_Bot Ch_LBE_1928 to 1929MHz

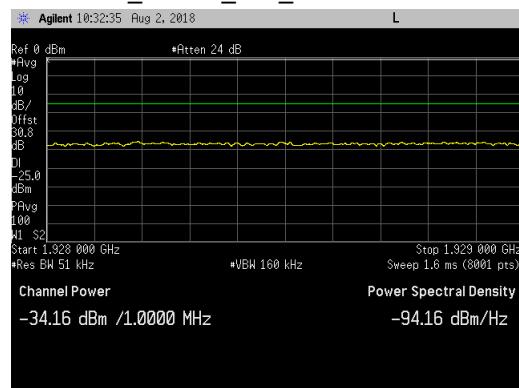


Dual LTE5_Top Ch_UBE_1996 to 1997MHz

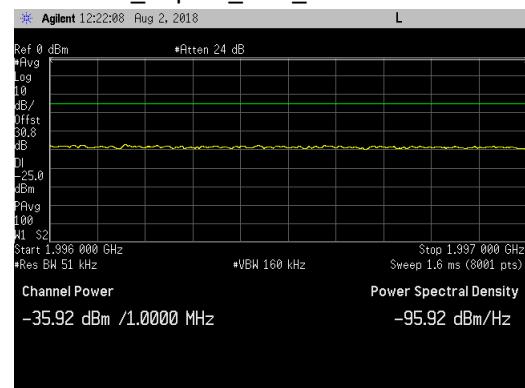

Dual LTE5_Bot Ch_LBE_1908 to 1928MHz

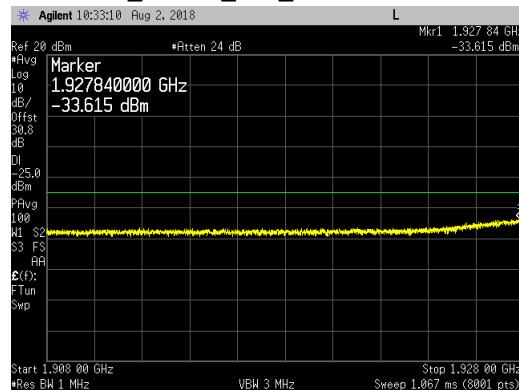


Dual LTE5_Top Ch_UBE_1997 to 2017MHz

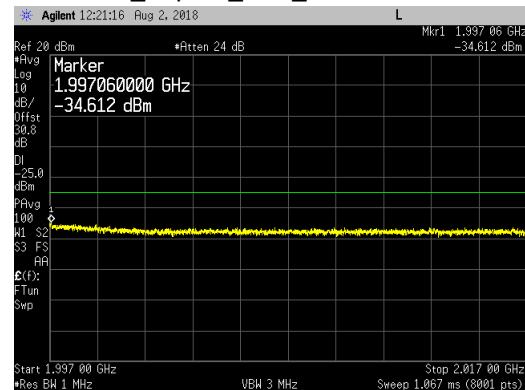


Dual LTE5_Min Spacing_Band Edge Plots for Antenna Port 2 and 16QAM Modulation:


Dual LTE5_Bot Ch_LBE_1929 to 1936MHz

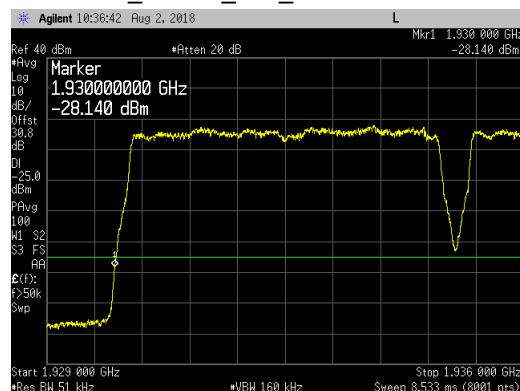


Dual LTE5_Top Ch_UBE_1989 to 1996MHz

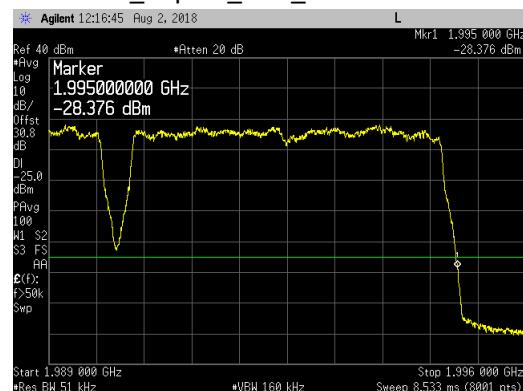


Dual LTE5_Bot Ch_LBE_1928 to 1929MHz

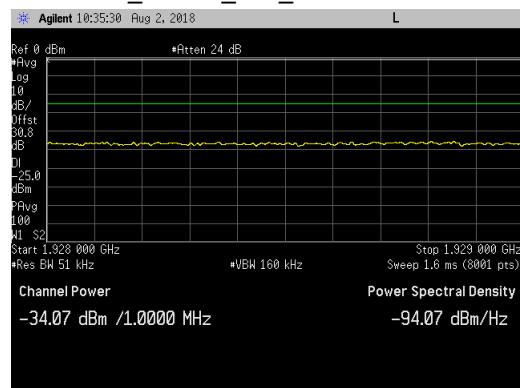


Dual LTE5_Top Ch_UBE_1996 to 1997MHz

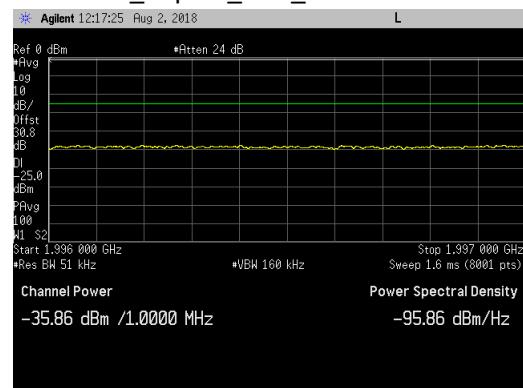

Dual LTE5_Bot Ch_LBE_1908 to 1928MHz

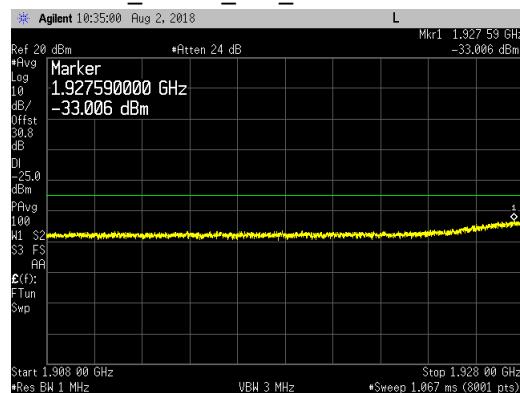


Dual LTE5_Top Ch_UBE_1997 to 2017MHz

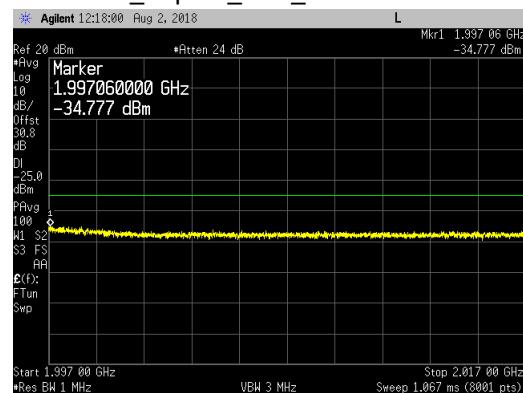


Dual LTE5_Min Spacing_Band Edge Plots for Antenna Port 2 and 64QAM Modulation:


Dual LTE5_Bot Ch_LBE_1929 to 1936MHz

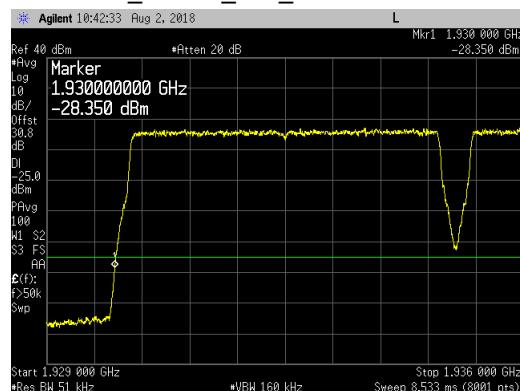


Dual LTE5_Top Ch_UBE_1989 to 1996MHz

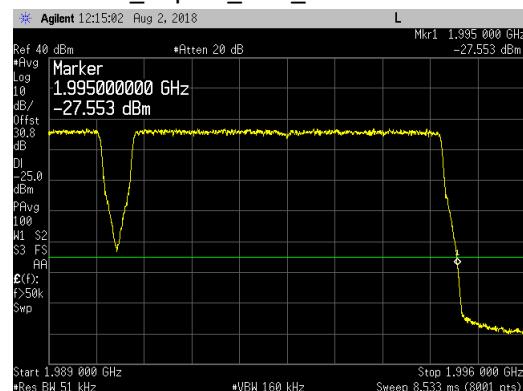


Dual LTE5_Bot Ch_LBE_1928 to 1929MHz

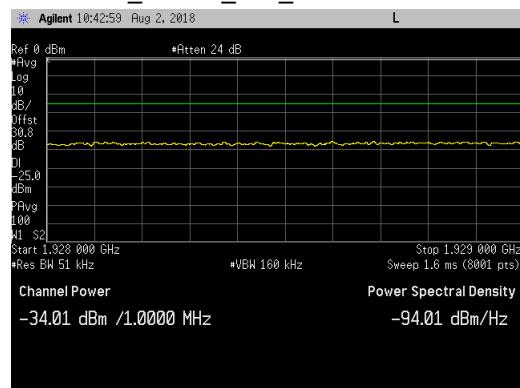


Dual LTE5_Top Ch_UBE_1996 to 1997MHz

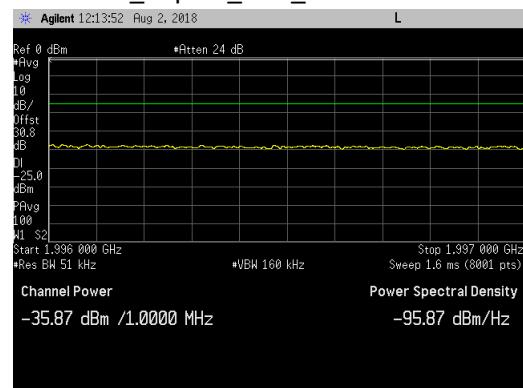

Dual LTE5_Bot Ch_LBE_1908 to 1928MHz

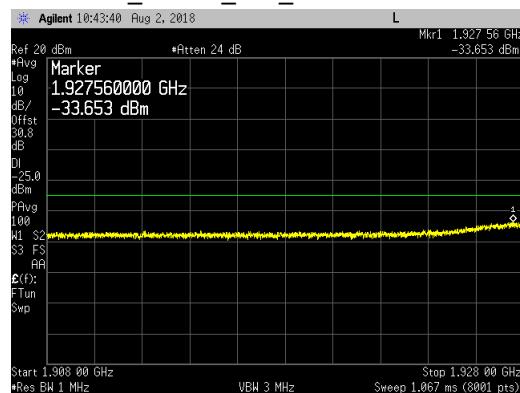


Dual LTE5_Top Ch_UBE_1997 to 2017MHz

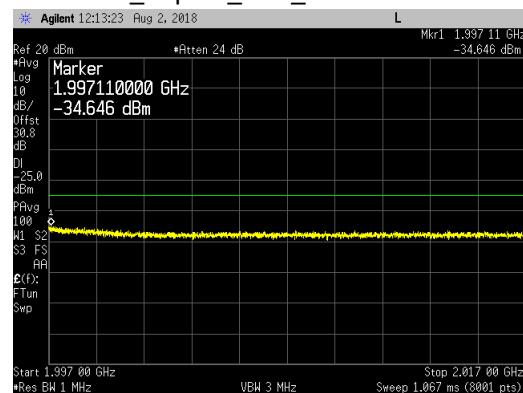


Dual LTE5_ Min Spacing _Band Edge Plots for Antenna Port 2 and 256QAM Modulation:


Dual LTE5_ Bot Ch_LBE_1929 to 1936MHz

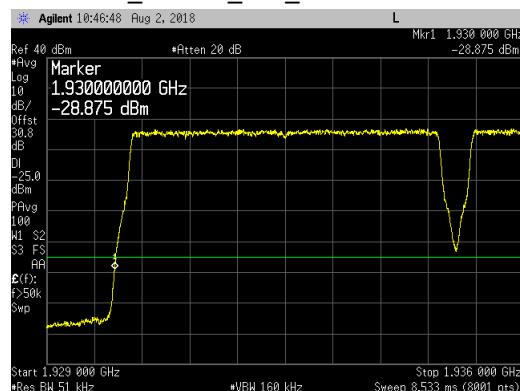


Dual LTE5_ Top Ch_UBE_1989 to 1996MHz

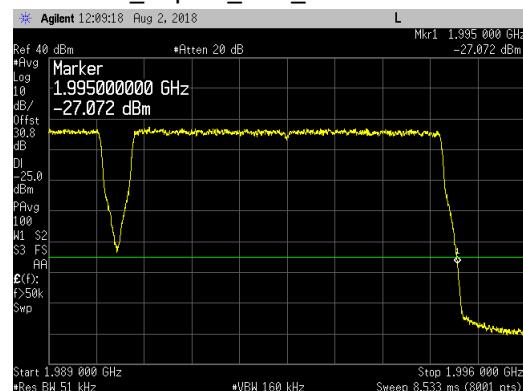


Dual LTE5_ Bot Ch_LBE_1928 to 1929MHz

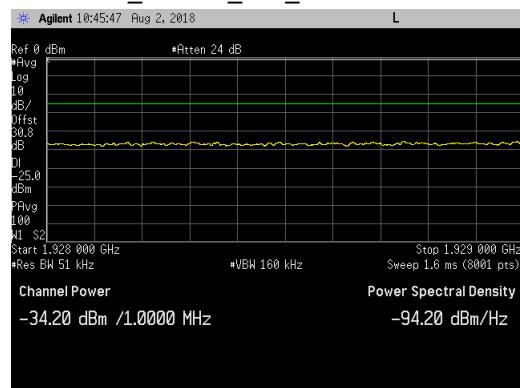

Dual LTE5_ Top Ch_UBE_1996 to 1997MHz

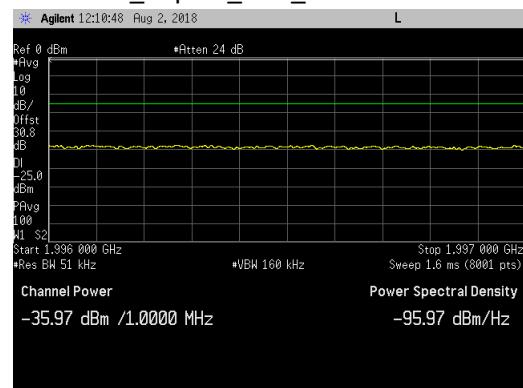

Dual LTE5_ Bot Ch_LBE_1908 to 1928MHz

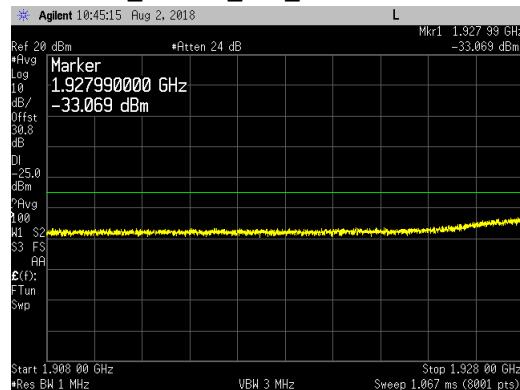

Dual LTE5_ Top Ch_UBE_1997 to 2017MHz

