Untertürkheimer Straße 6-10 . D-66117 Saarbrücken **RSC-Laboratory**

Phone: +49 (0) 681-598-0 Fax:-9075





Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

Federal Motor Transport Authority (KBA) DAR registration number: KBA-P 00070-97

Recognized by the Federal Communications Commission Anechoic chamber registration no.: 90462 (FCC) Anechoic chamber registration no.: 3463A-1 (IC) **Certification ID: DE 0001 Accreditation ID: DE 0002**

Accredited Bluetooth[®] Test Facility (BQTF) The Bluetooth word mark and logos are owned by the Bluetooth SIG,

Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 4-2600-01-02/07-A Type identification: iMETRIK DACP08E Applicant : iMETRIK Solutions Inc.

IC Certification No: 7149A-DACP08E Test standards : 47 CFR Part 22 47 CFR Part 24

FCC ID

RSS - 132 Issue 2 RSS - 133 Issue 3

: VCADACP08E

2008-10-24 Page 1 of 45






Table of contents

1	General information	3
1.	.1 Notes	3
	.2 Testing laboratory	
1.	.3 Details of applicant	
1.	.4 Application details	
2	Test standard/s:	5
3	Technical tests	6
3	.1 Details of manufacturer	6
٥.	3.1.1 Test item	
3.	.2 RF Technical Brief Cover Sheet acc. To RSS-102	
3.	.3 Test Setup	
4	Statement of Compliance	
4	.1 Summary of Measurement Results	9
	4.1.1 PCS 1900	
	4.1.2 GSM 850	
5	Measurements and results	10
5.	.1 PART PCS 1900	10
	5.1.1 RF Power Output	
	5.1.2 MPE Calculation	
	5.1.3 Radiated Emissions	15
	5.1.4 Receiver Radiated Emissions (valid for PCS 850 and PCS 1900)	22
5.	.2 PART GSM 850	26
	5.2.1 RF Power Output	26
	5.2.2 MPE Calculation	29
	5.2.3 Radiated Emissions	30
6	Test equipment and ancillaries used for tests	36
7	Photographs	30

Test report no.: 4-2600-01-02/07-A



1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

Date

2008-10-24 Kpelou Meheza Walla M. Walla

Technical responsibility for area of testing:

Name

2008-10-24 Stefan Bös

Date Name Signatur

2008-10-24 Page 3 of 45

Lefan hos

Test report no.: 4-2600-01-02/07-A



1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10 66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to

DIN EN ISO/IEC 17025

DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)

DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name : Street : Town : Country : Phone : Fax :

Contact:

1.3 Details of applicant

Name: iMETRIK Solutions Inc.

Street: 740 Notre-Dame St. West, Suite 1320

Mr. Alain Byette

Town: Montreal, QC
Country: CANADA H3C 3X6

Telephone: +1-(0)-866 276 5382
Fax: +1-(0)-514 904 0611

E-mail: Alain.byette@imetrik.com

Telephone: +1-(0)-866 276 5382

1.4 Application details

Date of receipt of order: 2007-09-11

Date of receipt of test item: 2007-09-11

Date of start test: 2007-09-11

Date of end test 2008-10-24

Persons(s) who have been present during the test: -/-

2008-10-24 Page 4 of 45

Test report no.: 4-2600-01-02/07-A



2 Test standard/s:

47 CFR Part 22	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 22-Public mobile services
47 CFR Part 24	2006-10	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter B - common carrier services, Part 24-Personal communications services
RSS - 132 Issue 2	2005-09	Spectrum Management and Telecommunications Policy Radio Standards Specifications Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz
RSS - 133 Issue 3	2005-06	Spectrum Management and Telecommunications Policy - Radio Standards Specifications 2 GHz Personal Communication Services

2008-10-24 Page 5 of 45

Test report no.: 4-2600-01-02/07-A



3 Technical tests

3.1 Details of manufacturer

Name:	Sanmina-SCI
Street:	2001 Boul. Des Sources
Town:	Pointe Claire, Quebec H9R 5Z4
Country:	Canada

3.1.1 Test item

Kind of test item	:	Quad-band GSM module with GPS
Type identification	:	iMETRIK DACP08E
Serial Number	:	234507085001255
Frequency	:	1850.2 – 1909.8 MHz and 824.2 – 848.8 MHz
Emission Designator for GSM 850	:	292KGXW (GMSK)
Emission Designator for PCS 1900	:	294KGXW (GMSK)
Number of channels	:	300 (PCS1900) and 125 (PCS850)
Antenna Type	:	External dipole antenna
Power supply (normal)	:	13.8V DC
Output power GSM 850 / GMSK	:	ERP: 28.9 dBm (Burst);
Output power GSM 1900 / GMSK	:	EIRP: 29.2 dBm (Burst)
Transmitter Spurious (worst case)	:	-31.13 dBm
Receiver Spurious (worst case)	:	45.52 dBμV (noise floor)
FCC ID	:	VCADACP08E
Certification No. IC	:	7149A-DACP08E
Open Area Test Site IC No.	:	IC 3463A-1
IC Standards	:	RSS132, Issue 2, RSS133, Issue 3

ATTESTATION: DECLARATION OF COMPLIANCE:

I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2008-10-24 Meheza Kpelou Walla

Date Name Signature

2008-10-24 Page 6 of 45

Test report no.: 4-2600-01-02/07-A



3.2 RF Technical Brief Cover Sheet acc. To RSS-102

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

1. COMPANY NUMBER:	/149A
2. MODEL NUMBER:	DAPC08E
3. MANUFACTURER:	Sanmina-SCI
4. TYPE OF EVALUATION:	(c) RF Evaluation
 Evaluated against exposure limits: General Duty cycle used in evaluation: 99 % Standard used for evaluation: RSS-102 Is Measurement distance: 0.20 m RF value: 2.53 V/m □ A/m □ W/m ☑ Measured ☐ Computed ☐ Calculated ☑ 	ssue 2 (2005-11)

Declaration of RF Exposure Compliance

ATTESTATION:

I attest that the information provided in this test report are correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

M. Walla

Name: Meheza K. Walla Title: Dipl.-Ing. (FH)

Company: Cetecom ICT Services GmbH

2008-10-24 Page 7 of 45



Test report no.: 4-2600-01-02/07-A

3.3 Test Setup

Hardware : Rev.E Software : 2.0

Mobile; (cond. measurements): -/-

Mobile; (rad. measurements): 234507085001255

In this report we tested only the radiated part of FCC part 22H / 24E.

The radiated measurements were performed with external power supply from our house.

2008-10-24 Page 8 of 45

Test report no.: 4-2600-01-02/07-A



4 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

4.1 Summary of Measurement Results

\boxtimes	No deviations from the technical specifications were ascertained
	There were deviations from the technical specifications ascertained

4.1.1 PCS 1900

Section in	Test Name	Verdict
this Report		
5.1.1	RF Power Output	pass
5.1.2	MPE Calculation	pass
5.1.3	Radiated Emissions	pass
5.1.4	Receiver Radiated Emissions	pass

4.1.2 GSM 850

Section in	Test Name	Verdict
this Report		
5.2.1	RF Power Output	pass
5.2.2	MPE Calculation	pass
5.2.3	Radiated Emissions	pass
5.1.4	Receiver Radiated Emissions	pass

2008-10-24 Page 9 of 45

Test report no.: 4-2600-01-02/07-A



5 Measurements and results

For Part 24/22 we use the substitution method (TIA/EIA 603).

All measurements in this report are done in GSM mode. The device is able to transmit data in GPRS mode also. But because the current measurements are performed in PEAK mode no other results from GPRS mode are possible. The only different is the modulation average power, which is 3 dB higher (by using 2 timeslots in the Up-link). All relevant tests have been repeated in 8-PSK Modulation if EDGE Mode is supported.

5.1 PART PCS 1900

5.1.1 RF Power Output

Reference

FCC:	CFR Part 24.232, 2.1046
IC:	RSS 133, Issue 3, Section 4.3

Summary:

This paragraph contains both average/peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average).

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0 MHz and 1909.8 MHz (bottom, middle and top of operational frequency range).

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
0	+30	± 2

Test Results: Output Power (conducted)

Not performed!

Frequency (MHz)	Power Class	Peak Output Power (dBm)	Average Output Power (dBm)
1850.2	0		
1880.0	0		
1909.8	0		
Measurement uncertainty		±0	0.5 dB

2008-10-24 Page 10 of 45

Test report no.: 4-2600-01-02/07-A



EIRP Measurements

Description:

This is the test for the maximum radiated power from the phone.

Rule Part 24.232(b) specifies that "Mobile/portable stations are limited to 2 watts e.i.r.p. peak power..." and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.

(1) Repeat for all different test signal frequencies.

2008-10-24 Page 11 of 45

Test report no.: 4-2600-01-02/07-A



Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency : equal to the signal source

Resolution BW : 10 kHz
Video BW : same
Detector Mode : positive
Average : off

Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):

DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.

- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (1) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.
- (n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1

EIRP = P + G1 = P3 + L2 - L1 + A + G1

ERP = EIRP - 2.15 dB

Total Correction factor in EMI Receiver # 2 = L2 - L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input


P3: Power reading on the Average Power Meter

EIRP: EIRP after correction

ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

2008-10-24 Page 12 of 45





Limits:

Power Step	Burst PEAK EIRP (dBm)
0	<30

Test Results: Output Power (radiated)

Frequency (MHz)	Power Class	BURST PEAK EIRP (dBm)	
1850.2	0	29.1	
1880.0	0	29.2	
1909.8	0	29.1	
Measurement uncertainty	±3 dB		

Sample Calculation:

Freq	SA	SG	Ant.	Dipol	Cable	EIRP		
	Reading	Setting	gain	gain	loss	Result		
MHz	dΒμV	dBm	dBi	dBd	dB	dBm		
1909.8	132.3	24.6	8.4	0.0	3.3	29.7		

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

2008-10-24 Page 13 of 45

Test report no.: 4-2600-01-02/07-A



5.1.2 MPE Calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a "worst case" prediction.

$S = PG/4\pi R^2$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$S = EIRP/4\pi R^2$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 29.20 dBm (831.76 mW)

calculated at distance of 20 cm:

Power density = $831.76 / 4\pi (20)^2 = 0.165 \text{ mW/cm}^2$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

2008-10-24 Page 14 of 45

Test report no.: 4-2600-01-02/07-A



5.1.3 Radiated Emissions

Reference

FCC:	CFR Part 24.238, 2.1053
IC:	RSS 133, Issue 3, Section 4.4

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a 10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. This was rounded up to 20 GHz. The resolution bandwidth is set as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged waveguide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded.
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

2008-10-24 Page 15 of 45

Test report no.: 4-2600-01-02/07-A



Measurement Results: Radiated Emissions

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (1850.2 MHz, 1880.0 MHz and 1909.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next table.

All measurements were done in horizontal and vertical polarization, the plots show the worst case. As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch512	Level	Tx ch661	Level	Tx ch810	Level
	Freq. (MHz)	(dBm)	Freq. (MHz)	(dBm)	Freq. (MHz)	(dBm)
2	3700.4	-	3760	-	3819.6	-
3	5550.6	-	5640	ı	5729.4	-
4	7400.8	-	7520	1	7639.2	-
5	9251.0	-	9400	1	9549.0	-
6	11101.2	-	11280	-	11458.8	-
7	12951.4	-	13160	-	13368.6	-
8	14801.6	-	15040	Г	15278.4	-
9	16651.8	-	16920	-	17188.2	-
10	18502.0	-	18800	-	19098.0	-

No peaks found < 20 dB below limit.

Sample calculation:


Freq	SA Reading	SG Setting	Ant. gain	Dipol gain	Cable loss	EIRP Result	 	
MHz	dΒμV	dBm	dBi	dBd	dB	dBm		
1909.8	132.3	24.6	8.4	0.0	3.3	29.7		

EIRP = SG (dBm) - Cable Loss (dB) + Ant. gain (dBi)

2008-10-24 Page 16 of 45




Traffic mode up to 30 MHz (Valid for all 3 channels and all modulations PCS 850 / 1900)

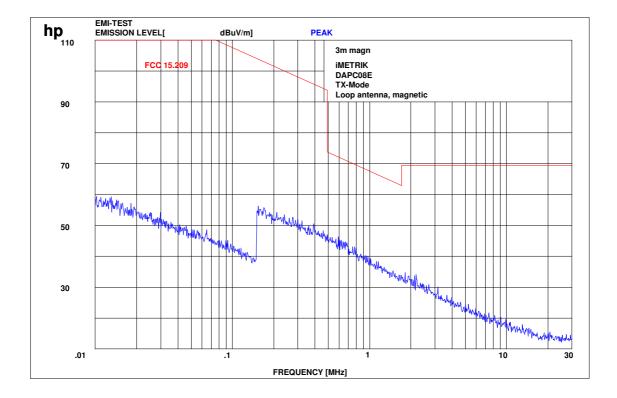

2008-10-24 Page 17 of 45




Channel 512 (30 MHz - 4 GHz)

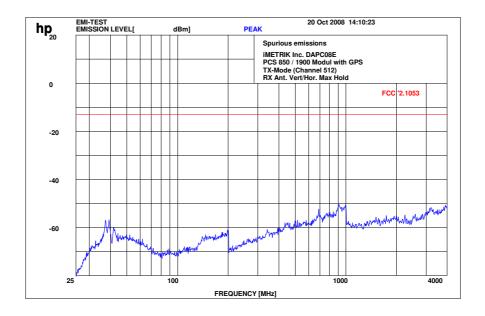

f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{ GHz}: RBW / VBW 1 \text{ MHz}$ Carrier suppressed with a rejection filter

Channel 512 (4 GHz – 12.5 GHz)

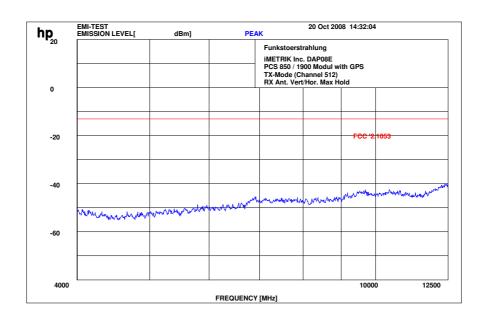


f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{GHz}: RBW / VBW 1 \text{ MHz}$

2008-10-24 Page 18 of 45

CETECOM ICT Services GmbH Test report no.: 4-2600-01-02/07-A




Channel 512 (12 GHz - 25 GHz) valid for all 3 channels

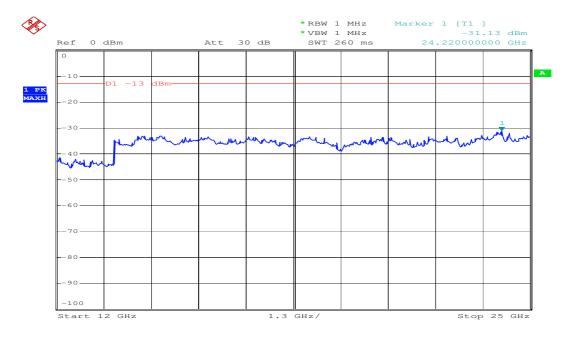

2008-10-24 Page 19 of 45




Channel 661 (30 MHz - 4 GHz)

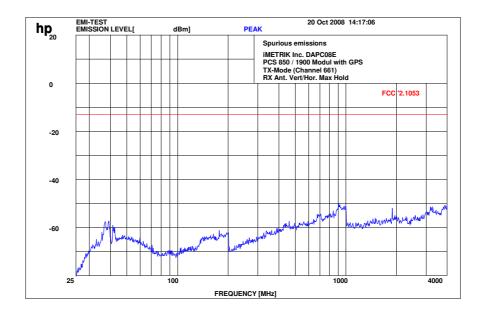

f < 1 GHz : RBW/VBW: 100 kHz $f \ge$ 1GHz : RBW / VBW 1 MHz Carrier suppressed with a rejection filter

Channel 661 (4 GHz - 12.5 GHz)

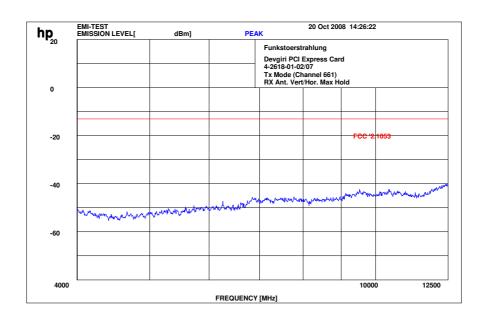


f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{GHz}: RBW / VBW 1 \text{ MHz}$

2008-10-24 Page 20 of 45




Channel 810 (30 MHz - 4 GHz)

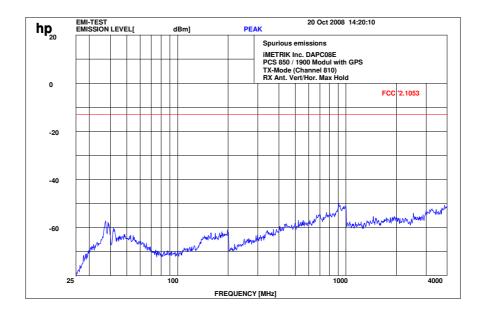

f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{ GHz}: RBW / VBW 1 \text{ MHz}$ Carrier suppressed with a rejection filter

Channel 810 (4 GHz - 12.5 GHz)

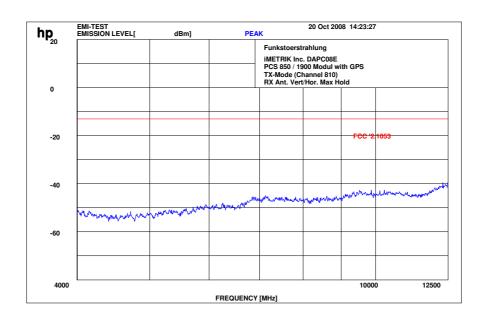

f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{GHz}: RBW / VBW 1 \text{ MHz}$

2008-10-24 Page 21 of 45

Test report no.: 4-2600-01-02/07-A



5.1.4 Receiver Radiated Emissions (valid for PCS 850 and PCS 1900)

Reference

FCC:	CFR Part 15.109, 2.1053
IC:	RSS 133, Issue 3, Section 4.5

Measurement Results

	SPURIOUS EMISSIONS LEVEL (μV/m)							
	Idle mode							
Frequency (MHz)	Detector	Level (µV/m)	Frequency (MHz)	Detector	Level (µV/m)	Frequency (MHz)	Detector	Level (µV/m)
-	-	-	-	-	ı	-	-	-
-	-	1	-	ı	ı	-	-	ı
-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
-	-	1	-	-	1	-	-	-
-	-	1	-	1	ı	-	-	ı
_	-	1	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-
Measurement uncertainty			±3 dB					

f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{ GHz}: RBW/VBW: 1 \text{ MHz}$

H = Horizontal; V= Vertical

For measurement distance see table below

Limits: § 15.109

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

2008-10-24 Page 22 of 45

Test report no.: 4-2600-01-02/07-A



Idle Mode (30 MHz - 1 GHz)

Information

EUT: iMETRIK DACP08E
Serial Number: 234507085001255
Test Description: ECC part 15 class R @ 1

Test Description: FCC part 15 class B @ 10 m

Operating Conditions: Idle mode
Operator Name: WAL


Comment: Powered with DC: 12 V

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: EMI radiated\Electric Field (NOS)
Level Unit: dBμV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver	
30MHz - 1GHz	QuasiPeak	120kHz	15s	Receiver	

FCC_1GHz

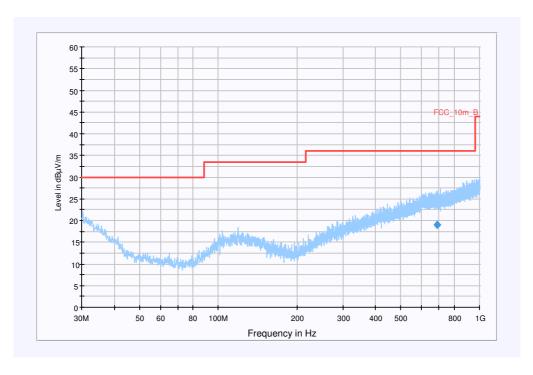

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
685.488950	19.0	15000.000	120.000	382.0	V	24.0	21.7	17.0	36.0	

2008-10-24 Page 23 of 45

Test report no.: 4-2600-01-02/07-A



Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]

@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009

Signal Path: without Notch

FW 1.0

Antenna: Chase Broadband BiLog Antenna CBL 6112

SN 2110, FW A, CAL 07.01.2009

Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112

Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112

Correction Table: Cabel with switch (1007)


Antenna Tower: Tower [EMCO 2090 Antenna Tower]

@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]

@ GPIB0 (ADR 9)

Idle Mode (1 MHz - 4 GHz)

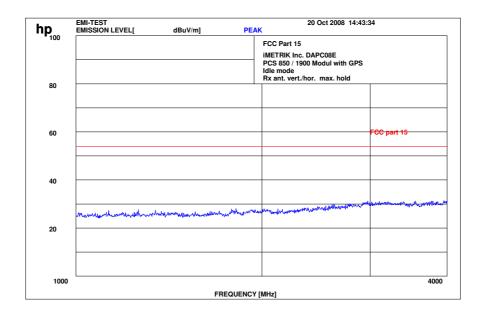


 $f \ge 1 \text{GHz} : \text{RBW} / \text{VBW} 1 \text{ MHz}$

2008-10-24 Page 24 of 45




Idle Mode (4 GHz – 12.0 GHz)

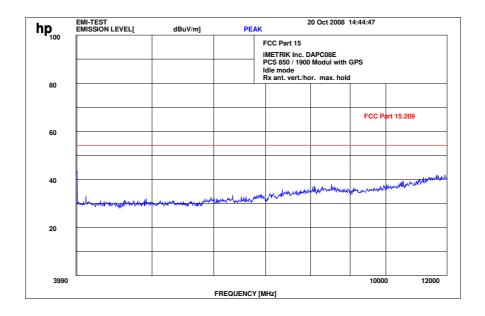

 $f \ge 1 GHz : RBW / VBW 1 MHz$

Idle Mode (12 GHz - 25 GHz)

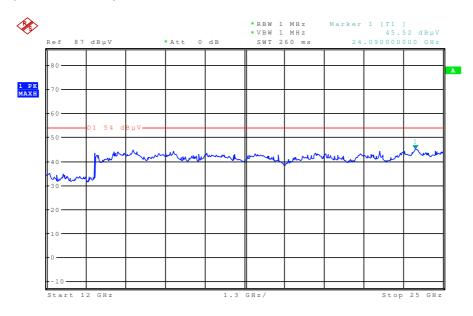

2008-10-24 Page 25 of 45

Test report no.: 4-2600-01-02/07-A



5.2 PART GSM 850

5.2.1 RF Power Output

Reference

FCC:	CFR Part 22.9.1.3, 2.1046
IC:	RSS 132, Issue 2, Section 4.4 and 6.4

Summary:

This paragraph contains both average, peak output powers and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Method of Measurements:

The mobile was set up for the max. output power with pseudo random data modulation.

The power was measured with R&S Signal Analyzer FSIQ 26 (peak and average).

These measurements were done at 3 frequencies, 824.2 MHz, 836.2 MHz and 848.8 MHz (bottom, middle and top of operational frequency range).

Limits:

Power Step	Nominal Peak Output Power (dBm)	Tolerance (dB)
5	+33	± 2

Measurements Results: Output Power (conducted)

Not performed!

Frequency (MHz)	Power Class	Peak Output Power (dBm)	Average Output Power (dBm)
824.2	5		
836.4	5		
848.8	5		
Measuremer	nt uncertainty	±0	0.5 dB

2008-10-24 Page 26 of 45

Test report no.: 4-2600-01-02/07-A



ERP Measurements

Description: This is the test for the maximum radiated power from the phone. Rule Part 22.913 specifies that "Mobile/portable stations are limited to 7 watts ERP.

Measuring the EIRP of Spurious/Harmonic Emissions using Substitution Method

- (a) The measurements was performed with full rf output power and modulation.
- (b) Test was performed at listed 3m test site (listed with FCC, IC).
- (c) The transmitter under test was placed at the specified height on a non-conducting turntable (80 cm height)
- (d) The BICONILOG antenna (20 MHz to 1 GHz) or HORN antenna (1 GHz to 18 GHz) was used for measuring.
- (e) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E (dBuV/m) = Reading (dBuV) + Total Correction Factor (dB/m)

(f) Set the EMI Receiver and #2 as follows:

Center Frequency: test frequency

Resolution BW: 100 kHz

Video BW: same

Detector Mode: positive

Average: off

Span: 3 x the signal bandwidth

- (g) The test antenna was lowered or raised from 1 to 4 meters until the maximum signal level was detected.
- (h) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (i) The test antenna was lowered or raised again from 1 to 4 meters until a maximum was obtained. This level was recorded.
- (j) The recorded reading was corrected to the true field strength level by adding the antenna factor, cable loss and subtracting the pre-amplifier gain.
- (k) The above steps were repeated with both transmitters' antenna and test receiving antenna placed in vertical and horizontal polarization. Both readings with the antennas placed in vertical and horizontal polarization shall be recorded.
- (1) Repeat for all different test signal frequencies

Measuring the ERP of Spurious/Harmonic Emissions using Substitution Method

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring ERP) as follows:

Center Frequency : equal to the signal source

Resolution BW : 10 kHz
Video BW : same
Detector Mode : positive
Average : off

Span : 3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor

E(dBuV/m) = Reading(dBuV) + Total Correction Factor(dB/m)

- (c) Select the frequency and E-field levels for ERP/EIRP measurements.
- (d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):
- .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (e) Mount the transmitting antenna at 1.5 meter high from the ground plane.
- (f) Use one of the following antenna as a receiving antenna: .DIPOLE antenna for frequency from 30-1000 MHz or .HORN antenna for frequency above 1 GHz }.
- (g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.
- (h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.
- (i) Tune the EMI Receivers to the test frequency.
- (j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (k) The transmitter was rotated through 360 o about a vertical axis until a higher maximum signal was received.
- (1) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.
- (m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.

(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

Total Correction factor in EMI Receiver #2 = L2 - L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

2008-10-24 Page 27 of 45



Test report no.: 4-2600-01-02/07-A

P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1

EIRP = P + G1 = P3 + L2 - L1 + A + G1

ERP = EIRP - 2.15 dB

Total Correction factor in EMI Receiver #2 = L2 - L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.

P1: Power output from the signal generator

P2: Power measured at attenuator A input

P3: Power reading on the Average Power Meter

EIRP: EIRP after correction ERP: ERP after correction

- (o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)
- (p) Repeat step (d) to (o) for different test frequency
- (q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.
- (r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.

Limits:

Power Step	Burst Peak (dBm)
0	<33

Measurement Results Output Power (Radiated)

Frequency (MHz)	Power Class	BURST PEAK ERP (dBm)
824.2	5	28.4
836.4	5	28.7
848.8	5	28.9
Measurement uncertainty		±3 dB

Sample calculation:

Sumpic C	Sumple culculation.											
Freg	SA	SG	Ant.	nt. Dipol Cable ERP Substit		Substitution Antenna						
	Reading	Setting	gain	gain	loss							
ИHz	dΒμV	dBm	dBi	dBd	dB	dBm						
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460					

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)

2008-10-24 Page 28 of 45

^{*}ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi

Test report no.: 4-2600-01-02/07-A



5.2.2 MPE Calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a "worst case" prediction.

$S = PG/4\pi R^2$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$S = EIRP/4\pi R^2$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

ERP = 28.90 dBm → 776.25 mW (1273 mW EIRP)

calculated at distance of 20 cm:

Power density = $1273/4\pi(20)^2 = 0.253 \text{ mW/cm}^2$

Limit:

f/1500 mW/cm² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.

2008-10-24 Page 29 of 45

Test report no.: 4-2600-01-02/07-A



5.2.3 Radiated Emissions

Reference

FCC:	CFR Part 22.917, 2.1053
IC:	RSS 132, Issue 2, Section 4.5 and 6.5

Measurement Procedure:

The following steps outline the procedure used to measure the radiated emissions from the mobile station. The site is constructed in accordance with ANSI C63.4:2003 requirements and is recognized by the FCC to be in compliance for a 3 and a10 meter site. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 848.8 MHz. This was rounded up to 12 GHz. The resolution bandwidth is set as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the USPCS band.

The final open field emission (here 10m semi-anechoic chamber listed by FCC) test procedure is as follows:

- a) The test item was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna.
- b) The antenna output was terminated in a 50 ohm load.
- c) A double ridged wave guide antenna was placed on an adjustable height antenna mast 3 meters from the test item for emission measurements.
- d) Detected emissions were maximized at each frequency by rotating the test item and adjusting the receive antenna height and polarization. The maximum meter reading was recorded. The radiated emission measurements of the harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and I MHz bandwidth. If the harmonic could not be detected above the noise floor, the ambient level was recorded. The equivalent power into a dipole antenna was calculated from the field intensity levels measured at 3 meters using the equation shown below:
- e) Now each detected emissions were substituted by the Substitution method, in accordance with the TIA/EIA 603.

Measurement Limit:

Sec. 22.917 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least 43+10Log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

2008-10-24 Page 30 of 45

Test report no.: 4-2600-01-02/07-A



Measurement Results:

Radiated emissions measurements were made only at the upper, center, and lower carrier frequencies of the USPCS band (824.2 MHz, 836.4 MHz and 848.8 MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the USPCS band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The final open field radiated levels are presented on the next pages.

All measurements were done in horizontal and vertical polarization, the plots shows the worst case.

As can be seen from this data, the emissions from the test item were within the specification limit.

Harmonic	Tx ch128 Freq. (MHz)	Level (dBm)	Tx ch189 Freq. (MHz)	Level (dBm)	Tx ch251 Freq. (MHz)	Level (dBm)
2	1648.4	-	1672.8	-	1697.6	-
3	2472.6	-	2509.2	-	2546.4	-
4	3296.8	-	3345.6	-	3395.2	-
5	4121.0	-	4182.0	-	4244.0	-
6	4945.2	-	5018.4	-	5092.8	-
7	5769.4	-	5854.8	-	5941.6	-
8	6593.6	-	6691.2	-	6790.4	-
9	7417.8	-	7527.6	-	7639.2	-
10	8242.0	-	8364.0	-	8488.0	-

Sample calculation:

Sumpre cure	Sumple culculation.												
Freg	SA	SG Ant. Dipol Cable		ERP	Substitution Antenna								
	Reading	Setting	gain	gain	loss								
MHz	dΒμV	dBm	dBi	dBd	dB	dBm							
848.8	137.8	26.6	8.4	0.0	3.3	31.7	UHAP Schwarzbeck S/N 460						

ERP = SG (dBm) - Cable Loss (dB) + Ant. gain (dB)


2008-10-24 Page 31 of 45

^{*}ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.1dBi

Test report no.: 4-2600-01-02/07-A




Channel 128 (30 MHz - 4 GHz)

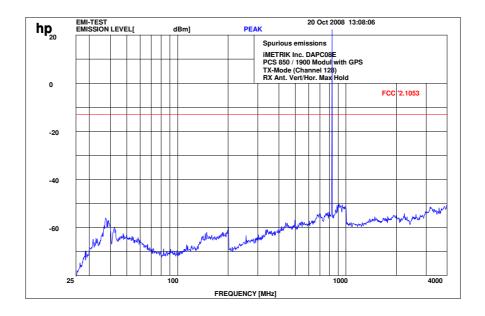

f < 1 GHz : RBW/VBW: 100 kHz $f \ge 1 \text{ GHz} : RBW / VBW 1 \text{ MHz}$

Channel 128 (4 GHz – 12.5 GHz)

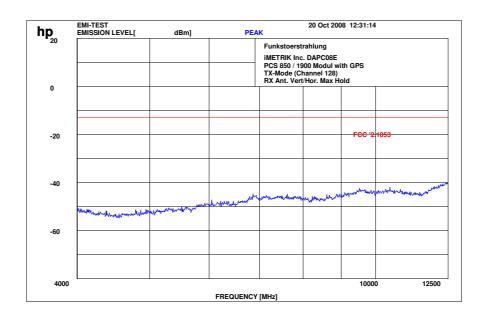


f < 1 GHz : RBW/VBW: 100 kHz $f \ge 1 \text{ GHz} : RBW / VBW 1 \text{ MHz}$

2008-10-24 Page 32 of 45

Test report no.: 4-2600-01-02/07-A




Channel 128 (12 GHz - 25 GHz) valid for all 3 channels

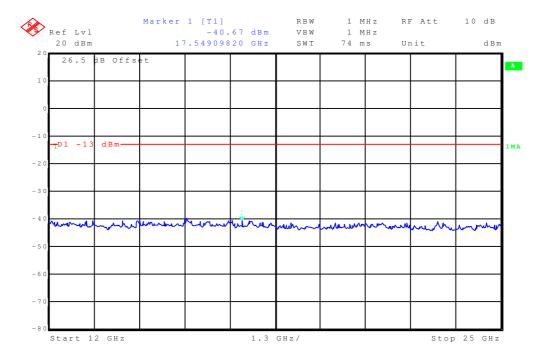

2008-10-24 Page 33 of 45




Channel 189 (30 MHz - 4 GHz)

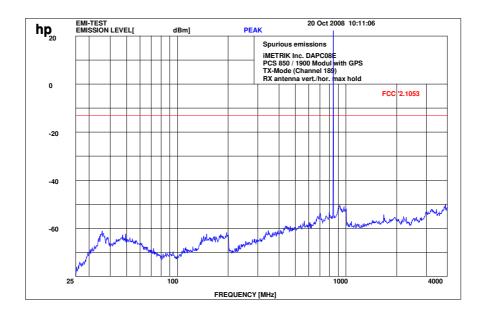

f < 1 GHz : RBW/VBW : 100 kHz $f \ge 1 \text{GHz} : \text{RBW / VBW 1 MHz}$

Channel 189 (4 GHz - 12.5 GHz)

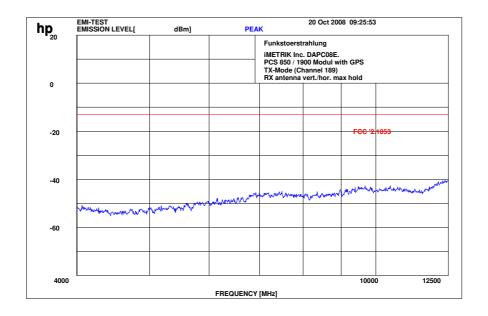


f < 1 GHz: RBW/VBW: 100 kHz $f \ge 1 \text{ GHz}: RBW / VBW 1 \text{ MHz}$

2008-10-24 Page 34 of 45




Channel 251 (30 MHz - 4 GHz)

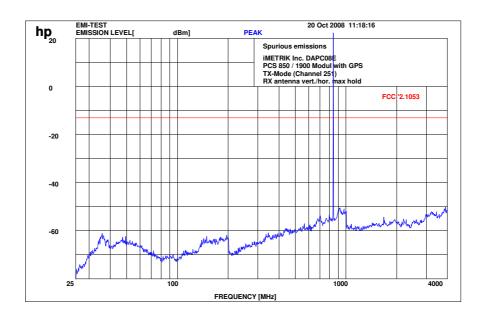

f < 1 GHz : RBW/VBW: 100 kHz $f \ge 1 \text{ GHz} : RBW / VBW 1 \text{ MHz}$

Channel 251 (4 GHz – 12.5 GHz)

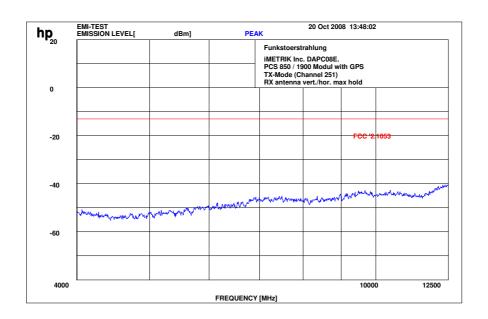

 $F < 1 \text{ GHZ}: \text{RBW/VBW}: 100 \text{ KHZ} \qquad \qquad F \geq 1 \text{GHZ}: \text{RBW/VBW}: 1 \text{ MHZ}$

2008-10-24 Page 35 of 45

Test report no.: 4-2600-01-02/07-A



6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

Anechoic chamber C:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verifica	ntion	•
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	Spektrum Analyzer 8566B	HP	3138A07614	300001207	13.12.2007	24	13.12.2009
5	Spektrum Analyzer Display 85662A	HP	3144A28627	300001208	13.12.2007	24	13.12.2009
6	Quasi-Peak-Adapter 85650A	HP	2811A01204	300002308	13.12.2007	24	13.12.2009
7	RF-Preselector 85685A	HP	2837A00778	300002448	13.12.2007	24	13.12.2009
8	PC Vectra VL	HP		300001688	n.a.		
9	Software EMI	HP		300000983	n.a.		
10	Measurement System 2						
11	FSP 30	R&S	100886	300003575	25.08.2008	24	25.08.2010
12	PC	F+W			n.a.		
13	TILE	TILE			n.a.		
14	Biconical antenna	EMCO	S/N: 860 942/003		Monthly verifica	ntion (System cal.))
15	Log. Period. Antenna 3146	EMCO	2130	300001603	Monthly verifica	ntion (System cal.))
16	Double Ridged Antenna HP 3115P	EMCO	3088	300001032	Monthly verifica	ation (System cal.))
17	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verifica	ntion (System cal.))
18	Power Supply 6032A	HP	2818A03450	300001040	12.05.2007	36	12.05.2010
19	Busisolator	Kontron		300001056	n.a.		
20	Leitungsteiler 11850C	HP		300000997	Monthly verifica	Monthly verification (System cal.)	
21	Power attenuator 8325	Byrd	1530	300001595	Monthly verifica	ation (System cal.)
22	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
23	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		

Signalling Units:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last	Frequency	Next
					Calibration	(months)	Calibration
1	CBT	R&S	100313	300003516	03.09.2008	24	03.09.2010
2	CBT	R&S	100185	300003416	27.08.2008	24	27.08.2010
3	CMU-200	R&S	103992	300003231	04.06.2008	12	04.06.2009
4	CMU-200	R&S	106240	300003321	27.08.2008	24	27.08.2010
5	CMU-200	R&S	832221/0055	300002862	20.03.2008	24	20.03.2010

Climatic Box:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last	Frequency	Next
					Calibration	(months)	Calibration
1	Climatic box VT 4002	Heraeus	58566046820010	300003019	11.05.2007	24	11.05.2009
		Vötsch					
2	Climatic box CTS T-40/50	CTS	064023	300003540	03.01.2007	24	03.01.2009

2008-10-24 Page 36 of 45

Test report no.: 4-2600-01-02/07-A



SRD Laboratory Room 002:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	3000002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	3000002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	3000002681	n.a.		
4	19" Monitor		22759020-ED	3000002681	n.a.		
5	Mouse		LZE 0095/6639	3000002681	n.a.		
6	Keyboard		G00013834L461	3000002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681-0005	10.01.2008	24	10.01.2010
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681-0002	26.08.2008	36	26.08.2011
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	3000002681	s.No.10		
13	RF Rear Connection SMIQ- B19	R&S	To 10	3000002681	s.No.10		
14	Fast CPU SM-B50	R&S	To 10	3000002681	s.No.10		
15	FM Modulator SM-B5	R&S	835676/033	3000002681	s.No.10		
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681-0001	25.08.2008	36	25.08.2011
17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681	s.No.16		
18	Data Generator SMIQ-B11	R&S	To 16	3000002681	s.No.16		
19	RF Rear Connection SMIQ- B19	R&S	To 16	3000002681	s.No.16		
20	Fast CPU SM-B50	R&S	To 16	3000002681	s.No.16		
21	FM Modulator SM-B5	R&S	836061/022	3000002681	s.No.16		
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681-0003	26.08.2008	36	26.08.2011
23	Attenuator SMP-B15	R&S	835136/014	3000002681	S.No.22		
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681	S.No.22		
25	Power Meter NRVD	R&S	835430/044	3000002681-0004	26.08.2008	24	26.08.2010
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681-0013	26.08.2008	24	26.08.2010
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681-0010	26.08.2008	24	26.08.2010
28	Rubidium Standard RUB	R&S		3000002681-0009	27.08.2008	24	27.08.2010
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681-0006	Verified with pa	th compensation	
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681-0011	n.a.		
31	19" Rack	R&S	11138363000004	3000002681	n.a.		
32	RF-cable set	R&S	N/A	3000002681	n.a.		
33	IEEE-cables	R&S	N/A	3000002681	n.a.		
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681	s.No.7		
35	RSP programmable attenuator	R&S	834500/010	3000002681-0007	26.08.2008	24	26.08.2010
36	Signalling Unit	R&S	838312/011	3000002681	n.a.		
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681			
39	Power Splitter 6005-3	Inmet Corp.	none	300002841	23.12.2006	24	23.12.2008
40	SMA Cables SPS-1151-985- SPS	Insulated Wire	different	different	n.a.		
41	CBT32 with EDR Signaling Unit	R&S					
42	Coupling unit	Narda	N/A		n.a.		
43	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
44	RF-cable set	R&S	N/A	different	n.a.		
45	IEEE-cables	R&S	N/A		n.a.		

Note: 3000002681-00xx inventoried as a system

2008-10-24 Page 37 of 45

Test report no.: 4-2600-01-02/07-A



Anechoic chamber F:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna	9163-295	-/-	-/-	30.04.2008	24	30.04.2010
3	Amplifier - 0518C-138	Veritech Micro- wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2009	24	31.01.2009
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-


2008-10-24 Page 38 of 45

Test report no.: 4-2600-01-02/07-A



7 Photographs

Test site:

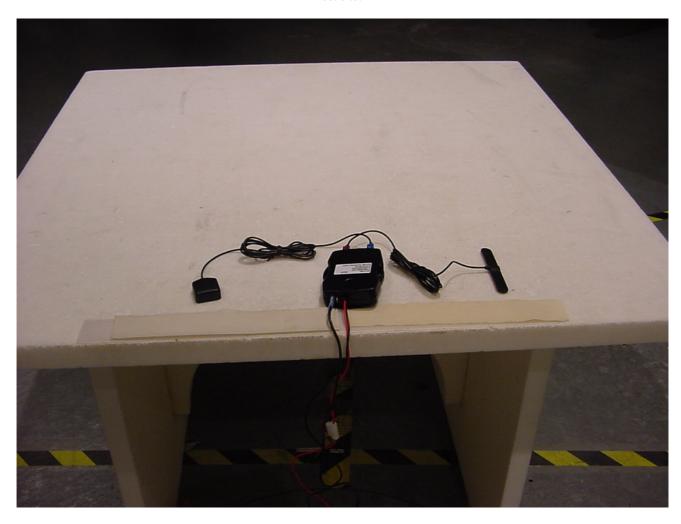

2008-10-24 Page 39 of 45

Test report no.: 4-2600-01-02/07-A



Test site:



2008-10-24 Page 40 of 45

Test report no.: 4-2600-01-02/07-A



External photos:



2008-10-24 Page 41 of 45

Test report no.: 4-2600-01-02/07-A



External photos:



2008-10-24 Page 42 of 45

Test report no.: 4-2600-01-02/07-A



Internal Photos:



2008-10-24 Page 43 of 45

Test report no.: 4-2600-01-02/07-A



Internal Photos:



2008-10-24 Page 44 of 45

Test report no.: 4-2600-01-02/07-A



internal photos:



2008-10-24 Page 45 of 45