


Appendix A. Test Result of AC Power Line Conducted Emission

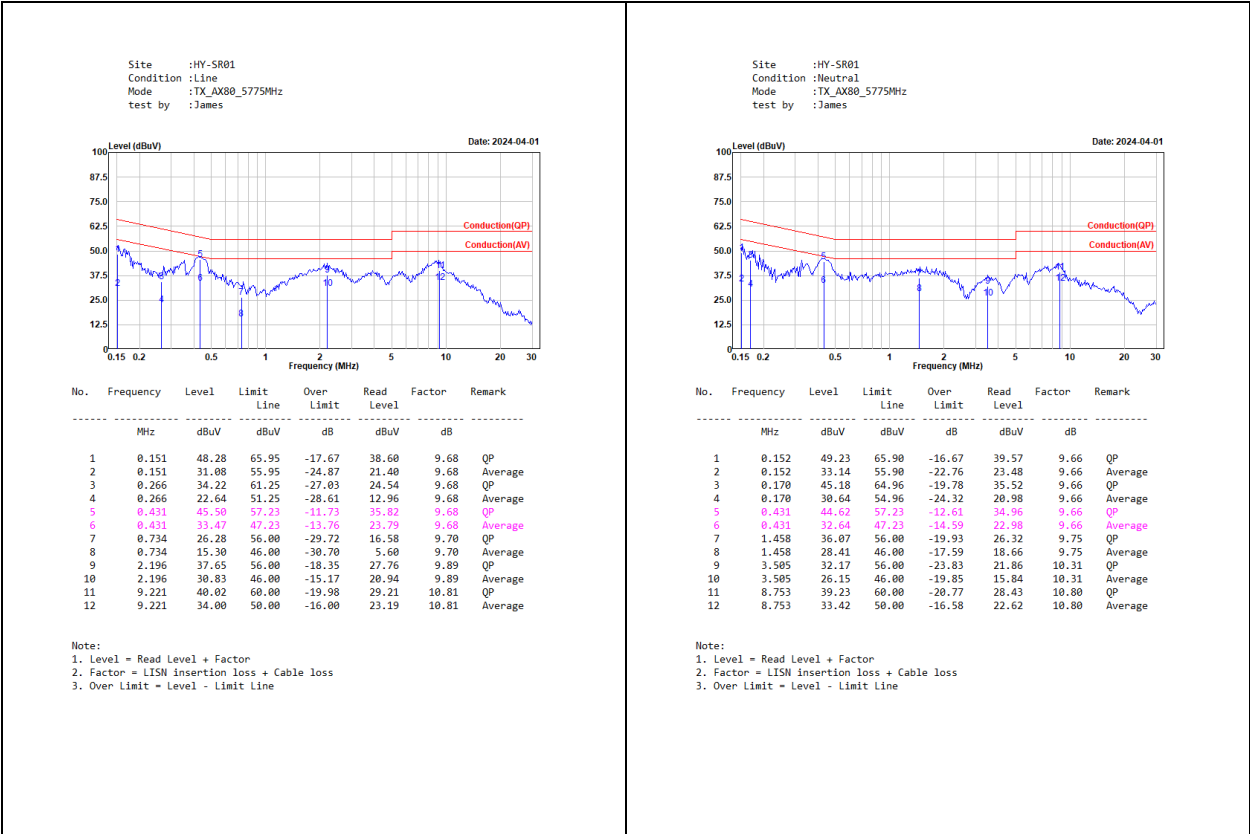


Appendix B. Test Result of Emission Bandwidth


Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11a	5180	17.70	17.34	-	24.13	25.53	-
	5220	17.98	18.06	-	27.29	27.05	-
	5240	19.86	19.46	-	36.80	36.04	-
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11a	5745	23.13	17.46	-	16.30	16.30	0.50
	5785	17.54	20.09	-	16.26	16.34	0.50
	5825	18.34	19.02	-	16.26	16.30	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (20MHz)	5180	19.42	19.46	-	29.25	37.60	-
	5220	19.34	19.50	-	28.13	24.69	-
	5240	19.94	19.86	-	39.12	38.20	-
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (20MHz)	5745	20.81	19.46	-	18.50	18.70	0.50
	5785	19.34	19.78	-	18.86	18.78	0.50
	5825	19.78	20.37	-	18.54	18.54	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (40MHz)	5190	37.88	37.72	-	51.30	50.03	-
	5230	37.80	37.72	-	51.70	63.93	-
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (40MHz)	5755	41.55	38.28	-	36.84	35.08	0.50
	5795	37.96	37.80	-	35.24	35.08	0.50

Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	26dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (80MHz)	5210	77.20	77.04	-	81.35	81.83	-
Modulation	Frequency (MHz)	99% Bandwidth (MHz)		Limit (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
		ChainA	ChainB		ChainA	ChainB	
802.11ax (80MHz)	5775	76.88	76.72	-	76.08	75.44	0.50

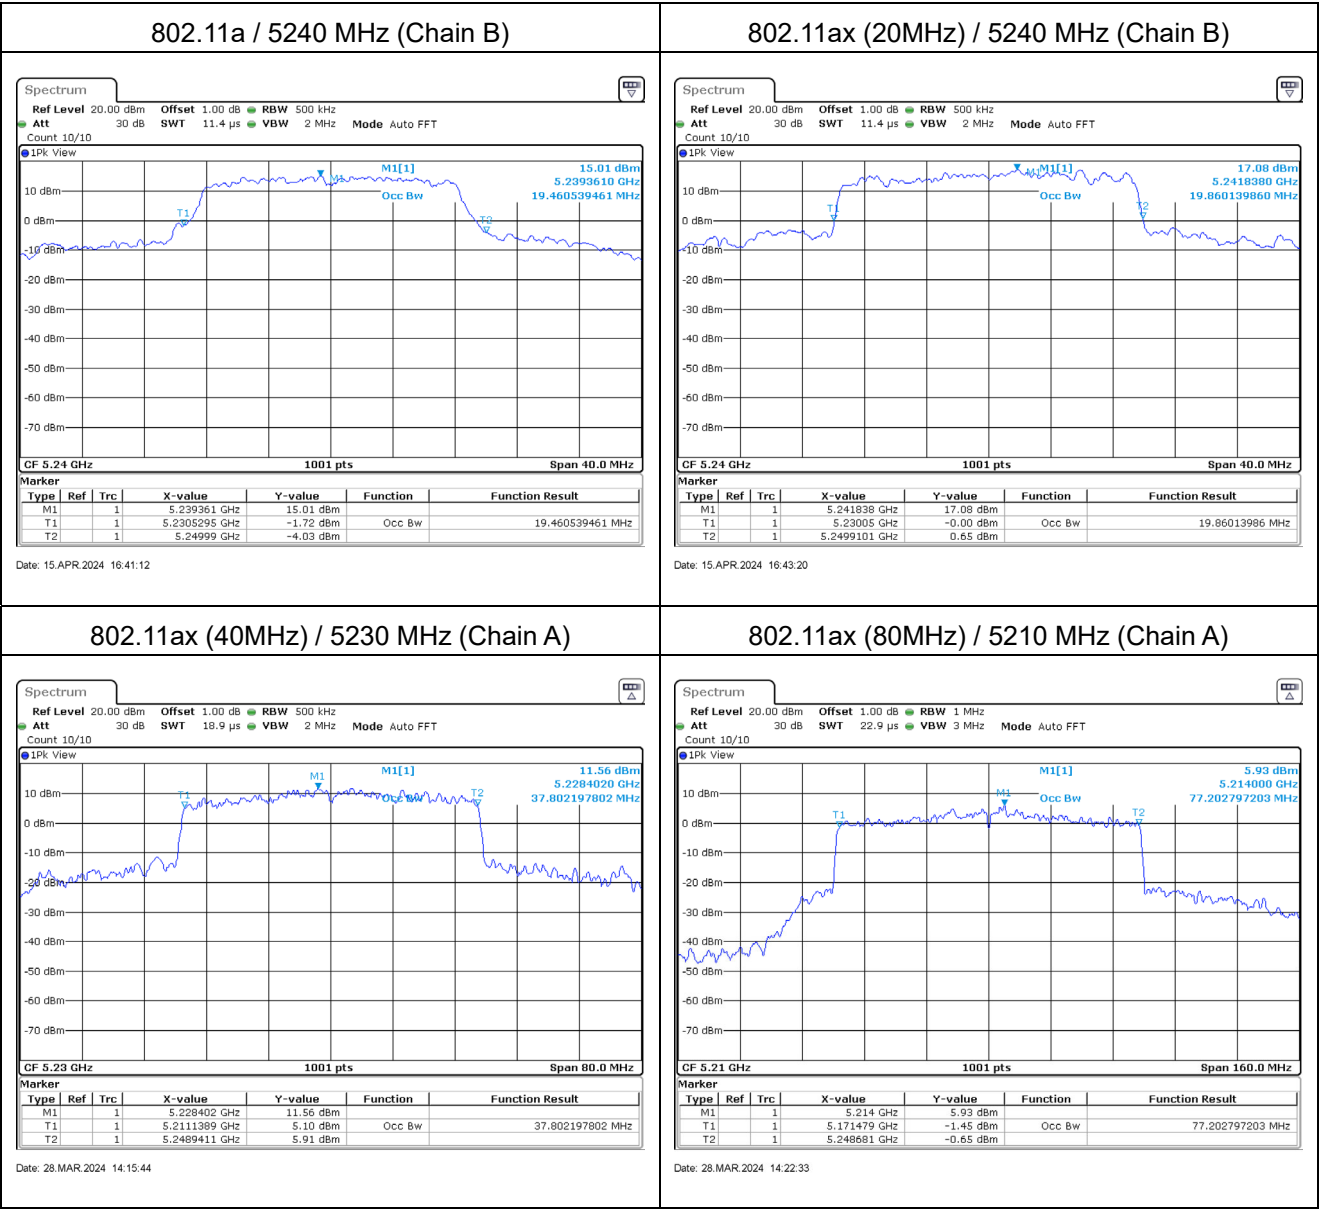

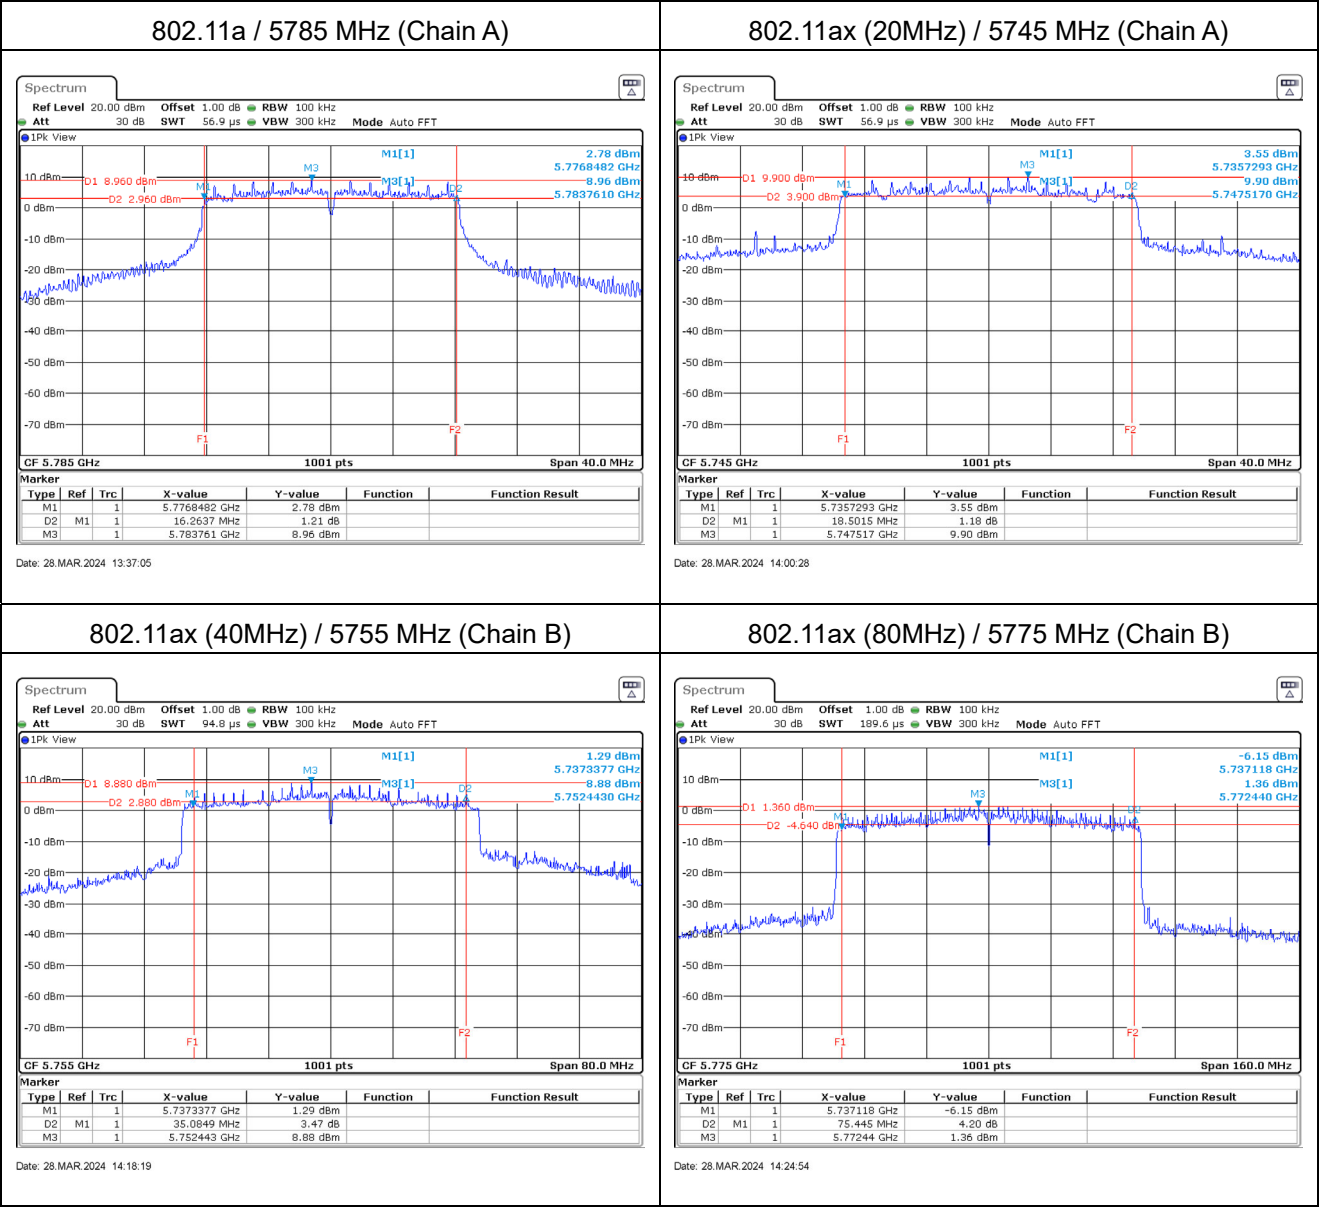

Appendix C. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11a	5180	--	19.87	19.74	--	22.82	30	--	Pass
	5220	--	21.44	21.36	--	24.41	30	--	Pass
	5240	--	22.41	22.43	--	25.43	30	--	Pass
	5745	--	20.44	20.38	--	23.42	30	--	Pass
	5785	--	20.81	20.71	--	23.77	30	--	Pass
	5825	--	21.55	22.61	--	25.12	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	19.02	18.89	--	21.97	30	--	Pass
	5220	--	21.06	21.11	--	24.10	30	--	Pass
	5240	--	22.94	22.96	--	25.96	30	--	Pass
	5745	--	20.61	20.54	--	23.59	30	--	Pass
	5785	--	20.94	20.93	--	23.95	30	--	Pass
	5825	--	21.76	22.83	--	25.34	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	--	18.44	18.11	--	21.29	30	--	Pass
	5230	--	20.26	20.12	--	23.20	30	--	Pass
	5755	--	22.91	22.65	--	25.79	30	--	Pass
	5795	--	20.96	20.78	--	23.88	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	13.96	13.74	--	16.86	30	--	Pass
	5775	--	18.57	18.41	--	21.50	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Beamforming

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (20 MHz)	5180	--	16.01	15.88	--	18.96	30	--	Pass
	5220	--	18.05	18.10	--	21.09	30	--	Pass
	5240	--	19.93	19.95	--	22.95	30	--	Pass
	5745	--	17.60	17.53	--	20.58	30	--	Pass
	5785	--	17.93	17.92	--	20.94	30	--	Pass
	5825	--	18.75	19.82	--	22.33	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (40 MHz)	5190	--	15.43	15.10	--	18.28	30	--	Pass
	5230	--	17.25	17.11	--	20.19	30	--	Pass
	5755	--	19.90	19.64	--	22.78	30	--	Pass
	5795	--	17.95	17.77	--	20.87	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.

Modulation	Frequency (MHz)	26 dB Bandwidth (MHz)	Chain A Power (dBm)	Chain B Power (dBm)	Duty factor (dB)	Output Power (dBm)	Output Power Limit		Result
							(dBm)	dBm+10log (BW)	
802.11ax (80 MHz)	5210	--	10.95	10.73	--	13.85	30	--	Pass
	5775	--	15.56	15.40	--	18.49	30	--	Pass

Note:

1. Output Power (dBm) = 10LOG (Chain A Power (mW)+Chain B Power (mW))+Duty factor.
2. 26dB Bandwidth is the bandwidth of chain A or chain B whichever is less bandwidth, output power limitation is more stringent.


Appendix D. Test Result of Maximum Power Spectral Density

Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11a	5180	A	8.22	0.20	11.15	16.49	Pass
		B	7.65				
	5220	A	10.01	0.20	12.78	16.49	Pass
		B	9.10				
	5240	A	10.54	0.20	13.87	16.49	Pass
		B	10.78				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11a	5745	A	6.19	0.20	9.04	29.49	Pass
		B	5.44				
	5785	A	6.37	0.20	9.33	29.49	Pass
		B	5.87				
	5825	A	6.21	0.20	10.46	29.49	Pass
		B	8.09				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

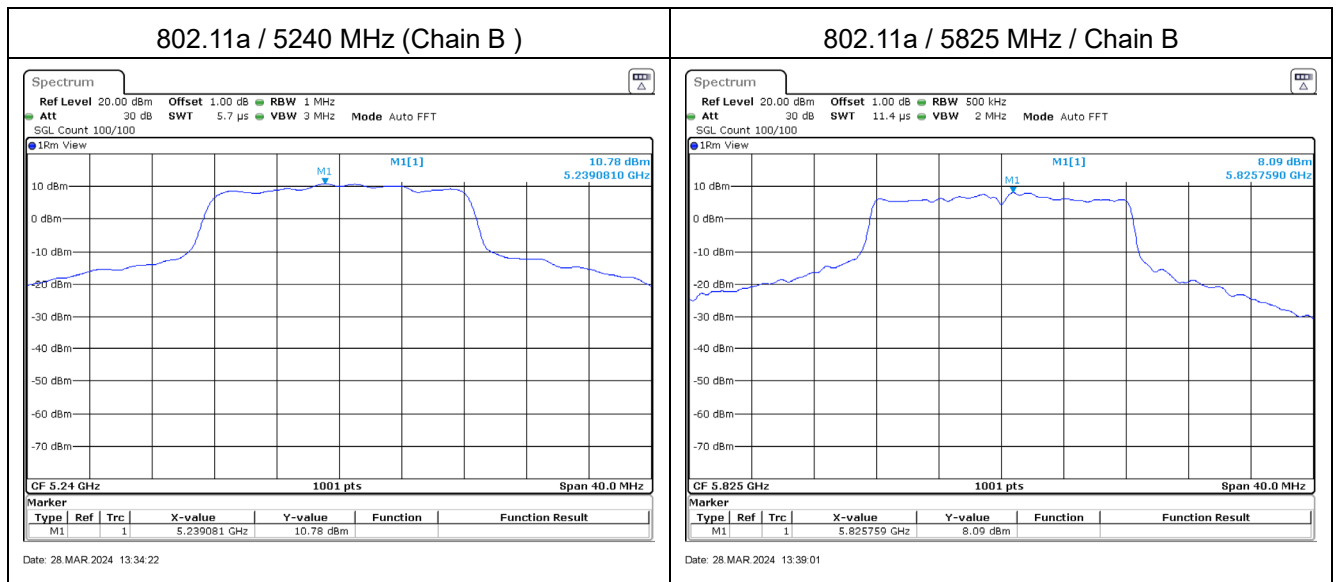


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5180	A	6.95	0.26	10.11	16.49	Pass
		B	6.72				
	5220	A	7.78	0.26	11.41	16.49	Pass
		B	8.46				
	5240	A	10.12	0.26	13.62	16.49	Pass
		B	10.56				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (20 MHz)	5745	A	6.11	0.26	9.27	29.49	Pass
		B	5.87				
	5785	A	5.61	0.26	8.93	29.49	Pass
		B	5.70				
	5825	A	6.24	0.26	10.08	29.49	Pass
		B	7.30				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

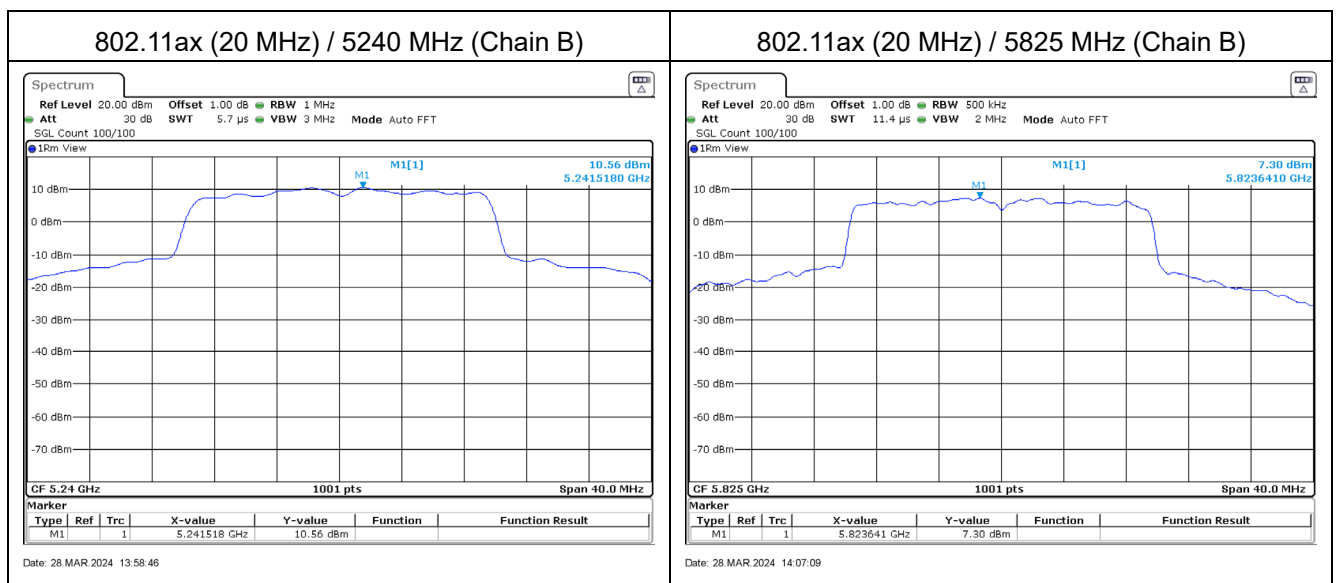


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5190	A	3.66	0.45	7.17	16.49	Pass
		B	3.76				
	5230	A	5.94	0.45	9.23	16.49	Pass
		B	5.58				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (40 MHz)	5755	A	5.69	0.45	8.77	29.49	Pass
		B	4.88				
	5795	A	3.30	0.45	6.90	29.49	Pass
		B	3.56				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

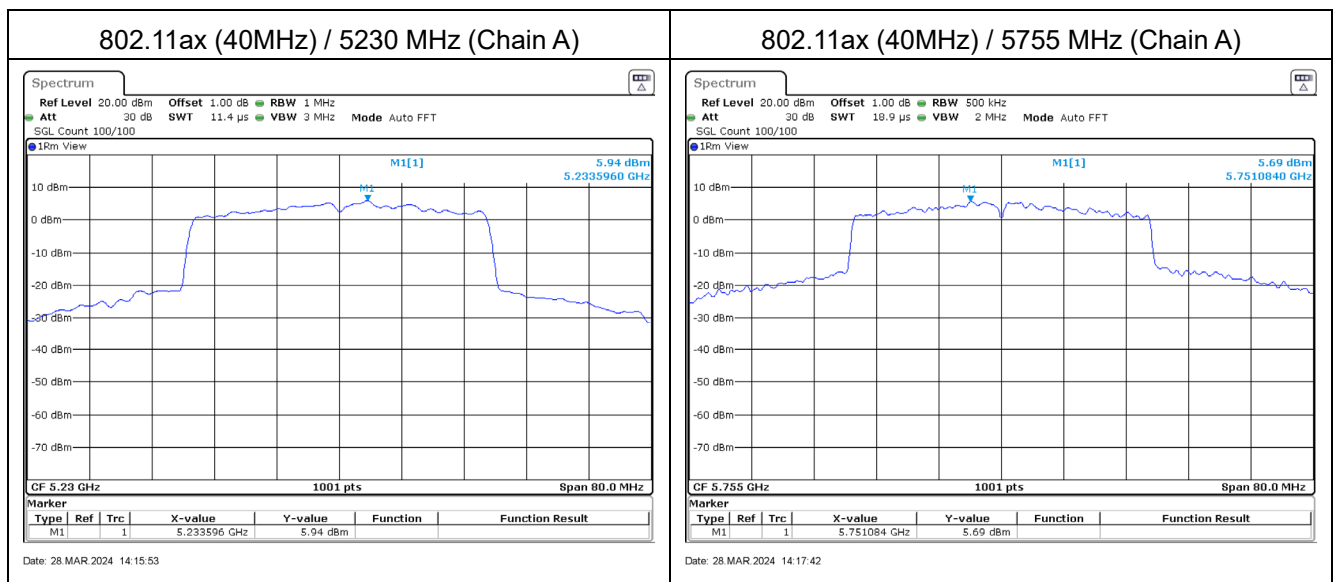


Modulation	Frequency (MHz)	Chain	PSD/MHz (dBm)	Duty factor (dB)	Total PSD/MHz (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5210	A	-3.55	0.77	0.20	16.49	Pass
		B	-3.62				

Note: Total PSD/MHz (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor


Modulation	Frequency (MHz)	Chain	PSD (dBm)	Duty factor (dB)	Total PSD (dBm)	Required Limit (dBm)	Result
802.11ax (80 MHz)	5775	A	-2.09	0.77	1.80	29.49	Pass
		B	-1.88				

Note: Total PSD (dBm) = 10*log (Chain A (mW)+Chain B (mW)) + Duty factor

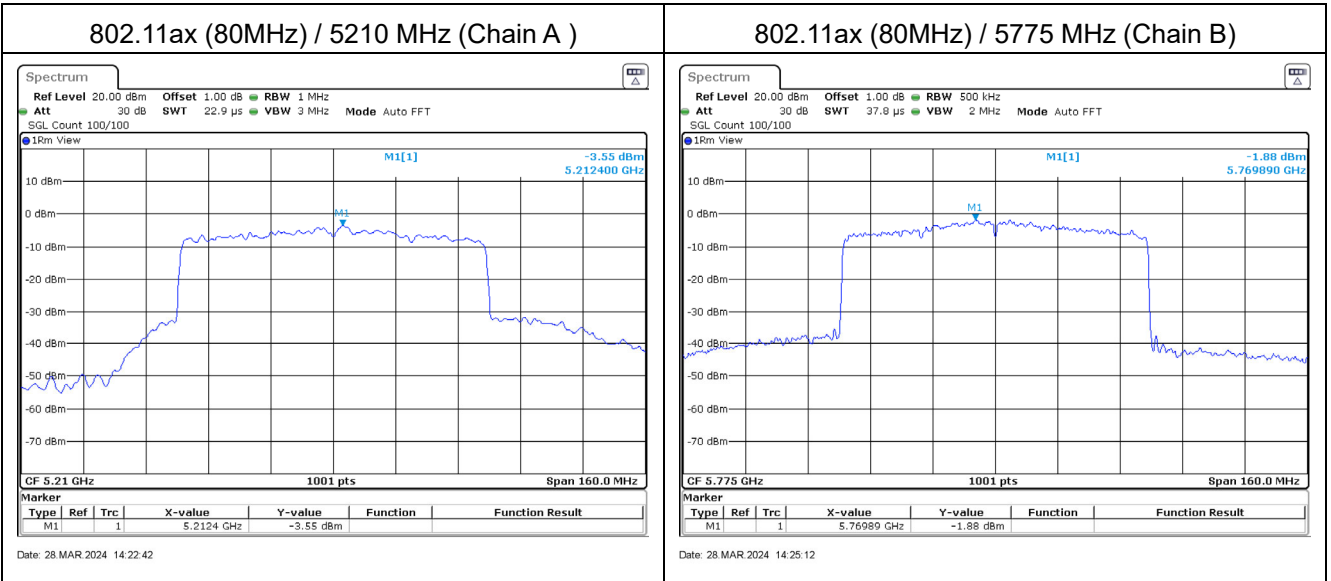

Appendix E. Test Result of Transmitter Radiated Spurious Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5240MHz
TEST BY :Caster

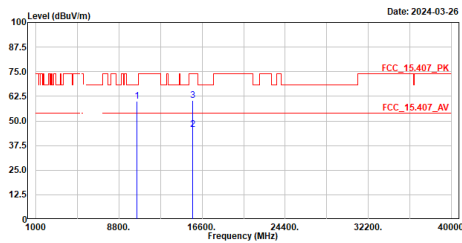


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	60.14	68.22	-8.08	69.21	-9.07	Peak
2	15720.000	45.57	54.00	-8.43	46.77	-1.20	Average
3	15720.000	60.52	74.00	-13.48	61.72	-1.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5240MHz
TEST BY :Caster

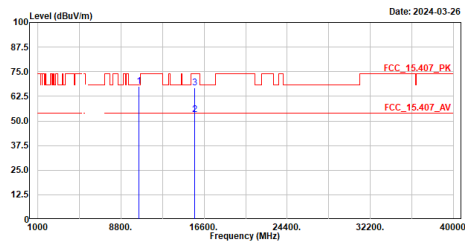


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	67.60	68.22	-0.62	76.67	-9.07	Peak
2	15720.000	53.13	54.00	-0.87	54.33	-1.20	Average
3	15720.000	66.63	74.00	-7.37	67.83	-1.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
TEST BY :Caster

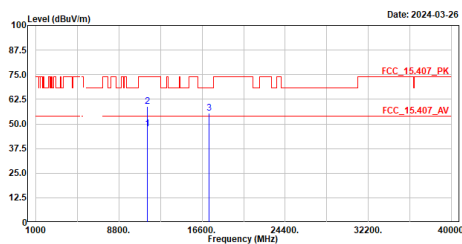


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	47.51	54.00	-6.49	54.49	-6.98	Average
2	11490.000	58.76	74.00	-15.24	65.74	-6.98	Peak
3	17235.000	55.56	68.22	-12.66	55.99	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
TEST BY :Caster

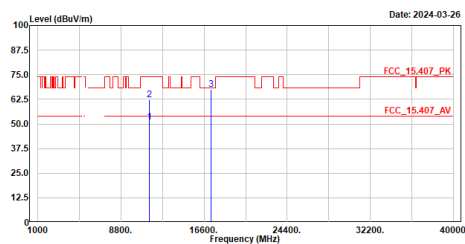


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	51.03	54.00	-2.97	58.01	-6.98	Average
2	11490.000	62.09	74.00	-11.91	69.07	-6.98	Peak
3	17235.000	67.69	68.22	-0.53	68.12	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5785MHz
TEST BY :Caster

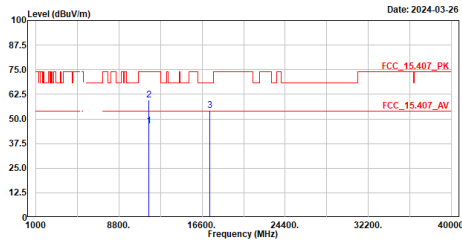

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	46.59	54.00	-7.41	53.54	-6.95	Average
2	11570.000	59.64	74.00	-14.36	66.59	-6.95	Peak
3	17355.000	54.46	68.22	-13.76	54.79	-0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5785MHz
TEST BY :Caster

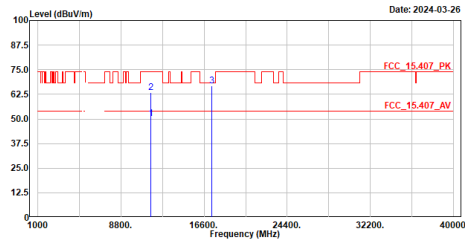

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	50.15	54.00	-3.85	57.10	-6.95	Average
2	11570.000	63.24	74.00	-10.76	70.19	-6.95	Peak
3	17355.000	66.93	68.22	-1.29	67.26	-0.33	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5825MHz
TEST BY :Caster

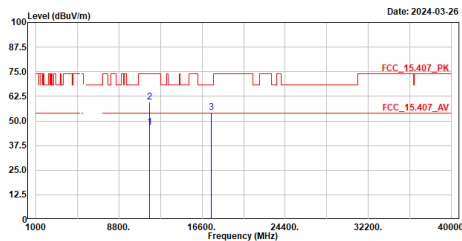

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.89	54.00	-7.11	53.97	-7.08	Average
2	11650.000	59.73	74.00	-14.27	66.81	-7.08	Peak
3	17475.000	54.48	68.22	-13.74	54.44	0.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5825MHz
TEST BY :Caster

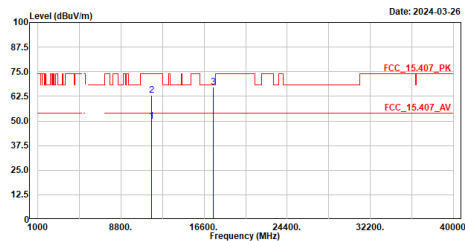

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	49.67	54.00	-4.33	56.75	-7.08	Average
2	11650.000	63.18	74.00	-10.82	70.26	-7.08	Peak
3	17475.000	67.05	68.22	-1.17	67.01	0.04	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5180MHz
TEST BY :Caster

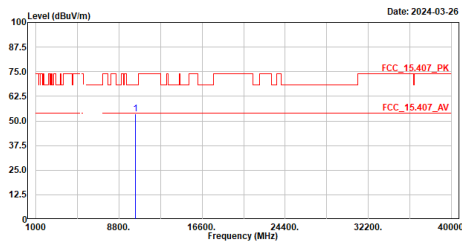


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	53.72	68.22	-14.50	62.74	-9.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5180MHz
TEST BY :Caster

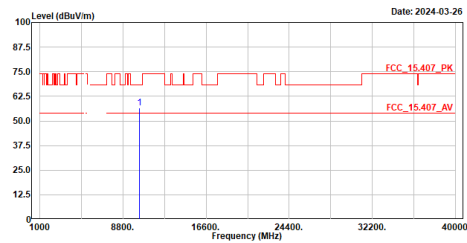


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10360.000	56.72	68.22	-11.50	65.74	-9.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5220MHz
TEST BY :Caster

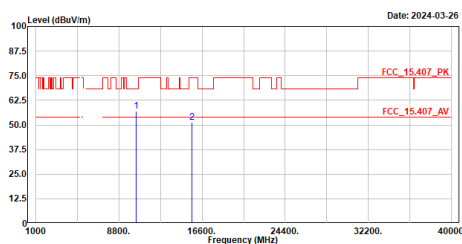


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	56.97	68.22	-11.25	66.12	-9.15	Peak
2	15660.000	51.20	74.00	-22.80	52.67	-1.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5220MHz
TEST BY :Caster

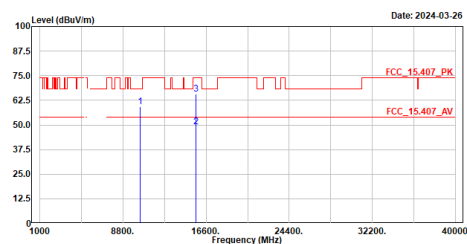


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10440.000	59.27	68.22	-8.95	68.42	-9.15	Peak
2	15660.000	49.10	54.00	-4.90	50.57	-1.47	Average
3	15660.000	65.55	74.00	-8.45	67.02	-1.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5240MHz
TEST BY :Caster

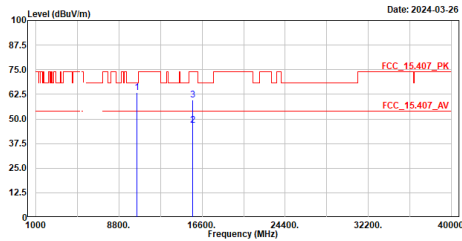


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	63.54	68.22	-4.68	72.61	-9.07	Peak
2	15720.000	46.93	54.00	-7.07	48.13	-1.20	Average
3	15720.000	59.64	74.00	-14.36	60.84	-1.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5240MHz
TEST BY :Caster

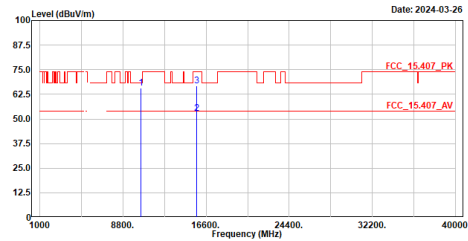


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	10480.000	65.55	68.22	-2.67	74.62	-9.07	Peak
2	15720.000	52.92	54.00	-1.08	54.12	-1.20	Average
3	15720.000	66.92	74.00	-7.08	68.12	-1.20	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5745MHz
TEST BY :Caster

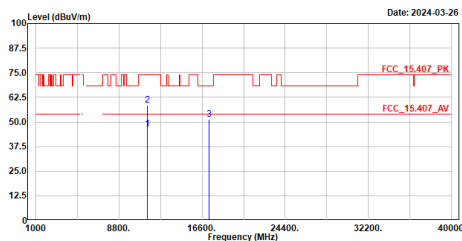


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	46.50	54.00	-7.50	53.48	-6.98	Average
2	11490.000	58.57	74.00	-15.43	65.55	-6.98	Peak
3	17235.000	51.35	68.22	-16.87	51.78	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5745MHz
TEST BY :Caster

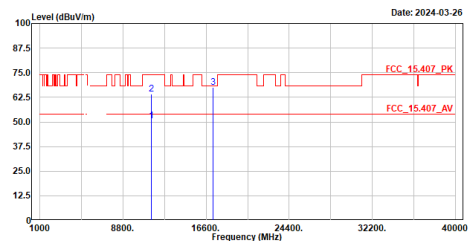


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	11490.000	50.69	54.00	-3.31	57.67	-6.98	Average
2	11490.000	64.04	74.00	-9.96	71.02	-6.98	Peak
3	17235.000	67.52	68.22	-0.70	67.95	-0.43	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5785MHz
TEST BY :Caster

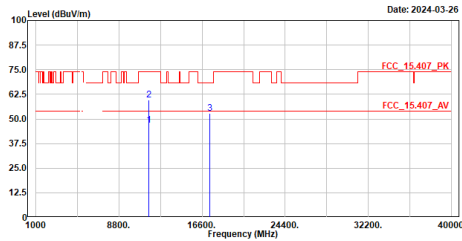


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	46.93	54.00	-7.07	53.88	-6.95	Average
2	11570.000	59.46	74.00	-14.54	66.41	-6.95	Peak
3	17355.000	52.71	68.22	-15.51	53.04	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5785MHz
TEST BY :Caster

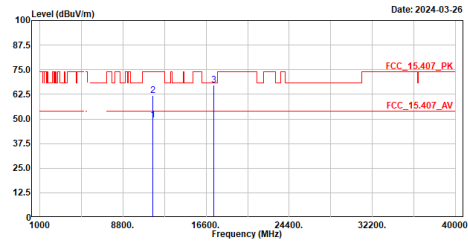


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11570.000	49.40	54.00	-4.60	56.35	-6.95	Average
2	11570.000	61.83	74.00	-12.17	68.78	-6.95	Peak
3	17355.000	67.29	68.22	-0.93	67.62	-0.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax20_5825MHz
TEST BY :Caster

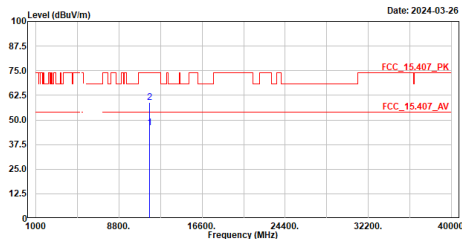


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	46.18	54.00	-7.82	53.26	-7.08	Average
2	11650.000	58.74	74.00	-15.26	65.82	-7.08	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax20_5825MHz
TEST BY :Caster

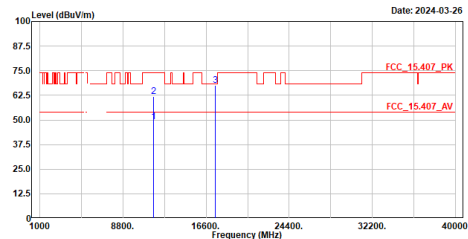


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11650.000	49.01	54.00	-4.99	56.09	-7.08	Average
2	11650.000	62.01	74.00	-11.99	69.09	-7.08	Peak
3	17475.000	67.52	68.22	-0.70	67.48	0.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_au40_5190MHz
TEST BY :Caster

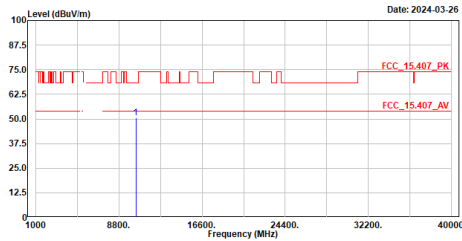


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	50.74	68.22	-17.48	59.80	-9.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_au40_5190MHz
TEST BY :Caster

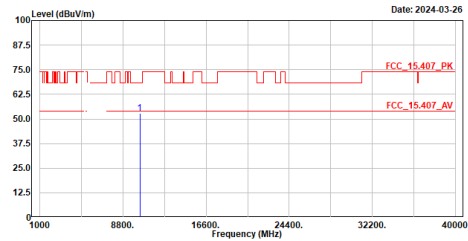


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10380.000	52.88	68.22	-15.34	61.94	-9.06	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_au40_5230MHz
TEST BY :Caster

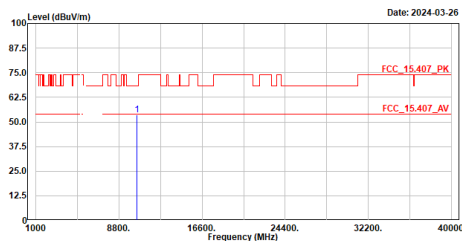


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	53.51	68.22	-14.71	62.64	-9.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_au40_5230MHz
TEST BY :Caster

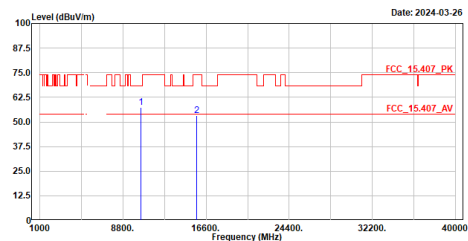


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10460.000	57.26	68.22	-10.96	66.39	-9.13	Peak
2	15690.000	53.21	74.00	-20.79	54.58	-1.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_av40_5755MHz
TEST BY :Caster

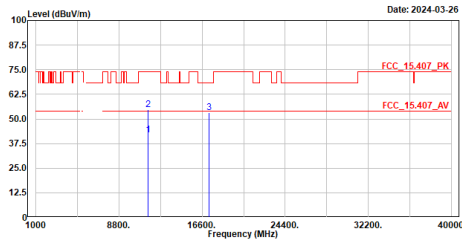


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	41.71	54.00	-12.29	48.70	-6.99	Average
2	11510.000	54.56	74.00	-19.44	61.55	-6.99	Peak
3	17265.000	53.05	68.22	-15.17	53.41	-0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5755MHz
TEST BY :Caster

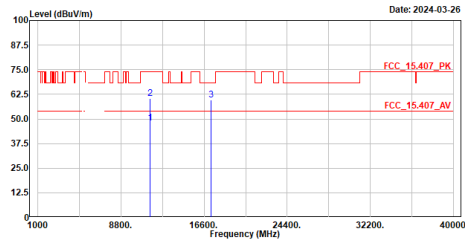


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11510.000	47.88	54.00	-6.12	54.87	-6.99	Average
2	11510.000	60.56	74.00	-13.44	67.55	-6.99	Peak
3	17265.000	59.72	68.22	-8.50	60.08	-0.36	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_av40_5795MHz
TEST BY :Caster

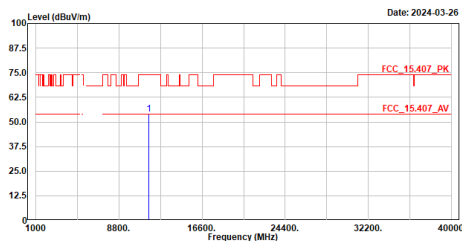


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	53.78	74.00	-20.22	60.74	-6.96	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5795MHz
TEST BY :Caster

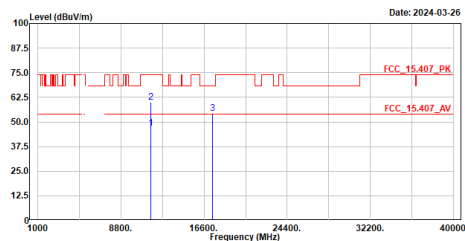


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11590.000	46.70	54.00	-7.30	53.66	-6.96	Average
2	11590.000	59.96	74.00	-14.04	66.92	-6.96	Peak
3	17385.000	54.35	68.22	-13.87	54.61	-0.26	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_au80_5210MHz
TEST BY :Caster

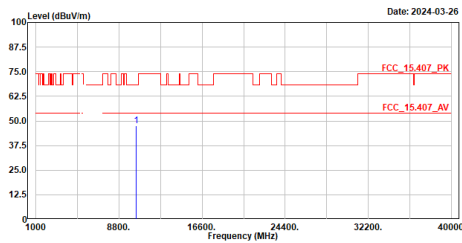


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	47.44	68.22	-20.78	56.56	-9.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_au80_5210MHz
TEST BY :Caster

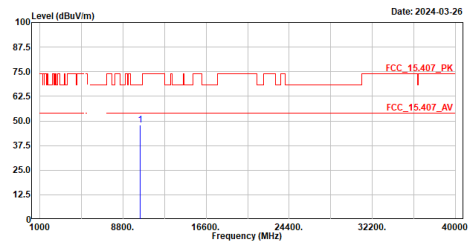


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	10420.000	47.78	68.22	-20.44	56.90	-9.12	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_au80_5775MHz
TEST BY :Caster

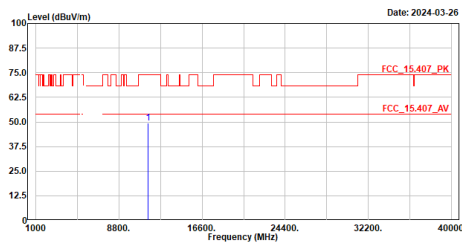


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	49.42	74.00	-24.58	56.36	-6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_au80_5775MHz
TEST BY :Caster

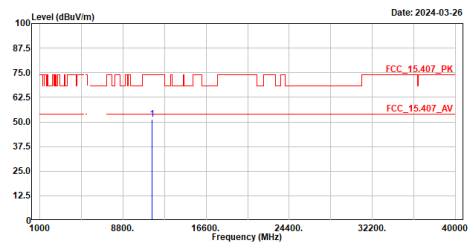


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	11550.000	51.44	74.00	-22.56	58.38	-6.94	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_80_5775MHz
TEST BY :Caster

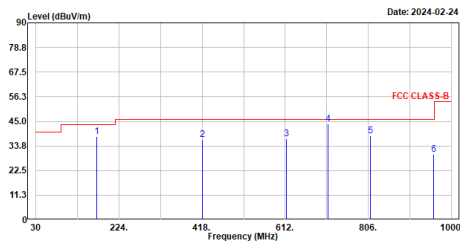

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	171.620	37.88	43.50	-5.62	62.32	-24.44	QP
2	418.000	36.79	46.00	-9.21	56.69	-19.90	QP
3	614.910	37.14	46.00	-8.86	52.49	-15.35	QP
4	712.880	43.85	46.00	-2.15	57.62	-13.77	QP
5	811.820	38.51	46.00	-7.49	58.95	-12.44	QP
6	959.260	38.05	46.00	-15.95	48.83	-10.78	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_80_5775MHz
TEST BY :Caster

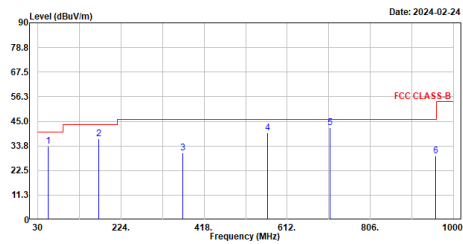

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	53.280	33.68	40.00	-6.32	57.10	-23.42	QP
2	171.620	37.01	43.50	-6.49	61.45	-24.44	QP
3	368.530	30.60	46.00	-15.40	51.86	-21.26	QP
4	565.440	39.65	46.00	-6.35	56.09	-16.44	QP
5	712.880	42.10	46.00	-3.90	55.87	-13.77	QP
6	959.260	29.37	46.00	-16.63	48.15	-10.78	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
TEST BY :Peter

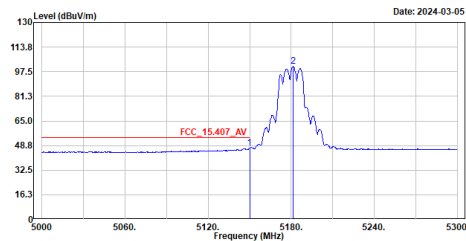

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	47.30	54.00	-6.70	33.00	14.30	Average
2	5181.500	101.08	-----	-----	86.71	14.37	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very low than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
TEST BY :Peter

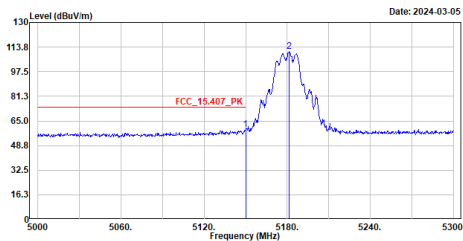

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	5150.000	59.51	74.00	-14.49	45.21	14.30	Peak
2	5181.500	110.99	-----	-----	96.62	14.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very low than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5180MHz
TEST BY :Peter

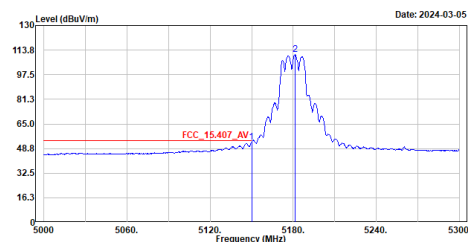


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	53.16	54.00	-0.84	38.86	14.30	Average
2	5181.500	110.72	-----	-----	96.35	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5180MHz
TEST BY :Peter

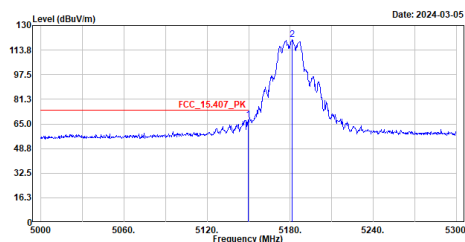


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	67.88	74.00	-6.12	53.58	14.30	Peak
2	5181.500	120.54	-----	-----	106.17	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5220MHz
TEST BY :Peter

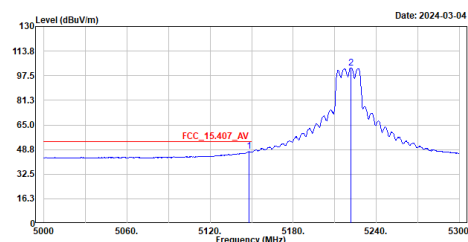


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.900	47.56	54.00	-6.44	33.25	14.31	Average
2	5221.700	102.63	-----	-----	88.18	14.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5220MHz
TEST BY :Peter

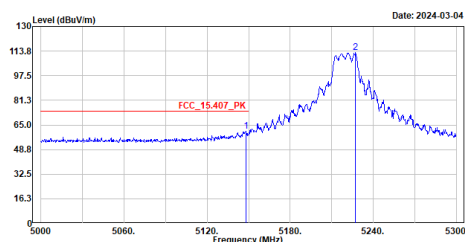


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.200	60.89	74.00	-13.11	46.58	14.31	Peak
2	5227.100	113.03	-----	-----	98.57	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5220MHz
TEST BY :Peter

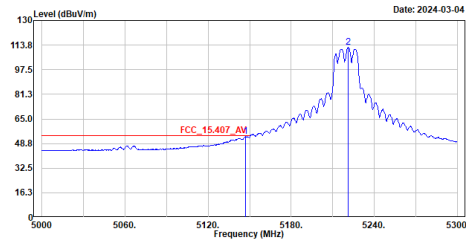


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.300	53.33	54.00	-0.67	39.02	14.31	Average
2	5221.100	112.24	-----	-----	97.79	14.45	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5220MHz
TEST BY :Peter

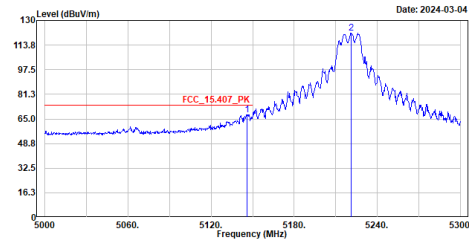


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.100	67.76	74.00	-6.24	53.44	14.32	Peak
2	5221.400	121.76	-----	-----	107.31	14.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
TEST BY :Peter

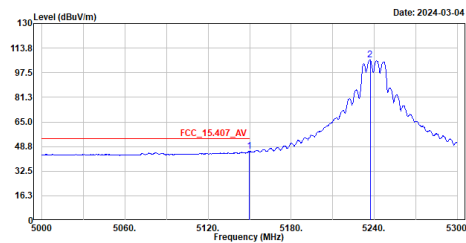


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	45.47	54.00	-8.53	31.17	14.30	Average
2	5237.000	105.75	-----	-----	91.28	14.47	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
TEST BY :Peter

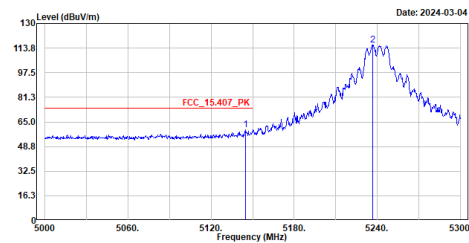


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5144.900	59.89	74.00	-14.11	45.57	14.32	Peak
2	5236.700	115.96	-----	-----	101.50	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5240MHz
TEST BY :Peter

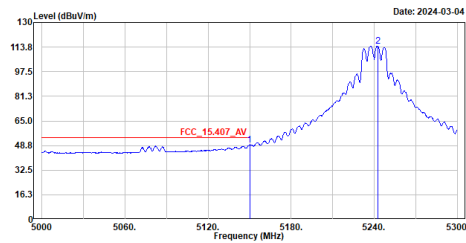


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	49.28	54.00	-4.72	34.98	14.30	Average
2	5242.400	114.45	-----	-----	99.97	14.48	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_a_5240MHz
TEST BY :Peter

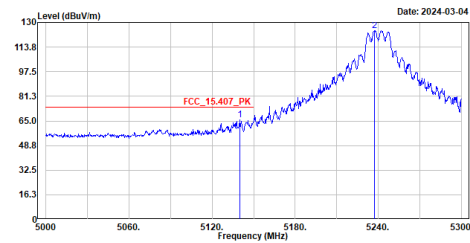


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5140.100	65.55	74.00	-8.45	51.22	14.33	Peak
2	5237.300	124.82	-----	-----	110.35	14.47	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_a_5745MHz
TEST BY :Caster

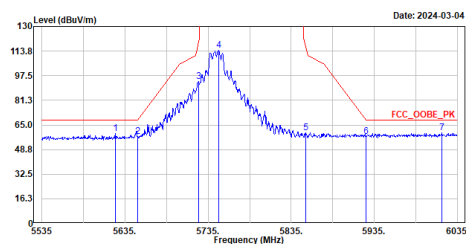


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5623.500	59.44	68.22	-8.78	43.81	15.63	Peak
2	5650.000	57.40	68.23	-10.83	41.64	15.76	Peak
3	5723.500	93.89	118.78	-24.89	77.78	16.11	Peak
4	5747.500	114.44	-----	-----	98.21	16.23	Peak
5	5852.500	59.88	116.50	-56.62	43.42	16.46	Peak
6	5925.000	57.17	68.23	-11.06	40.59	16.58	Peak
7	6016.000	59.90	68.22	-8.32	43.32	16.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_a_5745MHz
TEST BY :Caster

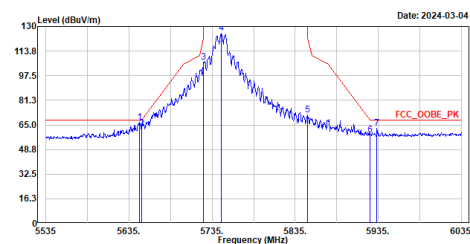

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5648.000	66.88	68.22	-1.34	51.13	15.75	Peak
2	5650.000	62.84	68.23	-5.39	47.08	15.76	Peak
3	5725.000	106.54	122.20	-15.66	90.42	16.12	Peak
4	5746.500	125.49	-----	-----	109.26	16.23	Peak
5	5850.000	71.61	122.20	-50.59	55.16	16.45	Peak
6	5925.000	58.49	68.23	-9.74	41.91	16.58	Peak
7	5933.500	62.81	68.22	-5.41	46.24	16.57	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

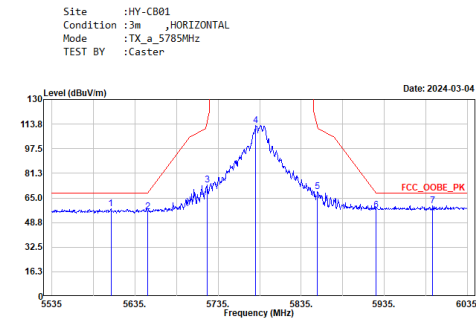

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5606.000	57.94	68.22	-10.28	42.39	15.55	Peak
2	5650.000	55.78	68.23	-12.45	40.02	15.76	Peak
3	5721.500	73.77	114.22	-40.45	57.66	16.11	Peak
4	5780.500	112.87	-----	-----	96.55	16.32	Peak
5	5854.500	69.38	111.94	-42.56	52.92	16.46	Peak
6	5925.000	57.10	68.23	-11.13	40.52	16.58	Peak
7	5993.500	59.80	68.22	-8.42	43.31	16.49	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

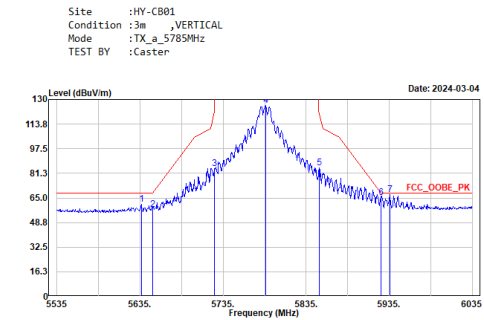

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5636.500	60.59	68.22	-7.63	44.89	15.70	Peak
2	5650.000	57.31	68.23	-10.92	41.55	15.76	Peak
3	5725.000	84.54	122.20	-37.66	68.42	16.12	Peak
4	5786.000	125.97	-----	-----	109.65	16.32	Peak
5	5851.000	84.85	119.92	-35.07	68.40	16.45	Peak
6	5925.000	65.00	68.23	-3.23	48.42	16.58	Peak
7	5995.500	66.97	68.22	-1.25	50.40	16.57	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

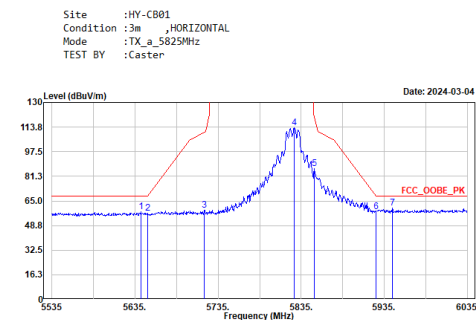

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5642.000	57.66	68.22	-10.56	41.93	15.73	Peak
2	5650.000	56.68	68.23	-11.55	40.92	15.76	Peak
3	5718.500	58.90	110.38	-51.48	42.81	16.09	Peak
4	5826.500	113.20	-----	-----	96.81	16.39	Peak
5	5851.000	86.44	119.92	-33.48	69.99	16.45	Peak
6	5925.000	58.02	68.23	-10.21	41.44	16.58	Peak
7	5945.000	60.17	68.22	-8.05	43.61	16.56	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

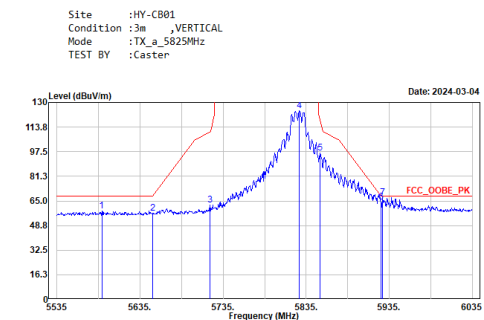


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5589.000	58.38	68.22	-9.84	42.92	15.46	Peak
2	5650.000	56.85	68.23	-11.38	41.09	15.76	Peak
3	5719.000	62.19	110.52	-48.33	46.09	16.10	Peak
4	5827.000	124.48	-----	-----	108.09	16.39	Peak
5	5852.000	96.64	117.64	-21.00	80.18	16.46	Peak
6	5925.000	64.14	68.23	-4.09	47.56	16.58	Peak
7	5926.500	67.41	68.22	-0.81	50.83	16.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
TEST BY :Peter

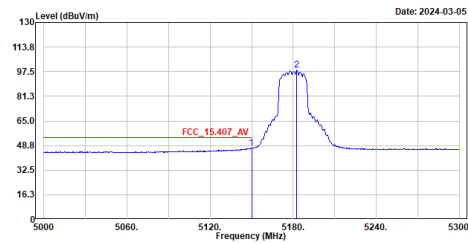


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	46.93	54.00	-7.07	32.63	14.30	Average
2	5182.700	98.38	-----	-----	84.01	14.37	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5180MHz
TEST BY :Peter

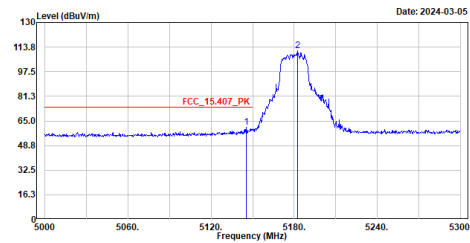


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5145.200	60.64	74.00	-13.36	46.32	14.32	Peak
2	5182.700	111.47	-----	-----	97.10	14.37	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
TEST BY :Peter

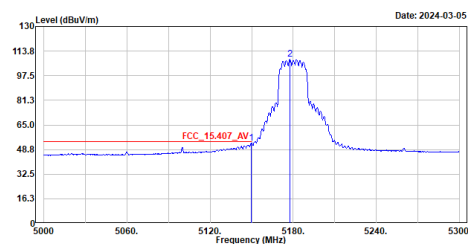


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	52.92	54.00	-1.08	38.62	14.30	Average
2	5177.600	108.21	-----	-----	93.86	14.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5180MHz
TEST BY :Peter

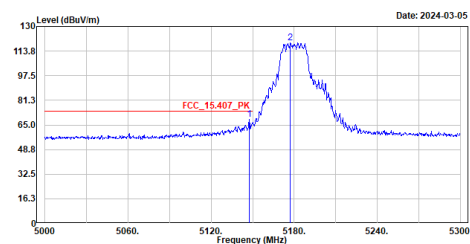


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.600	68.86	74.00	-5.14	54.55	14.31	Peak
2	5177.300	119.02	-----	-----	104.67	14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5220MHz
TEST BY :Peter

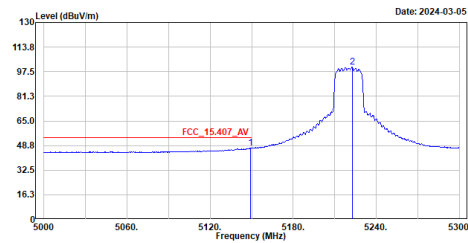


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	47.20	54.00	-6.80	32.90	14.30	Average
2	5222.600	100.46	-----	-----	86.02	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5220MHz
TEST BY :Peter

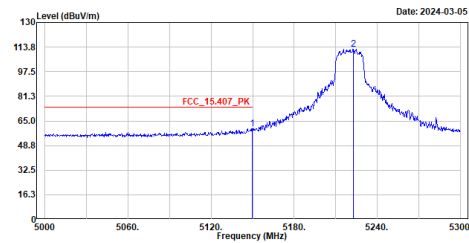


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	59.98	74.00	-14.02	45.68	14.30	Peak
2	5222.900	112.54	-----	-----	98.10	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5220MHz
TEST BY :Peter

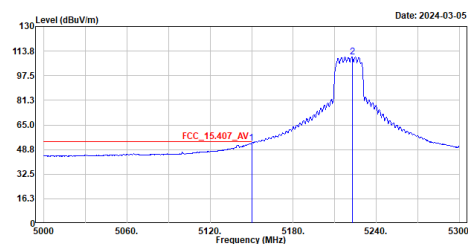


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	53.13	54.00	-0.87	38.83	14.30	Average
2	5222.600	110.09	-----	-----	95.65	14.44	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5220MHz
TEST BY :Peter

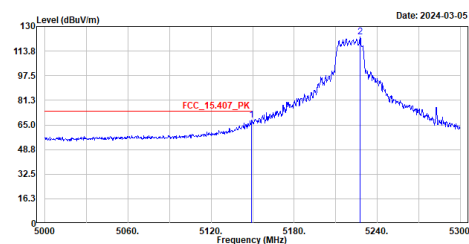


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	68.22	74.00	-5.78	53.92	14.30	Peak
2	5227.400	122.94	-----	-----	108.48	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5240MHz
TEST BY :Peter

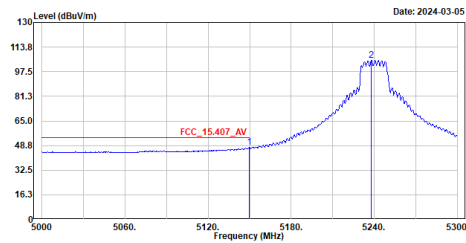


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	47.56	54.00	-6.44	33.26	14.30	Average
2	5237.900	105.07	-----	-----	90.61	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax20_5240MHz
TEST BY :Peter

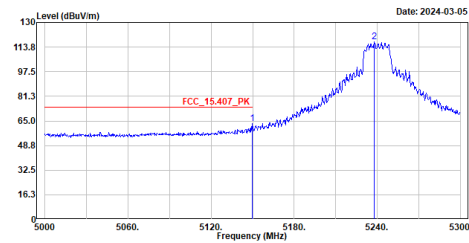


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	63.20	54.00	-9.80	48.90	14.30	Peak
2	5237.600	117.28	-----	-----	102.82	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5240MHz
TEST BY :Peter

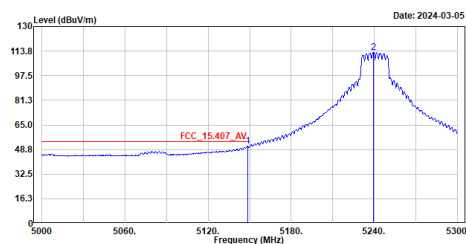


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.500	51.19	54.00	-2.81	36.88	14.31	Average
2	5239.400	112.93	-----	-----	98.47	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ax20_5240MHz
TEST BY :Peter

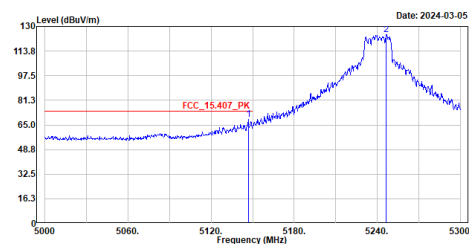

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.000	68.47	74.00	-5.53	54.16	14.31	Peak
2	5246.600	124.50	-----	-----	110.03	14.47	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

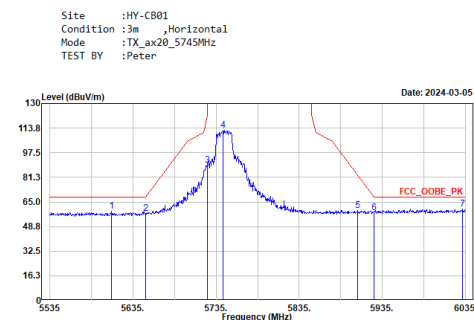

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5609.500	59.11	68.22	-9.11	43.54	15.57	Peak
2	5650.000	57.39	68.23	-10.84	41.63	15.76	Peak
3	5725.000	89.46	122.20	-32.74	73.34	16.12	Peak
4	5743.500	112.28	-----	-----	96.07	16.21	Peak
5	5905.500	59.59	82.65	-23.06	43.02	16.57	Peak
6	5925.000	58.11	68.23	-10.12	41.53	16.58	Peak
7	6032.000	68.58	68.22	-7.64	43.91	16.67	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

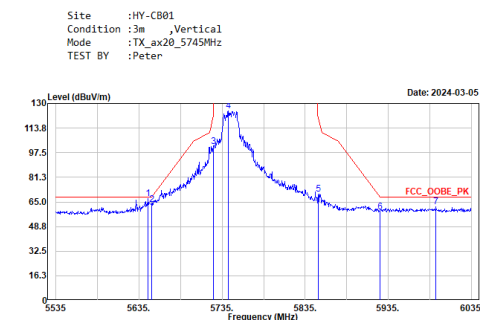

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.000	67.09	68.22	-1.13	51.35	15.74	Peak
2	5650.000	63.39	68.23	-4.84	47.63	15.76	Peak
3	5724.500	101.74	121.06	-19.32	85.62	16.12	Peak
4	5742.500	125.00	-----	-----	108.79	16.21	Peak
5	5851.000	70.20	119.92	-49.72	53.75	16.45	Peak
6	5925.000	58.58	68.23	-9.65	42.00	16.58	Peak
7	5992.500	61.76	68.22	-6.46	45.26	16.50	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

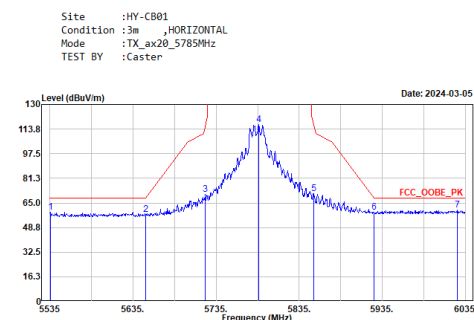

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5535.500	58.84	68.22	-9.38	43.37	15.47	Peak
2	5650.000	57.29	68.23	-10.94	41.53	15.76	Peak
3	5722.000	70.43	115.36	-44.93	54.32	16.11	Peak
4	5786.000	116.68	-----	-----	100.36	16.32	Peak
5	5852.500	71.10	116.50	-45.40	54.64	16.46	Peak
6	5925.000	58.72	68.23	-9.51	42.14	16.58	Peak
7	6025.500	68.12	68.22	-8.10	43.50	16.62	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

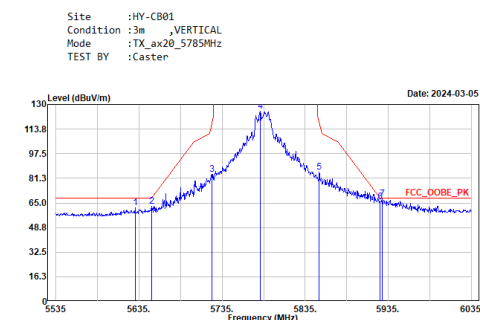

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5630.500	61.66	68.22	-6.56	45.99	15.67	Peak
2	5650.000	62.82	68.23	-5.41	47.06	15.76	Peak
3	5722.500	83.94	116.50	-32.56	67.83	16.11	Peak
4	5781.000	125.37	-----	-----	109.05	16.32	Peak
5	5852.000	85.12	117.64	-32.52	68.66	16.46	Peak
6	5925.000	65.62	68.23	-2.61	49.84	16.58	Peak
7	5927.500	67.47	68.22	-0.75	50.89	16.58	Peak


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

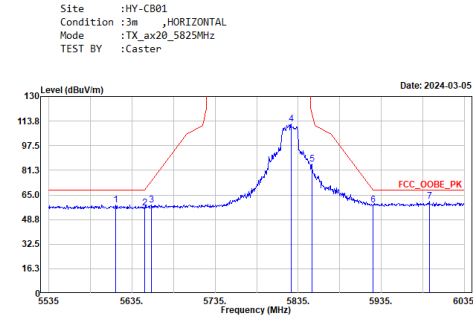


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5615.000	58.28	68.22	-9.94	42.68	15.60	Peak
2	5650.000	56.61	68.23	-11.62	40.85	15.76	Peak
3	5658.000	58.62	74.14	-15.52	42.82	15.80	Peak
4	5826.500	111.65	-----	-----	95.26	16.39	Peak
5	5851.500	85.41	118.78	-33.37	68.95	16.46	Peak
6	5925.000	58.47	68.23	-9.76	41.89	16.58	Peak
7	5993.000	68.70	68.22	-7.52	44.21	16.49	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

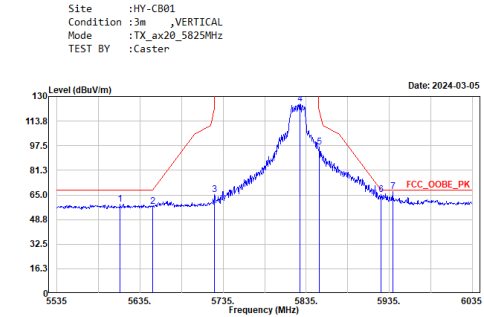


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5611.000	58.96	68.22	-9.26	43.39	15.57	Peak
2	5650.000	57.31	68.23	-10.92	41.55	15.76	Peak
3	5725.000	65.11	122.20	-57.09	48.99	16.12	Peak
4	5827.500	125.31	-----	-----	108.92	16.39	Peak
5	5851.000	96.58	119.92	-23.34	80.13	16.45	Peak
6	5925.000	65.37	68.23	-2.86	48.79	16.58	Peak
7	5993.000	67.09	68.22	-1.13	50.52	16.57	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

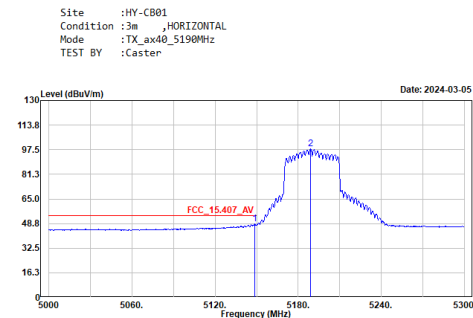

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.800	48.65	54.00	-5.35	34.35	14.30	Average
2	5189.000	98.35	-----	-----	83.95	14.40	Average


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

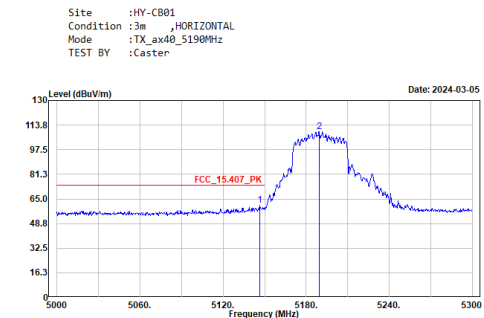

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5146.400	61.02	74.00	-12.98	46.71	14.31	Peak
2	5189.300	109.52	-----	-----	95.12	14.40	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5190MHz
TEST BY :Caster

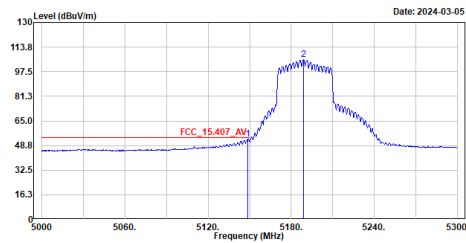


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5148.800	53.04	54.00	-0.96	38.74	14.30	Average
2	5188.700	105.35	-----	-----	90.96	14.39	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5190MHz
TEST BY :Caster

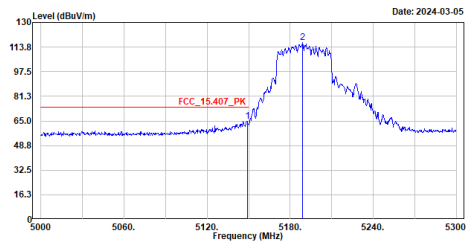


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	64.76	74.00	-9.24	50.46	14.30	Peak
2	5189.000	116.81	-----	-----	102.41	14.40	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_av40_5230MHz
TEST BY :Caster

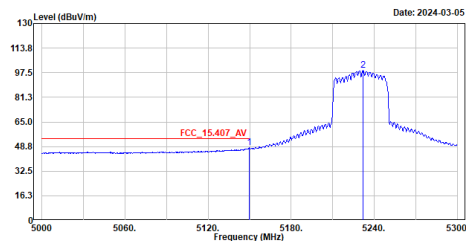


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	47.86	54.00	-6.14	33.56	14.30	Average
2	5231.900	98.88	-----	-----	84.42	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_av40_5230MHz
TEST BY :Caster

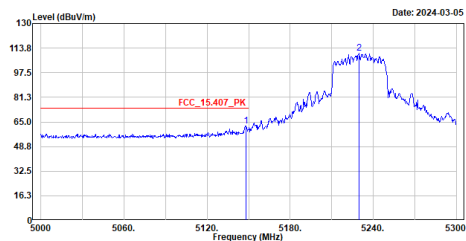


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.900	62.51	74.00	-11.49	48.28	14.31	Peak
2	5229.800	110.18	-----	-----	95.73	14.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5230MHz
TEST BY :Caster

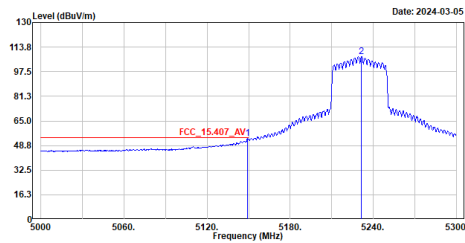


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	53.45	54.00	-0.55	39.15	14.30	Average
2	5231.600	107.30	-----	-----	92.84	14.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5230MHz
TEST BY :Caster

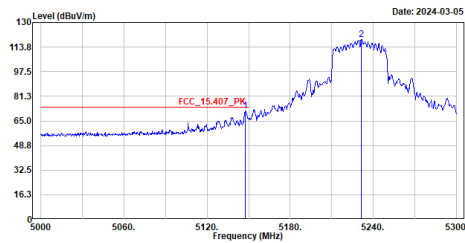


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5147.600	71.41	74.00	-2.59	57.10	14.31	Peak
2	5231.600	118.80	-----	-----	104.34	14.46	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_av40_5755MHz
TEST BY :Caster

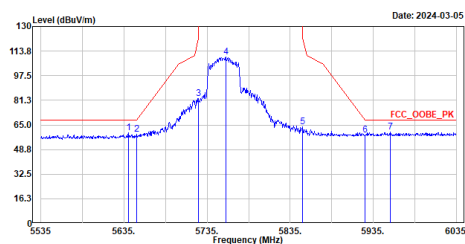


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5640.500	59.63	68.22	-8.59	43.91	15.72	Peak
2	5650.000	58.74	68.23	-9.49	42.98	15.76	Peak
3	5724.500	82.39	121.06	-38.67	66.27	16.12	Peak
4	5757.500	109.95	-----	-----	93.67	16.28	Peak
5	5850.000	63.75	122.20	-58.45	47.30	16.45	Peak
6	5925.000	58.27	68.23	-9.96	41.69	16.58	Peak
7	5955.500	68.18	68.22	-8.04	43.63	16.55	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_av40_5755MHz
TEST BY :Caster

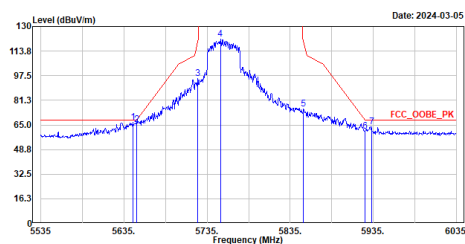


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.000	66.51	68.22	-1.71	50.77	15.74	Peak
2	5650.000	65.01	68.23	-3.22	49.25	15.76	Peak
3	5724.000	95.61	119.92	-24.31	79.49	16.12	Peak
4	5751.000	121.67	-----	-----	105.42	16.25	Peak
5	5851.000	75.44	119.92	-44.48	58.99	16.45	Peak
6	5925.000	60.66	68.23	-7.57	44.88	16.58	Peak
7	5933.000	63.75	68.22	-4.47	47.18	16.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ax40_5795MHz
TEST BY :Caster

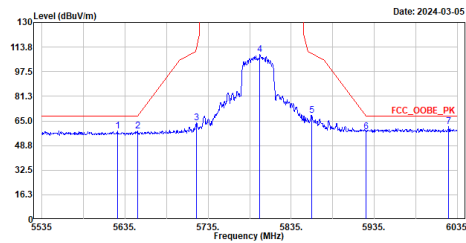


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5626.000	58.36	68.22	-9.86	42.71	15.65	Peak
2	5650.000	58.47	68.23	-9.76	42.71	15.76	Peak
3	5721.000	63.68	113.08	-49.40	47.58	16.10	Peak
4	5797.500	108.72	-----	-----	92.38	16.34	Peak
5	5859.500	68.72	109.54	-40.82	52.25	16.47	Peak
6	5925.000	57.65	68.23	-10.58	41.07	16.58	Peak
7	6024.500	61.12	68.22	-7.10	44.50	16.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ax40_5795MHz
TEST BY :Caster

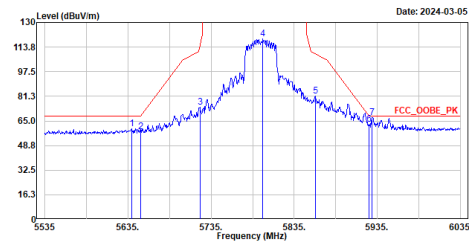


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5639.500	60.01	68.22	-8.21	44.30	15.71	Peak
2	5650.000	57.67	68.23	-10.56	41.91	15.76	Peak
3	5721.500	74.29	114.22	-39.93	58.18	16.11	Peak
4	5797.500	119.45	-----	-----	103.11	16.34	Peak
5	5860.500	81.37	109.26	-27.89	64.89	16.48	Peak
6	5925.000	62.84	68.23	-5.39	46.26	16.58	Peak
7	5929.000	67.20	68.22	-1.02	50.62	16.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
TEST BY :Caster

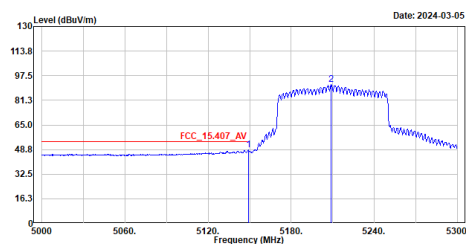


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.400	48.41	54.00	-5.59	34.11	14.30	Average
2	5208.800	91.65	-----	-----	77.22	14.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ax80_5210MHz
TEST BY :Caster

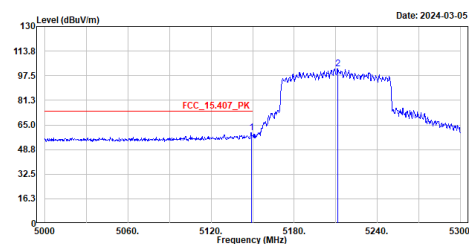


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.100	59.79	74.00	-14.21	45.49	14.30	Peak
2	5211.500	102.10	-----	-----	87.66	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_au80_5210MHz
TEST BY :Caster

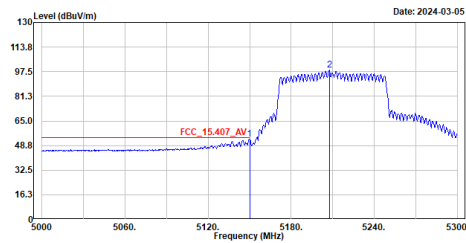


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5150.000	52.89	54.00	-1.11	38.59	14.30	Average
2	5207.600	98.78	-----	-----	84.35	14.43	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_au80_5210MHz
TEST BY :Caster

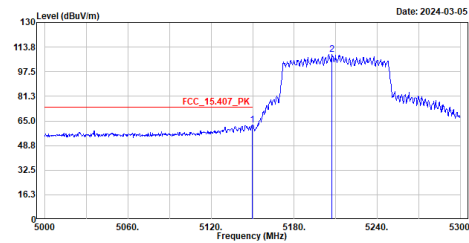


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5149.700	62.39	74.00	-11.61	48.09	14.30	Peak
2	5207.300	109.02	-----	-----	94.58	14.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_au80_5775MHz
TEST BY :Caster

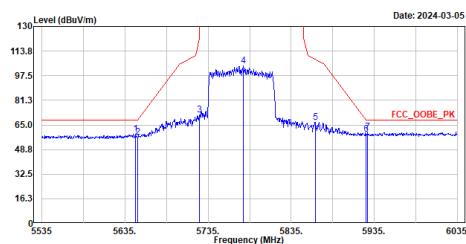


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5647.500	59.06	68.22	-9.16	43.31	15.75	Peak
2	5650.000	56.99	68.23	-11.24	41.23	15.76	Peak
3	5724.500	71.39	121.06	-49.67	55.27	16.12	Peak
4	5777.000	104.23	-----	-----	87.92	16.31	Peak
5	5864.000	66.82	108.28	-41.46	50.34	16.48	Peak
6	5925.000	50.87	68.23	-9.36	42.29	16.58	Peak
7	5927.000	68.22	68.22	-8.00	43.64	16.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_au80_5775MHz
TEST BY :Caster

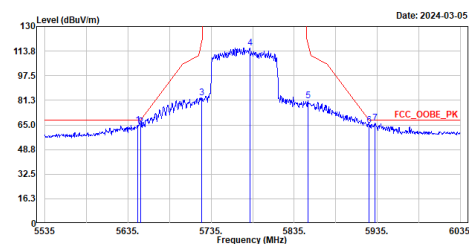

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	5646.500	64.88	68.22	-3.34	49.13	15.75	Peak
2	5650.000	63.64	68.23	-4.59	47.88	15.76	Peak
3	5724.000	82.69	119.92	-37.23	66.57	16.12	Peak
4	5781.500	115.88	-----	-----	99.57	16.31	Peak
5	5852.000	80.74	117.64	-36.90	64.28	16.46	Peak
6	5925.000	64.78	68.23	-3.45	48.20	16.58	Peak
7	5932.000	66.35	68.22	-1.87	49.77	16.58	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.