

TEST REPORT

ACCORDING TO: FCC 47CFR part 15 subpart C §15.247 (DTS),
RSS-247 Issue 2:2017, RSS-Gen Issue 5

FOR:

Nyxoah Ltd.

Genio® System 2.1 parts

- **Activation Chip – AC2364, PN: NX-ASM-002325**
FCC ID: 2A6HG-NX-ASM-002325
- **Implantable Stimulator – IS, PN: NX-ASM-000660**
- **Disposable Patch – DP, PN: NX-ASM-000650**
- **Charging Unit – CU2238+Power supply,**
CU PN: NX-ASM-002330,
Power Supply PN: NX-ELC-002010
- **External device - Raspberry-Pi mini-computer (Repeater)**
with Genio sleep lab app, PN: NX-ELC-002470;
RaspberryPi model 3B+ (red and white or grey color of
cover)

This report is in conformity with ISO/ IEC 17025. The "A2LA Accredited" symbol endorsement applies only to the tests and calibrations that are listed in the scope of Hermon Laboratories accreditation. The test results relate only to the items tested.
This test report shall not be reproduced in any form except in full with the written approval of Hermon Laboratories Ltd.



Table of contents

1	Applicant information.....	3
2	Equipment under test attributes	3
3	Manufacturer information	3
4	Test details.....	3
5	Tests summary.....	4
6	EUT description.....	5
6.1	General information.....	5
6.2	Test configuration.....	6
6.3	Changes made in EUT	6
6.4	Transmitter characteristics	7
7	Transmitter tests according to 47CFR part 15 subpart C requirements	8
7.1	Minimum 6 dB bandwidth	8
7.2	Peak output power	13
7.3	Field strength of spurious emissions	22
7.4	Band edge radiated emissions	40
7.5	Peak spectral power density	46
7.6	Antenna requirements	51
8	APPENDIX A Test equipment and ancillaries used for tests.....	52
9	APPENDIX B Test equipment correction factors.....	53
10	APPENDIX C Measurement uncertainties	56
11	APPENDIX D Test laboratory description	57
12	APPENDIX E Specification references.....	58
13	APPENDIX F Abbreviations and acronyms.....	59

1 Applicant information

Client name: Nyxoah Ltd.
Address: 126 Yigal Alon, Tel Aviv 6744332, Israel
Telephone: +972-3-6209597
E-mail: Dvir.Itzhakov@nyxoah.com
Contact name: Mr. Dvir Itzhakov

2 Equipment under test attributes

Product name: The Genio® System 2.1 consisting of:
• Genio® Activation Chip (AC2364) PN: NX-ASM-002325, Serial Numbers: 0121-VV21, 0121-VV24, 0121-VV20, Hardware Version 1.0, BOM Revision 1.0, Software version 1.0.0*
• Genio® Implantable Stimulator (IS), PN: NX-ASM-000660, Serial Numbers: 2011019, 2011051, Market BOM Revision 7.0
• Genio® Disposable Patch (DP), PN: NX-ASM-000650, Hardware version 3.0
• Genio® Charging Unit (CU2238) PN: NX-ASM-002330, Serial Numbers: 0121VV13, 0121-VV44, Hardware Version 1.0, BOM Revision 1.0
• External device - Raspberry-Pi mini-computer (Repeater) with Genio sleep lab app, PN: NX-ELC-002470, Serial Number: 169.254.49.169; RaspberryPi model 3B+ (red and white or grey color of cover)

Trade Mark:  Genio®, Nyxoah®

Receipt date 07-Feb-22

Note*. The relevant Test Report was performed to support certification process for Activation Chip with BLE wireless communication. All others parts of the systems were used as auxiliary equipment.

3 Manufacturer information

Manufacturer name: Nyxoah Ltd.
Address: 126 Yigal Alon, Tel Aviv 6744332, Israel
Telephone: +972-3-6209597
E-Mail: Dvir.Itzhakov@nyxoah.com
Contact name: Mr. Dvir Itzhakov

4 Test details

Project ID: 46250
Location: Hermon Laboratories Ltd. P.O. Box 23, Binyamina 3055001, Israel
Test started: 17-Apr-22
Test completed: 20-Apr-22
Test specification(s): FCC 47CFR part 15 subpart C §15.247 (DTS),
RSS-247 Issue 2:2017, RSS-Gen Issue 5



5 Tests summary

Test	Status
Transmitter characteristics	
FCC Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth	Pass
FCC Section 15.247(b)3/ RSS-247 section 5.4(4), Peak output power	Pass
FCC Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions	Pass
FCC Section 15.247(d)/ RSS-247 section 5.5, Emissions at band edges	Pass
FCC Section 15.247(e) / RSS-247 section 5.2(2), Peak power density	Pass
FCC section 15.203 / RSS-Gen section 6.8, Antenna requirement	Pass

This test report supersedes the previously issued test report identified by Doc ID: NYXRAD_FCC.46250_BLE_Rev1

Testing was completed against all relevant requirements of the test standard. However, results obtained indicate that the product under test complies in full with the requirements tested.

The test results relate only to the items tested. Pass/ fail decision was based on nominal values.

	Name and Title	Date	Signature
Tested by:	Mr. H.N. Abayev, test engineer, EMC & Radio	17-Apr-22 – 20-Apr-22	
Reviewed by:	Mrs. S. Peysahov Sheynin, test engineer, EMC & Radio	07-Jun-23	
Approved by:	Mr. M. Nikishin, group leader, EMC & Radio	07-Jun-23	



6 EUT description

Note: The following data in this clause is provided by the customer and represents his sole responsibility

6.1 General information

The EUT, Genio® System 2.1, is intended for the treatment of moderate to severe Obstructive Sleep Apnea (OSA). OSA is a respiratory sleep disorder characterized by recurrent episodes of partial or completed upper airway obstruction during sleep. Sleep apnea is associated with repeated disruption of sleep resulting in excessive daytime somnolence and other medical co-morbidities. OSA occurs when the throat and tongue muscles and soft tissues relax and collapse. It makes a person stop breathing during sleep, while the airway repeatedly becomes partially (hypopnea) or completely (apnea) blocked, limiting the amount of air that reaches the lungs. During an episode of apnea or hypopnea, the patient's oxygen level drops, which leads to sleep interruptions. The Implantable Stimulator's electrodes are placed in contact with both branches of the hypoglossal nerve resulting in bilateral stimulation of the nerve, which then triggers tongue movement and airway opening. The following EUT components were tested:

- **Genio® Implantable Stimulator (IS)**

The IS is the only implanted component of the Genio system. It is implanted over the Genioglossus muscle. It consists of a receiving antenna, electrical circuit and two (2) sets of stimulating electrode pairs (one on each side of the device) that deliver a charged-balanced stimulation to the hypoglossal nerve branches (i.e., the left and right branches). The IS does not include a battery or a microcontroller with software. It is powered and controlled by the Genio® AC Model #2364 and Genio® DP. The IS was already tested as part of the Genio® System which is released to the field.

- **Genio® Activation Chip (AC) Model #2364**

The AC is a battery controlled microprocessor that functions as the power-source of the IS when connected to the DP. It contains a rechargeable battery and stores the patient-specific stimulation parameters programmed by the treating physician in the sleep lab. The AC communicates with the Repeater over BLE wireless communication. The AC outer mechanical and industrial design are based on the currently released AC and its electromechanical interface is identical to the currently released AC and compatible with the currently released DP.

- **Genio® Disposable Patch (DP)**

The DP is a single-use biocompatible adhesive patch that includes an integrated antenna. When connected to the AC it transmits energy to the IS. The DP and connected AC are adhered to the patient's chin over the IS during the night. Each morning, the patient removes the AC from the DP and discards the DP. The DP is the same Genio® DP which was already tested as part of the Genio® System that is released to the field.

- **Genio® Charging Unit (CU) Model #2238**

The CU is connected to the power outlet and recharges the AC battery during the day. The CU mechanical and industrial design are based on the currently released Genio® CU. It is powered from an external AC/DC Adaptor manufactured by Friwo Geratebau GmbH, model FW8000M/05.

- **External device - Raspberry-Pi mini-computer (Repeater)**

The Genio® Sleep Lab Application is used in the sleep lab by an authorized caregiver (e.g. Sleep Lab technician, FCE). The software is used to communicate with the Genio® AC model #2364 via BLE and program the stimulation parameters.

The app is installed on an off-the-shelf RaspberryPi mini computer (Repeater) supplied by Nyxoah. It is accessed remotely by the user's laptop using a Peer-to-Peer interface. The application also provides system monitoring capabilities. The Repeater is powered from an external AC/DC Adaptor manufactured by Stontronics, model DSA-13PFC-05.

The color of cover may be red and white or grey (the same plastic material). All tests were performed for the EUT with red and white cover except of ESD, where the EUT with grey cover was also tested.


The following configurations were tested:

➤ AC+DP+IS



6.2 Test configuration

AC+DP+IS

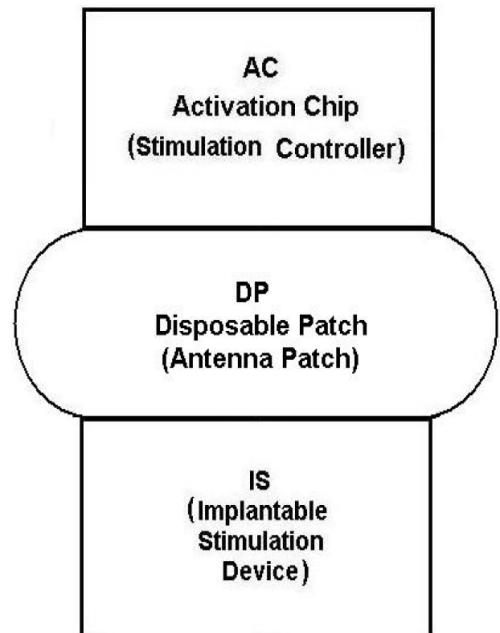

6.3 Changes made in EUT

No changes were implemented in the EUT during testing.



HERMON LABORATORIES

6.4 Transmitter characteristics

Type of equipment							
V	Stand-alone (Equipment with or without its own control provisions)						
	Combined equipment (Equipment where the radio part is fully integrated within another type of equipment)						
	Plug-in card (Equipment intended for a variety of host systems)						
Assigned frequency range		2400 -2483.5 MHz					
Operating frequencies		2402-2480 MHz					
Maximum rated output power		Peak output power -14.50 dBm					
Is transmitter output power variable?		V	No	continuous variable			
		Yes		stepped variable with stepsize			
				dB			
				minimum RF power			
				dBm			
				maximum RF power			
				dBm			
Antenna connection							
unique coupling	standard connector		V	Integral	with temporary RF connector		
			V		without temporary RF connector		
Antenna/s technical characteristics							
Type	Manufacturer		Model number		Gain		
Internal	Yageo		ANT3216LL00R2400A		5.05dBi		
Transmitter aggregate data rate/s		1 Mbps					
Type of modulation		GFSK					
Modulating test signal (baseband)							
Transmitter power source							
V	Battery	Nominal rated voltage	3.7 VDC	Battery type	Lithium Ion Polymer		
	DC	Nominal rated voltage					
	AC mains	Nominal rated voltage		Frequency	Hz		



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:	Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth		
Test procedure:	ANSI C63.10 section 11.8.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	17-Apr-22		
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

7 Transmitter tests according to 47CFR part 15 subpart C requirements

7.1 Minimum 6 dB bandwidth

7.1.1 General

This test was performed to measure 6 dB bandwidth of the EUT carrier frequency. Specification test limits are given in Table 7.1.1.

Table 7.1.1 6 dB bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points*, dBc	Minimum bandwidth, kHz
2400.0 – 2483.5	6.0	500.0

* - Modulation envelope reference points provided in terms of attenuation below the peak of modulated carrier.


Table 7.1.2 The 99% bandwidth limits

Assigned frequency, MHz	Modulation envelope reference points	Limit, kHz
2400.0 – 2483.5	99%	NA

7.1.2 Test procedure

- 7.1.2.1 The EUT was set up as shown in Figure 7.1.1, energized and its proper operation was checked.
- 7.1.2.2 The EUT was set to transmit modulated carrier.
- 7.1.2.3 The transmitter minimum 6 dB bandwidth was measured with spectrum analyzer as frequency delta between reference points on modulation envelope and provided in Table 7.1.3 and associated plot.

Figure 7.1.1 6 dB bandwidth test setup

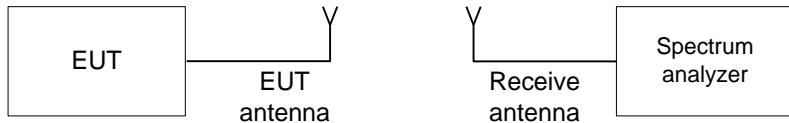



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth				
Test procedure:	ANSI C63.10 section 11.8.1			
Test mode:	Compliance			
Date(s):	17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC	
Remarks:				

Table 7.1.3 The 6 dB bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: 100 kHz
 MODULATION: GFSK
 BITRATE: 1 Mbps

Carrier frequency, MHz	6 dB bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2402.0	733.3	500.0	233.3	Pass
Mid frequency				
2442.0	752.2	500.0	252.2	Pass
High frequency				
2480.0	719.3	500.0	219.3	Pass

Table 7.1.4 The 99% bandwidth test results

ASSIGNED FREQUENCY BAND: 2400.0 – 2483.5 MHz
 DETECTOR USED: Peak
 RESOLUTION BANDWIDTH: 30 kHz
 VIDEO BANDWIDTH: 100 kHz
 MODULATION: GFSK
 BITRATE: 1 Mbps

Carrier frequency, MHz	99% bandwidth, kHz	Limit, kHz	Margin, kHz	Verdict
Low frequency				
2402.0	1066.93	NA	NA	Pass
Mid frequency				
2442.0	1075.92	NA	NA	Pass
High frequency				
2480.0	1066.93	NA	NA	Pass

Reference numbers of test equipment used

HL 4355	HL 5410	HL 5902					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.





HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.1.1 6 dB and 99% bandwidth test result at low frequency

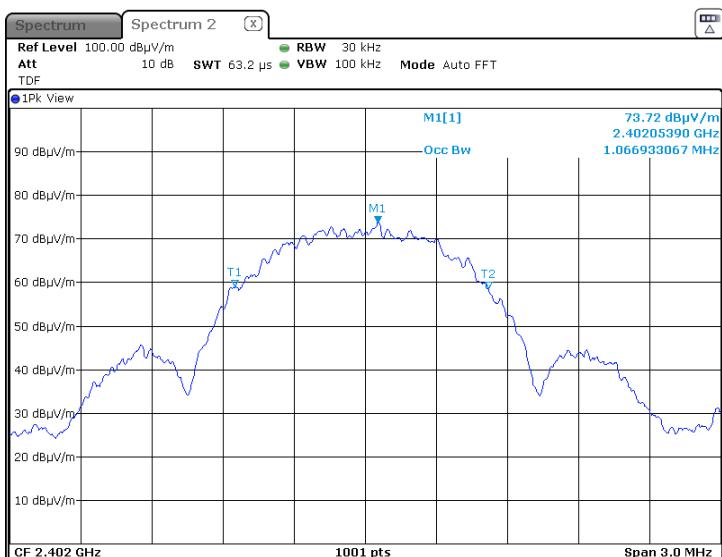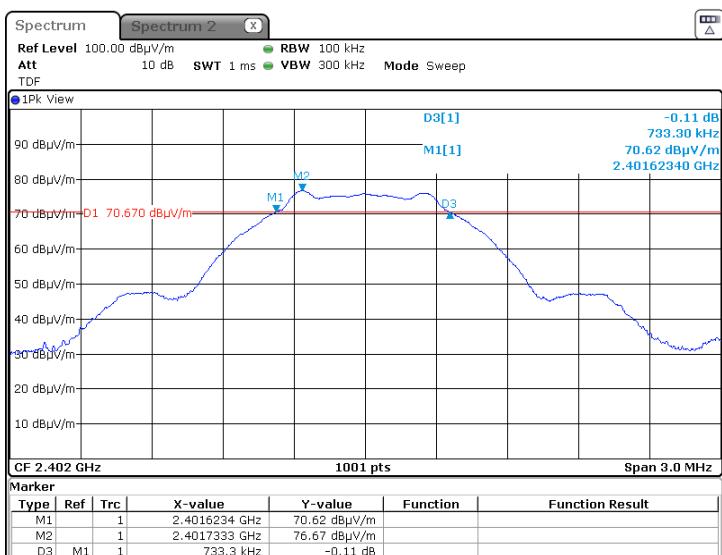




HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.1.2 6 dB and 99% bandwidth test result at mid frequency

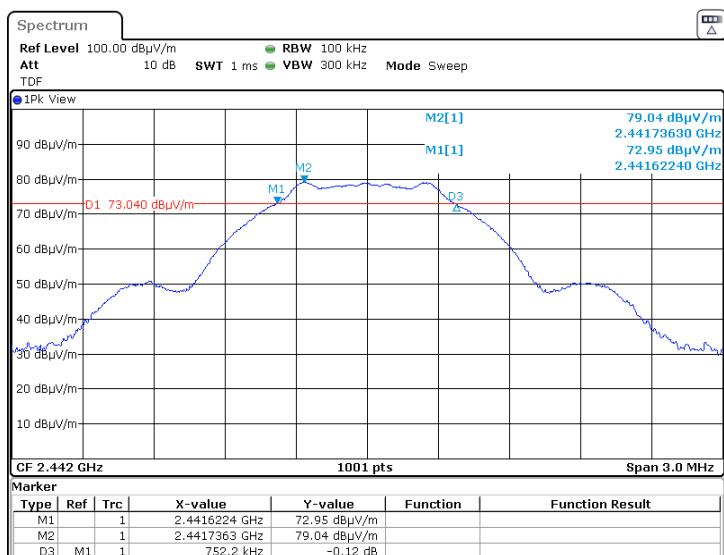




HERMON LABORATORIES

Test specification: Section 15.247(a)2 / RSS-247 section 5.2(1), 6 dB bandwidth			
Test procedure: ANSI C63.10 section 11.8.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.1.3 6 dB and 99% bandwidth test result at high frequency

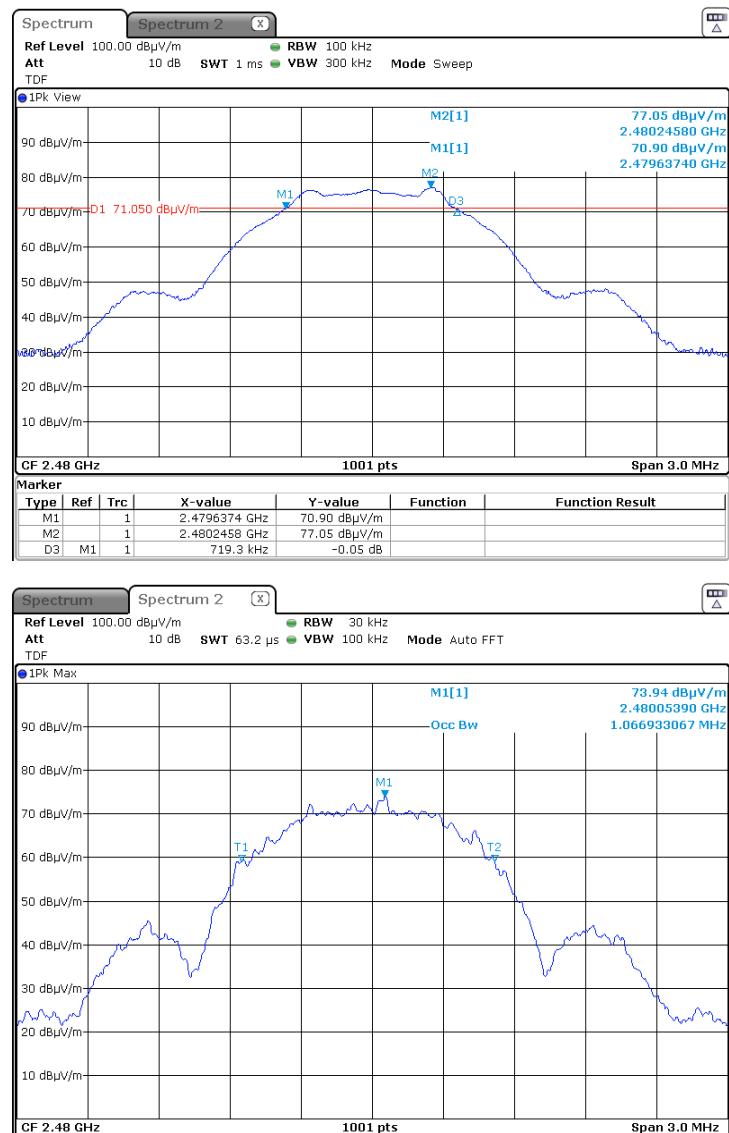



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance			Verdict: PASS
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

7.2 Peak output power

7.2.1 General

This test was performed to measure the maximum peak output power radiated by transmitter. Specification test limits are given in Table 7.2.1.

Table 7.2.1 Peak output power limits

Assigned frequency range, MHz	Maximum antenna gain, dBi	Peak output power*		Equivalent field strength limit @ 3m, dB(µV/m)**
		W	dBm	
2400.0 – 2483.5	6.0	1.0	30.0	131.2

*- The limit is provided in terms of conducted RF power at the antenna connector. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power limit shall be reduced below the stated value as follows:

by 1 dB for every 3 dB that the directional gain of antenna exceeds 6 dBi for fixed point-to-point transmitters operate in 2400-2483.5 MHz band;

without any corresponding reduction for fixed point-to-point transmitters operate in 5725-5850 MHz band; by the amount in dB that the directional gain of antenna exceeds 6 dBi for the rest of transmitters.

**- Equivalent field strength limit was calculated from the peak output power as follows: $E = \sqrt{30 \times P \times G} / r$, where P is peak output power in Watts, r is antenna to EUT distance in meters and G is transmitter antenna gain in dBi.

7.2.2 Test procedure

- 7.2.2.1 The EUT was set up as shown in Figure 7.2.1, energized and its proper operation was checked.
- 7.2.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.2.2.3 The resolution bandwidth of spectrum analyzer was set wider than 6 dB bandwidth of the EUT and the field strength of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.2.2.4 The maximum field strength of the EUT carrier frequency was measured as provided in Table 7.2.2 and associated plots.
- 7.2.2.5 The maximum peak output power was calculated from the field strength of carrier as follows:

$$P = (E \times d)^2 / (30 \times G),$$

where P is the peak output power in W, E is the field strength in V/m, d is the test distance and G is the transmitter numeric antenna gain over an isotropic radiator.

The above equation was converted in logarithmic units for 3 m test distance:

$$\text{Peak output power in dBm} = \text{Field strength in dB}(\mu\text{V}/\text{m}) - \text{Transmitter antenna gain in dBi} - 95.2 \text{ dB}$$


- 7.2.2.6 The worst test results (the lowest margins) were recorded in Table 7.2.2.



HERMON LABORATORIES

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance			Verdict: PASS
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.2.1 Setup for carrier field strength measurements

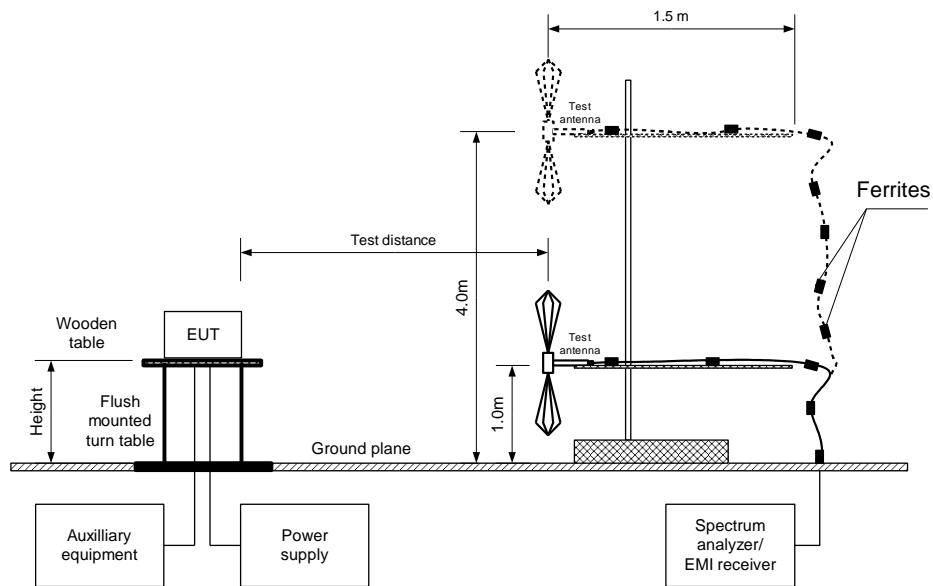



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power	
Test procedure: ANSI C63.10 sections 11.9.2.2.4	
Test mode: Compliance	Verdict: PASS
Date(s): 17-Apr-22	
Temperature: 20 °C	Relative Humidity: 50 %
	Air Pressure: 1016 hPa
	Power: 3.7 VDC
Remarks:	

Table 7.2.2 Peak output power test results

ASSIGNED FREQUENCY:	2400.0 – 2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	1.5 m
DETECTOR USED:	Peak
TEST ANTENNA TYPE:	Double ridged guide (above 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	3 MHz
VIDEO BANDWIDTH:	10 MHz

MODULATION:	GFSK
BITRATE:	1 Mbps

Frequency, MHz	Field strength, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	EUT antenna gain, dBi	Peak output power, dBm**	Limit, dBm	Margin, dB***	Verdict
2402.0	85.75	Horizontal	1.70	80	5.05	-14.50	30	-44.50	Pass
2442.0	77.51	Horizontal	1.60	-10	5.05	-22.74	30	-52.74	Pass
2480.0	80.15	Horizontal	1.60	0	5.05	-20.10	30	-50.10	Pass

*- EUT front panel refer to 0 degrees position of turntable.

**- Peak output power was calculated from the field strength of carrier as follows: $P = (E \times d)^2 / (30 \times G)$, where P is the peak output power in W, E is the field strength in V/m, d is the test distance in meters and G is the transmitter numeric antenna gain over an isotropic radiator. The above equation was converted in logarithmic units for 3 m test distance: *Peak output power in dBm = Field strength in dB(µV/m) - Transmitter antenna gain in dBi - 95.2 dB*

***- Margin = Peak output power – specification limit.

Note: Maximum peak output power was obtained at Unom (115%Unom, 85%Unom) input power voltage.

Reference numbers of test equipment used

HL 4355	HL 4360	HL 4933	HL 5410	HL 5902			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance			
Date(s): 17-Apr-22			Verdict: PASS
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.2.1 Field strength of carrier at low frequency

EUT POSITION: X
ANTENNA POLARIZATION: Vertical and Horizontal

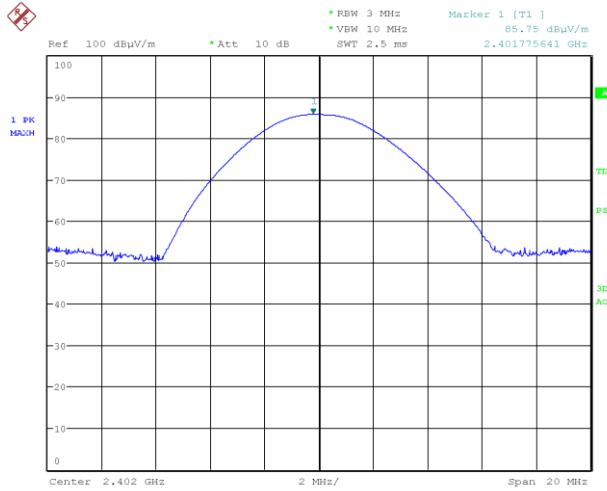

Date: 17.APR.2022 18:45:01

EUT POSITION: Y
ANTENNA POLARIZATION: Vertical and Horizontal

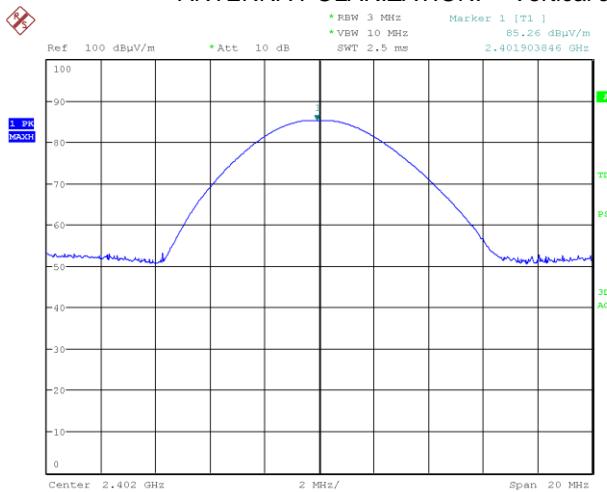


Date: 17.APR.2022 18:26:39



HERMON LABORATORIES

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.2 Field strength of carrier at low frequency (continuation)

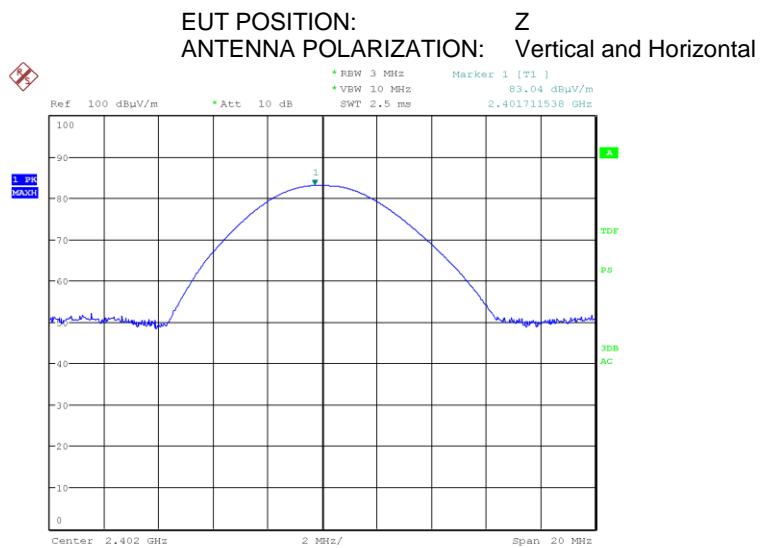

Date: 17.APR.2022 19:04:11



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23


Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.3 Field strength of carrier at mid frequency

EUT POSITION: X
ANTENNA POLARIZATION: Vertical and Horizontal

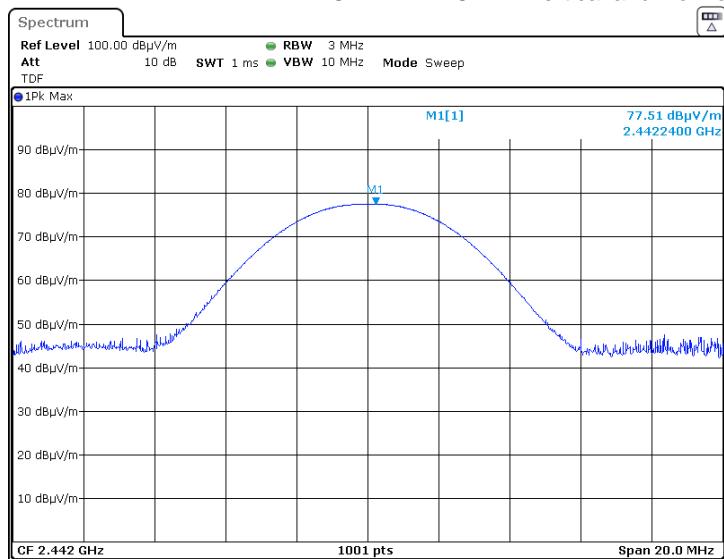

EUT POSITION: Y
ANTENNA POLARIZATION: Vertical and Horizontal

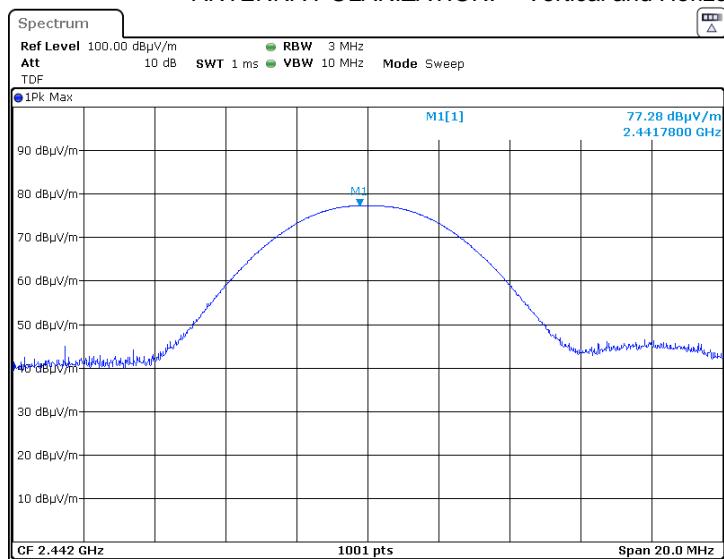




HERMON LABORATORIES

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.4 Field strength of carrier at mid frequency (continuation)

EUT POSITION: Z
ANTENNA POLARIZATION: Vertical and Horizontal

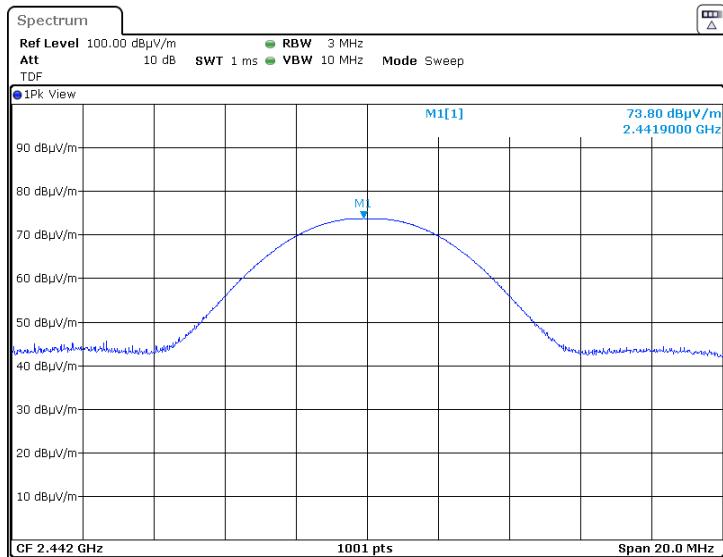



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23


Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.5 Field strength of carrier at high frequency

EUT POSITION: X
ANTENNA POLARIZATION: Vertical and Horizontal

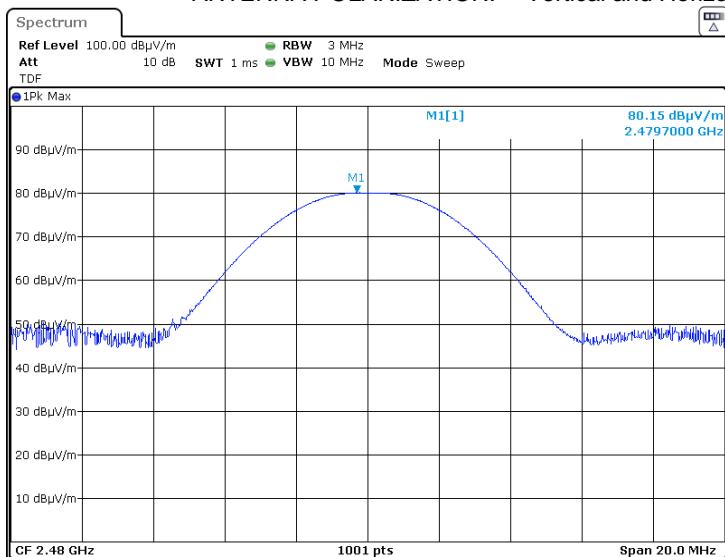

EUT POSITION: Y
ANTENNA POLARIZATION: Vertical and Horizontal

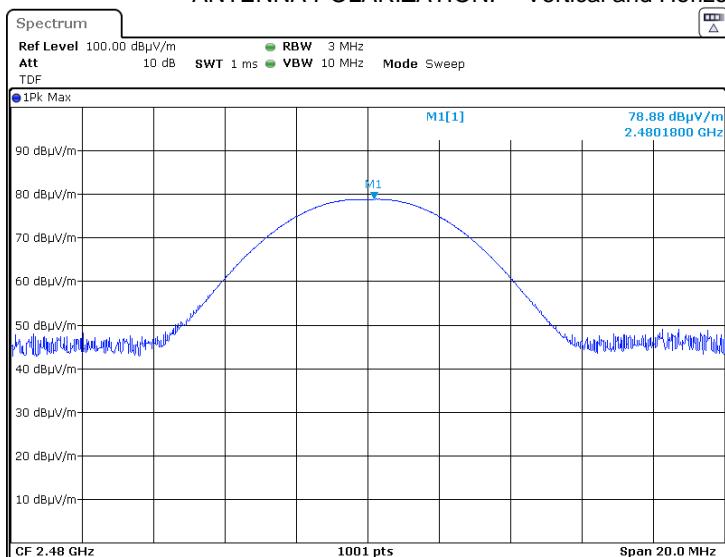




HERMON LABORATORIES

Test specification: Section 15.247(b)3 / RSS-247 section 5.4(4), Maximum output power			
Test procedure: ANSI C63.10 sections 11.9.2.2.4			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.2.6 Field strength of carrier at high frequency (continuation)

EUT POSITION: Z
ANTENNA POLARIZATION: Vertical and Horizontal

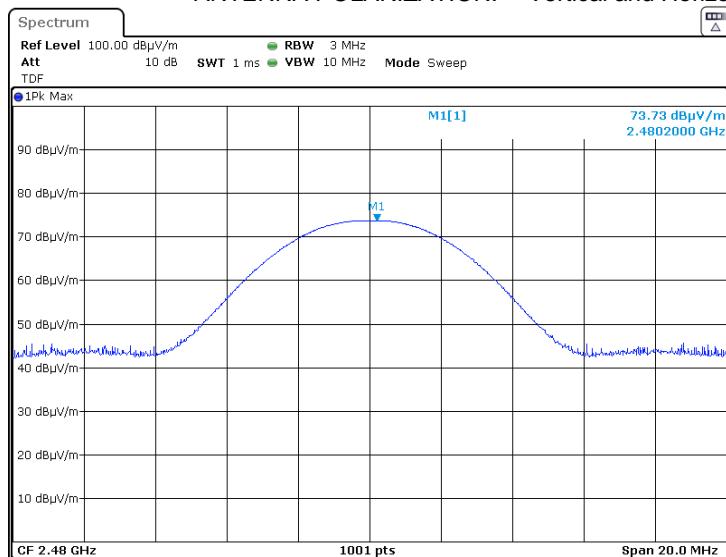



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

7.3 Field strength of spurious emissions

7.3.1 General

This test was performed to measure field strength of spurious emissions from the EUT. Specification test limits are given in Table 7.3.1.

Table 7.3.1 Radiated spurious emissions limits

Frequency, MHz	Field strength at 3 m within restricted bands, dB(µV/m)*			Attenuation of field strength of spurious versus carrier outside restricted bands, dBc***
	Peak	Quasi Peak	Average	
0.009 – 0.090	148.5 – 128.5	NA	128.5 – 108.5**	20.0
0.090 – 0.110	NA	108.5 – 106.8**	NA	
0.110 – 0.490	126.8 – 113.8	NA	106.8 – 93.8**	
0.490 – 1.705		73.8 – 63.0**		
1.705 – 30.0*		69.5		
30 – 88	NA	40.0	NA	
88 – 216		43.5		
216 – 960		46.0		
960 - 1000		54.0		
1000 – 10 th harmonic	74.0	NA	54.0	

*- The limit for 3 m test distance was calculated using the inverse square distance extrapolation factor as follows:

$$\text{Lim}_{S_2} = \text{Lim}_{S_1} + 40 \log \left(\frac{S_1}{S_2} \right)$$

where S_1 and S_2 – standard defined and test distance respectively in meters.

**- The limit decreases linearly with the logarithm of frequency.

*** - The field strength limits applied from the lowest radio frequency generated in the device, without going below 9 kHz up to the tenth harmonic of the highest fundamental frequency.

7.3.2 Test procedure for spurious emission field strength measurements in 9 kHz to 30 MHz band

7.3.2.1 The EUT was set up as shown in Figure 7.3.1, energized and the performance check was conducted.

7.3.2.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna was rotated around its vertical axis.

7.3.2.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.

7.3.3 Test procedure for spurious emission field strength measurements above 30 MHz

7.3.3.1 The EUT was set up as shown in Figure 7.3.2, Figure 7.3.3 energized and the performance check was conducted.

7.3.3.2 The specified frequency range was investigated with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360°, the measuring antenna height was changed from 1 to 4 m, its polarization was switched from vertical to horizontal.

7.3.3.3 The worst test results (the lowest margins) were recorded and shown in the associated plots.



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.3.1 Setup for spurious emission field strength measurements below 30 MHz


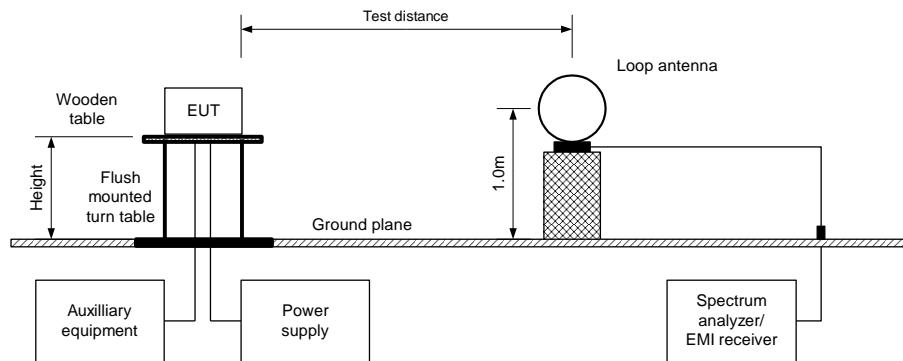


Figure 7.3.2 Setup for spurious emission field strength measurements in 30 – 1000 MHz




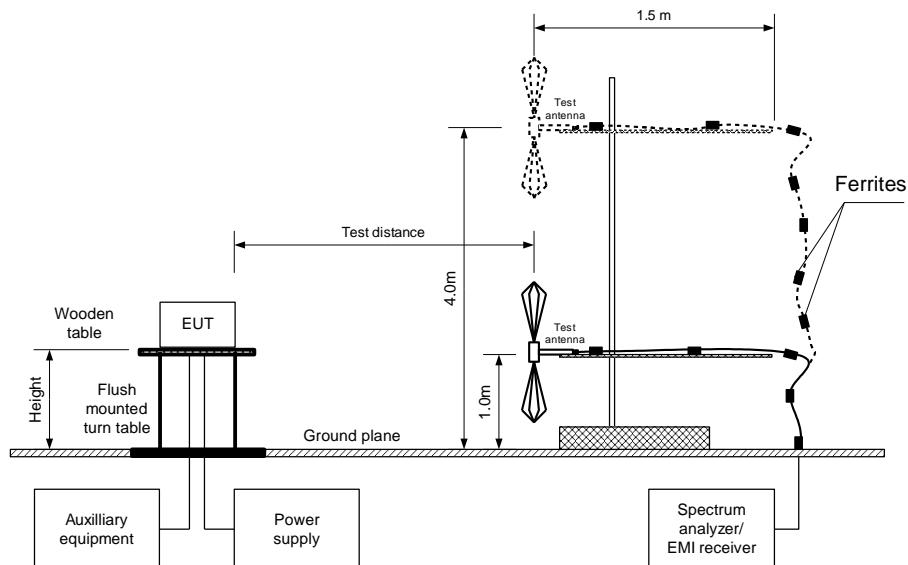

HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.3.3 Setup for spurious emission field strength measurements above 1000 MHz

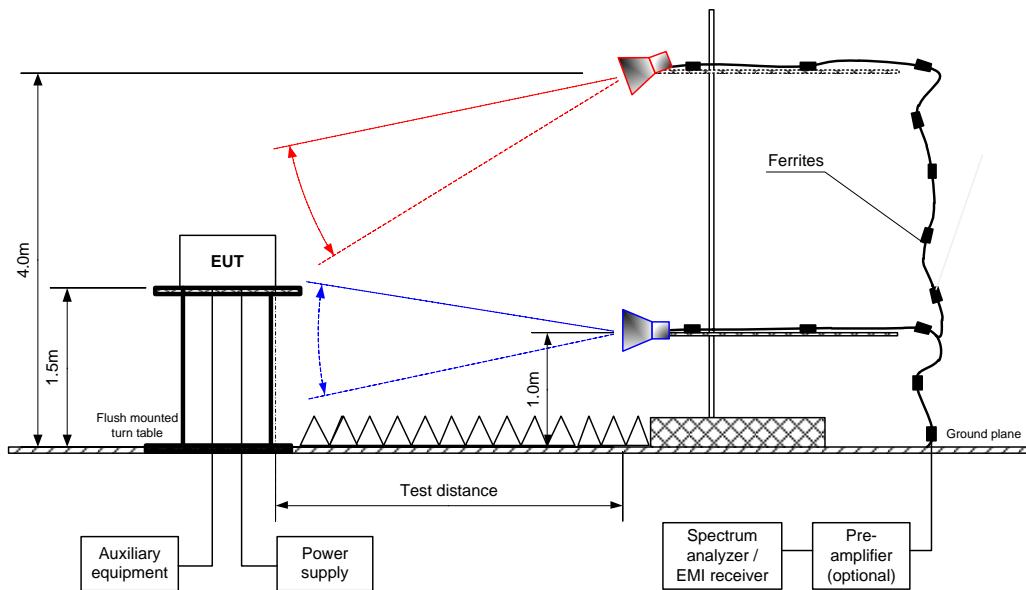



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:		Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:		ANSI C63.10 section 11.12.1		
Test mode:	Compliance			Verdict:
Date(s):	18-Apr-22 - 20-Apr-22			PASS
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC	
Remarks:				

Table 7.3.2 Field strength of emissions outside restricted bands

ASSIGNED FREQUENCY:	2400.0 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 - 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	100 kHz
VIDEO BANDWIDTH:	300 kHz
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz) Double ridged guide (above 1000 MHz)

Frequency, MHz	Field strength of spurious, dB(µV/m)	Antenna polarization	Antenna height, m	Azimuth, degrees*	Field strength of carrier, dB(µV/m)	Attenuation below carrier, dBc	Limit, dBc	Margin, dB**	Verdict
Low carrier frequency 2402 MHz									
7205.22	60.14	Horizontal	1.50	22	81.55	21.41	20.0	1.41	Pass
Mid carrier frequency 2442 MHz									
9768.82	50.75	Vertical	1.5	35	74.22	23.47	20.0	3.47	Pass
High carrier frequency 2480 MHz									
9918.88	52.43	Vertical	1.5	40	77.16	24.73	20.0	4.73	Pass

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Attenuation below carrier – specification limit.

Table 7.3.3 Field strength of spurious emissions above 1 GHz within restricted bands

ASSIGNED FREQUENCY:	2400.0 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	1000 - 25000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	1000 kHz
TEST ANTENNA TYPE:	Double ridged guide

Frequency, MHz	Antenna		Azimuth, degrees*	Peak field strength(VBW=3 MHz)			Average field strength(VBW=10 Hz)			Verdict	
	Polarization	Height, m		Measured, dB(µV/m)	Limit, dB(µV/m)	Margin, dB**	Measured, dB(µV/m)	Calculated, dB(µV/m)	Limit, dB(µV/m)		
Low carrier frequency 2402 MHz											
4803.013	Horizontal	1.50	22	50.82	74.0	-23.18	44.35	NA	54.0	-9.65	Pass
Mid carrier frequency 2442 MHz											
4883.707	Vertical	1.50	1	50.25	74.0	-23.75	46.07	NA	54.0	-7.93	Pass
7326.267	Horizontal	1.50	27	56.93	74.0	-17.07	51.10	NA	54.0	-2.90	
High carrier frequency 2480											
4959.867	Vertical	1.50	-26	52.39	74.0	-21.61	47.74	NA	54.0	-6.26	Pass
7439.147	Horizontal	1.50	22	55.19	74.0	-18.81	50.25	NA	54.0	-3.75	

*- EUT front panel refers to 0 degrees position of turntable.

**- Margin = Measured field strength - specification limit.

***- Margin = Calculated field strength - specification limit,
where Calculated field strength = Measured field strength + average factor.



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions					
Test procedure: ANSI C63.10 section 11.12.1					
Test mode: Compliance		Verdict: PASS			
Date(s): 18-Apr-22 - 20-Apr-22					
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC		
Remarks:					

Table 7.3.4 Average factor calculation

Transmission pulse		Transmission burst		Transmission train duration, ms	Average factor, dB
Duration, ms	Period, ms	Duration, ms	Period, ms		
NA					

*- Average factor was calculated as follows

for pulse train shorter than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{\text{Train duration}} \times \text{Number of bursts within pulse train} \right)$$

for pulse train longer than 100 ms:

$$\text{Average factor} = 20 \times \log_{10} \left(\frac{\text{Pulse duration}}{\text{Pulse period}} \times \frac{\text{Burst duration}}{100\text{ms}} \times \text{Number of bursts within 100ms} \right)$$

Table 7.3.5 Field strength of spurious emissions below 1 GHz within restricted bands

ASSIGNED FREQUENCY:	2400.0 – 2483.5 MHz
INVESTIGATED FREQUENCY RANGE:	0.009 – 1000 MHz
TEST DISTANCE:	3 m
MODULATION:	GFSK
BIT RATE:	1 Mbps
DUTY CYCLE:	100 %
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum
RESOLUTION BANDWIDTH:	0.2 kHz (9 kHz – 150 kHz) 9.0 kHz (150 kHz – 30 MHz) 120 kHz (30 MHz – 1000 MHz)
VIDEO BANDWIDTH:	> Resolution bandwidth
TEST ANTENNA TYPE:	Active loop (9 kHz – 30 MHz) Biconilog (30 MHz – 1000 MHz)

Frequency, MHz	Peak emission, dB(µV/m)	Quasi-peak			Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
		Measured emission, dB(µV/m)	Limit, dB(µV/m)	Margin, dB*				
Low carrier frequency 2402 MHz								
		No emissions were found						Pass
Mid carrier frequency 2442 MHz								
		No emissions were found						Pass
High carrier frequency 2480 MHz								
		No emissions were found						Pass

*- Margin = Measured emission - specification limit.

**- EUT front panel refer to 0 degrees position of turntable.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions					
Test procedure: ANSI C63.10 section 11.12.1					
Test mode: Compliance				Verdict:	PASS
Date(s): 18-Apr-22 - 20-Apr-22					
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa		Power: 3.7 VDC	
Remarks:					

Table 7.3.6 Restricted bands according to FCC section 15.205

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.37625 - 8.38675	73 - 74.6	399.9 - 410	2690 - 2900	10.6 - 12.7
0.495 - 0.505	8.41425 - 8.41475	74.8 - 75.2	608 - 614	3260 - 3267	13.25 - 13.4
2.1735 - 2.1905	12.29 - 12.293	108 - 121.94	960 - 1240	3332 - 3339	14.47 - 14.5
4.125 - 4.128	12.51975 - 12.52025	123 - 138	1300 - 1427	3345.8 - 3358	15.35 - 16.2
4.17725 - 4.17775	12.57675 - 12.57725	149.9 - 150.05	1435 - 1626.5	3600 - 4400	17.7 - 21.4
4.20725 - 4.20775	13.36 - 13.41	156.52475 - 156.52525	1645.5 - 1646.5	4500 - 5150	22.01 - 23.12
6.215 - 6.218	16.42 - 16.423	156.7 - 156.9	1660 - 1710	5350 - 5460	23.6 - 24
6.26775 - 6.26825	16.69475 - 16.69525	162.0125 - 167.17	1718.8 - 1722.2	7250 - 7750	31.2 - 31.8
6.31175 - 6.31225	16.80425 - 16.80475	167.72 - 173.2	2200 - 2300	8025 - 8500	36.43 - 36.5
8.291 - 8.294	25.5 - 25.67	240 - 285	2310 - 2390	9000 - 9200	
8.362 - 8.366	37.5 - 38.25	322 - 335.4	2483.5 - 2500	9300 - 9500	Above 38.6

Table 7.3.7 Restricted bands according to RSS-Gen

MHz	MHz	MHz	MHz	MHz	GHz
0.09 - 0.11	8.291 - 8.294	16.80425 - 16.80475	399.9 - 410	3260 - 3267	10.6 - 12.7
2.1735 - 2.1905	8.362 - 8.366	25.5 - 25.67	608 - 614	3332 - 3339	13.25 - 13.4
3.020 - 3.026	8.37625 - 8.38675	37.5 - 38.25	960 - 1427	3345.8 - 3358	14.47 - 14.5
4.125 - 4.128	8.41425 - 8.41475	73 - 74.6	1435 - 1626.5	3500 - 4400	15.35 - 16.2
4.17725 - 4.17775	12.29 - 12.293	74.8 - 75.2	1645.5 - 1646.5	4500 - 5150	17.7 - 21.4
4.20725 - 4.20775	12.51975 - 12.52025	108 - 138	1660 - 1710	5350 - 5460	22.01 - 23.12
5.677 - 5.683	12.57675 - 12.57725	156.52475 - 156.52525	1718.8 - 1722.2	7250 - 7750	23.6 - 24
6.215 - 6.218	13.36 - 13.41	156.7 - 156.9	2200 - 2300	8025 - 8500	31.2 - 31.8
6.26775 - 6.26825	16.42 - 16.423	240 - 285	2310 - 2390	9000 - 9200	36.43 - 36.5
6.31175 - 6.31225	16.69475 - 16.69525	322 - 335.4	2655 - 2900	9300 - 9500	Above 38.6

Reference numbers of test equipment used

HL 0446	HL 4360	HL 4933	HL 4956	HL 5902			
---------	---------	---------	---------	---------	--	--	--

Full description is given in Appendix A.



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.1 Radiated emission measurements at the low carrier frequency


TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION Vertical and Horizontal

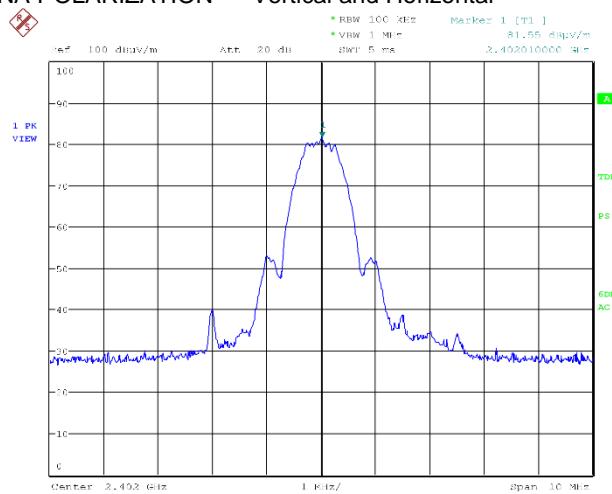

Date: 18.APR.2022 22:34:56

Plot 7.3.2 Radiated emission measurements at the mid carrier frequency

TEST SITE: Semi anechoic chamber
 TEST DISTANCE: 3 m
 ANTENNA POLARIZATION Vertical and Horizontal

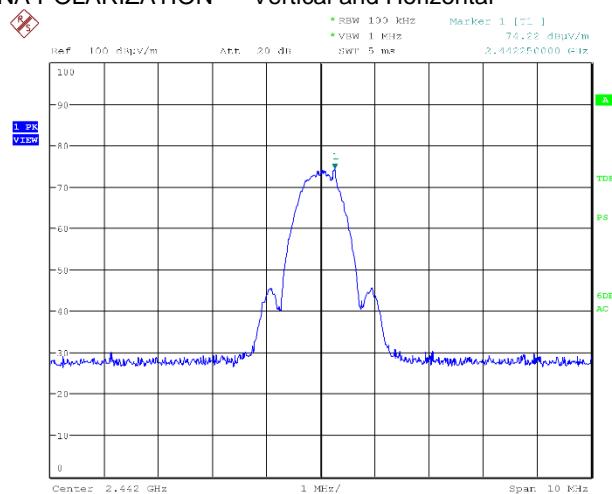

Date: 18.APR.2022 22:40:25




HERMON LABORATORIES

Test specification:	Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.3 Radiated emission measurements at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

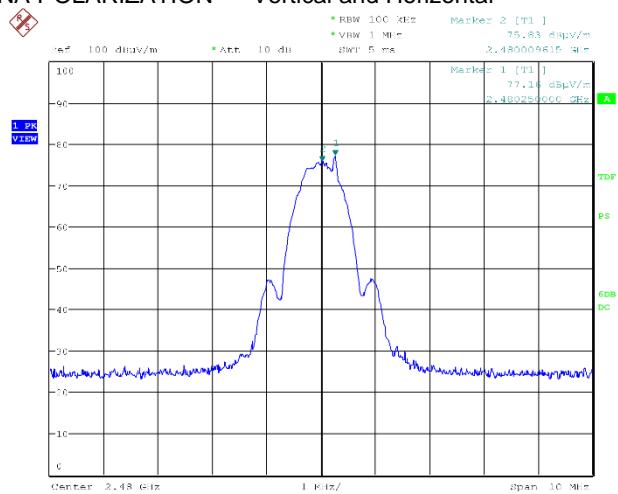

Date: 20.APR.2022 19:31:00




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.3.4 Radiated emission measurements from 9 kHz to 30 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

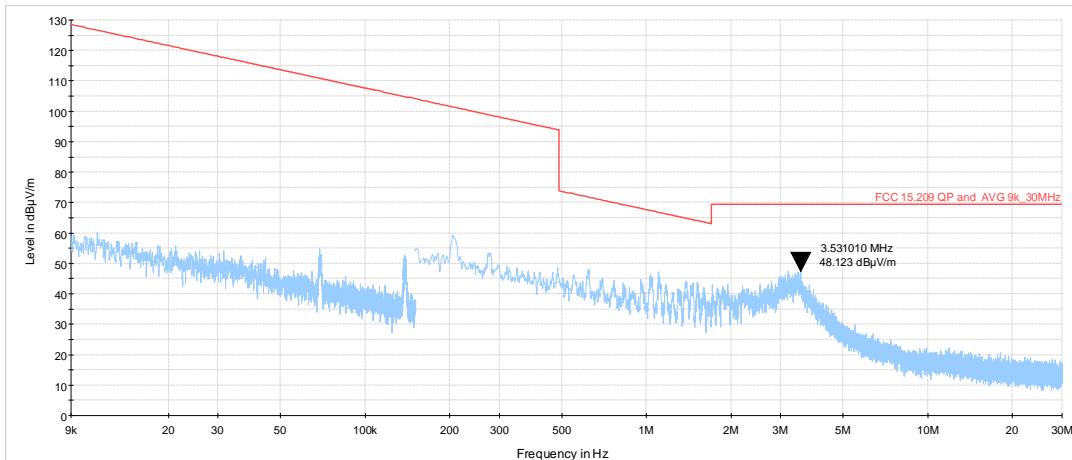

Plot 7.3.5 Radiated emission measurements from 9 kHz to 30 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

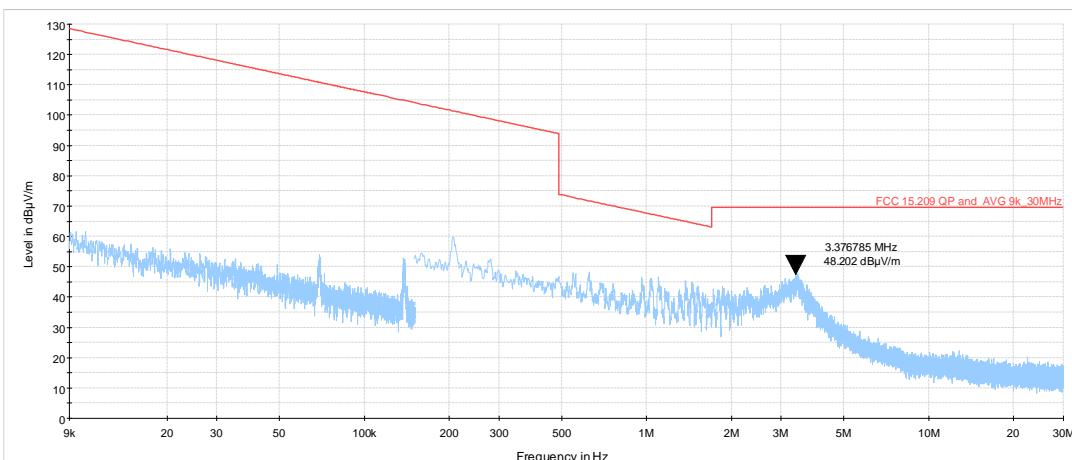




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.6 Radiated emission measurements from 9 kHz to 30 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical

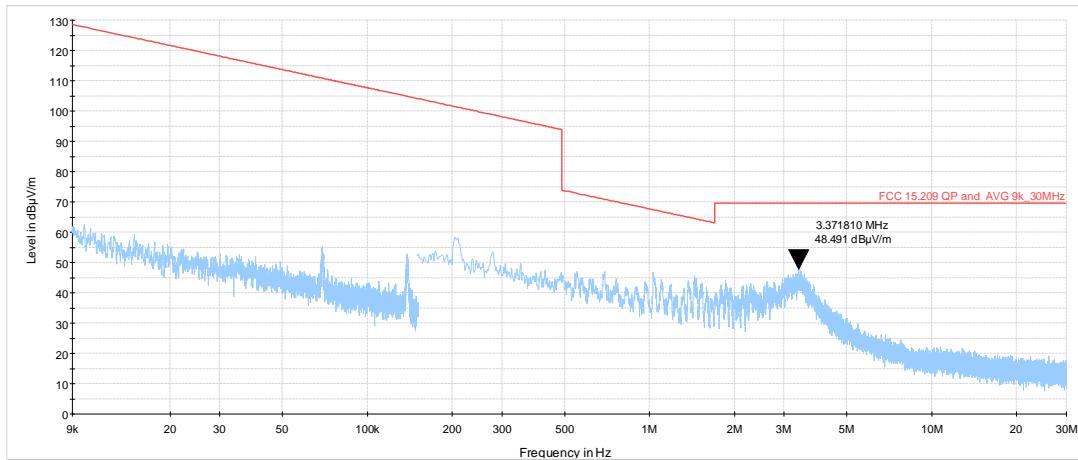




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.3.7 Radiated emission measurements from 30 to 1000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

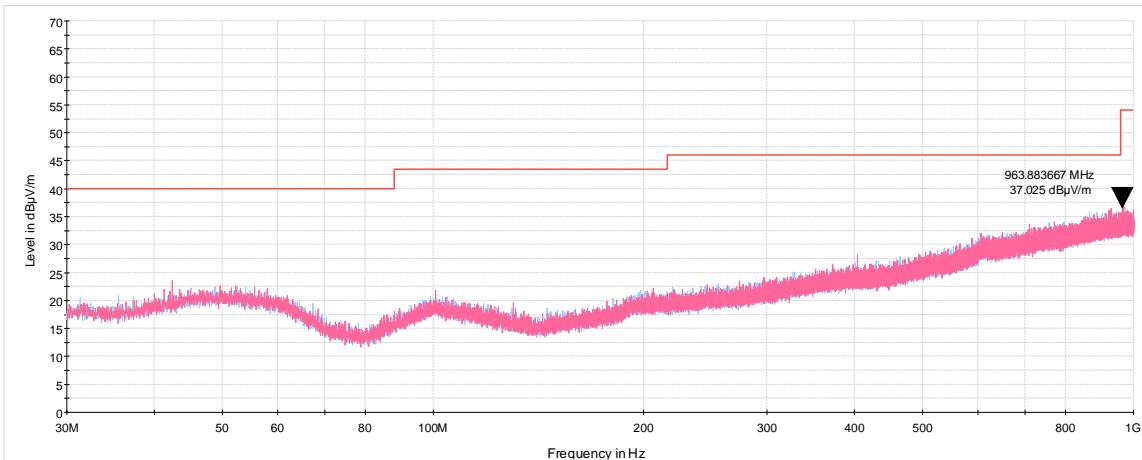

Plot 7.3.8 Radiated emission measurements from 30 to 1000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

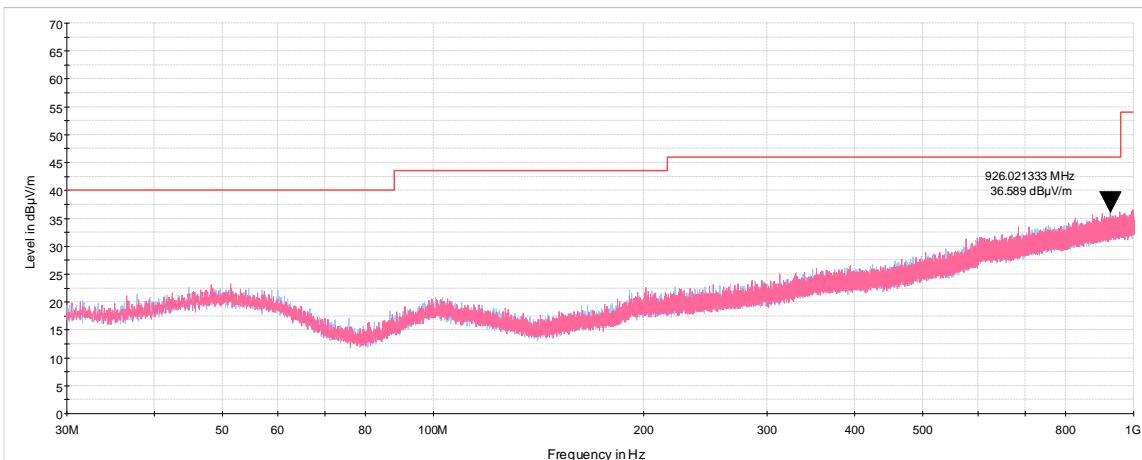




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.9 Radiated emission measurements from 30 to 1000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

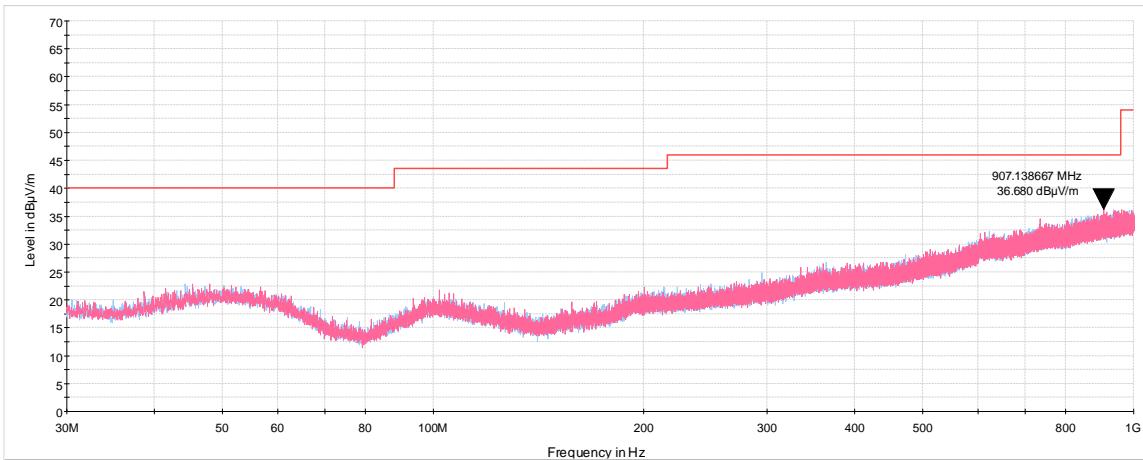



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:	Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.3.10 Radiated emission measurements from 1000 to 4400 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

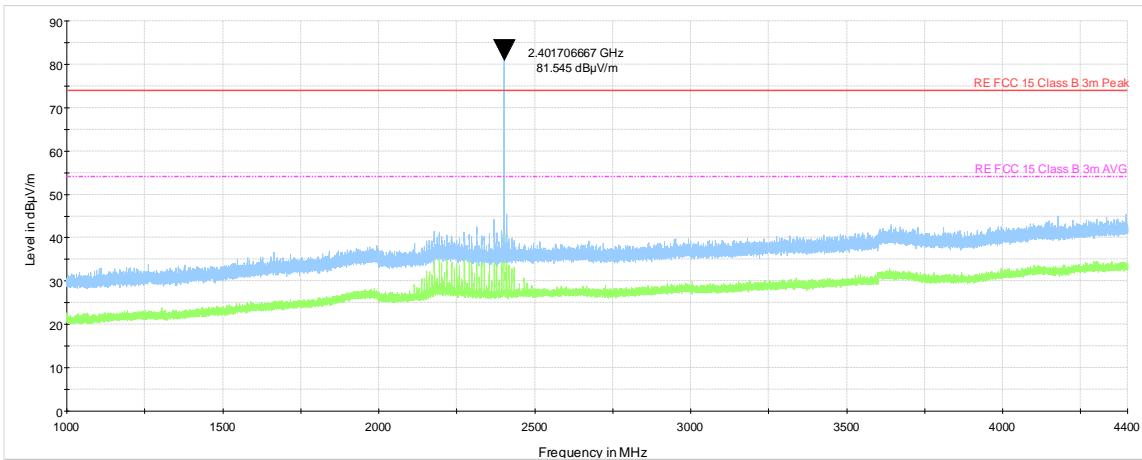

Plot 7.3.11 Radiated emission measurements from 1000 to 4400 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

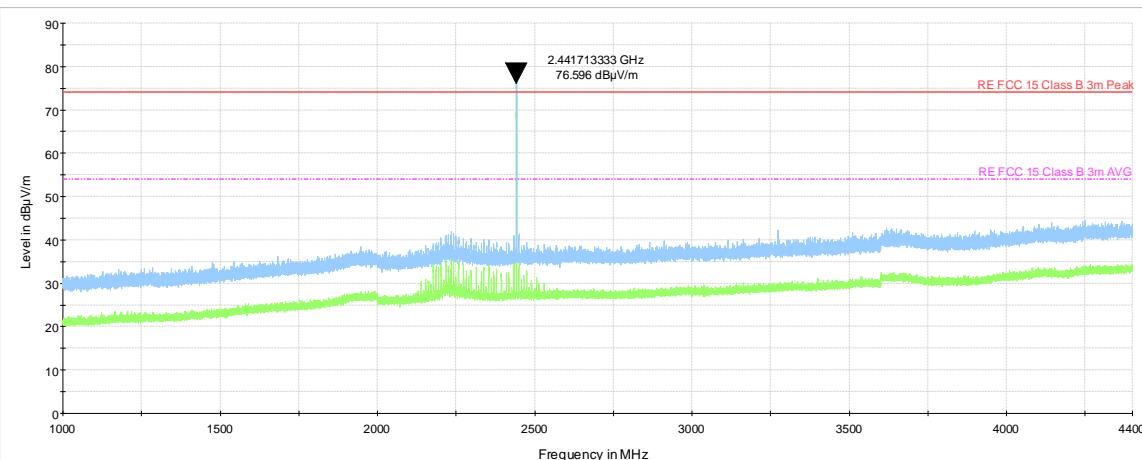




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.12 Radiated emission measurements from 1000 to 4400 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

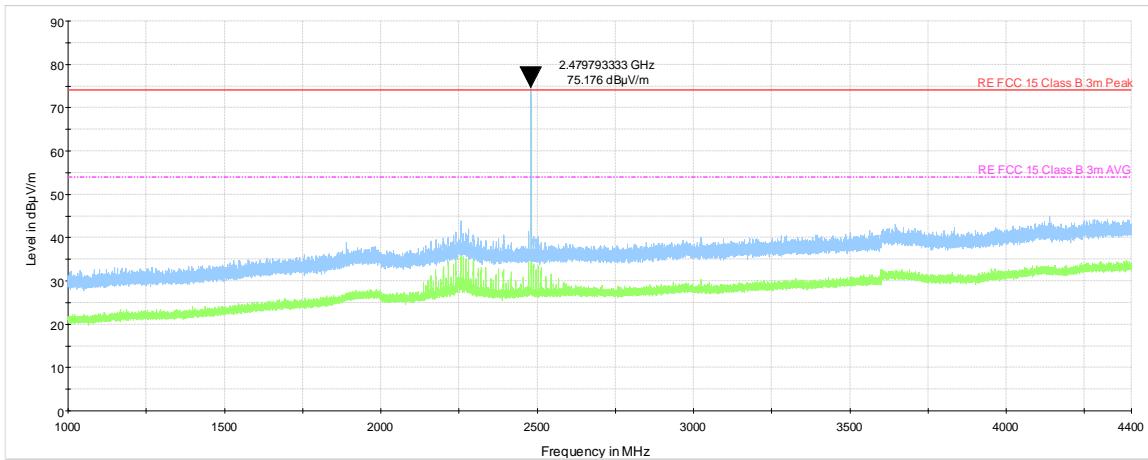




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.3.13 Radiated emission measurements from 4400 to 18000 MHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

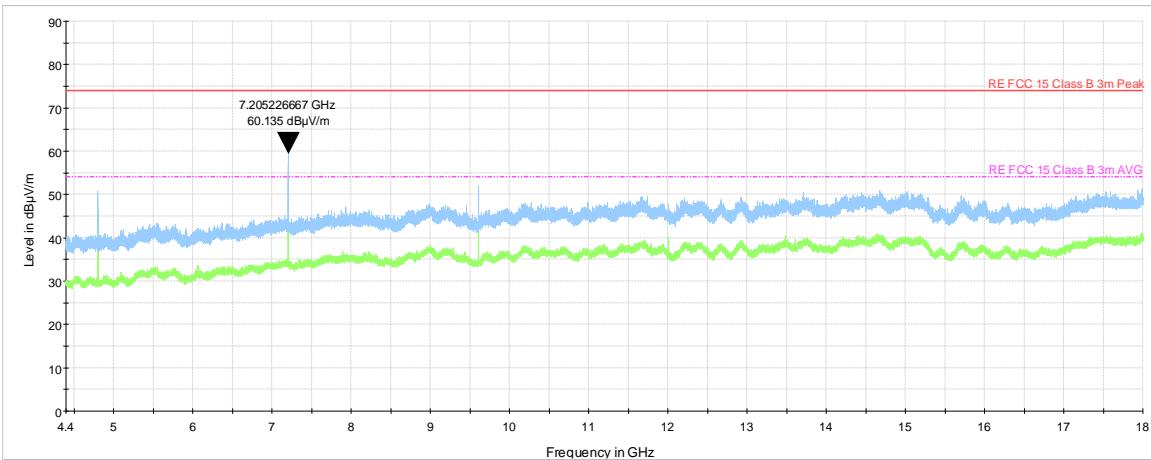

Plot 7.3.14 Radiated emission measurements from 4400 to 18000 MHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

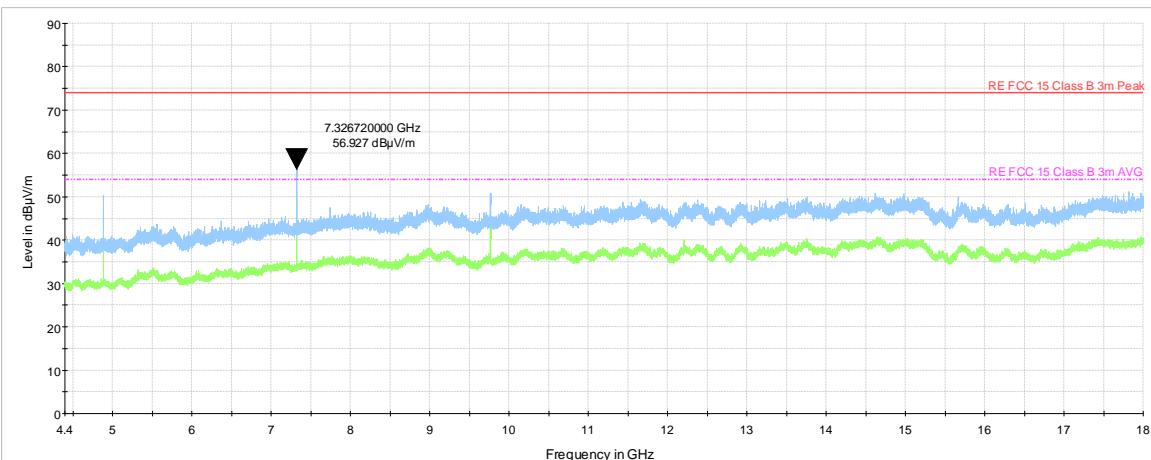




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance			Verdict: PASS
Date(s): 18-Apr-22 - 20-Apr-22			
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.15 Radiated emission measurements from 4400 to 18000 MHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

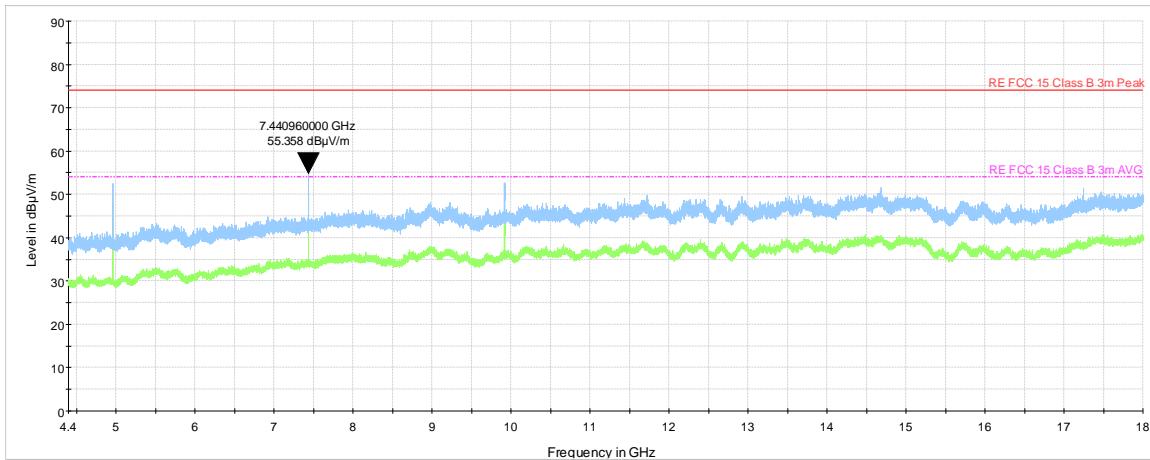



HERMON LABORATORIES


Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:	Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			


Plot 7.3.16 Radiated emission measurements from 18 GHz to 25 GHz at the low carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

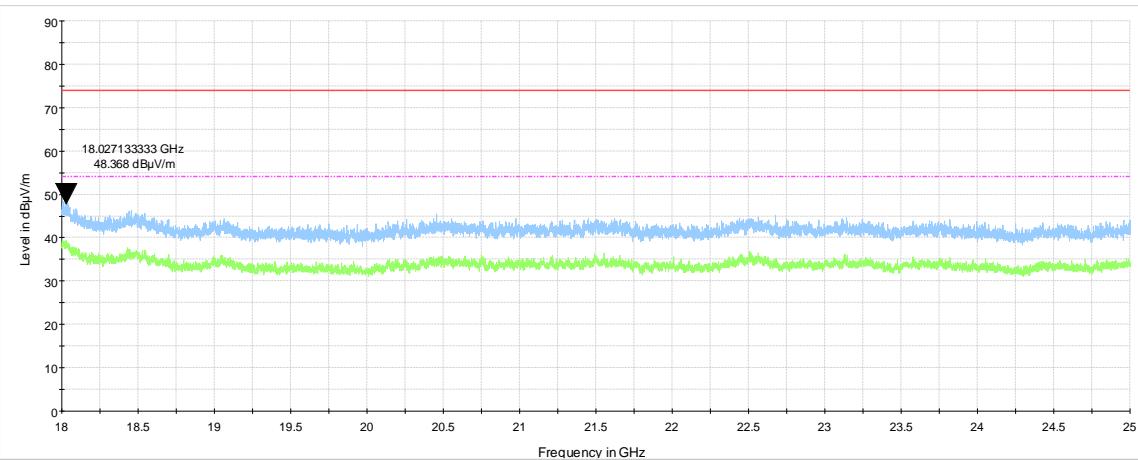

Plot 7.3.17 Radiated emission measurements from 18 GHz to 25 GHz at the mid carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

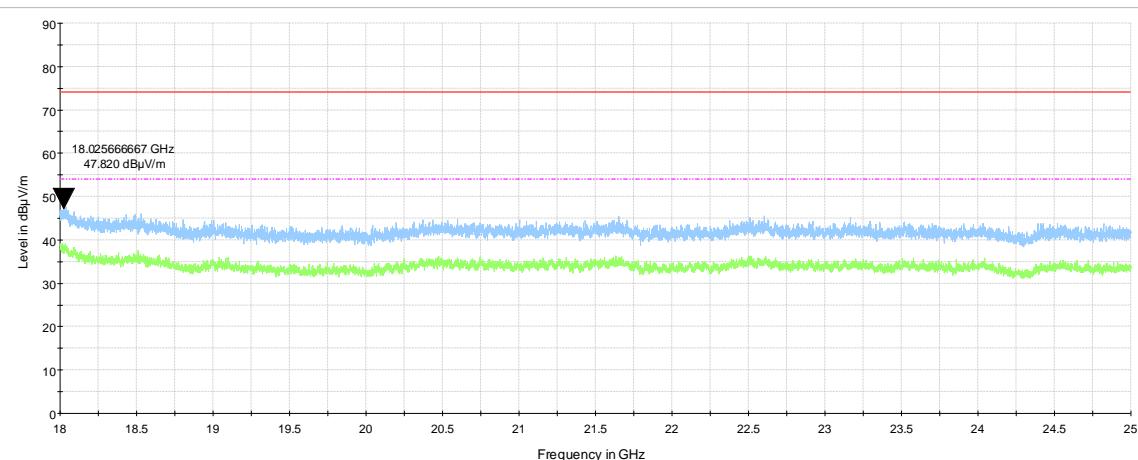




HERMON LABORATORIES

Test specification:	Section 15.247(d) / RSS-247 section 5.5, Radiated spurious emissions		
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance	Verdict:	PASS
Date(s):	18-Apr-22 - 20-Apr-22		
Temperature: 20 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.3.18 Radiated emission measurements from 18 GHz to 25 GHz at the high carrier frequency

TEST SITE: Semi anechoic chamber
TEST DISTANCE: 3 m
ANTENNA POLARIZATION: Vertical and Horizontal

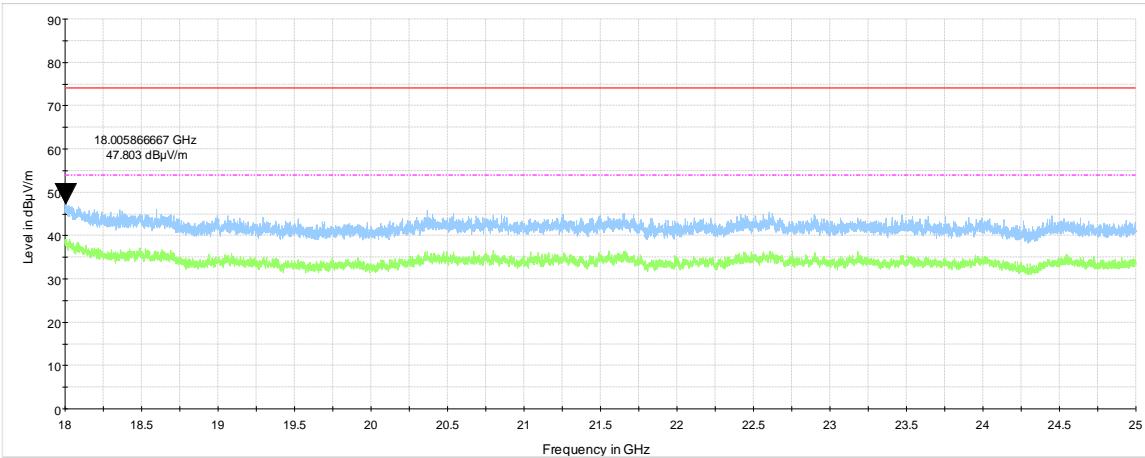



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure:	ANSI C63.10 section 11.12.1		
Test mode:	Compliance		
Date(s):	18-Apr-22		
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

7.4 Band edge radiated emissions

7.4.1 General

This test was performed to measure emissions, radiated from the EUT at the assigned frequency band edges. Specification test limits are given in Table 7.4.1.

Table 7.4.1 Band edge emission limits

Output power	Assigned frequency, MHz	Attenuation below carrier*, dBc	Field strength at 3 m within restricted bands, dB(µV/m)	
			Peak	Average
Peak	2400.0 – 2483.5	20.0	74.0	54.0

* - Band edge emission limit is provided in terms of attenuation below the peak of modulated carrier measured with the same resolution bandwidth.

7.4.2 Test procedure


- 7.4.2.1 The EUT was set up as shown in Figure 7.4.1, energized normally modulated at the maximum data rate and its proper operation was checked.
- 7.4.2.2 The EUT was adjusted to produce maximum available to end user RF output power at the lowest carrier frequency.
- 7.4.2.3 The spectrum analyzer span was set to capture the carrier frequency and associated modulation products. The resolution bandwidth was set wider than 1 % of the frequency span.
- 7.4.2.4 The spectrum analyzer was set in max hold mode and allowed trace to stabilize. The highest emission level within the authorized band was measured.
- 7.4.2.5 The maximum band edge emission and modulation product outside of the band were measured as provided in Table 7.4.2 and associated plots and referenced to the highest emission level measured within the authorized band.
- 7.4.2.6 The above procedure was repeated with the EUT adjusted to produce maximum RF output power at the highest carrier frequency.
- 7.4.2.7 The above procedure was repeated with the frequency hopping function enabled.



HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.4.1 Band edge emission test setup

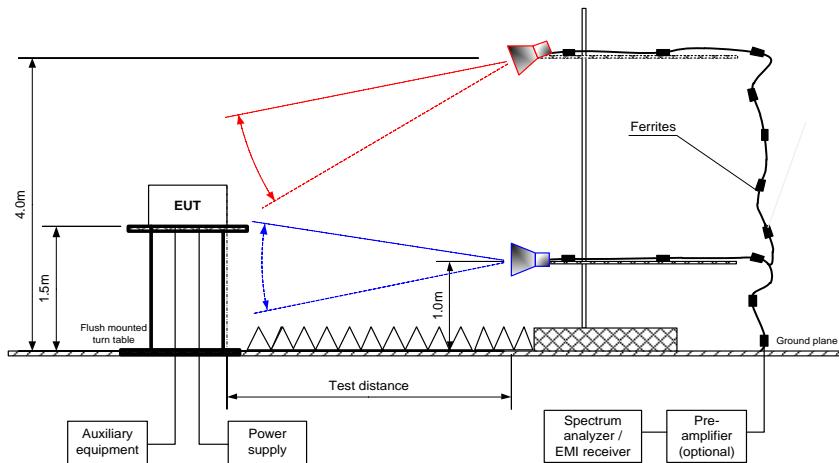



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions						
Test procedure: ANSI C63.10 section 11.12.1						
Test mode: Compliance					Verdict:	PASS
Date(s): 18-Apr-22						
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa		Power: 3.7 VDC		
Remarks:						

Table 7.4.2 Band edge emission outside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz

DETECTOR USED: Peak

TRANSMITTER OUTPUT POWER SETTINGS: Maximum

RESOLUTION BANDWIDTH: 100 kHz

VIDEO BANDWIDTH: \geq RBW

MODULATION/BITRATE: GFSK / 1 Mbps

Frequency, MHz	Band edge emission, dBm	Emission at carrier, dBm	Attenuation below carrier, dBc	Limit, dBc	Margin, dB*	Verdict
2400.000	36.96	77.50	40.54	20.0	20.54	Pass

*- Margin = Attenuation below carrier – specification limit.

Table 7.4.3 Band edge emission inside restricted bands test results

ASSIGNED FREQUENCY RANGE: 2400.0 – 2483.5 MHz

DETECTOR USED: Peak

TRANSMITTER OUTPUT POWER SETTINGS: Maximum

VIDEO BANDWIDTH: \geq RBW

MODULATION/BITRATE: GFSK / 1 Mbps

Frequency, MHz	Peak field strength(VBW=3 MHz)			Average field strength(VBW=1 kHz)			Verdict
	Measured, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB**	Measured, dB(μ V/m)	Limit, dB(μ V/m)	Margin, dB**	
2313.95	NA	74.0	NA	37.90	54.0	-16.10	Pass
2354.10	44.18	74.0	-29.82	NA	54.0	NA	Pass
2487.89	NA	74.0	NA	34.50	54.0	-19.50	Pass
2496.14	40.62	74.0	-33.38	NA	54.0	NA	Pass

Reference numbers of test equipment used

HL 4933	HL 5410	HL 5902					
---------	---------	---------	--	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.1 The highest emission level within restricted band at low carrier frequency

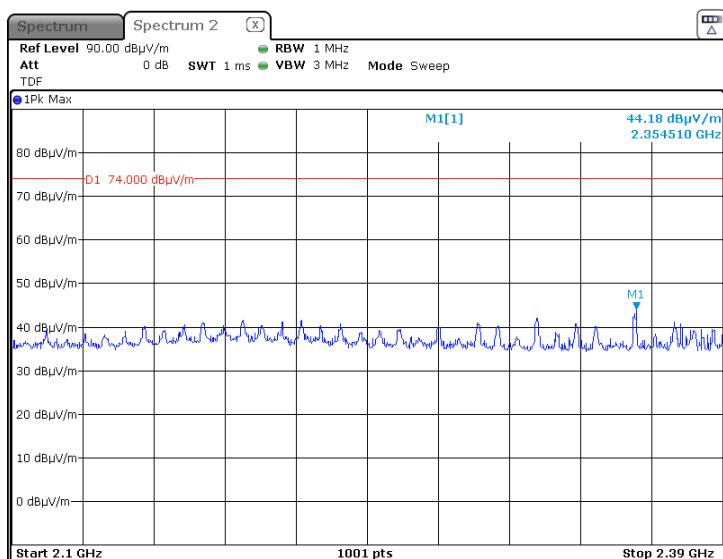




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.2 The highest emission level outside restricted band at low carrier frequency

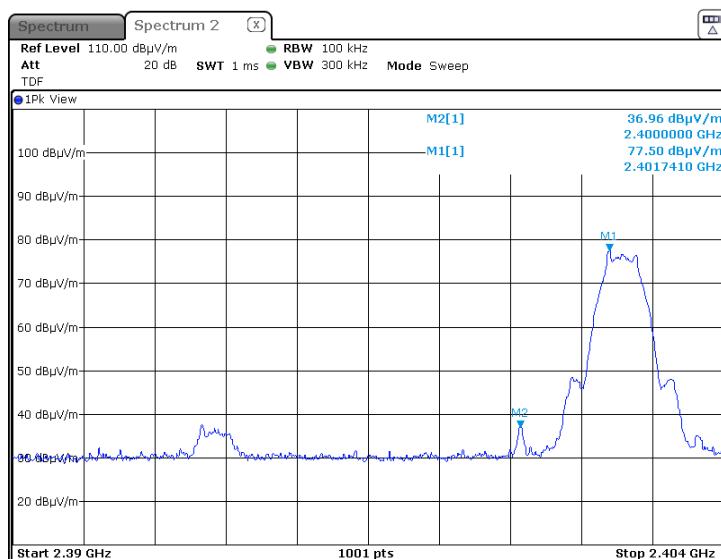




HERMON LABORATORIES

Test specification: Section 15.247(d) / RSS-247 section 5.5, Band edge emissions			
Test procedure: ANSI C63.10 section 11.12.1			
Test mode: Compliance		Verdict: PASS	
Date(s): 18-Apr-22			
Temperature: 20 °C	Relative Humidity: 50 %	Air Pressure: 1016 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.4.3 The highest emission level within restricted band at high carrier frequency

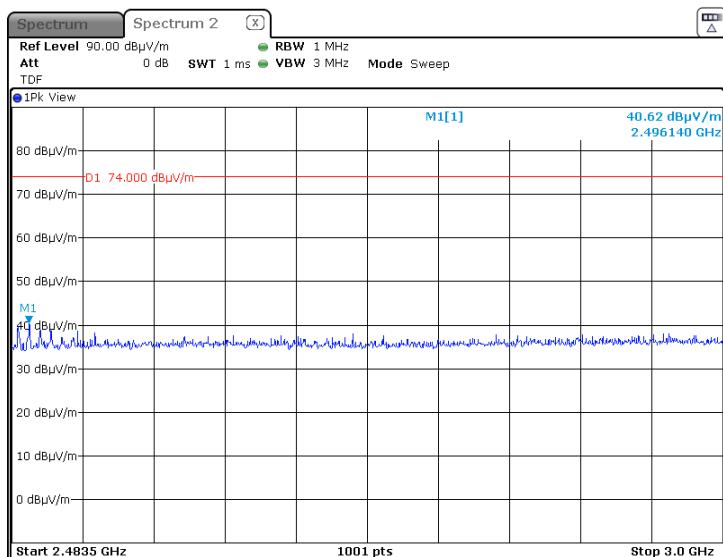



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:	Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
Test procedure:	ANSI C63.10 section 11.10.2		
Test mode:	Compliance		
Date(s):	17-Apr-22		
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

7.5 Peak spectral power density

7.5.1 General

This test was performed to measure the peak spectral power density radiated by the transmitter RF antenna. Specification test limits are given in Table 7.5.1.

Table 7.5.1 Peak spectral power density limits

Assigned frequency range, MHz	Measurement bandwidth, kHz	Peak spectral power density, dBm	Equivalent field strength limit @ 3m, dB(μ V/m)*
2400.0 – 2483.5	3.0	8.0	103.2

* - Equivalent Peak spectral power density limit was calculated from the peak spectral power density as follows: $E = \sqrt{30 \times P} / r$, where P is peak spectral power density and r is antenna to EUT distance in meters.

7.5.2 Test procedure for Peak spectral power density measurements


- 7.5.2.1 The EUT was set up as shown in Figure 7.5.1, energized and its proper operation was checked.
- 7.5.2.2 The EUT was adjusted to produce maximum available to end user RF output power.
- 7.5.2.3 The Peak spectral power density of the EUT carrier frequency was measured with antenna connected to spectrum analyzer/ EMI receiver. To find maximum radiation the turntable was rotated 360° and the measuring antenna height was swept in both vertical and horizontal polarizations.
- 7.5.2.4 The frequency span of spectrum analyzer was set to capture the entire 6 dB band of the transmitter, in peak hold mode with resolution bandwidth set to 3.0 kHz, video bandwidth wider than resolution bandwidth, auto sweep time and sufficient number of sweeps was allowed for trace stabilization. The spectrum lines spacing was verified to be wider than 3 kHz. Otherwise the resolution bandwidth was reduced until individual spectrum lines were resolved and the power of individual spectrum lines was integrated over 3 kHz band.
- 7.5.2.5 The peak of emission was zoomed with span set just wide enough to capture the emission peak area and sweep time was set equal to span width divided by resolution bandwidth. Spectrum analyzer was set in peak hold mode, sufficient number of sweeps was allowed for trace stabilization and peak spectral power density was measured as provided in Table 7.5.2 and associated plots.



HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Figure 7.5.1 Setup for carrier Peak spectral power density measurements

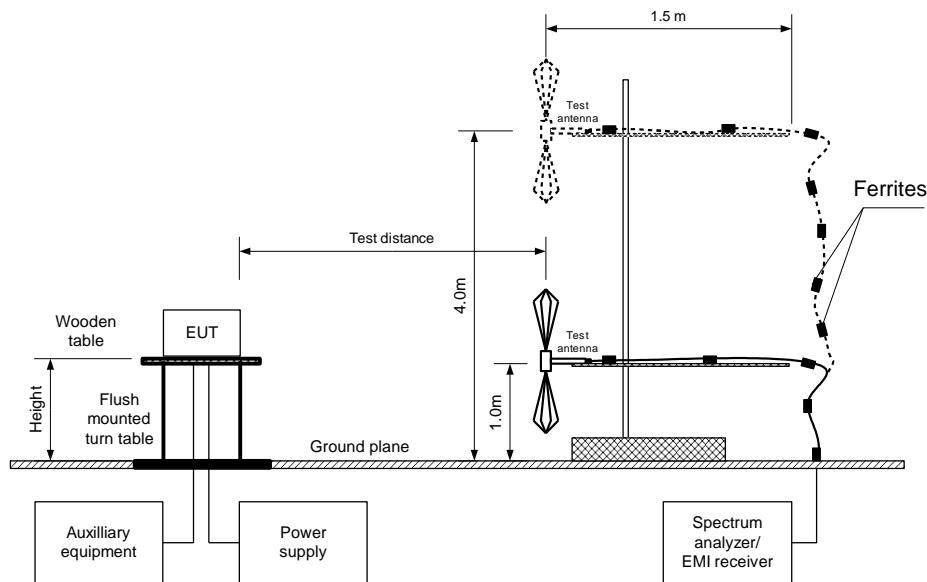



HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx

Date of Issue: 7-Jun-23

Test specification:		Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density		
Test procedure:		ANSI C63.10 section 11.10.2		
Test mode:	Compliance		Verdict:	PASS
Date(s):	17-Apr-22			
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC	
Remarks:				

Table 7.5.2 Peak spectral power density measurement of peak spectral power density

ASSIGNED FREQUENCY:	2400.0 – 2483.5 MHz
TEST DISTANCE:	3 m
TEST SITE:	Semi anechoic chamber
EUT HEIGHT:	1.5 m
DETECTOR USED:	Peak
RESOLUTION BANDWIDTH:	3 kHz
VIDEO BANDWIDTH:	10 KHz
TEST ANTENNA TYPE:	Double ridged guide (above 1000 MHz)
TRANSMITTER OUTPUT POWER SETTINGS:	Maximum

MODULATION/BITRATE: GFSK / 1 Mbps

Frequen cy, MHz	Peak spectral power density, dB(µV/m)	EUT antenna gain, dBi	Limit, dB(µV/m)	Margin, dB*	Antenna polarization	Antenna height, m	Turn-table position**, degrees	Verdict
2402.0	67.02	5.05	103.2	-41.23	Horizontal	1.70	-15	Pass
2442.0	59.56	5.05	103.2	-48.69	Horizontal	1.50	30	Pass
2480.0	64.58	5.05	103.2	-43.67	Horizontal	1.40	0	Pass

*- Margin = Peak spectral power density - EUT antenna gain – Limit

**- EUT front panel refer to 0 degrees position of turntable.

Reference numbers of test equipment used

HL 4355	HL 4933	HL 5410	HL 5902				
---------	---------	---------	---------	--	--	--	--

Full description is given in Appendix A.




HERMON LABORATORIES

Report ID: NYXRAD_FCC.46250_BLE_Rev2.docx


Date of Issue: 7-Jun-23

Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.1 Peak spectral power density of carrier at low frequency

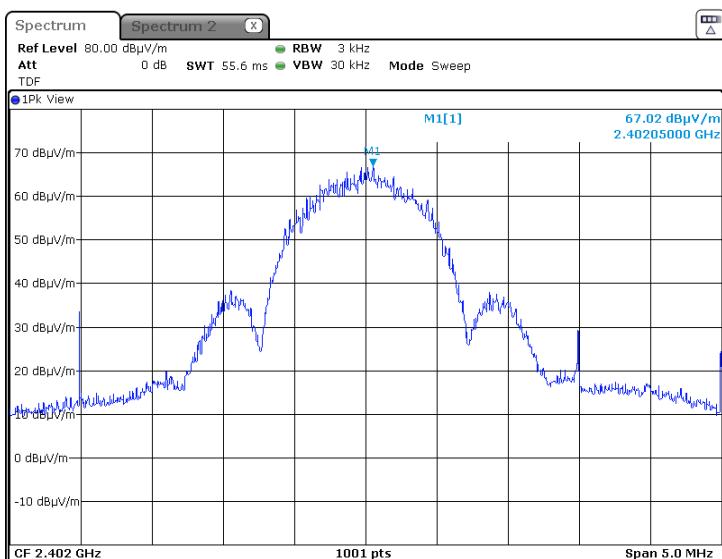

Plot 7.5.2 Peak spectral power density of carrier at mid frequency

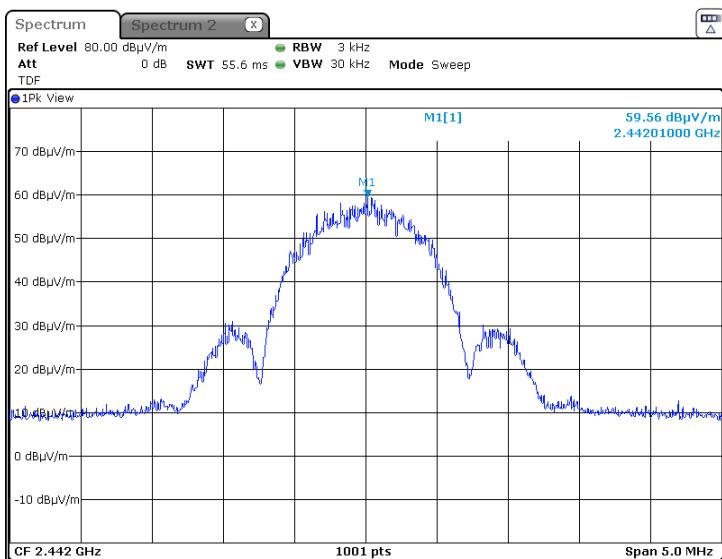




HERMON LABORATORIES

Test specification: Section 15.247(e) / RSS-247 section 5.2(2), Maximum power spectral density			
Test procedure: ANSI C63.10 section 11.10.2			
Test mode: Compliance		Verdict: PASS	
Date(s): 17-Apr-22			
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

Plot 7.5.3 Peak spectral power density of carrier at high frequency

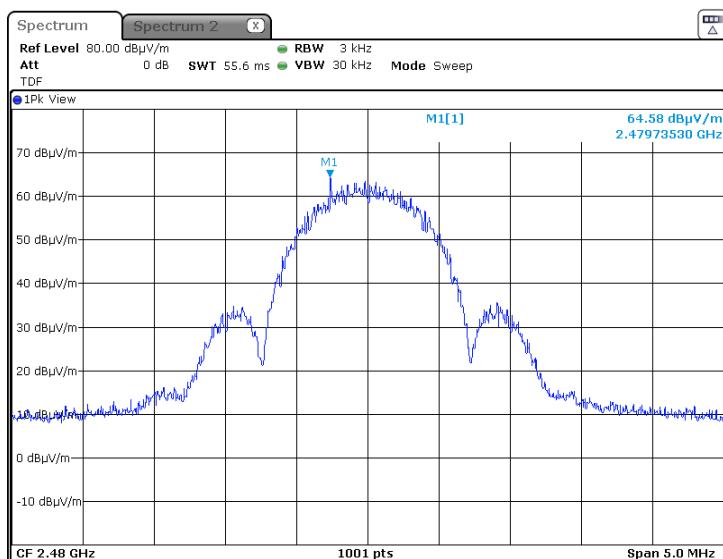



HERMON LABORATORIES

Test specification:	Section 15.203 / RSS Gen Section 6.8, Antenna requirements		
Test procedure:	Visual inspection/supplier declaration		
Test mode:	Compliance	Verdict:	PASS
Date(s):	26-Apr-22		
Temperature: 19 °C	Relative Humidity: 45 %	Air Pressure: 1011 hPa	Power: 3.7 VDC
Remarks:			

7.6 Antenna requirements

The EUT was verified for compliance with antenna requirements. A transmitter shall be designed to ensure that no antenna other than that furnished by the responsible party will be used with the device. It may be either permanently attached or employs a unique antenna connector for every antenna proposed for use with the EUT. This requirement does not apply to professionally installed transmitters.

The rationale for compliance with the above requirements was either visual inspection results or supplier declaration. The summary of results is provided in Table 7.6.1.

Table 7.6.1 Antenna requirements

Requirement	Rationale	Verdict
The transmitter antenna is permanently attached	Visual inspection	Comply
The transmitter employs a unique antenna connector	NA	
The transmitter requires professional installation	NA	



HERMON LABORATORIES

8 APPENDIX A Test equipment and ancillaries used for tests

HL No	Description	Manufacturer	Model	Ser. No.	Last Cal./Check	Due Cal./Check
0446	Antenna, Loop, Active, 10 (9) kHz - 30 MHz	EMCO	6502	2857	28-Feb-21	28-Feb-22
3903	Microwave Cable Assembly, 40.0 GHz, 1.5 m, SMA/SMA	Huber-Suhner	SUCOFL EX 102A	1226/2A	06-Apr-21	06-Apr-22
4355	Signal and Spectrum Analyzer, 9 kHz to 7 GHz	Rohde & Schwarz	FSV 7	101630	20-Sep-21	20-Sep-22
4360	EMI Test Receiver, 20 Hz to 40 GHz.	Rohde & Schwarz	ESU40	100322	13-Jan-22	13-Jan-23
4933	Active Horn Antenna, 1 GHz to 18 GHz	COM-POWER CORPORATION	AHA-118	701046	13-Jan-22	13-Jan-23
4956	Active horn antenna, 18 to 40 GHz	COM-POWER CORPORATION	AHA-840	105004	26-Jan-21	26-Jan-22
5112	RF cable, 40 GHz, 5.5 m, K-type	Huber-Suhner	SF102EA/11SK/11S K/5500M M	502494/2E A	19-Apr-21	19-Apr-22
5288	Trilog Antenna, 25 MHz - 8 GHz, 100W	Frankonia	ALX-8000E	00809	08-Feb-19	08-Mar-22
5902	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000	NA	16-Jan-22	16-Jan-23
5905	RF cable, 18 GHz, 6.0m, N-type	Huber-Suhner	SF126EA/11N/11N/6000		16-Jan-22	16-Jan-23



HERMON LABORATORIES

9 APPENDIX B Test equipment correction factors

HL 0446: Active Loop Antenna
EMCO, model: 6502, s/n 2857

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
10	-33.4	±1.0
20	-37.8	±1.0
50	-40.5	±1.0
75	-41.0	±1.0
100	-41.2	±1.0
150	-41.2	±1.0
250	-41.1	±1.0
500	-41.2	±1.0
750	-41.3	±1.0
1000	-41.3	±1.0

Frequency,	Measured antenna factor, dBs/m	Measurement uncertainty, dB
2000	-41.4	±1.0
3000	-41.4	±1.0
4000	-41.5	±1.0
5000	-41.5	±1.0
10000	-41.7	±1.0
15000	-42.1	±1.0
20000	-42.7	±1.0
25000	-44.2	±1.0
30000	-45.8	±1.0

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ A/m.HL 4933: Active Horn Antenna
COM-POWER CORPORATION, model: AHA-118, s/n 701046

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
1000	-16.1
1500	-15.1
2000	-10.9
2500	-11.9
3000	-11.1
3500	-10.6
4000	-8.6
4500	-8.3
5000	-5.9
5500	-5.7
6000	-3.3
6500	-4.0
7000	-2.2
7500	-1.7
8000	1.1
8500	-0.8
9000	-1.5
9500	-0.2

Frequency, MHz	Measured antenna factor (with preamplifier), dB/m
10000	1.8
10500	1.0
11000	0.3
11500	-0.5
12000	3.1
12500	1.4
13000	-0.3
13500	-0.4
14000	2.5
14500	2.2
15000	1.9
15500	0.5
16000	2.1
16500	1.2
17000	0.6
17500	3.1
18000	4.2

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

HL 5112 RF cable, 40 GHz, 5.5 m, K-type,
Huber-Suhner, SF102EA/11SK/11SK/5500MM, s/n 502494/2EA, HL 5112

Insertion loss

Set / Applied, MHz	Measured, dB	Uncertainty, dB
100	0.70	±0.07
200	0.99	±0.08
300	1.21	±0.08
500	1.55	±0.08
1000	2.18	±0.08
1500	2.67	±0.08
2000	3.09	±0.08
2500	3.46	±0.10
3000	3.80	±0.10
3500	4.12	±0.10
4000	4.41	±0.10
4500	4.69	±0.10
5000	4.95	±0.10
5500	5.20	±0.10
6000	5.45	±0.10
6500	5.68	±0.10
7000	5.91	±0.10
7500	6.13	±0.10
8000	6.34	±0.10
8500	6.56	±0.10
9000	6.76	±0.10
9500	6.95	±0.10
10000	7.16	±0.10
10500	7.33	±0.10
11000	7.51	±0.10
11500	7.68	±0.10
12000	7.85	±0.10
12500	8.02	±0.13
13000	8.17	±0.13
13500	8.31	±0.13
14000	8.46	±0.13
14500	8.61	±0.18
15000	8.76	±0.18
15500	8.91	±0.18
16000	9.07	±0.18
16500	9.22	±0.18
17000	9.36	±0.18
17500	9.51	±0.18
18000	9.66	±0.18
18500	9.81	±0.23
19000	9.95	±0.23
19500	10.10	±0.23

Set / Applied, MHz	Measured, dB	Uncertainty, dB
20000	10.25	±0.23
20500	10.38	±0.23
21000	10.52	±0.23
21500	10.67	±0.23
22000	10.84	±0.23
22500	11.00	±0.29
23000	11.10	±0.29
23500	11.20	±0.29
24000	11.32	±0.29
24500	11.42	±0.29
25000	11.59	±0.23
25500	11.70	±0.23
26000	11.85	±0.23
26500	11.97	±0.23
27000	12.07	±0.33
27500	12.17	±0.33
28000	12.26	±0.40
28500	12.38	±0.40
29000	12.50	±0.40
29500	12.63	±0.40
30000	12.75	±0.40
30500	12.82	±0.33
31000	12.93	±0.33
31500	13.09	±0.33
32000	13.22	±0.33
32500	13.35	±0.33
33000	13.48	±0.33
33500	13.60	±0.33
34000	13.72	±0.33
34500	13.80	±0.40
35000	13.92	±0.40
35500	14.01	±0.40
36000	14.12	±0.40
36500	14.23	±0.40
37000	14.34	±0.33
37500	14.44	±0.33
38000	14.57	±0.33
38500	14.72	±0.33
39000	14.82	±0.33
39500	14.94	±0.33
40000	15.08	±0.47



HERMON LABORATORIES

HL 5288: Trilog Antenna
Frankonia, model: ALX-8000E, s/n: 00809
30-1000 MHz

Frequency, MHz	Antenna factor, dB/m
30	14.96
35	15.33
40	16.37
45	17.56
50	17.95
60	16.87
70	13.22
80	10.56
90	13.61
100	15.46
120	14.03
140	12.23

Frequency, MHz	Antenna factor, dB/m
160	12.67
180	13.34
200	15.40
250	16.42
300	17.28
400	19.98
500	21.11
600	22.90
700	24.13
800	25.25
900	26.35
1000	27.18

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.

above 1000 MHz

Frequency, MHz	Antenna factor, dB/m
1000	26.9
1100	28.1
1200	28.4
1300	29.6
1400	29.1
1500	30.4
1600	30.7
1700	31.5
1800	32.3
1900	32.6
2000	32.5
2100	32.9
2200	33.5
2300	33.2
2400	33.7
2500	34.6
2600	34.7
2700	34.6
2800	35.0
2900	35.5
3000	36.2
3100	36.8
3200	36.8
3300	37.0
3400	37.5
3500	38.2

Frequency, MHz	Antenna factor, dB/m
3600	38.9
3700	39.4
3800	39.4
3900	39.6
4000	39.7
4100	39.8
4200	40.5
4300	40.9
4400	41.1
4500	41.4
4600	41.3
4700	41.6
4800	41.9
4900	42.3
5000	42.7
5100	43.0
5200	42.9
5300	43.5
5400	43.6
5500	44.3
5600	44.7
5700	45.0
5800	45.0
5900	45.3
6000	45.9

The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.



HERMON LABORATORIES

10 APPENDIX C Measurement uncertainties

Expanded uncertainty at 95% confidence in Hermon Labs EMC measurements

Test description	Expanded uncertainty
Conducted carrier power at RF antenna connector	Below 12.4 GHz: ± 1.7 dB 12.4 GHz to 40 GHz: ± 2.3 dB
Conducted emissions at RF antenna connector	9 kHz to 2.9 GHz: ± 2.6 dB 2.9 GHz to 6.46 GHz: ± 3.5 dB 6.46 GHz to 13.2 GHz: ± 4.3 dB 13.2 GHz to 22.0 GHz: ± 5.0 dB 22.0 GHz to 26.8 GHz: ± 5.5 dB 26.8 GHz to 40.0 GHz: ± 4.8 dB
Occupied bandwidth	± 8.0 %
Duty cycle, timing (Tx ON / OFF) and average factor measurements	± 1.0 %
Conducted emissions with LISN	9 kHz to 150 kHz: ± 3.9 dB 150 kHz to 30 MHz: ± 3.8 dB
Radiated emissions at 3 m measuring distance Horizontal polarization	Biconilog antenna: ± 5.3 dB Biconical antenna: ± 5.0 dB Log periodic antenna: ± 5.3 dB Double ridged horn antenna: ± 5.3 dB Biconilog antenna: ± 6.0 dB Biconical antenna: ± 5.7 dB Log periodic antenna: ± 6.0 dB Double ridged horn antenna: ± 6.0 dB
Vertical polarization	

Hermon Laboratories is accredited by A2LA for calibration according to present requirements of ISO/IEC 17025 and NCSL Z540-1. The accreditation is granted to perform calibration of parameters that are listed in the Scope of Hermon Laboratories Accreditation.

Hermon Laboratories calibrates its reference and transfer standards by calibration laboratories accredited to ISO/IEC 17025 by a mutually recognized Accreditation Body or by a recognized national metrology institute. All reference and transfer standards used in the calibration system are traceable to national or international standards.

In-house calibration of all test and measurement equipment is performed on a regular basis according to Hermon Laboratories calibration procedures, manufacturer calibration/verification procedures or procedures defined in the relevant standards. The Hermon Laboratories test and measurement equipment is calibrated within the tolerances specified by the manufacturers and/or by the relevant standards.



HERMON LABORATORIES

11 APPENDIX D Test laboratory description

Tests were performed at Hermon Laboratories Ltd., which is a fully independent, private, EMC, Radio, Safety, Environmental and Telecommunication testing facility.

Hermon Laboratories is recognized and accredited by the Federal Communications Commission (USA) for relevant parts of Code of Federal Regulations 47 (CFR 47), Test Firm Registration Number is 927748, Designation Number is IL1001; Recognized by Innovation, Science and Economic Development Canada for wireless and terminal testing (ISED), ISED #2186A, CAB identifier is IL1001; Certified by VCCI, Japan (the registration numbers for OATS are R-10808 for RE measurements below 1 GHz, G-20112 for RE measurements above 1 GHz, R-11082 for anechoic chamber for RE measurements below 1 GHz, G-10869 for RE measurements above 1 GHz, C-10845 for conducted emissions site and T-11606 for conducted emissions at telecommunication ports).

The laboratory is accredited by American Association for Laboratory Accreditation (USA) according to ISO/IEC 17025 for electromagnetic compatibility, product safety, telecommunications testing, environmental simulation and calibration (for exact scope please refer to Certificate No. 839.01, 839.03 and 839.04).

Address: P.O. Box 23, Binyamina 3055001, Israel.
Telephone: +972 4628 8001
Fax: +972 4628 8277
e-mail: mail@hermonlabs.com
website: www.hermonlabs.com

Person for contact: Mr. Michael Nikishin, EMC&Radio group manager



HERMON LABORATORIES

12 APPENDIX E

Specification references

FCC 47CFR part 15: 2020

Radio Frequency Devices

ANSI C63.10: 2013

American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2: 2017

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence- Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5: 2018

General Requirements and Information for the Certification of Radiocommunication Equipment



HERMON LABORATORIES

13 APPENDIX F Abbreviations and acronyms

AC	alternating current
A/m	ampere per meter
AM	amplitude modulation
AVRG	average (detector)
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
dB(µV)	decibel referred to one microvolt
dB(µV/m)	decibel referred to one microvolt per meter
dB(µA)	decibel referred to one microampere
DC	direct current
EUT	equipment under test
F	frequency
GHz	gigahertz
GND	ground
H	height
HL	Hermon laboratories
Hz	hertz
k	kilo
kHz	kilohertz
LO	local oscillator
m	meter
MHz	megahertz
min	minute
mm	millimeter
ms	millisecond
µs	microsecond
NA	not applicable
OATS	open area test site
Ω	Ohm
PS	power supply
QP	quasi-peak
RE	radiated emission
RF	radio frequency
rms	root mean square
Rx	receive
s	second
T	temperature
Tx	transmit
V	volt

END OF DOCUMENT