

EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510 Date of issue: 2010-02-03



Test Report
acc. to the relevant standard
47 CFR Part 15 C – Intentional Radiators
Measurement Procedure:
ANSI C63.4 - 2003
relating to
Advanced ID Asia Engineering Co. Ltd
RFID Reader ST510 / PR510

Measurement of Radio- Noise Emissions from Low- Voltage Electrical and Electronic Equipment Technical characteristics and test methods for radio equipment in the frequency range 9 kHz to 40 GHz

Fax: +49 2207 9689-20

http://www.dudde.com



Date of issue: 2010-02-03 FCC ID: VLUST510

Manufacturer's details	
Manufacturer	Advanced ID Asia Engineering Co. Ltd.
Manufacturer's grantee code	VLU
Manufacturer's address	116 Moo 3 T. Maekhue, A. Doisaket
	Chiang Mai 50220
	Thailand
	Mr. Gottfried Auer
	Phone: +66 811738779
	Fax: +66 53387319
	E-mail: gottfried@aae.co.th
Relevant standard used	47 CFR Part 15C - Intentional Radiators
	ANSI C63.4-2003

Test Report prepared by	
Technical engineer	Ralf Trepper
	m.dudde hochfrequenz-technik (laboratory)
	Rottland 5a
	51429 Bergisch Gladbach
	Germany
	Phone: +49 2207 96890
	Fax: +49 2207 968920
	E-mail: m.duddelabor@dudde.com

Equipment Under Test (EUT)		
Equipment category	FHSS Transceiver	
Trade name	ADVANCED ID	
Type designation	ST510USB / PR510	
Serial no.	20522300911000002 / 3052300911000002	
Variants	USB Reader (ST510USB)	
	Pocket Reader (PR510)	



FCC ID: VLUST510

Date of issue: 2010-02-03

# 1. Test results

CFR Section	Report Chapter	Requirements Headline	Т	'est resu	llt
15.203	11.1	Antenna requirement	pass	fail	n.t.
15.205(a)	11.2	Operation in the restricted bands	pass	fail	n.t.
15.209(a)	11.4	Radiated emissions	pass	<del>fail</del>	n.t.
15.247(a)(1)(i)	11.5	Channel occupancy / bandwidth	pass	fail	n.t.
15.247(b)(2)	11.6	Peak output power	pass	<del>fail</del>	n.t.
15.247(b)(4)	11.7	Radio frequency hazard	pass	fail	n.t.
15.247(d)	11.8	Out of band emissions	pass	fail	n.t.
15.207	11.9	Conducted limits	pass	fail	n.t.

Test requirements kept	ves	<del>no</del>
rest requirements hept	y CB	110

Signature (Technical engineer)

Ralf Trepper

Signature (Manager)

Manfried Dudde



Page

# EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

List of contents

2. Test laboratory	6
3. Introduction	6
4. Product	7
5. Test schedule	7
5. Product and measurement documentation	8
7. Observations and comments	8
8. Summary	8
9. Conclusions	9
10. Operation description	10
11.1 Antenna requirement	11
11.1.1 Regulation	
11.1.2 Result	11
11.2 Operation in the restricted bands	
11.2.1 Regulation	
11.2.2 Result	
11.3 Radiated emissions	15
11.3.1 Regulation	
11.3.2 Test equipment	
11.3.3 Test procedures	
11.3.4 Calculation of field strength Section 15.209 below 30 MHz	
11.3.5 Calculation of field strength Section 15.209 above 30 MHz	
11.3.6 Calculation of average correction factor	
11.3.7 Calculation of the field strength Section 15.247	
11.3.8 Result	
11.4 Channel occupancy / bandwidth	
11.4.1 Regulation	
11.4.2 Test equipment	
11.4.3 Test procedures	
11.4.4 Result	
11.5 Peak output power	
11.5.1 Regulation	
11.5.2 Test equipment	
11.5.3 Test procedures	
11.5.4 Calculation of the radiated power	
11.5.5 Result	
11.6 Out of band emissions	
11.6.1 Regulation	
11.6.2 Test equipment	
11.6.3 Test procedures	
11.0.3 Test procedures	



FCC ID: VLUST510	Date of issue: 2010-02-0
11.6.5 Result	33
11.9 Conducted limits	37
11.9.1 Regulation	37
10.9.2 Test equipment	38
10.9.3 Test procedures	38
11.9.4 Test results	39
12. Additional information to the test report	42



FCC ID: VLUST510

Date of issue: 2010-02-03

# 2. Test laboratory

Company name : m.dudde hochfrequenz-technik

Street : Rottland 5a

City : 51429 Bergisch Gladbach

Country : Germany

Laboratory : FCC Registration Number: 699717

This site has been fully described in a report submitted to the FCC, and renewed with letter dated July 12, 2005, Registration Number 699717.

Phone : +49-2207-9689-0 Fax : +49-2207-9689-20

E-Mail : manfred.dudde@t-online.de Web : http://www.dudde.com

### 3. Introduction

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of m. dudde hochfrequenz - technik.

This report contains the result of tests performed by m. dudde hochfrequenz - technik for the purpose of a type approval. The order for carrying out these tests has been placed by:

### Manufacturer

Company name : Advanced ID Asia Engineering Co. Ltd.

Address : 116 Moo 3 T. Maekhue, A. Doisaket

Chiang Mai 50220

Country : Thailand

Telephone : +66 811738779

Fax : +66 53387319

Email : gottfried@aae.co.th

Date of order : 2009-10-14

References : Mr. Gottfried Auer



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

Date of issue: 2010-02-03

### 4. Product

Samples of the following apparatus were submitted for testing:

Type of equipment : FHSS Transceiver

Manufacturer : Advanced ID Asia Engineering Co. Ltd.
Trademark : Advanced ID Asia Engineering Co. Ltd.

Type designation : ST510 / PR510

Hardware version : RFID Reader ST510USB / RFID Pocket Reader PR510

Serial number : 2052300911000002 (ST510USB) / 3052300911000002 (PR510)

Software release : ---

Power used : 7.2 V DC (Ni Mh Battery, PR510) / 5.0 V DC (USB Port, ST510)

Frequency used : 902.500 MHz – 927.000 MHz (50 channels with 500 kHz channel spacing)

Generated or used frequencies : 902.500 MHz – 927.000 MHz

32.768 kHz, 12.0 MHz, 18.432 MHz, 20.0 MHz (Crystals PR510)

18.432 MHz, 20.0 MHz (Crystals ST510)

FCC ID : VLUST510

### 5. Test schedule

The tests were carried out in accordance with the specifications detailed in chapter 7 "Summary" of this report at:

### - m. dudde hochfrequenz - technik, D-51429 Bergisch Gladbach

The test sample was received on:

- 2009-12-01

The tests were carried out in the following period of time:

- 2009-01-19 - 2010-02-02

e-mail: manfred.dudde@t-online.de



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 6. Product and measurement documentation

For issuing this report the following product documentation was used and the following annexes were created:

Description	Date	Identifications
External photographs of the Equipment Under Test (EUT)	2010-02-03	Annex no. 1
Internal photographs of the Equipment Under Test (EUT)	2010-02-03	Annex no. 2
bandwidth	2010-02-03	Annex no. 3
FCC ID label sample	2010-02-03	Annex no. 4
Functional description	2010-02-03	Annex no. 5
Test setup photos	2010-02-03	Annex no. 6
Block diagram	2010-02-03	Annex no. 7
Schematics	2010-02-03	Annex no. 8
Parts list	2010-02-03	Annex no. 9
Operational description	2010-02-03	Annex no. 10
Channel occupancy	2010-02-03	Annex no. 11
Antenna description	2010-02-03	Annex no. 12

The above mentioned documentation will be filed at m. dudde hochfrequenz - technik for a period of 10 years following the issue of this report.

### 7. Observations and comments

The test sample PR510 and ST510 use the same RF module, the differences are the housing, an additional display board (PR510) and the power supply (ST510 power over USB // PR510 battery powered, or AC-DC switching adapter powered).

Additional equipment for the tests to carry on the ST510 and PR510:

HP Laptop,

Type: compaq nx6325 SN: CNU64907YN

Switching adapter, Model: SYS1357-2412

Input: 110-240 V AC / 50-60 Hz / 1.0 A max. Output: +12 V DC / 2.0 A / 24 W max.

### 8. Summary

The product is intended for the use in the following areas of application:

Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the frequency range of 9 kHz to 40 GHz

The samples were tested according to the following specification:

### 47 CFR Part 15 – Intentional Radiators, ANSI C63.4 - 2003

m. dudde hochfrequenz-technik Rottland 5a

D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0

e-mail: manfred.dudde@t-online.de

Vers. no. 1.07

Fax: +49 2207 9689-20 <a href="http://www.dudde.com">http://www.dudde.com</a>



FCC ID: VLUST510

Date of issue: 2010-02-03

### 9. Conclusions

Samples of the apparatus were found to **CONFORM WITH** the specifications stated in chapter 7 "Summary" of this report.

In the opinion of m. dudde hochfrequenz - technik, the samples satisfied all applicable requirements relating to the network interface types specified in chapter 7 "Summary".

The results of the type tests as stated in this report are exclusively applicable to the product item as identified in this report. m. dudde hochfrequenz - technik does not accept any responsibility for the results stated in this report, with respect to the properties of product items not involved in these tests.

This report consists of a main module, modules with test results and annexes listed in chapter 5:

"Product documentation". All pages have been numbered consecutively and bear the m. dudde hochfrequenz - technik logo, the report number and sub numbers.

The total number of pages in this report is **43**.

### **Tester:**

Date : 2010-02-03 Name : Ralf Trepper

Signature : Il / reppe

### **Technical responsibility for area of testing:**

Date : 2010-02-03 Name : Manfried Dudde

Signature : Man find Quelch



FCC ID: VLUST510

Date of issue: 2010-02-03

# 10. Operation description

10.1 EUT details

The RFID Reader ST110 and PR110 uses the same RF board and the same Microcontroller.

The RX input bandwidth of the receiver part is 200kHz for each channel.

The system is capable of using channels which are separated by a frequency spacing of 500kHz, starting at a centre frequency of 902.5 MHz (channel 1).

The transmitter and receiver parts each have a hop time (time for switching from one hopping channel to the next), determined by the settling time of the on-chip frequency synthesizer.

Of all available channels are used for TX hopping.

During each transmission all hopping channels (1-50) are used. Thereby it is inherently ensured that the hopping channels are used equally often for TX.

The sequence of hopping channels during a transmission and exact timing for TX on each hopping channel is determined by a pseudo-random algorithm.

10.2 EUT configuration

Testing was carried out using software control implemented in the EUT with the following settings:

- Output power: maximum, +27 dBm (conducted)
- Frequency hopping in the band: 902 928 MHz
- Frequency hopping using a pseudo random sequence in the band: 902 928 MHz.
- Changes in modulation: None,
- Single frequency operation
- Channel spacing: 500 kHz
- 50 Channels

10.3 EUT measurement description

### Radiated emission test

### Radiated measurement was carried out, because the antenna is an integrated type (soldered)!

One configuration will be tested as stand alone device. In order to establish the maximum radiation, firstly, there have been viewed all orthogonal adjustments of the test sample. Secondly the test sample have been rotated at all adjustments around the own axis between 0° and 360°, and thirdly, the antenna polarization between horizontal and vertical has been varied. All generated frequencies, the lowest, middle and the highest frequency of both **RFID Reader (ST510/PR510)**, have been viewed.

### Conducted measurements

The *ST510* and *PR510* was separately connected over an USB cable to the USB port from an Laptop and this to the artificial mains network. Additional the *PR510* was connected via external power supply to the artificial mains network. It has been tested only in continuous transmit mode. L1 and N have been viewed.



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 11.1 Antenna requirement

### 11.1.1 Regulation

15.203 An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of Part 15C. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31 (d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 11.1.2 Result

The equipment meets the requirements			<del>no</del>	<del>n.t.</del>
Further test results are attached	<del>yes</del>	no	page no:	

The antenna is inside the housing from the EUT and can only be replaced by original construction equality antennas.

e-mail: manfred.dudde@t-online.de



FCC ID: VLUST510

Date of issue: 2010-02-03

### 11.2 Operation in the restricted bands

### 11.2.1 Regulation

Section 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	$(^{2})$
13.36 - 13.41			

<sup>&</sup>lt;sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.
- (c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator.
- (d) The following devices are exempt from the requirements of this Section:

<sup>&</sup>lt;sup>2</sup> Above 38.6



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.
- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).
- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.
- (c) Except as provided in paragraphs (d) and (e), regardless of the field strength limits specified elsewhere in this Subpart, the provisions of this Section apply to emissions from any intentional radiator. (d) The following devices are exempt from the requirements of this Section:
- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a), the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a), and the fundamental emission is outside of the bands listed in paragraph (a) more than 99% of the time the device is actively transmitting, without compensation for duty cycle. (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to Section 15.213.

m. dudde hochfrequenz-technik Rottland 5a D-51429 Bergisch Gladbach

Tel.: +49 2207-9689-0 e-mail: manfred.dudde@t-online.de Vers. no. 1.07

Fax: +49 2207 9689-20 <a href="http://www.dudde.com">http://www.dudde.com</a>



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

- (4) Any equipment operated under the provisions of § 15.253, § 15.255 or § 15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of Section 15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of Subpart D or F of this part.
- (7) Devices operated pursuant to § 15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under § 15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in § 15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under § 15.249 are exempt from 83 complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in § 15.249(a).
- (e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbancesensors operating under the provisions of Section 15.245 shall not exceed the limits specified in Section 15.245(b).

### 11.2.2 Result

The equipment meets the requirements		yes	<del>no</del>	<del>n.t.</del>
Further test results are attached	yes	<del>no</del>	page no:	20-25

m. dudde hochfrequenz-technik Rottland 5a D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0

e-mail: manfred.dudde@t-online.de

Fax: +49 2207 9689-20

http://www.dudde.com



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 11.3 Radiated emissions

### 11.3.1 Regulation

15.209(a)

Section 15.209 Radiated emission limits, general requirements. (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table: Frequency Field Strength Measurement Distance

(MHz)	(microvolts/meter)	(meters)	
0.009 - 0.490	2400/F(kHz)	300	
0.490 - 1.705	24000/F(kHz)	30	
1.705 - 30.0	30	30	
30 - 88	100 **	3	
88 - 216	150 **	3	
216 - 960	200 **	3	
Above 960	500	3	

<sup>\*\*</sup> Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- (b) In the emission table above, the tighter limit applies at the band edges.
- (c) The level of any unwanted emissions from an intentional radiator operating under these general provisions shall not exceed the level of the fundamental emission. For intentional radiators which operate under the provisions of other Sections within this Part and which are required to reduce their unwanted emissions to the limits specified in this table, the limits in this table are based on the frequency of the unwanted emission and not the fundamental frequency. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
- (d) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- (e) The provisions in Sections 15.31, 15.33, and 15.35 for measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this Part.
- (f) In accordance with Section 15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in Section 15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in Section 15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit. Emissions which must be measured above the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator and which fall within the restricted bands shall comply with the general radiated emission limits in Section 15.109 that are applicable to the incorporated digital device.

m. dudde hochfrequenz-technik Rottland 5a D-51429 Bergisch Gladbach

Tel.: +49 2207-9689-0 e-mail: manfred.dudde@t-online.de



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

(g) Perimeter protection systems may operate in the 54-72 MHz and 76-88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

### 11.3.2 Test equipment

Type	Manufacturer/	Serial no.	Last calibration	Next calibration
	Model no.			
Receiver	Rohde & Schwarz	100.117	2008/10	2010/10
	Spectrum Analyzer			
(9 kHz -18.0 GHz)	FSL 18 (171a)			
Receiver	Anritsu	6200163244	2009/04	2011/04
	Spectrum Analyzer			
(9 kHz -40.0 GHz)	MS2668C (359a)			
Pre-amplifier	<b>Hewlett Packard</b>	1726A00705	2010/01	2012/01
(100kHz - 1.3GHz)	8447 E (166a)			
Pre-amplifier	Narda		2010/01	2012/01
(1GHz - 18GHz)	(345)			
Magnetic loop antenna	Schwarzbeck		2008/09	2010/09
(9 kHz - 30 MHz)	FMZB 1516 (23)			
Bilog antenna	Schwarzbeck		2007/02	2013/02
(30- 1000 MHz)	VULP 9168 (406)			
Horn antenna	Schwarzbeck	236	2009/03	2013/03
(0.86-8.5 GHz)	BBHA 9120 A (284)			
Horn antenna	Schwarzbeck	305	2009/03	2013/03
(2.0-14.5 GHz)	BBHA 9120 C (169)			
Horn antenna	Schwarzbeck	41	2009/03	2013/03
(14.5-40 GHz)	BBHA 9170 (281)			
RF- cable	Kabelmetal 18m [N]	K1	2010/01	2011/01
RF- cable	Aircell 0.5m [BNC]	K40	2010/01	2011/01
RF- cable	Aircell 1m [BNC/N]	K56	2010/01	2011/01
RF- cable	Sucoflex 106 Suhner	K74	2010/01	2011/01
	6,4m [N]			
RF- cable	Sucoflex 106 Suhner	K75	2010/01	2011/01
	6,4m [N]			



Date of issue: 2010-02-03 FCC ID: VLUST510

### 11.3.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 "Radiated Emissions Testing"

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 10,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 10,000 MHz)
Receive antenna polarization / orientation	$0 - 360^{\circ}$
	Vertical / horizontal (30 MHz - 1,000 MHz)

<sup>\*</sup> According to Section 15.31 (f)(1): At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

### 11.3.4 Calculation of field strength Section 15.209 below 30 MHz

The receiver reading gives not directly the field strength result in (dBµV/m). The antenna factors of the loop antenna and cable losses must be added to find the correct result.

For frequencies below 30 MHz and for a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (2) the field strength is calculated by adding additionally an extrapolation factor of 40 dB/decade (inverse linear distance for field strength measurements).

Fax: +49 2207 9689-20

http://www.dudde.com

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Loop antenna factor + cable loss

 $FS = 40.7 - 40 = 0.7 [dB\mu V/m]$ 

Level in  $\mu$ V/m Common Antilogarithm (0.7/20) = 1.1

m. dudde hochfrequenz-technik

Rottland 5a

D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0

e-mail: manfred.dudde@t-online.de



EUT: RFID Reader ST510 / PR510
FCC ID: VLUST510
Date of issue: 2010-02-03

### 11.3.5 Calculation of field strength Section 15.209 above 30 MHz

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1) the field strength is calculated by adding additionally an extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements).

### 11.3.6 Calculation of average correction factor

The average correction factor is computed by analyzing the "worst case" on time in any 100msec time period and using the formula: Corrections Factor  $+20*\log$  (worst case on time/100msec) Analysis of the remote transmitter worst case on time in any 100msec time period is an on time of 50msec, therefore the correction factor is  $20*\log (50/100) = -6 \text{ dB}$ . The maximum correction factor to be applied is 20 dB per section 15.35 of the FCC rules.



EUT: RFID Reader ST510 / PR510
FCC ID: VLUST510
Date of issue: 2010-02-03

### 11.3.7 Calculation of the field strength Section 15.247

The field strength is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Antenna factor + cable loss

For example:

The receiver reading is 32.7 dB $\mu$ V. The antenna factor for the measured frequency is +2.5 dB (1/m) and the cable factor for the measured frequency is 0.71 dB, giving a field strength of 35.91dB $\mu$ V/m.

The  $35.91 dB \mu V/m$  value can be mathematically converted to its corresponding level in  $\mu V/m$ .

Level in  $\mu V/m = Common Antilogarithm (35.91/20) = 39.8$ 

For a test distance other than what is specified, but fulfilling the requirements of Section 15.31 (f) (1), the field strength is calculated by adding additionally an extrapolation factor of 20dB/decade (inverse linear distance for field strength measurements).

e-mail: manfred.dudde@t-online.de



Date of issue: 2010-02-03

### 11.3.8 Result

(lowest frequency)(902.500 MHz)

	TRANSI	MITTER SP	URIOUS	RADIATI	ON BELO	W 30 MH	Iz (Section 15.2	05, 15.209	))
f (MHz)	Bandwidth (kHz)	Noted receiver level	Test distance	Correction factor	Distance extrapol.	Level corrected	Limit	Margin	Polarisation EUT
	Type of detector	dΒμV	m	dB	factor <b>dB</b>	dBμV/m	dBμV/m	dBμV/m	antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
	<u>'</u>			No emiss	sions detecte	ed			
Measu	Measurement uncertainty ± 4 dB								

Tel.: +49 2207-9689-0 e-mail: manfred.dudde@t-online.de



Date of issue: 2010-02-03

(lowest frequency)( 902.500 MHz)

(towest fre			· · · · · · · · · · · · · · · · · · ·								
	TRAN	NSMITTI	ER SPUR	IOUS RAI	DIATION	ABOVE 3	0 MHz (S	ection 15	.205, 15.2	09)	
f (MHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height
	Type of detector	level dBµV	m	dB	factor dB	dB	dBμV/m	dBμV/m	dBμV/m	antenna	cm
30.0000	100, AV	≤ 3.5	3	-2.6 <sup>*5</sup>	0	0	0.9	40.0	39.10	H,V/H,V	100-400
88.0000	100, AV	≤3.5	3	-10.8 <sup>*5</sup>	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
216.0000	100, AV	≤ 3.5	3	-10.3* <sup>5</sup>	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.5* <sup>5</sup>	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.8* <sup>6</sup>	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2707.500	1000, AV	38.0	3	8.1* <sup>6</sup>	0	0	46.1	54.0	7.9	V/V,120°	140
3610.000	1000, AV	41.5	3	8.3*6	0	0	49.8	54.0	4.2	V/V,120°	129
4512.500	1000, AV	≤ 10	3	8.9* <sup>6</sup>	0	0	18.9	54.0	35.1	H,V/H,V	100-400
5415.000	1000, AV	≤ 10	3	9.2*6	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7500.0000	1000, AV	≤ 14	3	12.9* <sup>6</sup>	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8122.500	1000, AV	≤ 14	3	14.8* <sup>6</sup>	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9025.000	1000, AV	≤ 14	3	15.9* <sup>6</sup>	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* <sup>6</sup>	0	0	32.3	54.0	21.7	H,V/H,V	100-400
Measure	ment unce	rtainty					± 4 dB				

Bandwidth = the measuring receiver bandwidth

Remark: \*1 noise floor noise level of the measuring instrument  $\leq 3.5 \text{dB}\mu\text{V}$  @ 3m distance (30 – 1,000 MHz)

Remark: \*2 noise floor noise level of the measuring instrument  $\leq 4.5 \text{dB}\mu\text{V}$  @ 3m distance (1,000 – 2,000 MHz)

Remark:  $*^3$  noise floor noise level of the measuring instrument  $\leq 10 \text{dB}\mu\text{V}$  (a) 3m distance (2,000 – 5,500 MHz)

Remark: \*4 noise floor noise level of the measuring instrument  $\leq 14 dB\mu V$  @ 3m distance (5,500 – 14,500 MHz)

Remark: \*5 for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

Remark: \*6 for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

Remark: \*1 Noise level of the measuring instrument  $\leq 4.0 \text{dB}\mu\text{V}$  @ 10m distance (0.009 MHz -30 MHz)

Remark: \* Peak Limit according to Section 15.35 (b).

The equipment meets the requirements	yes	ne	n.t.	
Further test results are attached	<del>yes</del>	no	page no:	



Date of issue: 2010-02-03

(middle frequency)( 915.000 MHz)

	TRANSI	MITTER SP	URIOUS	RADIATI	ON BELO	W 30 MH	Iz (Section 15.2	05, 15.209	)
f (MHz)	Bandwidth (kHz)	Noted receiver level	Test distance	Correction factor	Distance extrapol.	Level corrected	Limit	Margin	Polarisation EUT /
	Type of detector	dΒμV	m	dB	factor dB	dBμV/m	dBμV/m	dBμV/m	antenna orientation
0.1200	PK/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	Pk46.0- @ 300	80.90	V, H/0-360°
	AV/0.2kHz	< 4.0	10	20.2	-59.1	-34.90	AV26.0 @ 300	80.90	V, H/0-360°
0.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV33.6 @ 30	28.5	V, H/0-360°
1.5000	AV/0.2kHz	< 4.0	10	20.2	-19.1	5.10	AV24.1 @ 30	19.00	V, H/0-360°
3.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
5.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
8.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
10.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
20.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
30.0000	AV/9.0kHz	< 4.0	10	20.2	-19.1	5.10	AV29.5 @ 30	24.4	V, H/0-360°
	1			No emis	sions detecte	ed	1		
Measu	rement unc	ertainty				± 4	dB		

m. dudde hochfrequenz-technik Rottland 5a D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0



**Date of issue: 2010-02-03** 

(middle frequency)(915.000 MHz)

	TRAN	NSMITTI	ER SPUR	IOUS RAI	DIATION	ABOVE 3	0 MHz (S	ection 15	.205, 15.2	09)	
f (MHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height
	Type of detector	level dBµV	m	dB	factor dB	dB	dBμV/m	dBμV/m	dBμV/m	antenna	cm
30.0000	100, AV	≤ 3.5	3	-2.60	0	0	0.9	40.0	39.10	H,V/H,V	100-400
88.0000	100, AV	≤ 3.5	3	-10.80	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
216.0000	100, AV	≤ 3.5	3	-10.30	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.50	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.80* <sup>6</sup>	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2745.000	1000, AV	32.8	3	8.1* <sup>6</sup>	0	0	40.9	54.0	13.1	V/V,120°	140
3660.000	1000, AV	40.9	3	8.3*6	0	0	49.2	54.0	4.8	V/V,120°	129
4575.000	1000, AV	≤ 10	3	8.9* <sup>6</sup>	0	0	18.9	54.0	35.1	H,V/H,V	100-400
5000.0000	1000, AV	≤ 10	3	9.2*6	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7320.800	1000, AV	≤ 14	3	12.9*6	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8235.000	1000, AV	≤ 14	3	14.8* <sup>6</sup>	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9150.000	1000, AV	≤ 14	3	15.9* <sup>6</sup>	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* <sup>6</sup>	0	0	32.3	54.0	21.7	H,V/H,V	100-400
Measure	ment unce					± 4 dB					

Bandwidth = the measuring receiver bandwidth

Remark: \*1 noise floor noise level of the measuring instrument  $\leq 3.5 \text{dB}\mu\text{V}$  @ 3m distance (30 – 1,000 MHz)

Remark: \*2 noise floor noise level of the measuring instrument  $\leq 4.5 \text{dB}\mu\text{V}$  @ 3m distance (1,000 – 2,000 MHz)

Remark: \*3 noise floor noise level of the measuring instrument  $\leq 10 \text{dB}\mu\text{V}$  @ 3m distance (2,000 – 5,500 MHz)

Remark: \*4 noise floor noise level of the measuring instrument  $\leq 14 dB\mu V$  @ 3m distance (5,500 – 14,500 MHz)

Remark: \*5 for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

Remark: \*6 for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

Remark: \*1 Noise level of the measuring instrument  $\leq 4.0 \text{dB}\mu\text{V}$  @ 10m distance (0.009 MHz -30 MHz)

Remark: \* Peak Limit according to Section 15.35 (b).

The equipment meets the requirements	yes	no	<del>n.t.</del>	
Further test results are attached	<del>yes</del>	no	page no:	

m. dudde hochfrequenz-technik Rottland 5a

D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0

e-mail: manfred.dudde@t-online.de



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

(highest frequency)(927.000 MHz)

TRANSMITTER SPURIOUS RADIATION BELOW 30 MHz (Section 15.205, 15.209) Polarisation Bandwidth Test Correction Level Limit Noted Distance Margin EUT (MHz) (kHz) receiver level distance factor extrapol. corrected Type factor antenna dB dBμV/m  $dB\mu V/m$ dBμV/m of detector  $dB\mu V$ dB m orientation PK/0.2kHz -59.1 Pk46.0- @ 300 V, H/0-360° 0.1200 < 4.0 10 20.2 -34.90 80.90 AV/0.2kHzAV26.0 @ 300 V, H/0-360° < 4.0 20.2 -59.1 10 -34.90 80.90 0.5000 AV/0.2kHz20.2 -19.1 AV33.6 @ 30 V, H/0-360° < 4.0 10 5.10 28.5 AV/0.2kHz20.2 -19.1 AV24.1 @ 30 V, H/0-360° 10 1.5000 < 4.0 5.10 19.00 AV/9.0kHz 20.2 -19.1 AV29.5 @ 30 V, H/0-360° 3.0000 < 4.0 10 5.10 24.4 AV/9.0kHz 5.0000 < 4.0 10 20.2 -19.1 AV29.5 @ 30 V, H/0-360° 5.10 24.4 AV/9.0kHz 20.2 -19.1 AV29.5 @ 30 V, H/0-360° 8.0000 < 4.0 10 5.10 24.4 AV/9.0kHz 20.2 -19.1 AV29.5 @ 30 10.0000 < 4.0 10 5.10 24.4 V, H/0-360° 20.2 -19.1 AV29.5 @ 30 20.0000 AV/9.0kHz < 4.0 10 5.10 24.4 V, H/0-360° AV/9.0kHz 20.2 -19.1 AV29.5 @ 30 10 30.0000 < 4.0 5.10 24.4 V, H/0-360°

No emissions detected

Measurement uncertainty

 $\pm 4 dB$ 



Date of issue: 2010-02-03

(highest frequency)(927.000MHz)

_( vig via y	TRAN	NSMITTI	ER SPUR	IOUS RAI	DIATION	ABOVE 3	0 MHz (S	ection 15	.205, 15.2	09)	
f (MHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height
	Type of detector	level dBµV	m	dB	factor dB	dB	dBμV/m	dBμV/m	dBμV/m	antenna	cm
30.0000	100, AV	≤ 3.5	3	-2.60	0	0	0.9	40.0	39.10	H,V/H,V	100-400
88.0000	100, AV	≤ 3.5	3	-10.80	0	0	-7.3	40.0	47.3	H,V/H,V	100-400
216.0000	100, AV	≤ 3.5	3	-10.30	0	0	-6.8	43.5	50.3	H,V/H,V	100-400
960.0000	100, AV	≤ 3.5	3	8.50	0	0	12.0	43.5	31.5	H,V/H,V	100-400
1700.0000	1000, AV	≤ 4.5	3	3.80* <sup>6</sup>	0	0	8.3	54.0	45.7	H,V/H,V	100-400
2781.000	1000, AV	31.4	3	8.1* <sup>6</sup>	0	0	39.5	54.0	4.5	V/V,120°	140
3708.000	1000, AV	39.3	3	8.3*6	0	0	47.6	54.0	7.4	V/V,120°	129
4635.000	1000, AV	≤ 10	3	8.9* <sup>6</sup>	0	0	18.9	54.0	35.1	H,V/H,V	100-400
5000.0000	1000, AV	≤ 10	3	9.2*6	0	0	19.2	54.0	34.8	H,V/H,V	100-400
7416.000	1000, AV	≤ 14	3	12.9*6	0	0	26.9	54.0	27.1	H,V/H,V	100-400
8343.000	1000, AV	≤ 14	3	14.8* <sup>6</sup>	0	0	28.8	54.0	25.2	H,V/H,V	100-400
9200.000	1000, AV	≤ 14	3	15.9* <sup>6</sup>	0	0	29.9	54.0	24.1	H,V/H,V	100-400
11000.0000	1000, AV	≤ 14	3	18.3* <sup>6</sup>	0	0	32.3	54.0	21.7	H,V/H,V	100-400
Measurement uncertainty							± 4 dB				

Bandwidth = the measuring receiver bandwidth

Remark: \*1 noise floor noise level of the measuring instrument  $\leq 3.5 \text{dB}\mu\text{V}$  @ 3m distance (30 – 1,000 MHz)

Remark: \*2 noise floor noise level of the measuring instrument  $\leq 4.5 \text{dB}\mu\text{V}$  @ 3m distance (1,000 – 2,000 MHz)

Remark:  $*^3$  noise floor noise level of the measuring instrument  $\leq 10 \text{dB}\mu\text{V}$  @ 3m distance (2,000 – 5,500 MHz)

Remark: \*4 noise floor noise level of the measuring instrument  $\leq 14 dB\mu V$  @ 3m distance (5,500 – 14,500 MHz)

Remark: \*5 for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

Remark: \*6 for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

Remark: \*1 Noise level of the measuring instrument  $\leq 4.0 \text{dB}\mu\text{V}$  @ 10m distance (0.009 MHz -30 MHz)

Remark: \* Peak Limit according to Section 15.35 (b).

The equipment meets the requirements	yes	no	<del>n.t.</del>	
Further test results are attached	<del>yes</del>	no	page no:	

e-mail: manfred.dudde@t-online.de



EUT: RFID Reader ST510 / PR510

11.4 Channel occupancy / bandwidth

FCC ID: VLUST510

# 11.4.1 Regulation

15.247(a)(1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 11.4.2 Test equipment

Туре	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver (9 kHz -18.0 GHz)	Rohde & Schwarz Spectrum Analyzer FSL 18 (171a)	100.117	2008/10	2010/10
Probe for relative measurement (800 – 950MHz)	R&S 204.1010.02 (357)	UG 89B/J	2009/03	2012/03

### 11.4.3 Test procedures

Testing was carried out in accordance with the less than 250 kHz requirements.

Measurements were carried out on 3 single frequencies across the operating range.

Measurements were carried out with different tags, the worst case measurement were documented.

### There are 50 hopping frequencies in use, the maximum 20 dB bandwidth is 85.8 kHz and the average time of occupancy is 392.0 msec.

In addition the average time of occupancy on any frequency shall not exceed 400 milliseconds in any 20 second period.

Using a spectrum analyser with a Zero span, the "on frequency time" was determined to be maximal 392 msec. With the spectrum analyser still operating with a Zero span the transmitter was observed to be "on frequency", on average, 1 time in any 20 second period.

Therefore 392 msec \* 1 time = 392 msec.

### 11.4.4 Result

The equipment meets the requirements	The equipment meets the requirements									
				_						
Further test results are attached	yes	<del>110</del>	Annex no	o. 11						



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 11.5 Peak output power

### 11.5.1 Regulation

15.247(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

### 11.5.2 Test equipment

Type	Manufacturer/	Serial no.	Last calibration	Next calibration
	Model no.			
Receiver	Rohde & Schwarz	100.117	2008/10	2010/10
	Spectrum Analyzer			
(9 kHz -18.0 GHz)	FSL 18 (171a)			
Receiver	Anritsu	6200163244	2009/04	2011/04
	Spectrum Analyzer			
(9 kHz -40.0 GHz)	MS2668C (359a)			
Pre-amplifier	Hewlett Packard	1726A00705	2010/01	2012/01
(100kHz - 1.3GHz)	8447 E (166a)			
Bilog antenna	Schwarzbeck		2007/02	2013/02
(30- 1000 MHz)	VULP 9168 (406)			
RF- cable	Kabelmetal 18m [N]	K1	2010/01	2011/01
RF- cable	Aircell 0.5m [BNC]	K40	2010/01	2011/01
RF- cable	Aircell 1m [BNC/N]	K56	2010/01	2011/01
RF- cable	Sucoflex 106 Suhner	K74	2010/01	2011/01
	6,4m [N]			
RF- cable	Sucoflex 106 Suhner	K75	2010/01	2011/01
	6,4m [N]			

### 11.5.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 "Radiated Emissions Testing"

Tel.: +49 2207-9689-0 e-mail: manfred.dudde@t-online.de



Date of issue: 2010-02-03 FCC ID: VLUST510

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 14,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 14,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 14,000 MHz)

### 11.5.4 Calculation of the radiated power

The radiated power is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

: Receiver reading without correction factors Receiver Level

Correction Factor : Substituted over the whole frequency band and listed in an correction table

For example:

The receiver reading is -32.7 dBm. The Correction Factor with the use of a pre-amplifier for the measured frequency of 434 MHz is +12.5 dB and the cable factor for the measured frequency is 0.71 dB, giving a power level of -19.49 dBm.  $-19.49 \text{ dBm} = 11.25 \mu\text{W}$ 

Fax: +49 2207 9689-20

http://www.dudde.com



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 11.5.5 Result

Radiated measurement was carried out, because the antenna is an integrated type!

(lowest frequency)(902.500 MHz)

	PEAK OUTPUT POWER (Section 15.247 (b)(2))											
f (GHz)	Bandwidth (kHz) Type	Noted receiver level	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT	Antenna height	
	of detector	dBm	m	dB	dB	dB	dBm (E.I.R.P)	dBm	dB	antenna	cm	
902.500	100, PK	-16.9	3	45.0	0	0	+28.1	30	1.9	V, 0° / V	131	
	100, PK	-16.3	3	44.8	0	0	+28.5	30	1.5	V, 0° / H	100	
Measur	Measurement uncertainty			± 3 dB								

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth

(middle frequency)(915.000 MHz)

	PEAK OUTPUT POWER (Section 15.247 (b)(2))												
f (GHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height		
	Type of detector	level dBm	m	dB	factor dB	dB	dBm (E.I.R.P)	dBm	dB	antenna	cm		
915.000	100, PK	-17.0	3	45.0	0	0	+28.0	30	2.0	V, 0° / V	131		
	100, PK	-16.4	3	44.8	0	0	+28.4	30	1.6	V, 0° / H	106		
Measur	Measurement uncertainty					;	± 3 dB						

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth

Tel.: +49 2207-9689-0 e-mail: manfred.dudde@t-online.de



Date of issue: 2010-02-03 FCC ID: VLUST510

(highest frequency)(927.0 MHz)

	PEAK OUTPUT POWER (Section 15.247 (b)(2))												
f (GHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height		
	Type of detector	level dBm	m	dB	factor dB	dB	dBm (E.I.R.P)	dBm	dB	antenna	cm		
927.000	100, PK	-17.7	3	45.0	0	0	+27.3	30	2.7	V, 0° / V	125		
	100, PK	-17.6	3	44.8	0	0	+27.2	30	2.8	V, 0° / H	106		
Measur	ement unce	ertainty		± 3 dB									

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth

Remark:  $^{*1}$  noise floor noise level of the measuring instrument  $\leq 3.5 dB\mu V$  @ 3m distance  $(30-1,000 \ MHz)$  Remark:  $^{*2}$  noise floor noise level of the measuring instrument  $\leq 4.5 dB\mu V$  @ 3m distance  $(1,000-2,000 \ MHz)$ 

Remark: \*3 noise floor noise level of the measuring instrument  $\leq 10 \text{dB}\mu\text{V}$  @ 3m distance (2,000 – 5,500 MHz)

Remark:  $*^4$  noise floor noise level of the measuring instrument  $\leq 14 dB\mu V$  @ 3m distance (5,500 - 14,500 MHz)

Remark: \*5 for using a pre-amplifier in the range between 100 kHz and 1,000 MHz

Remark: \*6 for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements		yes	<del>no</del>	<del>n.t.</del>
Further test results are attached	<del>yes</del>	no	page no:	



**EUT: RFID Reader ST510 / PR510** 

FCC ID: VLUST510

### 11.6 Out of band emissions

### 11.6.1 Regulation

15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 11.6.2 Test equipment

Type	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration
Receiver	Rohde & Schwarz Spectrum Analyzer	100.117	2008/10	2010/10
(9 kHz –18.0 GHz)	FSL 18 (171a)			
Receiver	Anritsu	6200163244	2009/04	2011/04
	Spectrum Analyzer			
(9 kHz –40.0 GHz)	MS2668C (359a)			
Pre-amplifier	Hewlett Packard	1726A00705	2010/01	2012/01
(100kHz - 1.3GHz)	8447 E (166a)			
Pre-amplifier	Narda		2010/01	2012/01
(1GHz - 18GHz)	(345)			
Bilog antenna	Schwarzbeck		2007/02	2013/02
(30- 1000 MHz)	VULP 9168 (406)			
Horn antenna	Schwarzbeck	236	2009/03	2013/03
(0.86-8.5 GHz)	BBHA 9120 A (284)			
Horn antenna	Schwarzbeck	305	2009/03	2013/03
(2.0-14.5 GHz)	BBHA 9120 C (169)			
Horn antenna	Schwarzbeck	41	2009/03	2013/03
(14.5-40 GHz)	BBHA 9170 (281)			
RF- cable	Kabelmetal 18m [N]	K1	2010/01	2011/01
RF- cable	Aircell 0.5m [BNC]	K40	2010/01	2011/01
RF- cable	Aircell 1m [BNC/N]	K56	2010/01	2011/01
RF- cable	Sucoflex 106 Suhner	K74	2010/01	2011/01
	6,4m [N]			
RF- cable	Sucoflex 106 Suhner	K75	2010/01	2011/01
	6,4m [N]			



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

### 11.6.3 Test procedures

The EUT and this peripheral (when additional equipment exists) are placed on a turn table which is 0.8m above the ground. The turn table would be allowed to rotate 360 degrees to determine the position of the maximum emission level. The test distance between the EUT and the receiving antenna are 3 m. To find the maximum emission, the polarization of the receiving antenna are changed in horizontal and vertical polarization, the position of the EUT was changed in different orthogonal determinations.

ANSI C63.4: 2003 Section 8 "Radiated Emissions Testing"

Radiated emissions test characteristics	
Frequency range	0.009 MHz - 14,000 MHz
Test distance	3 m*(for frequencies above 30 MHz)
Test instrumentation resolution bandwidth	9 kHz (0.009 – 30MHz)
	120 kHz (30 MHz - 1,000 MHz)
	1 MHz (1000 MHz - 10,000 MHz)
Receive antenna scan height	1 m (0.009 MHz - 30 MHz)
	1 m - 4 m (30 MHz - 14,000 MHz)
Receive antenna polarization / orientation	0 – 360°
	Vertical / horizontal (30 MHz - 14,000 MHz)

### 11.6.4 Calculation of the radiated power

The radiated power is calculated by the following calculation:

Corrected Level = Receiver Level + Correction Factor (without the use of a pre-amplifier)

Corrected Level = Receiver Level + Correction Factor – Pre-amplifier (with the use of a pre-amplifier)

Receiver Level : Receiver reading without correction factors

Correction Factor : Substituted over the whole frequency band and listed in an correction table

### For example:

The receiver reading is -32.7 dBm. The Correction Factor with the use of a pre-amplifier for the measured frequency of 434 MHz is +12.5 dB and the cable factor for the measured frequency is 0.71 dB, giving a power level of -19.49 dBm. -19.49 dBm =  $11.25 \mu W$ 



Date of issue: 2010-02-03

### 11.6.5 Result

(lowest frequency, 902.500 MHz)

			OUT	OF BAND	EMISSI	ON (Section	on 15.247	(d))			
f (MHz)	Bandwidth (kHz)	Noted receiver	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height
	Type of detector	level dBm	m	dB	factor dB	dB	dBm	dBm	dB	antenna	cm
1805.0	100, PK	-67.7	3	20.1*6	0	0	-47.6	-1.5	46.1	V,120°/ V	100
2707.5				Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)			
3610.0				Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)			
4512.5				Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)			
5415.0				Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)			
6317.5	100, PK	≤ -92	3	21.4*6	0	0	-70.6	-1.5	69.1	H,V/H,V	100-400
7220.0	100, PK	≤ -92	3	23.1*6	0	0	-68.9	-1.5	67.4	H,V/H,V	100-400
8122.5		•		Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)	1	•	
9025.0				Measured	d acc. to Secti	on 15.205(a) an	d section 15.2	09(a)			
9927.5	100, PK	≤ -92	3	25.3* <sup>6</sup>	0	0	-66.7	-1.5	65.2	H,V/H,V	100-400
Measur	rement unc	ertainty		1	·		± 4 dB		1	•	ı

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth



**Date of issue: 2010-02-03** 

(middle frequency, 915.000MHz)

			OUT	OF BAND	EMISSI	ON (Section	on 15.247	(d))			
f (MHz)	Bandwidth (kHz)	Noted receiver level	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT /	Antenna height
	Type of detector	dBm	m	dB	dB	dB	dBm	dBm	dB	antenna	cm
1830.0	100, PK	-66.5	3	20.1*6	0	0	-46.4	-1.6	44.8	V,120°/ V	117
2745.0				Measured	d acc. to Secti	on 15.205(a) and	d section 15.2	09(a)			
3660.0				Measured	d acc. to Secti	on 15.205(a) and	d section 15.2	09(a)			
4575.0				Measured	d acc. to Secti	on 15.205(a) and	d section 15.2	09(a)			
5490.0	100, PK	≤ -92	3	21.2* <sup>6</sup>	0	0	-70.8	-1.6	69.2	H,V/H,V	100-400
6405.0	100, PK	≤ -92	3	23.1*6	0	0	-68.9	-1.6	67.3	H,V/H,V	100-400
7320.0				Measured	acc. to Secti	on 15.205(a) and	d section 15.2	09(a)		•	
8235.0				Measured	d acc. to Secti	on 15.205(a) and	d section 15.2	09(a)			
9150.0				Measured	d acc. to Secti	on 15.205(a) and	d section 15.2	09(a)			
10,065.0	100, PK	≤ -92	3	25.3* <sup>6</sup>	0	0	-66.7	-1.6	65.1	H,V/H,V	100-400
Measur	ement unce	ertainty				:	± 4 dB				

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth



**Date of issue: 2010-02-03** 

### (highest frequency, 927.000MHz)

			OUT	OF BAND	EMISSI	ON (Section	on 15.247	(d))			
f (GHz)	Bandwidth (kHz) Type	Noted receiver level	Test distance	Correction factor	Distance extrapol.	AV Correction factor	Level corrected	Limit	Margin	Polaris. EUT	Antenna height
	of detector	dBm	m	dB	dB	dB	dBm	dBm	dB	antenna	cm
1854.0	100, PK	-65.0	3	20.1*6	0	0	-44.9	-2.7	42.2	V,120°/ V	104
2781.0				Measured	d acc. to Section	on 15.205(a) and	d section 15.20	09(a)			
3708.0				Measured	l acc. to Section	on 15.205(a) and	d section 15.20	09(a)			
4635.0				Measured	l acc. to Section	on 15.205(a) and	d section 15.20	09(a)			
5562.0	100, PK	≤ -92	3	21.2*6	0	0	70.8	-2.7	68.1	H,V/H,V	100-400
6489.0	100, PK	≤ -92	3	23.1*6	0	0	68.9	-2.7	66.2	H,V/H,V	100-400
7416.0				Measured	l acc. to Section	on 15.205(a) and	d section 15.20	09(a)			
8343.0				Measured	l acc. to Section	on 15.205(a) and	d section 15.20	09(a)			
9270.0	100, PK	≤ -92	3	24.6* <sup>6</sup>	0	0	-67.4	-2.7	64.7	H,V/H,V	100-400
10,197.0	100, PK	≤-92	3	25.3* <sup>6</sup>	0	0	-66.7	-2.7	64.0	H,V/H,V	100-400
Measur	ement unce	ertainty					± 4 dB		•	•	

<sup>\*</sup> Bandwidth = the measuring receiver bandwidth

Remark:  $^{*1}$  noise floor Remark:  $^{*2}$  noise floor Remark:  $^{*3}$  noise floor Remark:  $^{*4}$  noise floor Remark:  $^{*4}$  noise floor noise level of the measuring instrument  $\leq$  -102 dBm @ 3m distance (30 – 1,000 MHz) noise level of the measuring instrument  $\leq$  -96 dBm @ 3m distance (2,000 – 5,500 MHz) noise level of the measuring instrument  $\leq$  -92 dBm @ 3m distance (5,500 – 14,500 MHz)


Remark: \*<sup>5</sup> for using a pre-amplifier in the range between 100 kHz and 1,000 MHz Remark: \*<sup>6</sup> for using a pre-amplifier in the range between 1.0 GHz and 18.0 GHz

The equipment meets the requirements		yes	ne	n.t.
Further test results are attached	<del>yes</del>	no	page no:	



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

11.6.5 Result

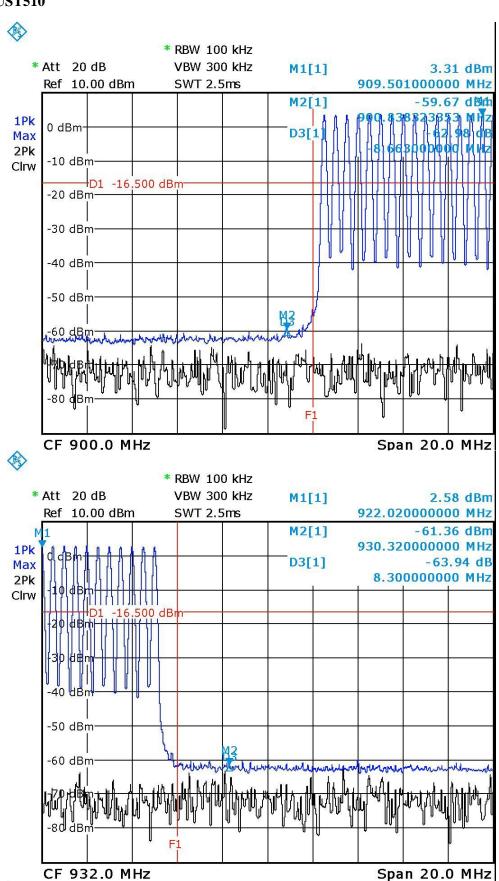

Fax: +49 2207 9689-20

http://www.dudde.com



FCC ID: VLUST510

Date of issue: 2010-02-03

### 11.9 Conducted limits

### 11.9.1 Regulation

Section 15.207 (a) For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a  $50\mu\text{H}/50\text{ohms}$  line impedance stabilization network (LISN). Compliance with this provision of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission(MHz)	Conducted limit (dBµV)				
	Quasi-peak	Average			
0.15-0.50	66 to 56*	56 to 46*			
0.15-0.50 0.50-5.0 5.0-30.0	56	46			
5.0-30.0	60	50			

\*Decreases with the logarithm of the frequency

Section 15.207 (c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provision for, the use of battery chargers which permit operating while charging, AC adaptors or battery eliminators or connected to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

e-mail: manfred.dudde@t-online.de



Date of issue: 2010-02-03 FCC ID: VLUST510

### 10.9.2 Test equipment

Туре	Manufacturer/ Model no.	Serial no.	Last calibration	Next calibration	Remarks
Receiver	Schwarzbeck FMLK 1518	1518-294	06 / 2009		
(9 kHz - 30MHz)	(428)			06 / 2011	
<b>Protector limiter</b>	Rhode & Schwarz		03 / 2008		
9 kHz - 30MHz,	ESH 3Z2	357,881052			
10 dB	(272)			03 / 2010	
V-LISN 50	RFT		03 / 2007		
ohms//(50 uH+5	NNB 11	13835240			
ohms)					
·	(72)			03 / 2010	
V-LISN 50	emco		03 / 2007		
ohms//(50 uH+5	3810/2 LISN				
ohms)					
	(49b)			03 / 2010	

### 10.9.3 Test procedures

The EUT and the additional equipment (if required) are connected to the main power through a line impedance stabilization network (LISN). The LISN must be appropriate to ANSI C63.4: 2003 Section 7.

Additional equipment must also be connected to a second LISN with the same specifications described in the above sentence (if required).



EUT: RFID Reader ST510 / PR510

# FCC ID: VLUST510

### 11.9.4 Test results

1.) PR510 with external AC/DC power supply (model: SYS1357-2412)

/	TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)								
Tested	Emission	Receiver	Result	Spec. limit	Margin	Remarks			
line	frequency	bandwidth	quasi-peak	(average)					
	[MHz]	[kHz]	[dBµV]	[dBµV]	[dB]				
L1	0.179	9	51.5	54.6	3.1	*2			
N	0.179	9	52.0	54.6	2.6	*2			
L1	0.400	9	-2	47.7	49.7	*1			
N	0.400	9	-2	47.7	49.7	*1			
L1	0.419	9	42.5	46.7	4.2	*2			
N	0.419	9	44.0	46.7	2.7	*2			
L1	0.600	9	-2	46	48.0	*1			
N	0.600	9	-2	46	48.0	*1			
L1	0.775	9	-2	46	48.0	*1			
N	0.775	9	-2	46	48.0	*1			
L1	0.850	9	-2	46	48.0	*1			
N	0.850	9	-2	46	48.0	*1			
L1	1.000	9	-2	46	48.0	*1			
N	1.000	9	-2	46	48.0	*1			
L1	1.647	9	36.5	46	9.5	*2			
N	1.647	9	34.5	46	11.5	*2			
L1	2.478	9	37.0	46	9.0	*2			
N	2.478	9	35.0	46	11.0	*2			
L1	3.550	9	-2	46	48.0	*1			
N	3.550	9	-2	46	48.0	*1			
L1	4.500	9	-2	46	48.0	*1			
N	4.500	9	-2	46	48.0	*1			
L1	5.750	9	-2	46	48.0	*1			
N	5.750	9	-2	46	48.0	*1			
L1	6.300	9	-2	50	52.0	*1			
N	6.300	9	-2	50	52.0	*1			
L1	11.100	9	-2	50	52.0	*1			
N	11.100	9	-2	50	52.0	*1			
L1	23.537	9	-2	50	52.0	*1			
N	23.537	9	-2	50	52.0	*1			
L1	27.058	9	41.0	50	9.0	*2			
N	27.058	9	41.0	50	9.0	*2			

Remark: \*1 Noise level of the measuring instrument  $\leq$  -2dB $\mu$ V (0.009 – 30MHz) Remark: \*2 Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	yes	<del>no</del>	<del>n.a.</del>	
Further test results are attached	<del>yes</del>	no	page no:	

m. dudde hochfrequenz-technik Rottland 5a

D-51429 Bergisch Gladbach Tel.: +49 2207-9689-0



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510

2.) PR110 with USB connection to an HP Laptop (Type: compaq nx6325 / SN CNU64907YN)

- /	TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)							
Tested	Emission	Receiver	Result	Spec. limit	Margin	Remarks		
line	frequency	bandwidth	quasi-peak	(average)				
	[MHz]	[kHz]	[dBµV]	[dBµV]	[dB]			
L1	0.186	9	42.0	54.6	12.6	*2		
N	0.186	9	47.0	54.6	7.6	*2		
L1	0.400	9	-2	47.7	49.7	*1		
N	0.400	9	-2	47.7	49.7	*1		
L1	0.450	9	-2	46.7	48.7	*1		
N	0.450	9	-2	46.7	48.7	*1		
L1	0.575	9	35.0	46	11.0	*2		
N	0.575	9	39.5	46	6.5	*2		
L1	0.775	9	-2	46	48.0	*1		
N	0.775	9	-2	46	48.0	*1		
L1	0.850	9	-2	46	48.0	*1		
N	0.850	9	-2	46	48.0	*1		
L1	1.000	9	-2	46	48.0	*1		
N	1.000	9	-2	46	48.0	*1		
L1	1.575	9	-2	46	48.0	*1		
N	1.575	9	-2	46	48.0	*1		
L1	2.500	9	-2	46	48.0	*1		
N	2.500	9	-2	46	48.0	*1		
L1	3.550	9	-2	46	48.0	*1		
N	3.550	9	-2	46	48.0	*1		
L1	4.500	9	-2	46	48.0	*1		
N	4.500	9	-2	46	48.0	*1		
L1	5.750	9	-2	46	48.0	*1		
N	5.750	9	-2	46	48.0	*1		
L1	6.428	9	24.5	50	25.5	*2		
N	6.428	9	27.5	50	22.5	*2		
L1	12.871	9	31.5	50	18.5	*2		
N	12.871	9	33.5	50	16.5	*2		
L1	20.947	9	41.0	50	9.0	*2		
N	20.947	9	40.5	50	9.5	*2		
L1	27.058	9	-2	50	52.0	*1		
N	27.058	9	-2	50	52.0	*1		

Remark: \*1 Noise level of the measuring instrument  $\leq$  -2dB $\mu$ V (0.009 – 30MHz) Remark: \*2 Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements	ves	<del>no</del>	<del>n.a.</del>
			·

Further test results are attached	<del>yes</del>	no	page no:



Date of issue: 2010-02-03

3.) ST510 with USB connection to an HP Laptop (Type: compaq nx6325 / SN CNU64907YN)

TRANSMITTER CONDUCTED EMISSIONS (Section 15.207)								
Tested	Emission	Receiver	Result	Spec. limit	Margin	Remarks		
line	frequency	bandwidth	quasi-peak	(average)				
	[MHz]	[kHz]	[dBµV]	$[dB\mu V]$	[dB]			
L1	0.186	9	42.0	54.6	12.6	*2		
N	0.186	9	47.0	54.6	7.6	*2		
L1	0.400	9	-2	47.7	49.7	*1		
N	0.400	9	-2	47.7	49.7	*1		
L1	0.450	9	-2	46.7	48.7	*1		
N	0.450	9	-2	46.7	48.7	*1		
L1	0.575	9	35.0	46	11.0	*2		
N	0.575	9	39.5	46	6.5	*2		
L1	0.775	9	-2	46	48.0	*1		
N	0.775	9	-2	46	48.0	*1		
L1	0.850	9	-2	46	48.0	*1		
N	0.850	9	-2	46	48.0	*1		
L1	1.000	9	-2	46	48.0	*1		
N	1.000	9	-2	46	48.0	*1		
L1	1.575	9	-2	46	48.0	*1		
N	1.575	9	-2	46	48.0	*1		
L1	2.500	9	-2	46	48.0	*1		
N	2.500	9	-2	46	48.0	*1		
L1	3.550	9	-2	46	48.0	*1		
N	3.550	9	-2	46	48.0	*1		
L1	4.500	9	-2	46	48.0	*1		
N	4.500	9	-2	46	48.0	*1		
L1	5.750	9	-2	46	48.0	*1		
N	5.750	9	-2	46	48.0	*1		
L1	6.428	9	24.5	50	25.5	*2		
N	6.428	9	27.5	50	22.5	*2		
L1	12.871	9	31.5	50	18.5	*2		
N	12.871	9	33.5	50	16.5	*2		
L1	20.947	9	41.0	50	9.0	*2		
N	20.947	9	40.5	50	9.5	*2		
L1	27.058	9	-2	50	52.0	*1		
N	27.058	9	-2	50	52.0	*1		

Remark: \*1 Noise level of the measuring instrument  $\leq$  -2dB $\mu$ V (0.009 – 30MHz) Remark: \*2 Quasi peak measurements lower than "Specified Average Limit"

The equipment meets the requirements					<del>no</del>	<del>n.a.</del>
	Further test results are attached	<del>yes</del>	no	ŗ	oage no:	



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510 Date of issue: 2010-02-03

# 12. Additional information to the test report

### **Remarks**

n.t. Not tested, because the antenna is part of the PCB

n.t.<sup>2</sup> Not tested, because the EUT is directly battery powered

e-mail: manfred.dudde@t-online.de

Vers. no. 1.07

Fax: +49 2207 9689-20 <a href="http://www.dudde.com">http://www.dudde.com</a>



EUT: RFID Reader ST510 / PR510 FCC ID: VLUST510 Date of issue: 2010-02-03

**End of test report** 

e-mail: manfred.dudde@t-online.de

Fax: +49 2207 9689-20 http://www.dudde.com