

TEST REPORT

No. I14N01249-2G

for

Shenzhen Sang Fei Consumer Communications Co., Ltd.

WCDMA digital mobile phone

Model Name: Philips V387

Marketing Name: PHILIPS

FCC ID: VQRCTV387

with

Hardware Version: V387_V01

Software Version: Philips_V387_V01

Issued Date: 2015-01-23

Test Laboratory:

FCC 2.948 Listed: No.342690

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT No.52, HuayuanNorth Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633, Fax:+86(0)10-62304633Email:cttl@chinattl.com, website:www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I14N01249-2G	Rev.0	1st edition	2015-01-23



CONTENTS

1.	TEST LABORATORY	4
1.1.	TESTING LOCATION	4
1.2.	TESTING ENVIRONMENT	4
1.3.	PROJECT DATA	4
1.4.	SIGNATURE	4
2.	CLIENT INFORMATION	
2.1.		
2.2.		
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1.	ABOUT EUT	6
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	6
3.4.		
3.5.		
4.	REFERENCE DOCUMENTS	7
4.1.	REFERENCE DOCUMENTS FOR TESTING	7
5.	LABORATORY ENVIRONMENT	8
6.	SUMMARY OF TEST RESULTS	9
7.	TEST EQUIPMENTS UTILIZED	10
ANI	NEX A: MEASUREMENT RESULTS	11
Α	1 OUTPUT POWER	11
	1.2 EMISSION LIMIT	
	A.3 CONDUCTED EMISSION	
	4 FREQUENCY STABILITY	
	A.5 OCCUPIED BANDWIDTH	
	A.6 EMISSION BANDWIDTH	
A	A.7 BAND EDGE COMPLIANCE	48
A	8 CONDUCTED SPURIOUS EMISSION	54
Δ	9 PEAK-TO-AVERAGE POWER RATIO	75



1. Test Laboratory

1.1. Testing Location

Company Name:

CTTL ShenZhen, Telecommunication Technology Labs

Address:

No. 12 Building, Shangsha Innovation and Technology Park, Futian

District

Postal Code:

518048

Telephone:

+86(0)755-33322000

Fax:

+86(0)755-33322001

1.2. Testing Environment

Normal Temperature:

15-35℃

Relative Humidity:

20-75%

1.3. Project data

Testing Start Date:

2014-10-29

Testing End Date:

2014-11-14

1.4. Signature

Huang Qiuqin

(Prepared this test report)

Shen Shaoming

(Reviewed this test report)

Ma Zhiguo

Deputy Director of the laboratory

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd.

Address /Post: 11 Science and Technology Road, Shenzhen Hi-tech Industrial Park

Nanshan District, Shenzhen, PRC

City: ShenZhen Country: China

Telephone: 0755-26633217

2.2. Manufacturer Information

Company Name: Shenzhen Sang Fei Consumer Communications Co., Ltd.

Address /Post: 11 Science and Technology Road, Shenzhen Hi-tech Industrial Park

Nanshan District, Shenzhen, PRC

City: ShenZhen Country: China

Telephone: 0755-26633217



3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description WCDMA digital mobile phone

Model Name Philips V387

Marketing Name Philips

FCC ID VQRCTV387

Frequency GSM850; PCS1900; WCDMA Band II; WCDMA Band V

Extreme vol. Limits 3.6VDC to 4.35VDC (nominal: 3.8VDC)

Extreme temp. Tolerance -30°C to +50°C

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
N01	1	V387_V01	Philips_V387_V01

^{*}EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	1
AE2	Travel charger	/

AE1

Model AB4400AWMC

Manufacturer Shenzhen Sang Fei Consumer Communications Co., Ltd.

Capacitance 4400mAh

Nominal voltage 3.8V

AE2

Model A68-502000

Manufacturer Shenzhen Sang Fei Consumer Communications Co., Ltd.

3.4. Normal Accessory setting

Fully charged battery was used during the test;

3.5. General Description

The Equipment Under Test (EUT) is a model of WCDMA/GSM digital mobile phone with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test. Samples undergoing test were selected by the Client.

^{*}AE ID: is used to identify the test sample in the lab internally.



4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
ANSI/TIA-603-D	Land Mobile FM or PM Communications Equipment	2010
	Measurement and Performance Standards	
ANOLOGO 4		0000
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from	2003
	Low-Voltage Electrical and Electronic Equipment in the	
	Range of 9 kHz to 40 GHz	
KDB971168 D01	Procedures for Compliance Measurement of the	2011
	·	
	Fundamental Emission Power of Licensed Wideband (> 1	
	MHz) Digital Transmission Systems	
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-13
		Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-13
FCC Part 22	PUBLIC MODILE SERVICES	
		Edition
FCC Part 15,		10-1-2013
Subpart B	Radio frequency devices	Edition
Caspart	Fraguency Allegations and Dadio Treaty Matters: Conord	
FCC Part 2	Frequency Allocations and Radio Treaty Matters; General	10-1-2010
	Rules and Regulations	Edition



5. LABORATORY ENVIRONMENT

Semi-anechoic chamber (11.20 meters \times 6.10meters \times 5.60meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	$<\pm$ 3.5 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 $^{\circ}$ C, Max. = 35 $^{\circ}$ C
Relative humidity	Min. =20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 $^{\circ}$ C, Max. = 30 $^{\circ}$ C
Relative humidity	Min. =35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber (11.20 meters × 6.10 meters × 6.60 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 $^{\circ}$ C, Max. = 30 $^{\circ}$ C	
Relative humidity	Min. = 35 %, Max. = 60 %	
Shielding effectiveness	> 110 dB	
Electrical insulation	> 2MΩ	
Ground system resistance	< 0.5 Ω	
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 6 GHz,3 m distance	



6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
Р	Pass
NA	Not applicable
F	Fail

Items	List	Clause in FCC rules	Verdict
1	Output Power	22.913(a)/24.232(b)	Р
2	Emission Limit	2.1051/22.917/24.238	Р
3	Conducted Emission	15.107/15.207	Р
4	Frequency Stability	2.1055/24.235	Р
5	Occupied Bandwidth	2.1049(h)(i)	Р
6	Emission Bandwidth	22.917(b)/24.238(b)	Р
7	Band Edge Compliance	22.917(b)/24.238(b)	Р
8	Conducted Spurious Emission	2.1057/22.917/24.238	Р
9	PEAK-TO-AVERAGE POWER RATIO	KDB971168	Р



7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	Test Receiver	ESCI	100701	R&S	2015.07.30
2	Test Receiver	ESCI	100702	R&S	2015.07.30
3	Test Receiver	FSP40	100378	R&S	2015.12.19
4	BiLog Antenna	VULB9163	9163 329	Schwarzbeck	2017.01.20
5	Horn Antenna	3117	00066577	ETS-Lindgren	2016.04.01
6	Universal Radio Communication Tester	CMU200	114544	R&S	2015.12.25
7	DC Power Source	ZUP60-14	6MY-847Z13-000 2	TDK-Lambda	2015.03.09
8	LISN	ESH2-Z5	100196	R&S	2016.01.13
9	Horn Antenna	3160-09	ETS-Lindgren	00118383	2015.09.05
10	Universal Radio Communication Tester	CMU200	Rohde&Schwarz	114828	2016.01.03
11	Spectrum Analyzer	FSU	Rohde&Schwarz	200679	2016.01.03
12	Temperature Chamber	SH-241	ESPEC	92007516	2015.02.20
13	DC Power Supply	U3606A	Agilent Technologies	MY50450012	2015.11.11
14	RF Switch Matrix	OSP130	Rohde&Schwarz	100259	2016.01.03
15	Vector Signal Generator	SMU200A	Rohde&Schwarz	104072	2016.01.03
16	MXG Analog Signal Generator	N5183A	Agilent Technologies	MY50140012	2016.01.03



ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rhode & Schwarz Spectrum Analyzer FSU (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band; 824.2MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

A.1.2.2 Test Condition

RBW	VBW	Sweep Time	Span
1MHz	1MHz	300ms	10MHz

GSM850

Measurement result

GSM (GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	5	32.40
836.6	5	32.40
848.8	5	32.47

GPRS (GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	3	32.30
836.6	3	32.30
848.8	3	32.40

EGPRS (8PSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
824.2	6	26.61
836.6	6	26.66
848.8	6	26.74

PCS1900

Measurement result



GSM (GMSK)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	0	29.94
1880.0	0	29.54
1909.8	0	29.18

GPRS (GMSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	3	29.87
1880.0	3	29.49
1909.8	3	29.15

EGPRS (8PSK, 1Slot)

Frequency(MHz)	Power Step	Output power(dBm)
1850.2	5	29.86
1880.0	5	29.45
1909.8	5	29.12



A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

A.1.3.2 Method of Measurement


The measurements procedures in TIA-603D-2010 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

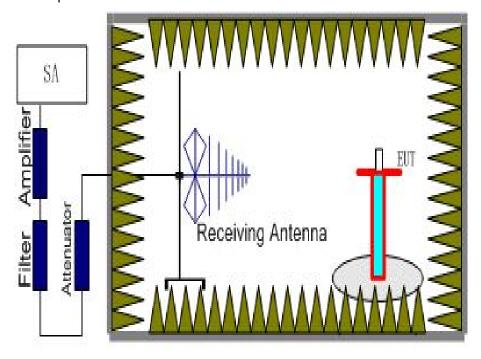

- 2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- 3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.



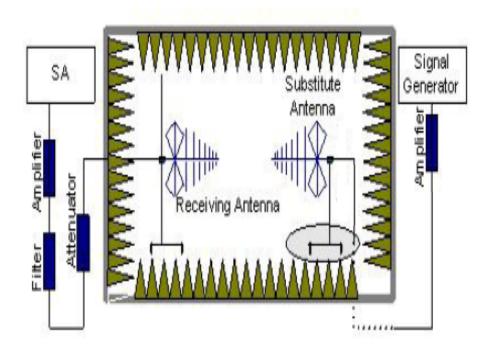

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna , and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}) , the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

- 5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 6. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.



GSM 850-ERP

Limits

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

Measurement result

GSM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	4.82	2.07	-36.20	8.22	2.15	28.58	V
836.60	5.47	2.08	-36.00	8.22	2.15	29.02	V
848.80	6.19	2.09	-35.90	8.21	2.15	29.64	V

Measurement result GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	4.81	2.07	-36.20	8.22	2.15	28.57	V
836.60	5.97	2.08	-36.00	8.22	2.15	29.52	V

-35.90

8.21

2.15

29.83

EGPRS

848.80

_0							
Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Polarization
824.20	4.79	2.07	-36.20	8.22	2.15	28.55	V
836.60	5.76	2.08	-36.00	8.22	2.15	29.31	V
848.80	6.40	2.09	-35.90	8.21	2.15	29.85	V

Note: the result contains vertical part and Horizontal part

2.09

ANALYZER SETTINGS: RBW = VBW = 3MHz

6.38



PCS1900-EIRP

Limits

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

Measurement result

GSM

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	3.25	3.13	-35.80	7.81	28.11	Н
1880.00	1.75	3.15	-35.60	7.80	26.40	Н
1909.80	2.11	3.18	-35.40	7.77	26.56	Н

Measurement result

GPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	3.00	3.13	-35.80	7.81	27.86	Н
1880.00	1.84	3.15	-35.60	7.80	26.49	Н
1909.80	2.10	3.18	-35.40	7.77	26.55	Н

EGPRS

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Polarization
1850.20	3.08	3.13	-35.80	7.81	27.94	Н
1880.00	1.85	3.15	-35.60	7.80	26.50	Н
1909.80	2.07	3.18	-35.40	7.77	26.52	Н

Note: the result contains vertical part and Horizontal part

ANALYZER SETTINGS: RBW = VBW = 3MHz



A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurement procedures in TIA-603D-2010 are used.

The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set as outlined in Part 24.238 and Part 22.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of PCS1900 and GSM850


The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

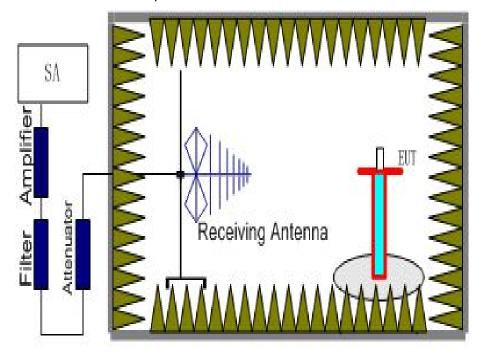

- 2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
- 3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.



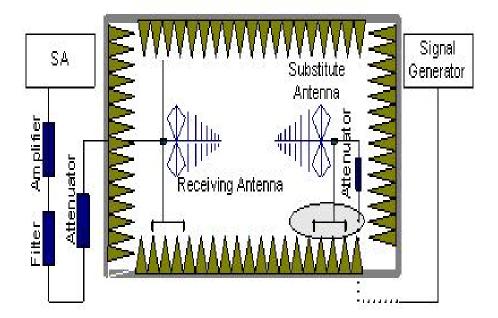

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.
 - The Path loss (Ppl) is the summation of the cable loss and the gain of the amplifier.
 - The measurement results are obtained as described below:
 - Power(EIRP)=P_{Mea} P_{pl} G_a
- 5. Use the power meter to measure the result of power in substitute antenna. Record the result of power meter(P_{pm}).
 - The measurement results are obtained as described below:
 - Power(EIRP)= Ppm Ga
- 6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- 7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.



A.2.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of PCS1900 (1850.2 MHz, 1880 MHz and 1909.8 MHz) and GSM850 (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 and GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.



A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
GSM 850MHz	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
GSM 1900MHz	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
850MHz	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
	0.03~1	100KHz	300KHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
1000MU=	5~8	1 MHz	3 MHz	3
1900MHz	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

Note: the result contains vertical part and Horizontal part



GSM Mode Channel 128/824.2MHz

Fraguago (MIII-)	D (dDm)	Antenna	Correction	Peak	Limit	Polarization
Frequency(MHz)	P _{pm} (dBm)	Gain	(dB)	ERP(dBm)	(dBm)	
9184.375	-55.15	-12.4	2.15	-44.9	-13.00	Н
9256.5	-54.75	-12.4	2.15	-44.5	-13.00	V
9309.25	-51.65	-12.4	2.15	-41.4	-13.00	Н
9731.5	-52.55	-12.3	2.15	-42.4	-13.00	V
9849.75	-53.15	-12.3	2.15	-43	-13.00	V
9949.625	-56.95	-12.3	2.15	-46.8	-13.00	V

GSM Mode Channel 190/836.6MHz

Fragueney (MIIII)	Dom(dDm)	Antenna	Correction	Peak	Limit	Polarization
Frequency(MHz)	Ppm(dBm)	Gain	(dB)	ERP(dBm)	(dBm)	
9260	-51.35	-11.1	2.15	-42.4	-13.00	Н
9330.875	-50.15	-12.4	2.15	-39.9	-13.00	Н
9430.5	-51.65	-12.4	2.15	-41.4	-13.00	Н
9739.25	-52.45	-12.3	2.15	-42.3	-13.00	V
9872.375	-57.15	-12.3	2.15	-47	-13.00	V
9960.125	-49.65	-12.3	2.15	-39.5	-13.00	Н

GSM Mode Channel 251/848.8MHz

Fragues av (MIIII)	D (dDm)	Antenna	Correction	Peak	Limit	Polarization
Frequency(MHz)	P _{pm} (dBm)	Gain	(dB)	ERP(dBm)	(dBm)	
9118.875	-55.45	-12.4	2.15	-45.2	-13.00	V
9268.125	-53.75	-12.4	2.15	-43.5	-13.00	Н
9357.375	-50.65	-12.4	2.15	-40.4	-13.00	V
9730.5	-57.45	-12.3	2.15	-47.3	-13.00	Н
9837.875	-57.05	-12.3	2.15	-46.9	-13.00	V
9903	-57.45	-12.3	2.15	-47.3	-13.00	Н



GSM Mode Channel 512/1850.2MHz

Fraguenov/MHz)	D (dDm)	Antenna	Peak	Limit	Polarization
Frequency(MHz)	P _{pm} (dBm)	Gain	EIRP(dBm)	(dBm)	
18682.25	-50.20	-13.7	-36.5	-13.00	Н
18726	-51.70	-15	-36.7	-13.00	Н
19352.5	-51.90	-15.3	-36.6	-13.00	Н
19573	-51.90	-15.3	-36.6	-13.00	Н
19774.25	-51.50	-15.3	-36.2	-13.00	V
19965	-51.20	-15.3	-35.9	-13.00	V

GSM Mode Channel 661/1880.0MHz

_ (8.41.1.)	D (ID)	Antenna	Peak	Limit	Polarization
Frequency(MHz)	Ppm(dBm)	Gain	EIRP(dBm)	(dBm)	
18239.5	-51.50	-15	-36.5	-13.00	Н
18948.25	-51.30	-15	-36.3	-13.00	Н
19133.75	-51.30	-15.3	-36	-13.00	Н
19371.75	-51.70	-15.3	-36.4	-13.00	Н
19658.75	-50.90	-15.3	-35.6	-13.00	V
19970.25	-51.50	-15.3	-36.2	-13.00	Н

GSM Mode Channel 810/1909.8MHz

Frequency(MHz)	Ppm(dBm)	Antenna	Peak	Limit	Polarization	
Frequency(MHZ)	гріп(ивіп)	Gain	EIRP(dBm)	(dBm)		
15040.5	-48.80	-13.5	-35.3	-13.00	Н	
18720.75	-51.20	-15	-36.2	-13.00	Н	
18775	-50.80	-15	-35.8	-13.00	V	
18999	-50.70	-15	-35.7	-13.00	V	
19606.25	-50.70	-15.3	-35.4	-13.00	Н	
19735.75	-50.70	-15.3	-35.4	-13.00	V	



A.3 CONDUCTED EMISSION

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger.


A.3.1 Limit

Fraguency of Emission (MHz)	Conducted Limit (dBμV)				
Frequency of Emission (MHz)	Quasi -Peak	Average			
0.15 – 0.5	66 to 56*	56 to 46*			
0.5 – 5	56	46			
5 – 30	60	50			
* Decreases with logarithm of the frequency					



A.3.2 Measurement result GSM850MHz

ESH2-Z5 Scan-FCC

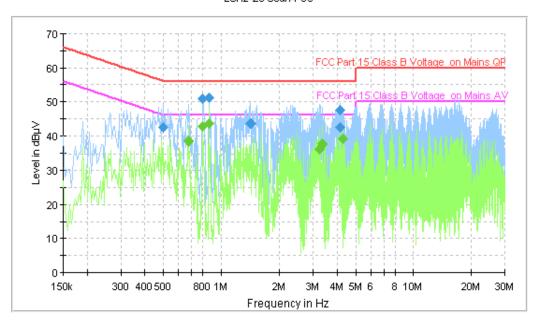

Final Measurement Detector 1

Frequency (MHz)	QuasiPea k (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.502000	42.5	FLO	L1	10.0	13.5	56.0
0.802000	50.9	FLO	L1	10.1	5.1	56.0
0.870000	51.0	FLO	L1	10.1	5.0	56.0
1.426000	43.7	FLO	L1	10.1	12.3	56.0
4.134000	42.4	FLO	L1	10.2	13.6	56.0
4.146000	47.5	FLO	L1	10.2	8.5	56.0


Final Measurement Detector 2

Frequency	Average	PE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	PE	Lille	(dB)	(dB)	(dBµV)
0.678000	38.6	FLO	L1	10.0	7.4	46.0
0.802000	42.6	FLO	L1	10.1	3.4	46.0
0.870000	43.7	FLO	L1	10.1	2.3	46.0
3.218000	36.3	FLO	L1	10.2	9.7	46.0
3.342000	37.7	FLO	L1	10.2	8.3	46.0
4.274000	39.0	FLO	L1	10.2	7.0	46.0



PCS1900MHz

ESH2-Z5 Scan-FCC

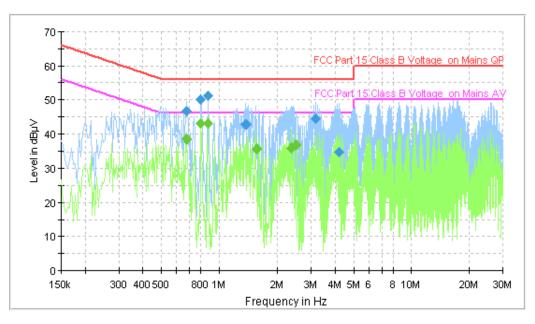

Final Measurement Detector 1

Frequency (MHz)	QuasiPea k (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.674000	46.8	FLO	L1	10.0	9.2	56.0
0.806000	50.1	FLO	L1	10.1	5.9	56.0
0.878000	51.0	FLO	L1	10.1	5.0	56.0
1.382000	42.8	FLO	L1	10.1	13.2	56.0
3.170000	44.4	FLO	L1	10.2	11.6	56.0
4.198000	34.7	FLO	L1	10.2	21.3	56.0

Final Measurement Detector 2

Frequency	Average	DE	Line	Corr.	Margin	Limit
(MHz)	(dBµV)	PE	Line	(dB)	(dB)	(dBµV)
0.674000	38.5	FLO	L1	10.0	7.5	46.0
0.806000	43.0	FLO	L1	10.1	3.0	46.0
0.878000	43.0	FLO	L1	10.1	3.0	46.0
1.554000	35.6	FLO	L1	10.1	10.4	46.0
2.362000	36.0	FLO	L1	10.1	10.0	46.0
2.494000	36.7	FLO	L1	10.2	9.3	46.0



A.4 FREQUENCY STABILITY

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1. Measure the carrier frequency at room temperature.
- 2. Subject the EUT to overnight soak at -30℃.
- 3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 and channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4. Repeat the above measurements at 10℃ increments from -30℃ to +50℃. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6. Subject the EUT to overnight soak at +50°C.
- 7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8. Repeat the above measurements at 10 C increments from $+50^{\circ}$ C to -30° C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9. At all temperature levels hold the temperature to $\pm 0.5^{\circ}$ during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the



nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

GSM 850

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.6	-41	0.049	
3.8	-23	0.027	
4.35	-33	0.039	

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-39	0.047
-20	-36	0.043
-10	-33	0.039
0	-27	0.032
10	-23	0.027
20	-21	0.025
30	-38	0.045
40	-44	0.053
50	-11	0.013

PCS 1900

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)	
3.6	-35	0.019	
3.8	-32	0.017	
4.35	-44	0.023	

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-32	0.017
-20	-20	0.011
-10	-18	0.010
0	-11	0.006
10	-28	0.015
20	-35	0.019
30	-41	0.022
40	-49	0.026
50	-53	0.028




A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results


Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Spectrum analyzer plots are included on the following pages.

GSM 850 Channel 128-Occupied Bandwidth

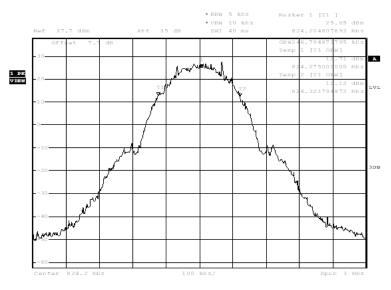

Date: 29.00T.2014 18:15:28


Channel 190-Occupied Bandwidth

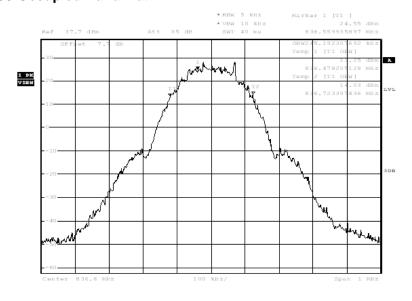

Date: 29.00T.2014 18:16:39




Channel 251-Occupied Bandwidth

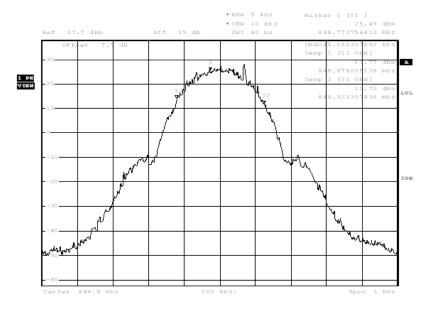

Date: 29.00T.2014 18:17:50


GPRS 850 Channel 128-Occupied Bandwidth

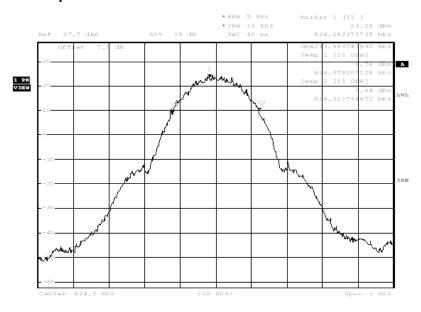

Date: 29.00T.2014 18:46:13




Channel 190-Occupied Bandwidth

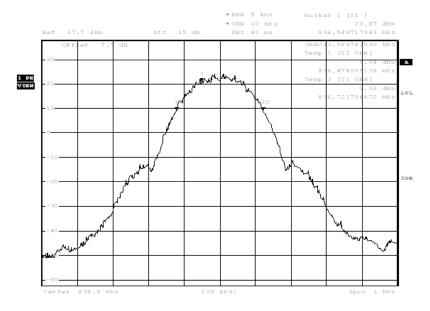

Date: 29.00T.2014 - 18:47:23

Channel 251-Occupied Bandwidth

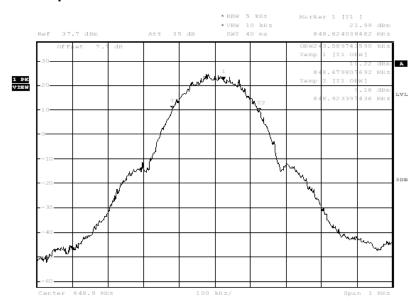


Date: 29.00T.2014 18:48:34




EGPRS 850

Channel 128-Occupied Bandwidth

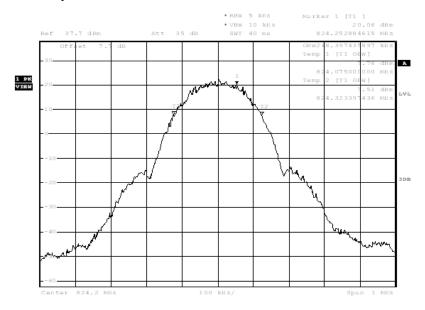

Date: 29.00T.2014 18:59:37


Channel 190-Occupied Bandwidth

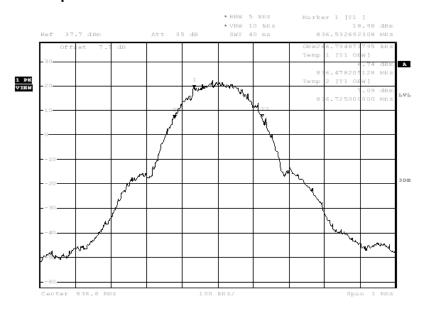

Date: 29.00T.2014 19:00:48




Channel 251-Occupied Bandwidth

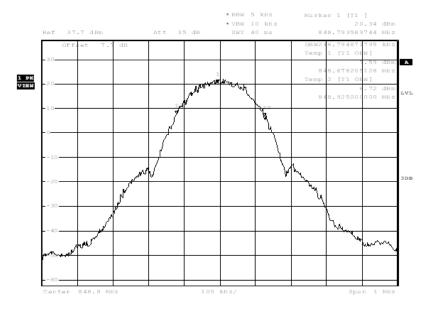

Date: 29.00T.2014 19:01:59


PCS 1900 Channel 512-Occupied Bandwidth

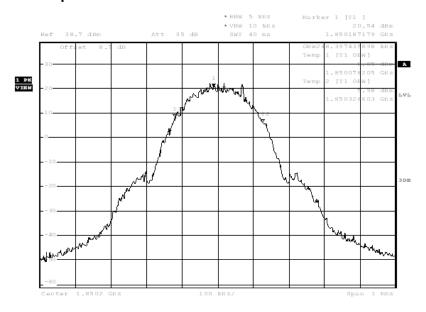

Date: 29.00T.2014 19:12:57




Channel 661-Occupied Bandwidth

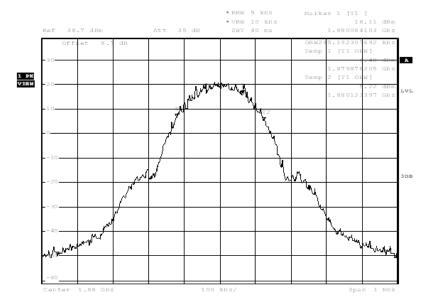

Date: 29.00T.2014 19:14:08


Channel 810-Occupied Bandwidth

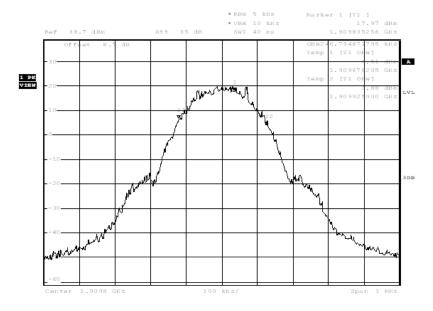

Date: 29.00T.2014 19:15:19




GPRS 1900 Channel 512-Occupied Bandwidth

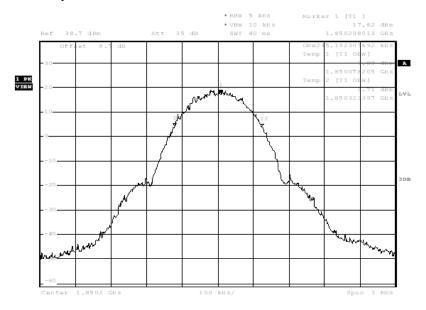

Date: 29.00T.2014 19:43:45


Channel 661-Occupied Bandwidth

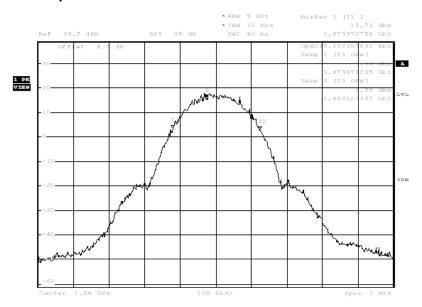

Date: 29.00T.2014 19:44:55




Channel 810-Occupied Bandwidth

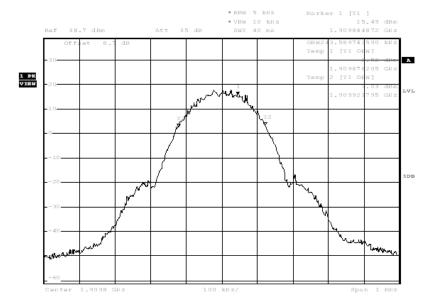

Date: 29.00T.2014 19:46:06




EGPRS 1900 Channel 512-Occupied Bandwidth

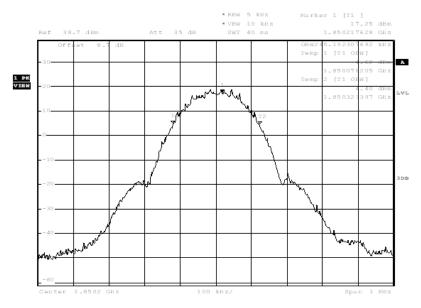

Date: 29.00T.2014 21:46:09


Channel 661-Occupied Bandwidth

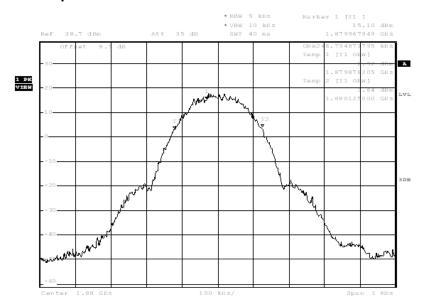

Date: 29.00T.2014 21:47:20



Channel 810-Occupied Bandwidth

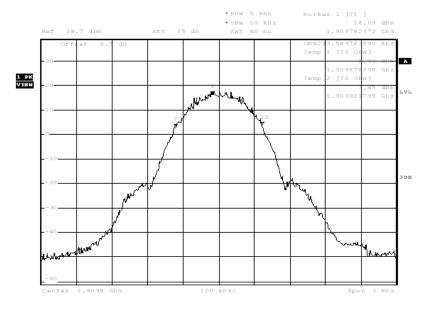

Date: 29.00T.2014 21:48:31




A.6 EMISSION BANDWIDTH

A.6.1Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


GSM 850 Channel 128-Occupied Bandwidth (-26dBc BW)

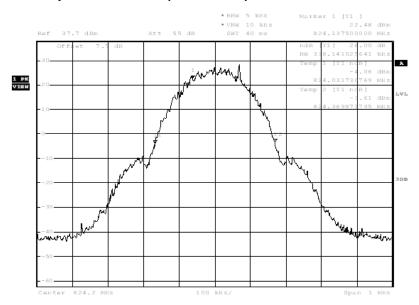

Date: 29.00T.2014 18:19:04




Channel 190-Occupied Bandwidth (-26dBc BW)

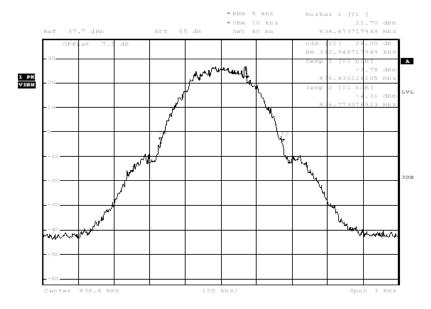

Date: 29.00T.2014 - 18:20:17


Channel 251-Occupied Bandwidth (-26dBc BW)

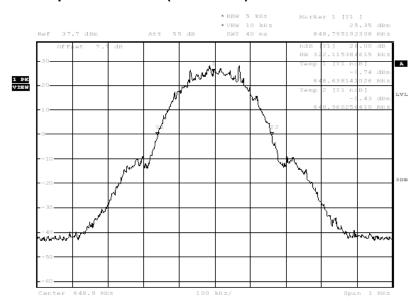

Date: 29.00T.2014 18:21:31




GPRS 850 Channel 128-Occupied Bandwidth (-26dBc BW)

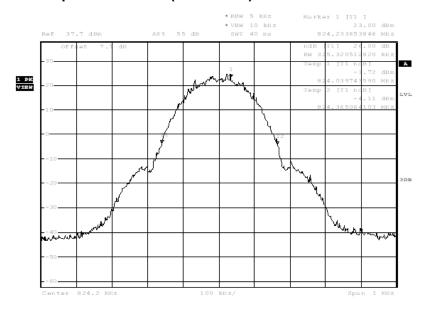

Date: 29.00T.2014 18:49:50


Channel 190-Occupied Bandwidth (-26dBc BW)

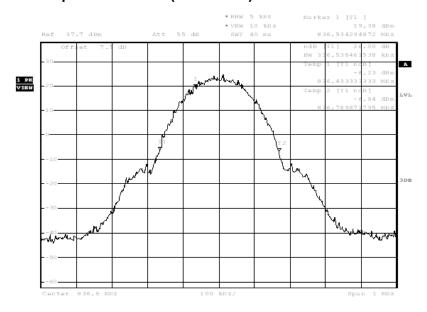

Date: 29.00T.2014 - 18:51:02




Channel 251-Occupied Bandwidth (-26dBc BW)

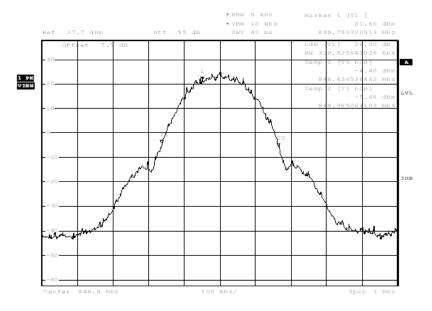

Date: 29.00T.2014 18:52:15


EGPRS 850 Channel 128-Occupied Bandwidth (-26dBc BW)

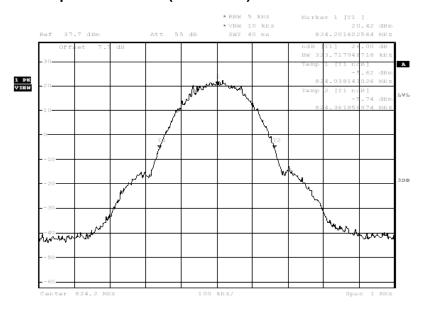

Date: 29.00T.2014 19:03:15




Channel 190-Occupied Bandwidth (-26dBc BW)

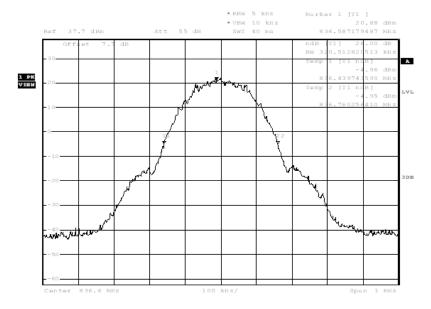

Date: 29.00T.2014 - 19:04:28


Channel 251-Occupied Bandwidth (-26dBc BW)

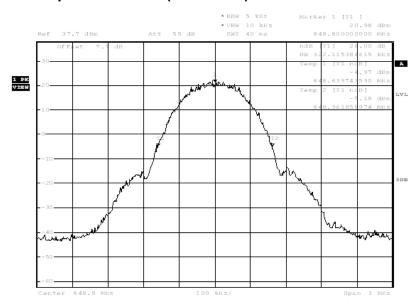

Date: 29.00T.2014 19:05:41




PCS 1900 Channel 512-Occupied Bandwidth (-26dBc BW)

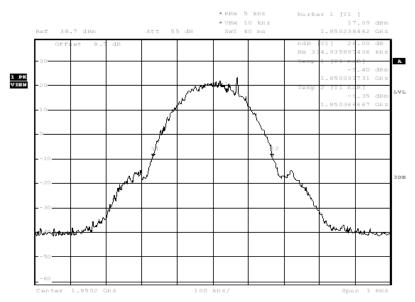

Date: 29.00T.2014 19:16:33


Channel 661-Occupied Bandwidth (-26dBc BW)

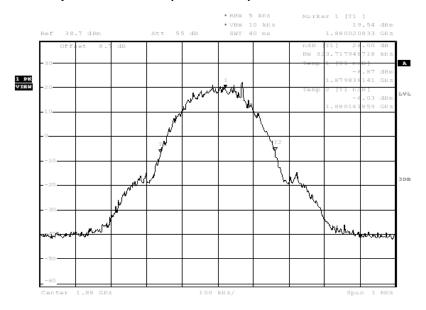

Date: 29.00T.2014 19:17:47




Channel 810-Occupied Bandwidth (-26dBc BW)

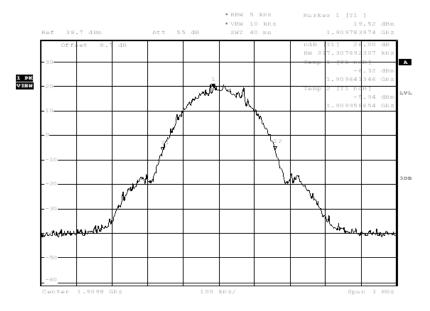

Date: 29.00T.2014 19:19:00


GPRS 1900 Channel 512-Occupied Bandwidth (-26dBc BW)

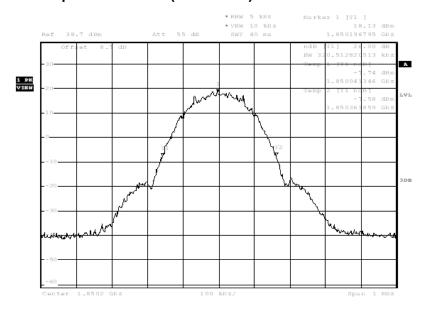

Date: 29.00T.2014 19:47:22




Channel 661-Occupied Bandwidth (-26dBc BW)

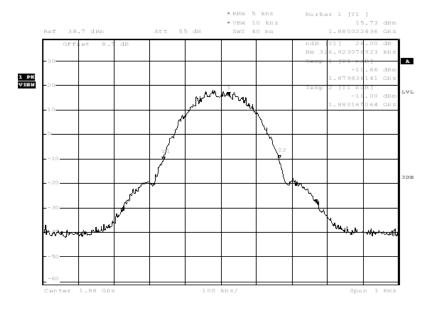

Date: 29.00T.2014 - 19:48:35


Channel 810-Occupied Bandwidth (-26dBc BW)

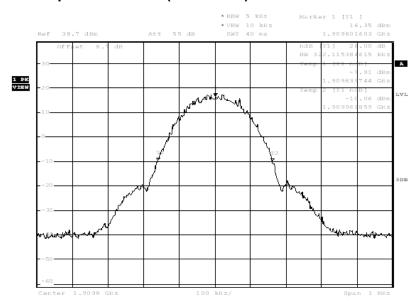

Date: 29.00T.2014 19:49:48




EGPRS 1900 Channel 512-Occupied Bandwidth (-26dBc BW)

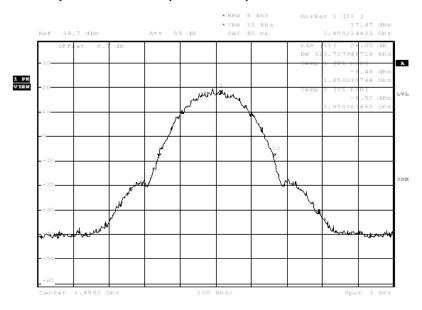

Date: 29.00T.2014 21:49:48


Channel 661-Occupied Bandwidth (-26dBc BW)

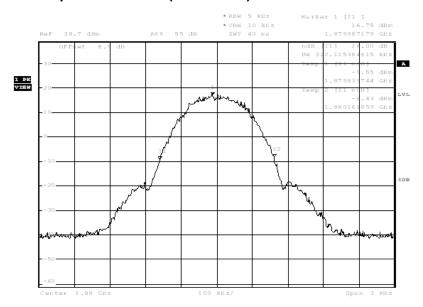

Date: 29.00T.2014 21:51:01

Channel 810-Occupied Bandwidth (-26dBc BW)



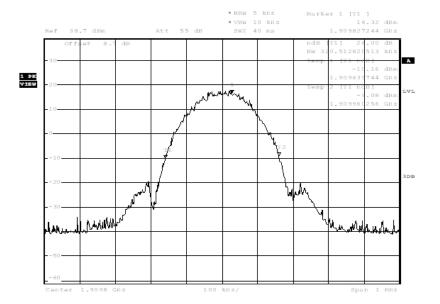


Date: 15.DEC.2014 19:39:07




A.7 BAND EDGE COMPLIANCE

GSM 850 LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

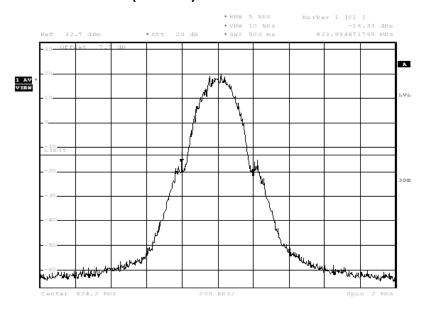

Date: 29.00T.2014 18:23:21


HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

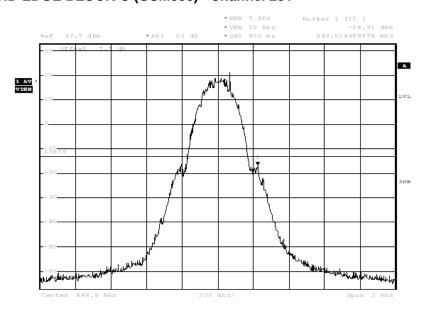

Date: 29.00T.2014 18:25:09




GPRS 850 LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

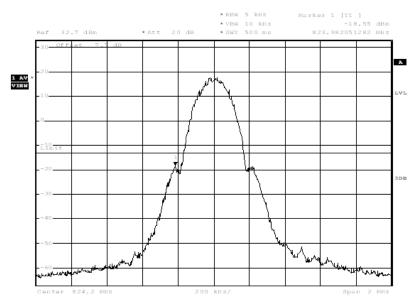

Date: 29.00T.2014 18:54:05


HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

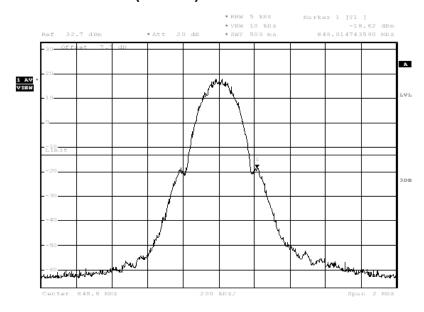

Date: 29.00T.2014 18:55:53




EGPRS 850 LOW BAND EDGE BLOCK-A (GSM850)-Channel 128

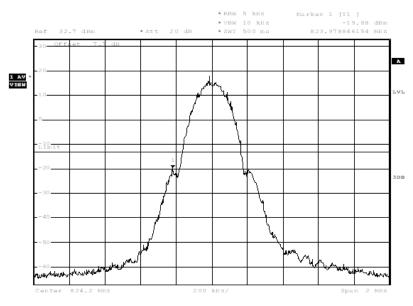

Date: 29.00T.2014 19:07:31


HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251

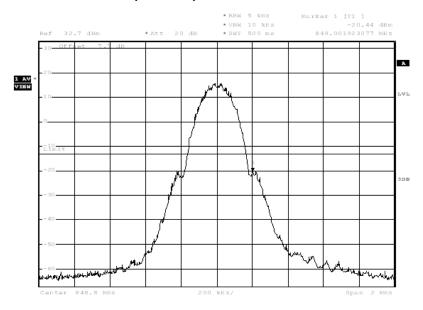

Date: 29.00T.2014 19:09:19




PCS 1900 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

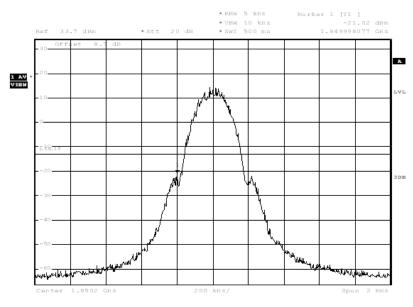

Date: 29.00T.2014 19:20:50


HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

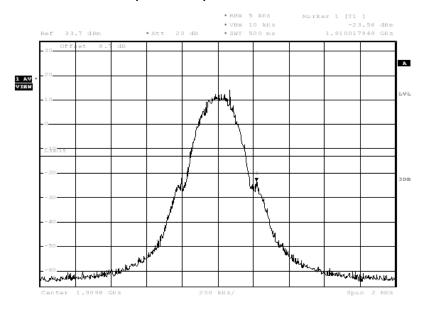

Date: 29.00T.2014 19:22:39




LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

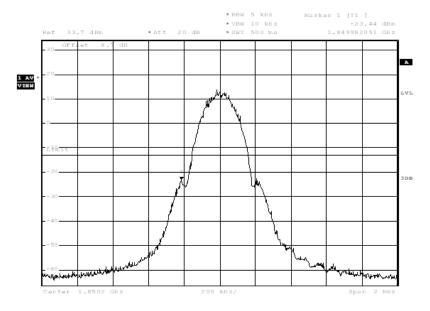

Date: 29.00T.2014 19:51:38


HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

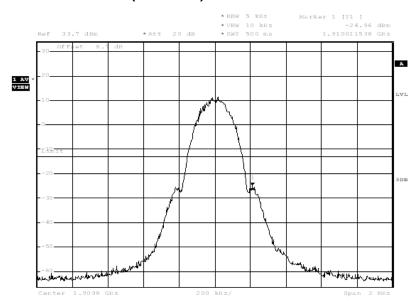

Date: 29.00T.2014 19:53:26




EGPRS 1900 LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512

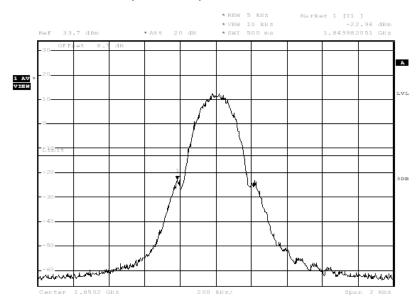

Date: 29.00T.2014 21:54:05

HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810

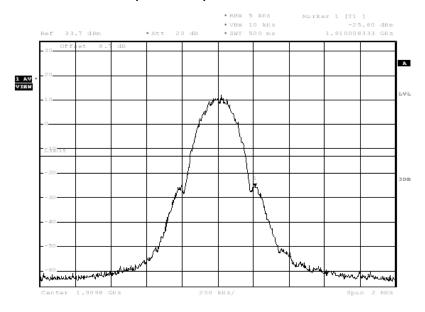

Date: 29.00T.2014 21:55:52



A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 10 GHz.
- 2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
- The procedure to get the conducted spurious emission is as follows:
 The trace mode is set to MaxHold to get the highest signal at each frequency;
 Wait 25 seconds;
 - Get the result.
- 4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

GSM850 Transmitter

Channel	Frequency (MHz)	
128	824.2	
190	836.6	
251	848.8	

PCS1900 Transmitter

Channel	Frequency (MHz)	
512	1850.2	
661	1880.0	
810	1909.8	

A. 8.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.




A. 8.3 Measurement result GSM850

A.8.3.1 Channel 128: 30MHz - 1GHz

Spurious emission limit -13dBm.


NOTE: peak above the limit line is the carrier frequency.

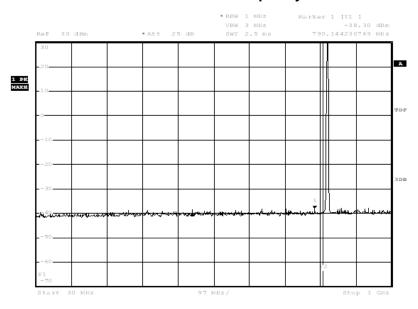

Date: 29.00T.2014 18:25:31

A.8.3.2 Channel 128: 1GHz - 2.5GHz

Spurious emission limit -13dBm.

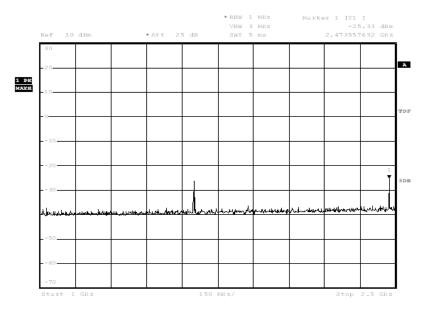


Date: 29.00T.2014 18:25:48



A.8.3.3 Channel 128: 2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

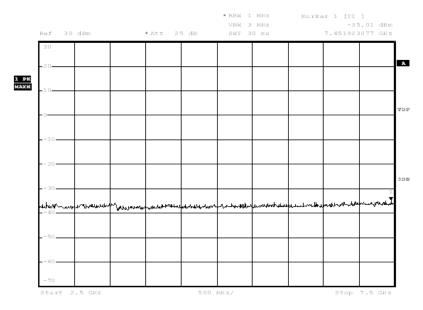

Date: 29.00T.2014 18:26:06

A.8.3.4 Channel 128: 7.5GHz -10GHz

Spurious emission limit -13dBm.

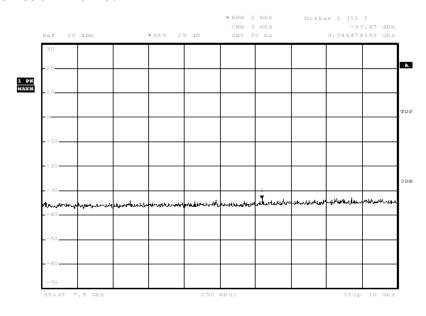


Date: 29.00T.2014 18:26:23



A.8.3.5 Channel 190: 30MHz - 1GHz

Spurious emission limit -13dBm


NOTE: peak above the limit line is the carrier frequency.

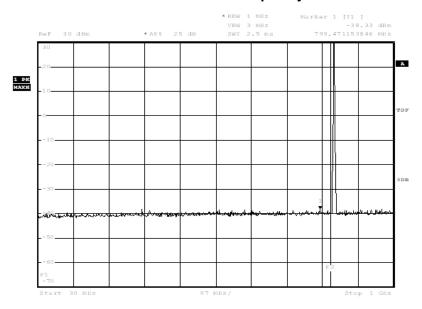

Date: 29.00T.2014 18:26:44

A.8.3.6 Channel 190: 1GHz -2.5GHz

Spurious emission limit -13dBm

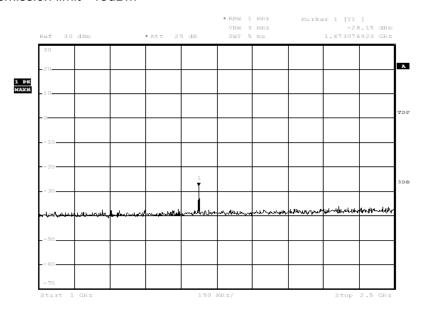


Date: 29.00T.2014 18:27:01



A.8.3.7 Channel 190: 2.5GHz -7.5GHz


Spurious emission limit -13dBm

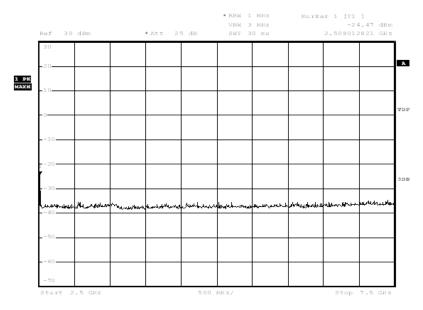

Date: 29.00T.2014 18:27:19

A.8.3.8 Channel 190: 7.5GHz -10GHz

Spurious emission limit -13dBm

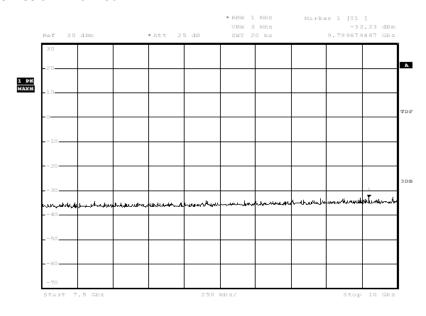


Date: 29.00T.2014 18:27:36



A.8.3.9 Channel 251: 30MHz - 1GHz

Spurious emission limit -13dBm.


NOTE: peak above the limit line is the carrier frequency.

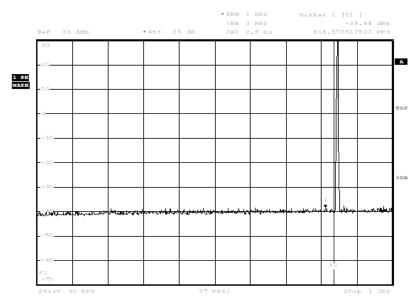

Date: 29.00T.2014 18:27:57

A.8.3.10 Channel 251: 1GHz - 2.5GHz

Spurious emission limit -13dBm.

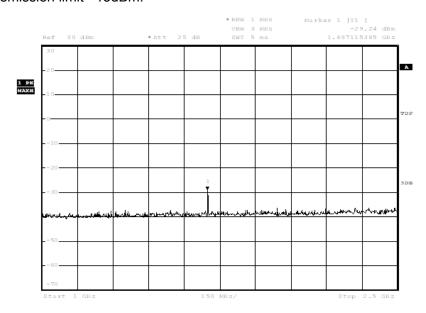


Date: 29.00T.2014 18:28:15



A.8.3.11 Channel 251:2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

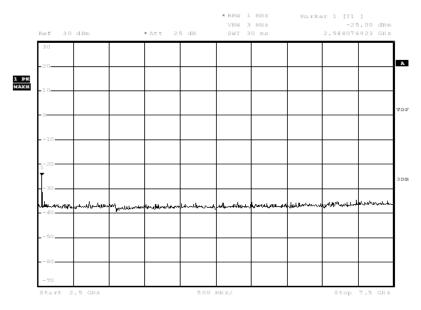

Date: 29.00T.2014 18:28:32

A.8.3.12 Channel 251: 7.5GHz - 10GHz


Spurious emission limit -13dBm.

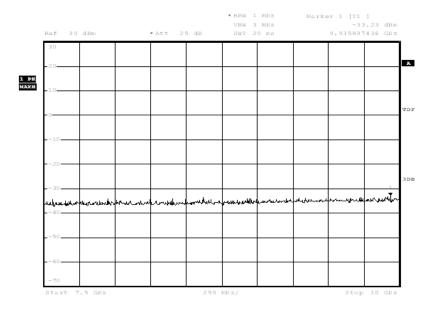

Date: 29.00T.2014 18:28:50




A.8.3.13 Idle mode: 30MHz – 1GHz Spurious emission limit –13dBm.

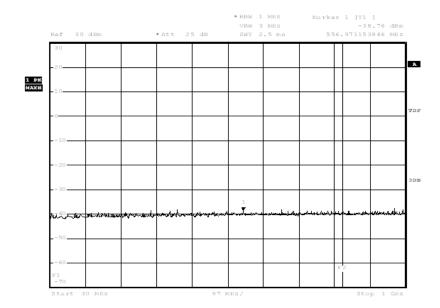

Date: 29.00T.2014 18:29:12

A.8.3.14 Idle mode: 1GHz – 2.5GHz

Spurious emission limit -13dBm.

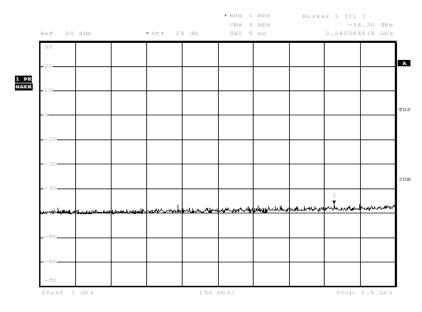


Date: 29.00T.2014 18:29:30



A.8.3.15 Idle mode: 2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

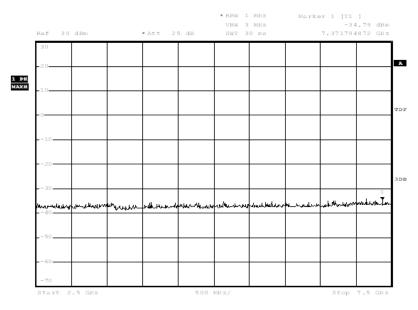

Date: 29.00T.2014 18:29:47

A.8.3.16 Idle mode: 7.5GHz – 10GHz

Spurious emission limit -13dBm.

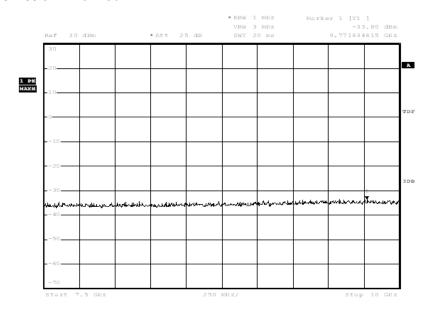


Date: 29.00T.2014 - 18:30:05



PCS1900

A.8.3.17 Channel 512: 30MHz - 1GHz

Spurious emission limit -13dBm.

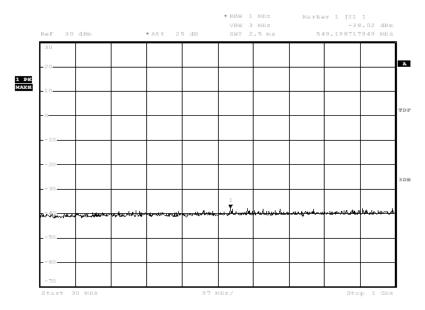


Date: 29.00T.2014 19:23:00

A.8.3.18 Channel 512: 1GHz - 2.5GHz

Spurious emission limit -13dBm.

NOTE: peak above the limit line is the carrier frequency.

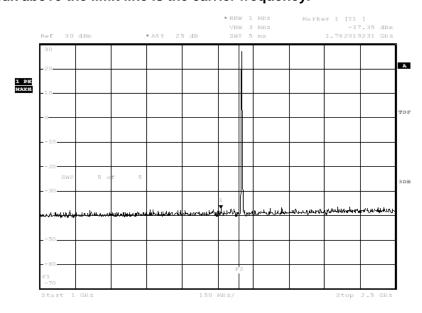


Date: 29.00T.2014 19:23:13



A.8.3.19 Channel 512: 2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

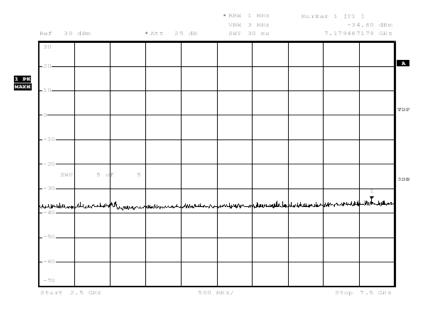

Date: 29.00T.2014 19:23:30

A.8.3.20 Channel 512: 7.5GHz -10GHz

Spurious emission limit –13dBm.

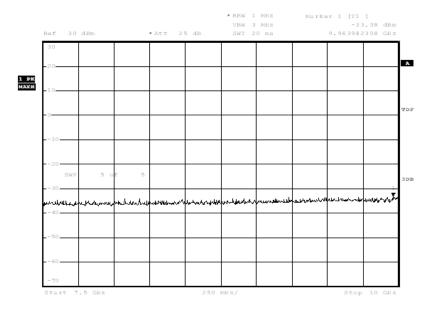


Date: 29.00T.2014 19:23:48



A.8.3.21 Channel 512: 10GHz -15GHz


Spurious emission limit -13dBm.

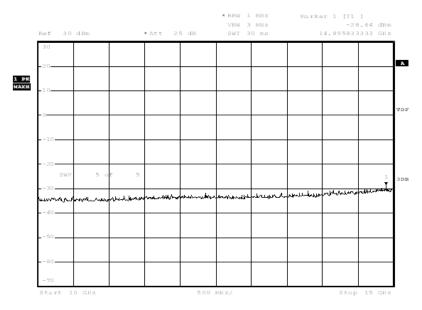

Date: 29.00T.2014 19:24:05

A.8.3.22 Channel 512: 15GHz -20GHz

Spurious emission limit -13dBm.

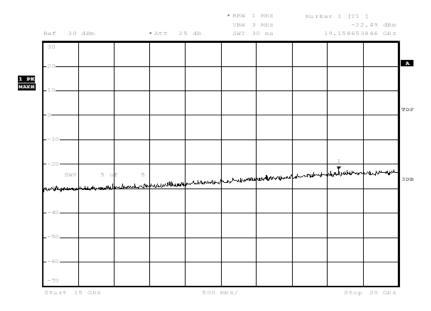


Date: 29.00T.2014 19:24:23



A.8.3.23 Channel 661: 30MHz - 1GHz

Spurious emission limit -13dBm

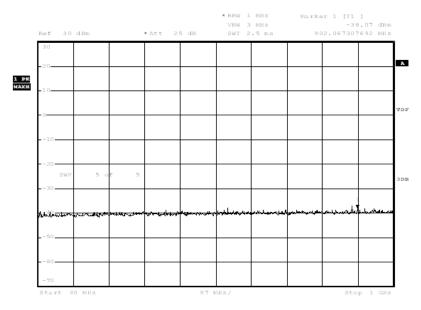


Date: 29.00T.2014 19:24:43

A.8.3.24 Channel 661: 1GHz -2.5GHz

Spurious emission limit –13dBm

NOTE: peak above the limit line is the carrier frequency.

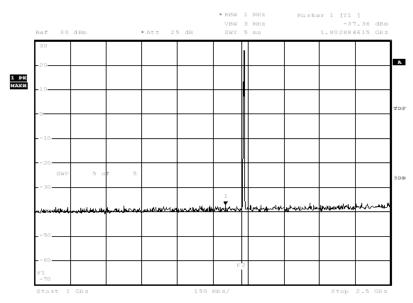


Date: 29.00T.2014 19:24:56



A.8.3.25 Channel 661: 2.5GHz -7.5GHz


Spurious emission limit -13dBm

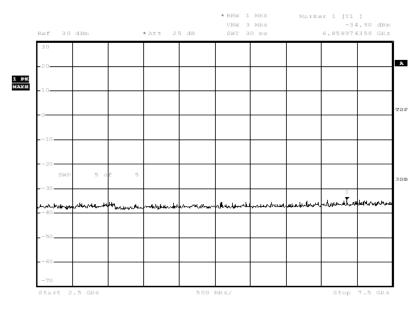

Date: 29.00T.2014 19:25:14

A.8.3.26 Channel 661: 7.5GHz -10GHz

Spurious emission limit -13dBm

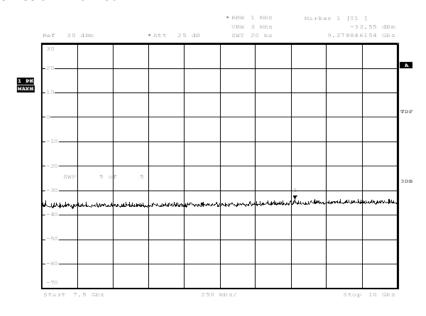


Date: 29.00T.2014 19:25:31



A.8.3.27 Channel 661: 10GHz -15GHz


Spurious emission limit -13dBm.

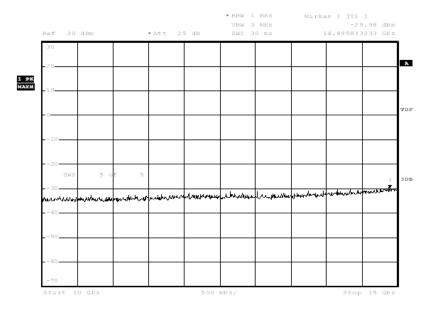

Date: 29.00T.2014 19:25:49

A.8.3.28 Channel 661: 15GHz -20GHz

Spurious emission limit -13dBm.

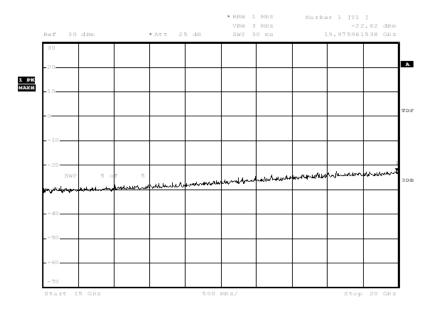


Date: 29.00T.2014 19:26:06



A.8.3.29 Channel 810: 30MHz - 1GHz

Spurious emission limit -13dBm.

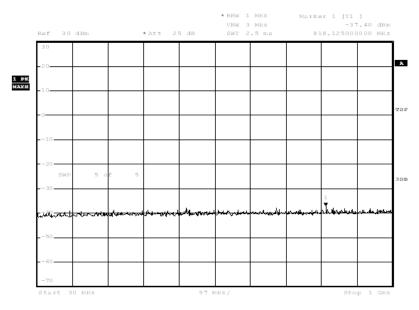


Date: 29.00T.2014 19:26:26

A.8.3.30 Channel 810: 1GHz - 2.5GHz

Spurious emission limit -13dBm.

NOTE: peak above the limit line is the carrier frequency.

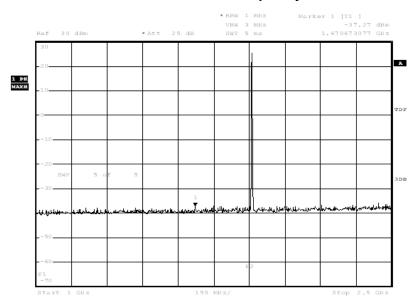


Date: 29.00T.2014 19:26:39



A.8.3.31 Channel 810:2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

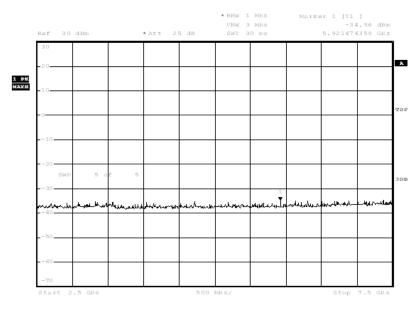

Date: 29.00T.2014 19:26:57

A.8.3.32 Channel 810: 7.5GHz - 10GHz

Spurious emission limit -13dBm.

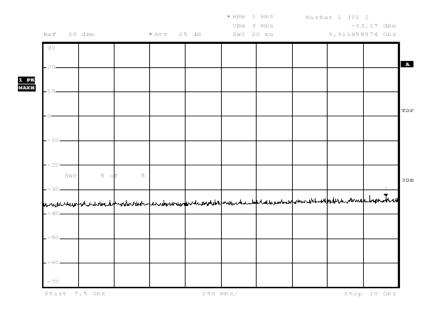


Date: 29.00T.2014 19:27:14



A.8.3.33 Channel 810: 10GHz -15GHz


Spurious emission limit -13dBm.

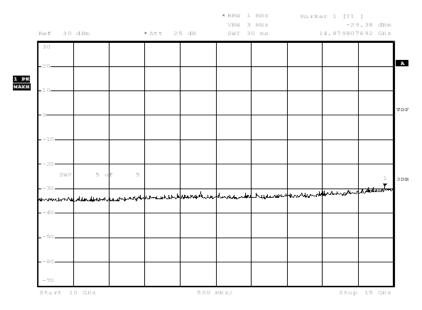

Date: 29.00T.2014 19:27:32

A.8.3.34 Channel 810: 15GHz -20GHz

Spurious emission limit -13dBm.

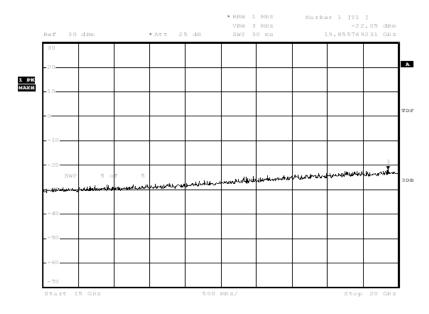


Date: 29.00T.2014 19:27:50



A.8.3.35 Idle mode: 30MHz – 1GHz


Spurious emission limit -13dBm.

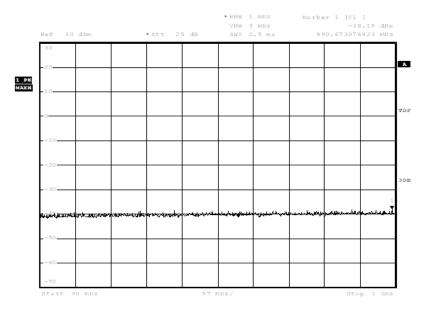

Date: 29.00T.2014 19:28:12

A.8.3.36 Idle mode: 1GHz - 2.5GHz

Spurious emission limit -13dBm.

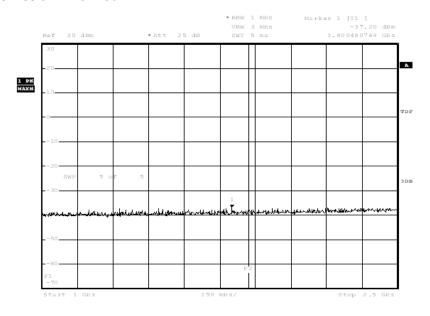


Date: 29.00T.2014 19:28:25



A.8.3.37 Idle mode: 2.5GHz - 7.5GHz


Spurious emission limit -13dBm.

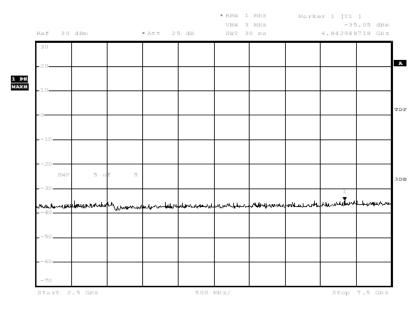

Date: 29.00T.2014 19:28:42

A.8.3.38 Idle mode: 7.5GHz - 10GHz

Spurious emission limit -13dBm.

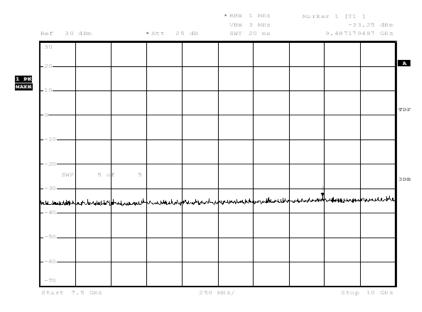


Date: 29.00T.2014 19:29:00



A.8.3.39 Idle mode: 10GHz -15GHz


Spurious emission limit -13dBm.

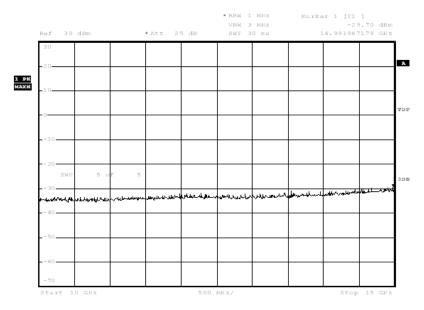

Date: 29.00T.2014 19:29:17

A.8.3.40 IDLE mode: 15GHz -20GHz

Spurious emission limit -13dBm.

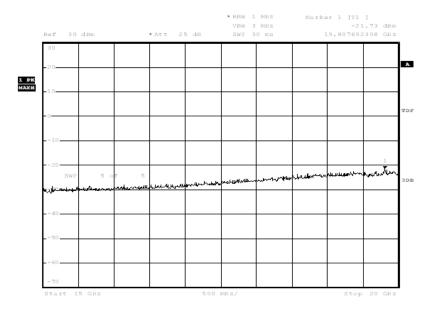

Date: 29.00T.2014 19:29:35



A.9 PEAK-TO-AVERAGE POWER RATIO

A.9.1 Measurement description

According to KDB971168, the transmitter's peak-to-average power ratio (PAPR) shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

The parameter of spectrum analyzer: RBW = 10MHz, detector = sample, No. of sample = 500,000

A.9.2 Measurement results

Frequency Error vs Temperature

	Frequency(MHz)	PAPR(dB)
GSM850	836.60	7.32
GPRS850	836.60	7.36
EGPRS850	836.60	7.48
GSM1900	1880.00	7.38
GPRS1900	1880.00	7.45
EGPRS1900	1880.00	7.56

END OF REPORT