



802.11ax-HE80 99% & 26dB Bandwidth


Channel 42 (5210MHz)

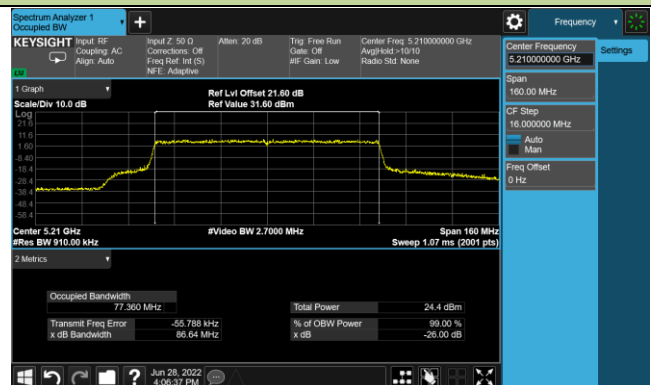


Channel 58 (5290MHz)

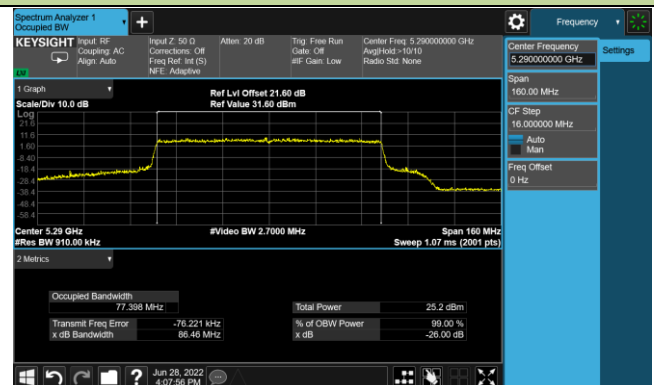


Channel 106 (5530MHz)

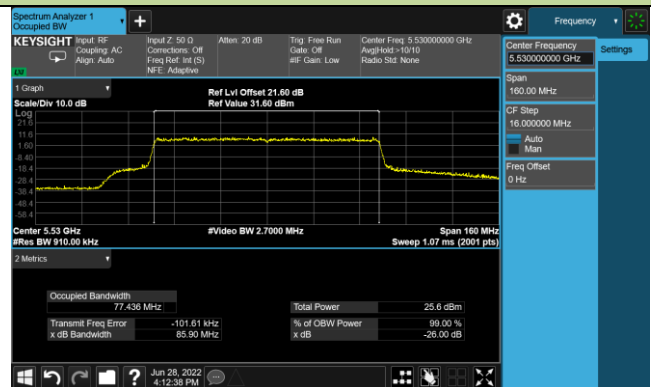


Channel 138 (5690MHz)

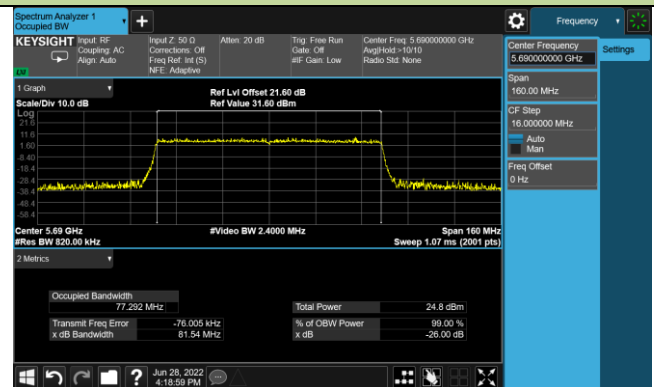

Channel 155 (5775MHz)

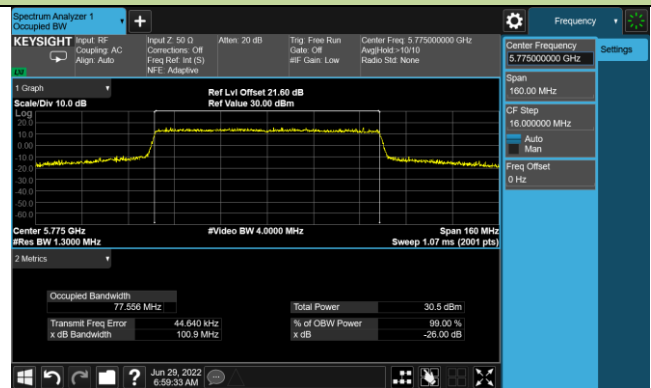

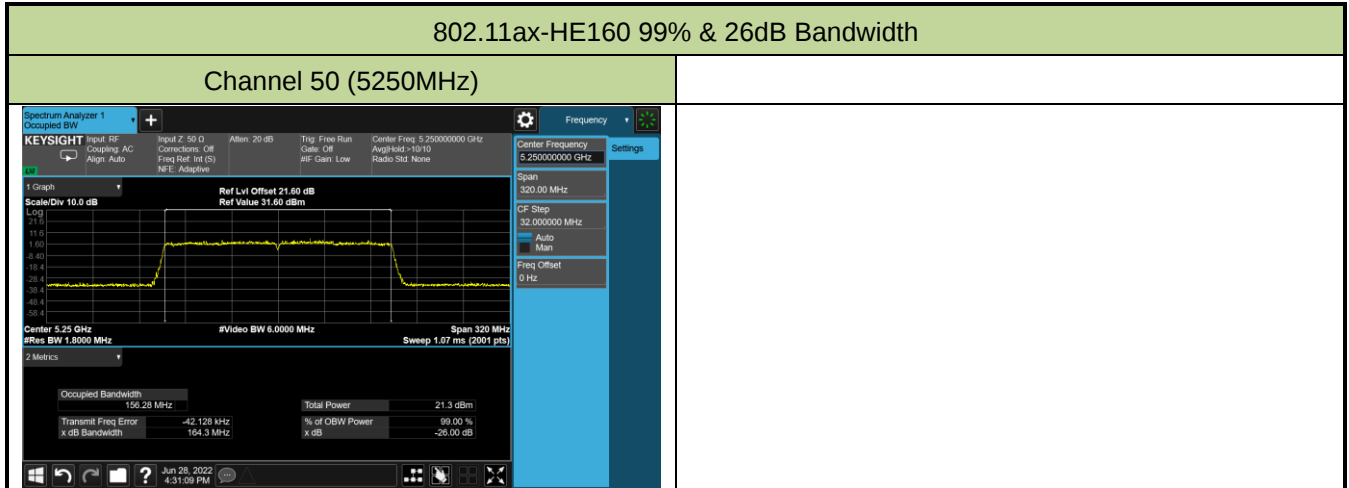


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022-06-28		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11a	6Mbps	149	5745	16.36	≥ 0.5	Pass
802.11a	6Mbps	157	5785	16.37	≥ 0.5	Pass
802.11a	6Mbps	165	5825	16.39	≥ 0.5	Pass
802.11ac-VHT20	MCS0	149	5745	17.62	≥ 0.5	Pass
802.11ac-VHT20	MCS0	157	5785	17.61	≥ 0.5	Pass
802.11ac-VHT20	MCS0	165	5825	17.60	≥ 0.5	Pass
802.11ac-VHT40	MCS0	151	5755	36.36	≥ 0.5	Pass
802.11ac-VHT40	MCS0	159	5795	36.35	≥ 0.5	Pass
802.11ac-VHT80	MCS0	155	5775	76.02	≥ 0.5	Pass
802.11ax-HE20	MCS0	149	5745	18.97	≥ 0.5	Pass
802.11ax-HE20	MCS0	157	5785	19.03	≥ 0.5	Pass
802.11ax-HE20	MCS0	165	5825	19.04	≥ 0.5	Pass
802.11ax-HE40	MCS0	151	5755	37.93	≥ 0.5	Pass
802.11ax-HE40	MCS0	159	5795	37.92	≥ 0.5	Pass
802.11ax-HE80	MCS0	155	5775	77.59	≥ 0.5	Pass

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

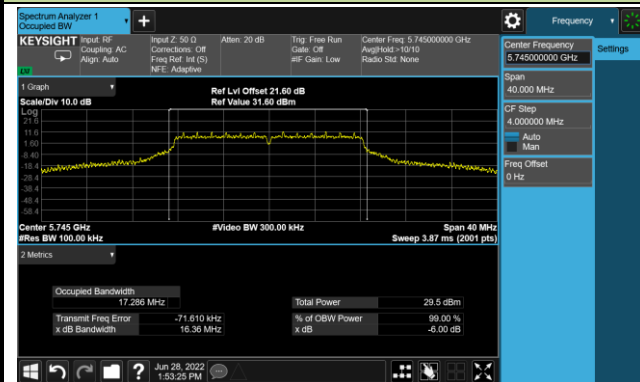

Channel 157 (5785MHz)

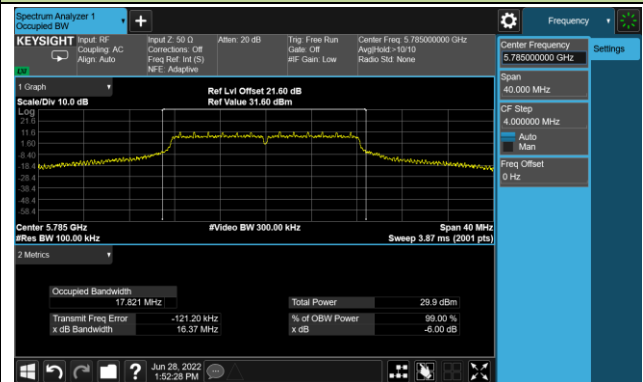


Channel 165 (5825MHz)

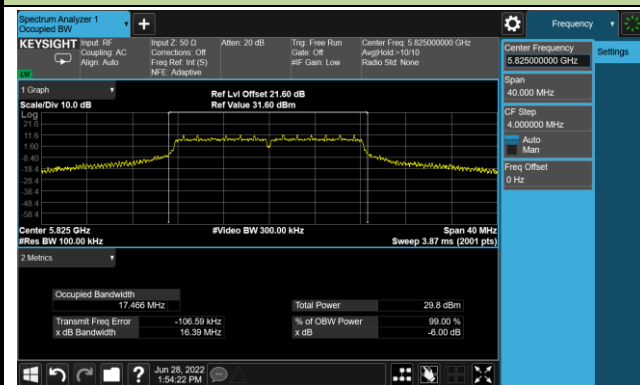


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

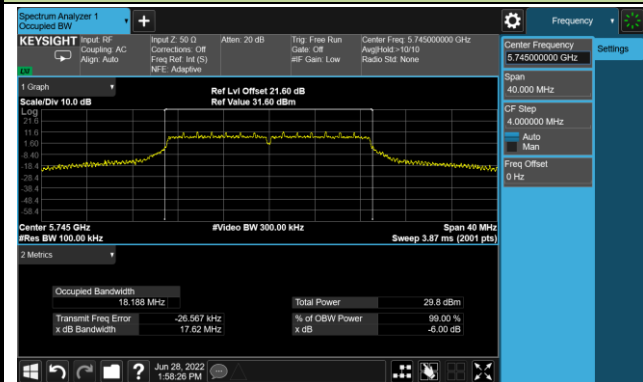

Channel 157 (5785MHz)

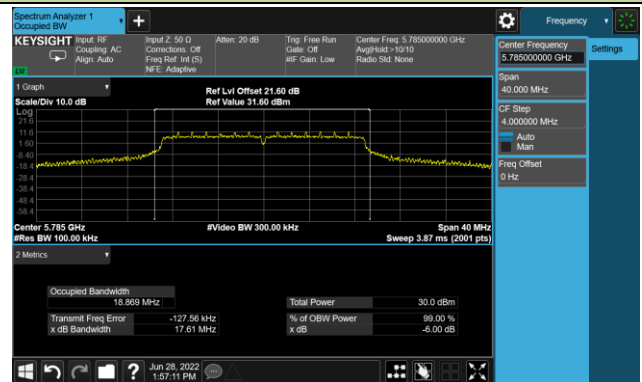


Channel 165 (5825MHz)

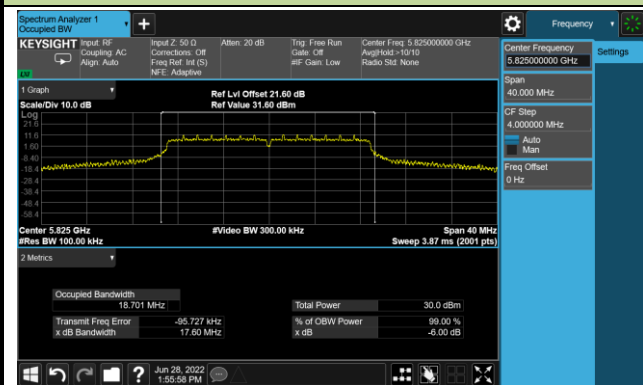



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

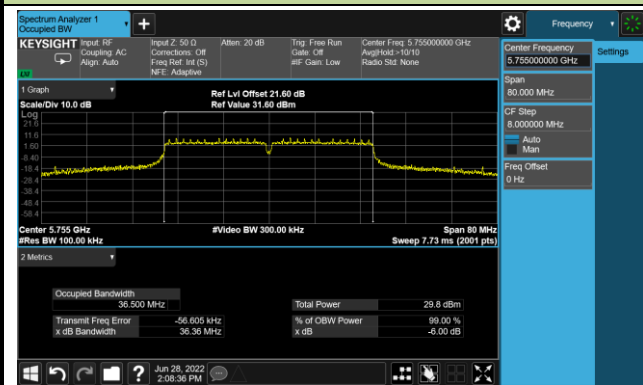


Channel 159 (5795MHz)

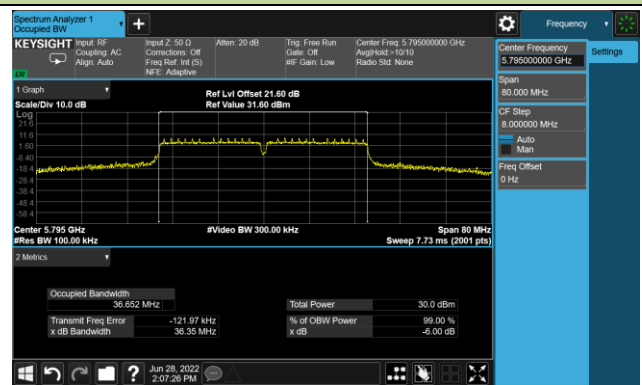

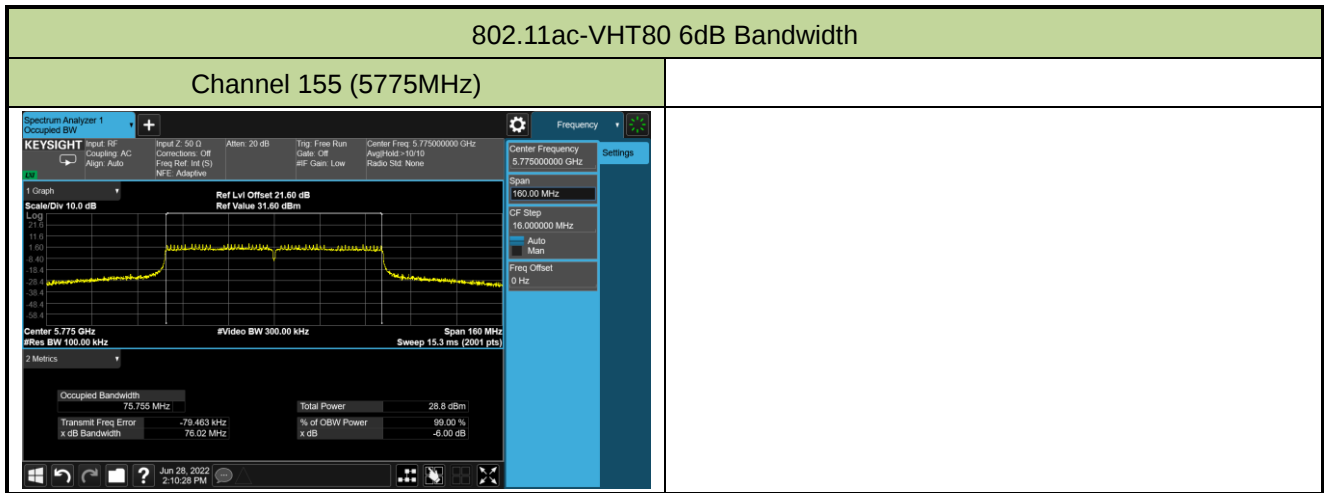


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

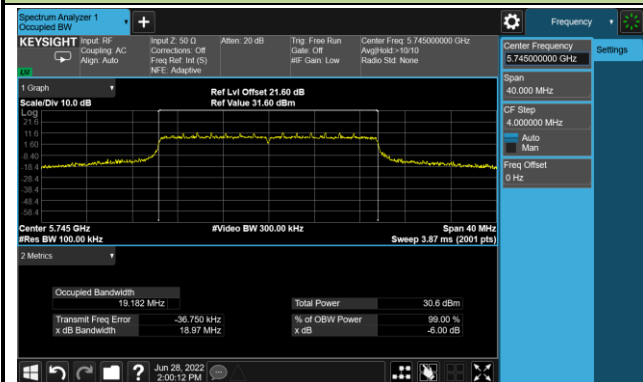

Channel 157 (5785MHz)

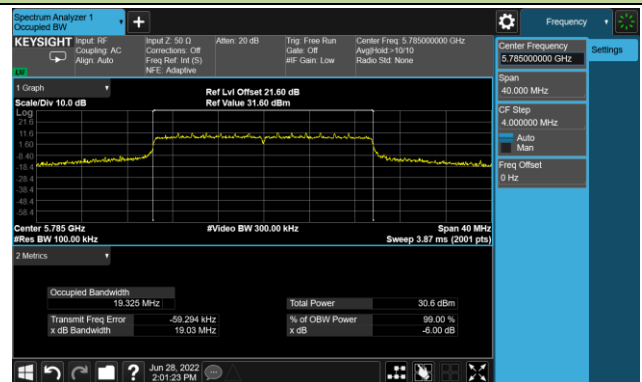


Channel 165 (5825MHz)

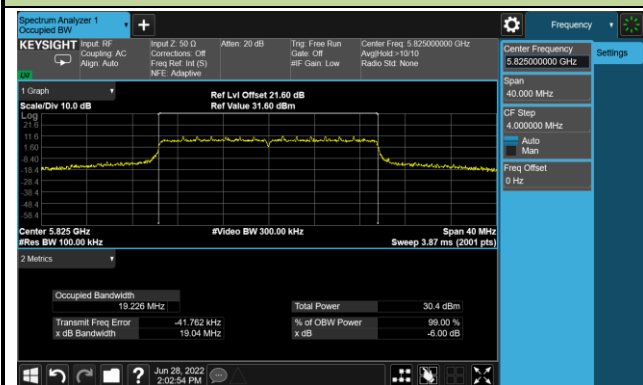



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

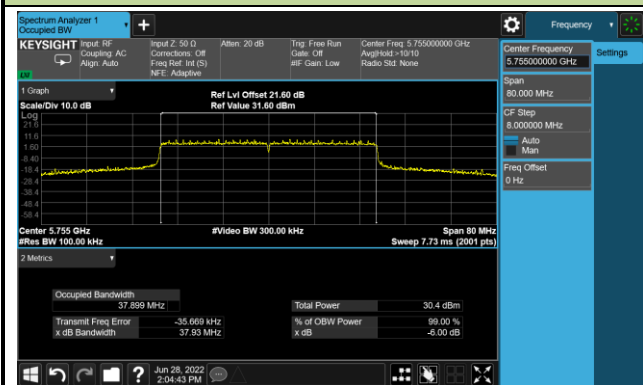

Channel 159 (5795MHz)

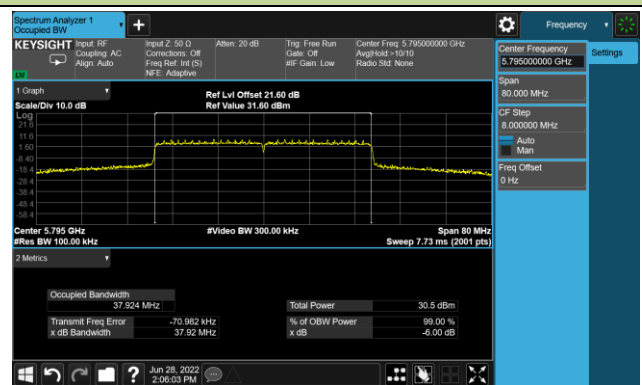



A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022-06-10 ~ 2022-06-22		

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11a	6Mbps	36	5180	21.69	21.60	21.34	21.31	27.51	≤ 30.00
11a	6Mbps	44	5220	22.04	22.00	21.81	21.79	27.93	≤ 30.00
11a	6Mbps	48	5240	22.11	22.03	21.72	21.66	27.90	≤ 30.00
11a	6Mbps	52	5260	16.69	16.34	16.15	16.38	22.41	≤ 23.98
11a	6Mbps	60	5300	16.31	16.19	16.11	16.47	22.29	≤ 23.98
11a	6Mbps	64	5320	16.56	16.13	16.19	16.42	22.35	≤ 23.98
11a	6Mbps	100	5500	16.27	16.29	16.08	15.98	22.18	≤ 23.98
11a	6Mbps	116	5580	16.62	16.66	16.49	16.52	22.59	≤ 23.98
11a	6Mbps	140	5700	16.35	16.87	16.26	16.83	22.61	≤ 23.98
11a	6Mbps	144	5720	16.51	16.92	16.30	16.93	22.69	≤ 22.97
11a	6Mbps	149	5745	23.85	23.51	23.70	24.05	29.80	≤ 30.00
11a	6Mbps	157	5785	23.86	23.49	23.66	23.99	29.77	≤ 30.00
11a	6Mbps	165	5825	23.72	23.44	23.55	24.01	29.71	≤ 30.00
11ac-VHT20	MCS0	36	5180	21.58	21.31	21.21	21.19	27.35	≤ 30.00
11ac-VHT20	MCS0	44	5220	22.73	22.65	22.39	22.61	28.62	≤ 30.00
11ac-VHT20	MCS0	48	5240	22.82	22.57	22.27	22.29	28.51	≤ 30.00
11ac-VHT20	MCS0	52	5260	16.52	16.46	16.27	16.53	22.47	≤ 23.98
11ac-VHT20	MCS0	60	5300	17.13	16.89	16.96	17.51	23.15	≤ 23.98
11ac-VHT20	MCS0	64	5320	16.80	16.68	16.56	16.82	22.74	≤ 23.98
11ac-VHT20	MCS0	100	5500	16.51	16.57	16.37	16.29	22.46	≤ 23.98
11ac-VHT20	MCS0	116	5580	17.22	17.15	16.72	16.85	23.01	≤ 23.98
11ac-VHT20	MCS0	140	5700	16.45	16.88	16.43	16.80	22.67	≤ 23.98
11ac-VHT20	MCS0	144	5720	16.69	17.00	16.32	17.04	22.79	≤ 23.02
11ac-VHT20	MCS0	149	5745	23.76	23.55	23.66	24.02	29.77	≤ 30.00
11ac-VHT20	MCS0	157	5785	23.82	23.41	23.71	24.05	29.77	≤ 30.00
11ac-VHT20	MCS0	165	5825	23.80	23.38	23.52	24.05	29.72	≤ 30.00

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11ac-VHT40	MCS0	38	5190	18.07	17.30	17.23	17.36	23.52	≤ 30.00
11ac-VHT40	MCS0	46	5230	22.57	22.15	21.77	22.15	28.19	≤ 30.00
11ac-VHT40	MCS0	54	5270	18.05	17.58	17.52	17.81	23.77	≤ 23.98
11ac-VHT40	MCS0	62	5310	18.17	17.62	17.55	17.89	23.84	≤ 23.98
11ac-VHT40	MCS0	102	5510	17.73	17.68	17.47	18.04	23.76	≤ 23.98
11ac-VHT40	MCS0	110	5550	17.70	17.83	17.55	18.26	23.86	≤ 23.98
11ac-VHT40	MCS0	134	5670	17.74	17.86	17.43	17.69	23.70	≤ 23.98
11ac-VHT40	MCS0	142	5710	18.01	17.90	17.69	17.68	23.84	≤ 23.98
11ac-VHT40	MCS0	151	5755	23.85	23.92	23.77	23.42	29.76	≤ 30.00
11ac-VHT40	MCS0	159	5795	24.01	23.95	23.80	23.57	29.86	≤ 30.00
11ac-VHT80	MCS0	42	5210	17.63	17.47	17.52	17.38	23.52	≤ 30.00
11ac-VHT80	MCS0	58	5290	18.02	17.62	17.55	17.53	23.71	≤ 23.98
11ac-VHT80	MCS0	106	5530	17.65	17.75	17.54	17.93	23.74	≤ 23.98
11ac-VHT80	MCS0	138	5690	17.72	17.85	17.78	17.82	23.81	≤ 23.98
11ac-VHT80	MCS0	155	5775	22.31	22.43	22.08	22.22	28.28	≤ 30.00
11ac-VHT160	MCS0	50	5250	13.76	13.56	13.43	13.13	19.50	≤ 23.98

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11ax-HE20	MCS0	36	5180	21.56	21.36	21.06	21.17	27.31	≤ 30.00
11ax-HE20	MCS0	44	5220	23.07	22.88	22.67	22.72	28.86	≤ 30.00
11ax-HE20	MCS0	48	5240	22.86	22.73	22.42	22.44	28.64	≤ 30.00
11ax-HE20	MCS0	52	5260	17.15	17.11	16.88	17.17	23.10	≤ 23.98
11ax-HE20	MCS0	60	5300	16.90	16.71	16.52	16.85	22.77	≤ 23.98
11ax-HE20	MCS0	64	5320	16.89	16.55	16.42	16.90	22.72	≤ 23.98
11ax-HE20	MCS0	100	5500	17.04	16.94	16.72	16.75	22.89	≤ 23.98
11ax-HE20	MCS0	116	5580	16.98	17.09	16.63	16.82	22.90	≤ 23.98
11ax-HE20	MCS0	140	5700	16.63	16.96	16.38	17.04	22.78	≤ 23.98
11ax-HE20	MCS0	144	5720	16.56	17.03	16.45	16.96	22.78	≤ 22.98
11ax-HE20	MCS0	149	5745	23.63	23.43	23.59	23.87	29.65	≤ 30.00
11ax-HE20	MCS0	157	5785	23.74	23.62	23.76	24.00	29.80	≤ 30.00
11ax-HE20	MCS0	165	5825	23.83	23.46	23.73	24.05	29.79	≤ 30.00
11ax-HE40	MCS0	38	5190	18.35	17.96	17.83	17.78	24.01	≤ 30.00
11ax-HE40	MCS0	46	5230	21.89	21.55	21.28	21.41	27.56	≤ 30.00
11ax-HE40	MCS0	54	5270	17.96	17.84	17.78	17.86	23.88	≤ 23.98
11ax-HE40	MCS0	62	5310	17.99	17.58	17.66	17.83	23.79	≤ 23.98
11ax-HE40	MCS0	102	5510	17.71	17.67	17.39	17.89	23.69	≤ 23.98
11ax-HE40	MCS0	110	5550	17.80	17.75	17.40	18.19	23.81	≤ 23.98
11ax-HE40	MCS0	134	5670	17.81	17.64	17.39	17.63	23.64	≤ 23.98
11ax-HE40	MCS0	142	5710	17.73	17.66	17.45	17.80	23.68	≤ 23.98
11ax-HE40	MCS0	151	5755	24.02	24.17	23.80	23.40	29.88	≤ 30.00
11ax-HE40	MCS0	159	5795	23.86	23.97	23.79	23.56	29.82	≤ 30.00
11ax-HE80	MCS0	42	5210	17.71	17.52	17.56	17.62	23.62	≤ 30.00
11ax-HE80	MCS0	58	5290	17.79	17.51	17.49	17.68	23.64	≤ 23.98
11ax-HE80	MCS0	106	5530	17.96	17.76	17.62	17.92	23.84	≤ 23.98
11ax-HE80	MCS0	138	5690	17.58	17.73	17.58	17.72	23.67	≤ 23.98
11ax-HE80	MCS0	155	5775	23.17	23.36	22.96	22.84	29.11	≤ 30.00
11ax-HE160	MCS0	50	5250	14.35	14.45	14.36	14.23	20.37	≤ 23.98

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Liz Yuan
Test Date	2022-06-21 ~ 2022-06-28		

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
For NII-1/-2a/-2c Bands:										
11a	6Mbps	36	5180	10.070	9.823	9.720	9.568	95.16	16.035	≤ 16.55
11a	6Mbps	44	5220	10.220	10.171	9.961	9.875	95.16	16.295	≤ 16.55
11a	6Mbps	48	5240	10.369	10.116	9.980	9.726	95.16	16.290	≤ 16.55
11a	6Mbps	52	5260	4.617	4.532	4.292	4.536	95.16	10.732	≤ 11.00
11a	6Mbps	60	5300	4.722	4.420	4.684	4.596	95.16	10.843	≤ 11.00
11a	6Mbps	64	5320	4.611	4.377	4.452	4.537	95.16	10.731	≤ 11.00
11a	6Mbps	100	5500	4.588	4.515	4.421	4.211	95.16	10.672	≤ 11.00
11a	6Mbps	116	5580	4.435	4.361	4.404	4.517	95.16	10.666	≤ 11.00
11a	6Mbps	140	5700	4.311	4.790	4.165	4.842	95.16	10.773	≤ 11.00
11a	6Mbps	144	5720	4.390	4.875	4.321	4.970	95.16	10.885	≤ 11.00
11ac-VHT20	MCS0	36	5180	9.104	9.046	8.785	8.907	98.57	15.045	≤ 16.55
11ac-VHT20	MCS0	44	5220	10.478	10.283	10.005	10.045	98.57	16.290	≤ 16.55
11ac-VHT20	MCS0	48	5240	10.464	10.328	10.189	10.208	98.57	16.382	≤ 16.55
11ac-VHT20	MCS0	52	5260	4.807	4.737	4.467	4.759	98.57	10.778	≤ 11.00
11ac-VHT20	MCS0	60	5300	4.980	4.750	4.581	4.924	98.57	10.895	≤ 11.00
11ac-VHT20	MCS0	64	5320	4.949	4.644	4.538	4.823	98.57	10.825	≤ 11.00
11ac-VHT20	MCS0	100	5500	4.865	4.867	4.576	4.613	98.57	10.816	≤ 11.00
11ac-VHT20	MCS0	116	5580	4.847	4.933	4.695	4.656	98.57	10.867	≤ 11.00
11ac-VHT20	MCS0	140	5700	4.408	4.640	4.127	4.745	98.57	10.570	≤ 11.00
11ac-VHT20	MCS0	144	5720	4.569	5.043	4.414	4.937	98.57	10.832	≤ 11.00
11ac-VHT40	MCS0	38	5190	1.127	1.203	1.210	1.198	97.14	7.331	≤ 16.55
11ac-VHT40	MCS0	46	5230	7.535	7.056	6.922	7.236	97.14	13.340	≤ 16.55
11ac-VHT40	MCS0	54	5270	1.649	1.712	1.692	1.722	97.14	7.840	≤ 11.00
11ac-VHT40	MCS0	62	5310	1.456	1.539	1.505	1.516	97.14	7.651	≤ 11.00
11ac-VHT40	MCS0	102	5510	1.184	1.322	1.554	1.627	97.14	7.572	≤ 11.00
11ac-VHT40	MCS0	110	5550	1.861	1.889	1.896	1.953	97.14	8.046	≤ 11.00
11ac-VHT40	MCS0	134	5670	1.235	1.200	1.209	1.228	97.14	7.365	≤ 11.00
11ac-VHT40	MCS0	142	5710	1.393	1.384	1.355	1.370	97.14	7.522	≤ 11.00

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/ MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
For NII-1/-2a/-2c Bands:										
11ac-VHT80	MCS0	42	5210	-2.865	-2.854	-2.739	-2.702	94.46	3.479	≤ 16.55
11ac-VHT80	MCS0	58	5290	-2.639	-2.685	-2.761	-2.446	94.46	3.637	≤ 11.00
11ac-VHT80	MCS0	106	5530	-2.419	-2.428	-2.657	-2.607	94.46	3.742	≤ 11.00
11ac-VHT80	MCS0	138	5690	-1.841	-1.814	-1.692	-1.643	94.46	4.521	≤ 11.00
11ac-VHT160	MCS0	50	5250	-8.532	-8.475	-8.562	-8.267	89.84	-1.972	≤ 11.00
11ax-HE20	MCS0	36	5180	9.309	9.220	8.723	8.930	98.56	15.135	≤ 16.55
11ax-HE20	MCS0	44	5220	10.581	10.353	10.202	10.244	98.56	16.431	≤ 16.55
11ax-HE20	MCS0	48	5240	10.452	10.334	9.941	10.053	98.56	16.283	≤ 16.55
11ax-HE20	MCS0	52	5260	4.707	4.620	4.428	4.907	98.56	10.753	≤ 11.00
11ax-HE20	MCS0	60	5300	4.912	4.769	4.575	4.955	98.56	10.889	≤ 11.00
11ax-HE20	MCS0	64	5320	4.913	4.508	4.446	4.737	98.56	10.739	≤ 11.00
11ax-HE20	MCS0	100	5500	4.751	4.805	4.437	4.507	98.56	10.711	≤ 11.00
11ax-HE20	MCS0	116	5580	4.713	4.811	4.409	4.594	98.56	10.718	≤ 11.00
11ax-HE20	MCS0	140	5700	4.833	4.876	4.349	4.915	98.56	10.833	≤ 11.00
11ax-HE20	MCS0	144	5720	4.518	4.845	4.271	4.792	98.56	10.696	≤ 11.00
11ax-HE40	MCS0	38	5190	1.538	1.408	1.422	1.418	97.04	7.598	≤ 16.55
11ax-HE40	MCS0	46	5230	5.279	5.291	5.300	5.329	97.04	11.451	≤ 16.55
11ax-HE40	MCS0	54	5270	1.126	1.133	1.148	1.165	97.04	7.294	≤ 11.00
11ax-HE40	MCS0	62	5310	0.894	0.812	0.970	0.890	97.04	7.043	≤ 11.00
11ax-HE40	MCS0	102	5510	1.081	1.078	1.082	1.193	97.04	7.260	≤ 11.00
11ax-HE40	MCS0	110	5550	1.069	1.137	1.116	1.169	97.04	7.274	≤ 11.00
11ax-HE40	MCS0	134	5670	0.826	0.807	1.009	1.051	97.04	7.076	≤ 11.00
11ax-HE40	MCS0	142	5710	1.112	1.138	1.222	1.233	97.04	7.328	≤ 11.00
11ax-HE80	MCS0	42	5210	-2.366	-2.245	-2.145	-2.635	93.65	3.962	≤ 16.55
11ax-HE80	MCS0	58	5290	-2.116	-2.135	-2.726	-2.687	93.65	3.899	≤ 11.00
11ax-HE80	MCS0	106	5530	-2.369	-1.845	-1.940	-1.959	93.65	4.282	≤ 11.00
11ax-HE80	MCS0	138	5690	-1.866	-1.901	-1.947	-1.960	93.65	4.387	≤ 11.00
11ax-HE160	MCS0	50	5250	-8.516	-8.438	-8.620	-8.003	89.02	-1.862	≤ 11.00

Test Mode	Data Rate/ MCS	Ch. No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ 510kHz)	PSD Limit (dBm/ 500kHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
For NII-3 Band										
11a	6Mbps	149	5745	8.741	8.527	8.835	9.340	95.16	15.107	≤ 28.85
11a	6Mbps	157	5785	8.814	8.676	8.749	8.979	95.16	15.042	≤ 28.85
11a	6Mbps	165	5825	8.595	8.487	8.493	9.103	95.16	14.913	≤ 28.85
11ac-VHT20	MCS0	149	5745	8.644	8.296	8.482	8.788	98.57	14.640	≤ 28.85
11ac-VHT20	MCS0	157	5785	8.887	8.385	8.604	8.876	98.57	14.776	≤ 28.85
11ac-VHT20	MCS0	165	5825	8.945	8.594	8.730	9.003	98.57	14.904	≤ 28.85
11ac-VHT40	MCS0	151	5755	4.146	4.128	4.048	4.687	97.14	10.406	≤ 28.85
11ac-VHT40	MCS0	159	5795	4.504	4.533	4.531	4.560	97.14	10.679	≤ 28.85
11ac-VHT80	MCS0	155	5775	0.322	0.316	0.387	0.422	94.46	6.630	≤ 28.85
11ax-HE20	MCS0	149	5745	8.718	8.641	8.699	9.349	98.56	14.945	≤ 28.85
11ax-HE20	MCS0	157	5785	8.788	8.690	8.831	9.067	98.56	14.930	≤ 28.85
11ax-HE20	MCS0	165	5825	8.661	8.491	8.652	9.043	98.56	14.800	≤ 28.85
11ax-HE40	MCS0	151	5755	4.014	4.051	4.041	4.066	97.04	10.194	≤ 28.85
11ax-HE40	MCS0	159	5795	4.383	4.488	4.427	4.462	97.04	10.591	≤ 28.85
11ax-HE80	MCS0	155	5775	0.237	0.253	0.224	0.256	93.65	6.548	≤ 28.85


Note 1: When EUT duty cycle < 98%, Total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle ≥ 98%, Total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\}$.


Note 2: PSD Limit (dBm/ MHz) = 30 - (7.15 - 6) dBm/500kHz = 28.85 dBm/500kHz.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

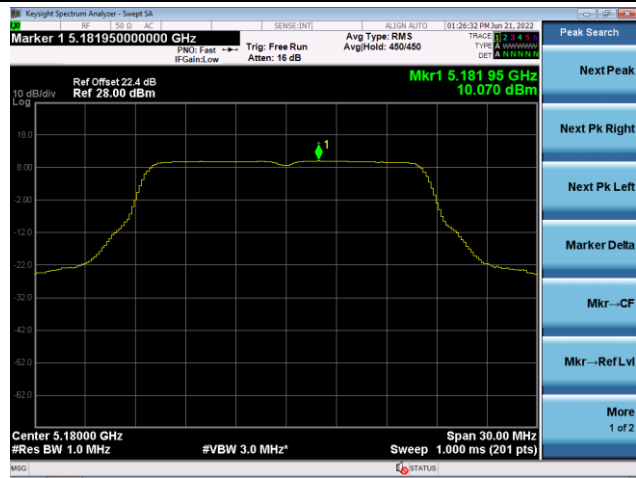

Channel 44 (5220MHz)

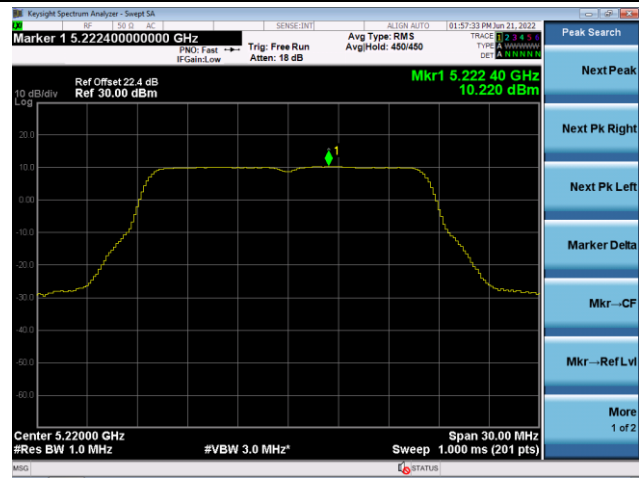

Channel 48 (5240MHz)

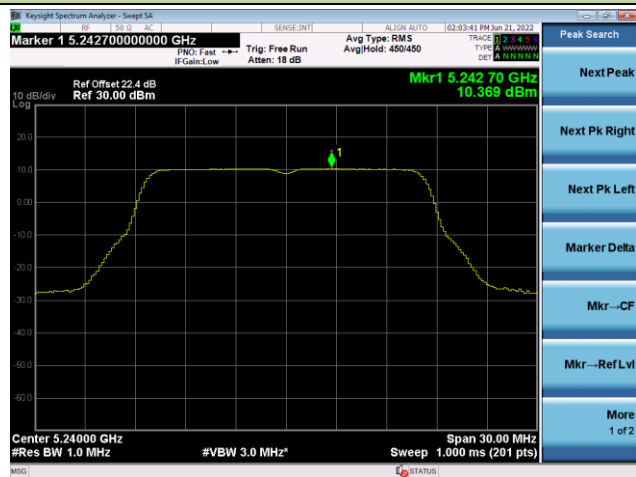


Channel 52(5260MHz)





Channel 60 (5300MHz)



Channel 64 (5320MHz)

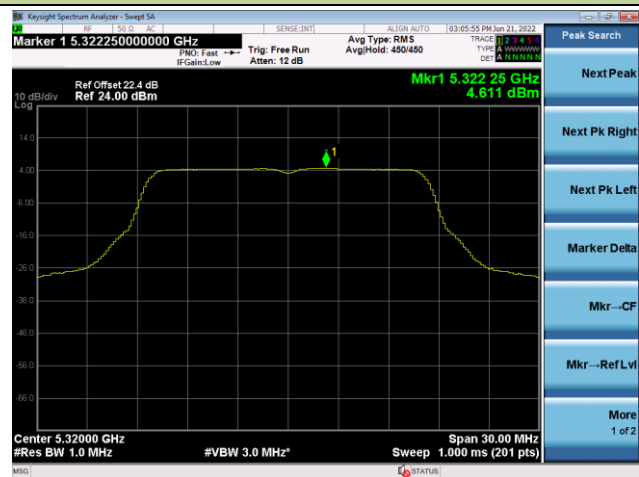


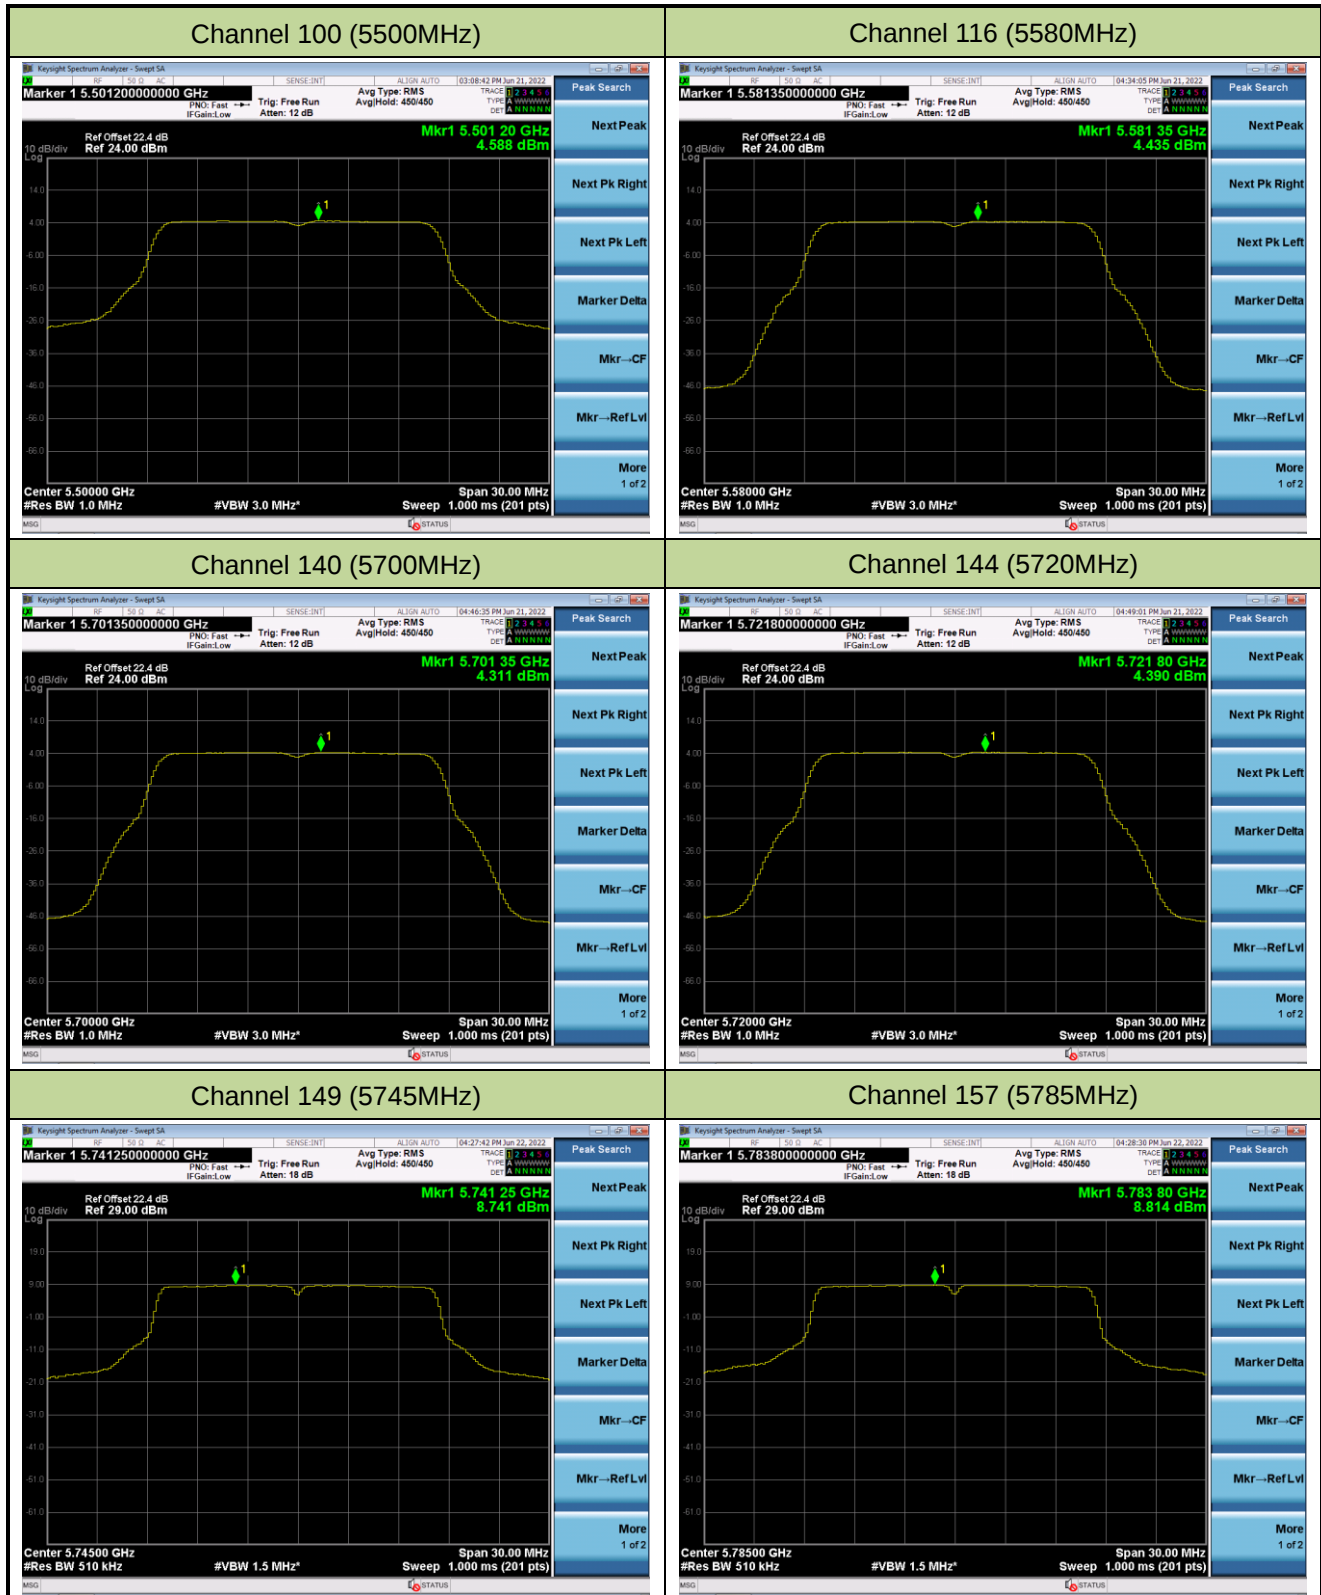

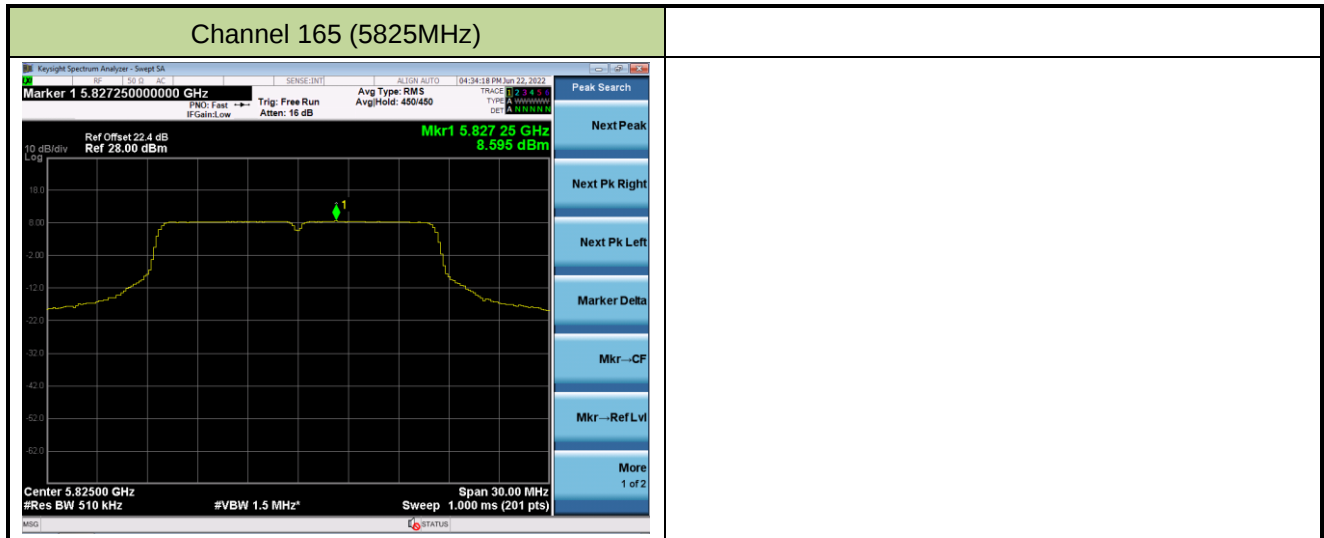


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

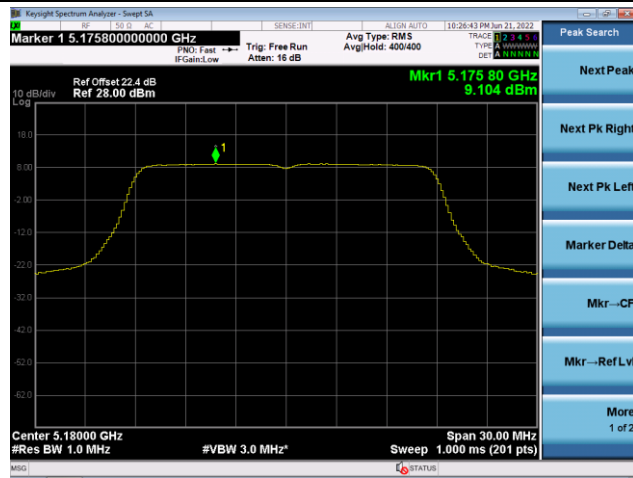

Channel 44 (5220MHz)

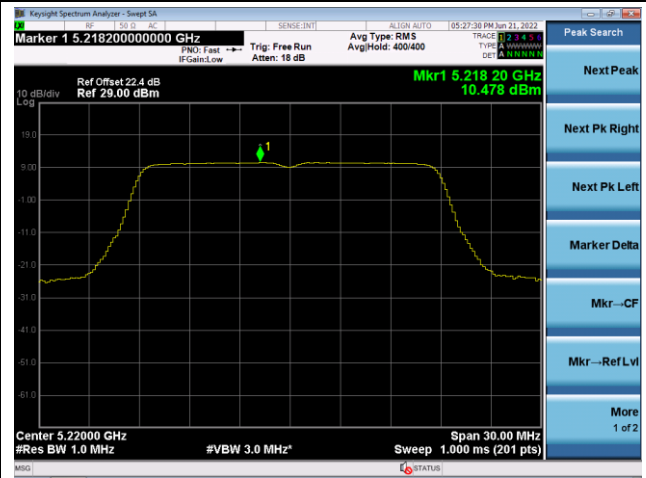


Channel 48 (5240MHz)

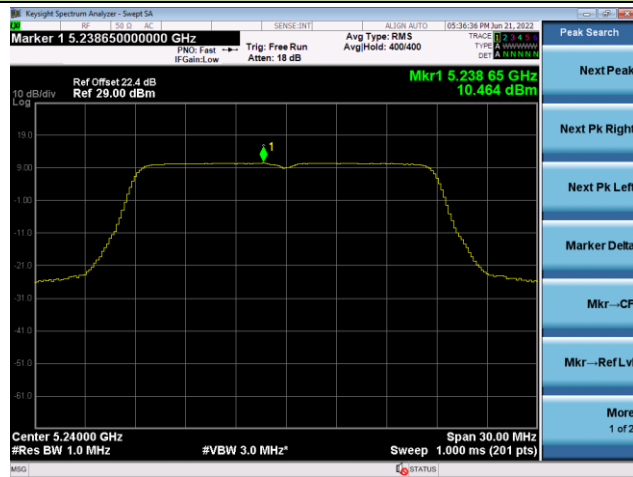


Channel 52(5260MHz)



Channel 60 (5300MHz)

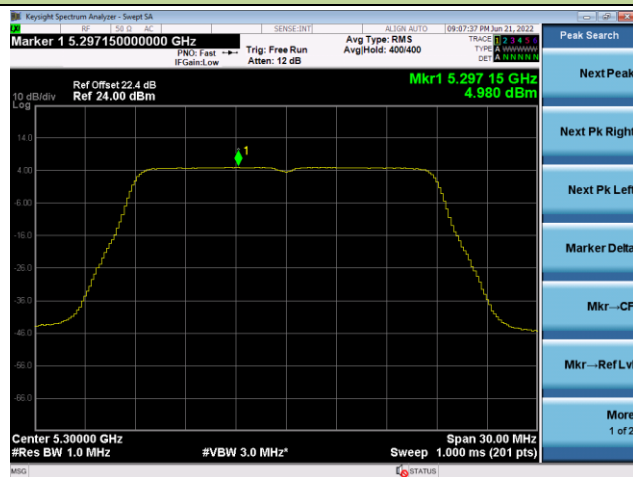

Channel 64 (5320MHz)

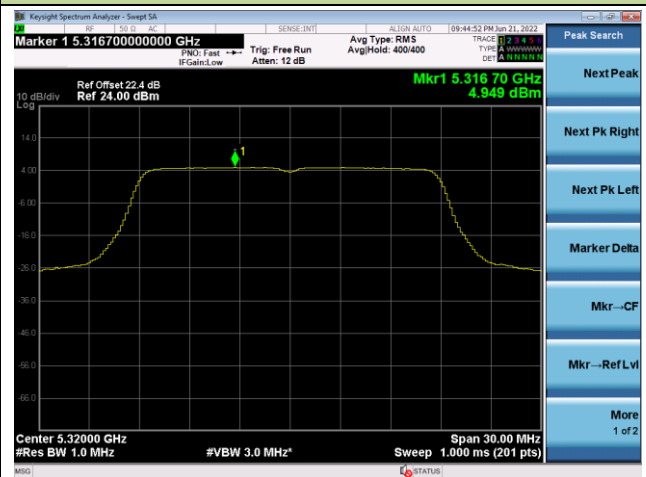


Channel 100 (5500MHz)



Channel 116 (5580MHz)




Channel 140 (5700MHz)

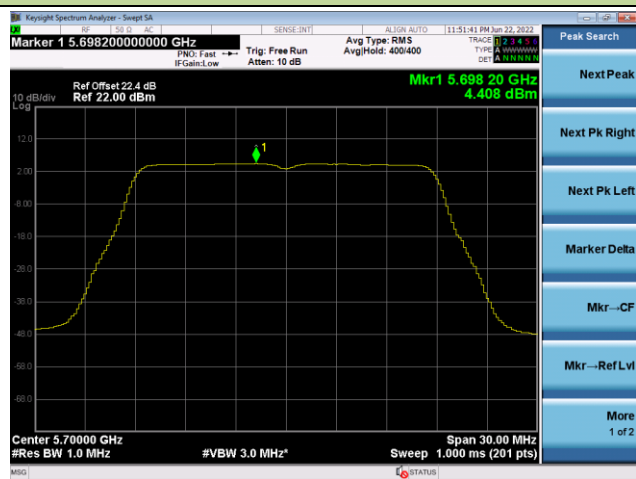


Channel 144 (5720MHz)




Channel 149 (5745MHz)

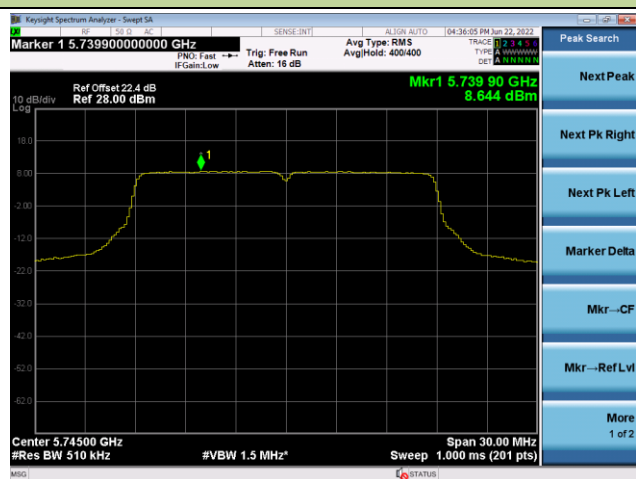


Channel 157 (5785MHz)

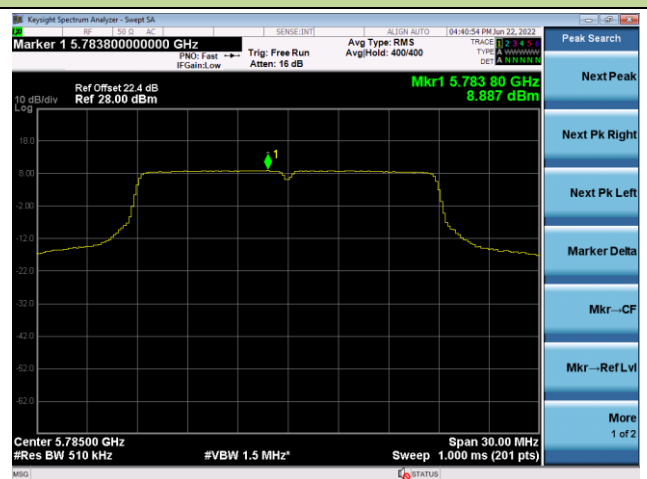

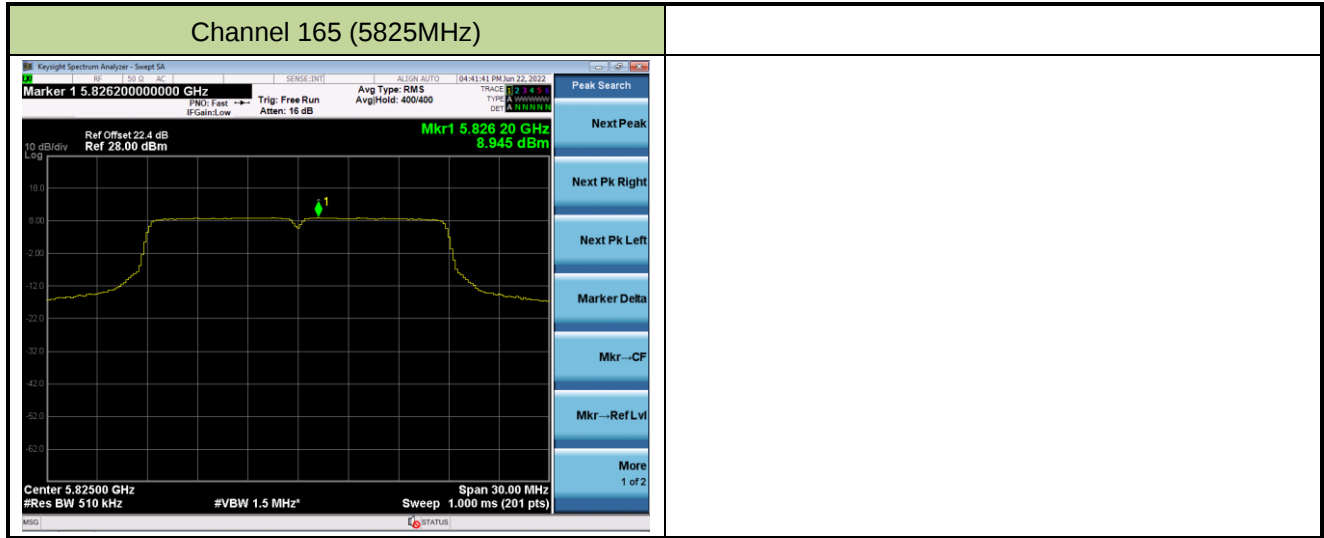


802.11ac-VHT40 Power Spectral Density - Ant 0

Channel 38 (5190MHz)

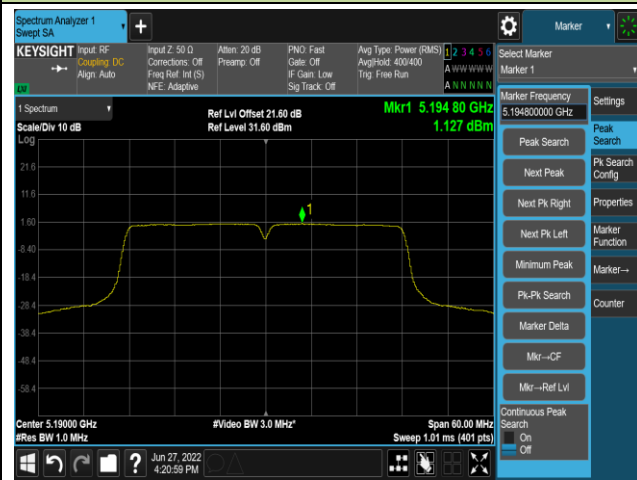


Channel 46 (5230MHz)

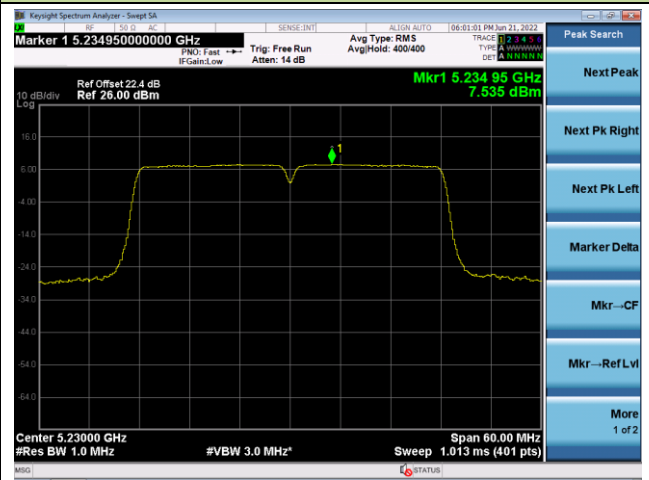

Channel 54 (5270MHz)



Channel 62(5310MHz)

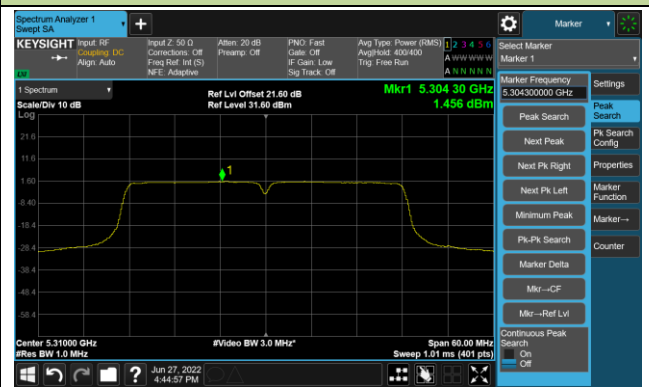


Channel 102 (5510MHz)



Channel 110 (5550MHz)



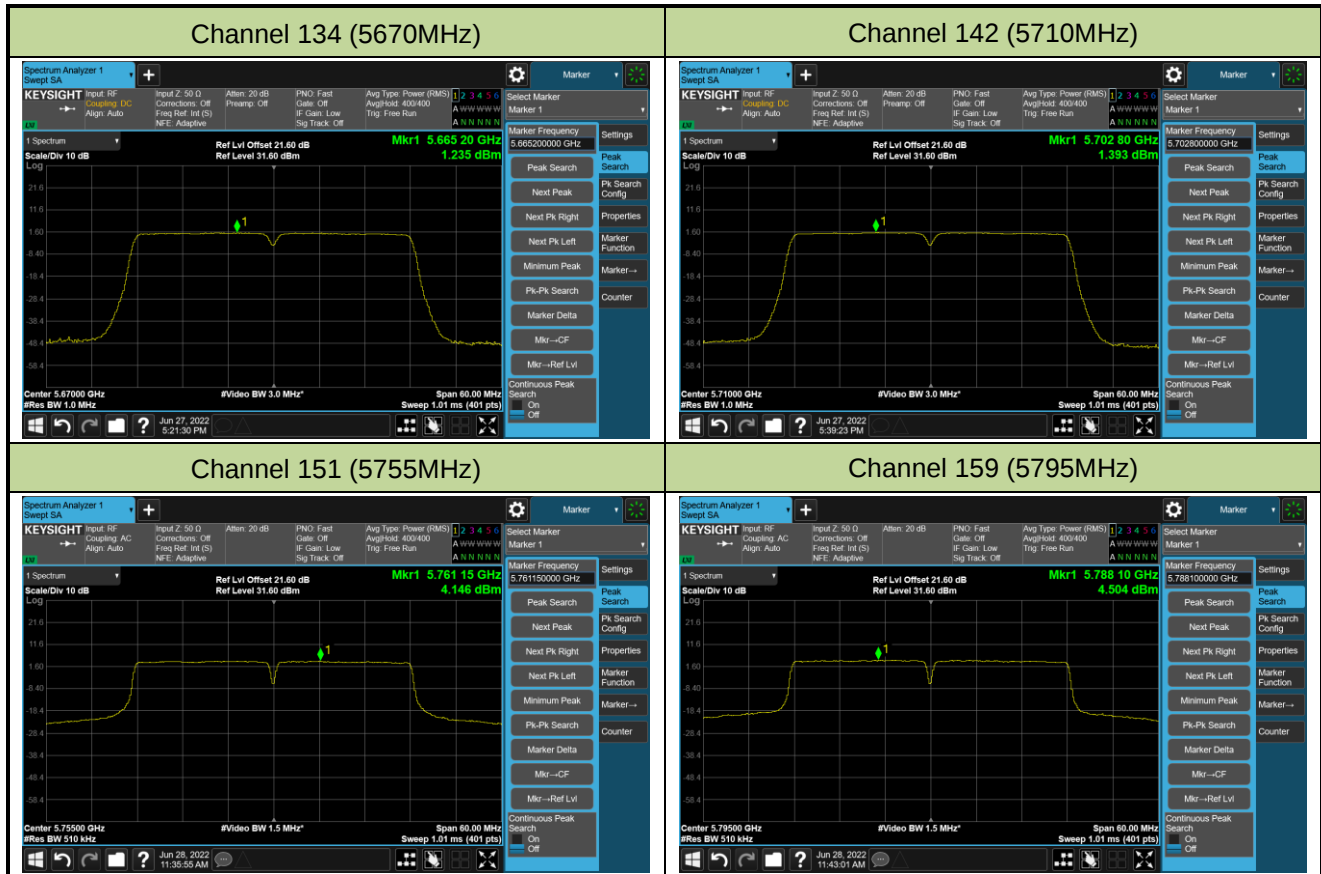

802.11ac-VHT80 Power Spectral Density - Ant 0


Channel 42 (5210MHz)




Channel 58 (5290MHz)




Channel 106 (5530MHz)

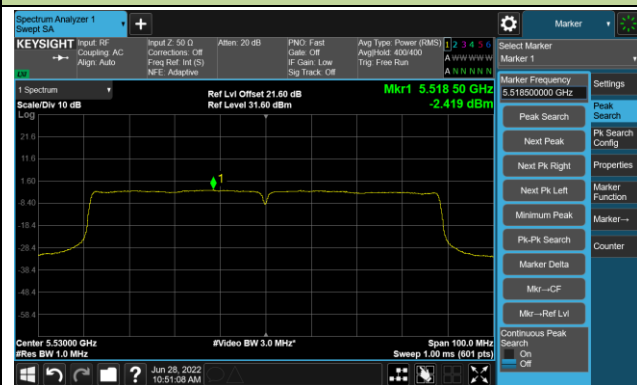

Channel 138 (5690MHz)

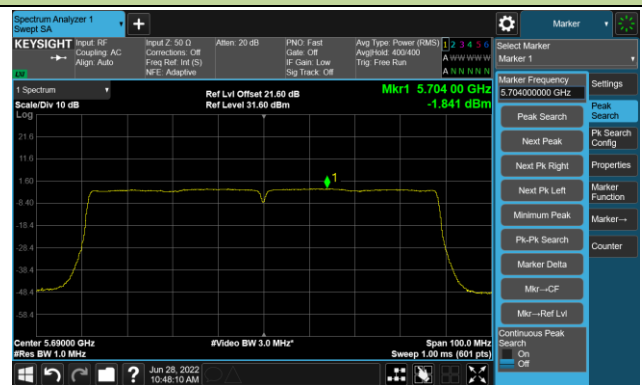

Channel 155 (5775MHz)

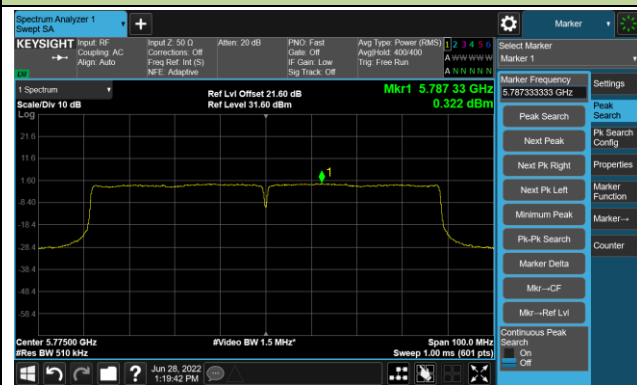


802.11ac-VHT160 Power Spectral Density - Ant 0

Channel 50 (5250MHz)




802.11ax-HE20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

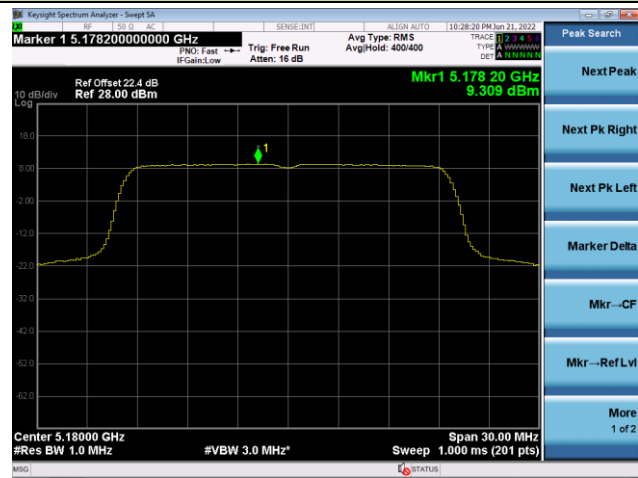


Channel 44 (5220MHz)

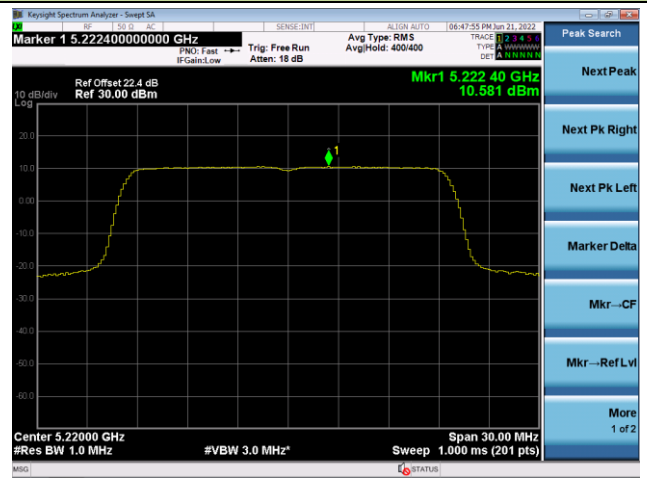


Channel 48 (5240MHz)

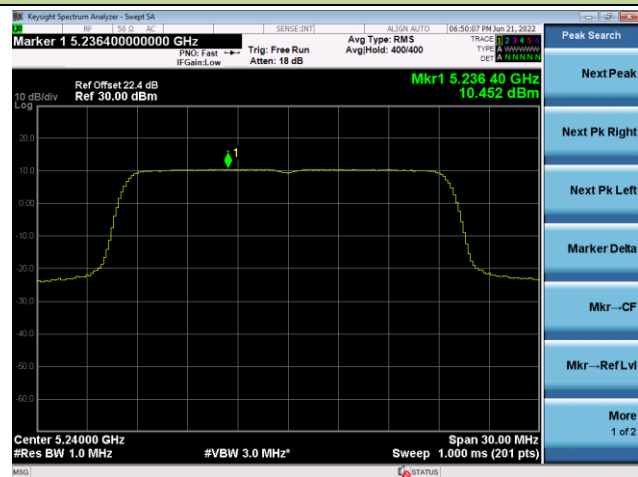

Channel 52(5260MHz)

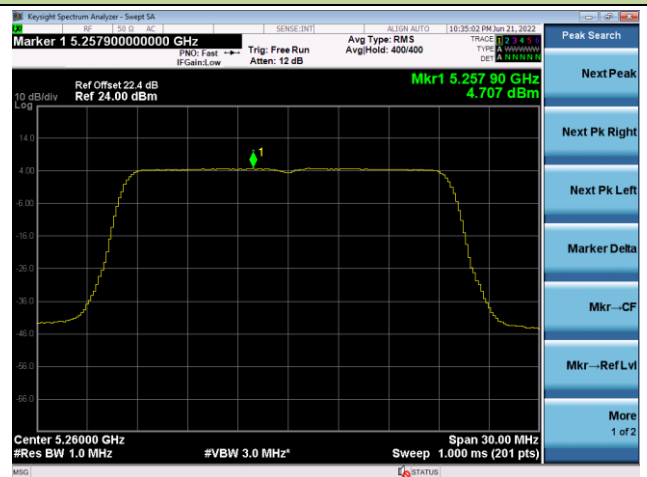

Channel 60 (5300MHz)

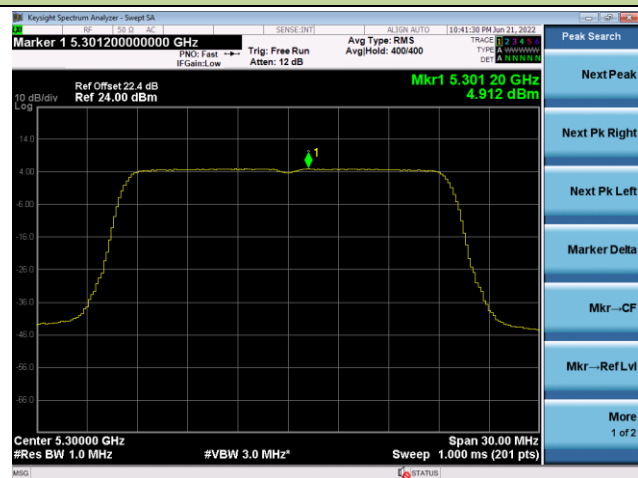

Channel 64 (5320MHz)

