


Appendix A. Test Result of AC Power Line Conducted Emission


Site :HY-SR01
Condition :Line
Mode :TX_b1e2M_2440MHz
test by :Neko

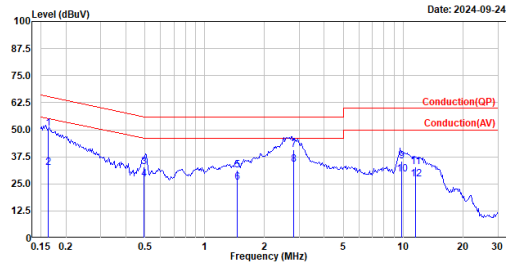

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	dBuV	dB	
1	0.164	50.67	65.27	-14.60	40.99	9.68	QP
2	0.164	32.53	55.27	-22.74	22.85	9.68	Average
3	0.496	32.97	56.06	-23.09	23.29	9.68	QP
4	0.496	27.04	46.06	-19.02	17.36	9.68	Average
5	1.465	31.32	56.00	-24.68	21.55	9.77	QP
6	1.465	25.63	46.00	-20.37	15.86	9.77	Average
7	2.807	40.84	56.00	-15.16	30.75	10.09	QP
8	2.807	33.80	46.00	-12.20	23.71	10.09	Average
9	9.834	35.49	60.00	-24.51	24.69	10.80	QP
10	9.834	29.42	50.00	-20.58	18.62	10.80	Average
11	11.534	33.00	60.00	-27.00	22.20	10.80	QP
12	11.534	26.99	50.00	-23.01	16.19	10.80	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

Site :HY-SR01
Condition :Neutral
Mode :TX_b1e2M_2440MHz
test by :Neko

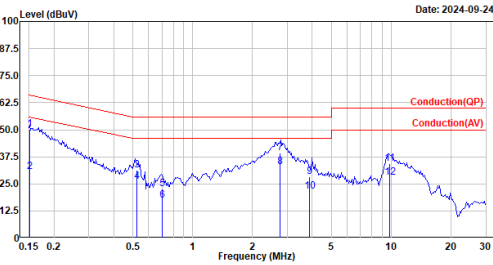


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV	dBuV	Limit	dBuV	dB	
1	0.152	50.18	65.91	-15.73	40.52	9.66	QP
2	0.152	30.59	55.91	-25.32	20.93	9.66	Average
3	0.522	31.45	56.00	-24.55	21.79	9.66	QP
4	0.522	25.94	46.00	-20.06	16.28	9.66	Average
5	0.702	22.72	56.00	-33.28	13.04	9.68	QP
6	0.702	17.32	46.00	-28.68	7.64	9.68	Average
7	2.753	39.29	56.00	-16.71	29.24	10.05	QP
8	2.753	32.93	46.00	-13.07	22.88	10.05	Average
9	3.886	28.35	56.00	-27.65	17.91	10.44	QP
10	3.886	21.37	46.00	-24.63	10.93	10.44	Average
11	9.822	34.25	60.00	-25.75	23.46	10.79	QP
12	9.822	27.98	50.00	-22.02	17.19	10.79	Average

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1MHz)	2402	0.68	>0.50	Pass
	2440	0.67	>0.50	Pass
	2480	0.68	>0.50	Pass
GFSK (2MHz)	2402	1.14	>0.50	Pass
	2440	1.14	>0.50	Pass
	2480	1.14	>0.50	Pass


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1

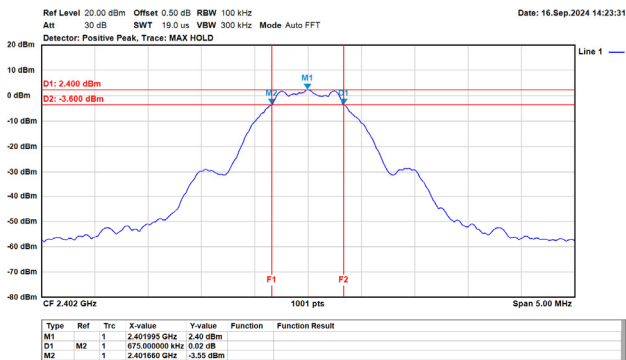


GFSK/1MHz/1M/2440MHz/Ch19/Ant.1

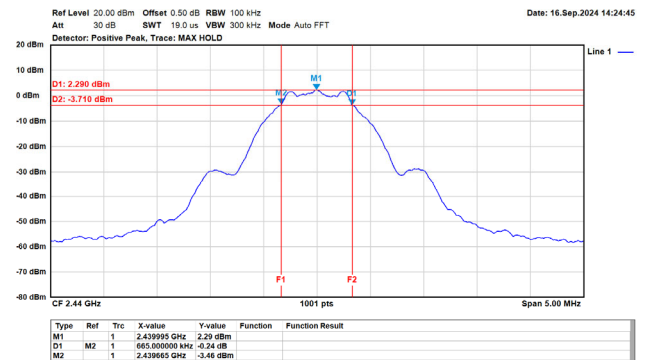


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1

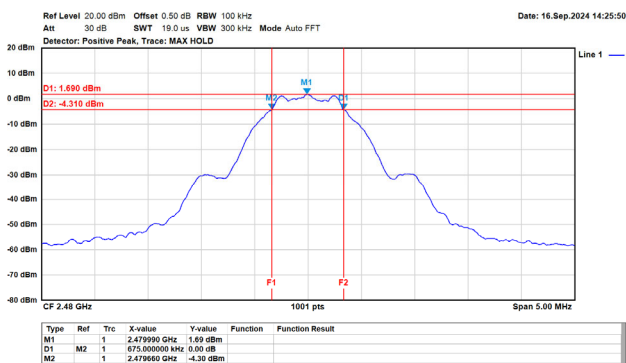


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

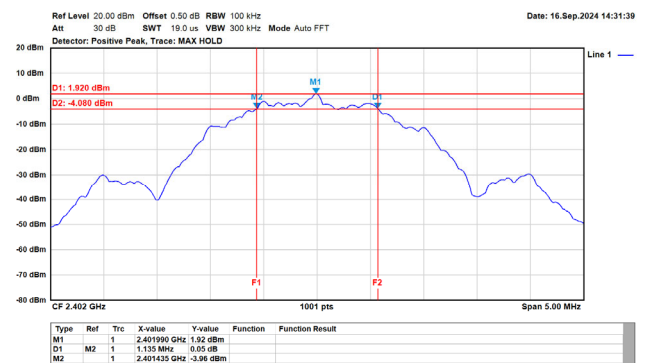

GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

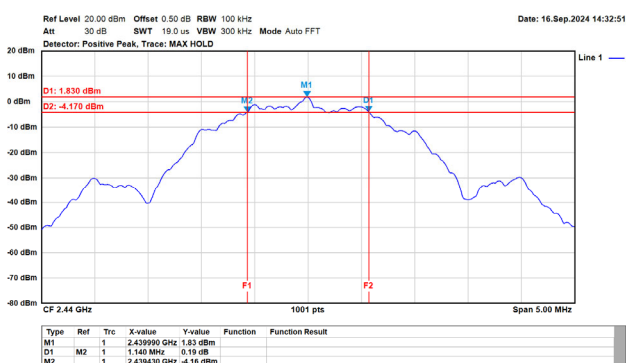

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

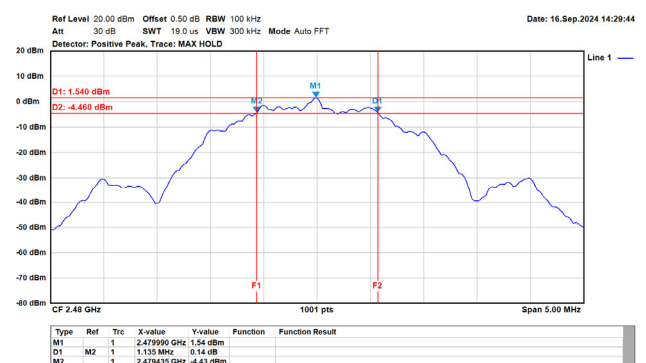


Appendix C. Test Result of Maximum Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1MHz)	2402	4.07	30.00	Pass
	2440	3.86	30.00	Pass
	2480	3.13	30.00	Pass
GFSK (2MHz)	2402	3.92	30.00	Pass
	2440	3.81	30.00	Pass
	2480	3.18	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1MHz)	2402	-12.39	8.00	Pass
	2440	-12.40	8.00	Pass
	2480	-12.89	8.00	Pass
GFSK (2MHz)	2402	-13.90	8.00	Pass
	2440	-13.90	8.00	Pass
	2480	-14.15	8.00	Pass

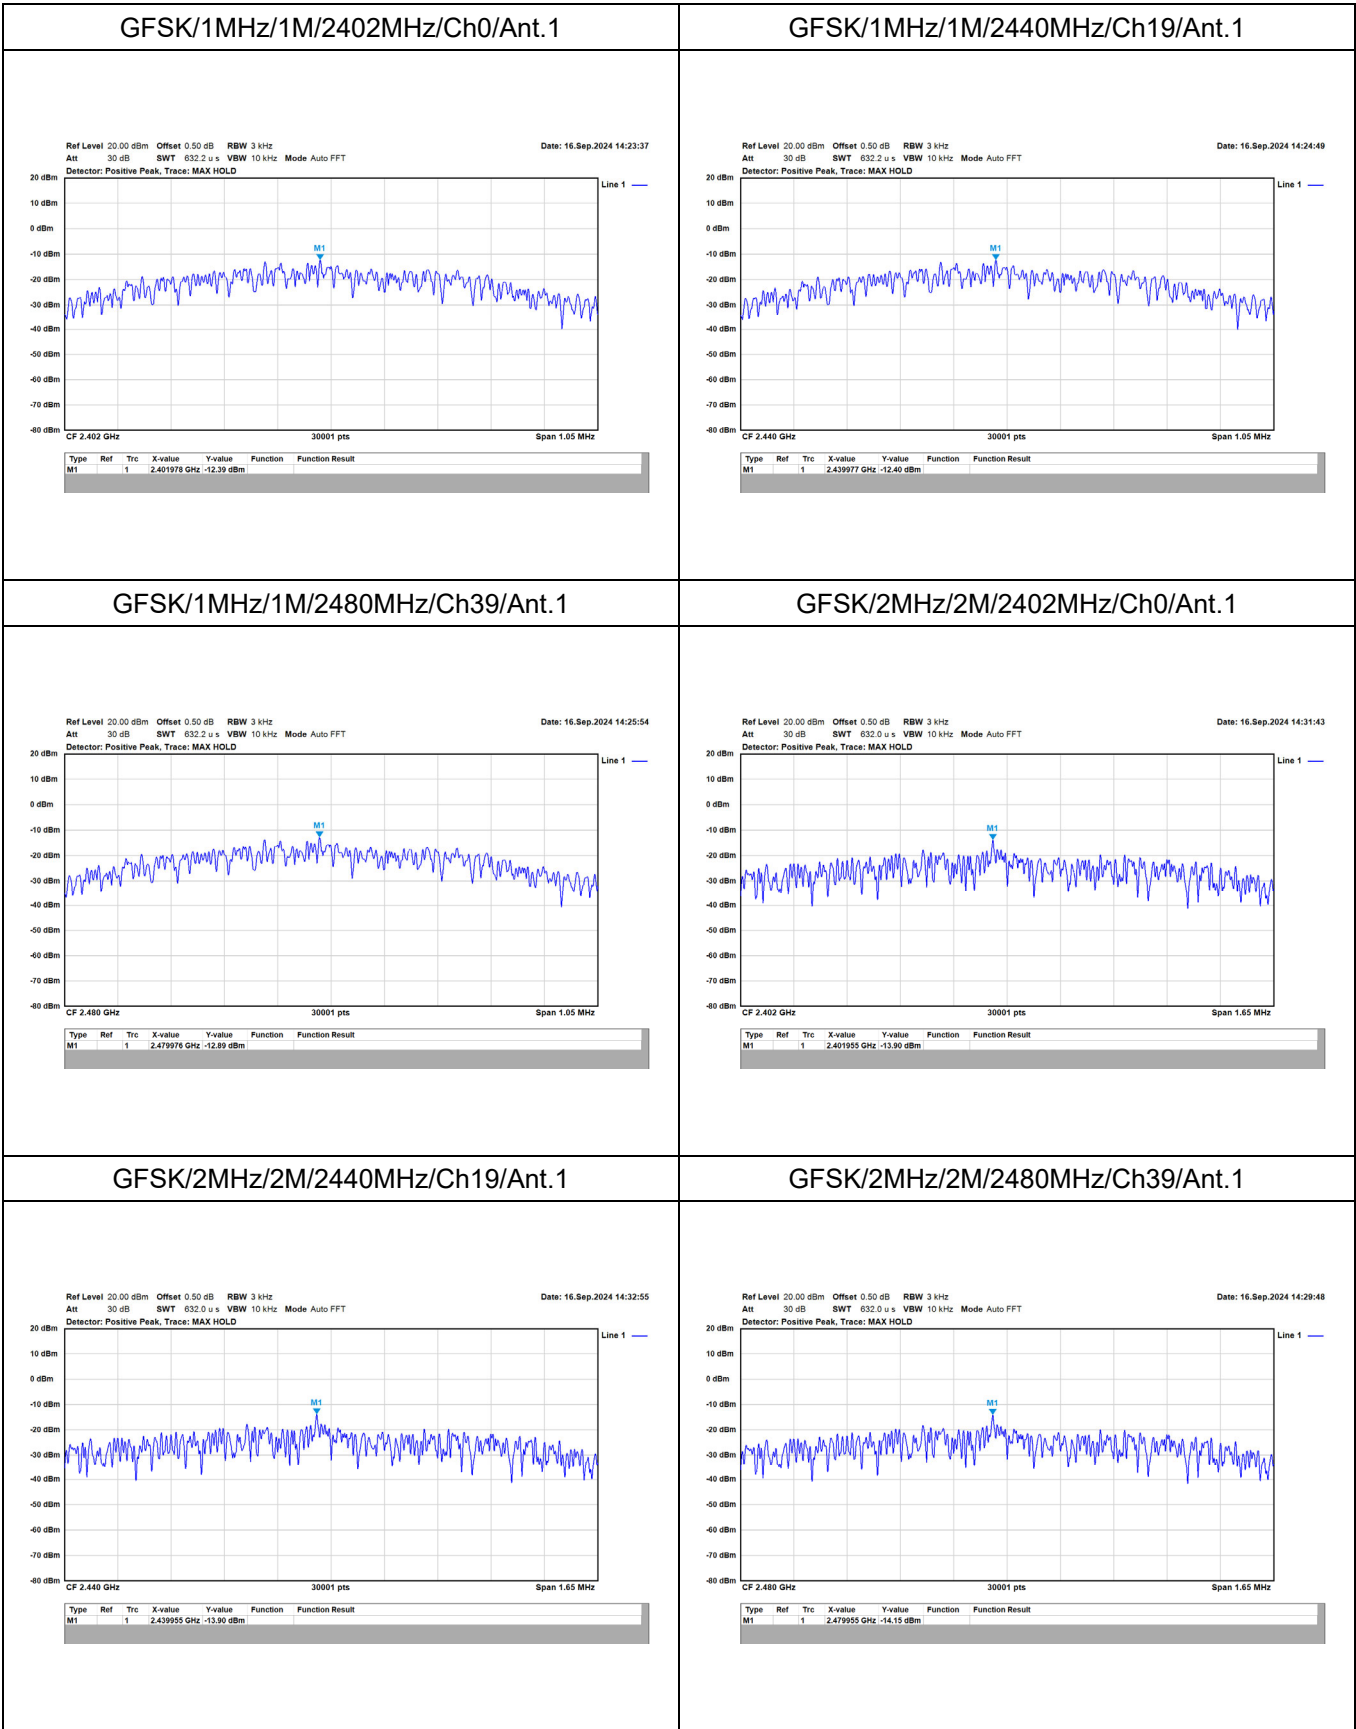

Appendix E. Test Result of Antenna Port Conducted Emission

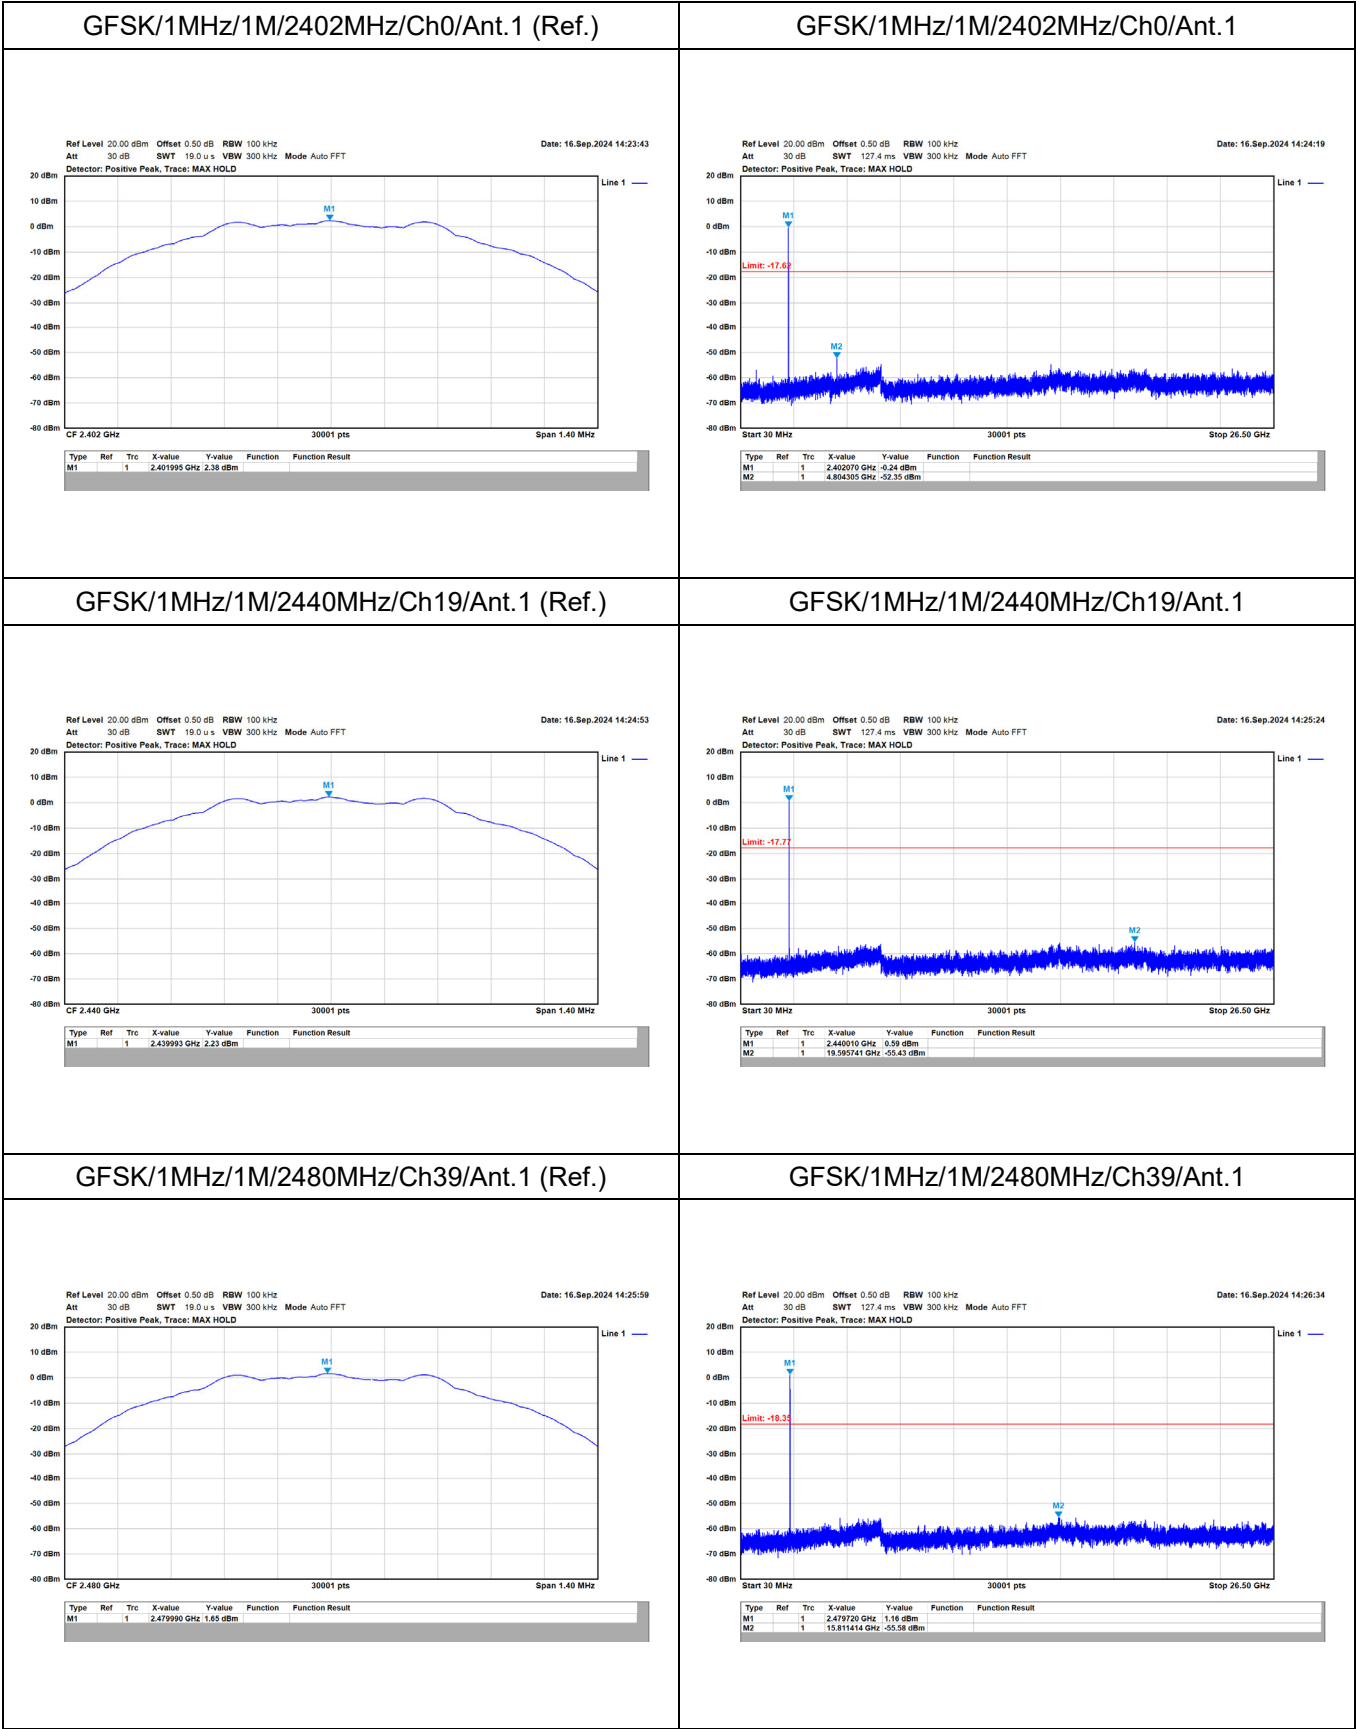

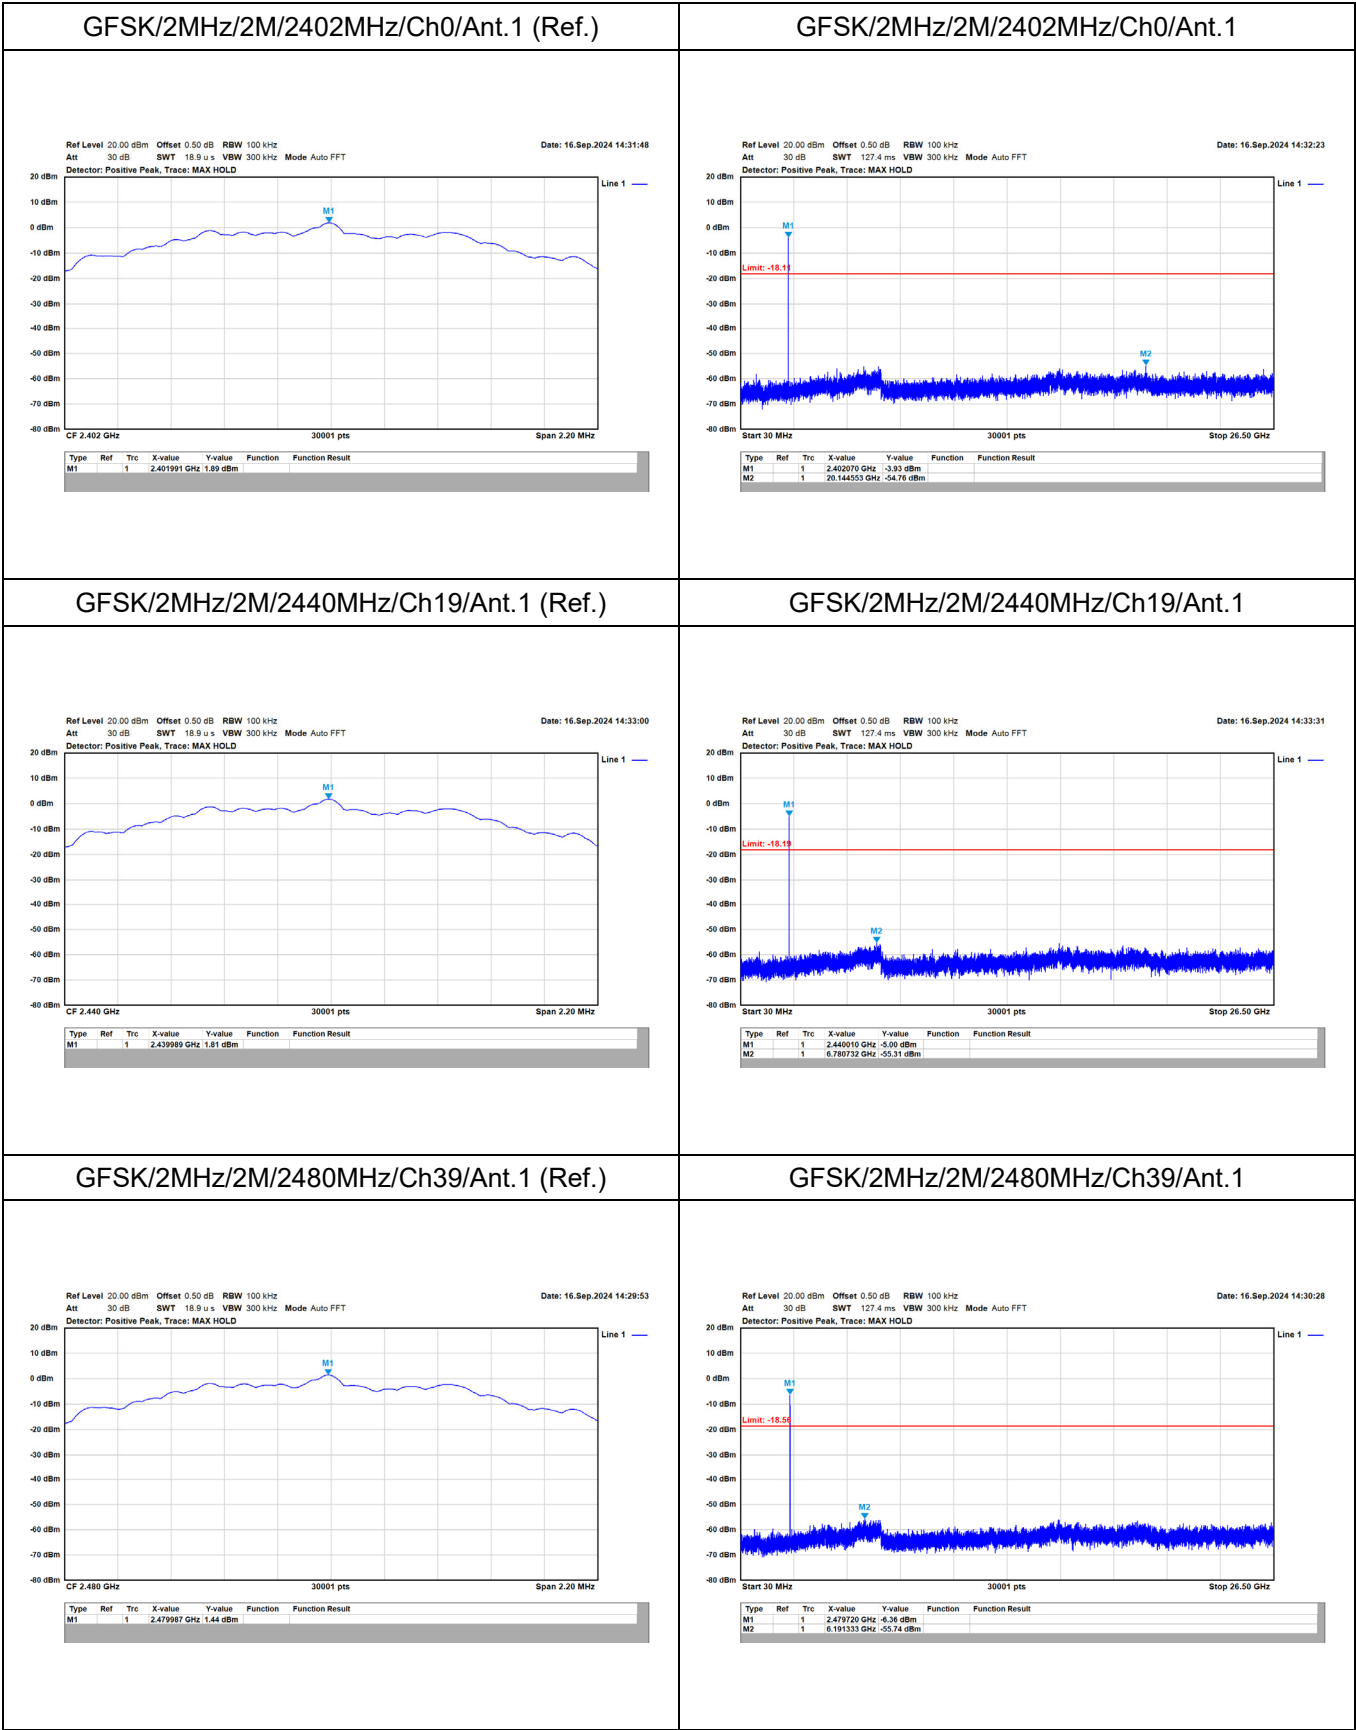


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS



Appendix F. Test Result of Radiated Emission

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2402MHz
TEST BY :Caster

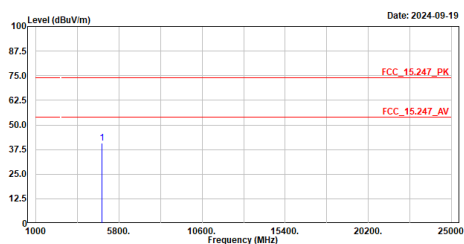


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	40.69	74.00	-33.31	55.51	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble1M_2402MHz
TEST BY :Caster

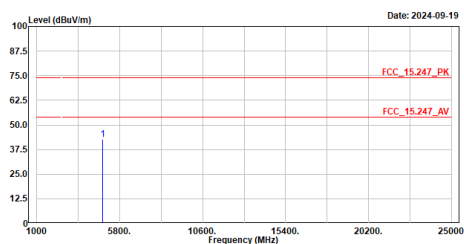


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	42.45	74.00	-31.55	57.27	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2440MHz
TEST BY :Caster

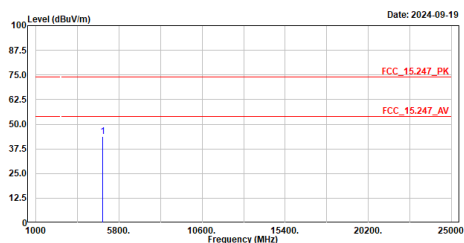


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	43.85	74.00	-30.15	58.42	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble1M_2440MHz
TEST BY :Caster

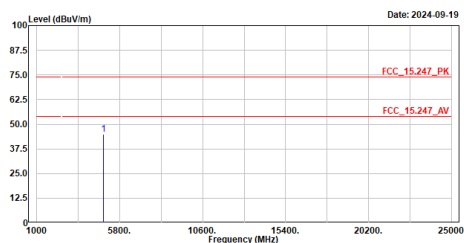


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4880.000	44.92	74.00	-29.08	59.49	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble1M_2480MHz
TEST BY :Caster

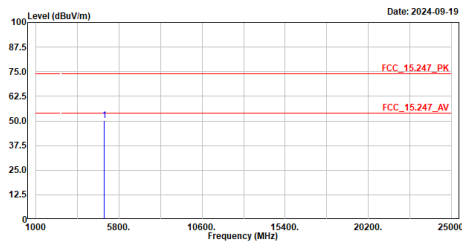


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	50.30	74.00	-23.70	64.62	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble1M_2480MHz
TEST BY :Caster

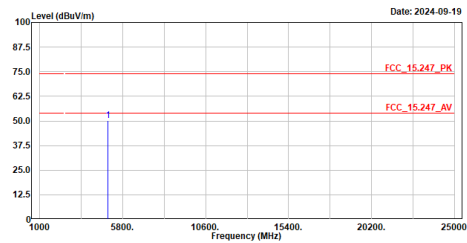


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4960.000	50.10	74.00	-23.90	64.42	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_ble2M_2482MHz
TEST BY :Caster

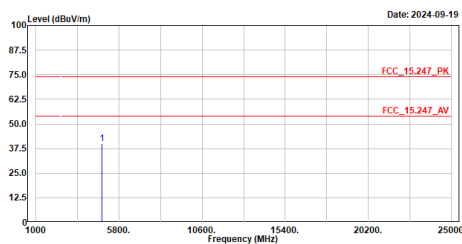


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	39.96	74.00	-34.04	54.78	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_ble2M_2482MHz
TEST BY :Caster

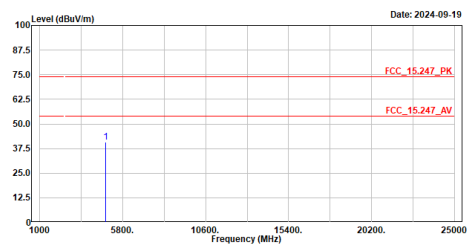


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4804.000	40.70	74.00	-33.30	55.52	-14.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b1e2M_2440MHz
TEST BY :Caster

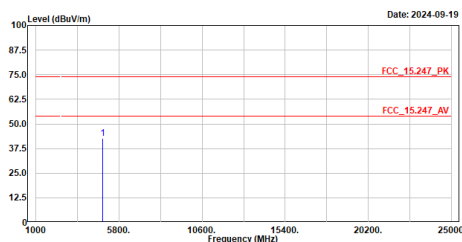


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	42.69	74.00	-31.31	57.26	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b1e2M_2440MHz
TEST BY :Caster

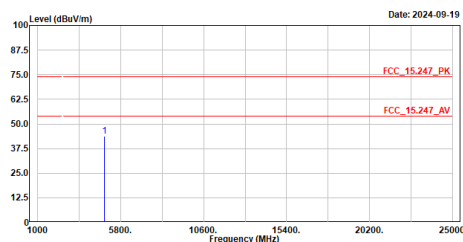


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	43.76	74.00	-30.24	58.33	-14.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b1e2M_2480MHz
TEST BY :Caster

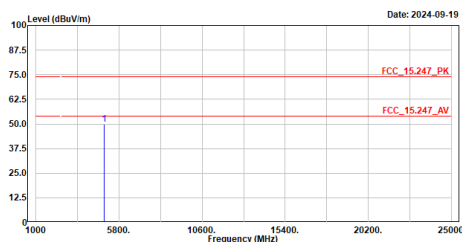


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	49.67	74.00	-24.33	63.99	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b1e2M_2480MHz
TEST BY :Caster

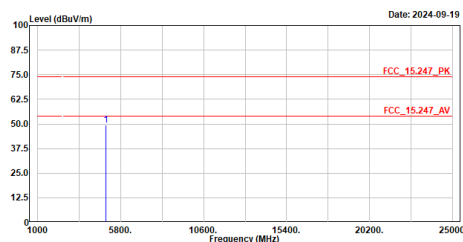


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	49.38	74.00	-24.62	63.70	-14.32	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,HORIZONTAL
Mode :TX_b1e2H_2440MHz
TEST BY :Caster

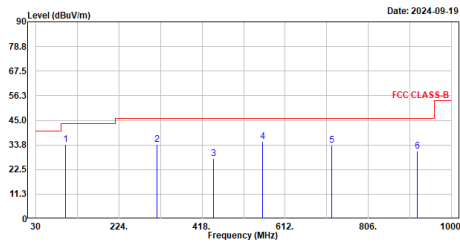


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	99.840	33.94	43.50	-9.56	62.18	-28.24	QP
2	312.270	34.05	46.00	-11.95	56.64	-22.59	QP
3	445.160	27.59	46.00	-18.41	46.49	-18.90	QP
4	559.620	35.35	46.00	-10.65	52.06	-16.71	QP
5	720.640	33.58	46.00	-12.42	47.25	-13.67	QP
6	920.460	30.92	46.00	-15.08	42.02	-11.10	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,VERTICAL
Mode :TX_b1e2H_2440MHz
TEST BY :Caster

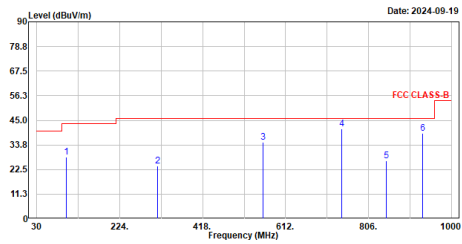


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	99.840	28.13	43.50	-15.37	56.37	-28.24	QP
2	312.270	24.22	46.00	-21.78	46.81	-22.59	QP
3	559.620	35.12	46.00	-10.88	51.83	-16.71	QP
4	742.950	41.23	46.00	-4.77	54.41	-13.18	QP
5	846.740	26.49	46.00	-19.51	38.46	-11.97	QP
6	933.070	38.97	46.00	-7.03	49.88	-10.91	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2402MHz
TEST BY :Peter

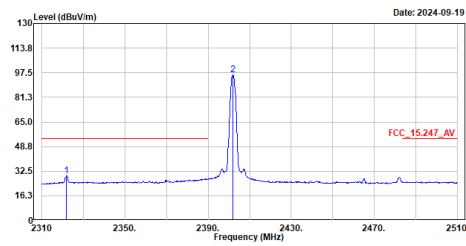


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2321.800	29.58	54.00	-24.42	23.86	5.72	Average
2	2402.000	95.96	-----	-----	90.16	5.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble1M_2402MHz
TEST BY :Peter

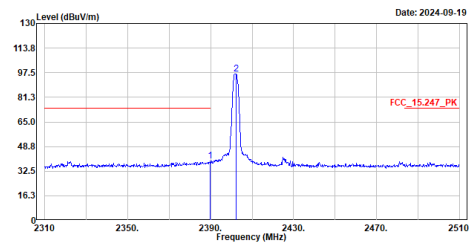


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2389.800	39.03	74.00	-34.97	33.14	5.89	Peak
2	2402.200	96.53	-----	-----	90.73	5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2402MHz
TEST BY :Peter

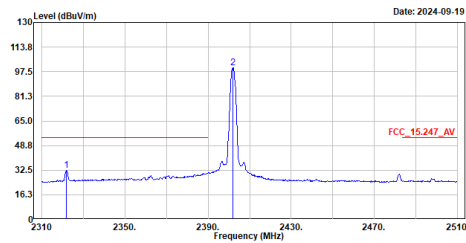


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2321.800	32.32	54.00	-21.68	26.60	5.72	Average
2	2402.000	100.07	-----	-----	94.27	5.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble1M_2402MHz
TEST BY :Peter

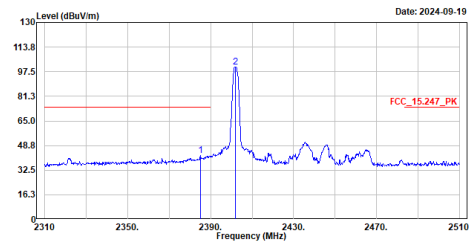


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2385.000	42.10	74.00	-31.90	36.27	5.83	Peak
2	2401.800	100.62	-----	-----	94.82	5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_bleiM_2480MHz
TEST BY :Peter

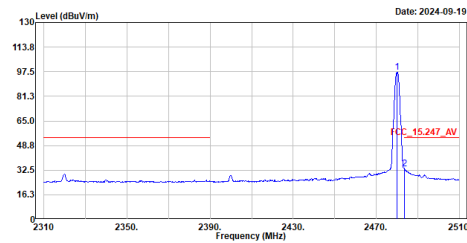


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	97.14	-----	-----	91.42	5.72	Average
2	2483.600	33.41	54.00	-20.59	27.69	5.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_bleiM_2480MHz
TEST BY :Peter

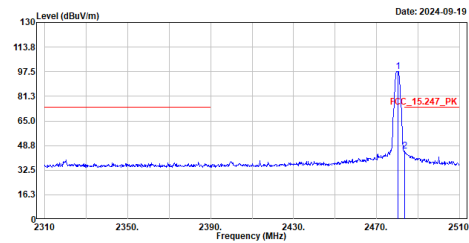


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.400	97.67	-----	-----	91.95	5.72	Peak
2	2483.600	45.17	74.00	-28.83	39.45	5.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_bleiM_2480MHz
TEST BY :Peter

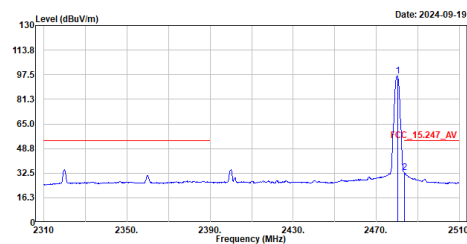


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	96.48	-----	-----	90.76	5.72	Average
2	2483.600	32.74	54.00	-21.26	27.02	5.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_bleiM_2480MHz
TEST BY :Peter

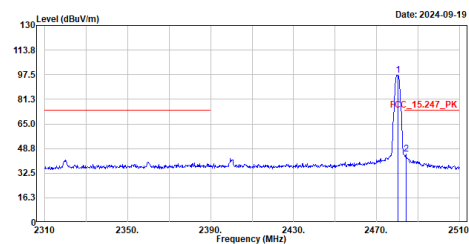


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.400	97.03	-----	-----	91.31	5.72	Peak
2	2484.200	45.03	74.00	-28.97	39.31	5.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble2M_2402MHz
TEST BY :Peter

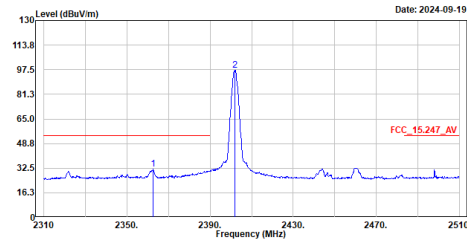


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.600	31.76	54.00	-22.24	26.00	5.76	Average
2	2402.000	97.14	-----	-----	91.34	5.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble2M_2402MHz
TEST BY :Peter

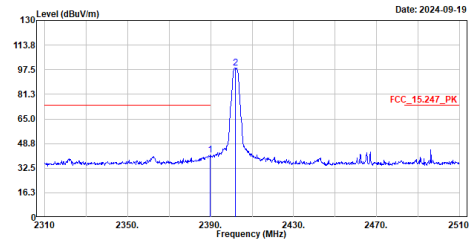


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2399.800	41.13	74.00	-32.87	35.24	5.89	Peak
2	2402.000	98.36	-----	-----	92.56	5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble2M_2402MHz
TEST BY :Peter

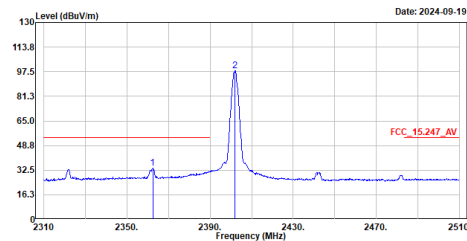


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.400	33.93	54.00	-20.07	28.17	5.76	Average
2	2402.000	98.02	-----	-----	92.22	5.80	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble2M_2402MHz
TEST BY :Peter

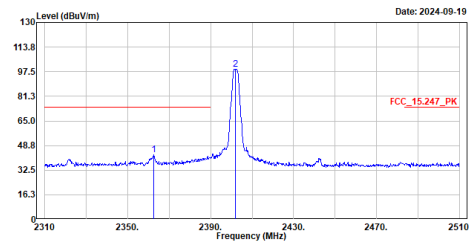


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2362.600	42.52	74.00	-31.48	36.76	5.76	Peak
2	2402.000	99.28	-----	-----	93.48	5.80	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble2M_2480MHz
TEST BY :Peter

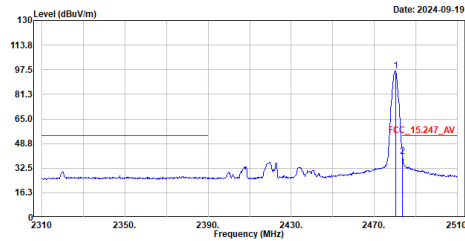


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	96.45	-----	-----	90.73	5.72	Average
2	2483.600	40.40	54.00	-13.60	34.68	5.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Horizontal
Mode :TX_ble2M_2480MHz
TEST BY :Peter

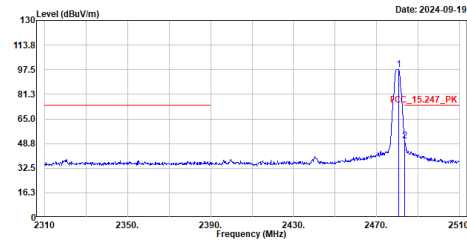


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.600	97.75	-----	-----	92.03	5.72	Peak
2	2483.600	50.51	74.00	-23.49	44.79	5.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble2M_2480MHz
TEST BY :Peter

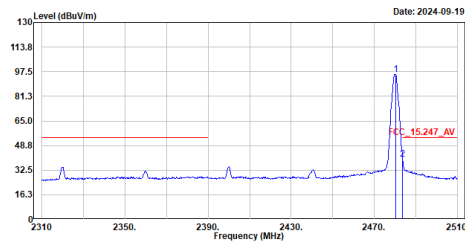


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	95.83	-----	-----	90.11	5.72	Average
2	2483.600	39.53	54.00	-14.47	33.81	5.72	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Site :HY-CB01
Condition :3m ,Vertical
Mode :TX_ble2M_2480MHz
TEST BY :Peter

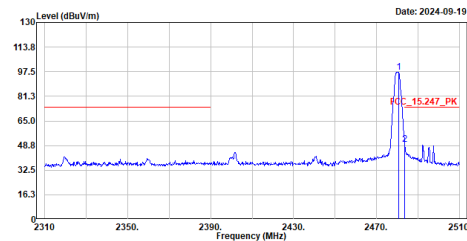

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.600	97.08	-----	-----	91.36	5.72	Peak
2	2483.600	49.60	74.00	-24.40	43.88	5.72	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.