



Appendix A. Test Result of AC Power Line Conducted Emission

TX_n20_2437MHz_Line

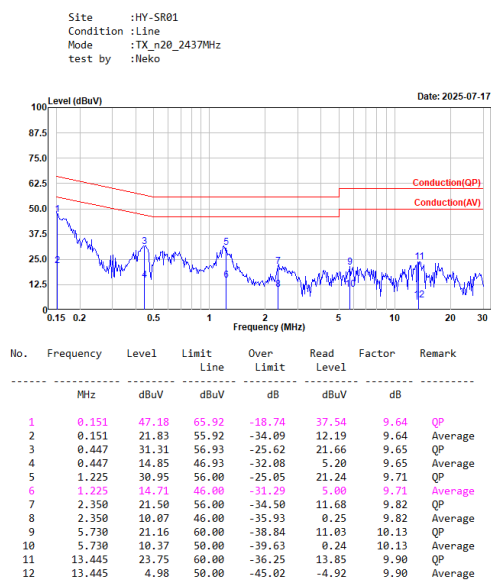

Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line

TX_n20_2437MHz_Neutral

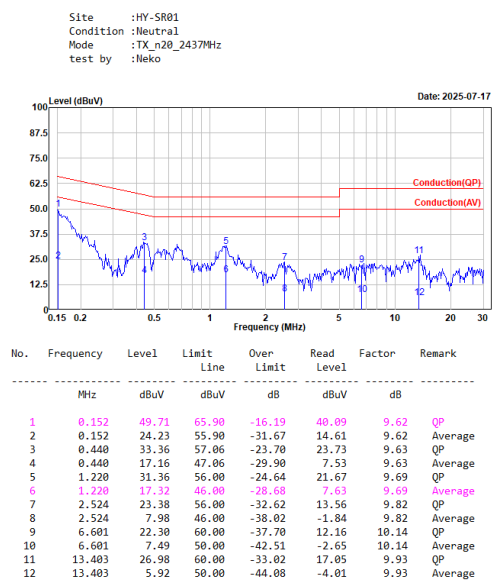


Note:
1. Level = Read Level + Factor
2. Factor = LISN insertion loss + Cable loss
3. Over Limit = Level - Limit Line


Appendix B. 6 dB Bandwidth

Modulation	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b (20MHz)	2412	7.08	>0.50	Pass
	2437	7.08	>0.50	Pass
	2462	7.56	>0.50	Pass
802.11g (20MHz)	2412	15.04	>0.50	Pass
	2437	13.92	>0.50	Pass
	2462	15.16	>0.50	Pass
802.11n (20MHz)	2412	15.08	>0.50	Pass
	2437	16.00	>0.50	Pass
	2462	15.12	>0.50	Pass


802.11b/20MHz/1M/2412MHz/Ch1/Ant.1

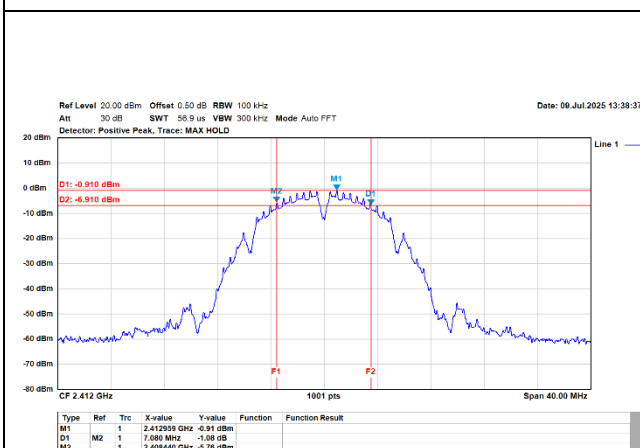


802.11b/20MHz/1M/2437MHz/Ch6/Ant.1

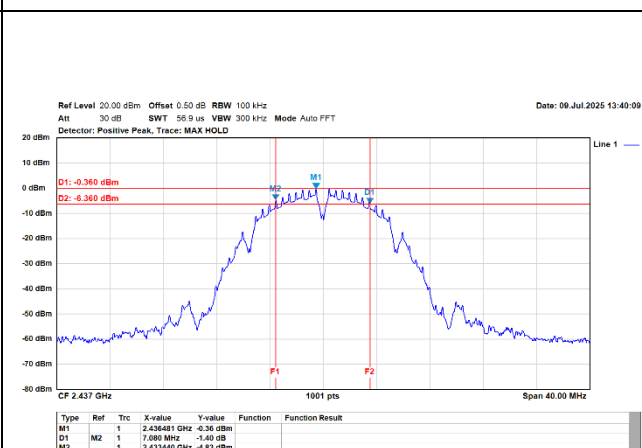


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1

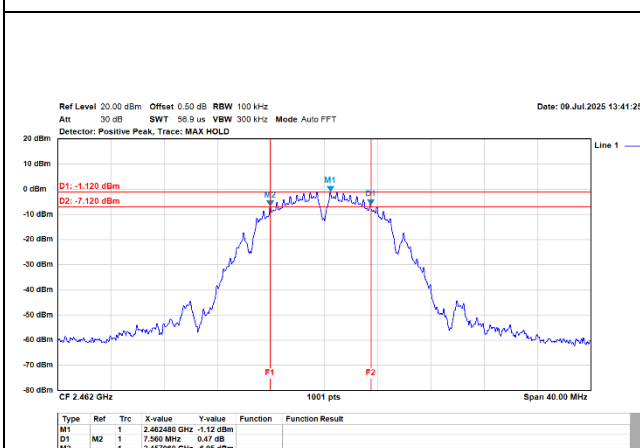


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1

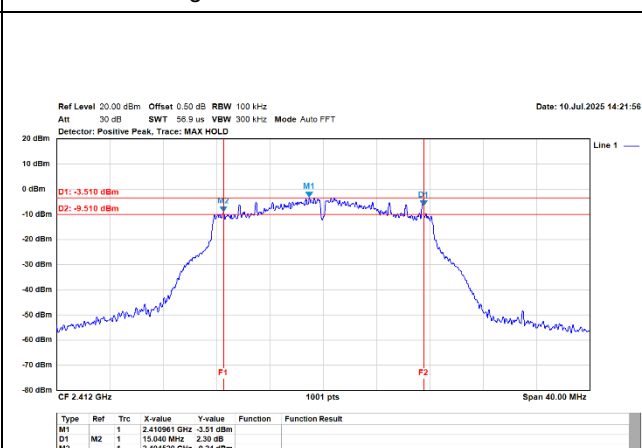


802.11g/20MHz/6M/2437MHz/Ch6/Ant.1

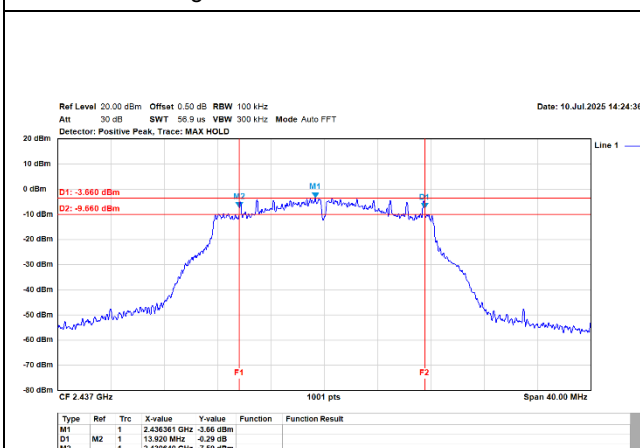


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1

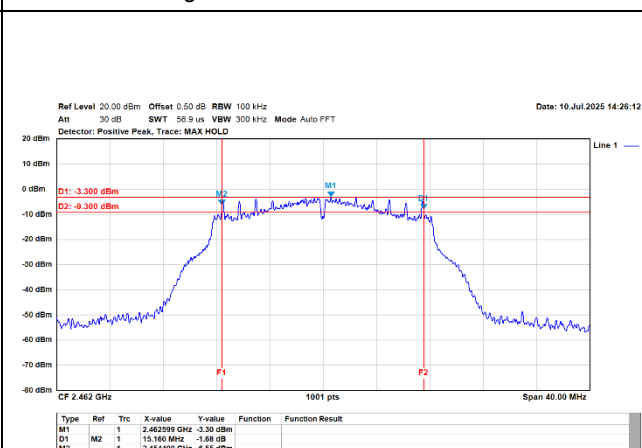


802.11n/20MHz/MCS0/2412MHz/Ch1/Ant.1

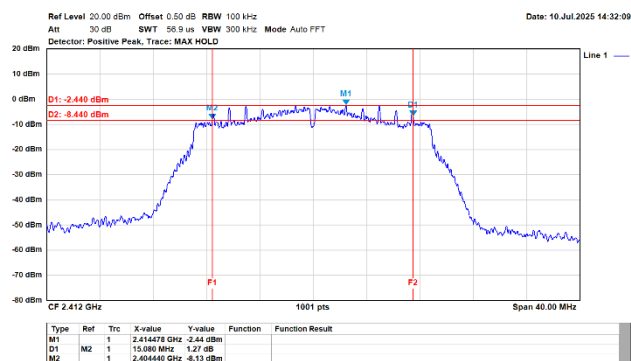

802.11n/20MHz/MCS0/2437MHz/Ch6/Ant.1

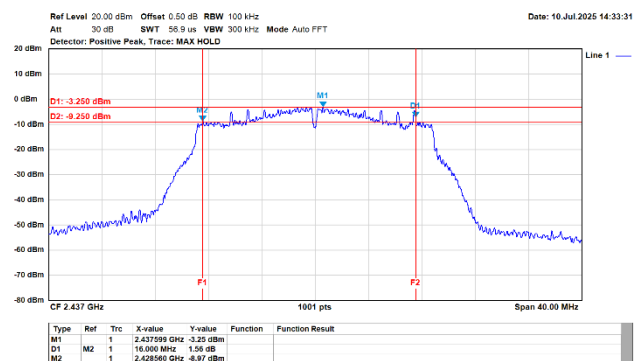

802.11n/20MHz/MCS0/2462MHz/Ch11/Ant.1

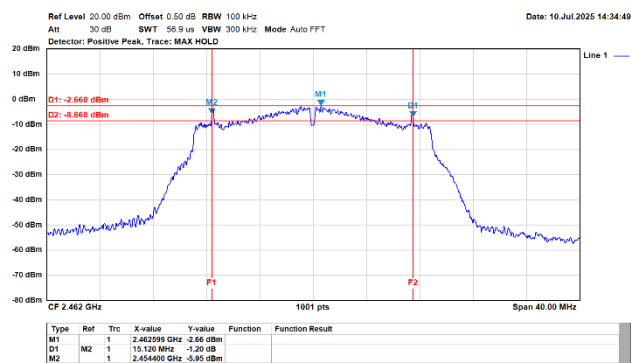

Appendix C. Test Result of Maximum Peak Conducted Output Power


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
802.11b (20MHz)	2412	9.20	30.00	Pass
	2437	8.83	30.00	Pass
	2462	8.62	30.00	Pass
802.11g (20MHz)	2412	9.75	30.00	Pass
	2437	9.68	30.00	Pass
	2462	9.59	30.00	Pass
802.11n (20MHz)	2412	10.47	30.00	Pass
	2437	10.21	30.00	Pass
	2462	10.29	30.00	Pass

Modulation	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)	Limit (dBm)	Result
802.11b (20MHz)	2412	12.64	30.00	Pass
	2437	12.13	30.00	Pass
	2462	11.90	30.00	Pass
802.11g (20MHz)	2412	19.99	30.00	Pass
	2437	19.78	30.00	Pass
	2462	19.67	30.00	Pass
802.11n (20MHz)	2412	20.07	30.00	Pass
	2437	19.96	30.00	Pass
	2462	19.98	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b (20MHz)	2412	-13.00	8.00	Pass
	2437	-13.78	8.00	Pass
	2462	-13.76	8.00	Pass
802.11g (20MHz)	2412	-14.55	8.00	Pass
	2437	-14.66	8.00	Pass
	2462	-14.34	8.00	Pass
802.11n (20MHz)	2412	-13.59	8.00	Pass
	2437	-13.84	8.00	Pass
	2462	-13.31	8.00	Pass


802.11b/20MHz/1M/2412MHz/Ch1/Ant.1

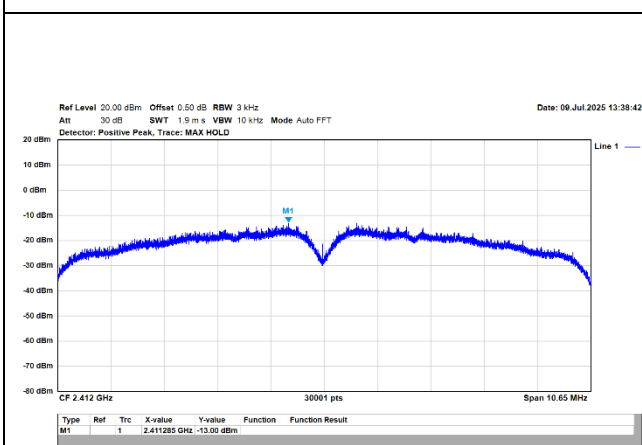


802.11b/20MHz/1M/2437MHz/Ch6/Ant.1

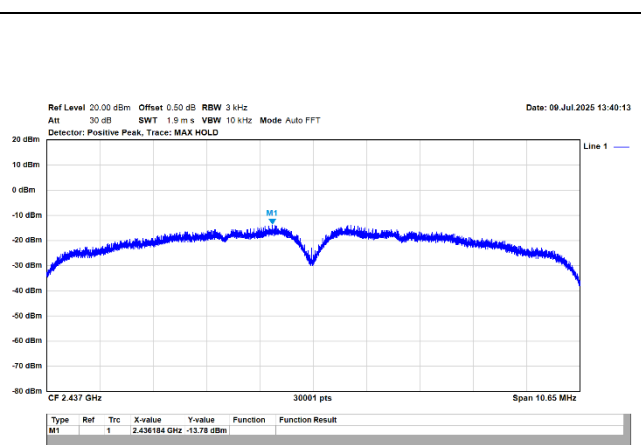


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1

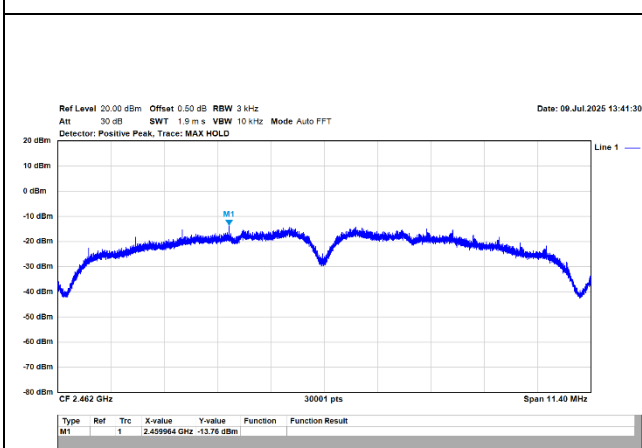


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1

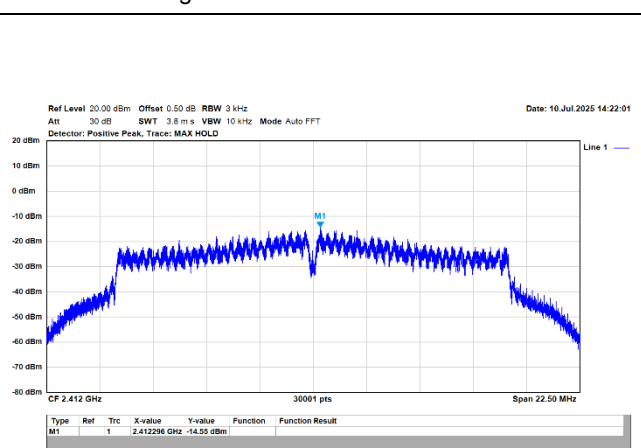


802.11g/20MHz/6M/2437MHz/Ch6/Ant.1

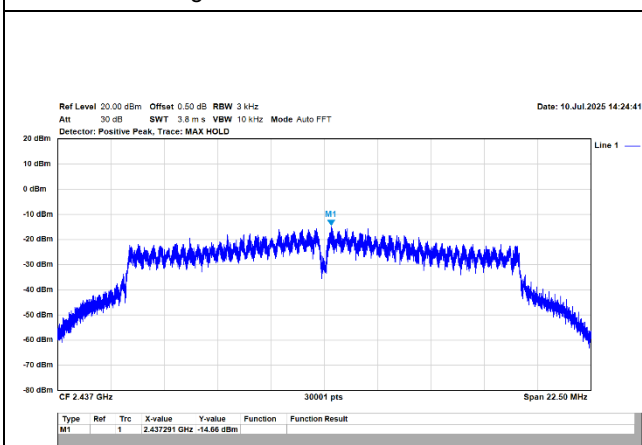

802.11g/20MHz/6M/2462MHz/Ch11/Ant.1

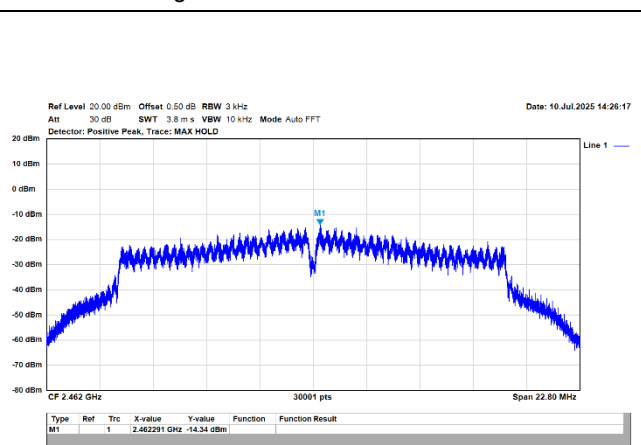


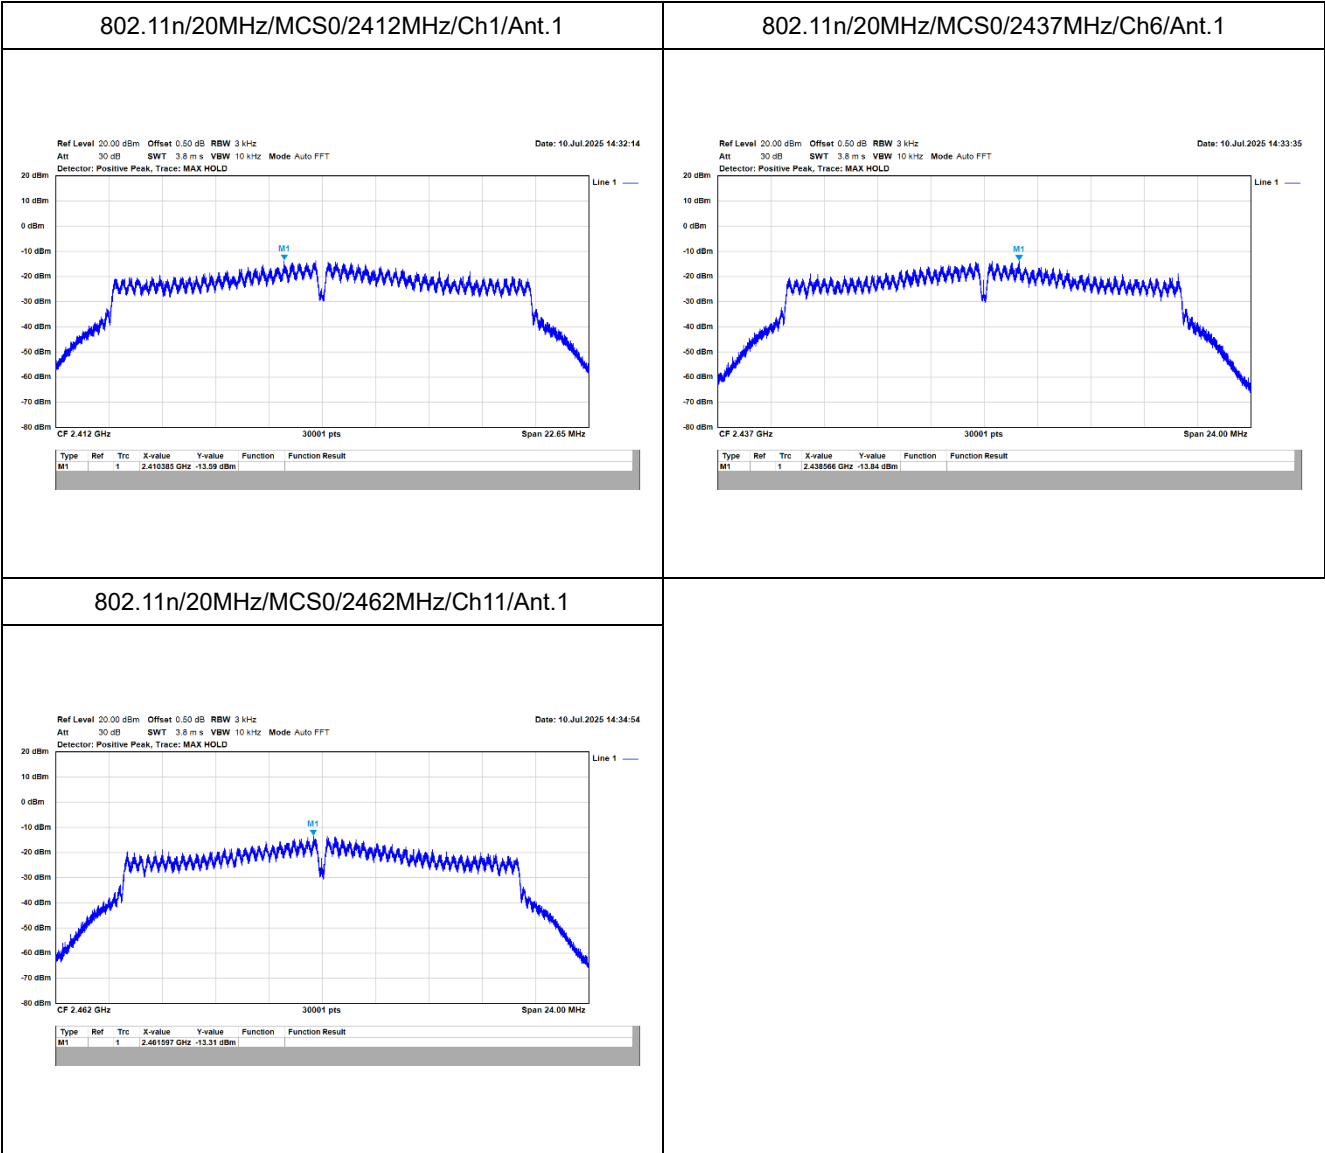


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
802.11b (20MHz)	> 20	PASS
802.11g (20MHz)	> 20	PASS
802.11n (20MHz)	> 20	PASS


802.11b/20MHz/1M/2412MHz/Ch1/Ant.1 (Ref.)

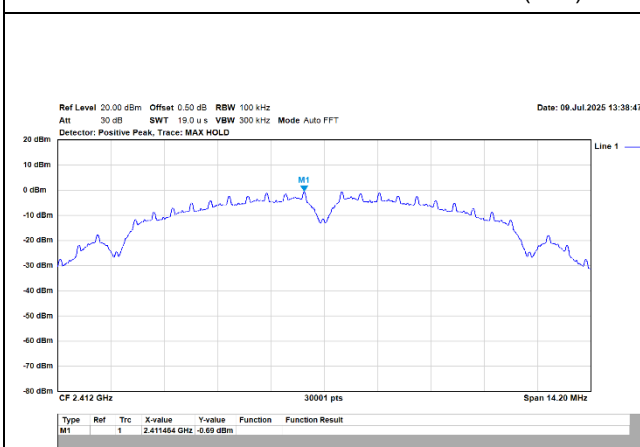


802.11b/20MHz/1M/2412MHz/Ch1/Ant.1

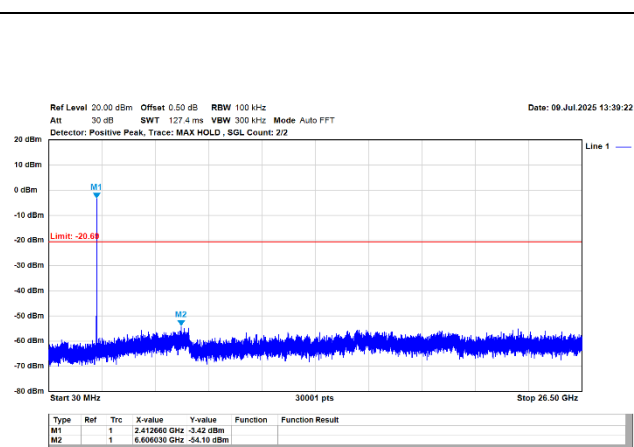


802.11b/20MHz/1M/2437MHz/Ch6/Ant.1 (Ref.)

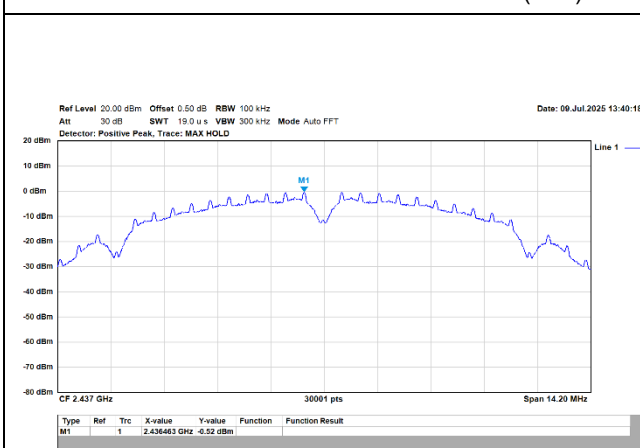


802.11b/20MHz/1M/2437MHz/Ch6/Ant.1

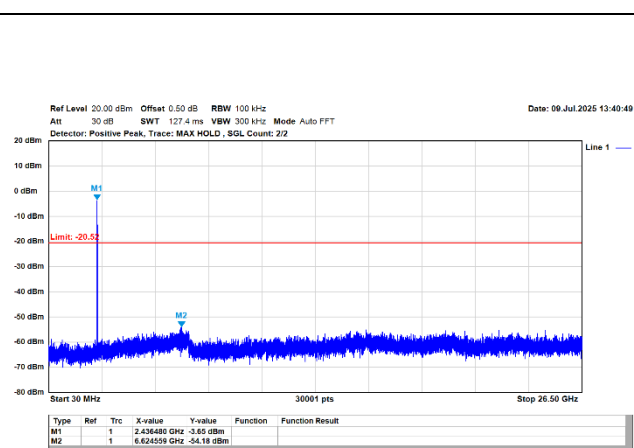


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1 (Ref.)

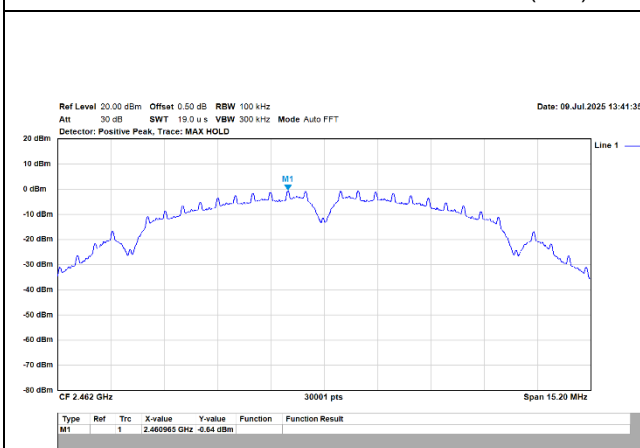


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1

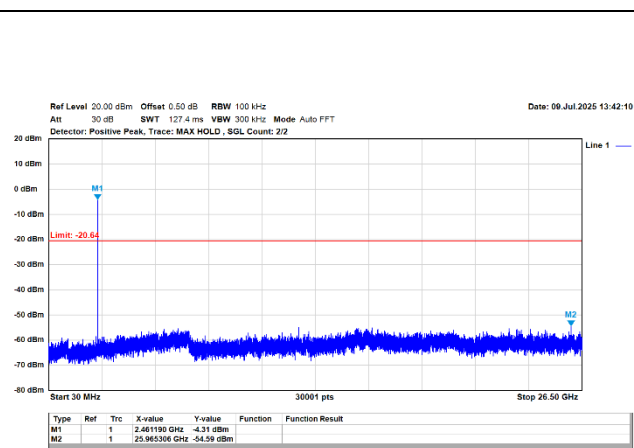


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1 (Ref.)

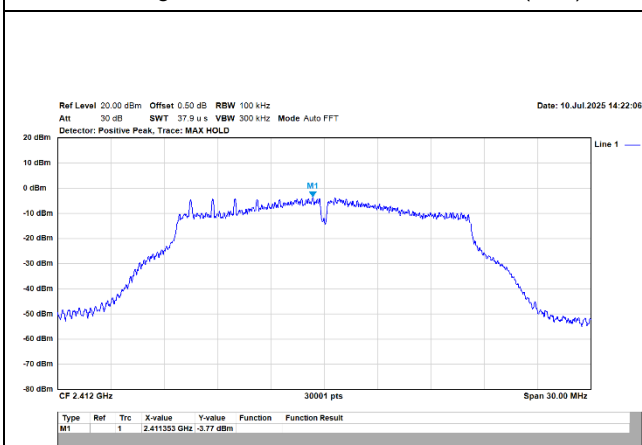


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1

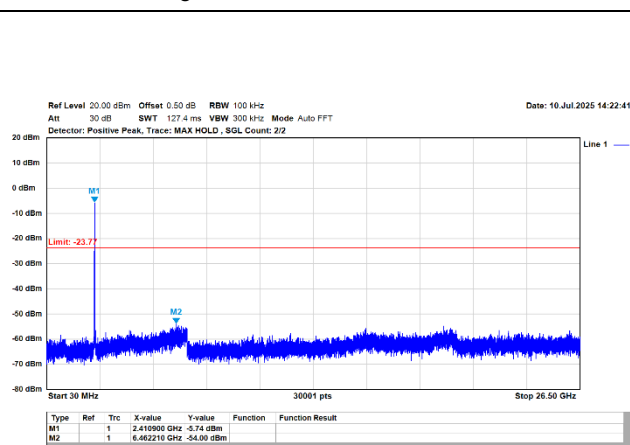


802.11g/20MHz/6M/2437MHz/Ch6/Ant.1 (Ref.)

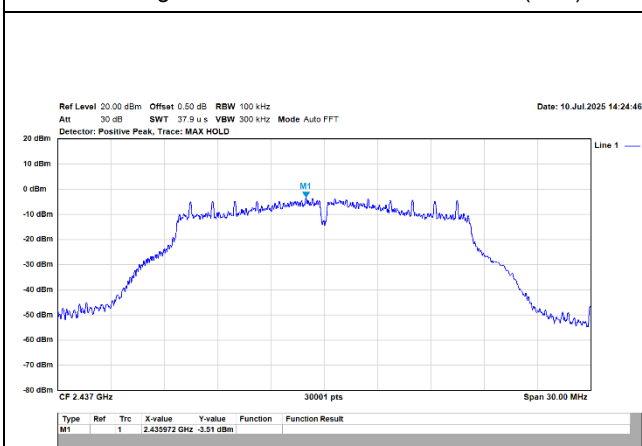


802.11g/20MHz/6M/2437MHz/Ch6/Ant.1

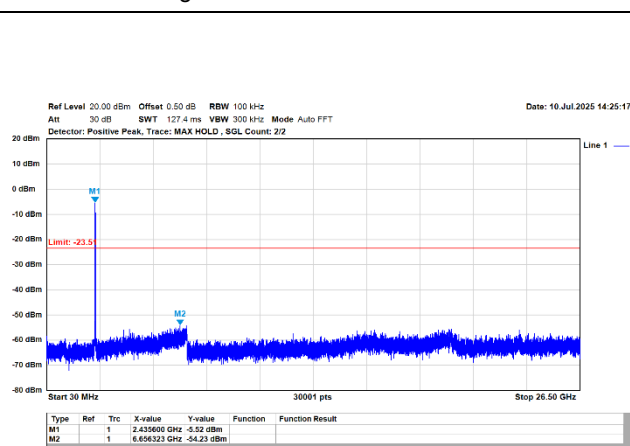


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1 (Ref.)

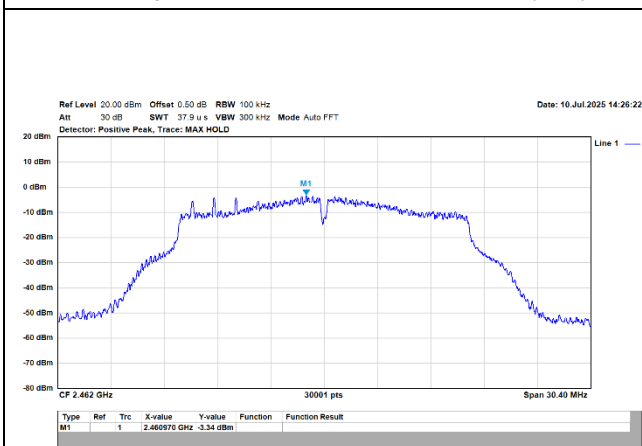


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1

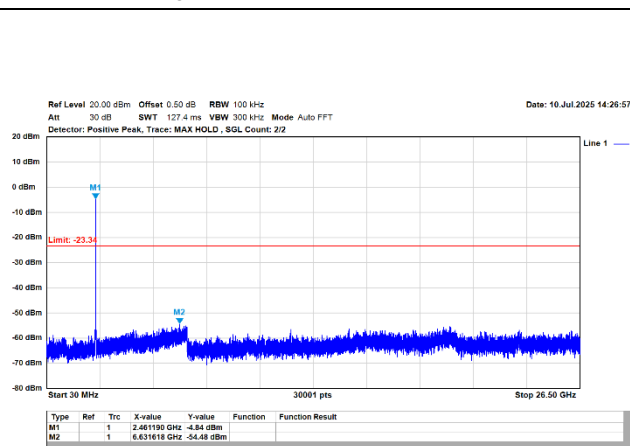


802.11n/20MHz/MCS0/2412MHz/Ch1/Ant.1 (Ref.)

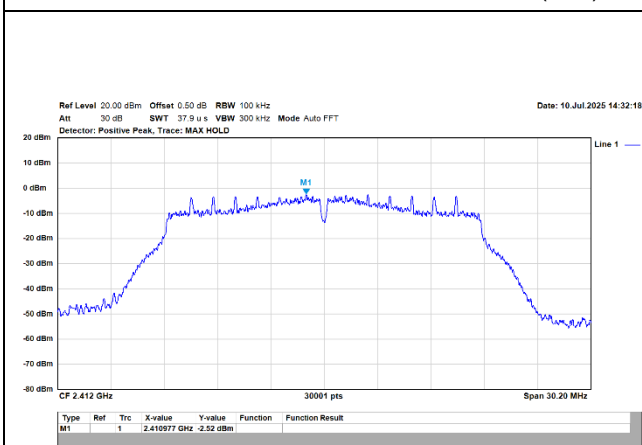


802.11n/20MHz/MCS0/2412MHz/Ch1/Ant.1

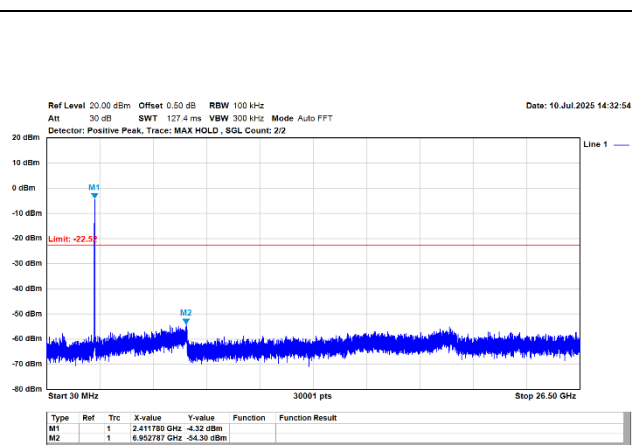


802.11n/20MHz/MCS0/2437MHz/Ch6/Ant.1 (Ref.)

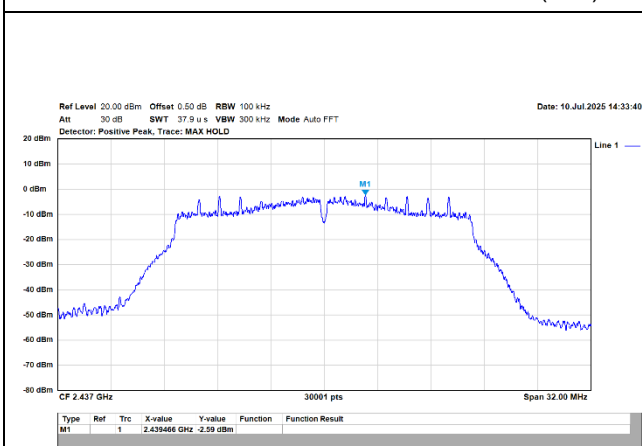


802.11n/20MHz/MCS0/2437MHz/Ch6/Ant.1

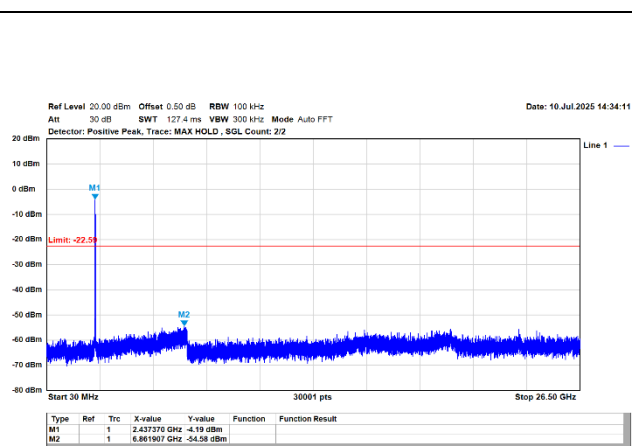


802.11n/20MHz/MCS0/2462MHz/Ch11/Ant.1 (Ref.)

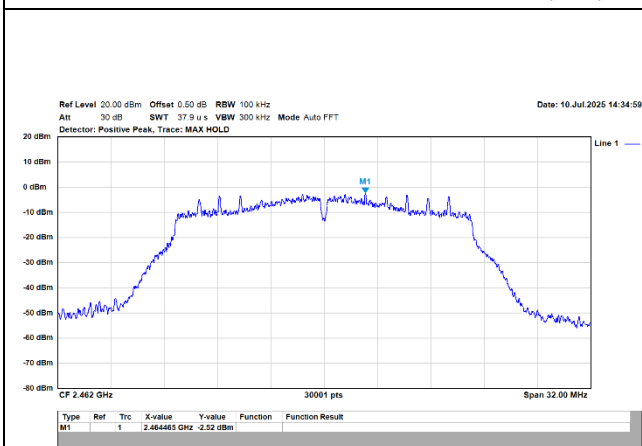


802.11n/20MHz/MCS0/2462MHz/Ch11/Ant.1

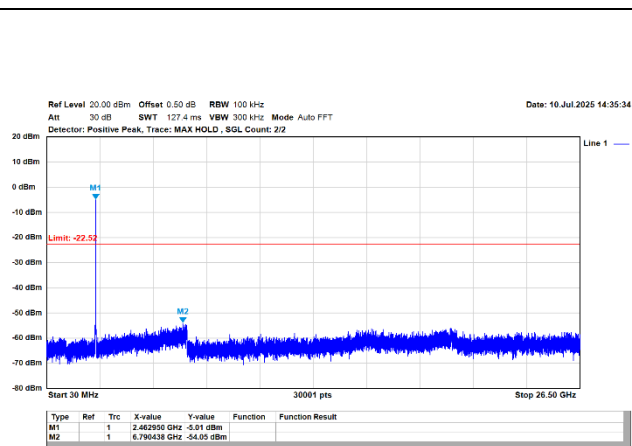


802.11b/20MHz/1M/2412MHz/Ch1/Ant.1(Band Edge)

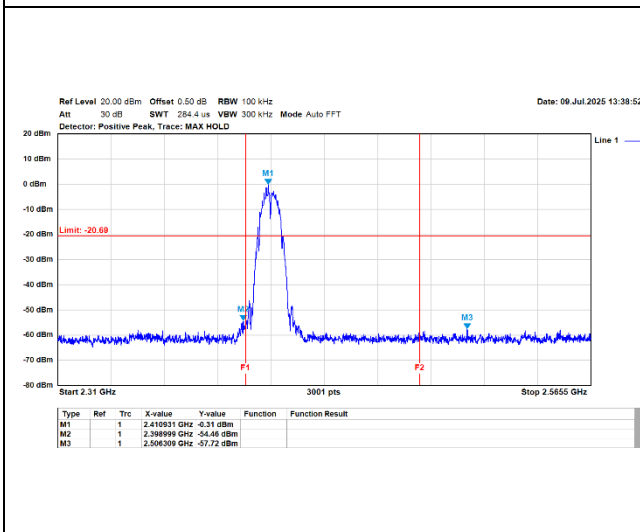


802.11b/20MHz/1M/2462MHz/Ch11/Ant.1(Band Edge)

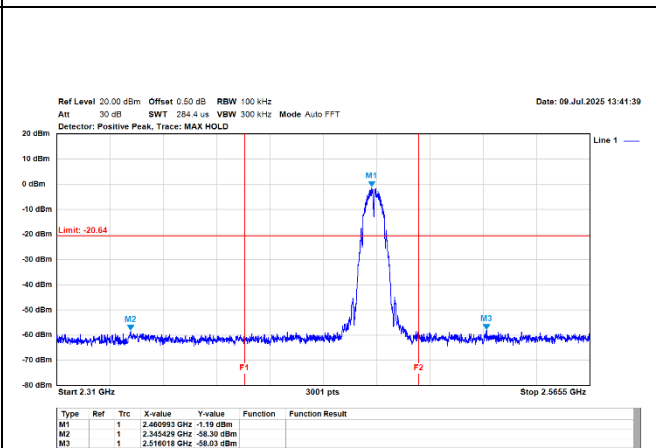


802.11g/20MHz/6M/2412MHz/Ch1/Ant.1(Band Edge)

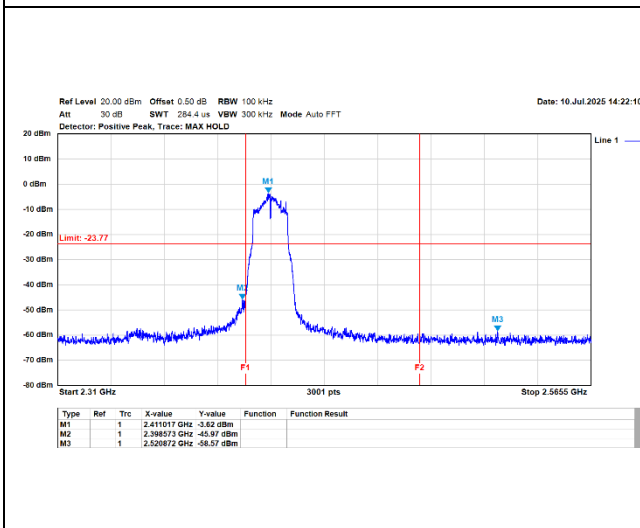


802.11g/20MHz/6M/2462MHz/Ch11/Ant.1(Band Edge)

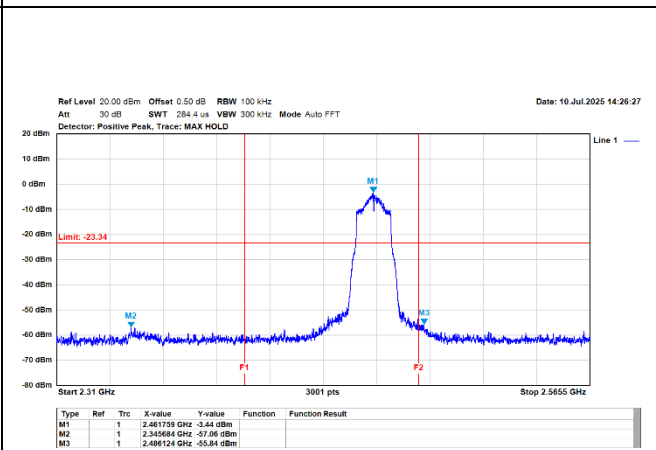

802.11n/20MHz/MCS0/2412MHz/Ch1/Ant.1(Band Edge)

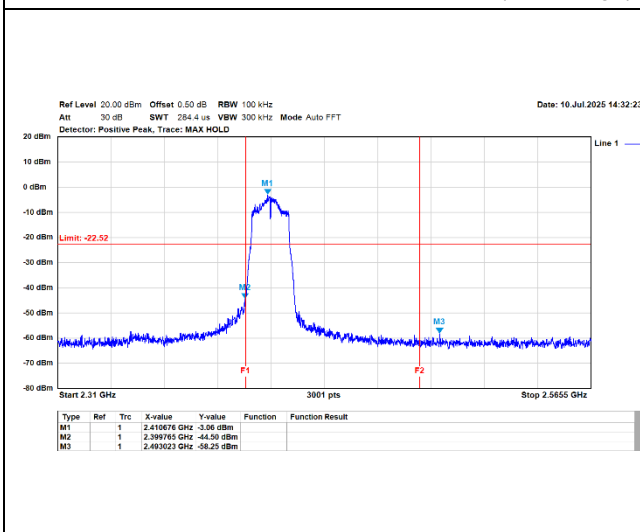

802.11n/20MHz/MCS0/2462MHz/Ch11/Ant.1(Band Edge)

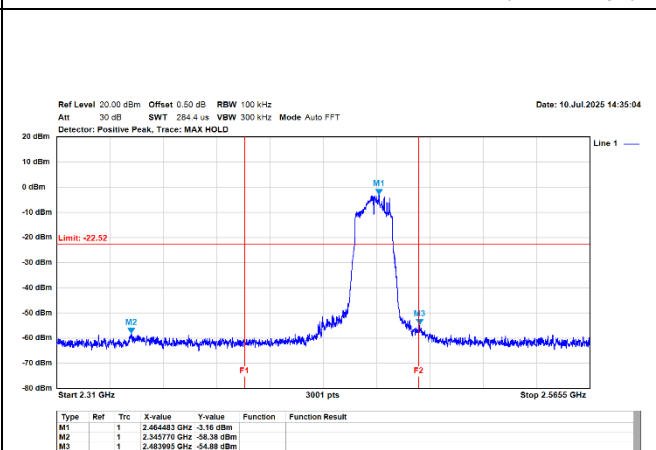


Appendix F. Test Result of Radiated Emission

TX_b_2412MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2412MHz Test BY :Ashton Level (dBuV/m) Date: 2025-07-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>37.48</td><td>74.00</td><td>-36.52</td><td>52.35</td><td>-14.87</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	37.48	74.00	-36.52	52.35	-14.87	Peak	TX_b_2412MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2412MHz Test BY :Ashton Level (dBuV/m) Date: 2025-07-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4824.000</td><td>37.28</td><td>74.00</td><td>-36.72</td><td>52.15</td><td>-14.87</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4824.000	37.28	74.00	-36.72	52.15	-14.87	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4824.000	37.48	74.00	-36.52	52.35	-14.87	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4824.000	37.28	74.00	-36.72	52.15	-14.87	Peak																																										
TX_b_2437MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_b_2437MHz Test BY :Ashton Level (dBuV/m) Date: 2025-07-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>37.76</td><td>74.00</td><td>-36.24</td><td>52.38</td><td>-14.62</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	37.76	74.00	-36.24	52.38	-14.62	Peak	TX_b_2437MHz_V Site :HY-CB03 Condition :3m ,Vertical Mode :TX_b_2437MHz Test BY :Ashton Level (dBuV/m) Date: 2025-07-11 <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4874.000</td><td>38.56</td><td>74.00</td><td>-35.44</td><td>53.18</td><td>-14.62</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit	Over	Read	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4874.000	38.56	74.00	-35.44	53.18	-14.62	Peak
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4874.000	37.76	74.00	-36.24	52.38	-14.62	Peak																																										
No.	Frequency	Level	Limit	Over	Read	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4874.000	38.56	74.00	-35.44	53.18	-14.62	Peak																																										

TX_b 2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

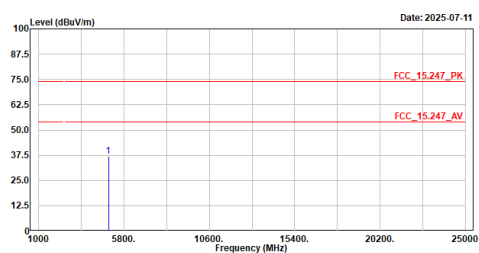


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	36.83	74.00	-37.17	51.18	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

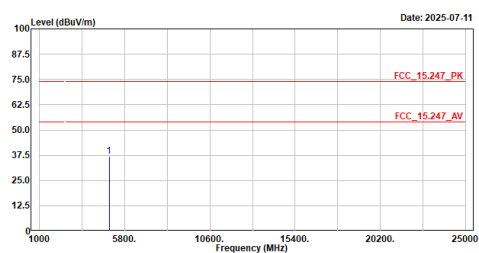


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.16	74.00	-36.84	51.51	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2412MHz
Test BY :Ashton

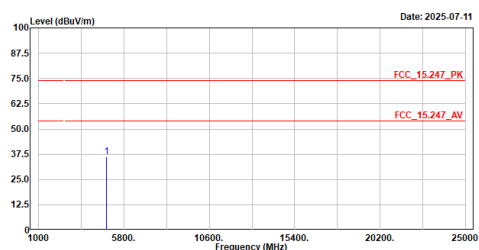


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	36.09	74.00	-37.91	50.96	-14.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2412MHz
Test BY :Ashton

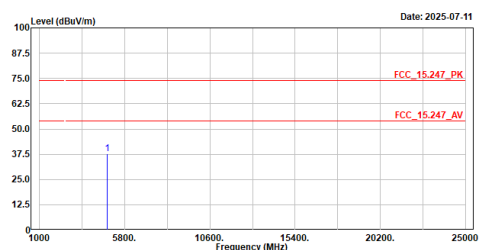


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.58	74.00	-36.42	52.45	-14.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2437MHz
Test BY :Ashton

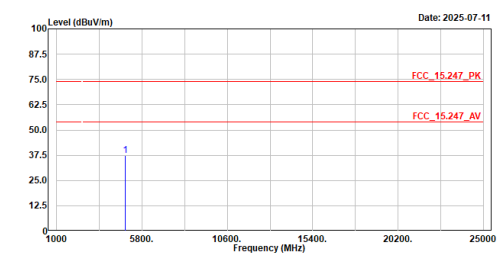


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.28	74.00	-36.72	51.90	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2437MHz
Test BY :Ashton

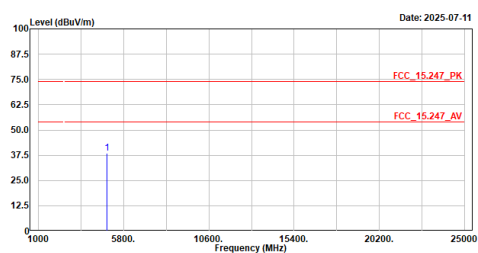


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	38.52	74.00	-35.48	53.14	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

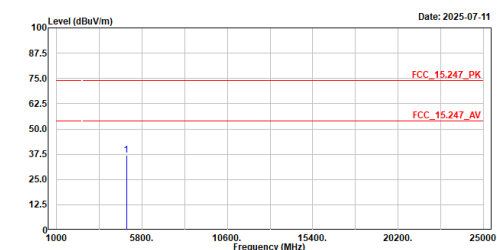


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.00	74.00	-37.00	51.35	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

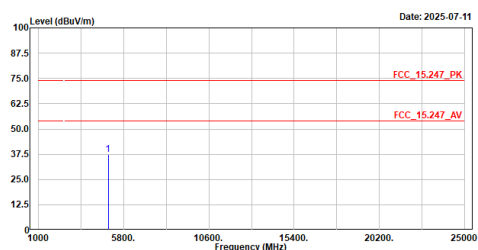


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4924.000	37.43	74.00	-36.57	51.78	-14.35	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2412MHz
Test BY :Ashton

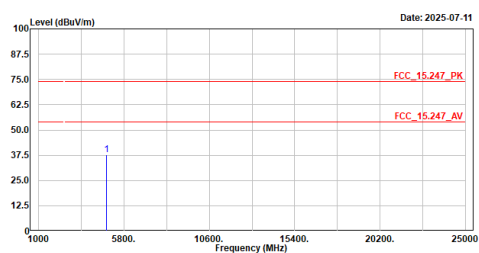


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	37.84	74.00	-36.16	52.71	-14.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2412MHz
Test BY :Ashton

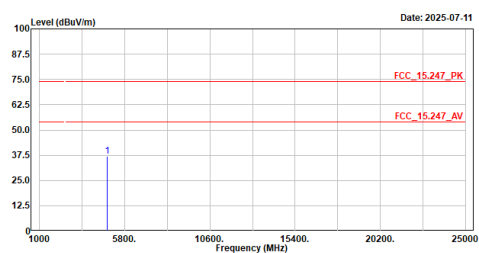


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4824.000	36.91	74.00	-37.09	51.78	-14.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2437MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2437MHz
Test BY :Ashton

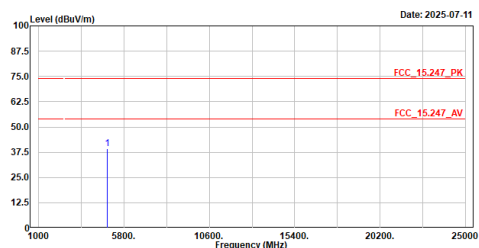


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	39.17	74.00	-34.83	53.79	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2437MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2437MHz
Test BY :Ashton

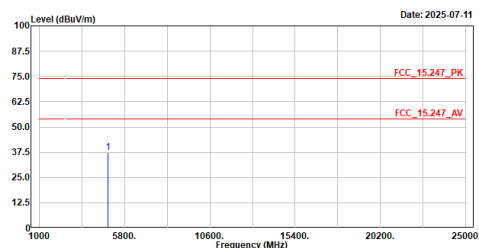


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	4874.000	37.21	74.00	-36.79	51.83	-14.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2462MHz
Test BY :Ashton

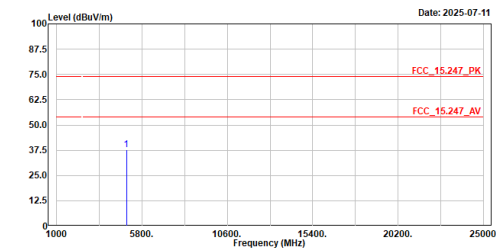


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	37.70	74.00	-36.30	52.05	-14.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2462MHz
Test BY :Ashton

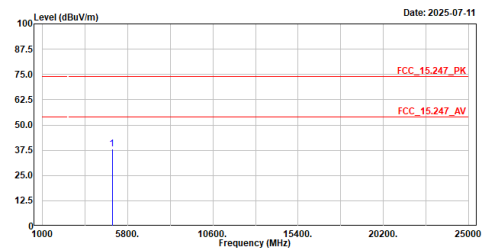


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4924.000	38.14	74.00	-35.86	52.49	-14.35	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2437MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2437MHz
Test BY :Bob

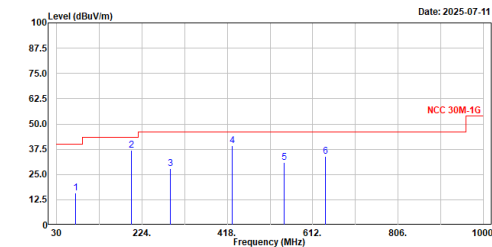


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	72.680	15.89	40.00	-24.11	42.80	-26.91	QP
2	199.750	36.97	43.50	-6.53	63.80	-26.83	QP
3	288.020	27.75	46.00	-18.25	51.11	-23.36	QP
4	429.640	39.07	46.00	-6.93	58.69	-19.62	QP
5	547.980	31.05	46.00	-14.95	48.31	-17.26	QP
6	641.100	33.83	46.00	-12.17	48.84	-15.01	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_n20_2437MHz_V_QP


Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2437MHz
Test BY :Bob

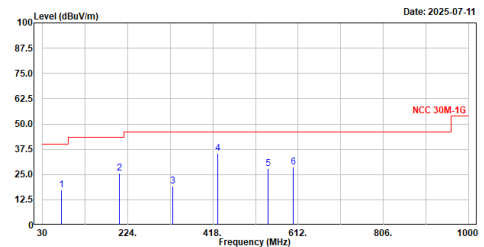

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	73.650	17.51	40.00	-22.49	44.87	-27.36	QP
2	205.570	25.80	43.50	-17.70	52.48	-26.68	QP
3	325.850	19.25	46.00	-26.75	41.42	-22.17	QP
4	428.670	35.42	46.00	-10.58	55.09	-19.67	QP
5	544.100	27.80	46.00	-18.20	45.13	-17.33	QP
6	600.360	28.82	46.00	-17.18	44.23	-15.41	QP


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_b 2412MHz_H Average

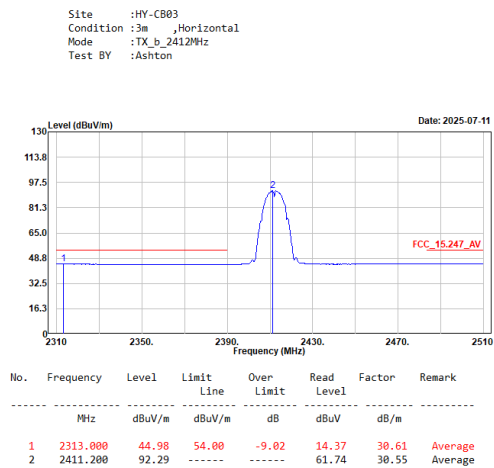


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2412MHz_H Peak

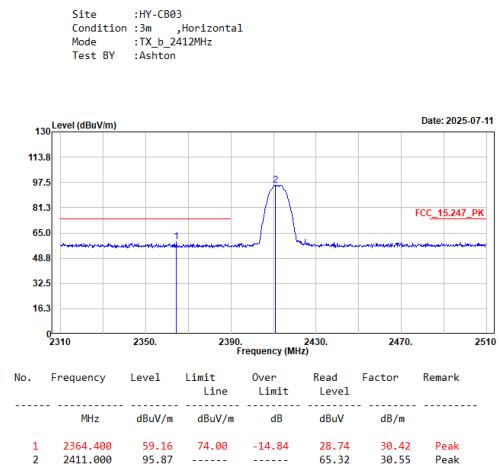


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2412MHz_V Average

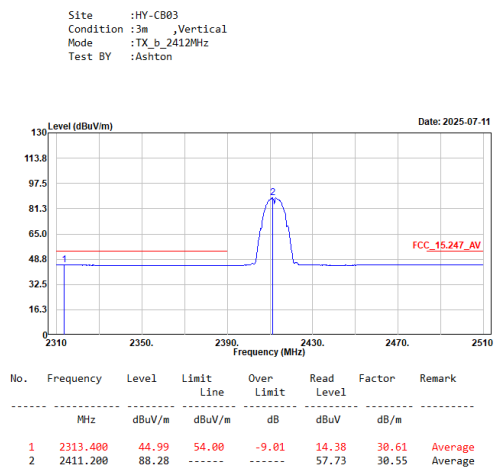

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_b 2412MHz_V Peak

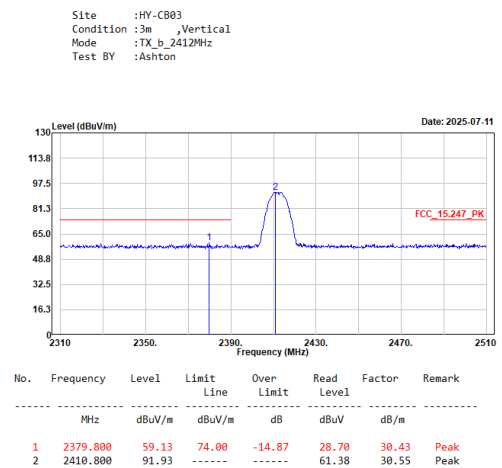

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

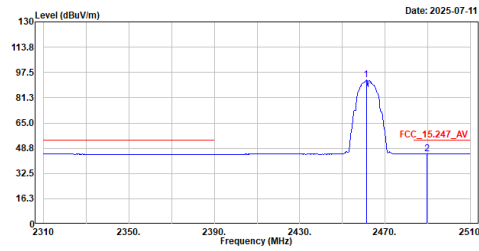


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	92.61	-----	-----	62.14	30.47	Average
2	2489.800	45.19	54.00	-8.81	14.69	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_b_2462MHz
Test BY :Ashton

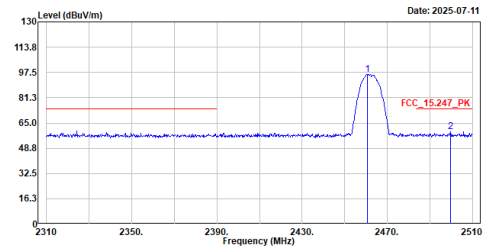


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	96.35	-----	-----	65.88	30.47	Peak
2	2499.800	59.46	74.00	-14.54	28.95	30.51	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

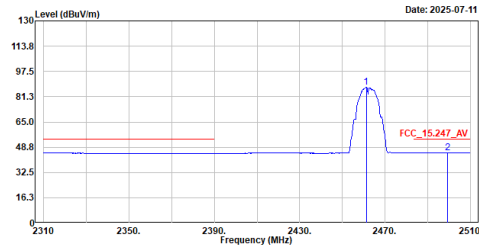


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	87.56	-----	-----	57.09	30.47	Average
2	2499.400	45.19	54.00	-8.81	14.68	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_b 2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_b_2462MHz
Test BY :Ashton

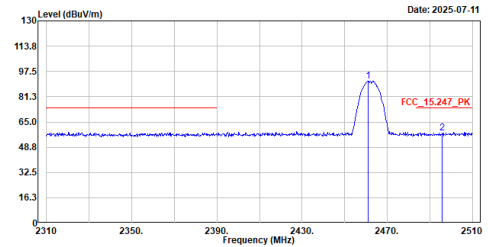


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	91.14	-----	-----	60.67	30.47	Peak
2	2495.800	58.01	74.00	-15.99	27.50	30.51	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_H_Average

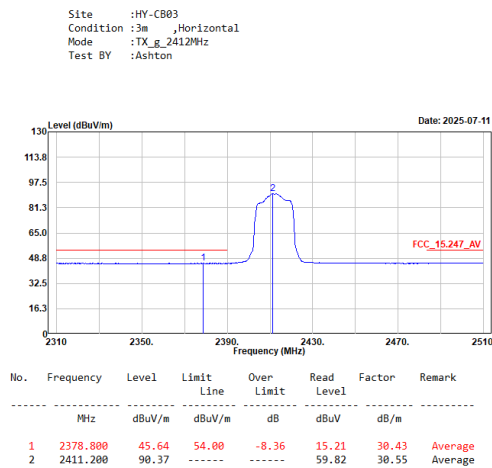


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_H_Peak

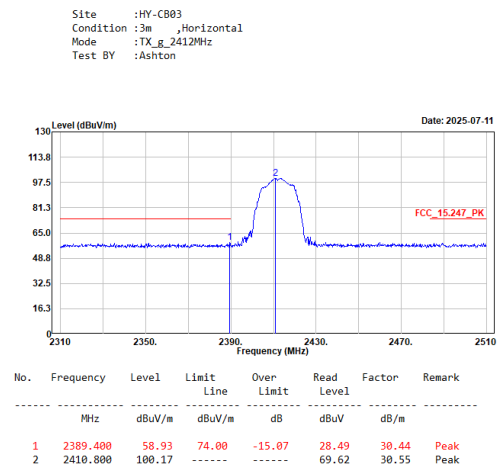


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2412MHz_V_Average

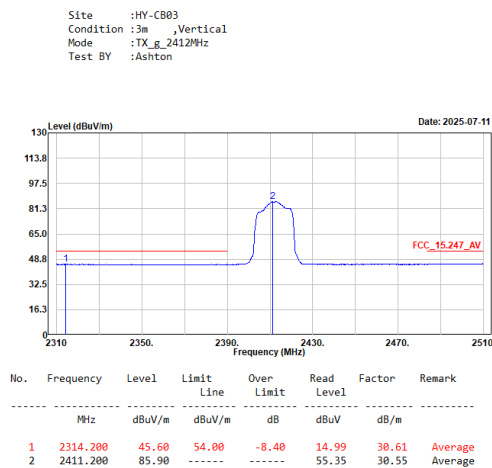

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_g 2412MHz_V_Peak

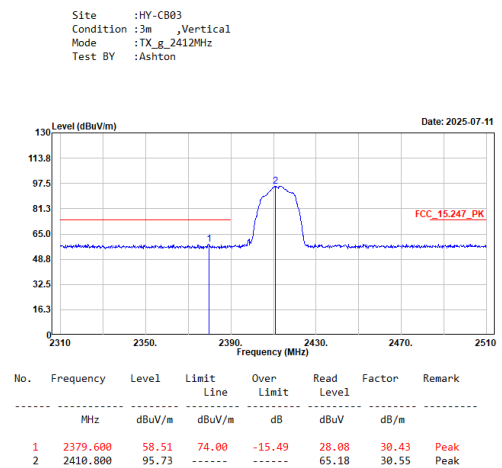

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

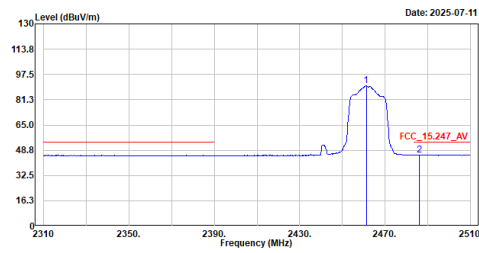


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	90.23	-----	-----	59.76	30.47	Average
2	2486.000	45.70	54.00	-8.30	15.24	30.46	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_g_2462MHz
Test BY :Ashton

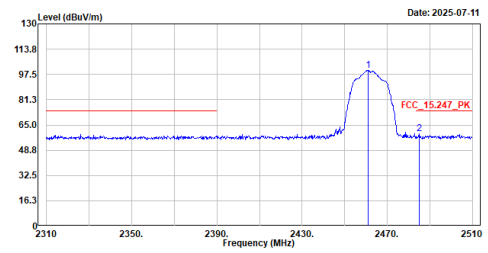


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.000	100.08	-----	-----	69.61	30.47	Peak
2	2485.000	59.14	74.00	-14.86	28.69	30.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

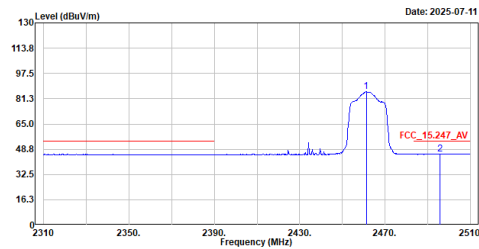


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.200	85.92	-----	-----	55.45	30.47	Average
2	2495.800	45.69	54.00	-8.31	15.18	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_g 2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_g_2462MHz
Test BY :Ashton

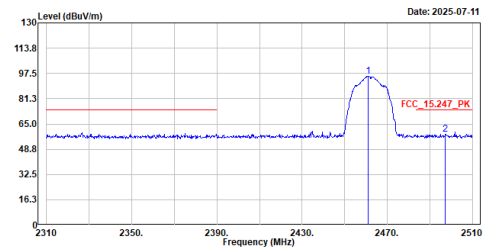


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2461.000	95.83	-----	-----	65.36	30.47	Peak
2	2497.200	58.41	74.00	-15.59	27.90	30.51	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Average

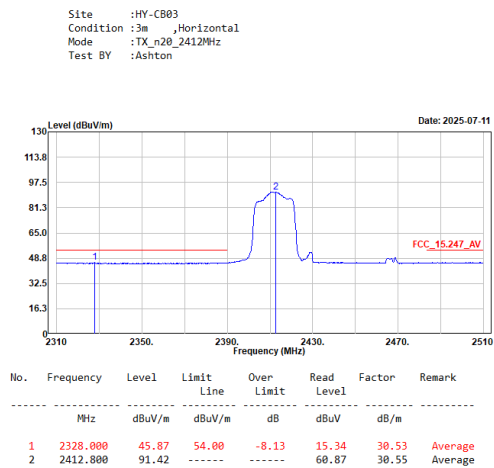


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_H_Peak

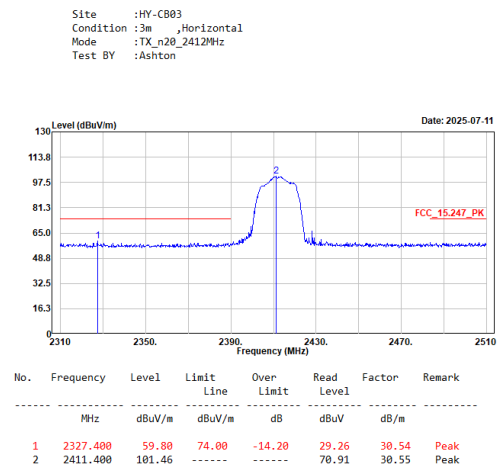


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2412MHz_V_Average

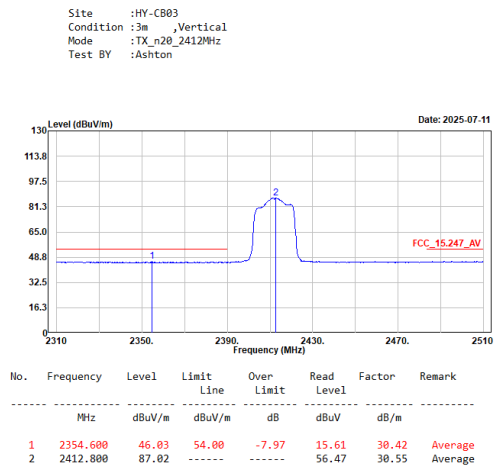

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.


TX_n20_2412MHz_V_Peak

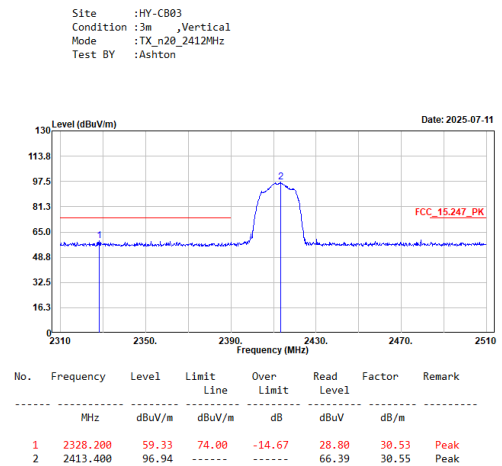

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2462MHz
Test BY :Ashton

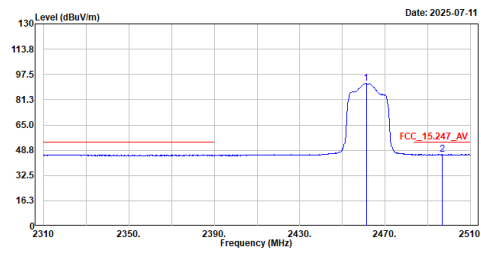


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.200	91.86	-----	-----	61.39	30.47	Average
2	2496.800	46.08	54.00	-7.92	15.57	30.51	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_n20_2462MHz
Test BY :Ashton

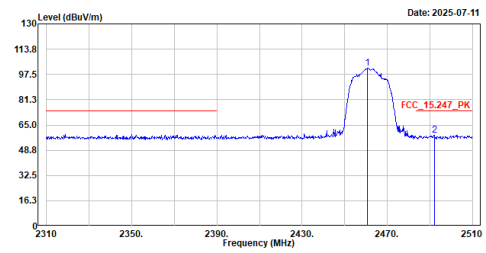


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2460.800	101.44	-----	-----	70.97	30.47	Peak
2	2492.000	58.25	74.00	-15.75	27.75	30.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2462MHz
Test BY :Ashton

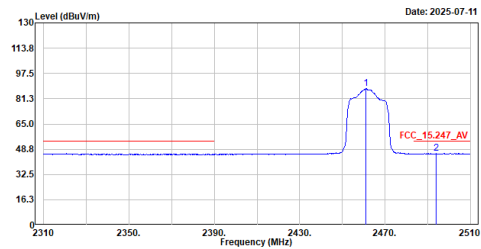


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.000	87.66	-----	-----	57.19	30.47	Average
2	2494.000	45.95	54.00	-8.05	15.45	30.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_n20_2462MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_n20_2462MHz
Test BY :Ashton

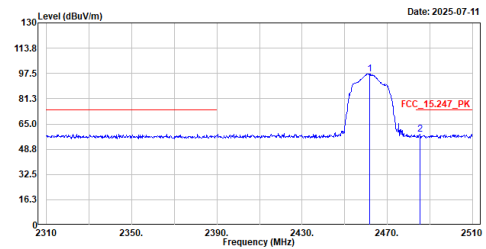

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2461.800	97.33	-----	-----	66.87	30.46	Peak
2	2485.200	58.37	74.00	-15.63	27.92	30.45	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.