



FCC 47 CFR PART 15 SUBPART C

RF Test Report

Applicant : Tobii AB

Product Type : Tobii Dynavox I-110

Trade Name : tobii dynavox

Model Number : I-110

Test Specification : FCC 47 CFR PART 15 SUBPART C

ANSI C63.10:2013

Receive Date : Feb. 24, 2017

Test Period : Mar. 16~Apr. 21, 2017

Issue Date : May 09, 2017

Issue by

A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,

Taoyuan City 33465, Taiwan (R.O.C)

Tel: +886-3-2710188 / Fax: +886-3-2710190





Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.





Revision History

Rev.	Issue Date	Revisions	Revised By
00	May 09, 2017	Initial Issue	Janet Chao



Report Number: 1704FR27

Verification of Compliance

Issued Date: May 09, 2017

Tobii AB Applicant

Product Type Tobii Dynavox I-110

Trade Name tobii dynavox

Model Number I-110

FCC ID **W5M-TDI110**

EUT Rated Voltage DC 15V, 2.4A

Test Voltage 120 Vac / 60 Hz

FCC 47 CFR PART 15 SUBPART C Applicable Standard

ANSI C63.10:2013

Test Result Complied

Performing Lab. A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,

Taoyuan City 33465, Taiwan (R.O.C)

Tel: +886-3-2710188 / Fax: +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

http://www.atl-lab.com.tw/e-index.htm

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By

(Manager)

Reviewed By
(Fly Lu)

(Testing Engineer)

(Eric Ou Yang







TABLE OF CONTENTS

1	General Information	5
	1.1. Summary of Test Result	5
	1.2. Measurement Uncertainty	5
2	EUT Description	6
3	Test Methodology	7
	3.1. Mode of Operation	7
	3.2. EUT Exercise Software	7
	3.3. Configuration of Test System Details AC Power Conducted Emission	8
	3.4. Test Site Environment	8
4	Maximum Conducted Output Power Measurement	9
5	AC Power Line Conducted Emission Measurement	11
6	Radiated Interference Measurement	15
7	20dB RF Bandwidth Measurement	44
8	Carrier Frequency Separation Measurement	48
9	Number of Hopping Measurement	52
10	Time of Occupancy (Dwell Time) Measurement	56
11	Out of Band Conducted Emissions Measurement	61
12	Antenna Measurement	66





1 General Information


1.1. Summary of Test Result

FCC Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
15.247(b)(1)	Max. Output Power	PASS	
15.247(d)	Transmitter Radiated Emissions	PASS	
15.247(a)(1)	20dB RF Bandwidth	PASS	
15.247(a)(1)	Carrier Frequency Separation	PASS	
15.247(a)(1)(iii)	Number of Hopping	PASS	
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	
15.247(d)	Out of Band Conducted Spurious Emission	PASS	

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)		
Conducted Emission	9kHz ~ 150KHz	2.7		
Conducted Emission	150kHz ~ 30MHz	2.7		
	9kHz ~ 30MHz	1.7		
	30MHz ~ 1000MHz	5.7		
Radiated Emission	1000MHz ~ 18000MHz	5.5		
	18000MHz ~ 26500MHz	4.8		
	26500MHz ~ 40000MHz	4.8		
Conducted Output Power	+0.27 dB / -0.28 dB			
RF Bandwidth	4.96%			
Power Spectral Density	+0.71 dB / -0.77 dB			





2 EUT Description

Applicant	Tobii AB Karlsrovagen 2D, 18253 Danderyd, Sweden				
Manufacturer (1)	Tobii AB Karlsrovagen 2D, 18253 Danderyd, Sweden				
Manufacturer (2)	ONYX Healthcare 2F., No.135, Ln. 235, Bac	oqiao Rd., X	indian Dist., New Ta	aipei City 231, Taiwan (R.O.C.)	
Product	Tobii Dynavox I-110				
Trade Name	tobii dynavox				
Model Number	I-110				
FCC ID	W5M-TDI110				
Frequency Range	2402 ~ 2480 MHz				
Modulation Type	GFSK for 1Mbps				
	π/4-DQPSK for 2Mbps				
	8DPSK for 3Mbps				
Antenna information		Туре		Max. Gain (dBi)	
Antenna information	PIFA	A Antenna		2.97	
RF Output Power	GFSK for 1Mbps	0.00191	W		
(Conducted)	π/4-DQPSK for 2Mbps	0.00136	W		
	8DPSK for 3Mbps	0.00141	W		



Report Number: 1704FR27

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Continuous TX mode
Mode 2: GFSK TX Mode
Mode 3: π/4-DQPSK TX Mode
Mode 4: 8DPSK TX Mode

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in TX mode only. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Continuous TX mode
Mode 2: GFSK TX Mode
Mode 4: 8DPSK TX Mode


Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.

3.2. EUT Exercise Software

1	Setup the EUT as shown on 3.3.
2	Turn on the power of all equipment.
3	Turn on Bluetooth function
4	EUT run test program.


Mea	Measurement Software			
1	EZ-EMC Ver. ATL-03A1-1			
2	EZ-EMC Ver ATL-ITC-3A1-1			






3.3. Configuration of Test System Details

AC Power Conducted Emission

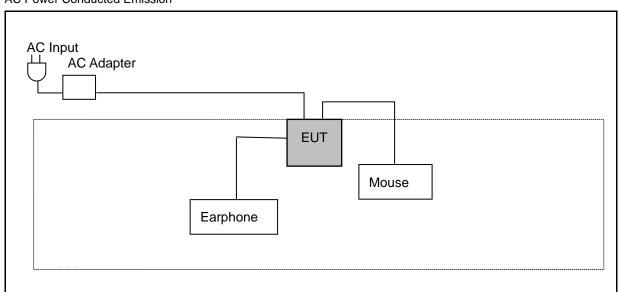

Radiated Emissions

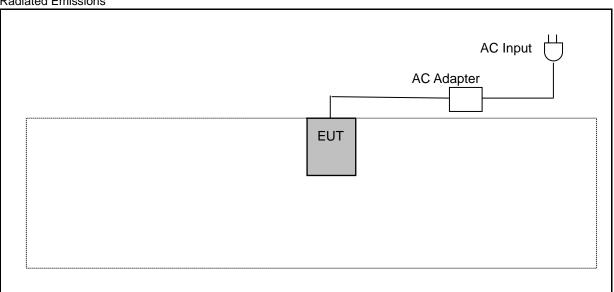

3.4. Test Site Environment

Items	Required (IEC 60068-1)	Actual	
Temperature (°C)	15-35	26	
Humidity (%RH)	25-75	60	
Barometric pressure (mbar)	860-1060	950	




Report Number: 1704FR27

4 Maximum Conducted Output Power Measurement

■ Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

■ Test Setup

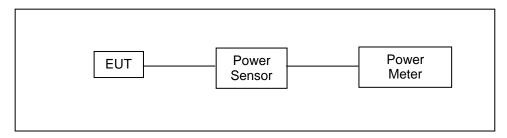

■ Test Instruments


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Anritsu	MA2411B	1126022	08/29/2016	1 year
Power Meter	Anritsu	ML2495A	1135009	08/29/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

NOTE: N.C.R. = No Calibration Request.

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.






■ Test Result

To at Manda	Frequency	Do alsot Time	Average Power		Peak Power		Limit
Test Mode	(MHz)	Packet Type	(dBm)	(W)	(dBm)	(W)	(W)
		DH1	1.98	0.00158	2.23	0.00167	< 0.125
	2402	DH3	2.00	0.00158	2.25	0.00168	< 0.125
		DH5	2.07	0.00161	2.30	0.00170	< 0.125
		DH1	2.20	0.00166	2.47	0.00177	< 0.125
Mode 2	2441	DH3	2.27	0.00169	2.53	0.00179	< 0.125
		DH5	2.41	0.00174	2.67	0.00185	< 0.125
		DH1	2.47	0.00177	2.72	0.00187	< 0.125
	2480	DH3	2.50	0.00178	2.75	0.00188	< 0.125
		DH5	2.55	0.00180	2.80	0.00191	< 0.125
	2402	2DH1	-1.85	0.00065	1.05	0.00127	< 0.125
		2DH3	-1.70	0.00068	1.08	0.00128	< 0.125
		2DH5	-1.67	0.00068	1.10	0.00129	< 0.125
	2441	2DH1	-2.06	0.00062	1.11	0.00129	< 0.125
Mode 3		2DH3	-1.79	0.00066	1.14	0.00130	< 0.125
		2DH5	-1.76	0.00067	1.16	0.00131	< 0.125
		2DH1	-1.75	0.00067	1.27	0.00134	< 0.125
	2480	2DH3	-1.72	0.00067	1.28	0.00134	< 0.125
		2DH5	-1.68	0.00068	1.32	0.00136	< 0.125
	2402	3DH1	-1.80	0.00066	1.15	0.00130	< 0.125
		3DH3	-1.69	0.00068	1.22	0.00132	< 0.125
		3DH5	-1.65	0.00068	1.24	0.00133	< 0.125
		3DH1	-2.04	0.00063	1.34	0.00136	< 0.125
Mode 4		3DH3	-1.75	0.00067	1.38	0.00137	< 0.125
		3DH5	-1.74	0.00067	1.40	0.00138	< 0.125
		3DH1	-1.70	0.00068	1.41	0.00138	< 0.125
	2480	3DH3	-1.67	0.00068	1.44	0.00139	< 0.125
		3DH5	-1.63	0.00069	1.49	0.00141	< 0.125

Note: The relevant measured result has the offset with cable loss already.





5 AC Power Line Conducted Emission Measurement

■ Limit


Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	05/31/2016	1 year
LISN	R&S	ENV216	101040	04/01/2017	1 year
LISN	R&S	ENV216	101041	03/15/2017	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/31/2016	1 year
Test Site	ATL	TE02	TE02	N.C.R.	

NOTE: N.C.R. = No Calibration Request.

■ Test Setup

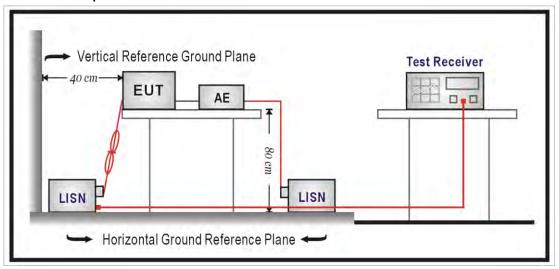



Report Number: 1704FR27

Test Procedure


The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω // 50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω // 50uH coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.


If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.





■ Test Result


Standard:	FCC Part 15.247	Line:	L1	
Test item:	Conducted Emission	Power:	AC 120V/60Hz	
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH	
		Date:	04/21/2017	
		Test By:	Eric Ou Yang	
Description:				

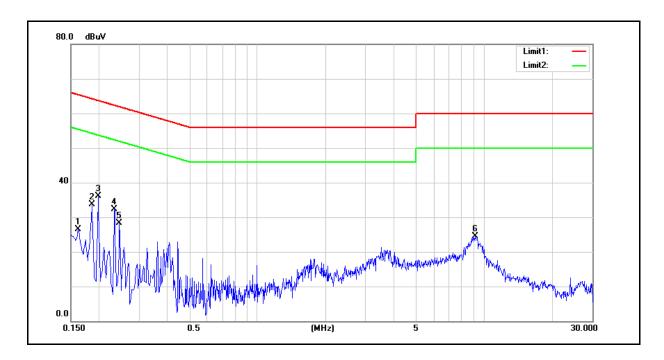

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1620	29.35	15.75	0.03	29.38	15.78	65.36	55.36	-35.98	-39.58	Pass
2	0.1860	27.52	11.26	0.03	27.55	11.29	64.21	54.21	-36.66	-42.92	Pass
3	0.1980	25.70	9.15	0.03	25.73	9.18	63.69	53.69	-37.96	-44.51	Pass
4	0.2340	21.14	5.89	0.03	21.17	5.92	62.31	52.31	-41.14	-46.39	Pass
5	0.2460	22.85	4.67	0.03	22.88	4.70	61.89	51.89	-39.01	-47.19	Pass
6	9.1340	22.26	14.74	0.24	22.50	14.98	60.00	50.00	-37.50	-35.02	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).





 Standard:
 FCC Part 15.247
 Line:
 N


 Test item:
 Conducted Emission
 Power:
 AC 120V/60Hz

 Test Mode:
 Mode 1
 Temp.(°C)/Hum.(%RH):
 26(°C)/60%RH

 Date:
 04/21/2017

 Test By:
 Eric Ou Yang


Description:

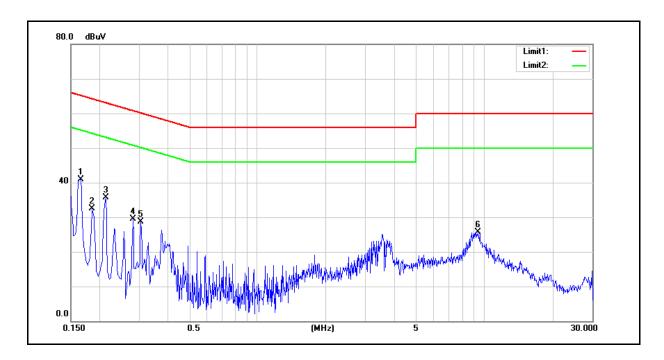

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1660	31.60	17.61	0.03	31.63	17.64	65.16	55.16	-33.53	-37.52	Pass
2	0.1860	29.44	12.51	0.03	29.47	12.54	64.21	54.21	-34.74	-41.67	Pass
3	0.2140	26.94	9.90	0.03	26.97	9.93	63.05	53.05	-36.08	-43.12	Pass
4	0.2820	21.48	8.68	0.04	21.52	8.72	60.76	50.76	-39.24	-42.04	Pass
5	0.3060	21.60	10.19	0.04	21.64	10.23	60.08	50.08	-38.44	-39.85	Pass
6	9.3660	20.58	13.46	0.24	20.82	13.70	60.00	50.00	-39.18	-36.30	Pass

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).





6 Radiated Interference Measurement

■ Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (µV/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

^{**} Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Instruments

		3 Meter Chamber			
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
RF Pre-selector	Agilent	N9039A	MY46520256	04/05/2017	1 year
Spectrum Analyzer	Agilent	E4446A	MY46180578	04/05/2017	1 year
Pre Amplifier	Agilent	8449B	3008A02237	10/11/2016	1 year
Pre Amplifier	Agilent	8447D	2944A11119	01/12/2017	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	07/15/2016	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/06/2016	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/05/2016	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	01/26/2017	1 year
Microwave Cable	EMCI	EMC102-KM-KM-14000	151001	02/20/2017	1 year
Microwave Cable	EMCI	EMC-104-SM-SM-14000	140202	02/20/2017	1 year
Microwave Cable	Microwave Cable EMCI		140301	02/20/2017	1 year
Test Site	ATL	TE01	888001	08/29/2016	1 year


Note: N.C.R. = No Calibration Request.







■ Setup

 $9kHz \sim 30MHz$

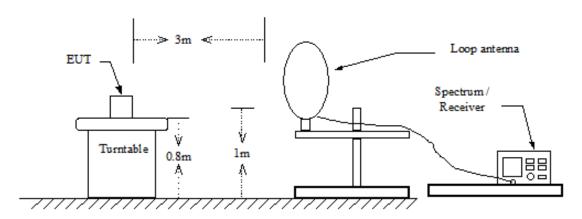


Below 1GHz

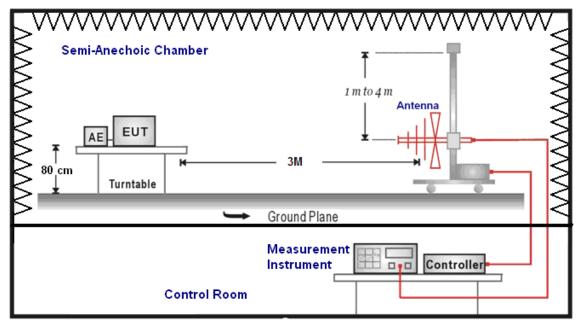





Above 1GHz

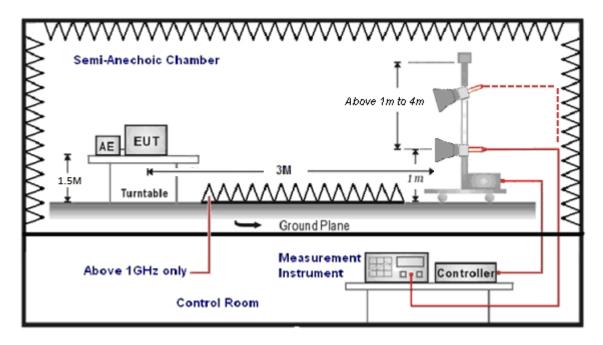



Report Number: 1704FR27

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height(below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

- (1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)
 - FI= Reading of the field intensity.
 - AF= Antenna factor.
 - CL= Cable loss.
 - P.S Amplitude is auto calculate in spectrum analyzer.
- (2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)
 - The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:
 - (a) For fundamental frequency: Transmitter Output < +30dBm
 - (b) For spurious frequency: Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.





■ Test Result

Below 1GHz

Standard: FCC Part 15.247 Test Distance: 3m

Test item: Radiated Emission Power: AC 120V/60Hz


Test Mode: Mode 1 Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Date: 03/17/2017

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
288.0000	47.66	-3.75	43.91	46.00	-2.09	QP	Н
307.0000	44.74	-3.27	41.47	46.00	-4.53	QP	Н
326.5000	46.01	-3.01	43.00	46.00	-3.00	QP	Н
640.0000	36.43	3.70	40.13	46.00	-5.87	QP	Н
698.0000	36.81	4.62	41.43	46.00	-4.57	QP	Н
746.5000	35.57	5.93	41.50	46.00	-4.50	QP	Н
64.5000	42.06	-7.62	34.44	40.00	-5.56	QP	V
288.0000	41.28	-3.75	37.53	46.00	-8.47	QP	V
326.5000	44.44	-3.01	41.43	46.00	-4.57	QP	V
667.0000	36.85	4.16	41.01	46.00	-4.99	QP	V
681.0000	36.06	4.37	40.43	46.00	-5.57	QP	V
800.0000	32.80	6.68	39.48	46.00	-6.52	QP	V

^{2.}Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).


^{3.}No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).





Above 1GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(℃)/60%RH
Mode:	Mode 2	Date:	03/16/2017
Ant.Polar.:	Horizontal		

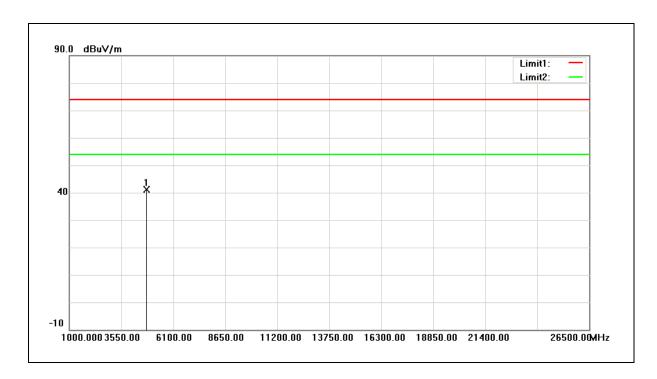

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	48.19	-7.16	41.03	74.00	-32.97	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Vertical

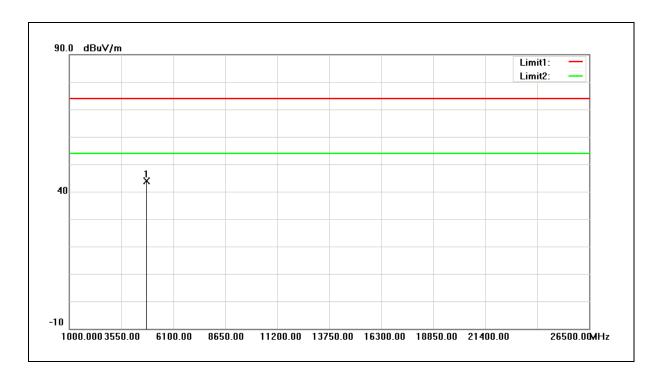

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	51.15	-7.16	43.99	74.00	-30.01	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2441MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Horizontal

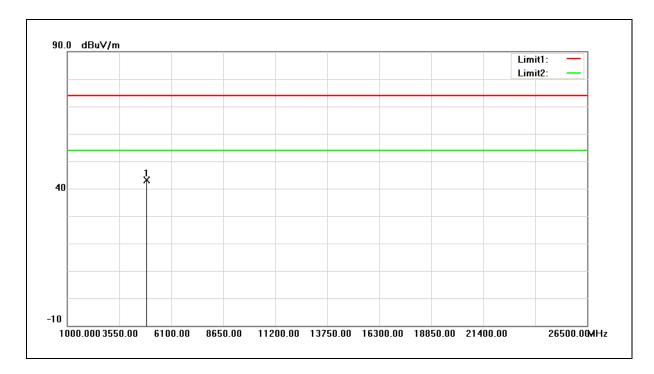

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4882.000	50.04	-6.92	43.12	74.00	-30.88	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2441MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Vertical

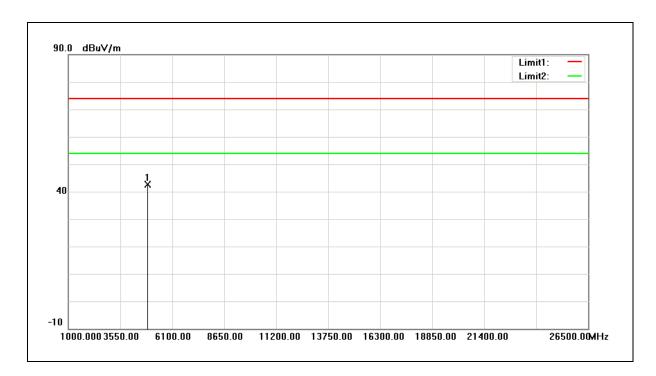

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4882.000	49.63	-6.92	42.71	74.00	-31.29	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Horizontal

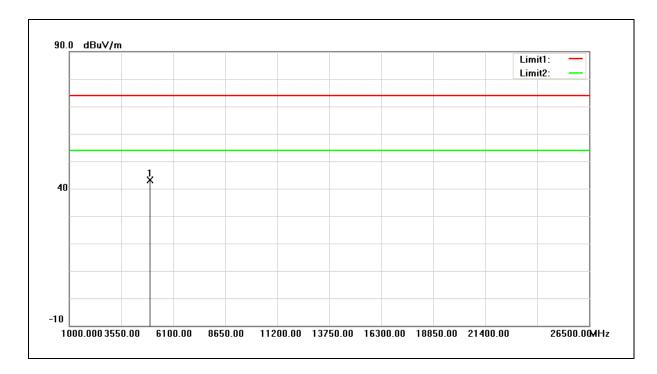

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	49.81	-6.69	43.12	74.00	-30.88	peak

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Vertical

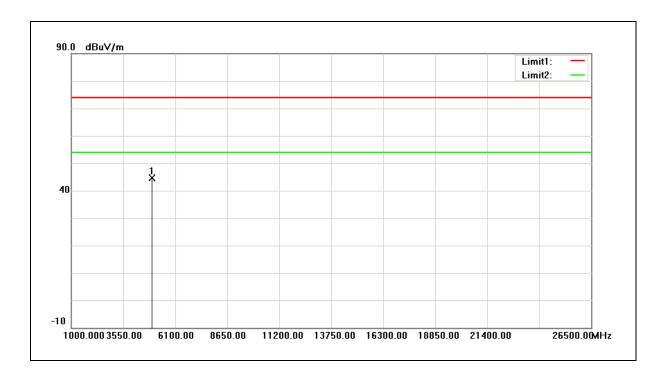

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	51.39	-6.69	44.70	74.00	-29.30	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Horizontal

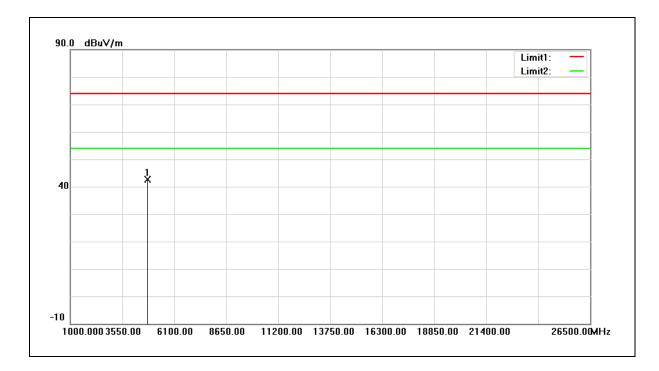

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	49.91	-7.16	42.75	74.00	-31.25	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Vertical

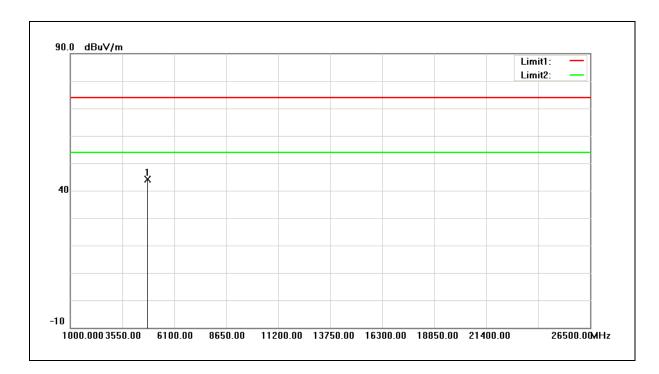

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4804.000	51.23	-7.16	44.07	74.00	-29.93	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.





Test item: Power: AC 120V/60Hz

Frequency: 2441MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Horizontal



No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4882.000	50.23	-6.92	43.31	74.00	-30.69	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2441MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Vertical

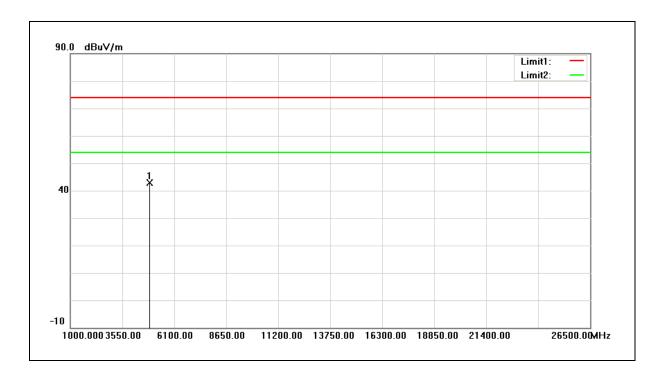

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4882.000	49.76	-6.92	42.84	74.00	-31.16	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Horizontal

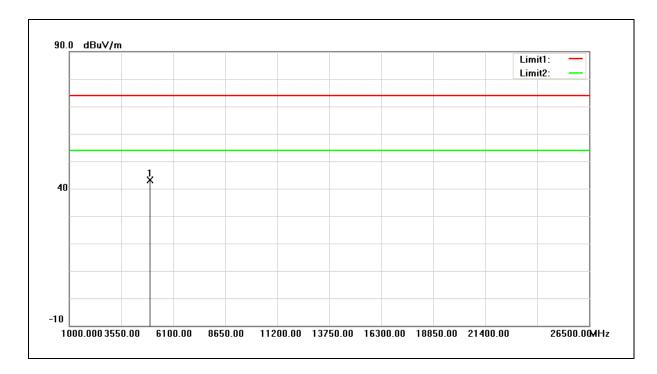

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	49.80	-6.69	43.11	74.00	-30.89	peak

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Vertical

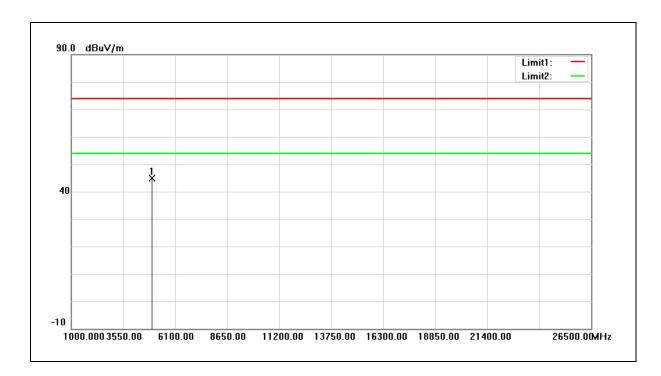

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	4960.000	51.58	-6.69	44.89	74.00	-29.11	peak


- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.





Band Edge

Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	2402MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	03/16/2017
Ant.Polar.:	Horizontal		

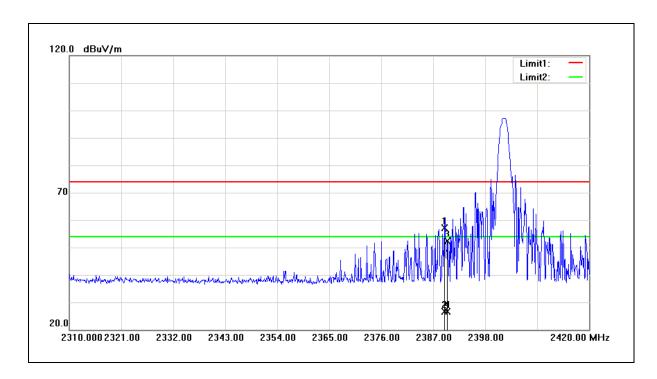

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.420	57.40	-0.26	57.14	74.00	-16.86	peak
2	2389.420	26.87	-0.26	26.61	54.00	-27.39	AVG
3	2390.000	52.75	-0.26	52.49	74.00	-21.51	peak
4	2390.000	26.92	-0.26	26.66	54.00	-27.34	AVG

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Vertical

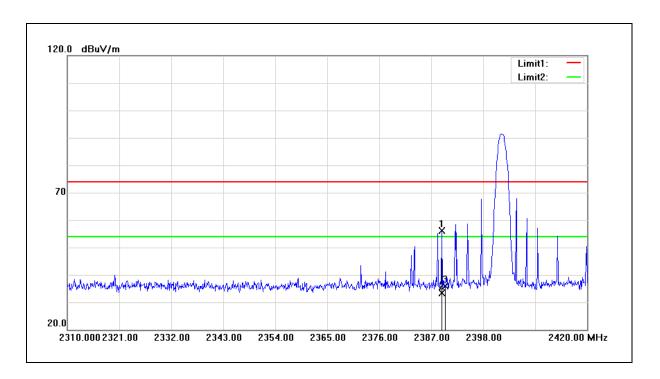

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.310	56.33	-0.26	56.07	74.00	-17.93	peak
2	2389.310	33.58	-0.26	33.32	54.00	-20.68	AVG
3	2390.000	36.12	-0.26	35.86	74.00	-38.14	peak

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Horizontal

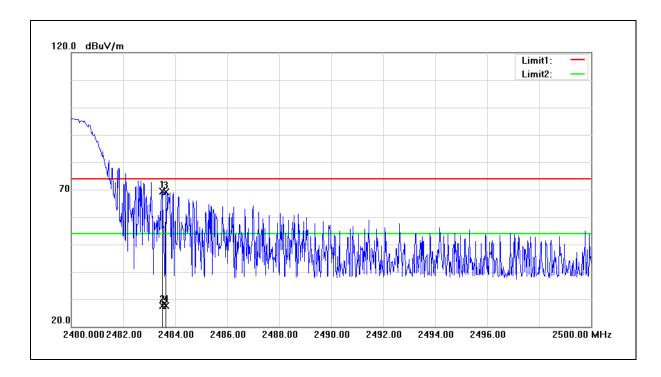

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	69.37	0.11	69.48	74.00	-4.52	peak
2	2483.500	27.60	0.11	27.71	54.00	-26.29	AVG
3	2483.640	69.09	0.11	69.20	74.00	-4.80	peak
4	2483.640	27.63	0.11	27.74	54.00	-26.26	AVG

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Mode: Mode 2 Date: 03/16/2017

Ant.Polar.: Vertical

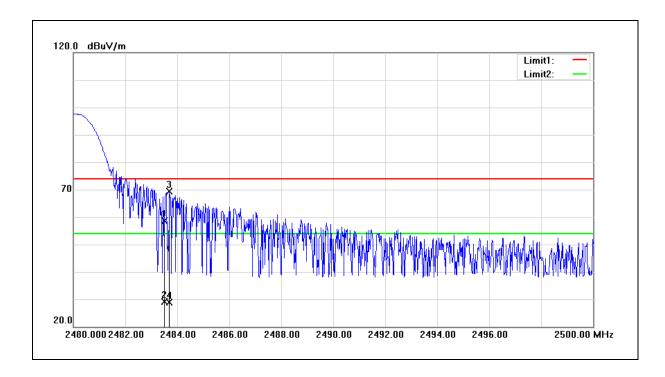


No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	58.44	0.11	58.55	74.00	-15.45	peak
2	2483.500	28.95	0.11	29.06	54.00	-24.94	AVG
3	2483.700	69.27	0.11	69.38	74.00	-4.62	peak
4	2483.700	28.79	0.11	28.90	54.00	-25.10	AVG

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band Edge	Power:	AC 120V/60Hz
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°ℂ)/60%RH
Frequency:	Hopping	Date:	03/16/2017
Ant.Polar.:	Horizontal	Test By:	Eric Ou Yang

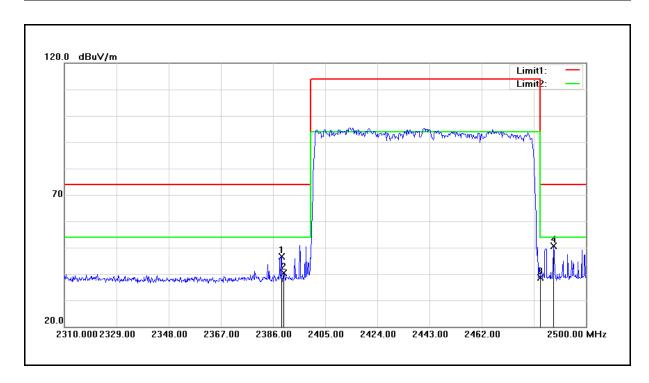

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
			Factor				
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2389.040	46.90	-0.26	46.64	74.00	-27.36	peak
2	2390.000	40.61	-0.26	40.35	74.00	-33.65	peak
3	2483.500	38.44	0.11	38.55	74.00	-35.45	peak
4	2488.220	50.41	0.13	50.54	74.00	-23.46	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).





Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band Edge	Power:	AC 120V/60Hz
Test Mode:	Mode 2	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Frequency:	Hopping	Date:	03/16/2017
Ant.Polar.:	Vertical	Test By:	Eric Ou Yang

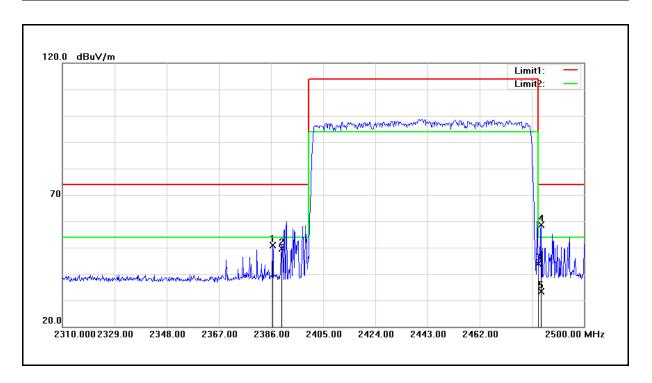

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
			Factor				
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.570	51.24	-0.28	50.96	74.00	-23.04	peak
2	2390.000	49.96	-0.26	49.70	74.00	-24.30	peak
3	2483.500	43.69	0.11	43.80	74.00	-30.20	peak
4	2484.420	58.54	0.12	58.66	74.00	-15.34	peak
5	2484.420	33.22	0.12	33.34	54.00	-20.66	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Horizontal

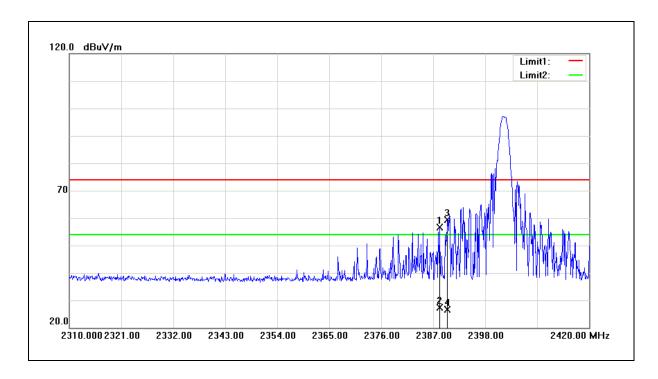

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2388.320	56.93	-0.26	56.67	74.00	-17.33	peak
2	2388.320	27.62	-0.26	27.36	54.00	-26.64	AVG
3	2390.000	59.59	-0.26	59.33	74.00	-14.67	peak
4	2390.000	26.86	-0.26	26.60	54.00	-27.40	AVG

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Power: AC 120V/60Hz

Frequency: 2402MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Vertical

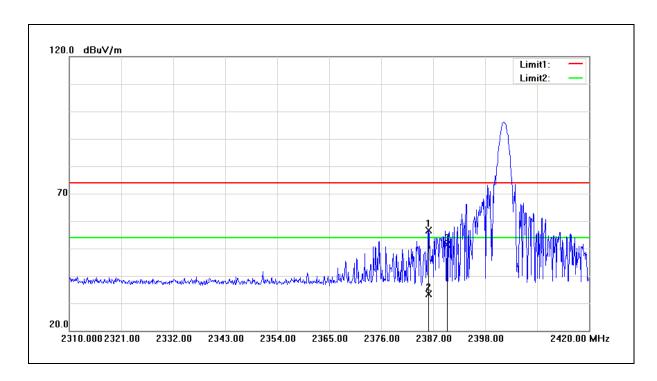

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2386.010	56.81	-0.28	56.53	74.00	-17.47	peak
2	2386.010	33.54	-0.28	33.26	54.00	-20.74	AVG
3	2390.000	51.67	-0.26	51.41	74.00	-22.59	peak

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH

Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Horizontal

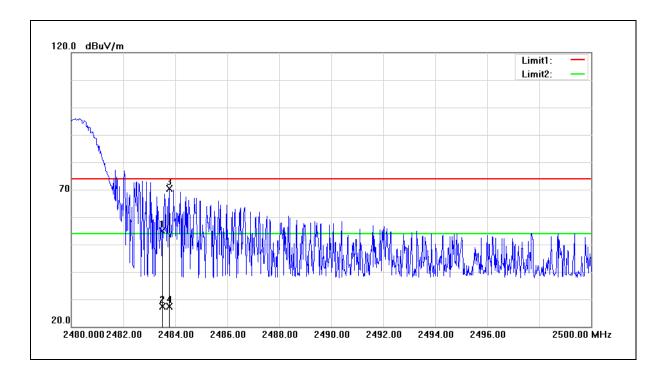

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	54.71	0.11	54.82	74.00	-19.18	peak
2	2483.500	27.18	0.11	27.29	54.00	-26.71	AVG
3	2483.780	70.33	0.11	70.44	74.00	-3.56	peak
4	2483.780	27.28	0.11	27.39	54.00	-26.61	AVG

- $2. Correction \ factor \ (dB/m) = Antenna \ Factor \ (dB/m) + Cable \ loss \ (dB) Pre-Amplifier \ gain \ (dB).$
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Test item: Band edge Power: AC 120V/60Hz

Frequency: 2480MHz Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60%RH


Mode: Mode 4 Date: 03/16/2017

Ant.Polar.: Vertical

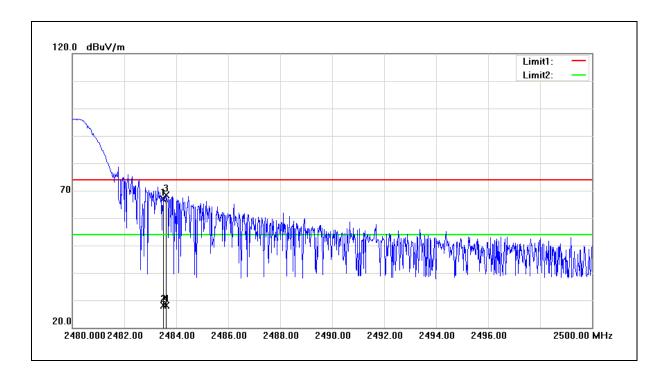


No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.500	66.66	0.11	66.77	74.00	-7.23	peak
2	2483.500	28.00	0.11	28.11	54.00	-25.89	AVG
3	2483.600	68.23	0.11	68.34	74.00	-5.66	peak
4	2483.600	27.98	0.11	28.09	54.00	-25.91	AVG

- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When the peak results are less than average limit, so not need to evaluate the average.






Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band Edge	Power:	AC 120V/60Hz
Test Mode:	Mode 4	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Frequency:	Hopping	Date:	03/16/2017
Ant.Polar.:	Horizontal	Test By:	Eric Ou Yang

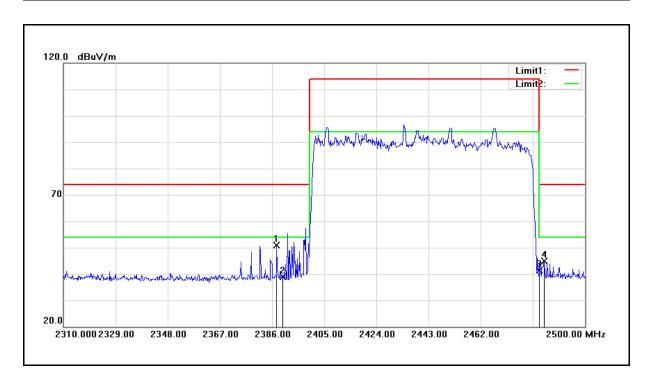

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
			Factor				
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2387.710	51.16	-0.26	50.90	74.00	-23.10	peak
2	2390.000	39.25	-0.26	38.99	74.00	-35.01	peak
3	2483.500	41.27	0.11	41.38	74.00	-32.62	peak
4	2485.180	44.67	0.12	44.79	74.00	-29.21	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).






Standard:	FCC Part 15.247	Test Distance:	3m
Test item:	Band Edge	Power:	AC 120V/60Hz
Test Mode:	Mode 4	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Frequency:	Hopping	Date:	03/16/2017
Ant.Polar.:	Vertical	Test By:	Eric Ou Yang

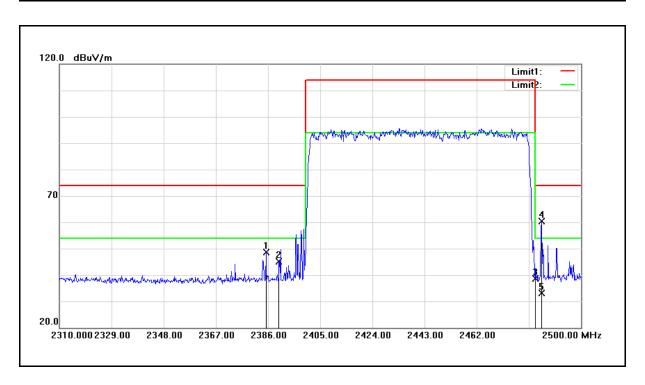

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
			Factor				
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2385.240	48.82	-0.28	48.54	74.00	-25.46	peak
2	2390.000	45.33	-0.26	45.07	74.00	-28.93	peak
3	2483.500	38.59	0.11	38.70	74.00	-35.30	peak
4	2485.750	60.29	0.12	60.41	74.00	-13.59	peak
5	2485.750	33.09	0.12	33.21	54.00	-20.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).






7 20dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

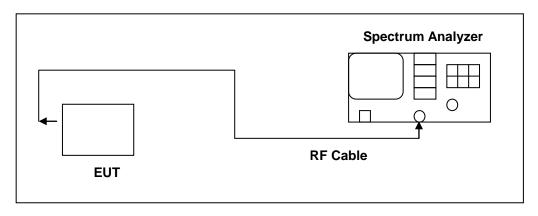

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

NOTE: N.C.R. = No Calibration Request.



■ Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

- 1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
- 2. RBW ≥ 1% of the 20dB span
- 3. VBW ≥ RBW
- 4. Sweep = auto
- 5. Detector function = peak
- 6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.


■ Test Result

Test Mode	Frequency (MHz)	Measurement Results (MHz)
	2402	0.997
Mode 2	2441	1.001
	2480	1.004
	2402	1.342
Mode 4	2441	1.342
	2480	1.341






Test Graphs

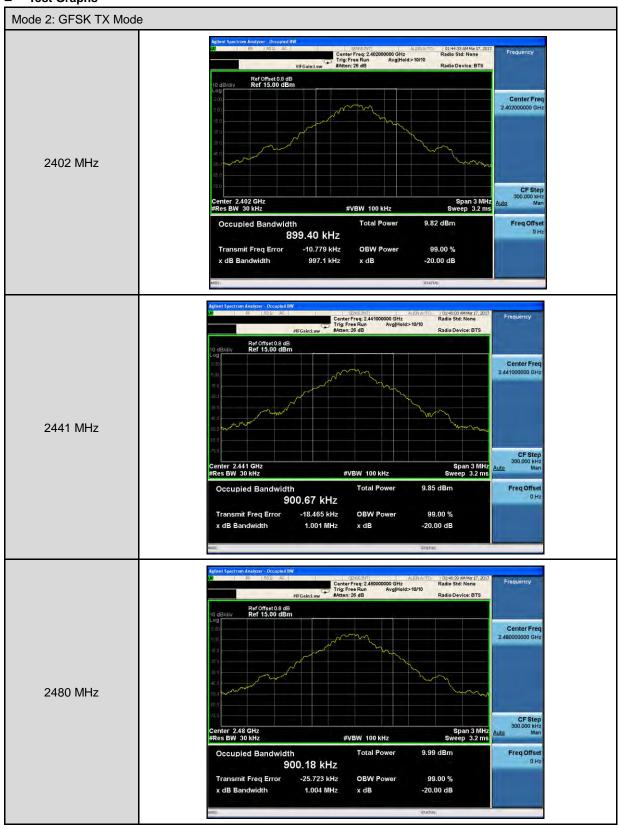





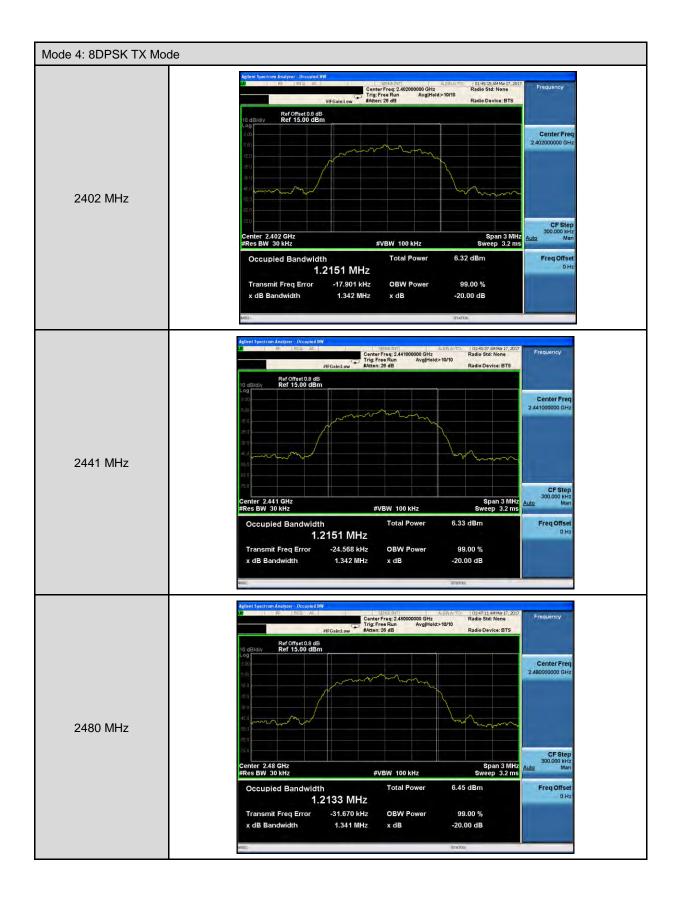






8 Carrier Frequency Separation Measurement

■ Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

■ Test Setup

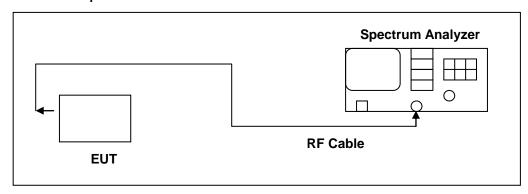

Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

NOTE: N.C.R. = No Calibration Request.



■ Test Procedure


Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

- 1. Span = wide enough to capture the peaks of two adjacent channels
- 2. Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
- 3. Video (or Average) Bandwidth (VBW) ≥ RBW
- 4. Sweep = auto
- 5. Detector function = peak
- 6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.


■ Test Result


Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	> 0.665
	2441	1.000	> 0.667
	2480	1.000	> 0.669
Mode 4	2402	1.000	> 0.895
	2441	1.000	> 0.895
	2480	1.000	> 0.894






Test Graphs

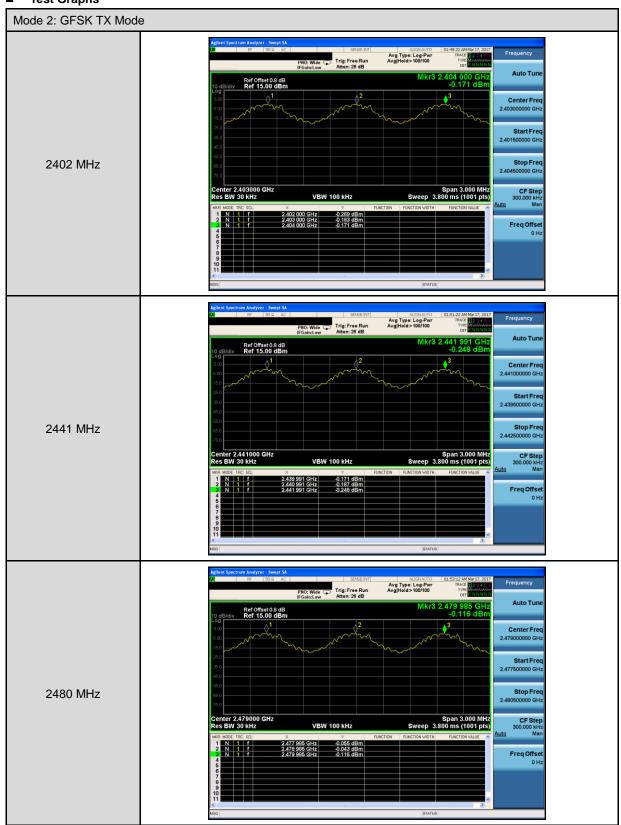





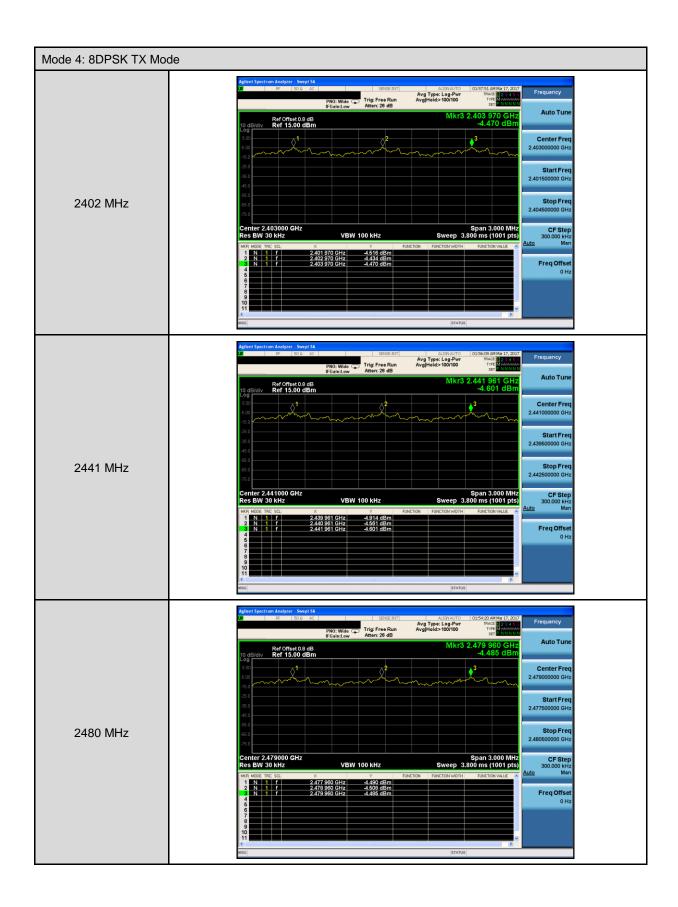




9 Number of Hopping Measurement

■ Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

■ Test Setup

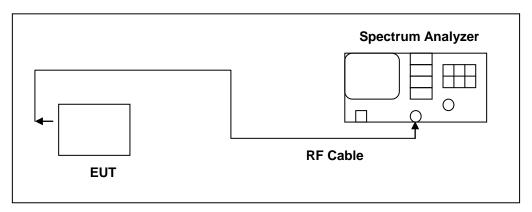

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	


NOTE: N.C.R. = No Calibration Request.

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

- 1. Span = the frequency band of operation
- 2. RBW ≥ 1% of the span
- 3. VBW ≥ RBW
- 4. Sweep = auto
- 5. Detector function = peak
- 6. Trace = max hold


The trace was allowed to stabilize.






■ Test Result

Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	> 15
Mode 3	2402 - 2480	79	> 15
Mode 4	2402 - 2480	79	> 15






Test Graphs

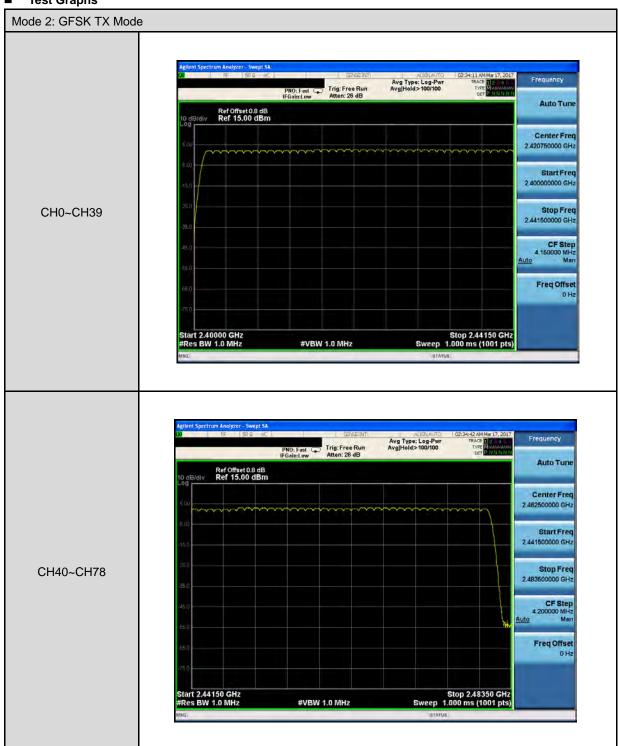





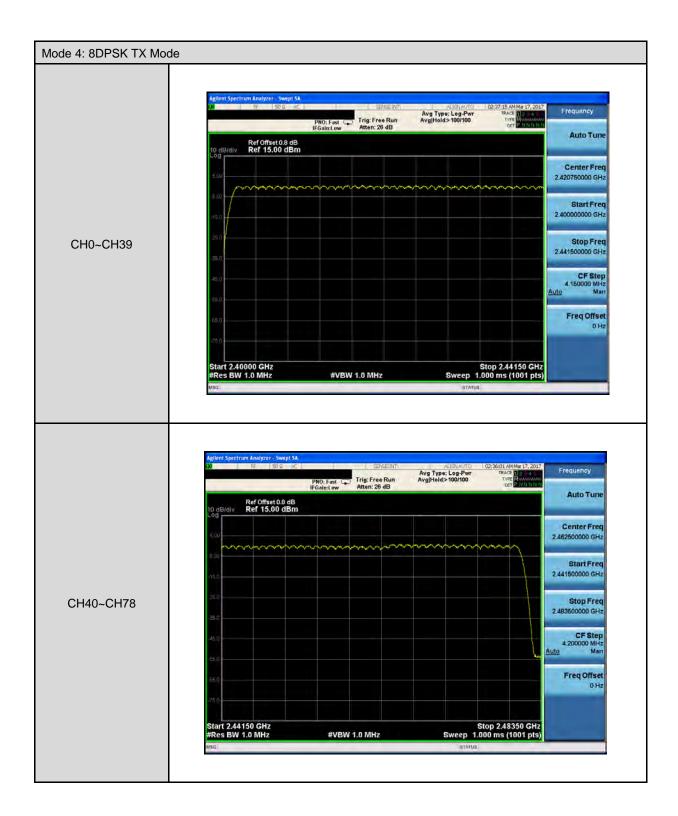




10 Time of Occupancy (Dwell Time) Measurement

■ Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

■ Test Setup

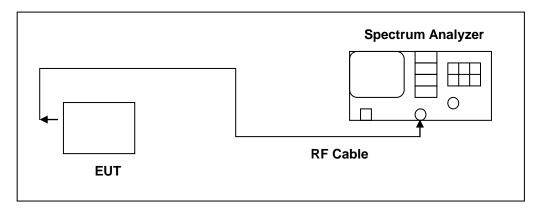

■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	


NOTE: N.C.R. = No Calibration Request.

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

- 1. Span = zero span, centered on a hopping channel
- 2. RBW = 1 MHz
- 3. VBW ≥ RBW
- 4. Sweep = as necessary to capture the entire dwell time per hopping channel
- 5. Detector function = peak
- 6. Trace = max hold


The marker-delta function was used to determine the dwell time.






■ Test Result

■ Test Result				
Mode 2: GFSK TX Mode				
DH1				
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 10.13 = 320.108(times)			
Each Channel Dwell Times (2)	0.440 ms (sec)			
Dwell Times on Cycle (1) * (2)	140.848 ms (sec)			
LIMIT(msec)	< = 400			
	DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 5.1 = 161.16(times)			
Each Channel Dwell Times (2)	1.700 ms (sec)			
Dwell Times on Cycle (1) * (2)	271.823 ms (sec)			
LIMIT(msec)	< = 400			
	DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)			
Each Channel Dwell Times (2)	2.950 ms (sec)			
Dwell Times on Cycle (1) * (2)	315.084 ms (sec)			
LIMIT(msec)	< = 400			






Mode 4: 8DPSK TX Mode				
3DH1				
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 10.13 = 320.108(times)			
Each Channel Dwell Times (2)	0.440 ms (sec)			
Dwell Times on Cycle (1) * (2)	140.848 ms (sec)			
LIMIT(msec)	< = 400			
	3DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 5.1 = 161.16(times)			
Each Channel Dwell Times (2)	1.700 ms (sec)			
Dwell Times on Cycle (1) * (2)	271.823 ms (sec)			
LIMIT(msec)	< = 400			
	3DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)			
The EUT Hopping Number per Sec	1600 times/sec			
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)			
Each Channel Dwell Times on Cycle(1)	31.6 * 3.37 = 106.492(times)			
Each Channel Dwell Times (2)	2.950 ms (sec)			
Dwell Times on Cycle (1) * (2)	315.084 ms (sec)			
LIMIT(msec)	< = 400			






■ Test Graphs

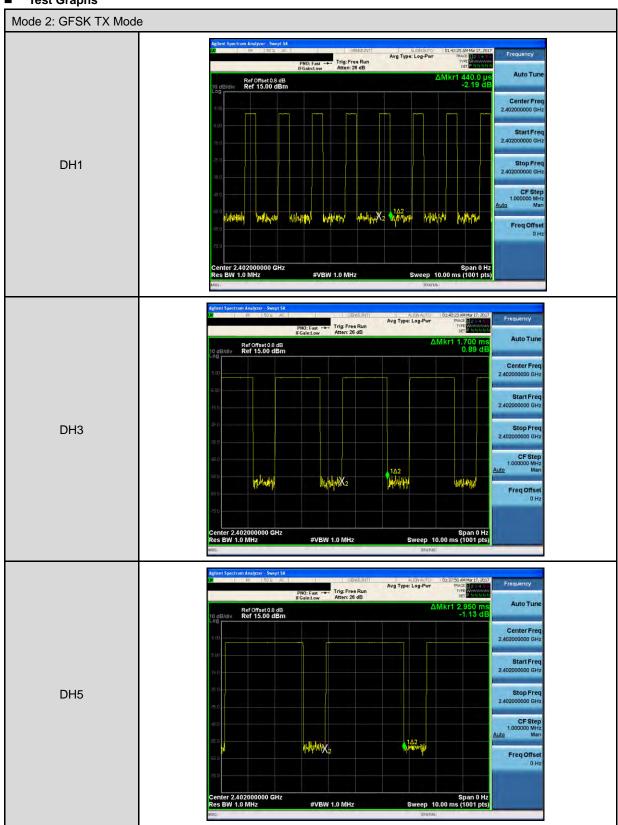



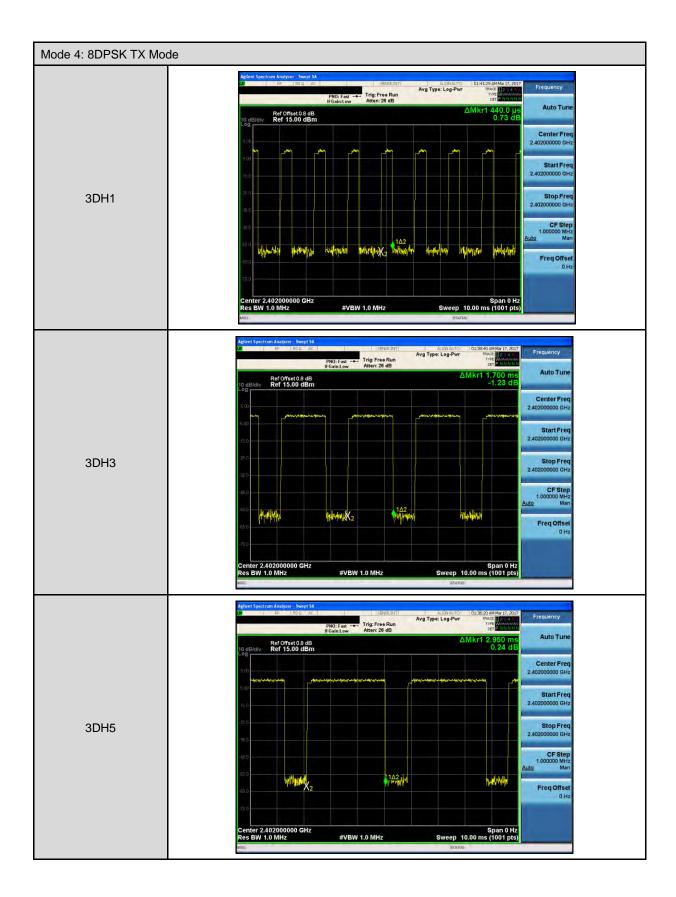




11 Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

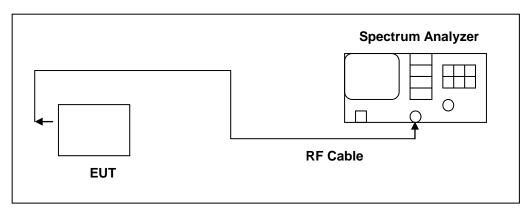


■ Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/19/2016	1 year
Spectrum Analyzer	Agilent	E4408B	MY45107753	08/08/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1500	140303	02/22/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	

NOTE: N.C.R. = No Calibration Request.


■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)






Test Graphs

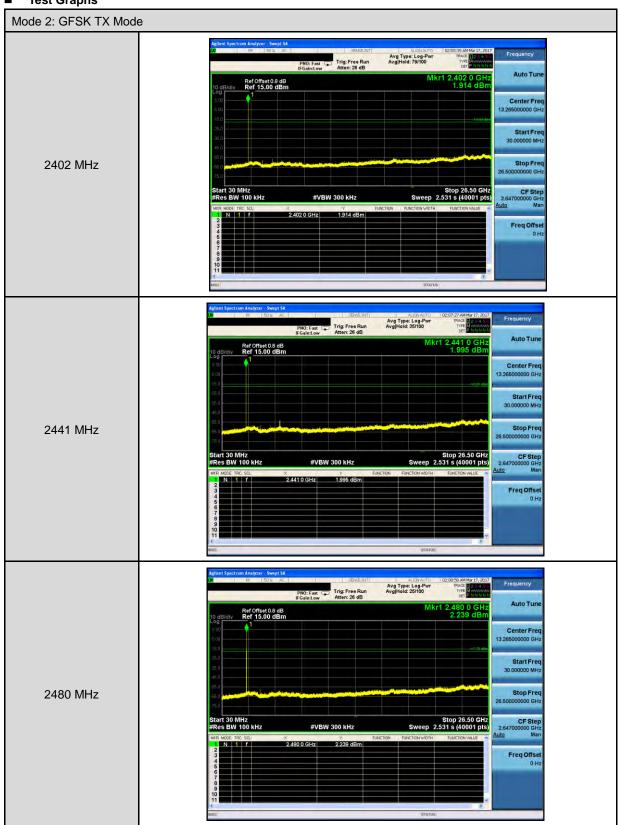




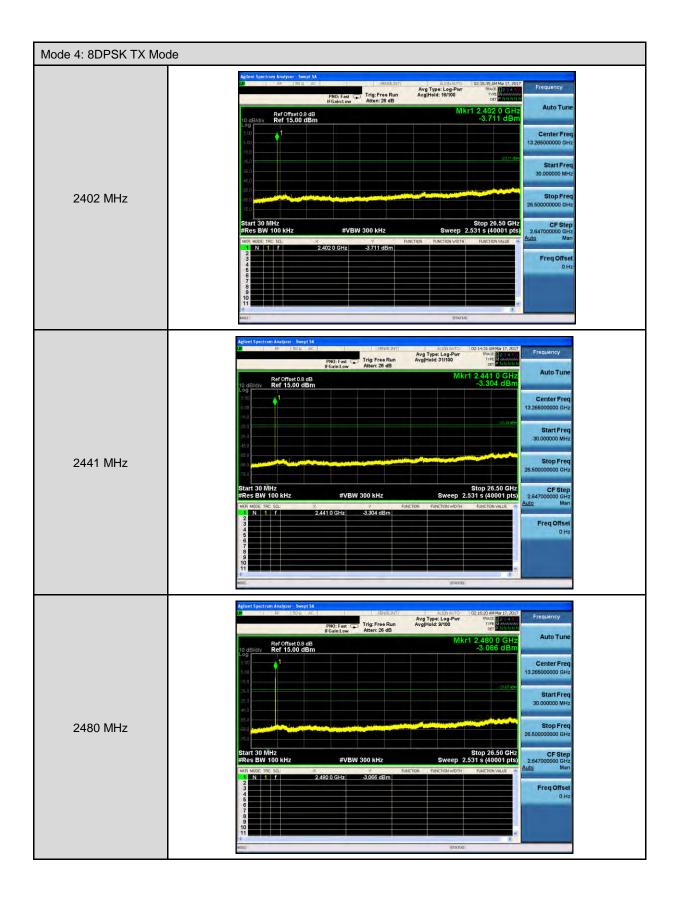






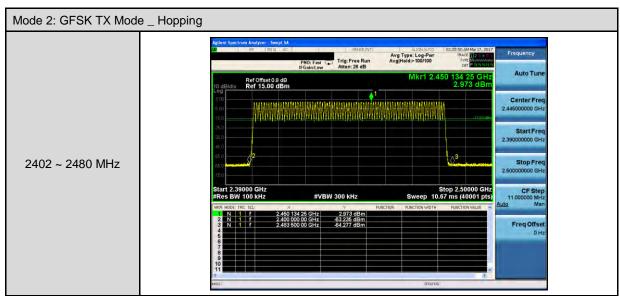





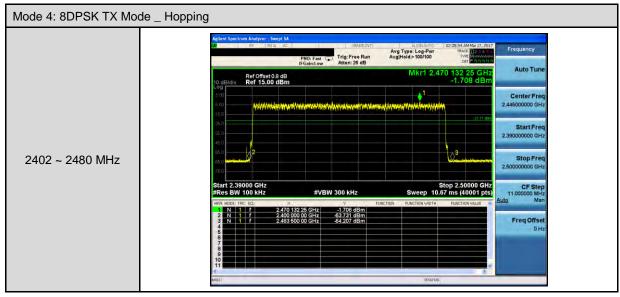



12 Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Antenna Connector Construction

See section 2 – antenna information.