

**FCC 47 CFR PART 15 SUBPART C : 2008 AND ANSI C63.4: 2003****TEST REPORT****For****PC MEDIA CONTROLLER****Model Number: MIX FREE****Brand: DJ-Tech****Issued for****First Audio Manufacturing (H.K.) Ltd.**

Flat 1-4.3/F., Block A, Wing Kut Industrial Building 608 Catle Peak Road,  
Kowloon, Hong Kong

**Issued by****Compliance Certification Services Inc.****Tainan Lab.**

**No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua  
Township, Tainan Hsien 712, Taiwan R.O.C.**

**TEL: 886-6-580-2201**

**FAX: 886-6-580-2202**

**Issued Date: April 07, 2009**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. Ltd. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document



### **REVISION HISTORY**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	April 07, 2009	Initial Issue	ALL	Selena.Chong



## TABLE OF CONTENTS

<b>1. TEST REPORT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
2.1 EUT DESCRIPTION.....	5
<b>3. DESCRIPTION OF TEST MODES.....</b>	<b>6</b>
<b>4. TEST METHODOLOGY.....</b>	<b>7</b>
<b>5. FACILITIES AND ACCREDITATIONS.....</b>	<b>7</b>
5.1 FACILITIES .....	7
5.2 EQUIPMENT .....	7
5.3 LABORATORY ACCREDITATIONS LISTINGS .....	7
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	8
<b>6. CALIBRATION AND UNCERTAINTY .....</b>	<b>9</b>
6.1 MEASURING INSTRUMENT CALIBRATION .....	9
<b>7. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
7.1 SETUP CONFIGURATION OF EUT.....	10
7.2 SUPPORT EQUIPMENT .....	10
7.3 EUT OPERATING CONDITION .....	11
<b>8. APPLICABLE LIMITS AND TEST RESULTS.....</b>	<b>12</b>
8.1 6DB BANDWIDTH .....	12
8.2 MAXIMUM PEAK OUTPUT POWER.....	16
8.3 AVERAGE POWER .....	20
8.4 POWER SPECTRAL DENSITY.....	21
8.5 CONDUCTED SPURIOUS EMISSION.....	25
8.6 RADIATED EMISSIONS .....	29
8.6.1 TRANSMITTER RADIATED SUPURIOUS EMSSIONS .....	29
8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz.....	33
8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz.....	34
8.6.4 RESTRICTED BAND EDGES .....	46
8.7 POWERLINE CONDUCTED EMISSIONS.....	50
<b>9. ANTENNA REQUIREMENT.....</b>	<b>52</b>
9.1 STANDARD APPLICABLE.....	52
9.2 ANTENNA CONNECTED CONSTRUCTION .....	52
<b>APPENDIX SETUP PHOTOS.....</b>	<b>53</b>



## 1. TEST REPORT CERTIFICATION

<b>Applicant</b>	First Audio Manufacturing (H.K.) Ltd.
<b>Address</b>	Flat 1-4.3/F., Block A, Wing Kut Industrial Building 608 Catle Peak Road, Kowloon, Hong Kong
<b>Manufacture</b>	HANCHIH ELECTRONICS (SHENZHEN) CO., LTD.
<b>Address</b>	NO. 111 FengHuang Industrial RD, FengHuang Industrial District, Fuyong Town, Bao'an county, Guangdong, China
<b>Equipment Under Test</b>	PC MEDIA CONTROLLER
<b>Model Number</b>	MIX FREE
<b>Brand Name</b>	DJ-Tech
<b>Date of Test</b>	February 12, 2009 ~ March 26, 2009

### APPLICABLE STANDARD

STANDARD	TEST RESULT
FCC Part 15 Subpart C : 2008 AND ANSI C63.4 : 2003	No non-compliance noted

Approved by:

**Jeter Wu**  
Section Manager  
Compliance Certification Services Inc.

Reviewed by:

**Eric Yang**  
Engineer  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

### 2.1 EUT DESCRIPTION

<b>Product Name</b>	PC MEDIA CONTROLLER
<b>Model Number</b>	MIX FREE (Controller)
<b>Brand Name</b>	DJ-Tech
<b>Serial Number</b>	None
<b>Received Date</b>	February 11, 2009
<b>Power Supply</b>	DC 3V
<b>Frequency Range</b>	2404MHz~2460MHz
<b>Transmit Power (EIRP)</b>	-2.15 dBm
<b>Modulation Technique</b>	GFSK
<b>Number of Channels</b>	8 Channels
<b>Channels Spacing</b>	8MHz
<b>Antenna Specification</b>	Gain : 0dBi
<b>Antenna Designation</b>	PCB Antenna
<b>Temperature Range</b>	0 ~ +55°C

Remark : 1. The sample selected for test was engineering sample that approximated to production

product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for **FCC ID: W9Q-MIXFREE-C** filing to  
comply with Section 15.207,15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### 3. DESCRIPTION OF TEST MODES

The EUT is an transceiver.

The antenna peak gain : 0dBi (highest gain) were chosen for full testing.

#### IEEE 802.15.4

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2404
Middle	2428
High	2460



## 4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 15.207, 15.209 and 15.247.

## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No. 8, Jiu Cheng Ling, Jiaokeng Village, Sinhua Township, Tainan Hsien 712, Taiwan R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200627-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: TW-1037).



## 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	455173 TW-1037
Japan	VCCI	3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements	C-2882 R-2635
Taiwan	TAF	CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, EN 60601-1-2, CISPR 22, CNS 13438, EN 55022, EN 55024, AS/NZS CISPR 22 CISPR 14, EN 55014-1, EN 55014-2, CNS 13783-1, CISPR 22, CNS 13439, EN 55013, FCC Method-47 CFR Part 15 Subpart B, IC ICES-003, VCCI V-3 & V-4 FCC Method-47 CFR Part 15 Subpart C and ANSI C63.4, LP 0002 EN / IEC 61000-4-2 / -3 / -4 / -5 / -6 / -8 / -11 EN 61000-3-2, EN 61000-3-3 EN 61000-6-3, EN 61000-6-1, AS/NZS 4251.1, EN 61000-6-4, EN 61000-6-2, AS/NZS 4251.2, EN 61204-3, EN 50130-4, EN 62040-2, EN 50371, EN 50385, AS/NZS 4268, ETSI EN 300 386 ETSI EN 300 328, ETSI EN 301 489-1/-3/-9/-17 ETSI EN 301 893, ETSI EN 300 220-2/-1 ETSI EN 300 440-2/-1 ETSI EN 301 357-2/-1 RSS-310, RSS-210 Issue 7, RSS-Gen Issue 2	Testing Laboratory 1109
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS13439	SL2-IN-E-0039 SL2-R1/R2-0039 SL2-A1-E-0039
Canada	Industry Canada	RSS210, Issue 7	IC 2324H-I

\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



## 6. CALIBRATION AND UNCERTAINTY


### 6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.



## 7. SETUP OF EQUIPMENT UNDER TEST

### 7.1 SETUP CONFIGURATION OF EUT



### 7.2 SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Certify No.	Signal cable
1	N/A	-----	-----	-----	-----

No.	Signal cable description	
A	N/A	-----

**Remark:**

1. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7.3 EUT OPERATING CONDITION

### RF Setup

1. Set up all equipments as diagram.
2. Check EUT function..
3. Press button and turn on power to switch channel low 、 mid 、 high.
4. Start to test.

### Normal Link Setup

1. Install the DJ software normally.
2. Power-On the Mix-Free controller.
3. Connect the Mix-Free Dangle to computer normally.
4. Open the DeckaDance software.
5. Start up the software to perform settings with the MIDI interface.

The software may not recognize the USB MIDI interface if it is connected to the computer after the software has started.

6. If used others software (not DeckaDance ) to do follow steps.
7. Many DJ software products have a MIDI LEARN function. The USB audio interface can control all software that has this function. This function is used to USB audio interface as controls for parameters of the software.

The MIDI LEARN setting for each software is different; please refer to each software's manual for further instructions.

8. The MIDI data created with functions can be manually set with the software, if the software does not support the MIDI LEARN function. Please refer to the software's manual for further instructions.

## 8. APPLICABLE LIMITS AND TEST RESULTS

### 8.1 6DB BANDWIDTH


#### LIMIT

§ 15.207(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

#### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEM	829054/017	APR. 14, 2009

#### TEST SETUP



#### TEST PROCEDURE


The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 100 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

**TEST RESULTS**

No non-compliance noted

**TX mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (kHz)	Minimum Limit (kHz)	Test Result
Low	2404	641.28	>500	PASS
Middle	2428	641.35	>500	PASS
High	2460	621.24	>500	PASS

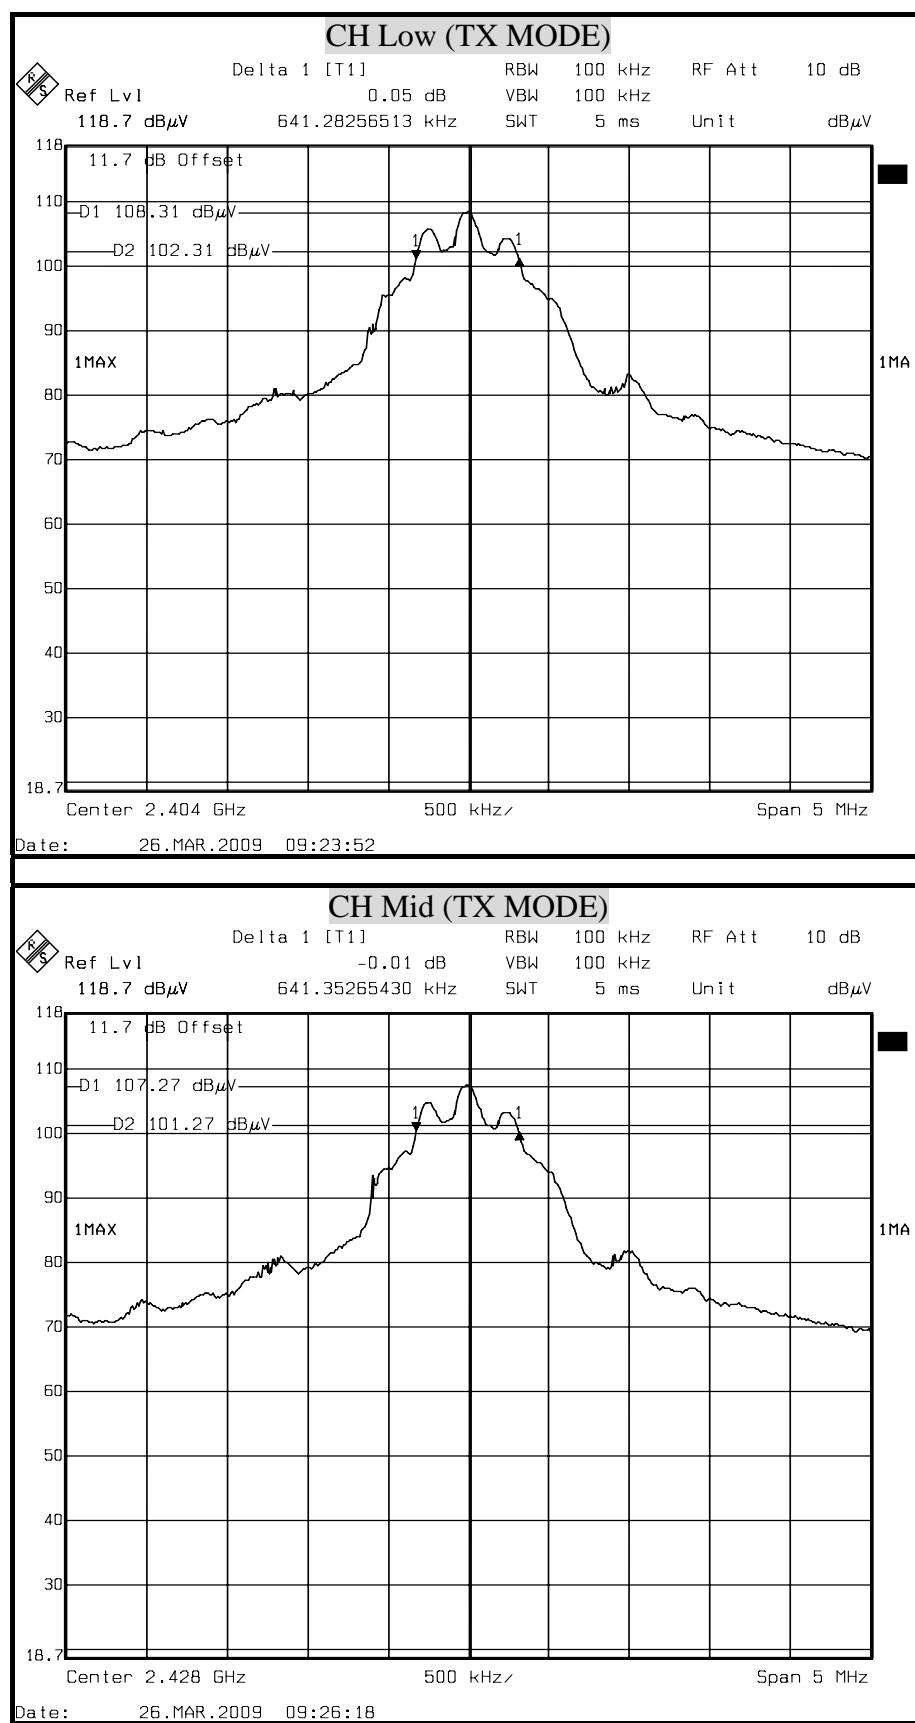**6dB BANDWIDTH (TX MODE)**




Compliance Certification Services Inc.

Report No. : 90211401-RP1

FCC ID: W9Q-MIXFREE-C

Date of Issue: April 07, 2009

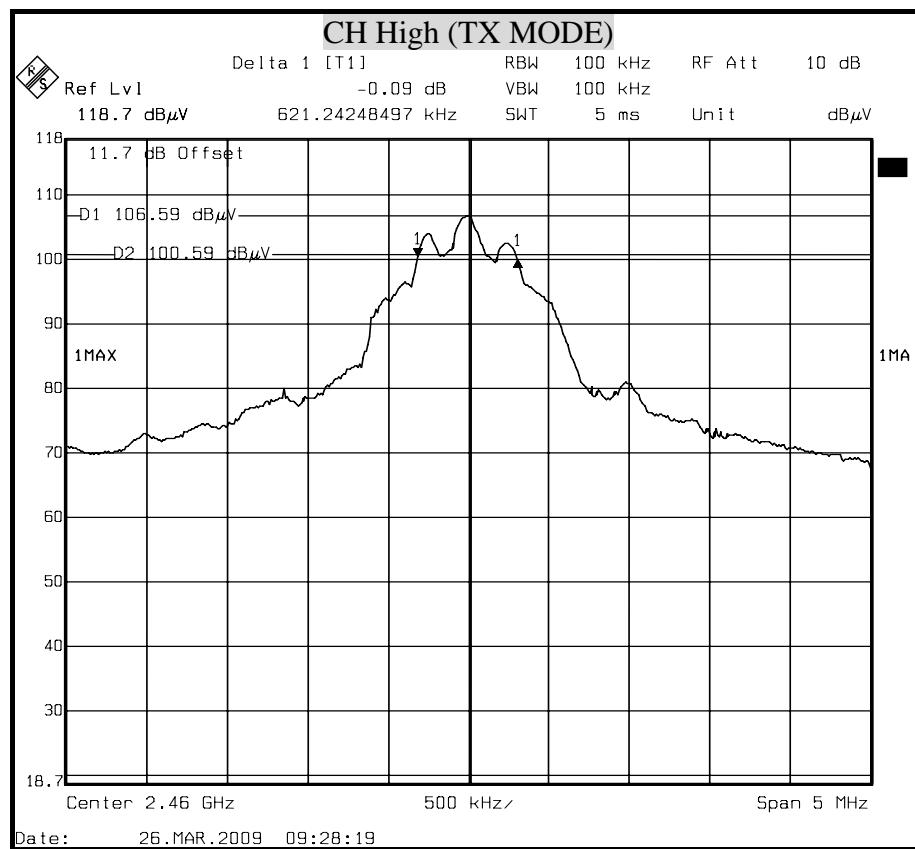



## 8.2 MAXIMUM PEAK OUTPUT POWER

### LIMIT

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section , if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section , as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEM	829054/017	APR. 14, 2009

### TEST SETUP



### TEST PROCEDURE

No non-compliance noted



## **TEST RESULTS**

Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth

Total peak power calculation formula:



### **TX mode**


<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>Peak Power (dBm)</b>	<b>Peak Power (W)</b>	<b>Peak Power Limit (W)</b>	<b>Test Result</b>
Low	2404	1.83	0.00152	1	PASS
Middle	2428	1.27	0.00134	1	PASS
High	2460	0.51	0.00112	1	PASS

Note : 1. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



## **MAXIMUM PEAK OUTPUT POWER (TX MODE)**

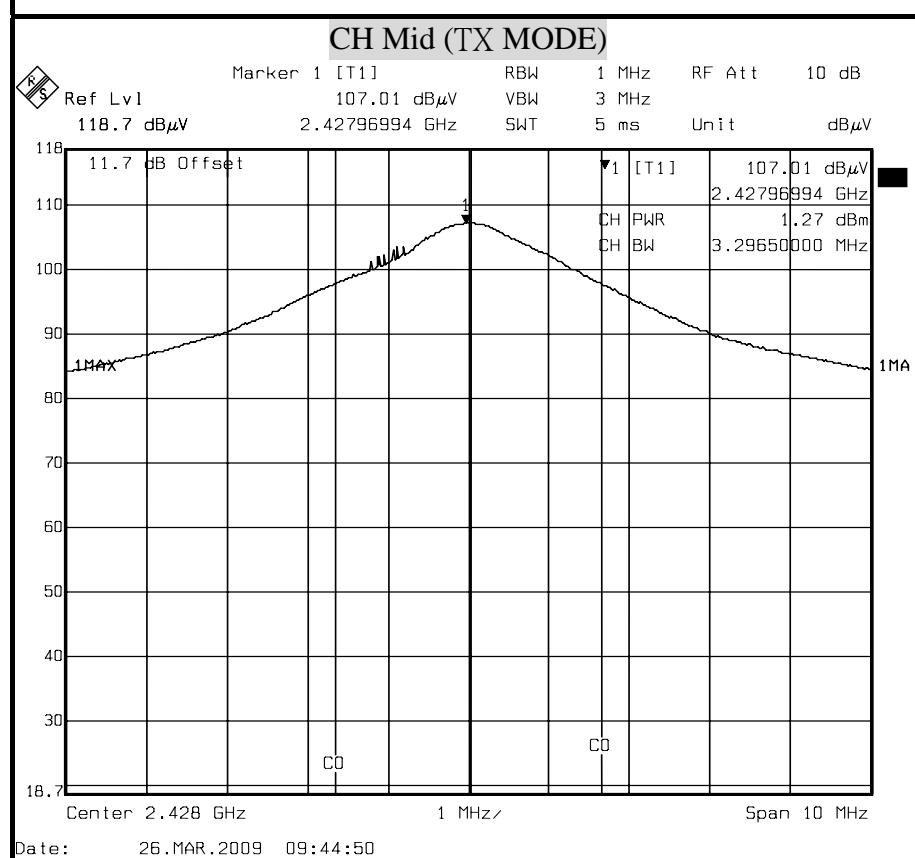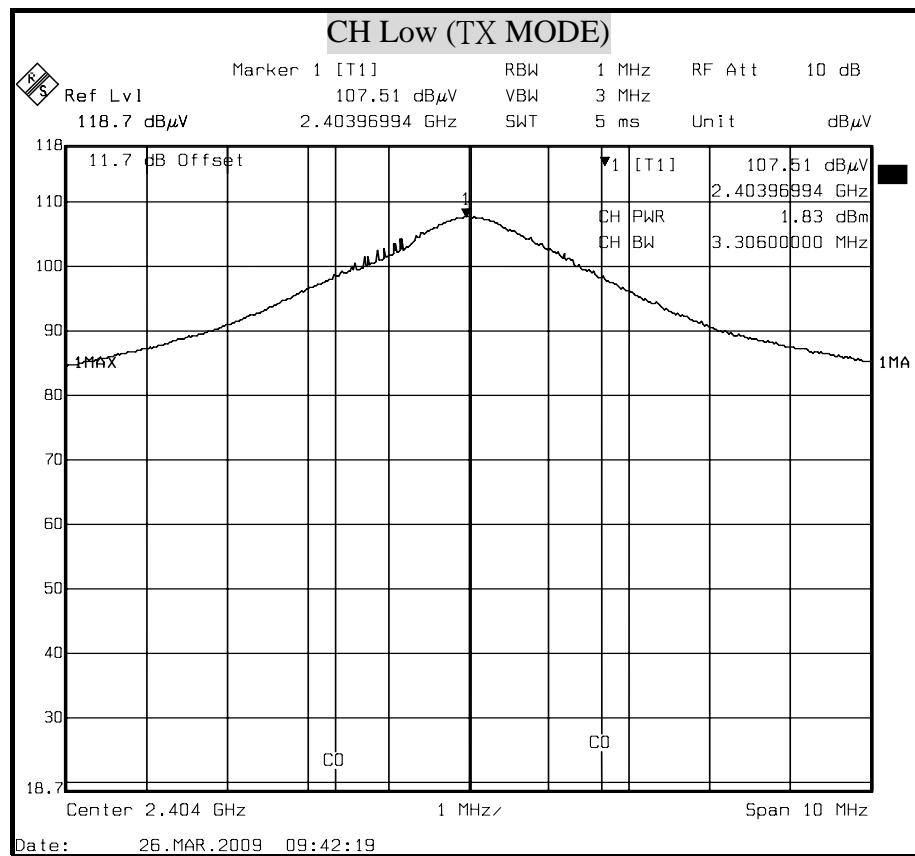

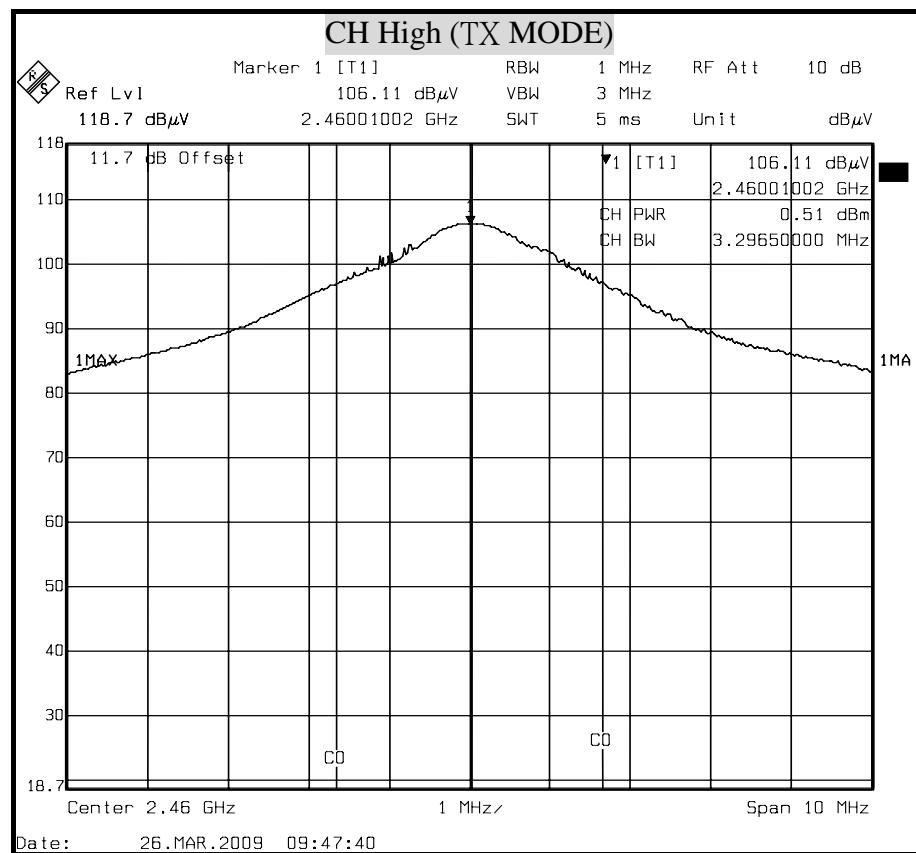



### 8.3 AVERAGE POWER


#### LIMIT

None; for reporting purposes only.

#### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power Meter	Anritsu	ML2487A	6K00003888	APR. 15, 2009

#### TEST SETUP

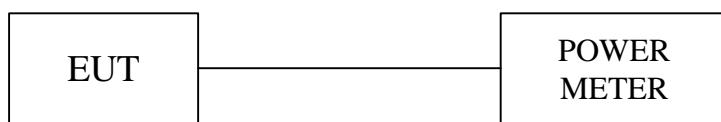

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### TEST RESULTS

No non-compliance noted

##### **TX mode**

Channel	Channel Frequency (MHz)	Average Power (dBm)
Low	2404	-3.54
Middle	2428	-4.27
High	2460	-4.54

## 8.4 POWER SPECTRAL DENSITY


### LIMIT

§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST EQUIPMENTS

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	R&S	FSEM	829054/017	APR. 14, 2009

### TEST SETUP

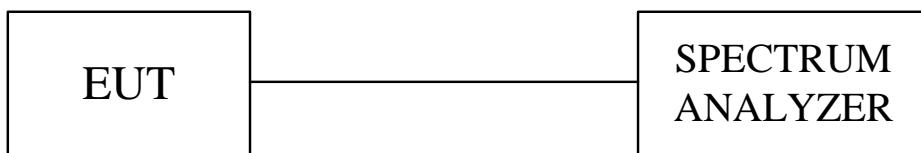

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using  $RBW=3\text{KHz}$  and  $VBW \geq RBW$ , set sweep time=span / 3KHz(s).

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3KHz for a full response of the mixer in the spectrum analyzer.


### TEST RESULTS

No non-compliance noted

**TX mode**

<b>Channel</b>	<b>Channel Frequency (MHz)</b>	<b>PPSD (dBm)</b>	<b>Limit (dBm)</b>	<b>Test Result</b>
Low	2404	-2.65	8	PASS
Middle	2424	-3.14		PASS
High	2460	-4.09		PASS

Note : 1. The cable assembly insertion loss of 11.7dB (including 10 dB pad and 1.7 dB cable) was  
Entered as an offset in the spectrum analyzer to allow for direct reading of power.

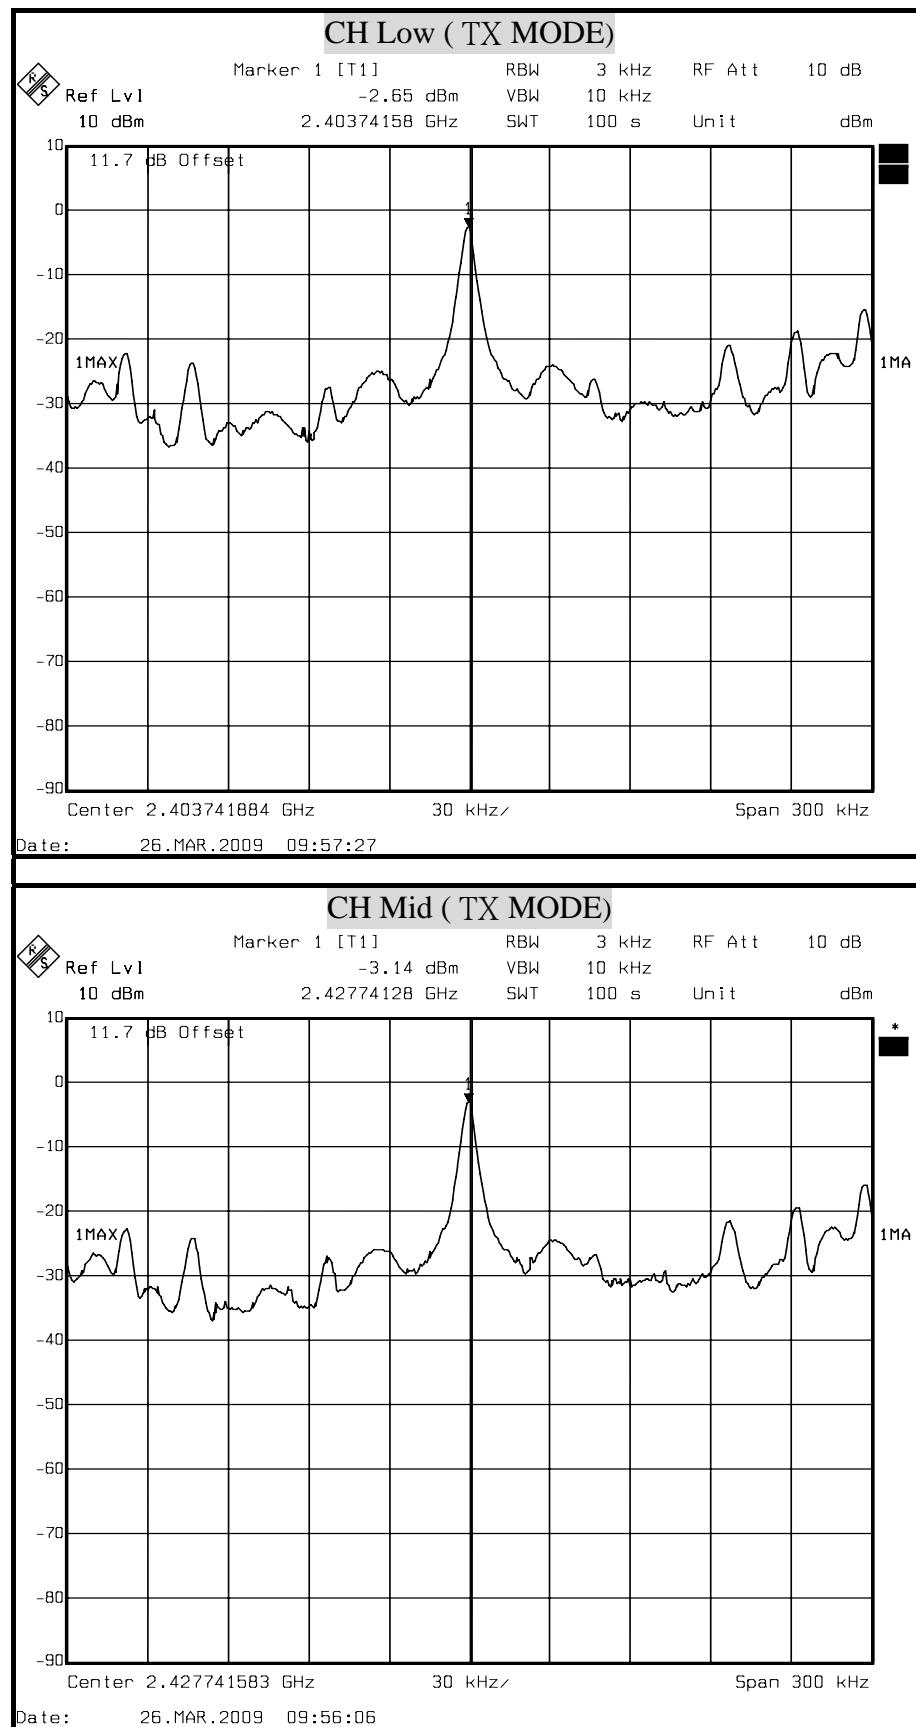POWER SPECTRAL DENSITY (TX MODE)




Compliance Certification Services Inc.

Report No. : 90211401-RP1

FCC ID: W9Q-MIXFREE-C

Date of Issue: April 07, 2009

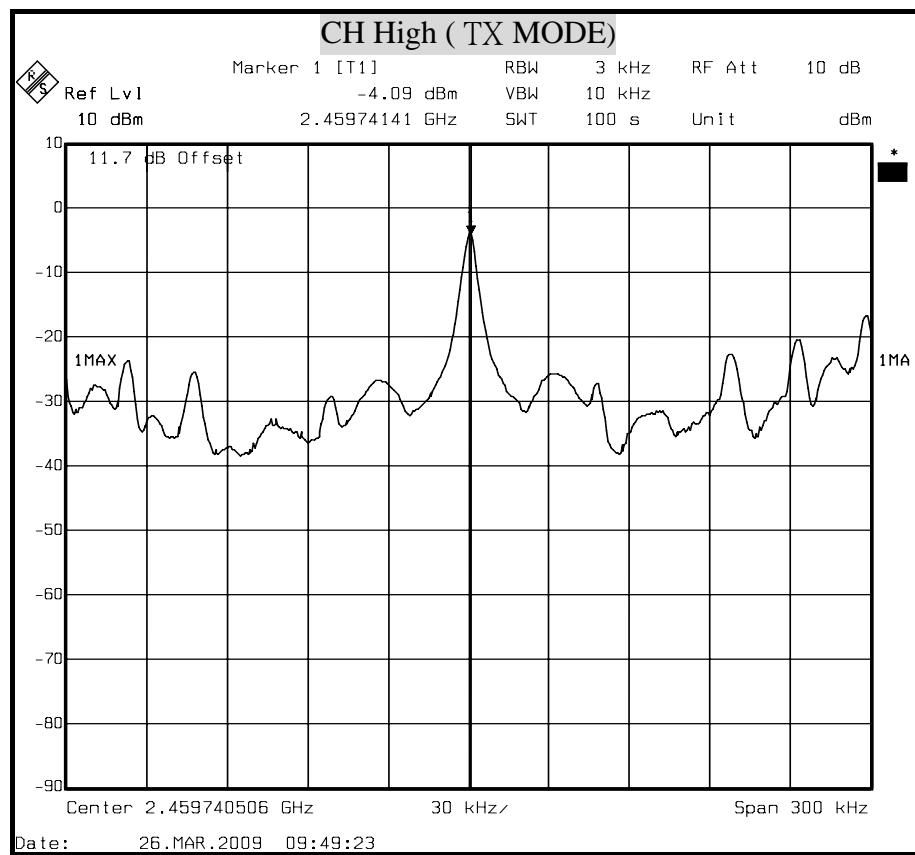

## 8.5 CONDUCTED SPURIOUS EMISSION

### LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


### TEST SETUP

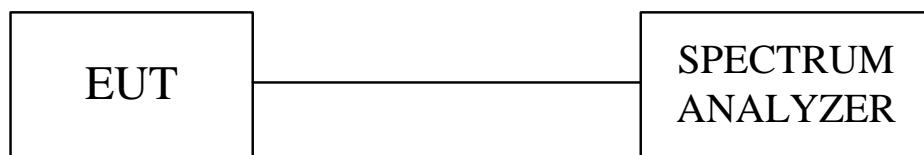



### TEST RESULTS

No non-compliance noted

## OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT (TX MODE)

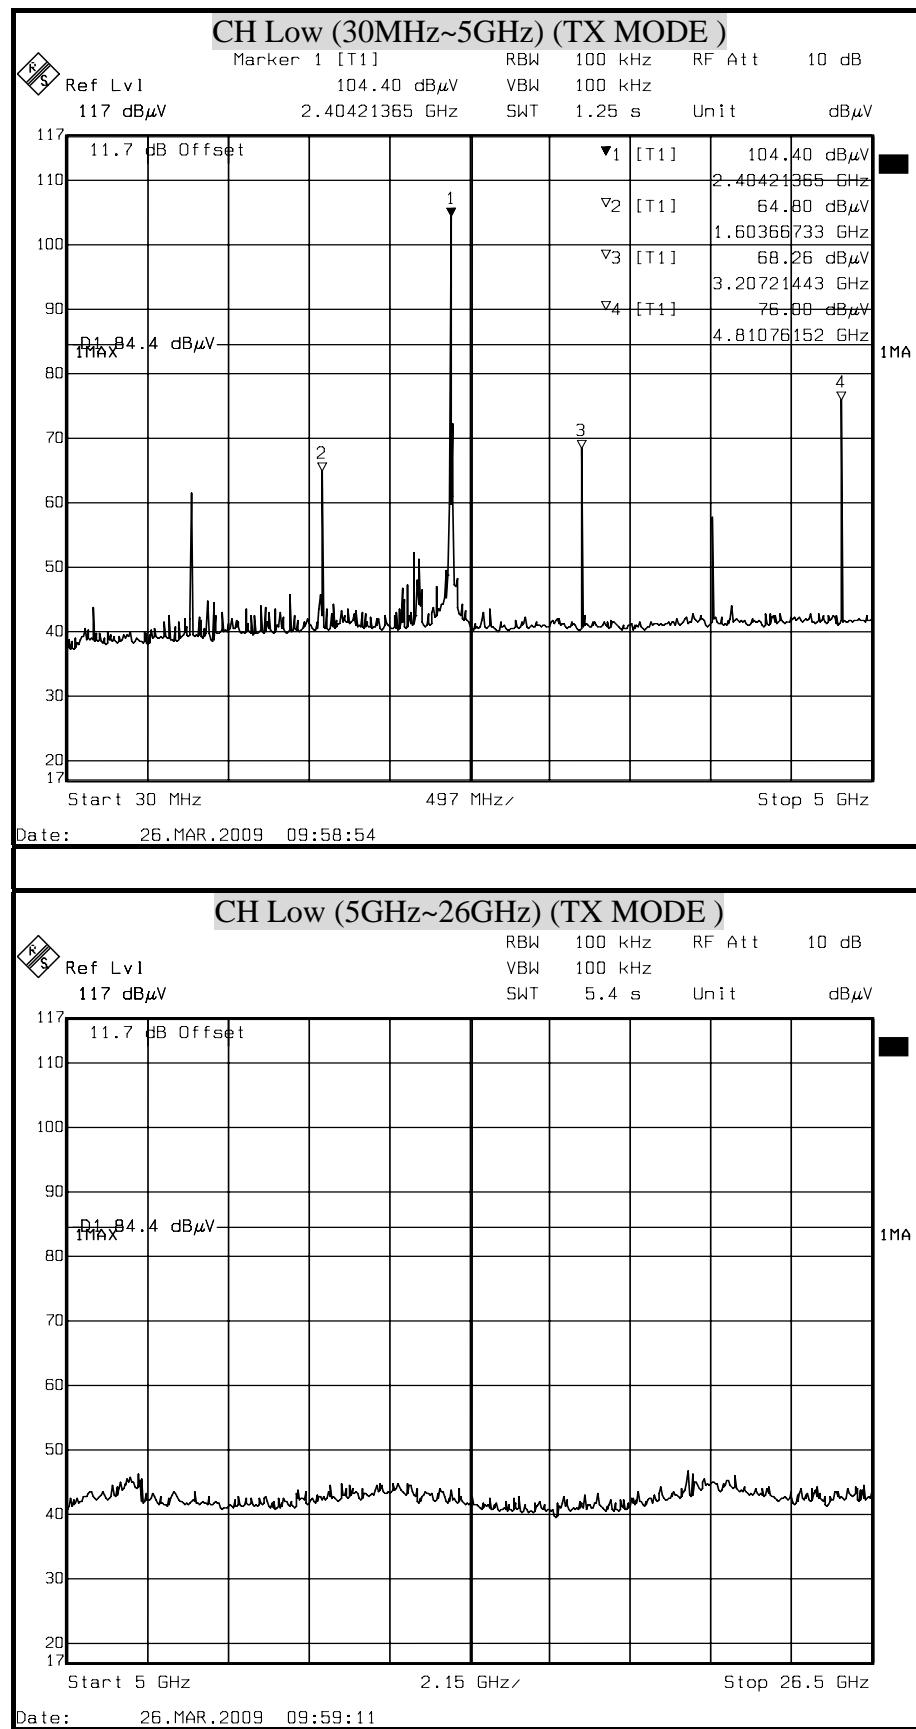

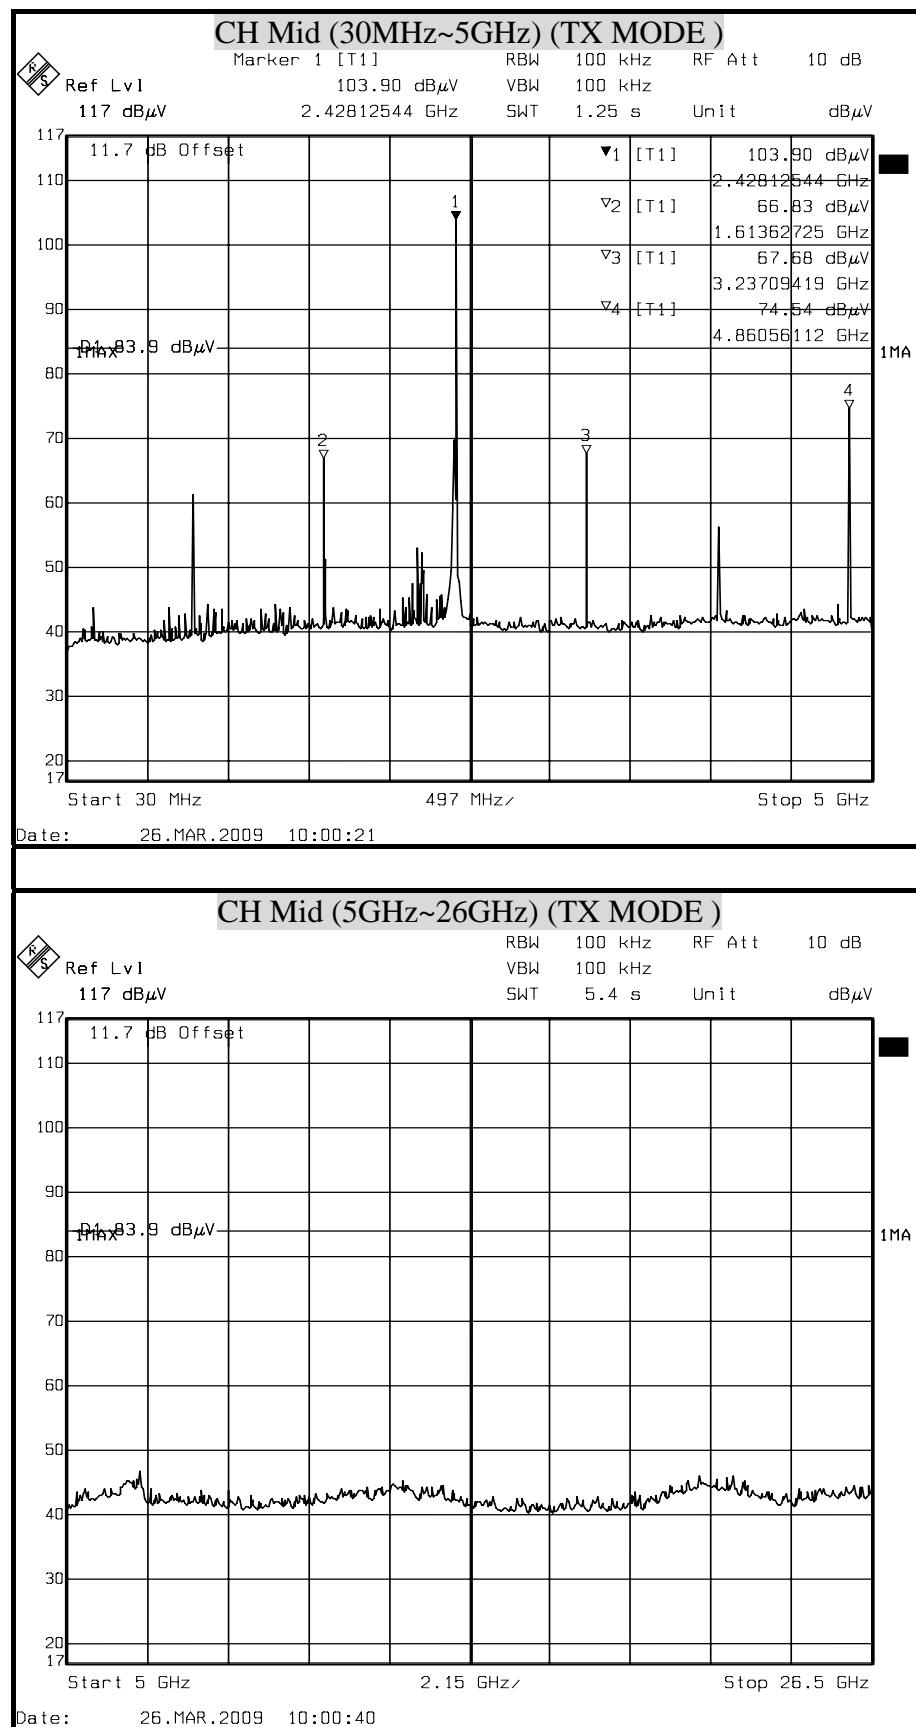

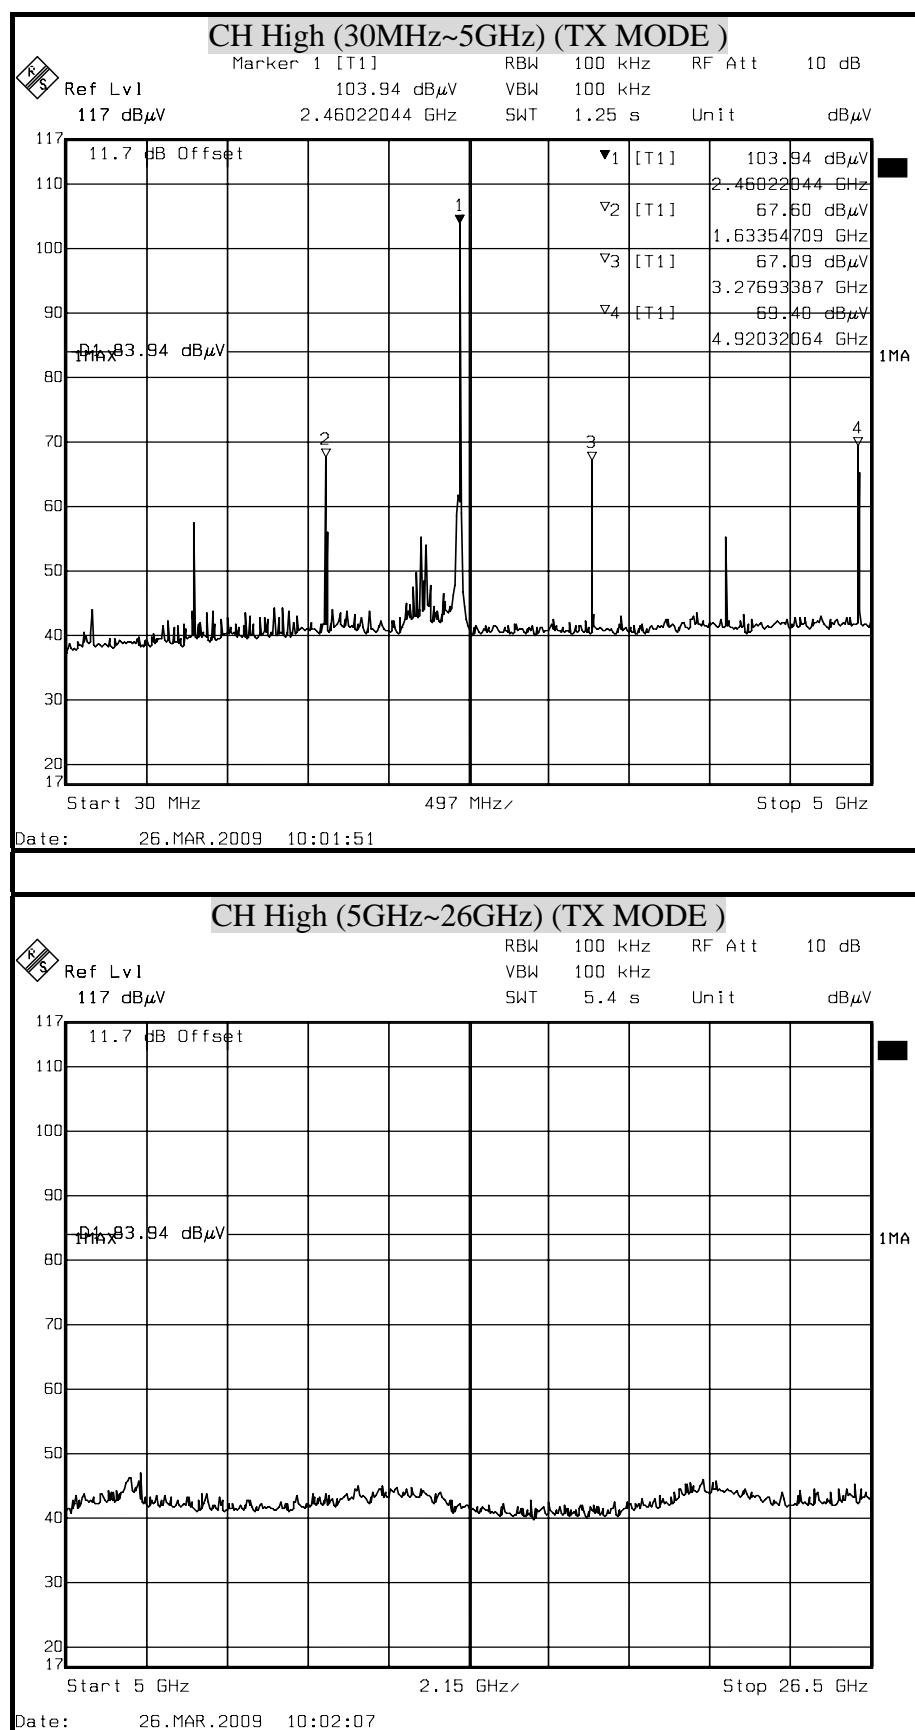

## 8.6 RADIATED EMISSIONS

### 8.6.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS

#### LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


## **TEST EQUIPMENTS**

The following test equipments are utilized in making the measurements contained in this report.


Open Area Test Site # 6					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due	
Spectrum Analyzer	R&S	FSEM	829054/017	APR. 14, 2009	
Temp./Humidity Chamber	K.SON	THS-M1	242	JUN. 16, 2009	
EMI Test Receiver	R&S	ESVS10	833206/012	APR. 15, 2009	
Pre-Amplifier	HP	8447F	2944A03817	NOV. 01, 2009	
Amplifier	MITEQ	AFSYY-00108650-42-10P-44	1205908	OCT. 23, 2009	
Bilog Antenna	Sunol	JB1	A013105-1	SEP. 16, 2009	
Horn Antenna	Com-Power	AH-118	71032	DEC. 22, 2009	
Turn Table	YO Chen	001	N/A	N.C.R	
Antenna Tower	AR	TP100A	N/A	N.C.R	
Controller	CT	SC101	N/A	N.C.R	
RF Switch	E-INSTRUMENT TELH LTD	ERS-180-1-2	EC1204141	N.C.R	
Power Meter	Anritsu	ML2487A	6K00003888	APR. 15, 2009	
Power Sensor	Anritsu	MA2491A	33265	APR. 15, 2009	
AC Power Source	T-POWER	TFC-3020	N930010	N.C.R	
DC Power Source	LOKO	DSP-5050	L1507009282	N.C.R	

### **TEST SETUP**

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

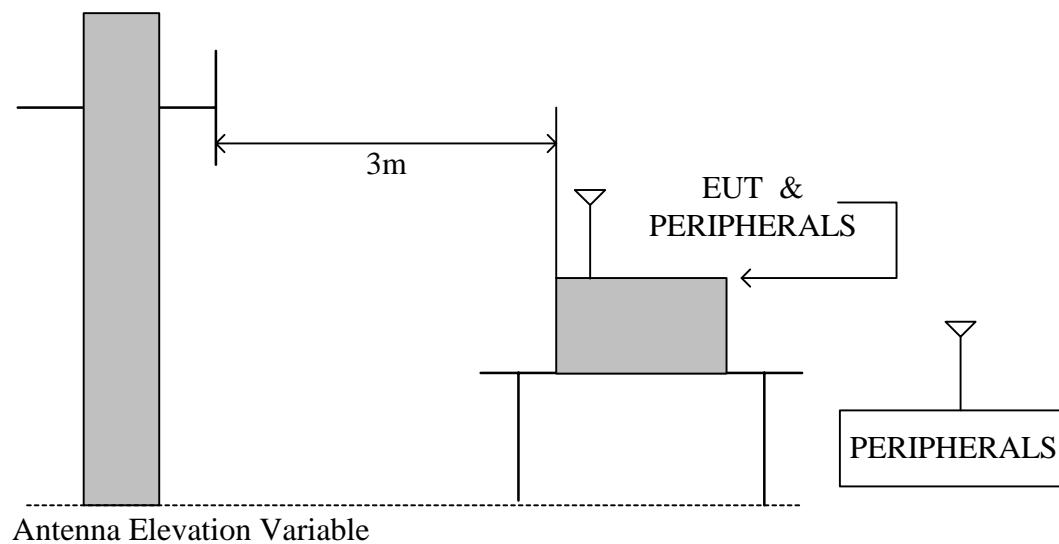

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

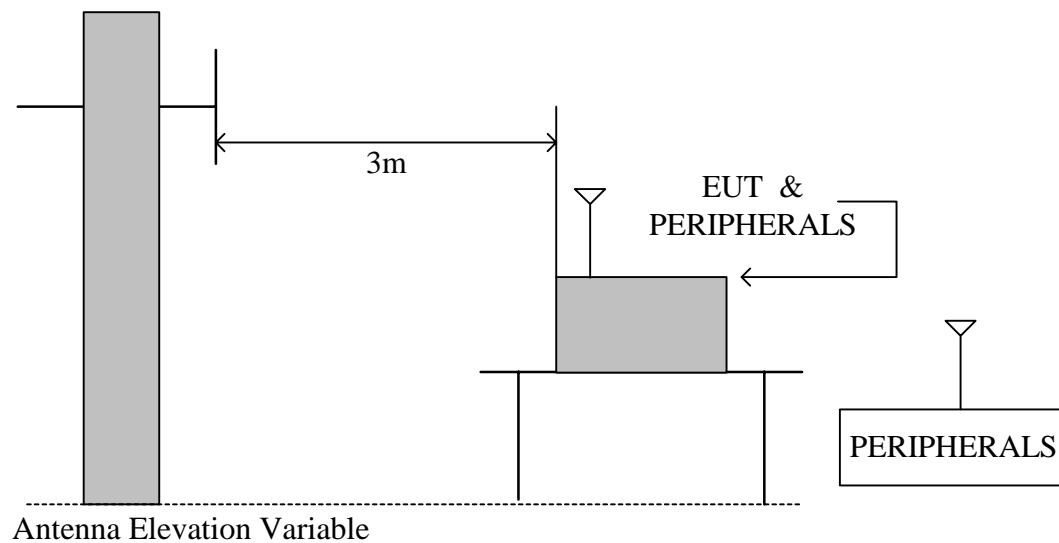



## **TEST PROCEDURE**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

## **TEST RESULTS**

No non-compliance noted



### 8.6.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/2/12
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	Normal operating (worst case)	<b>TEMP&amp; Humidity</b>	25.3 °C, 45%

Horizontal

No.	Freq-Uency	Meter Reading at 3 m Level	Antenna Factor	Cable Loss	Emission at 3 m Level	Limits	Margin	Detector Mode
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	PK/QP
1	82.45	18.45	7.73	1.80	27.98	40.00	-12.02	QP
2	208.21	24.80	12.69	2.72	40.22	43.50	-3.28	QP
3	397.69	11.20	16.08	3.82	31.10	46.00	-14.90	QP
4	501.24	10.54	18.03	4.50	33.06	46.00	-12.94	QP
5	642.00	12.74	19.89	5.28	37.91	46.00	-8.09	QP
6	705.24	7.80	20.68	5.50	33.98	46.00	-12.02	QP
7	882.31	6.40	22.59	6.28	35.27	46.00	-10.73	QP

Vertical

No.	Freq-Uency	Meter Reading at 3 m Level	Antenna Factor	Cable Loss	Emission at 3 m Level	Limits	Margin	Detector Mode
	(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	PK/QP
1	112.34	15.40	12.40	2.02	29.82	43.50	-13.68	QP
2	208.21	14.70	12.69	2.72	30.12	43.50	-13.38	QP
3	312.14	16.40	14.21	3.30	33.92	46.00	-12.08	QP
4	501.23	16.34	18.03	4.50	38.86	46.00	-7.14	QP
5	642.00	10.10	19.89	5.28	35.27	46.00	-10.73	QP
6	728.34	9.50	20.95	5.61	36.05	46.00	-9.95	QP
7	882.29	7.20	22.59	6.28	36.07	46.00	-9.93	QP

*Remark: Emission level (dB $\mu$ V/m) = Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB $\mu$ V).*



### 8.6.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	PC MEDIA CONTROLLER	Test Date	2009/3/23
Model	MIX FREE (Controller)	Test By	Eric Yang
Test Mode	TX (CH Low)	TEMP& Humidity	25.3°C, 51%

Horizontal

TX mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq. (MHz)	Reading (dB $\mu$ V)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Mark	
3205.38	65.16	30.02	2.75	40.21	1.27	59.00	74.00	-15.00	P	
3205.38	48.95	30.02	2.75	40.21	1.27	42.79	54.00	-11.21	A	
*	4808.12	69.32	32.78	3.70	41.31	0.69	65.17	74.00	-8.83	P
*	4808.12	49.15	32.78	3.70	41.31	0.69	45.00	54.00	-9.00	A
	7212.09	61.25	38.80	4.92	41.46	1.38	64.89	74.00	-9.11	P
	7212.09	43.22	38.80	4.92	41.46	1.38	46.86	54.00	-7.14	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

#### Remark:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	TX (CH Low)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Vertical

TX mode / CH Low				Measurement Distance at 3m				Vertical	polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
3205.34	63.65	30.02	2.75	40.21	1.27	57.49	74.00	-16.51	P	
3205.34	48.23	30.02	2.75	40.21	1.27	42.07	54.00	-11.93	A	
*	4808.07	65.85	32.78	3.70	41.31	0.69	61.70	74.00	-12.30	P
*	4808.07	44.72	32.78	3.70	41.31	0.69	40.57	54.00	-13.43	A
	7211.98	60.25	38.80	4.92	41.46	1.38	63.89	74.00	-10.11	P
	7211.98	42.35	38.80	4.92	41.46	1.38	45.99	54.00	-8.01	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	TX (CH Middle)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Horizontal

TX mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
3237.42	64.29	30.04	2.80	40.23	1.23	58.13	74.00	-15.87	P	
3237.42	48.32	30.04	2.80	40.23	1.23	42.16	54.00	-11.84	A	
*	4856.13	65.01	32.88	3.72	41.38	0.71	60.94	74.00	-13.06	P
*	4856.13	45.05	32.88	3.72	41.38	0.71	40.98	54.00	-13.02	A
*	7283.96	60.25	38.90	4.95	41.36	1.54	64.28	74.00	-9.72	P
*	7283.96	42.85	38.90	4.95	41.36	1.54	46.88	54.00	-7.12	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	PC MEDIA CONTROLLER	Test Date	2009/3/23
Model	MIX FREE (Controller)	Test By	Eric Yang
Test Mode	TX (CH Middle)	TEMP& Humidity	25.3°C, 51%

Vertical

TX mode / CH Low				Measurement Distance at 3m				Vertical	polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
3237.45	61.16	30.04	2.80	40.23	1.23	55.00	74.00	-19.00	P	
3237.45	46.83	30.04	2.80	40.23	1.23	40.67	54.00	-13.33	A	
*	4856.27	63.67	32.88	3.72	41.38	0.71	59.60	74.00	-14.40	P
*	4856.27	44.34	32.88	3.72	41.38	0.71	40.27	54.00	-13.73	A
*	7284.36	60.22	38.90	4.95	41.36	1.54	64.25	74.00	-9.75	P
*	7284.36	41.28	38.90	4.95	41.36	1.54	45.31	54.00	-8.69	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	TX (CH High)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Horizontal

TX mode / CH Low				Measurement Distance at 3m				Horizontal polarity		
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
3280.17	59.73	30.07	2.87	40.27	1.18	53.57	74.00	-20.43	P	
3280.17	45.55	30.07	2.87	40.27	1.18	39.39	54.00	-14.61	A	
*	4920.13	65.11	33.02	3.76	41.48	0.73	61.14	74.00	-12.86	P
*	4920.13	45.09	33.02	3.76	41.48	0.73	41.12	54.00	-12.88	A
*	7379.46	61.22	39.03	4.99	41.22	1.74	65.76	74.00	-8.24	P
*	7379.46	42.55	39.03	4.99	41.22	1.74	47.09	54.00	-6.91	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



Product Name	PC MEDIA CONTROLLER	Test Date	2009/3/23
Model	MIX FREE (Controller)	Test By	Eric Yang
Test Mode	TX (CH High)	TEMP& Humidity	25.3°C, 51%

Vertical

TX mode / CH Low				Measurement Distance at 3m				Vertical	polarity	
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark	
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)	
3280.12	58.53	30.07	2.87	40.27	1.18	52.37	74.00	-21.63	P	
3280.12	45.31	30.07	2.87	40.27	1.18	39.15	54.00	-14.85	A	
*	4920.34	64.40	33.02	3.76	41.48	0.73	60.43	74.00	-13.57	P
*	4920.34	45.18	33.02	3.76	41.48	0.73	41.21	54.00	-12.79	A
*	7381.46	60.22	39.03	4.99	41.22	1.75	64.77	74.00	-9.23	P
*	7381.46	42.18	39.03	4.99	41.22	1.75	46.73	54.00	-7.27	A
	N/A	-----	-----	-----	-----	-----	-----	-----	P	
	N/A	-----	-----	-----	-----	-----	-----	-----	A	

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH Low)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Horizontal

RX mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
Freq. (MHz)	Reading (dB $\mu$ V)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Mark (P/Q/A)
1602.71	49.85	27.28	2.11	39.86	0.84	40.22	74	-33.78	P
1602.71	37.56	27.28	2.11	39.86	0.84	27.93	54	-26.07	A
3205.42	48.89	30.02	2.75	40.21	1.27	42.73	74	-31.27	P
3205.42	38.24	30.02	2.75	40.21	1.27	32.08	54	-21.92	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH Low)	<b>TEMP&amp; Humidity</b>	25.3 °C, 51%

Vertical

RX mode / CH Low				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
1602.64	48.75	27.28	2.11	39.86	0.84	39.12	74	-34.88	P
1602.64	37.11	27.28	2.11	39.86	0.84	27.48	54	-26.52	A
3205.41	49.52	30.02	2.75	40.21	1.27	43.36	74	-30.64	P
3205.41	38.62	30.02	2.75	40.21	1.27	32.46	54	-21.54	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH Middle)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Horizontal

RX mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
Freq. (MHz)	Reading (dB $\mu$ V)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Mark
1618.69	48.35	27.40	2.12	39.87	0.85	38.85	74	-35.15	P
1618.69	38.26	27.40	2.12	39.87	0.85	28.76	54	-25.24	A
3237.42	49.61	30.04	2.80	40.23	1.23	43.45	74	-30.55	P
3237.42	37.46	30.04	2.80	40.23	1.23	31.30	54	-22.70	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH Middle)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

Vertical

RX mode / CH Low				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
1618.71	49.81	27.40	2.12	39.87	0.85	40.31	74	-33.69	P
1618.71	38.26	27.40	2.12	39.87	0.85	28.76	54	-25.24	A
3237.38	48.62	30.04	2.80	40.23	1.23	42.46	74	-31.54	P
3237.38	37.89	30.04	2.80	40.23	1.23	31.73	54	-22.27	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable – Preamp + Filter – Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH High)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

## Horizontal

RX mode / CH Low				Measurement Distance at 3m			Horizontal polarity		
Freq. (MHz)	Reading (dB $\mu$ V)	AF (dB/m)	Cable Loss (dB)	Pre-amp (dB)	Filter (dB)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Mark
1637.35	48.75	27.54	2.13	39.88	0.86	39.40	74	-34.60	P
1637.35	38.51	27.54	2.13	39.88	0.86	29.16	54	-24.84	A
3274.69	49.88	30.06	2.86	40.27	1.18	43.72	74	-30.29	P
3274.69	38.91	30.06	2.86	40.27	1.18	32.75	54	-21.25	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A

**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.



<b>Product Name</b>	PC MEDIA CONTROLLER	<b>Test Date</b>	2009/3/23
<b>Model</b>	MIX FREE (Controller)	<b>Test By</b>	Eric Yang
<b>Test Mode</b>	RX (CH High)	<b>TEMP&amp; Humidity</b>	25.3°C, 51%

Vertical

RX mode / CH Low				Measurement Distance at 3m				Vertical	polarity
Freq.	Reading	AF	Cable Loss	Pre-amp	Filter	Level	Limit	Margin	Mark
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	(P/Q/A)
1637.32	49.25	27.54	2.13	39.88	0.86	39.90	74	-34.10	P
1637.32	37.86	27.54	2.13	39.88	0.86	28.51	54	-25.49	A
3274.68	48.91	30.06	2.86	40.27	1.18	42.75	74	-31.25	P
3274.68	37.16	30.06	2.86	40.27	1.18	31.00	54	-23.00	A
N/A	-----	-----	-----	-----	-----	-----	-----	-----	P
N/A	-----	-----	-----	-----	-----	-----	-----	-----	A


**Remark:**

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. The result basic equation calculation is as follow:  
Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit
4. The other emission levels were 20dB below the limit
5. The test limit distance is 3M limit.

### 8.6.4 RESTRICTED BAND EDGES


Detector mode : Peak

Polarity : Horizontal

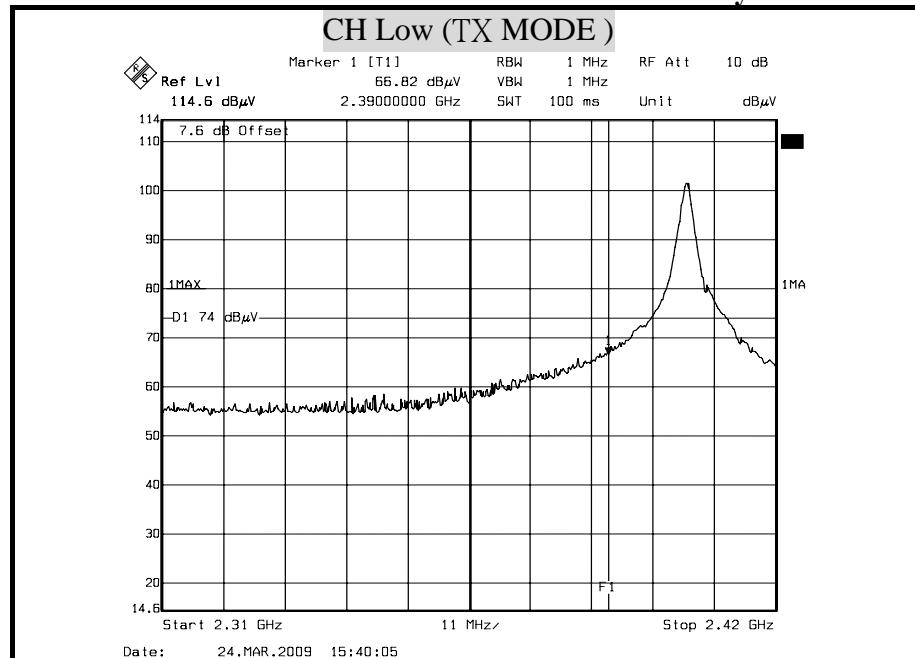

Detector mode : Average


Polarity : Horizontal

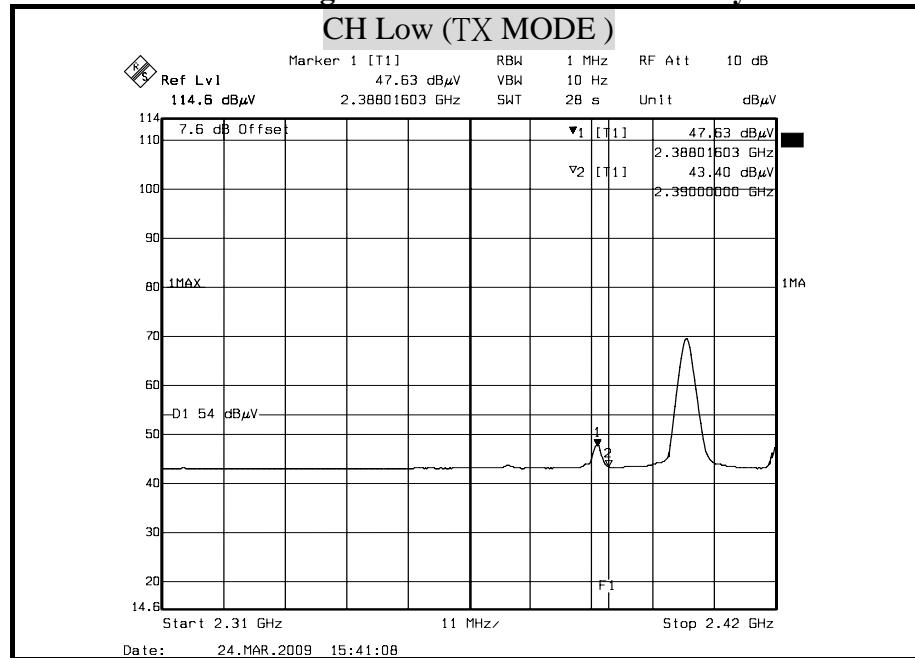
**Remark:**

1. Display Line = 54/74 dB  $\mu$  V/m.
2. 2390MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.6(dB)
3. 2483.5MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.62(dB)


## Detector mode : Peak

## Polarity : Vertical

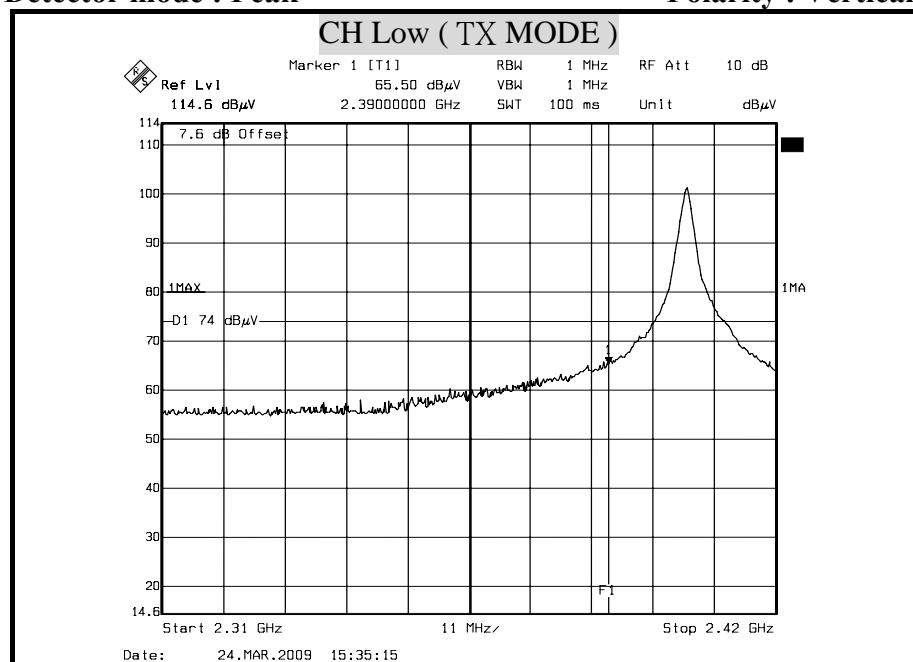



## Detector mode : Average

## Polarity : Vertical

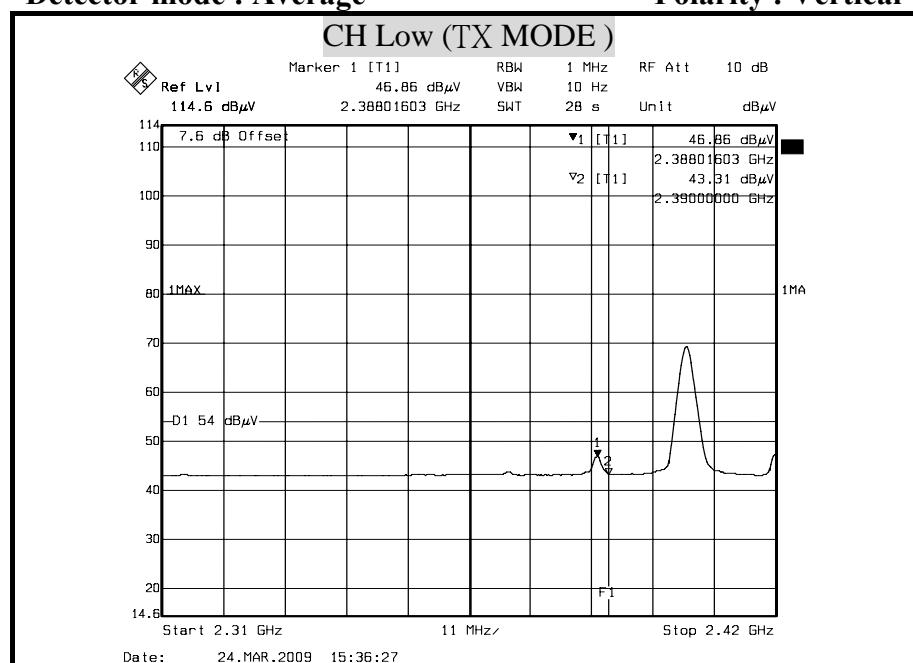

## Remark:


1. Display Line = 54/74 dB  $\mu$  V/m.
2. 2390MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.6(dB)
3. 2483.5MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.62(dB)

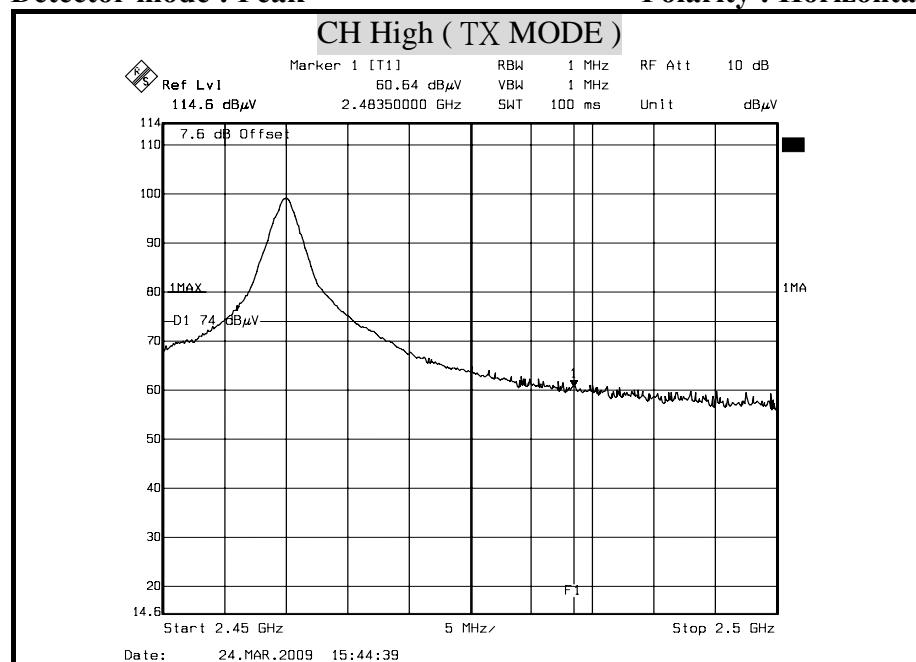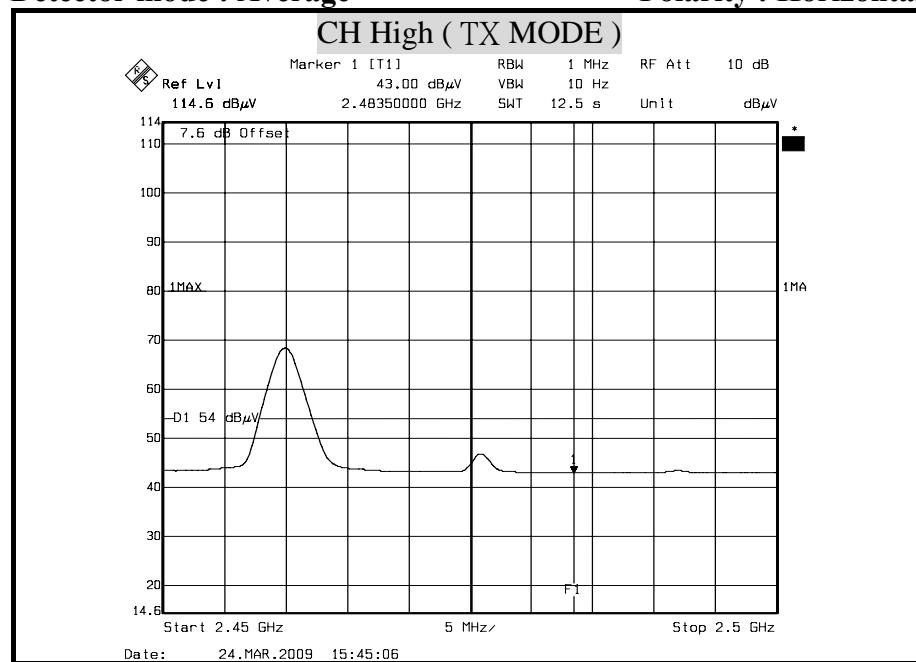**Detector mode : Peak**
**Polarity : Horizontal**

**Detector mode : Average**
**Polarity : Horizontal**

**Remark:**

1. Display Line = 54/74 dB  $\mu$  V/m.
2. 2390MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.6(dB)
3. 2483.5MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.62(dB)

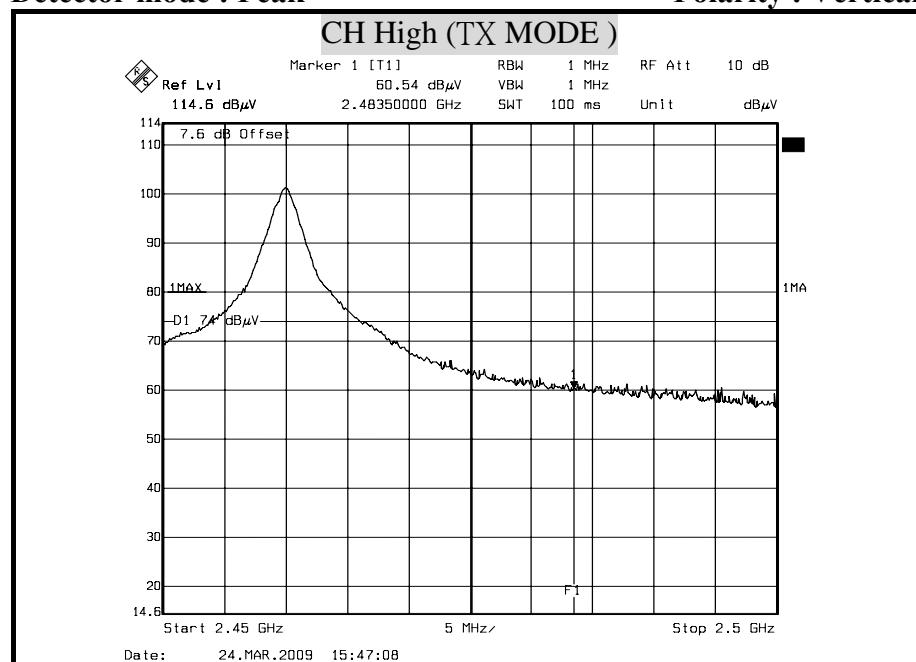
## Detector mode : Peak

## Polarity : Vertical



## Detector mode : Average

## Polarity : Vertical

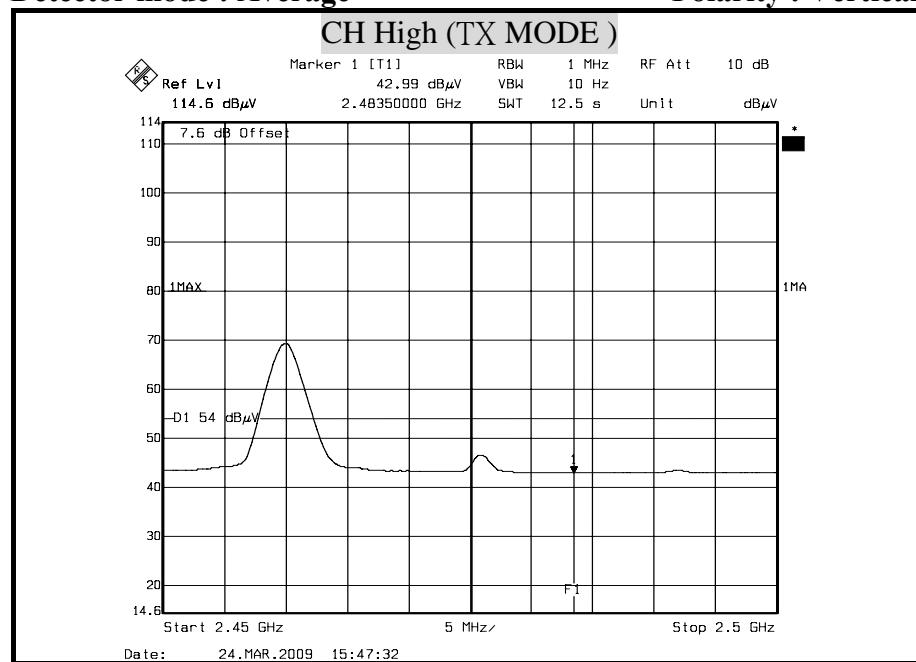

## Remark:

4. Display Line = 54/74 dB  $\mu$  V/m.
5. 2390MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.6(dB)
6. 2483.5MHz Offset(dB) = Antenna Factor(dB/m) + Cable Loss(dB) - Pre-Amplifier(dB) + Attenuator(dB)=7.62(dB)



## 8.7 POWERLINE CONDUCTED EMISSIONS

### LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.


Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

### TEST EQUIPMENTS

The following test equipments are used during the conducted powerline tests:

Conducted Emission room				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N.	SCHWARZBECK	NNLK 8121	8121-446	NOV. 19, 2009 For Insertion loss
	Rohde & Schwarz	ESH 3-Z5	840062/021	OCT. 05, 2009
TEST RECEIVER	Rohde & Schwarz	ESCS 30	100348	JUL. 02, 2009
TYPE N COAXIAL CABLE	SUHNER	BELDEN9913	2981	JAN. 14, 2010
Test S/W	e-3 (5.04211c) R&S (2.27)			

## TEST SETUP

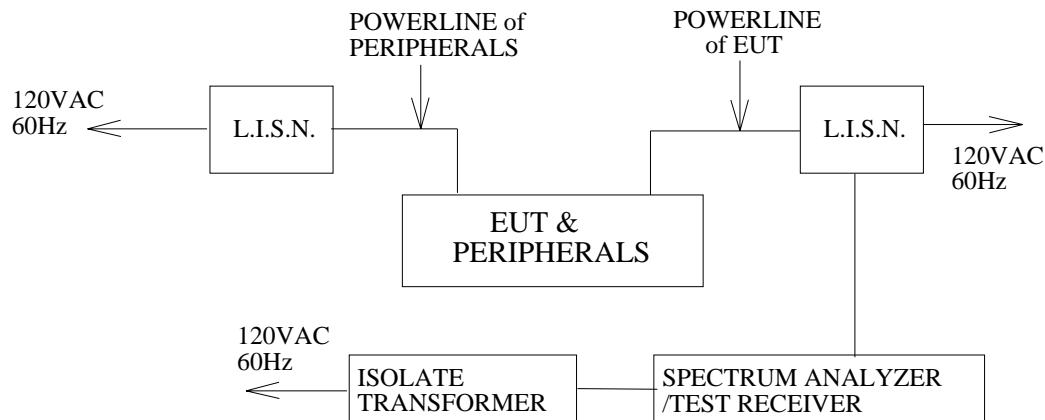

## TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

## TEST RESULTS

**\*\* Note: This EUT has not connection to AC Source direct. No applicable for this test.**



## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used for this product is one PCB antenna. The peak Gain of these antennas is 0dBi at 2.4GHz.