


Bluetooth® Hands-free Car Kit BT410 User's Manual



INSTALLATION


It is recommended that the hands-free car kit be positioned and installed on the windshield in front of the driver's shoulder, as shown in the picture below.

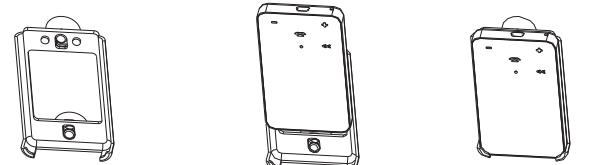

Step 1:
Stick the Windshield
Mount on the windshield

Step 2:
Fix BT410 in the
Windshield Mount

Step 3: OK

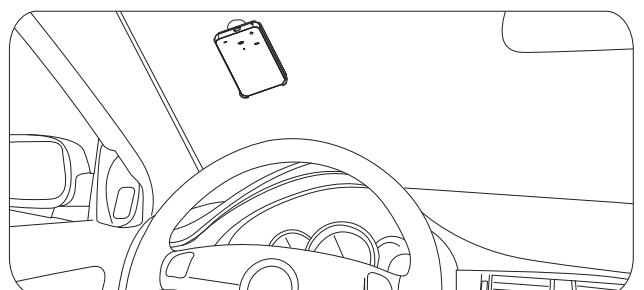

WARNING: Install the Hands-free Car Kit out of the way of any Air Bags for safety reason

To release the mute function, press and hold the **—** button for 2 seconds again.

AUDIO PLAYER

If you are using a phone that supports A2DP and your phone has been connected with BT410, you can use BT410 to play the music stored in your cell phone.

PLAY, PAUSE AND RESUME

Use the **<<** button to play, pause and resume your music.

STOP

Press and hold the **<<** button for 2 seconds to stop your music.

SKIP FUNCTION

Press and hold the **button** for 2 seconds to skip forward one track. Press and hold the **button** for 2 seconds to skip back one track.

ANSWER A CALL WHILE MUSIC IS PLAYING

If there is a phone call the music will be stopped automatically. It will be started automatically once the phone call has ended.

FEATURES & FUNCTIONS

- ※ Voice dialing (if supported by cell phone)
- ※ Last number redial
- ※ Auto reconnect
- ※ Volume control and mute function
- ※ DSP technology for noise reduction and echo cancellation
- ※ Call transfer between cell phone and BT410 during conversation
- ※ Bluetooth audio streaming (A2PP and AVRCP)
- ※ Supports up to 8 Bluetooth devices in pairing memory
- ※ Can be charged with a 12 volt adaptor or with the built-in solar panel.

ACCESSORIES LIST



BT410



Windshield Mount



Car Adapter




Suction Cups



User's Manual

PART DESCRIPTION

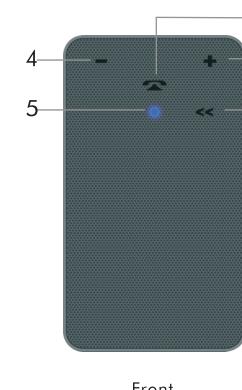

Front



Back

1 Multifunction button: Pairing, Answer/End/Reject a call, Voice dialing, Last number redial,	3 A2DP,
2 Volume up, Transferring a call, Playing forward,	4 Volume down, Mute, Playing back,
5 LED Indicator,	5 LED Indicator,

REJECTING A PHONE CALL

Press and hold the **—** button for 2 seconds to reject an incoming call.

VOICE DIALING

With BT410 on and paired with your cell phone, press the **—** button once. After you hear the audio signal, state the desired name.

NOTE: Your cell phone must support Voice Dialing.

LAST NUMBER REDIAL

With BT410 on and paired with your cell phone, press and hold the **—** button for 2 seconds, the last dialed number will be redialed.

NOTE: Do not press the **—** button for more than 2 seconds as BT410 will turn off.

TRANSFER CALL BETWEEN YOUR CELL PHONE AND BT410

Press and hold the **+** button for 2 seconds during your conversation. You will hear a BEEP sound and the call will transfer between your cell phone and BT410.

HAND-HOLD MODE

This device supports hand-hold mode. If you don't want to use the loudspeaker, you can turn the volume to the lowest level and use BT410 as you using your cell phone.

VOLUME CONTROL

press **+** or **—** to adjust the volume.

MUTE

To activate the mute function, press and hold the **—** button for 2 seconds during a phone call. This will mute your voice to the other party.

SUMMARY OF BUTTON FUNCTIONS

Functions	BT410 Status	Action
Power on	Power off	Press the — button for 3s
Power off	Power on	Press the — button for 5s
Pairing	Power off	Press the — button for 5s
Voice dialing	Idle	Briefly press — the button
Answering a call	Ringing	Briefly press — the button
Ending a call	Talking	Briefly press the — button
Rejecting a call	Ringing	Press the — button for 2s
Last number redialing	Idle	Press the — button for 2s
Transferring a call	Talking	Press the + button for 2s
Mute on	Talking	Press the — button for 2s
Mute off	Mute on	Press the — button for 2s
Volume up	Talking	Briefly press the + button
Volume down	Talking	Briefly press the — button
Music play	Idle	Briefly press the << button
Pausing music	Playing music	Briefly press the << button
Stopping music	Playing music	Press the << button for 2s
Skip forward	Playing music	Press the + button for 2s
Skip back	Playing music	Press the — button for 2s

LED INDICATIONS

Status	LED indication
Power on	The blue LED indicator flashes twice
Power off	The red LED indicator flashes twice
Pairing	The red & blue LED indicator flash alternately
Connected	The blue LED indicator flashes once every 3 seconds
Not connected	The blue LED indicator flashed once every 2 seconds
Charging	The red LED indicator on
Charging completed	The LED indicator off
Low battery	The red LED indicator flashes thrice every 30 seconds

SPECIFICATIONS

Bluetooth core specification:V2.0+EDR
Supported profile:HSP, HFP, A2DP,AVRCP
Frequency range:2.402GHz-2.480GHz
Working range:≤33ft /10m
Charging time:car charger: 2 hoursSolar panel: 28 hours
Talking time:10 hours
Standby time:250 hours
Dimension:94*54*11mm
Weight:53g

DECLARATION OF CONFIRMATION

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

— Consult the dealer or an experienced radio/TV technician for help.
NOTE: This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE:

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.