

TEST REPORT

To:	PLAYMIND LTD		To:	-
Attn:	LING FUNG		Attn:	-
Address:	Rm 413-415, House 63 Mody Road, TS	ston Centre, ST East, Kowloon	Address:	-
Fax:	2375 7439		Fax:	-
E-mail:	ling@playmindltd.co	<u>m</u>	E-mail:	
Offer No.:		BV	CK09AP15-01MTHS-A1	1
Factory name:		JINJIANG	HENGSHENG TOYS	COLTD
Location:				
Product:			JSCIE – FORD MUSTANO .: 60014, 60015, 60000, 6	
			Sample No:	(5209) 098-0732 / (5209)126-0207
			Test date:	April 18, 2009 To May 11, 2009
			Test Requested:	FCC Part 15 - 2008
			Test Method:	ANSI C63.4 - 2003
			FCC ID:	WFE60000-27
				escribed electrical apparatus.
CONCLUSION:	The submitted samp		The second secon	t of FCC Part 15 Subpart C.
		Authoriz	ed Signature:	
1	Lr	1	for I	ace
Reviewed by: I	Eric Wong		Approved by: Steven T	sang
Date: May 25, 2009 Date: May 25, 2009				

BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989 www.cps.bureauveritas.com This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Location of the test site

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 - 2003. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at :

BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

List of measuring equipment

Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE	
EMI TEST RECEIVER	R&S	ESCI	100379	18-AUG-2009	
HF LOOP ANTENNA	SCHAFFNER	HLA 6120	21728	14-NOV-2009	
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	31-JAN-2010	
OPEN AREA TEST SITE	BVCPS	N/A	N/A	05-JULY-2009	
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	09-JULY-2009	
HORN ANTENNA	SCHWARZBECK	BBHA9120D	9120D-692	29-JULY-2009	
PREAMPLIFIER	SCHWARZBECK	BBV9718	9718-152	22-JULY-2009	
COAXIAL CABLE	SUHNER	N/A	N/A	23-JULY-2009	
1-18GHz					
SPECTRUM ANALYZER	ADVANTEST	R3127	111000909	02-DEC-2009	

Conducted Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMITEST RECEIVER	R&S	ESCS30	830986/030	18-SEP-2009
LISN	R&S	ENV216	100024	25-MAR-2010

Remarks:-

N/A: Not Applicable or Not Available

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

BUREAU VERITAS HONG KONG LIMITED -Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989



Equipment Under Test [EUT]

Description of Sample:

Model Name: 1:18 STREET MUSCIE - FORD MUSTANG / FORD F100

Model Number: 60014, 60015, 60000, 60013

(60014 was chosen to test. All the models within this report are series and only different in the carton packaging and the artwork over the

enclosure. They are electrically identical)

Rating: 9Vd.c (Battery size: "6F22" x 1)

Description of EUT Operation:

The Equipment Under Test (EUT) is a PLAYMIND LTD of Radio Control toy. The transmitter is 1 switch and 2 sticks transmitter and operating at 27.156MHz. The EUT continues to transmit when stick is being pressed, Modulation by IC, and type is pulse modulation.

The transmitter has different control:

- 1. Switch Choose OFF/ON to control turn ON or OFF the transmitter
- 2. Left stick Forward or backward control
- 3. Right stick Left or right control


Antenna Requirement (Section 15.203)


The EUT uses a 36cm long Metal antenna bundled inside the package.

The antenna and its antenna connector are custom-made that can not be found on the market. The antenna cannot be replaced with another antenna.

The requirements of 15.203 are met. There are no deviations or exceptions to the specifications.







BUREAU VERITAS HONG KONG LIMITED – Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888

Fax: +852 2331 08989 www.cps.bureauveritas.com This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Radiated Emissions (Fundamental)

FCC Part 15 Section 15.227 Test Requirement:

Test Method: **ANSI C63.4**

Test Date(s): 2009-05-11

Mode of Operation: Transmission mode


Test Procedure:

Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 - 2003.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Test Setup: Open Area Test Site

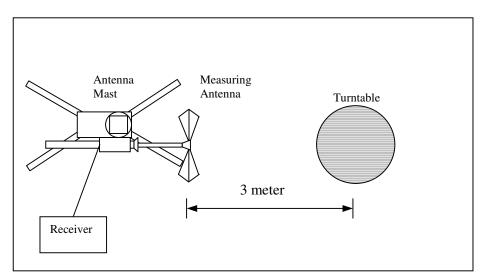

BUREAU VERITAS HONG KONG LIMITED -Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon, HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence. provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Limits for Field Strength of Fundamental Emissions (FCC 47CFR 15.227):

Frequency Range of	Field Strength of	Field Strength of				
Fundamental	Fundamental Emission	Fundamental Emission				
	[Peak]	[Average]				
[MHz]	[μV/m]	[μV/m]				
26.96 – 27.28	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)				

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Peak

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.156	V/90°	21.8	58.5	100	-41.5

Detection mode: # Average

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.156	V/90°	21.8	**55.0	80	-25.0

For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz

VBW = 300KHz

^{**}Duty Cycle Correction = 20Log(0.67) =-3.5dB



Radiated Emissions (9kHz – 1GHz)

Test Requirement: FCC Part 15 Section 15.209

ANSI C63.4 Test Method:

Test Date(s): 2009-05-11

Mode of Operation: Transmission mode

Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits			
[MHz]	[µV/m]			
1.705-30	300			
30-88	100			
88-216	150			
216-960	200			
Above960	500			

Measurement Data

Test Result of (Transmission mode): PASS

Detection mode: Quasi-Peak

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBμV/m)	Limit at 3m (dBµV/m)	Margin (dB)
54.31	٧	6.8	19.2	40.0	-20.8
135.78	>	12.2	24.8	43.5	-18.7
162.94	>	10.5	29.2	43.5	-14.3
190.05	٧	9.7	28.0	43.5	-15.5
217.25	V	9.5	19.3	46.0	-26.7
244.40	>	12.6	28.1	46.0	-17.9
271.56	٧	13.6	36.5	46.0	-9.5
298.70	Η	14.4	36.0	46.0	-10.0
325.82	٧	15.1	36.6	46.0	-9.4
353.04	V	15.9	35.5	46.0	-10.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz

VBW = 120KHz

BUREAU VERITAS HONG KONG LIMITED -Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989



26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.227

Test Method: ANSI C63.4:2003 (Section 13.1.7)

Test Date: 2009-04-18

Mode of Operation: Transmission mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.


Limits for 26dB Bandwidth of Fundamental Emission:

	Frequency	26dB Bandwidth	Limits	
	[MHz]	[KHz]	[MHz]	
27.14944		83.84	within 26.96 – 27.28	



Measurement Data:

Test Result of 26dB Bandwidth of Fundamental Emission: PASS

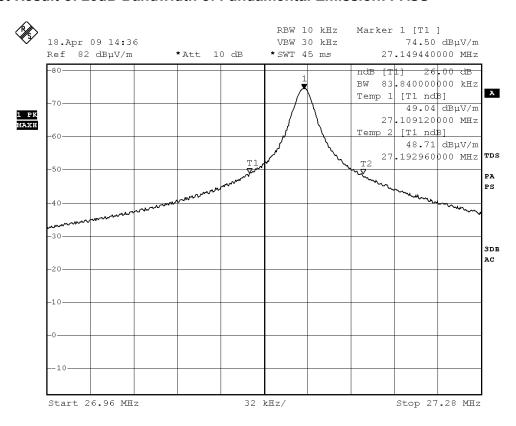

Date: 18.APR.2009 14:36:01



Duty Cycle Correction During 100msec:


Each function key sends a different series of characters, but each packet period (18.5msec) never exceeds a series of 4 long (1.6msec) and 10 short (0.6msec) pulses. Assuming any combination of short and long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered (4x1.6msec) + (10x0.6msec) per 18.5msec=67% duty cycle. Figure A through C show the characteristics of the pulse train for one of these functions.

Remarks:


Duty Cycle Correction = 20Log(0.67) =-3.5dB

The following figures [Figure A to Figure C] show the characteristics of the pulse train for one of these functions.



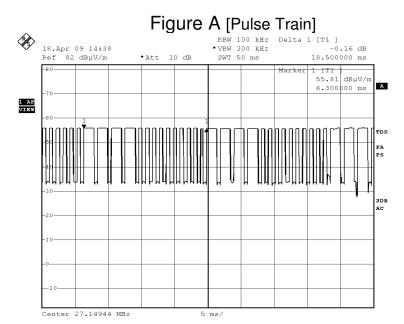

Date: 18.APR.2009 14:38:24

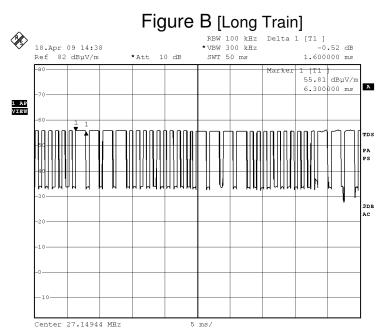


Date: 18.APR.2009 14:38:56


BUREAU VERITAS HONG KONG LIMITED -Kowloon Bay Office 1/F Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon,HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.





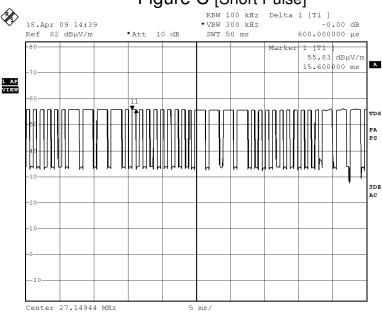

Date: 18.APR.2009 14:39:43



Photographs of EUT


Front View of the product




Rear View of the product



Inner Circuit Top View



Inner Circuit Bottom View





Battery compartment




Battery Cover



Front View of the product (Internal)




Rear View of the product (Internal)



Control Switch



Connector of Antenna



BUREAU VERITAS HONG KONG LIMITED -Kowloon Bay Office Type Pacific Trade Centre, 2 Kai Hing Road, Kowloon Bay, Kowloon, HONG KONG Tel: +852 2331 0888 Fax: +852 2331 08989

www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



Measurement of Radiated Emission Test Set Up



***** End of Report *****