

## About Bluetooth Speakerphone


The Bluetooth Speakerphone is compatible with most Bluetooth mobile phones. The Text-to-Speech system announces instructions for the users in 5 different languages and also indicates the status of the incoming caller. Fully portable, it is an ideal wireless communication solution for in-car or office use within a suppression, the Bluetooth speakerphone provides you with impeccable sound quality in full duplex mode

## Charging

Make sure that your speakerphone is fully charged before using it, use only the charger provided- do not use chargers from any other devices as this might damage the device, A full charge is approximately 3 hours.

- 1).Connect to a USB charging cable to charge.
- 2).Speakerphone red indicator will ON
- 3).Speakerphone be full charged until the red indicator off.

## Appearance description

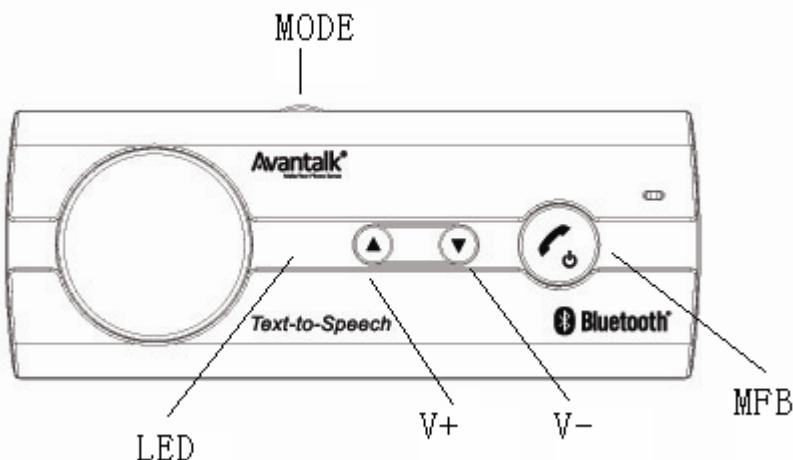

## Turning the speakerphone ON/OFF

### To turn on the speakerphone

Press and hold the “**MFB**” button for 3 seconds and the flashing blue LED light indicator comes on (“Power On” is announced).

**Note:** Do not hold the button down for more than 4 seconds when turning the Speakerphone on or else it may switch to its pairing mode. If this happens, turn off the Speakerphone and repeat the process for turning the Speakerphone on.

### To turn off the speakerphone

Press and hold the “**MFB**” button for 3 seconds and the flashing red LED light indication goes off (“Power Off” is announced).

## Pairing

You are required to pair the speakerphone with your mobile phone before using it.

- 1).Make sure the speakerphone are turn off.
- 2).Press and hold the “**Power**” button for 5 seconds until the indicator flash by blue and red alternately and you hear “Pairing phone please put your phone in pairing mode and enter PIN code 0000” is announced.
- 3).Enter your phone Bluetooth menu and make sure that the Bluetooth feature is activated.
- 4).The phone will search all Bluetooth device within 10 meters and display them as a list
- 5).Select “**BTCK-20**” from the list. Enter the passkey “**0000**” to pair and connect the speakerphone to your phone.
- 6).The blue LED blinks at a regular interval when both devices are successfully paired (“Pairing Successful” is announced).

**Note:** If the pairing can't be completed within 2 minutes after the pairing mode is activated, the speakerphone LED will flash off and will be under Standby mode, please repeat step to pair the speakerphone.

## Use the Speakerphone

### Using the Speakerphone (Most functions will be audibly announced)

#### (1) Text-To-Speech Language Options

Press the "V+" button for 3 seconds and the Speakerphone announces "Select Language". Repeat the process to select the desired language in the following order of English, French, Italian, German and Spanish.

#### (2) Transferring Mobile Phone's Phonebook to Speakerphone

a. **Using Speakerphone** (For transferring the whole phonebook, and some mobile phone models may not be workable in this function.) In the connecting status, press the "Mode" button for 3 seconds and the Blue LED light indicator comes on. When the process is completed, the Speakerphone announces "Contacts Saved".

b. **Using Mobile Phone (For transferring the contact person data one by one, and it is workable for all the support OPP profile models.)**

① In the connecting status, press the "Mode" button for 6 seconds to enter the phonebook function, then the Speakerphone and mobile phone will be disconnected automatically, and the Speakerphone will be ready to receive the phonebook data from the mobile phone, and the Blue LED light indicator will be flashing every second.

② Select the contact person's data on the mobile phone's phonebook and transfer it to the Speakerphone via the mobile phone's Bluetooth manual. When the process is completed, the Speakerphone announces "Contacts Saved".

③ If the Speakerphone has not received any contacts data from the mobile phone within 2 minutes while in phonebook function, the Speakerphone will resume the speakerphone function and re-connect to the previous paired device automatically.

④ To resume speakerphone function, press the "MFB" button, then the Speakerphone will exit the phonebook function and re-connect with the previous paired device automatically.

### Using the Speakerphone

You can initiate calls from your mobile phone, or directly from your speakerphone using voice dialing commands. Dial directly from your mobile phone. The call is automatically connected to your speakerphone. When your mobile phone rings, press the "MFB" button on the speakerphone to connect the call. When you have finished our call, press the "MFB" button on the receiver to disconnect the call.

#### 13. Product Specifications:

Bluetooth Compliance:	Bluetooth 2.0+EDR specifications
Operating Frequency Band:	2.4GHz ~ 2.48GHz unlicensed ISM band
Output Power:	Class 2 Power Output, up to 10 meters
Support Profiles:	Headset and Handsfree 1.5 Profiles
TTS Support Language:	English, French, Italian, German, Spanish
Support Multiple paired Device:	Up to 8 Bluetooth Phone can be paired
Stand-by Time:	Up to 600 hours.
Talk time:	Up to 8 - 10 hours
Battery Charging Time:	About 3 hours
Charger Voltage:	DC5.0V 400mA
Battery Type:	650mA BL-5B (Rechargeable Lithium Battery)