

WIRELESS HEAD PHONES INSTRUCTION SHEET


APPEARANCE AND FUNCTION ILLUSTRATIONS:

A. Receiver

- 1. Battery compartment cover
- 2. Volume control and power button (ON/OFF)
- 3. Scan key(SCAN)
- 4. Reset key(RESET)
- 5. Power indicator
- 6. Audio socket

B. Emitter

- 7. Power indicator(front)
- 8. Power and Function switch
- 9. Microphone socket(MIC)
- 10. Power socket(4.5V DC)
- 11. Microphone(MIC)
- 12. Audio cable of emitter
- 13. Battery compartment cover(bottom)

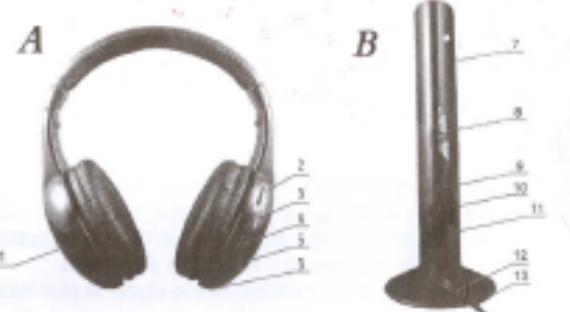


TECHNICAL SPECIFICATIONS:

- **Emitter**
 - Frequency: 88.35±0.35MHz
 - Modulation mode: FM
 - Emission distance: 98 ft (30m) (with no interference)
 - Reception from any audio and visual equipment with audio out socket, such as TV set, audio device, DVD/VCD player, multimedia, PC, MP3, walkman, etc.
 - Power Supply: 2 x AAA batteries or 4.5V DC
- **Receiver**
 - Frequency range: 88-108MHz
 - Reception mode: FM
 - Distortion: ≤2%
 - Power Supply: 2 x AAA batteries

INSTALLATION:

- **Installing the Receiver:**
Insert two AAA batteries into the battery compartment according to the "+" and "-" polarity.
- **Installing the Emitter:**
Insert two AAA batteries into the battery compartment according to the "+" and "-" polarity, or insert the power adaptor(not provided) into power socket of emitter(4.5V DC).
Insert audio plug of the emitter into AUDIO-OUT socket of audio source (such as TV set, audio device, PC, DVD player, CD player, MP3 player, etc.). In case the audio out socket of the audio source is the headphone socket, the Y adaptor cable can be used for connection (see Fig. 1).
To achieve best reception spread out emitter audio cable which can be also used as antenna.

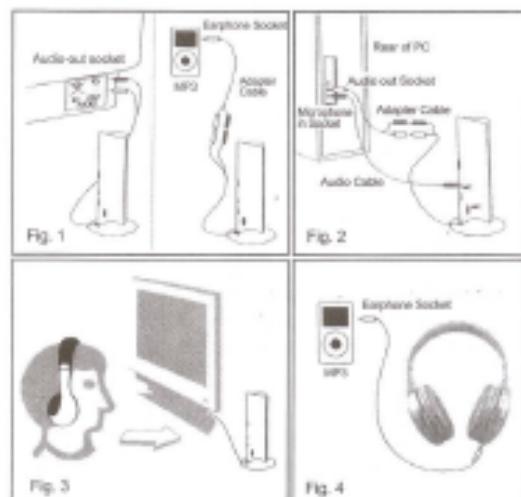

HOW TO USE:

● **Wireless Headphone**

1. Insert the emitter audio cable into the AUDIO-OUT socket of the electrical device(see Fig.1) or earphone socket, and move the function switch of the emitter to the WIRELESS HEADPHONE position, and the power indicator of emitter will go on. (In case a TV set is used as the audio source, the TV set should be muted.)

2. Turn on the volume control and power button (ON/OFF) on the receiver, the power indicator of receiver will go on. First press the RESET key, and press the SCAN key, the sound sent from emitter should be heard.

- **Wireless Net Audio Chat**
 1. Connect the emitter audio cable to the adaptor cable(optional) (see Fig. 2), and insert the other end of the adaptor cable into the audio out socket of the PC, then insert one end of the audio cable(optional) into the microphone socket (MIC) on the emitter, and insert the other end into the microphone in socket of the PC.
 2. Aim the microphone socket (MIC) of the emitter at you (see Fig.3), and move the power switch of the emitter to AUDIO CHAT position, and the power indicator will go on.
 3. Turn on the volume control and power button (ON/OFF) of the receiver, and the power indicator will go on. First press the RESET key, and then press the SCAN key, and then the sound sent out from the emitter can be heard.
- **Wireless Monitoring**

Place the emitter near the people you want monitored (such as elderly people, children, etc.) and point the microphone (MIC) toward the people. Move the function switch of the emitter to the MONITOR position, and the power indicator of the receiver will go on. Press the RESET key, and press the SCAN key, the sound sent out from emitter can be heard with the headphone.
- **Listening to the radio**

The receiver cable can be used separately as an FM radio. Press SCAN key once, and the receiver will automatically search toward a higher range and lock into one radio channel; when the highest range is reached, press RESET key, and the frequency returns to the lowest range. Press SCAN key again, and the receiver will search the radio channels from the low range again.
- **Wired Headphone**

Insert one end of the audio cable (optional) into the audio socket of the receiver (see Fig.4), and insert the other end into the headphone socket of the electrical devices, such as MP3 player, VCD player, DVD player, etc., and then the unit can be used as a wired headphone.
- **Turn off the unit**

When the unit is not in use, move the function switch on the emitter to the OFF position to turn the emitter off; and turn the volume control receiver to the OFF position, and the power indicator receiver will go off, and the receiver will turn off.

Remove batteries when not using the unit for a long period of time.

NOTE:

- To achieve best reception spread out the audio cable of the emitter (the emitter audio cable can also be used as antenna).
- If the sound is distorted or too strong, adjust the volume of the signal source (TV set, VCD player, DVD player, PC, MP3, walkman etc.) to a lower level and reception performance may be improved.
- Replace the batteries if you are having the following problems:
 - The emitter indicator becomes dim.
 - The receiver reception is poor
 - The volume becomes weak and the sound is distorted.

BATTERY NOTE:

For best result, always use alkaline batteries. Be sure to check the expiration date because fresh batteries will ensure uninterrupted usage/enjoyment of the product. Remove the batteries if the product will not be used for an extended period. If the product does not perform as expected, check for proper battery charge and correct battery installation, or try a fresh set of batteries.

CAUTION:

Batteries should be removed and replaced by adults only. Do not mix old and new batteries. Do not mix alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries. Do not use recharge standard or alkaline batteries. Be sure to insert batteries with the correct polarities and always follow battery manufacturer's instructions. Remove batteries and store them in a cool, dry place when not in use. Always remove old and dead batteries from product.

FCC WARNING:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1)This device may not cause harmful interference, and
- (2)This device must accept any interference received, including interference that may cause undesired operation

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part

15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.