

FCC REPORT

(WIFI)

Applicant: Autel Intelligent Technology Corp., Ltd.

Address of Applicant: 7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China

Equipment Under Test (EUT)

Product Name: ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM

Model No.: MaxiSys MS909, MaxiSys MS919

Trade mark: AUTEL

FCC ID: WQ8MAXISYSMS909

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 28 May, 2019

Date of Test: 29 May, to 21 Nov., 2019

Date of report issued: 21 Nov., 2019

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	21 Nov., 2019	Original

Tested by:

YT Yang

Test Engineer

Date:

21 Nov., 2019

Reviewed by:

Winner Zhang

Project Engineer

Date:

21 Nov., 2019

3 Contents

	Page
1 COVER PAGE.....	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY.....	4
5 GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS.....	6
5.5 MEASUREMENT UNCERTAINTY.....	6
5.6 LABORATORY FACILITY.....	7
5.7 LABORATORY LOCATION	7
5.8 TEST INSTRUMENTS LIST.....	7
6 TEST RESULTS AND MEASUREMENT DATA.....	9
6.1 ANTENNA REQUIREMENT	9
6.2 CONDUCTED EMISSION	10
6.3 CONDUCTED OUTPUT POWER	13
6.4 OCCUPY BANDWIDTH	22
6.5 POWER SPECTRAL DENSITY	30
6.6 BAND EDGE	39
6.6.1 Conducted Emission Method.....	39
6.6.2 Radiated Emission Method.....	46
6.7 SPURIOUS EMISSION.....	87
6.7.1 Conducted Emission Method.....	87
6.7.2 Radiated Emission Method.....	94
7 TEST SETUP PHOTO	108
8 EUT CONSTRUCTIONAL DETAILS	109

4 Test Summary

Test Items	Section in CFR 47	Result
Antenna requirement	15.203 & 15.247 (b)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247 (d)	Pass
Spurious Emission	15.205 & 15.209	Pass
All measurement data were performed in accordance with ANSI C63.10: 2013 and KDB 558074 D01 15.247 Meas Guidance v05r02 of test method.		
<i>Remark:</i> 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable.		

5 General Information

5.1 Client Information

Applicant/ Manufacturer:	Autel Intelligent Technology Corp., Ltd.
Address:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd., Xili, Nanshan, Shenzhen, China
Factory1:	Autel Intelligent Technology Corp., Ltd.
Address:	6th Floor, Building 1, Yanxiang Zhigu, NO.11 Gaoxin West Rd, Guangming New District, Shenzhen City, Guangdong Province, China.
Factory2:	AUTEL VIETNAM COMPANY LIMITED
Address:	4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, VietNam

5.2 General Description of E.U.T.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM
Model No.:	MaxiSys MS909, MaxiSys MS919
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20))
Channel numbers:	11 for 802.11b/802.11g/802.11(HT20)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps
Data speed (IEEE 802.11n):	Up to 72.2 Mbps
Antenna Type:	Internal Antenna
Antenna gain:	Left module: ANT 1: 2.4G Wi-Fi: 2.3 dBi, ANT 2: 2.4G Wi-Fi: 4.8 dBi, Right module: ANT 3: 2.4G Wi-Fi: 4.5 dBi, ANT 4: 2.4G Wi-Fi: 2.3 dBi,
Power supply:	Rechargeable Li-ion Battery DC3.8V, 15000mAh
AC adapter:	Adapter 1: Model: GME36A-120300FDS Input: 100-240V, 50/60Hz, 1.2A Output: 12V, 3A Adapter 2: Model : A361-1203000DI Input: 100-240V, 50/60Hz, 1.5A Output:12V,3000mA Adapter 3: Model : J361-1203000DI Input: 100-240V, 50/60Hz, 1.5A Output:12V,3000mA

Remark:	Model No.: MaxiSys MS909, MaxiSys MS919 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name.
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency each of channel for 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Note: 1. For 802.11n-HT40 mode, the channel number is from 3 to 9; 2. Channel 1, 6 & 11 selected for 802.11b/g/n-HT20 as Lowest, Middle and Highest channel.							

5.3 Test environment and test mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Transmitting mode	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:	
Per-scan all kind of data rate, the follow list were the worst case.	
Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
Remark: 802.11b/802.11g support SISO, 802.11n20 support MIMO	

5.4 Description of Support Units

The EUT has been tested as an independent unit.

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Conducted Emission (9kHz ~ 30MHz)	±1.60 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,
Bao'an District, Shenzhen, Guangdong, China
Tel: +86-755-23118282, Fax: +86-755-23116366
Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>


5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
Loop Antenna	SCHWARZBECK	FMZB1519B	00044	03-18-2019	03-17-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-21-2018	11-20-2019
				11-21-2019	11-20-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-21-2018	11-20-2019
				11-21-2019	11-20-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		


Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI	101189	03-18-2019	03-17-2020
Pulse Limiter	SCHWARZBECK	OSRAM 2306	9731	03-18-2019	03-17-2020
LISN	CHASE	MN2050D	1447	03-18-2019	03-17-2020
LISN	Rohde & Schwarz	ESH3-Z5	8438621/010	07-21-2018	07-20-2019
				07-21-2019	07-20-2020
Cable	HP	10503A	N/A	03-18-2019	03-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		

6 Test results and Measurement Data

6.1 Antenna requirement

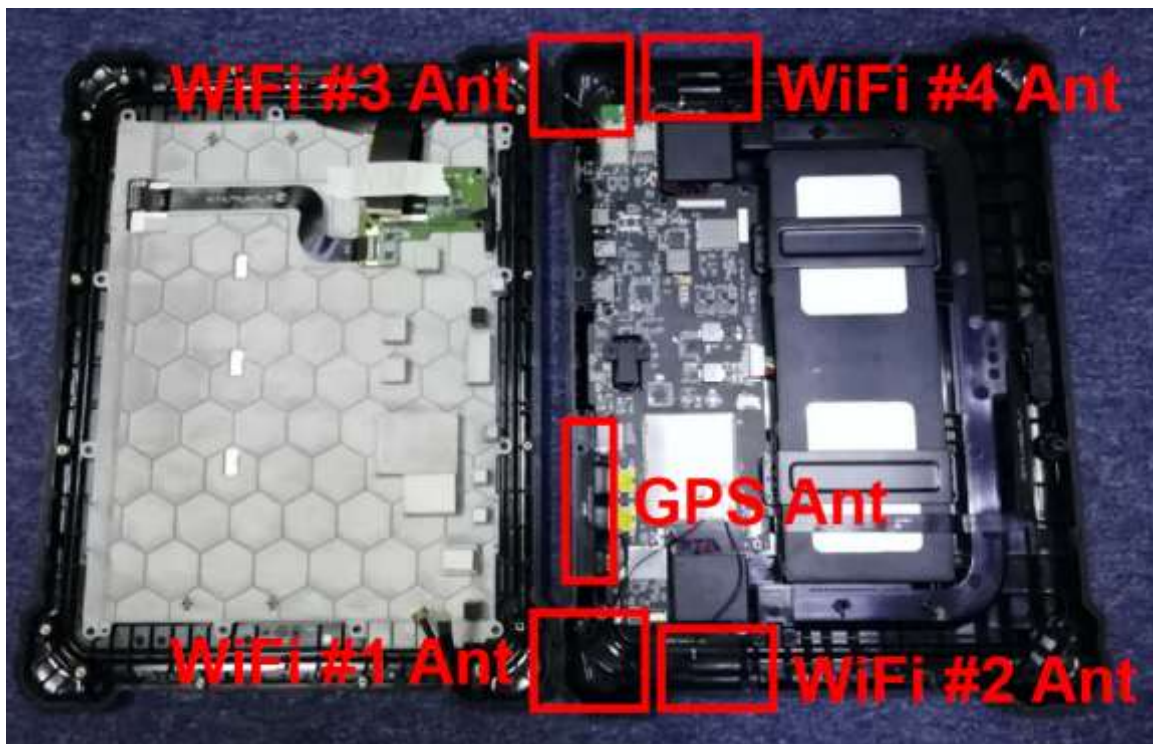
Standard requirement:	FCC Part 15 C Section 15.203 /247(b)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The Wi-Fi antenna is an Internal antenna which cannot replace by end-user, the best case gain of the antenna is 4.8 dBi.	
	

6.2 Conducted Emission

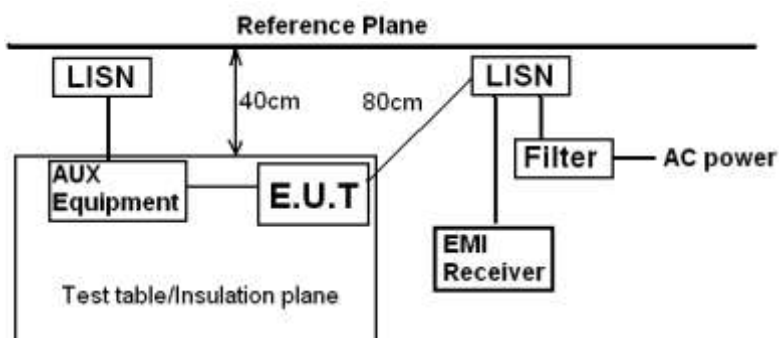Test Requirement:	FCC Part 15 C Section 15.207		
Test Frequency Range:	150 kHz to 30 MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9 kHz, VBW=30 kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test setup:	 Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

Product name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test by:	YT	Test mode:	2.4G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5℃ Humi: 55%

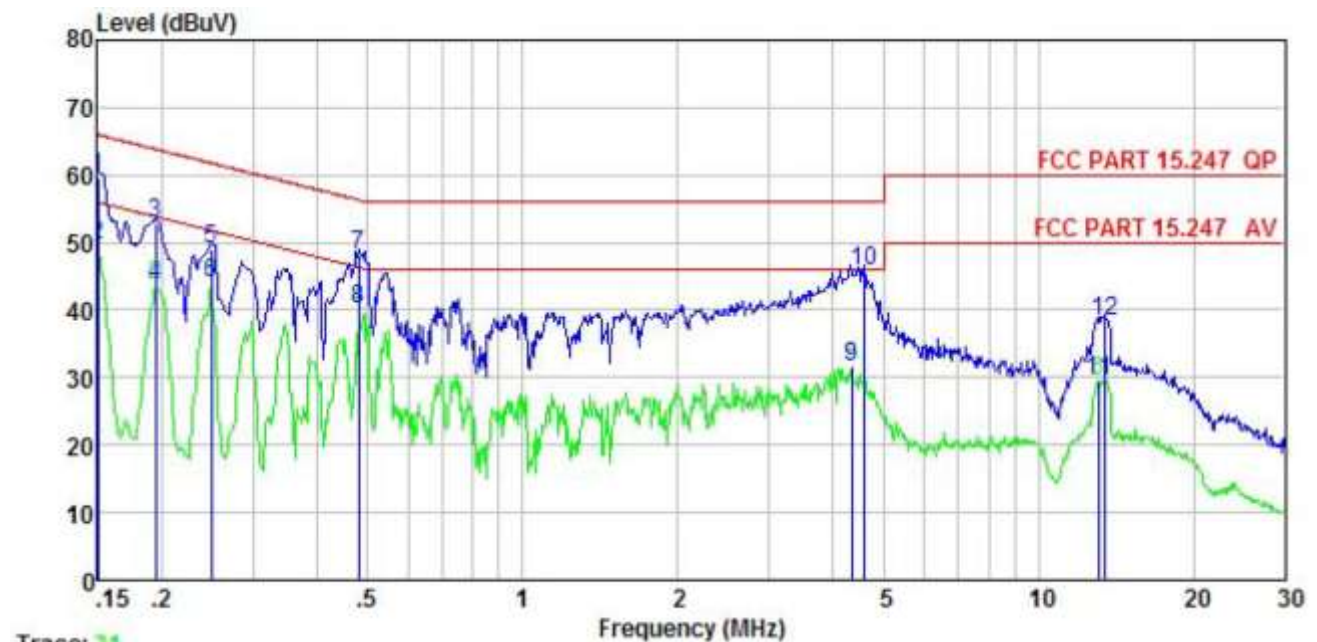


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	49.24	-0.45	10.78	59.57	66.00	-6.43	QP
2	0.150	39.31	-0.45	10.78	49.64	56.00	-6.36	Average
3	0.194	42.40	-0.41	10.76	52.75	63.84	-11.09	QP
4	0.194	33.46	-0.41	10.76	43.81	53.84	-10.03	Average
5	0.249	38.63	-0.40	10.75	48.98	61.78	-12.80	QP
6	0.249	33.76	-0.40	10.75	44.11	51.78	-7.67	Average
7	0.481	37.79	-0.39	10.75	48.15	56.32	-8.17	QP
8	0.481	29.72	-0.39	10.75	40.08	46.32	-6.24	Average
9	4.338	21.32	-0.47	10.88	31.73	46.00	-14.27	Average
10	4.598	35.32	-0.47	10.86	45.71	56.00	-10.29	QP
11	13.057	19.31	-0.66	10.91	29.56	50.00	-20.44	Average
12	13.408	27.98	-0.66	10.91	38.23	60.00	-21.77	QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. Test all adapters and modes to reflect only the worst mode

Product name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test by:	YT	Test mode:	2.4G Wi-Fi Tx mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz	Environment:	Temp: 22.5°C Humi: 55%

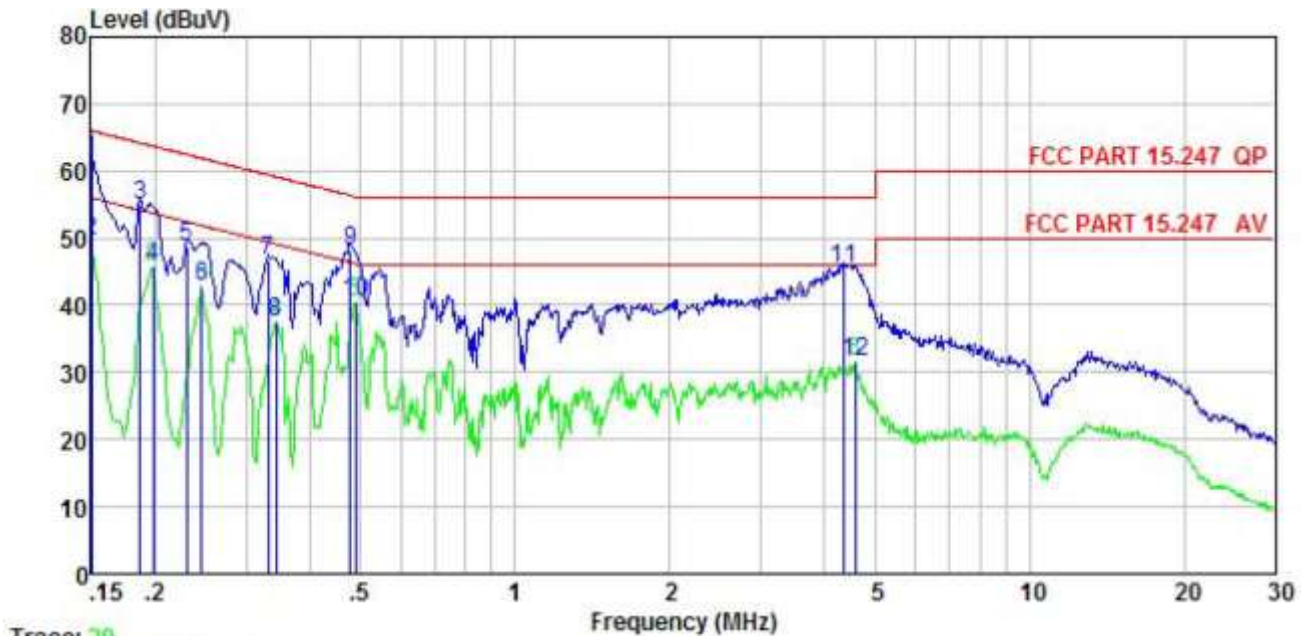


	Freq	Read	LISN	Cable	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Level	Line	Limit	
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	51.59	-0.68	10.78	61.69	66.00	-4.31	QP
2	0.150	39.42	-0.68	10.78	49.52	56.00	-6.48	Average
3	0.186	44.94	-0.69	10.76	55.01	64.20	-9.19	QP
4	0.198	35.69	-0.69	10.76	45.76	53.71	-7.95	Average
5	0.230	38.68	-0.67	10.75	48.76	62.44	-13.68	QP
6	0.246	32.57	-0.66	10.75	42.66	51.91	-9.25	Average
7	0.330	36.44	-0.63	10.73	46.54	59.44	-12.90	QP
8	0.343	27.34	-0.63	10.73	37.44	49.13	-11.69	Average
9	0.479	37.94	-0.65	10.75	48.04	56.36	-8.32	QP
10	0.489	30.46	-0.65	10.76	40.57	46.19	-5.62	Average
11	4.361	35.23	-0.71	10.88	45.40	56.00	-10.60	QP
12	4.574	21.32	-0.71	10.87	31.48	46.00	-14.52	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. Test all adapters and modes to reflect only the worst mode

6.3 Conducted Output Power

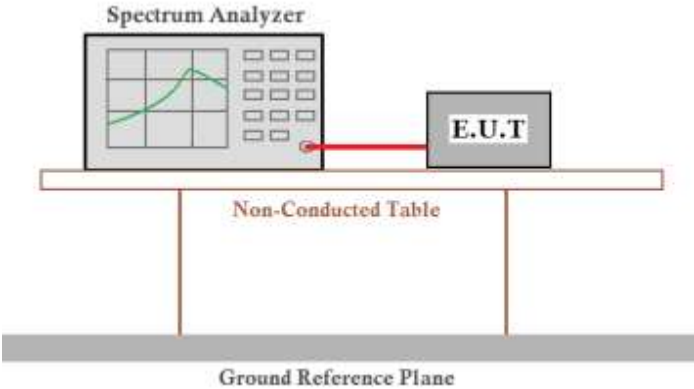Test Requirement:	FCC Part 15 C Section 15.247 (b)(3)
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup for conducted output power measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Left module:

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX1	14.54	/	29.35	Pass
		TX2	14.35			
	Middle	TX1	14.70	/	29.35	Pass
		TX2	14.52			
	Highest	TX1	14.79	/	29.35	Pass
		TX2	14.40			
802.11g	Lowest	TX1	16.29	/	29.35	Pass
		TX2	16.21			
	Middle	TX1	16.19	/	29.35	Pass
		TX2	16.22			
	Highest	TX1	15.82	/	29.35	Pass
		TX2	16.06			
802.11n(HT20)	Lowest	TX1	16.04	19.14	29.35	Pass
		TX2	16.21			
	Middle	TX1	16.02	19.09	29.35	Pass
		TX2	16.14			
	Highest	TX1	15.90	18.97	29.35	Pass
		TX2	16.01			


Remark:

1. Because transmit signals are correlated, Directional gain = $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$, So the Directional gain = $10 \log[(10^{(2.3/20)} + 10^{(4.8/20)})^2 / 2] = 6.65 \text{ dBi}$
2. The directional Gain of antenna is greater than 6 dBi, so the limit of power is 29.35 dBm.

Right module:


Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX3	14.49	/	29.52	Pass
		TX4	14.29			
	Middle	TX3	14.83	/	29.52	Pass
		TX4	14.77			
	Highest	TX3	15.03	/	29.52	Pass
		TX4	14.93			
802.11g	Lowest	TX3	15.70	/	29.52	Pass
		TX4	15.77			
	Middle	TX3	15.97	/	29.52	Pass
		TX4	16.04			
	Highest	TX3	16.44	/	29.52	Pass
		TX4	16.35			
802.11n(HT20)	Lowest	TX3	15.70	18.65	29.52	Pass
		TX4	15.58			
	Middle	TX3	15.96	18.96	29.52	Pass
		TX4	15.94			
	Highest	TX3	16.22	19.29	29.52	Pass
		TX4	16.34			
Remark: 1. Because transmit signals are correlated, Directional gain = $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$,So the Directional gain= $10 \log[(10^{(4.5/20)} + 10^{(2.3/20)})^2/2]=6.48\text{dBi}$ 2. The directional Gain of antenna is greater than 6 dBi. so the limit of power is 29.52 dBm.						

Test plot as follows (Left module):

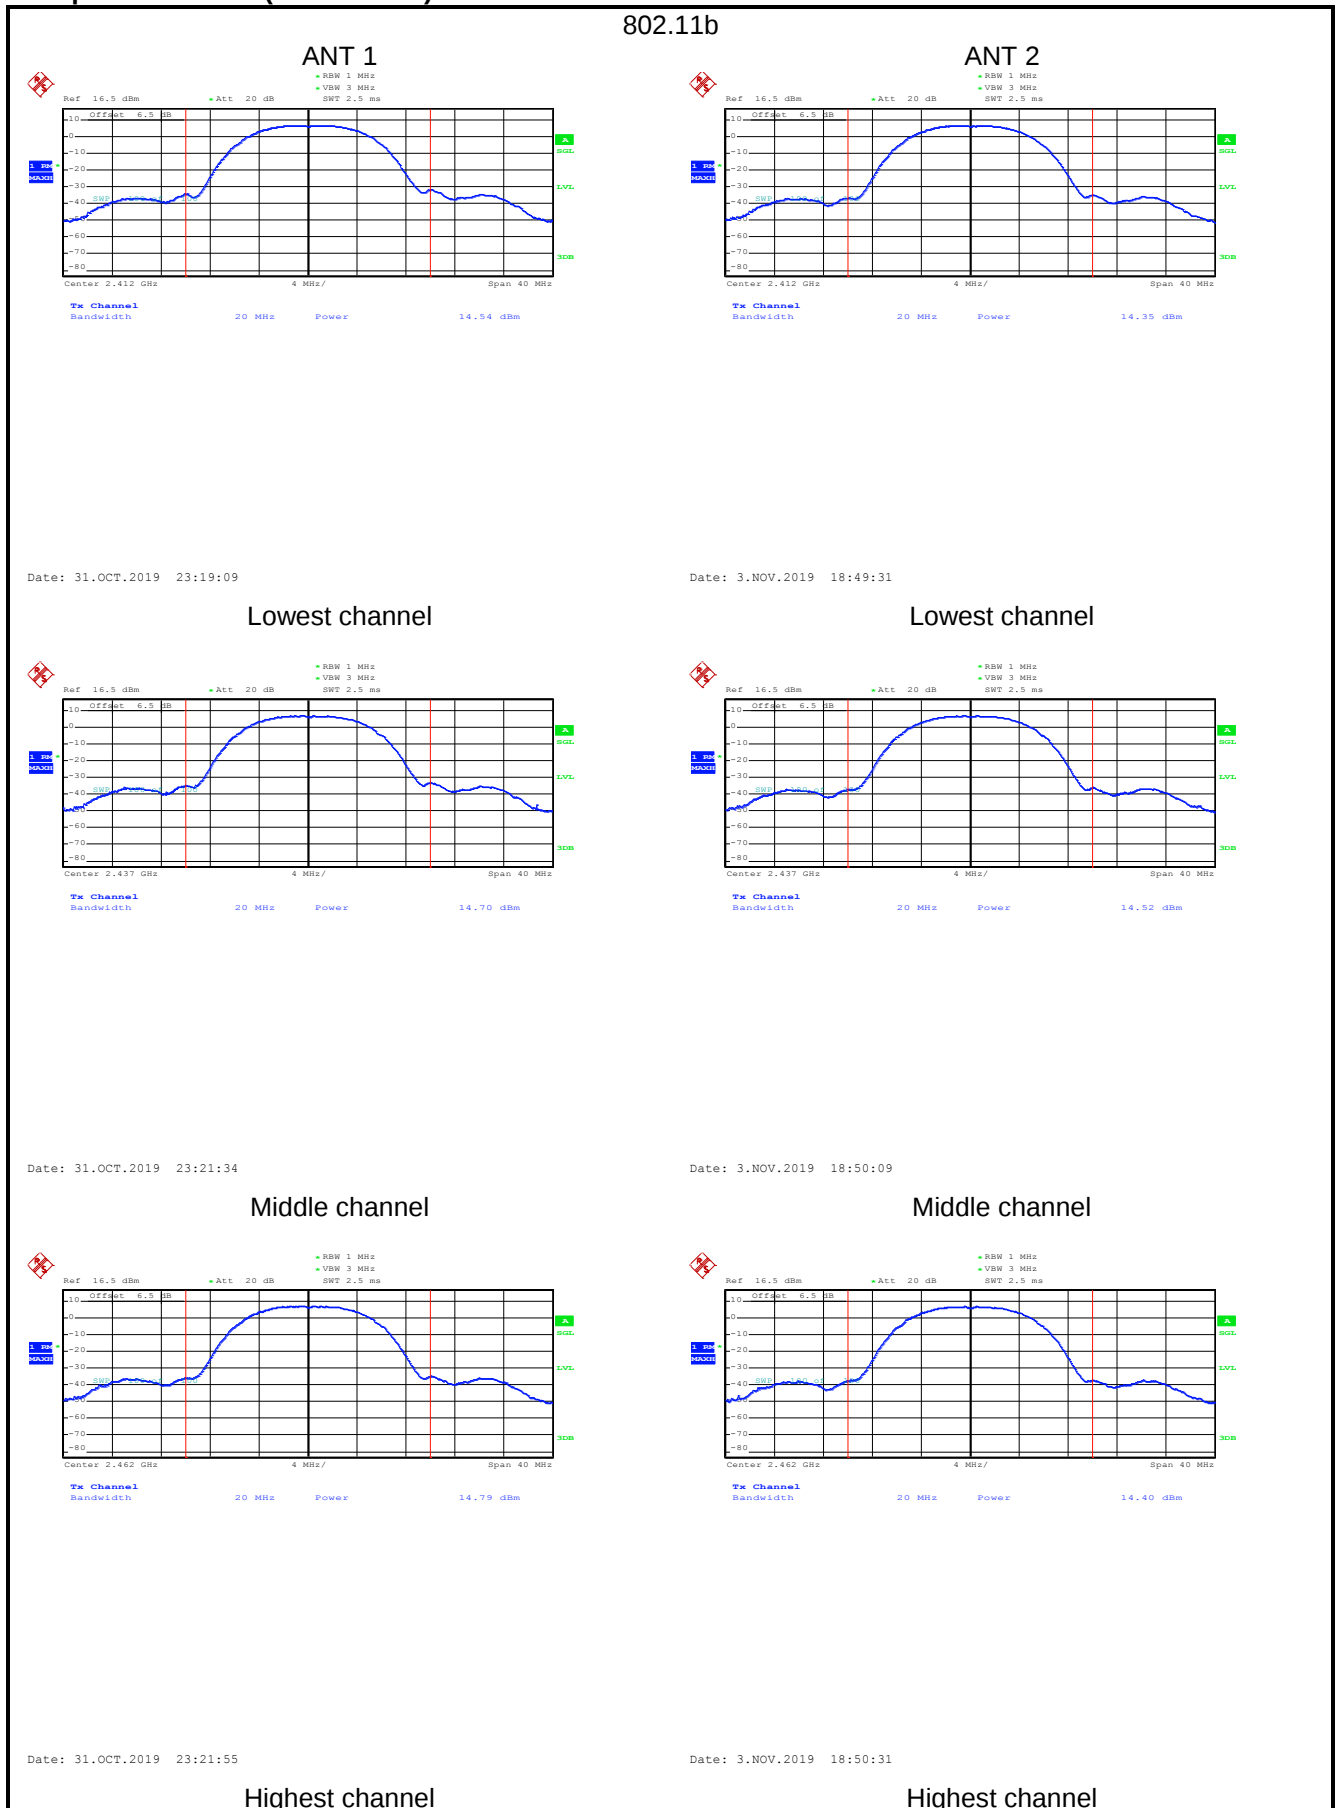


802.11g

ANT 1

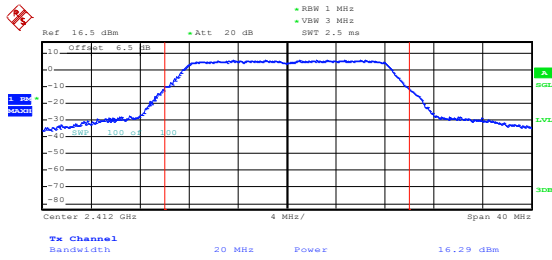


ANT 2

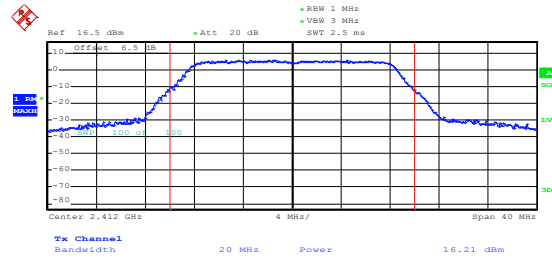


Date: 31.OCT.2019 23:22:45

Date: 3.NOV.2019 18:51:16

Lowest channel

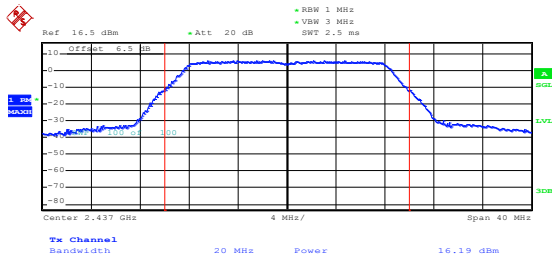


Lowest channel

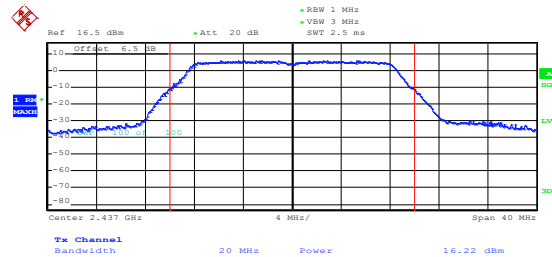


Date: 31.OCT.2019 23:23:33

Date: 3.NOV.2019 18:51:54

Middle channel

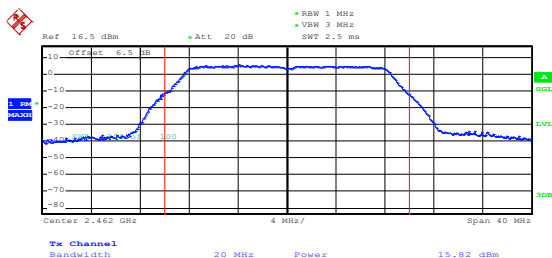

Middle channel

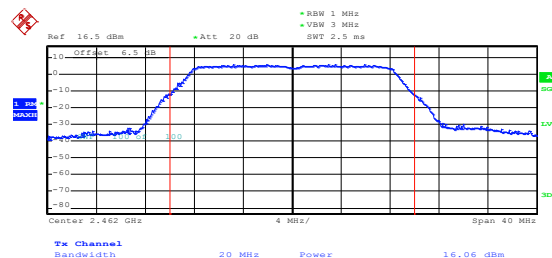

Date: 31.OCT.2019 23:24:11


Date: 3.NOV.2019 18:52:33

Highest channel


Highest channel

802.11n20

ANT 1

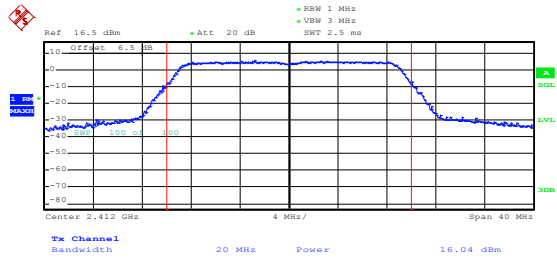


ANT 2

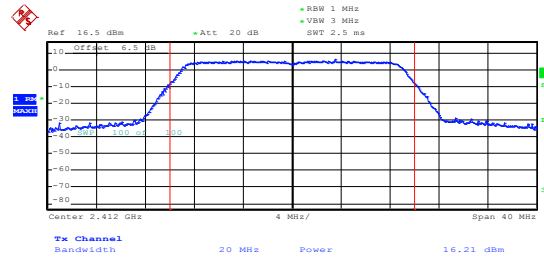


Date: 31.OCT.2019 23:25:49

Date: 3.NOV.2019 18:53:33

Lowest channel

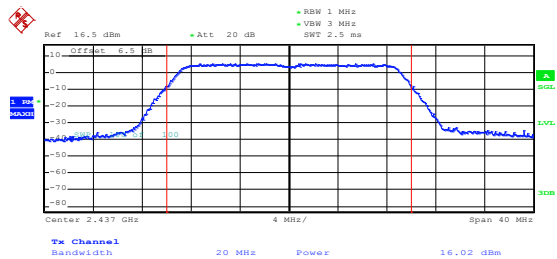


Lowest channel

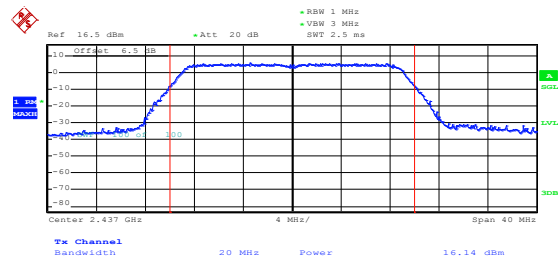


Date: 31.OCT.2019 23:26:18

Date: 3.NOV.2019 18:54:01

Middle channel

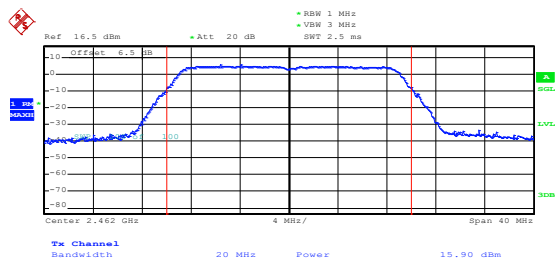

Middle channel

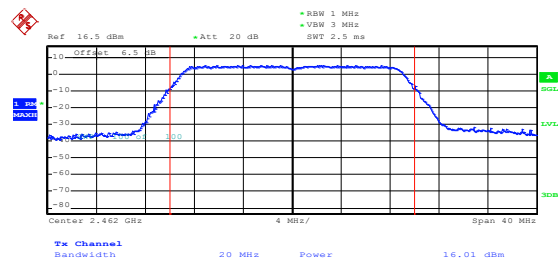

Date: 31.OCT.2019 23:26:46



Date: 3.NOV.2019 18:54:23

Highest channel

Highest channel

(Right module):

802.11b

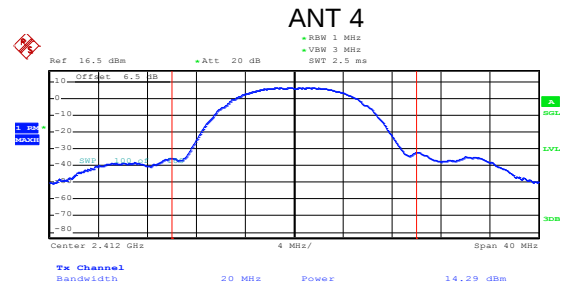
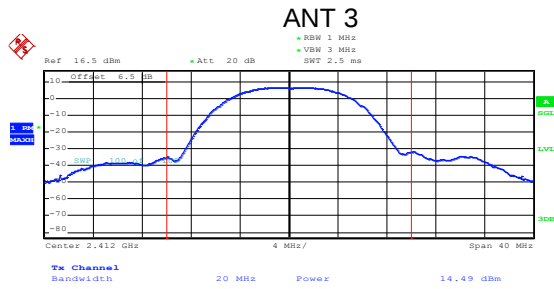


Date: 19.NOV.2019 18:04:53

Date: 19.NOV.2019 18:02:50

Lowest channel

Lowest channel

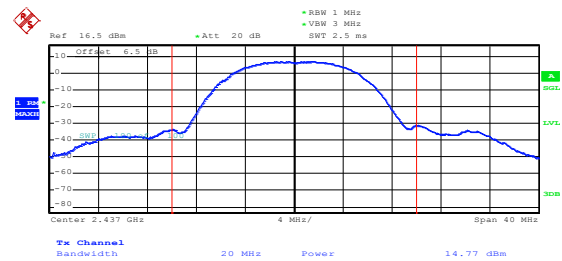
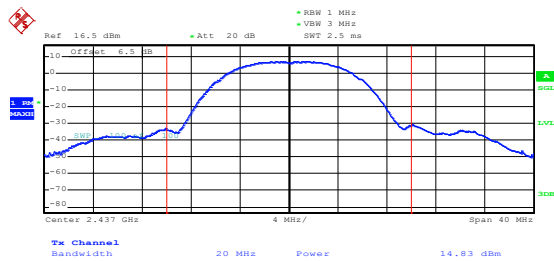


Date: 19.NOV.2019 18:05:23

Date: 19.NOV.2019 18:05:31

Middle channel

Middle channel

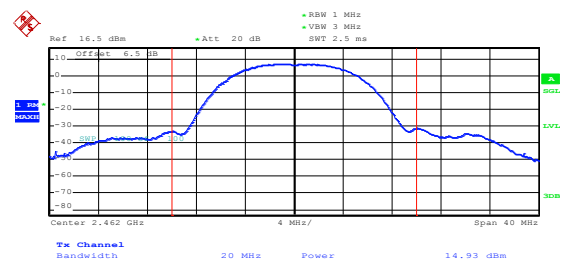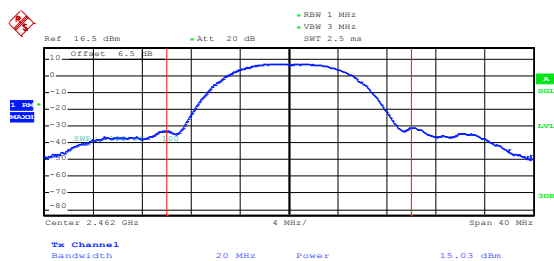

Date: 19.NOV.2019 18:05:48


Date: 19.NOV.2019 18:05:56

Highest channel

Highest channel


802.11g

ANT 3

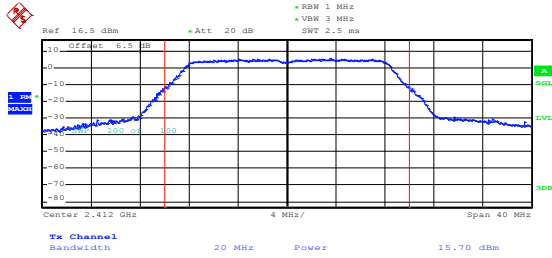


Date: 19.NOV.2019 18:06:18

ANT 4

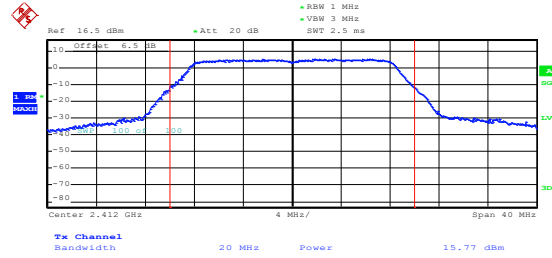


Date: 19.NOV.2019 18:06:23

Lowest channel

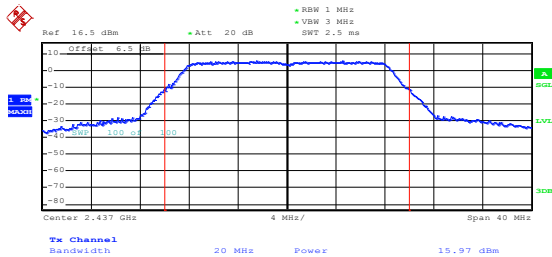


Date: 19.NOV.2019 18:06:42

Lowest channel

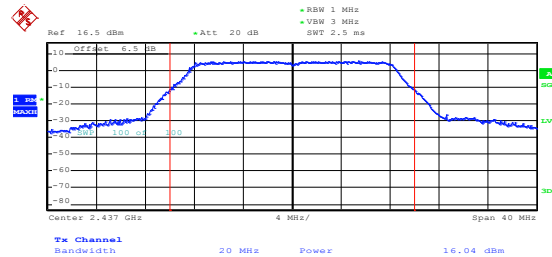


Date: 19.NOV.2019 18:06:48

Middle channel

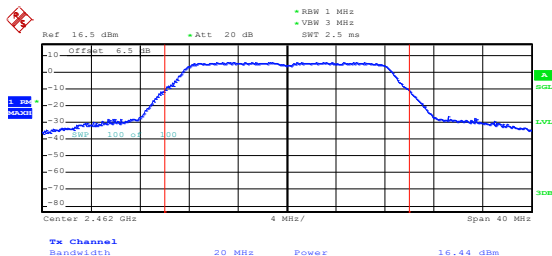

Date: 19.NOV.2019 18:07:07

Middle channel

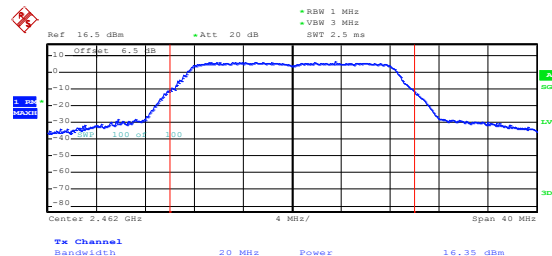


Date: 19.NOV.2019 18:07:12

Highest channel

Highest channel


802.11n20

ANT 3

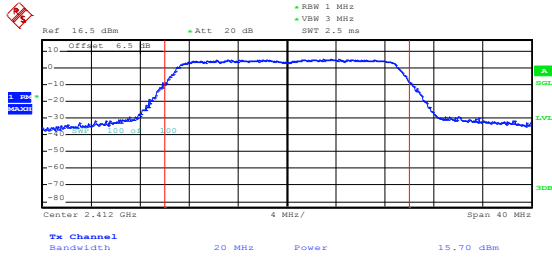


Date: 19.NOV.2019 18:07:31

ANT 4

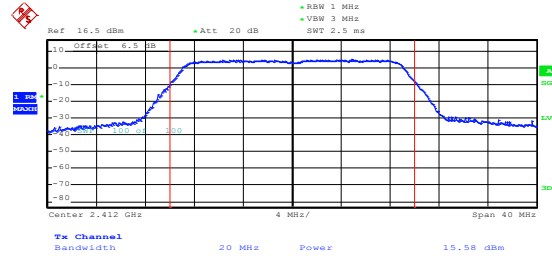


Date: 19.NOV.2019 18:07:37

Lowest channel

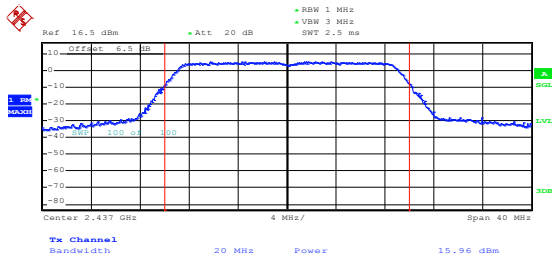


Date: 19.NOV.2019 18:07:51

Lowest channel

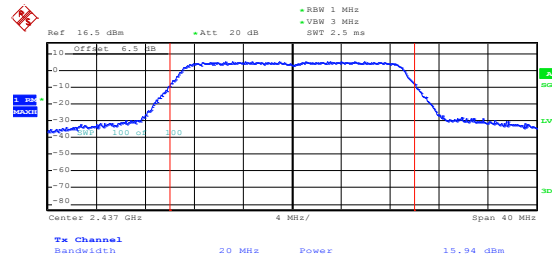


Date: 19.NOV.2019 18:07:56

Middle channel

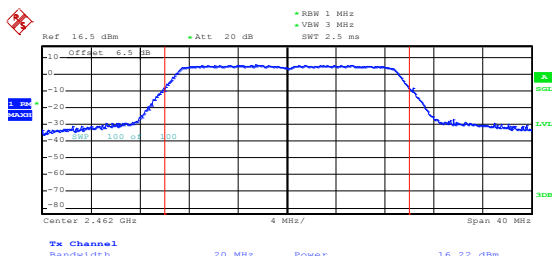

Date: 19.NOV.2019 18:08:11

Middle channel

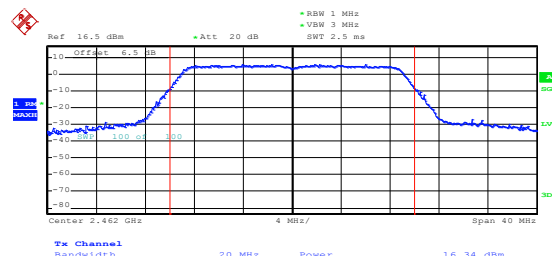


Date: 19.NOV.2019 18:08:16

Highest channel

Highest channel

6.4 Occupy Bandwidth

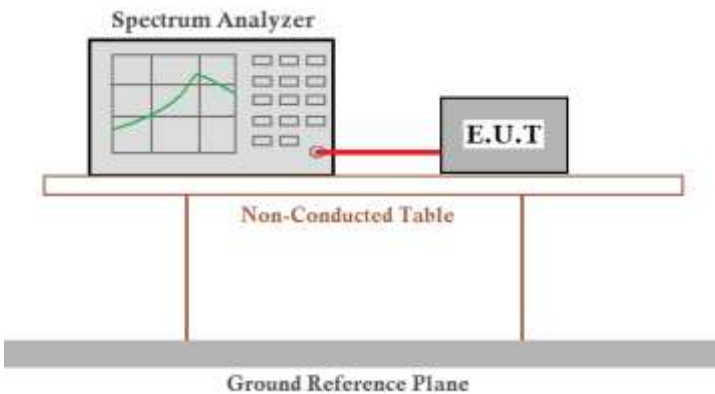Test Requirement:	FCC Part 15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB 558074
Limit:	>500kHz
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data

(Left module ANT1) :

Test CH	6dB Emission Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	9.20	16.56	17.84	>500	Pass
Middle	9.20	16.56	17.84		
Highest	9.20	16.56	17.76		
Test CH	99% Occupy Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	11.84	16.64	17.84	N/A	N/A
Middle	11.76	16.64	17.84		
Highest	11.84	16.64	17.84		


Remark: The ANT 1 and ANT 2 are the same chip control, pre-scan ANT 1 and ANT 2, found ANT 1 was worse case mode. The report only reflects the worst mode.


(Right module ANT3):


Test CH	6dB Emission Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)		
Lowest	9.20	16.56	17.76	>500	Pass
Middle	9.20	16.56	17.84		
Highest	9.28	16.56	17.84		
Test CH	99% Occupy Bandwidth (MHz)			Limit(kHz)	Result
	802.11b	802.11g	802.11n(HT20)		
Lowest	11.84	16.64	17.84	N/A	N/A
Middle	11.84	16.64	17.84		
Highest	11.92	16.64	17.76		

Remark: The ANT 3 and ANT 4 are the same chip control, pre-scan ANT 3 and ANT 4, found ANT 3 was worse case mode. The report only reflects the worst mode.


Test plot as follows (Left module ANT1):

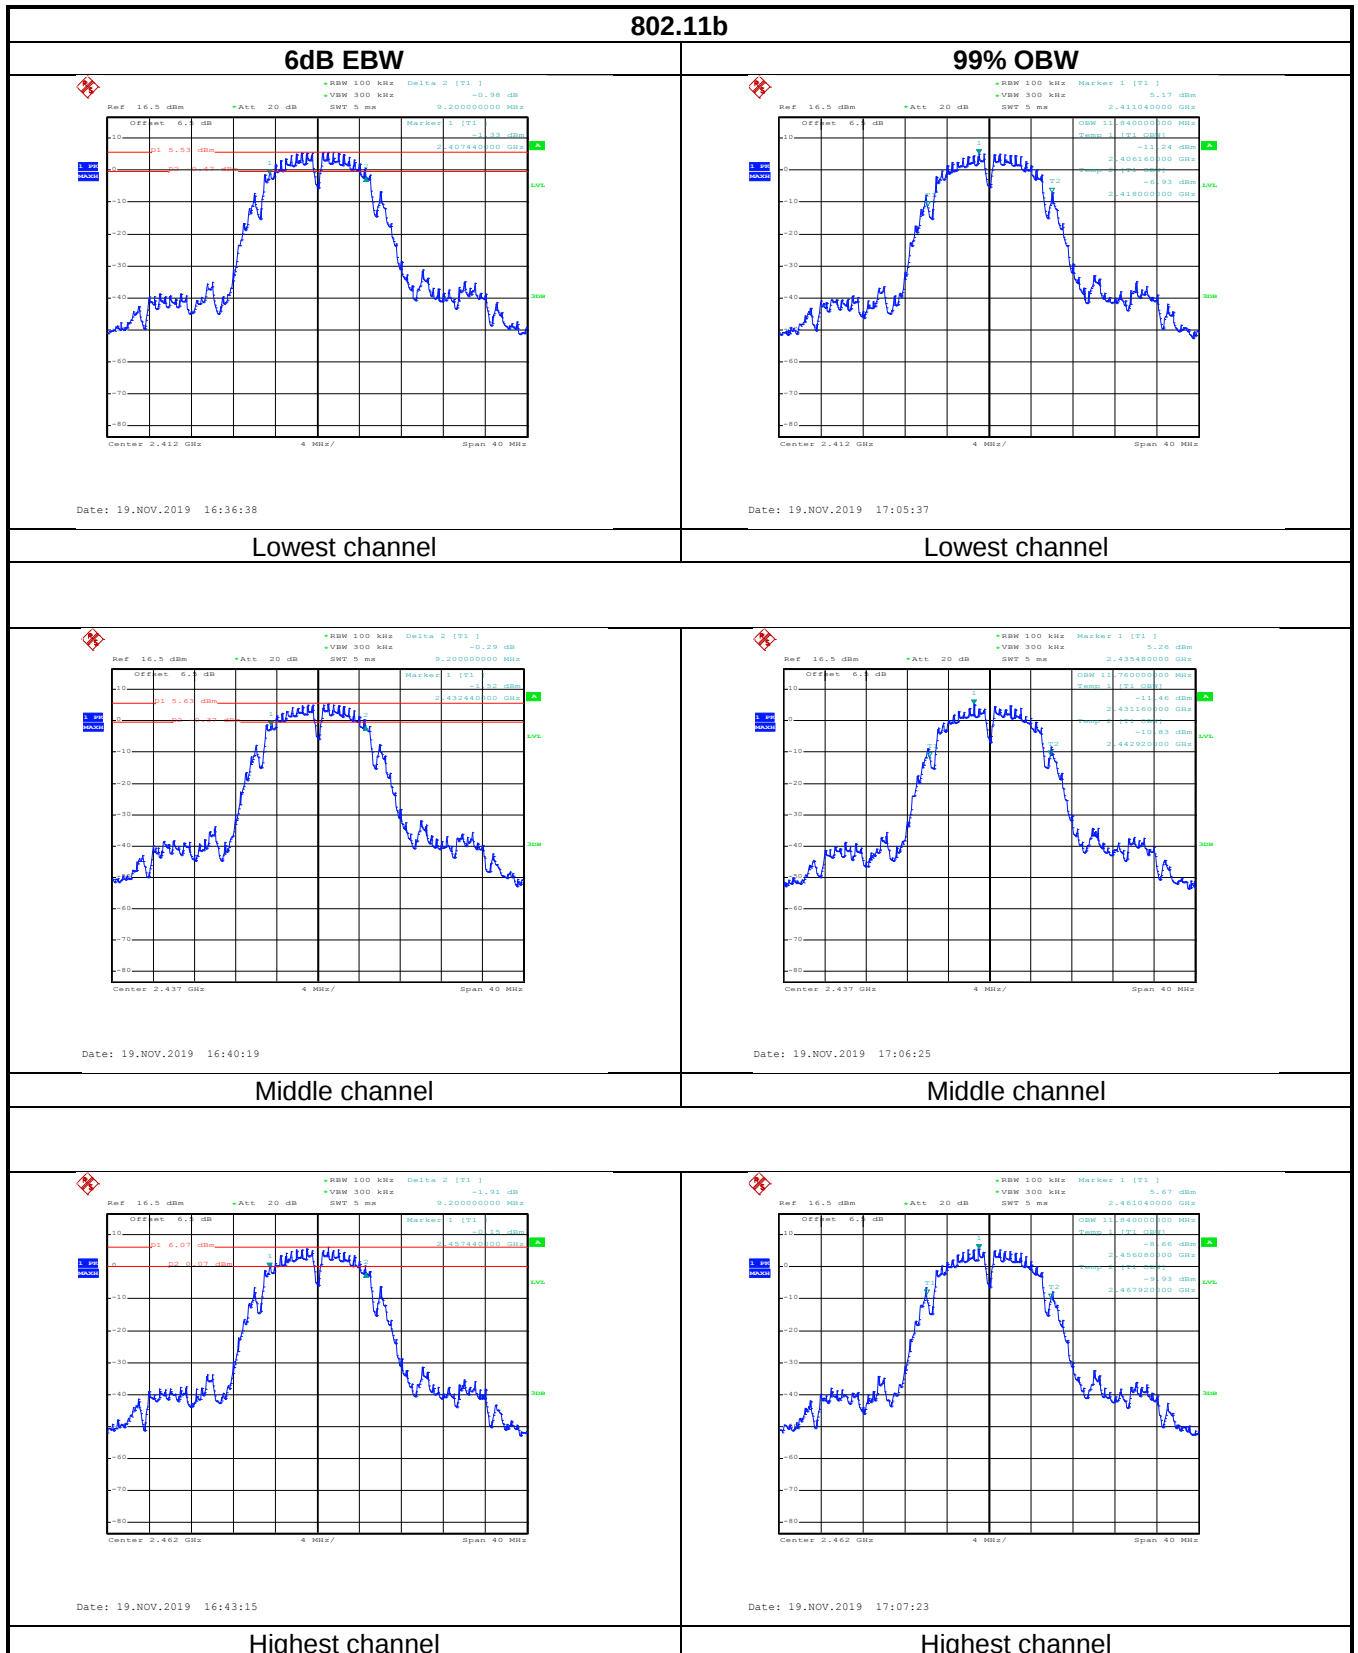


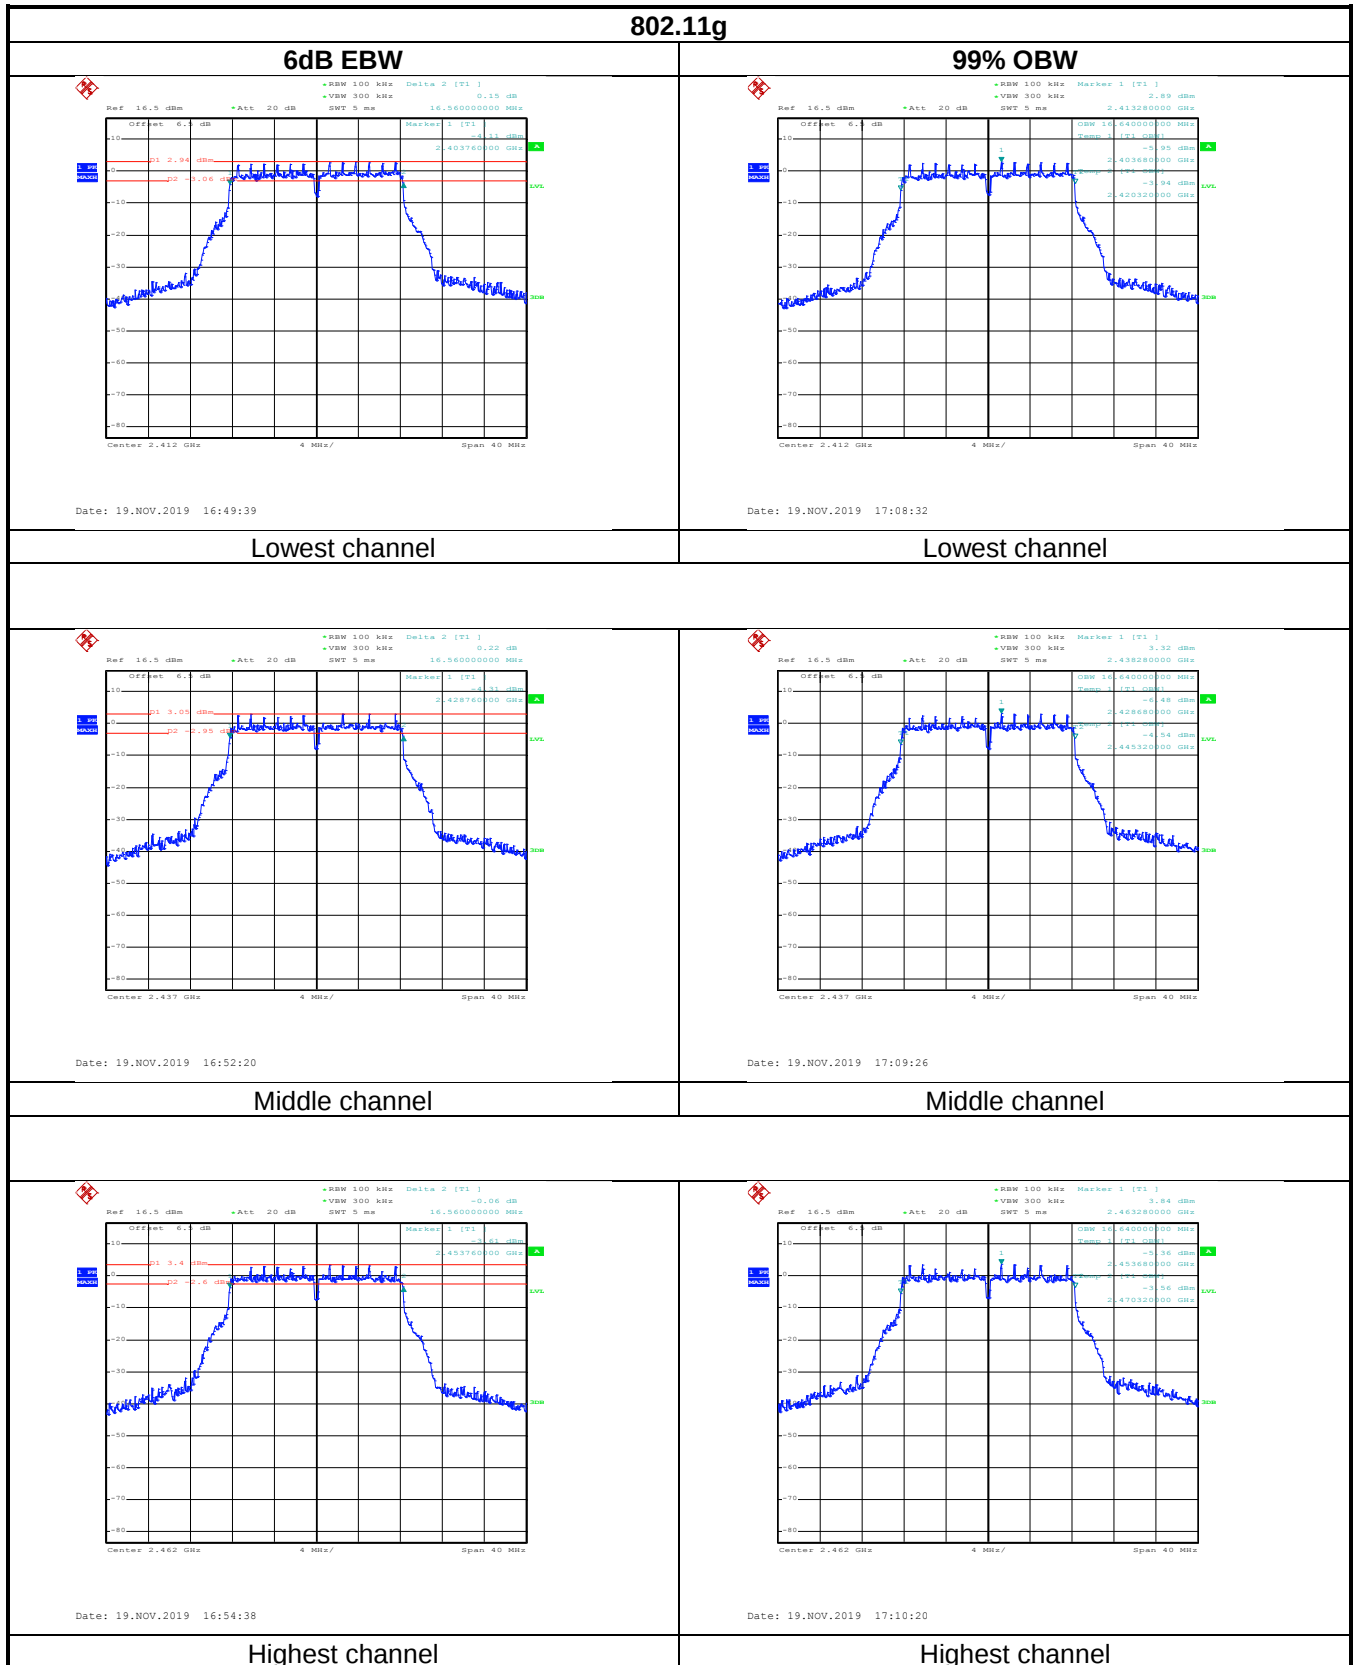


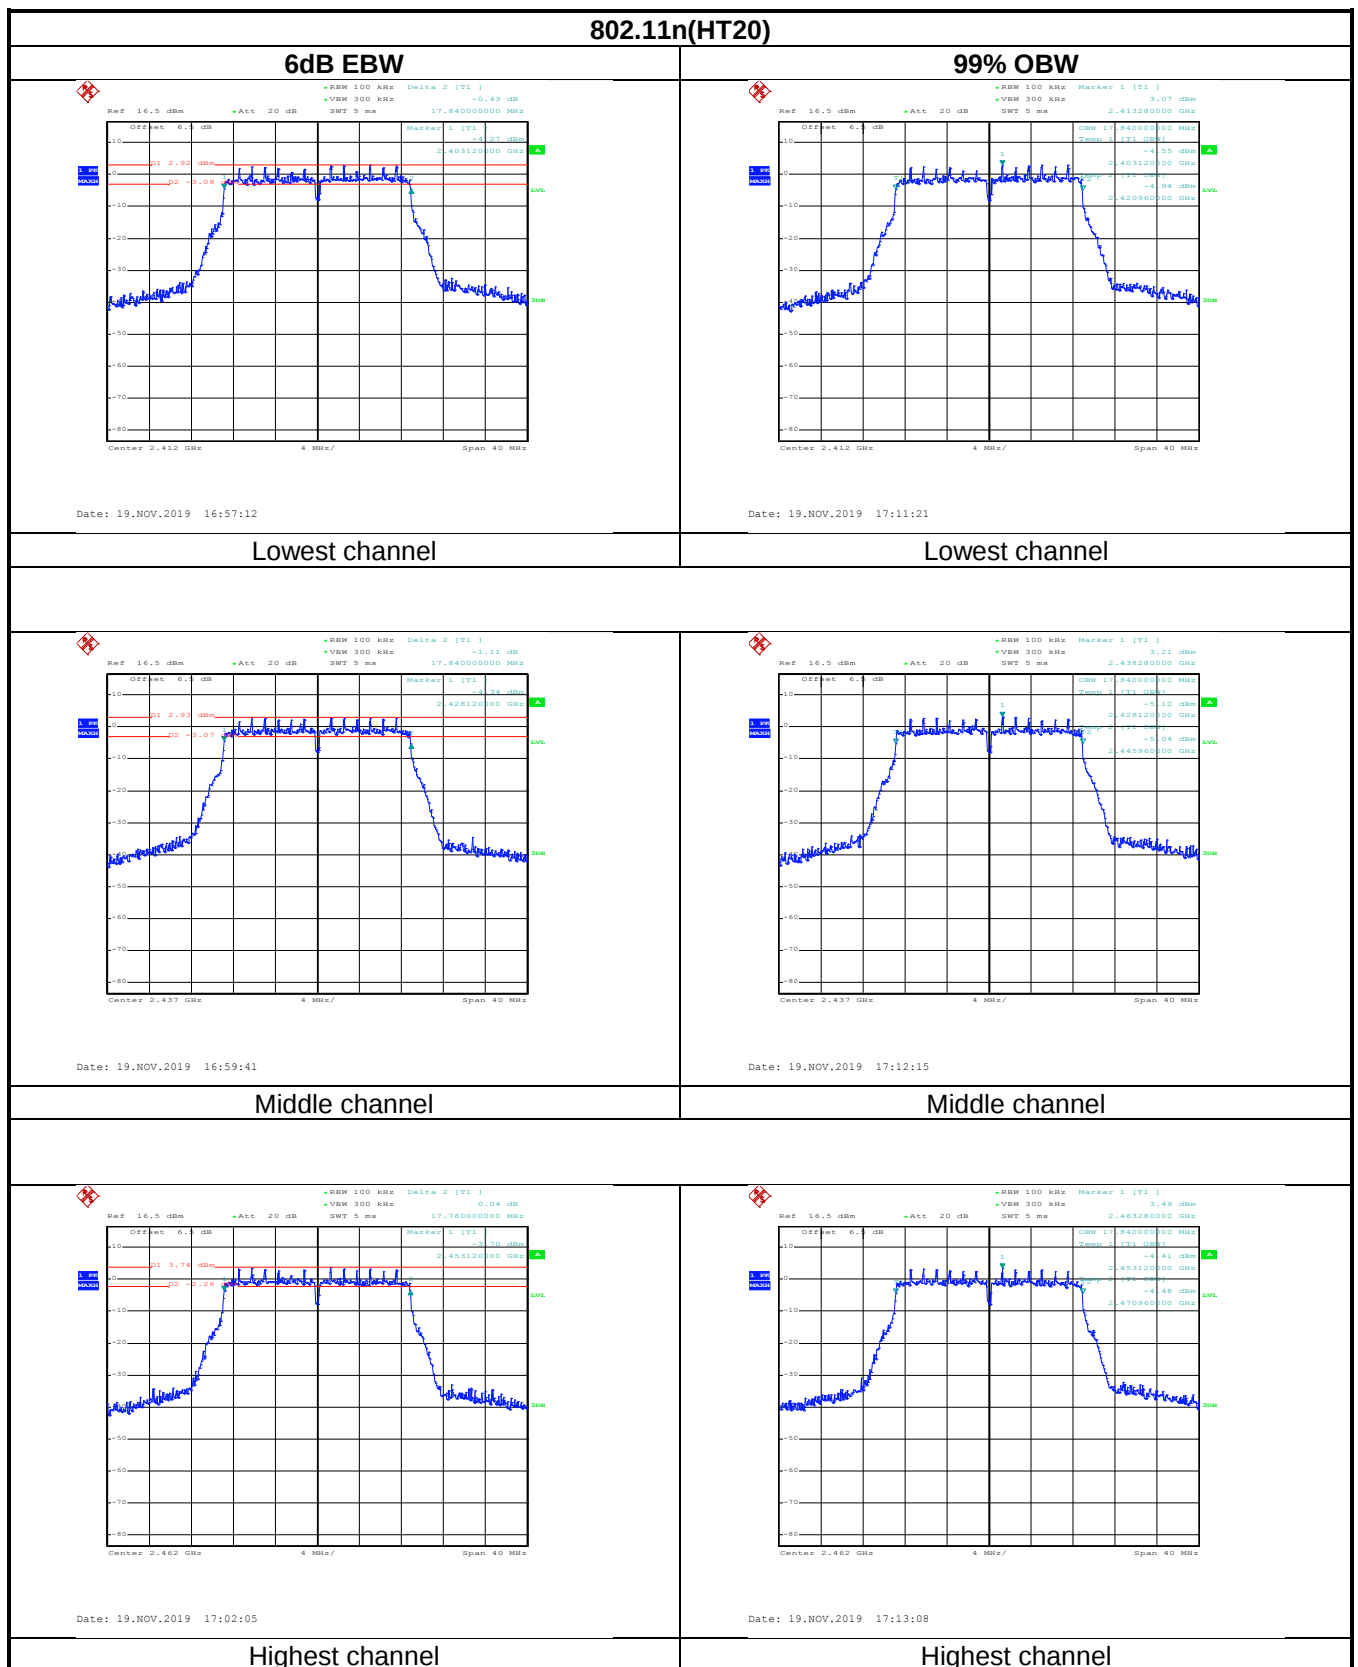


(Right module ANT3):

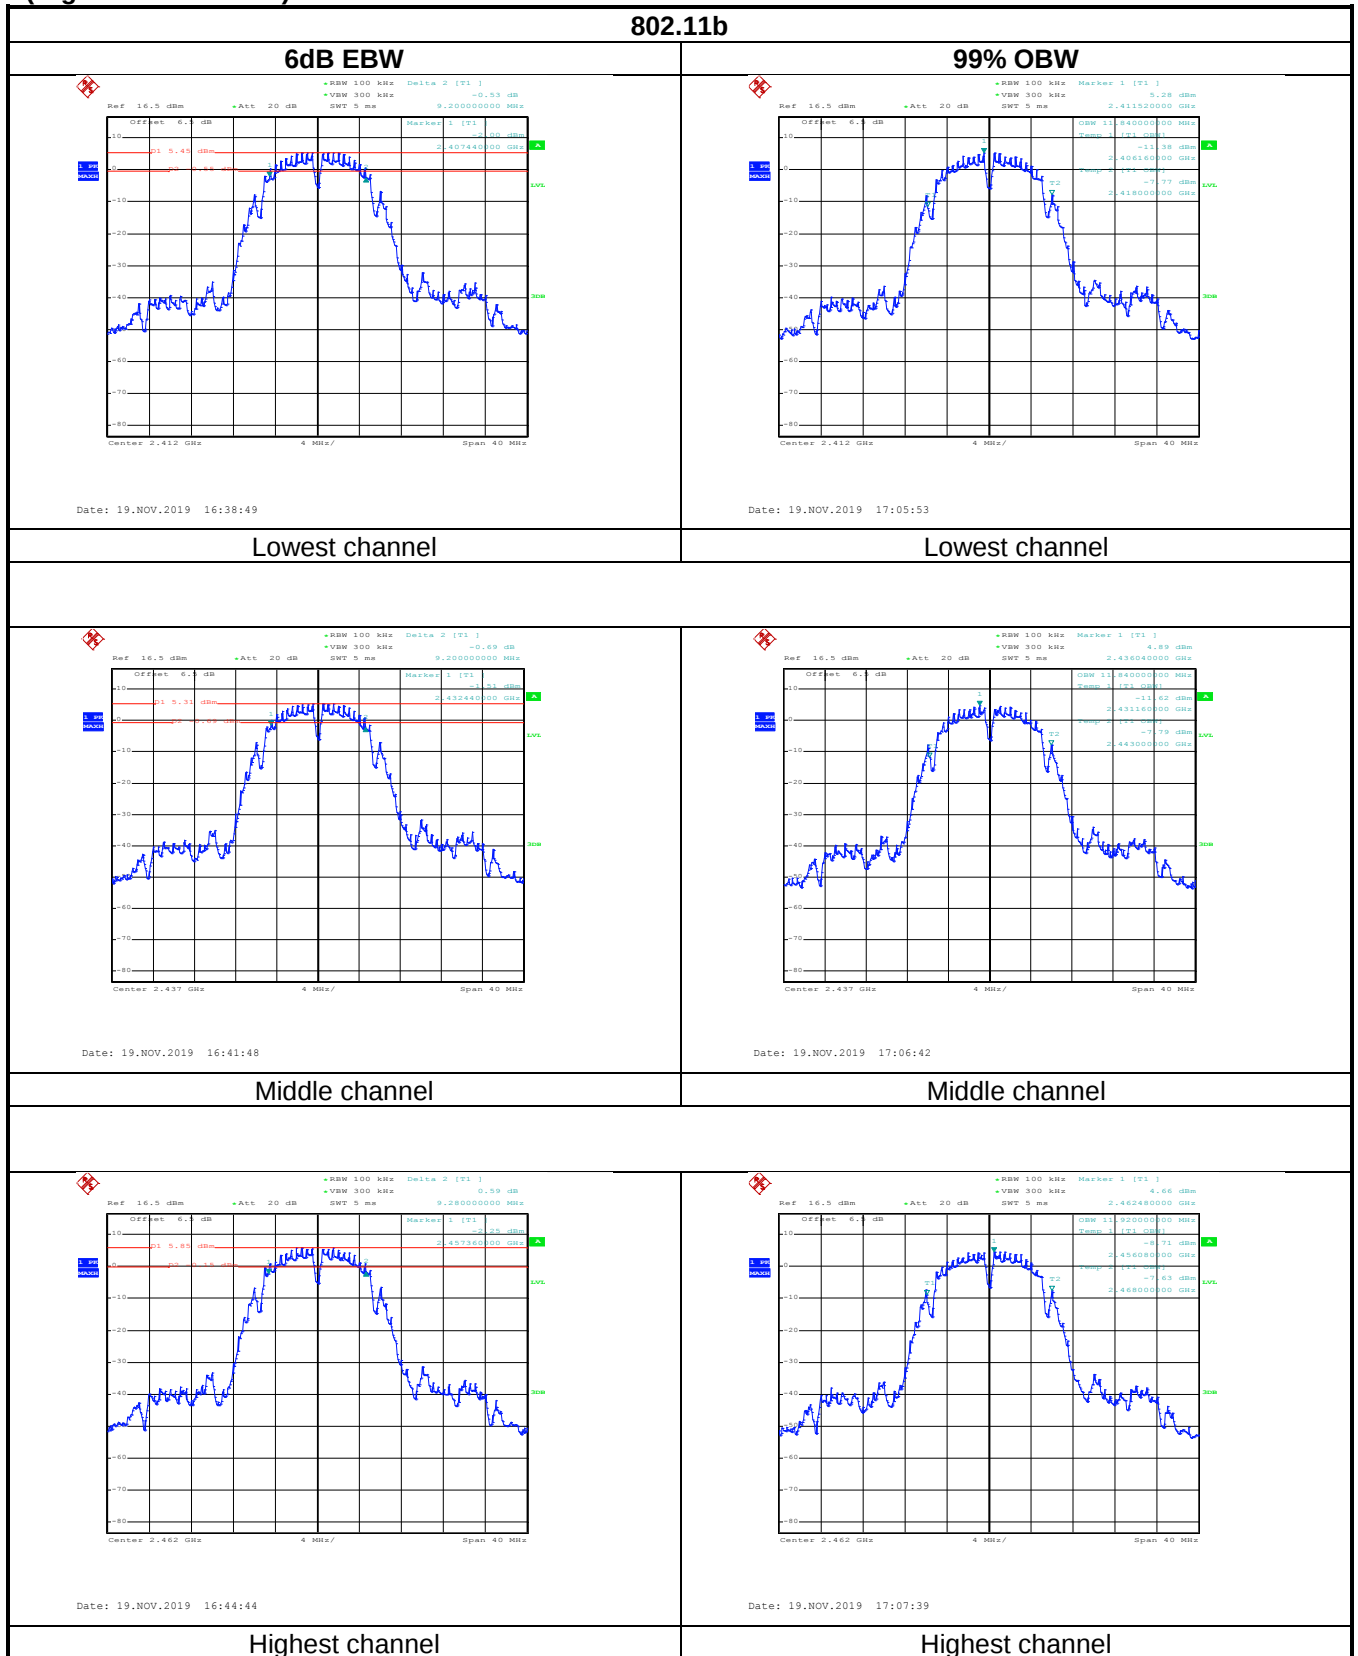

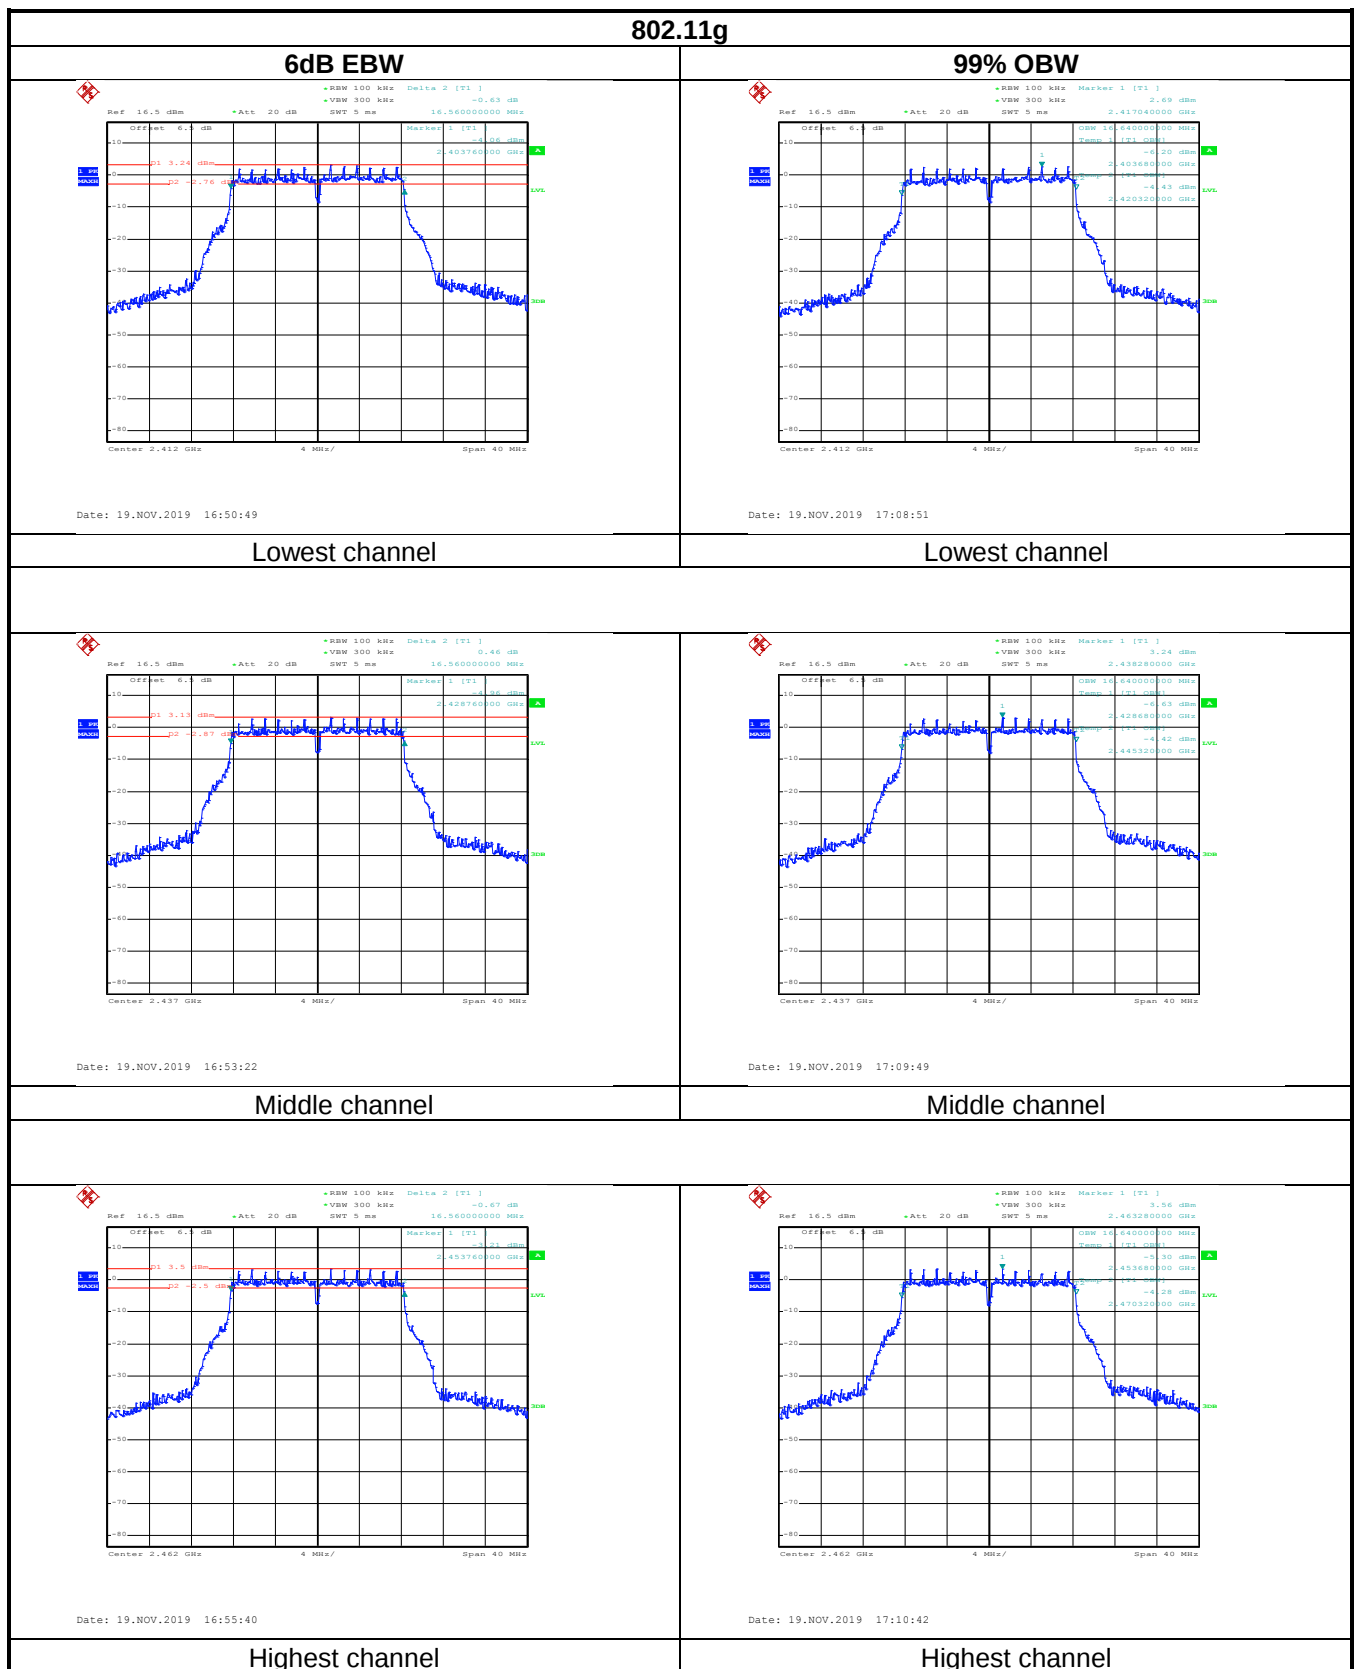

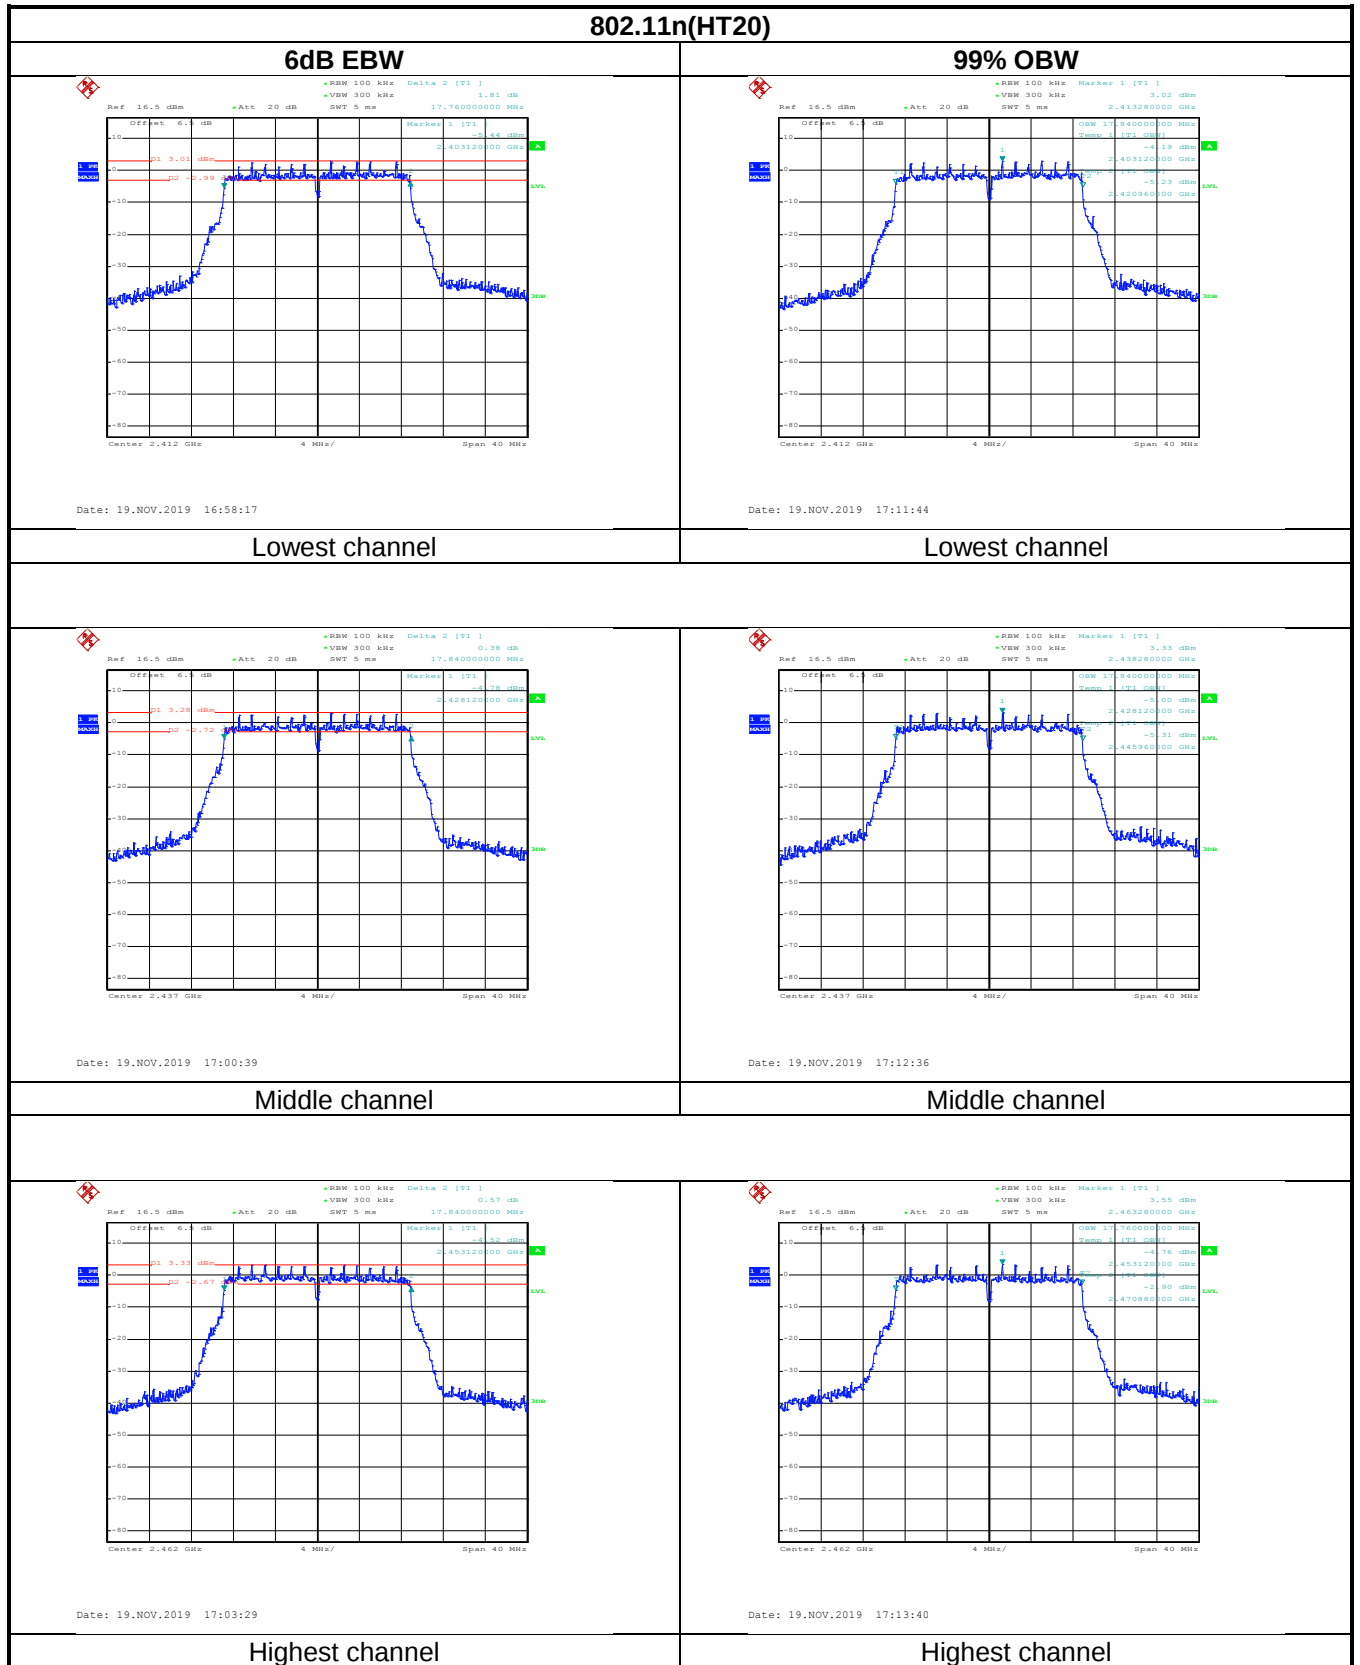

6.5 Power Spectral Density

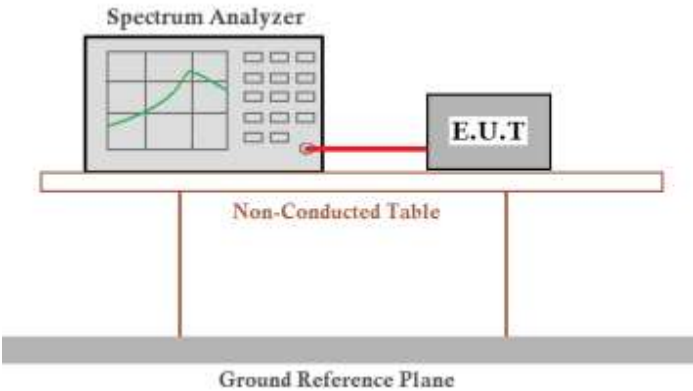Test Requirement:	FCC Part 15 C Section 15.247 (e)
Limit:	8dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Left module:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX1	4.39	/	7.35	Pass
		TX2	4.94			
	Middle	TX1	5.50	/	7.35	Pass
		TX2	5.01			
	Highest	TX1	5.09	/	7.35	Pass
		TX2	5.06			
802.11g	Lowest	TX1	3.25	/	7.35	Pass
		TX2	3.28			
	Middle	TX1	2.97	/	7.35	Pass
		TX2	3.34			
	Highest	TX1	3.22	/	7.35	Pass
		TX2	3.26			
802.11n(HT20) (MIMO)	Lowest	TX1	3.35	6.34	7.35	Pass
		TX2	3.30			
	Middle	TX1	3.14	6.21	7.35	Pass
		TX2	3.25			
	Highest	TX1	2.95	6.06	7.35	Pass
		TX2	3.15			
Remark:						
1. Because transmit signals are correlated, Directional gain = $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$,So the Directional gain= $10 \log[(10^{(2.3/20)} + 10^{(4.8/20)})^2/2]=6.65\text{dBi}$.						
2. The directional Gain of antenna is greater than 6 dBi, so the limit of PSD is 7.35 dBm.						


Right module:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX3	5.15	/	7.52	Pass
		TX4	5.49			
	Middle	TX3	5.04	/	7.52	Pass
		TX4	4.97			
	Highest	TX3	5.40	/	7.52	Pass
		TX4	5.49			
802.11g	Lowest	TX3	3.10	/	7.52	Pass
		TX4	2.99			
	Middle	TX3	3.05	/	7.52	Pass
		TX4	3.32			
	Highest	TX3	3.53	/	7.52	Pass
		TX4	3.39			
802.11n(HT20)	Lowest	TX3	2.92	5.90	7.52	Pass
		TX4	2.85			
	Middle	TX3	3.09	6.24	7.52	Pass
		TX4	3.36			
	Highest	TX3	3.07	6.20	7.52	Pass
		TX4	3.31			

Remark:

1. Because transmit signals are correlated, Directional gain = $10 \log[(10^{(G1/20)} + 10^{(G2/20)} + \dots + 10^{(GN/20)})^2 / N_{ANT}]$, So the Directional gain = $10 \log[(10^{(2.3/20)} + 10^{(4.8/20)})^2 / 2] = 6.48 \text{ dBi}$.
2. The directional Gain of antenna is greater than 6 dBi, so the limit of PSD is 7.52 dBm.


Test plot as follows (Left module):

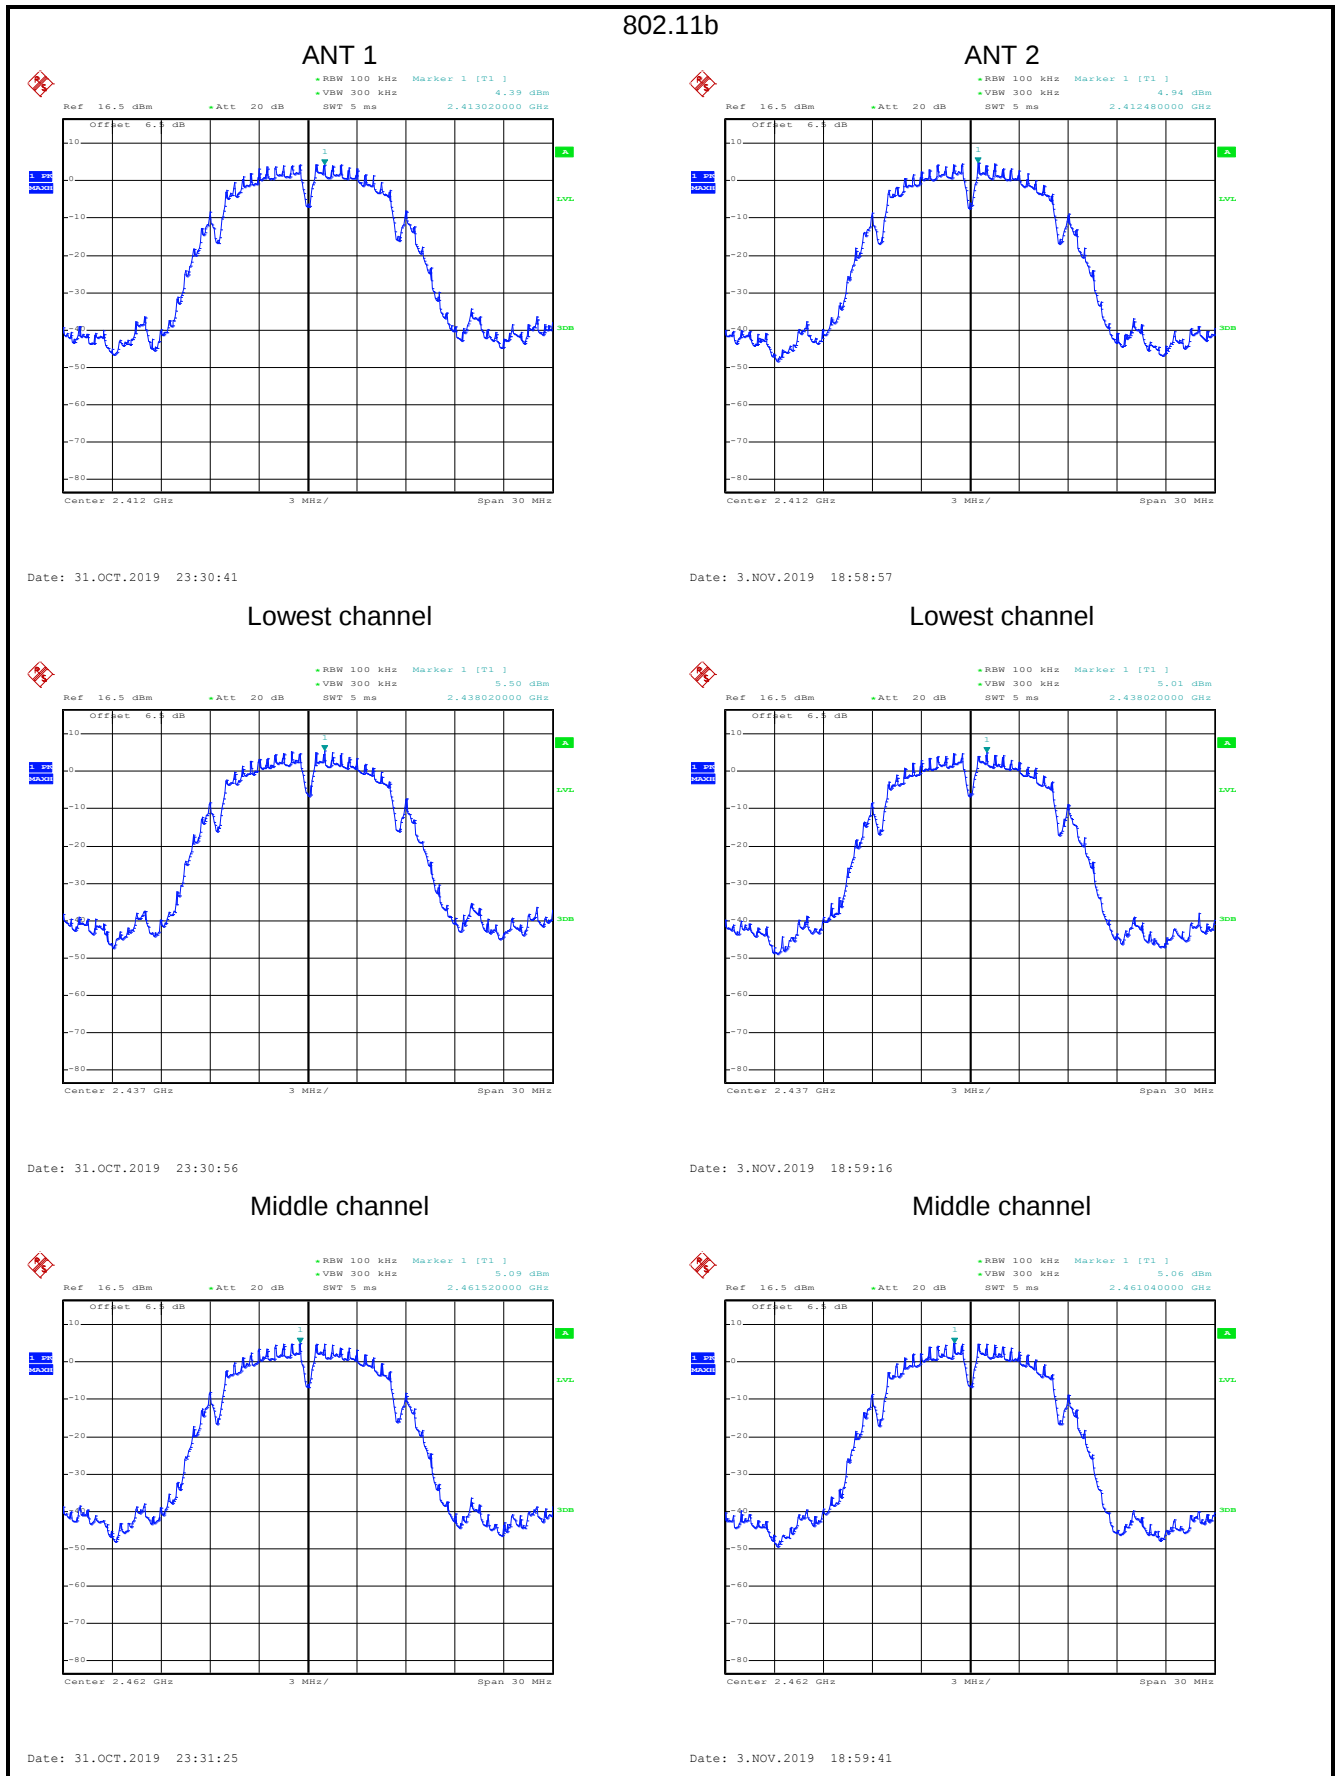


Highest channel

802.11g

Highest channel

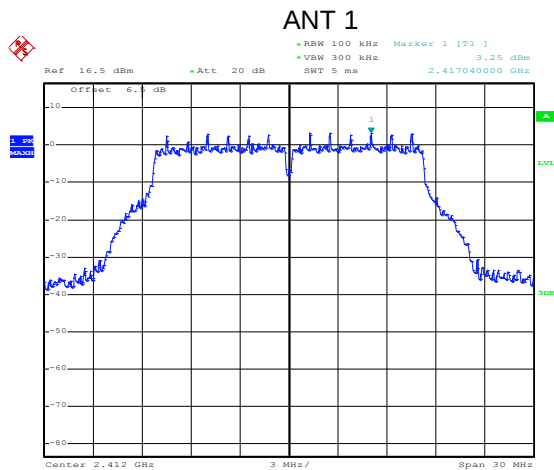


Date: 31.OCT.2019 23:29:32

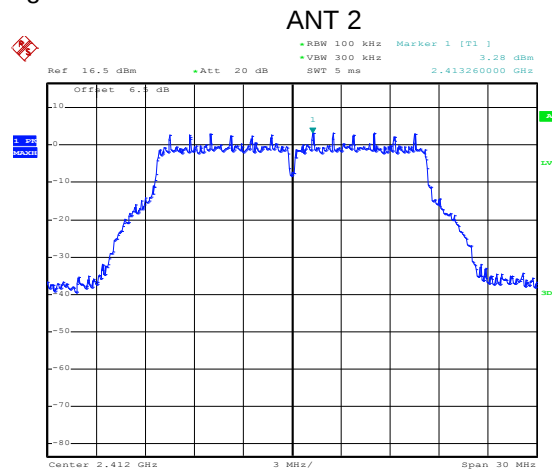


Date: 3.NOV.2019 18:57:05

Lowest channel

Lowest channel

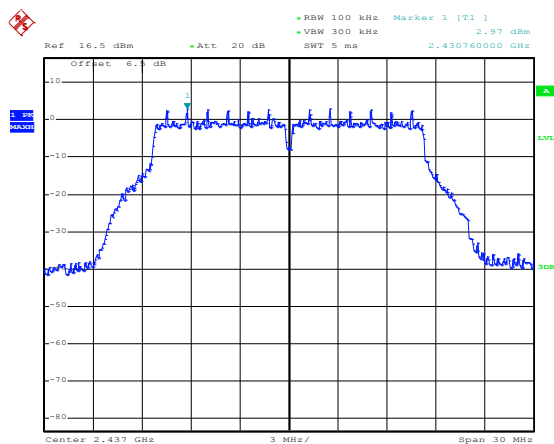


Date: 31.OCT.2019 23:29:52

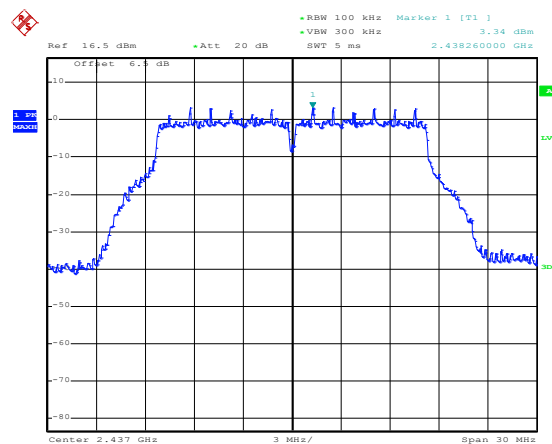


Date: 3.NOV.2019 18:57:35

Middle channel

Middle channel

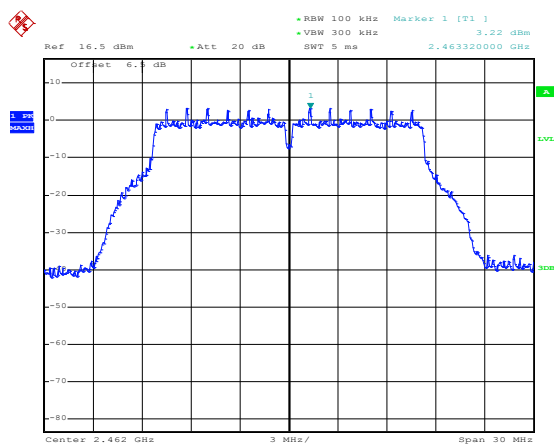

Date: 31.OCT.2019 23:30:13

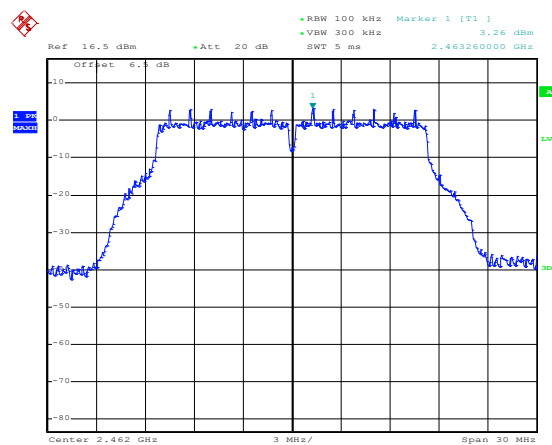


Date: 3.NOV.2019 18:57:57

Highest channel

Highest channel


802.11n20

ANT 1

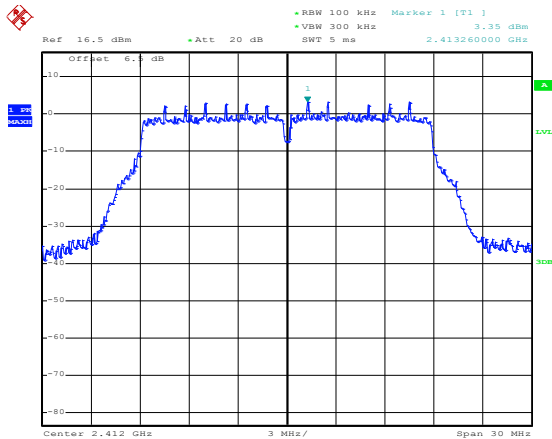


Date: 31.OCT.2019 23:28:32

ANT 2

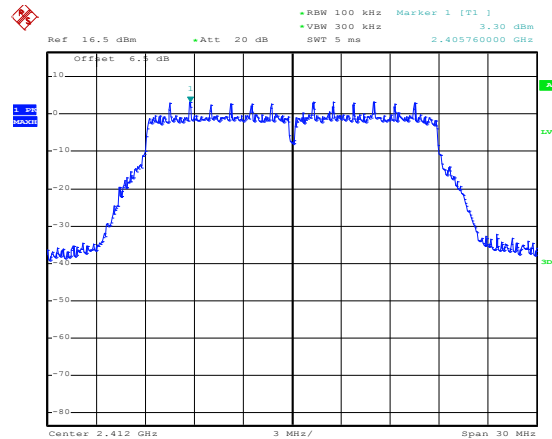


Date: 3.NOV.2019 18:56:03

Lowest channel

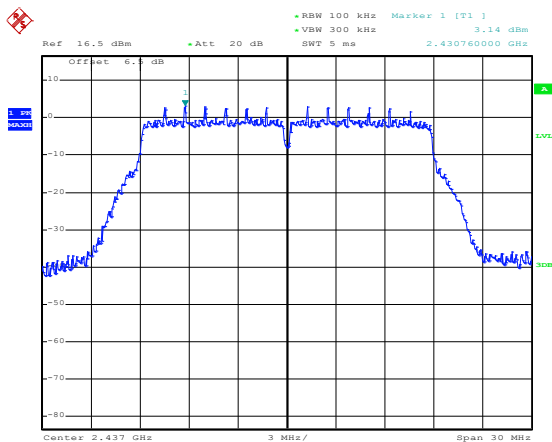


Date: 31.OCT.2019 23:28:11

Lowest channel

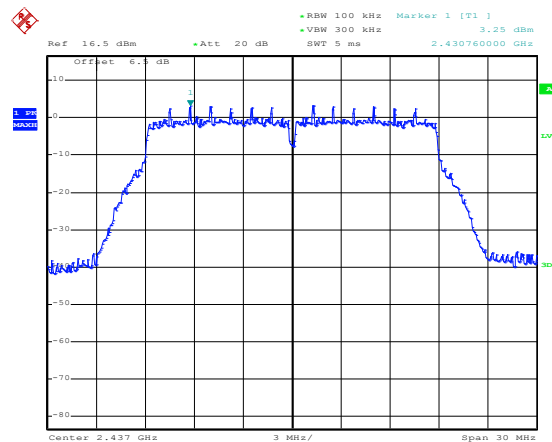


Date: 3.NOV.2019 18:55:34

Middle channel

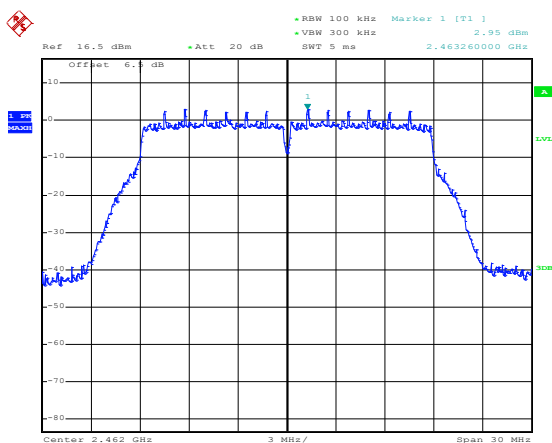

Date: 31.OCT.2019 23:27:48

Middle channel

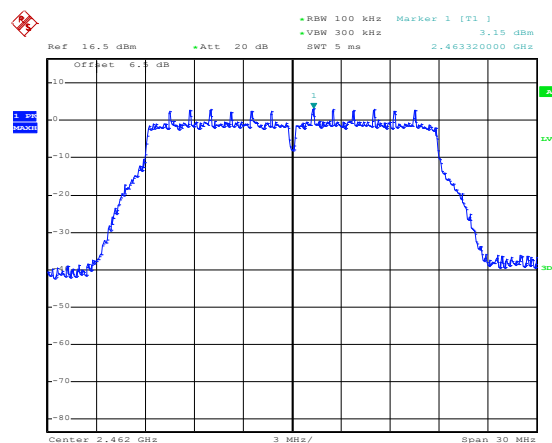

Date: 3.NOV.2019 18:55:11


Highest channel

Highest channel

(Right module):


802.11b

ANT 3

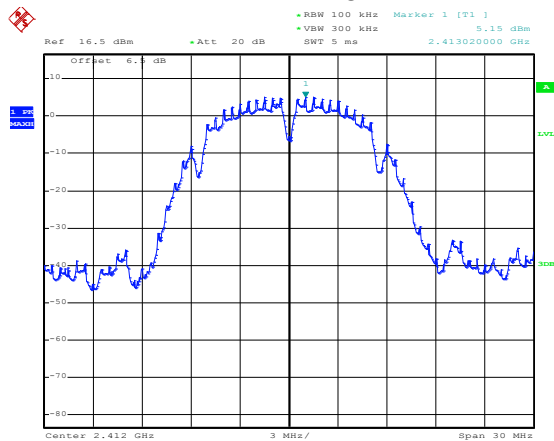


Date: 19.NOV.2019 17:18:45

ANT 4

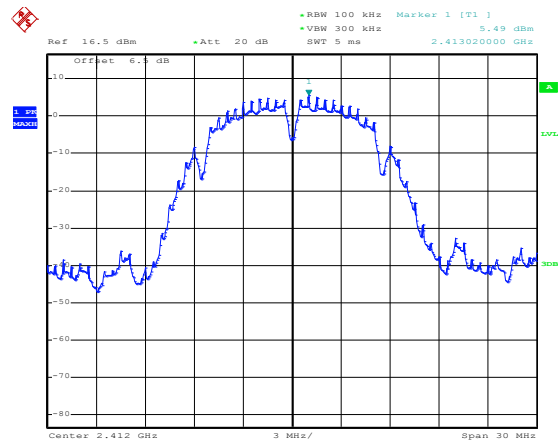


Date: 19.NOV.2019 17:19:17

Lowest channel

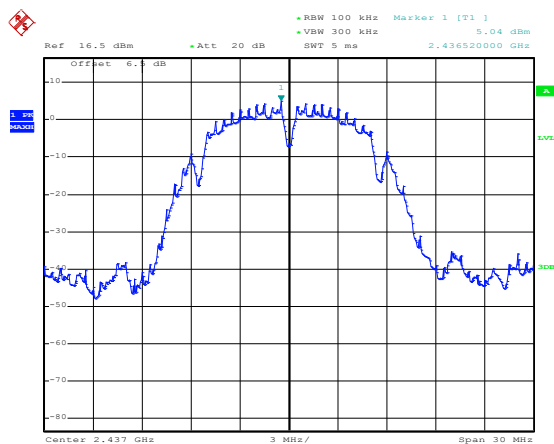


Date: 19.NOV.2019 17:20:02

Lowest channel

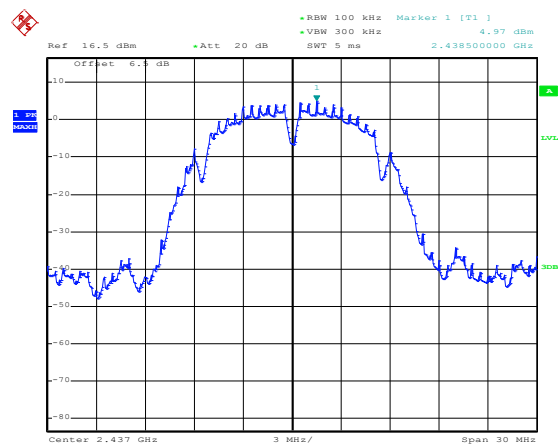


Date: 19.NOV.2019 17:20:16

Middle channel

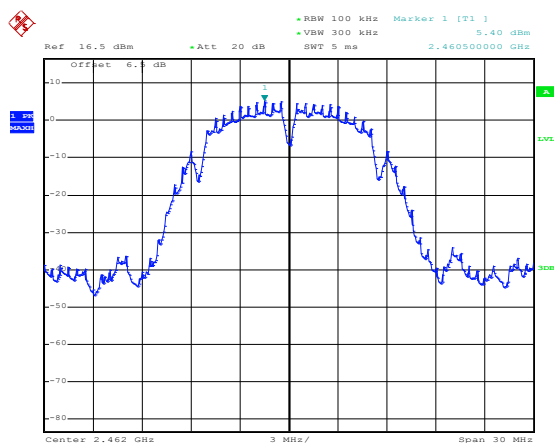

Date: 19.NOV.2019 17:20:38

Middle channel

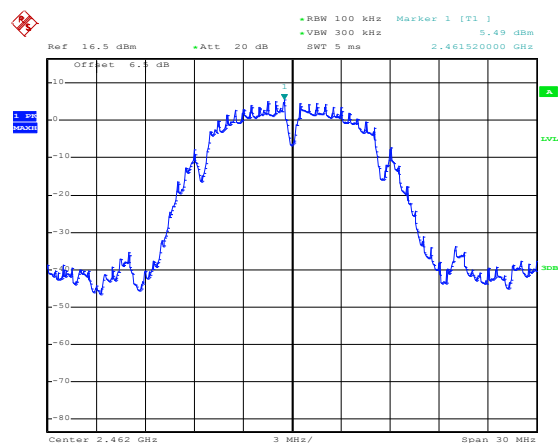


Date: 19.NOV.2019 17:20:52

Highest channel

Highest channel


802.11g

ANT 3

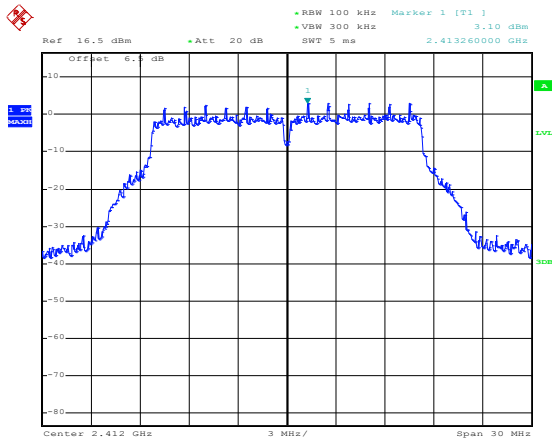


Date: 19.NOV.2019 17:21:42

ANT 4

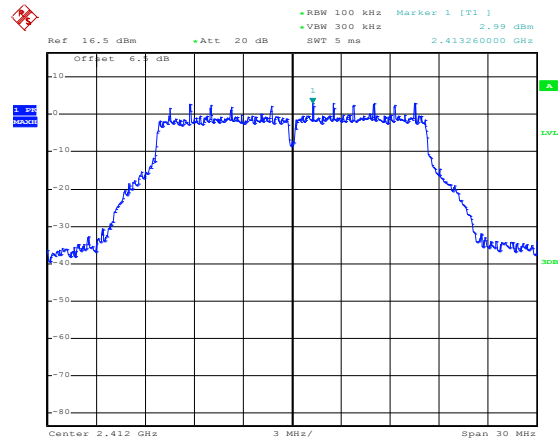


Date: 19.NOV.2019 17:22:03

Lowest channel

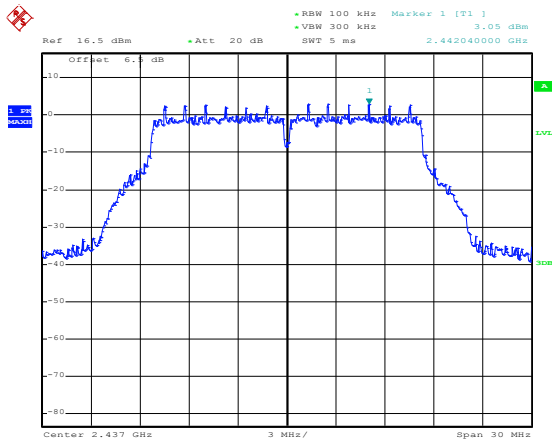


Date: 19.NOV.2019 17:22:27

Lowest channel

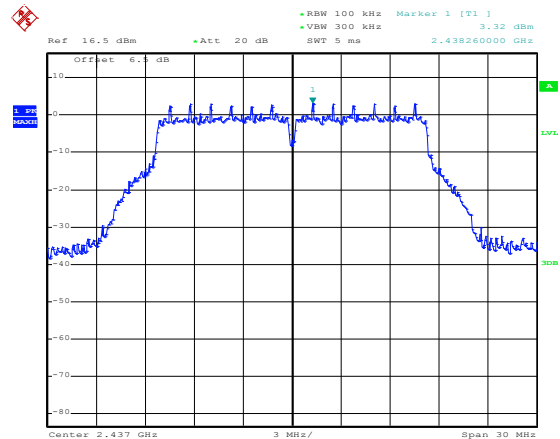


Date: 19.NOV.2019 17:22:57

Middle channel

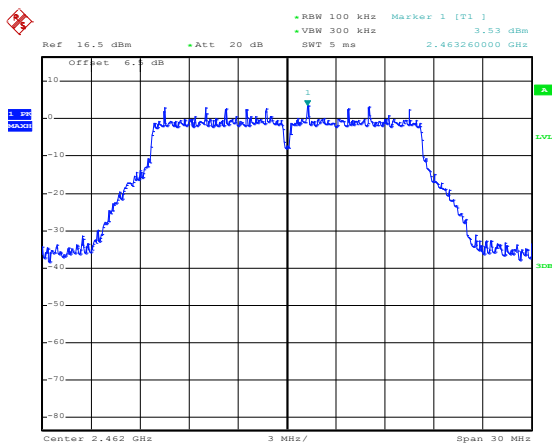

Date: 19.NOV.2019 17:23:17

Middle channel

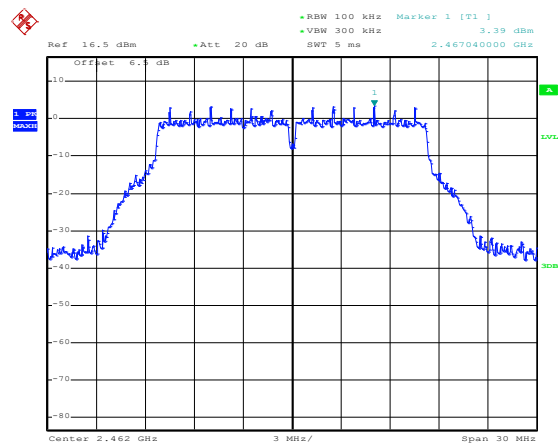


Date: 19.NOV.2019 17:23:32

Highest channel

Highest channel


802.11n20

ANT 3

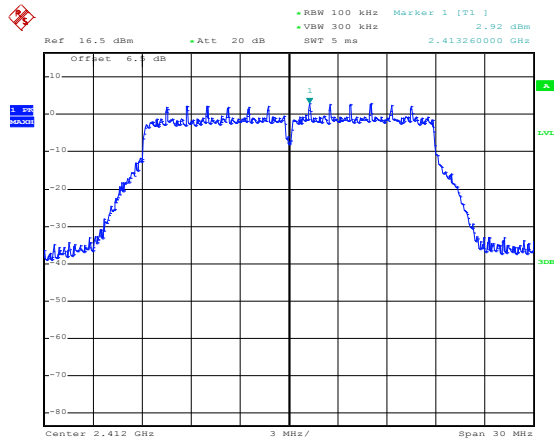


Date: 19.NOV.2019 17:24:05

ANT 4

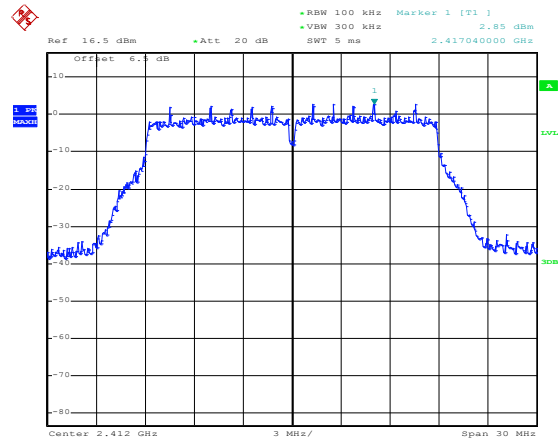


Date: 19.NOV.2019 17:24:23

Lowest channel

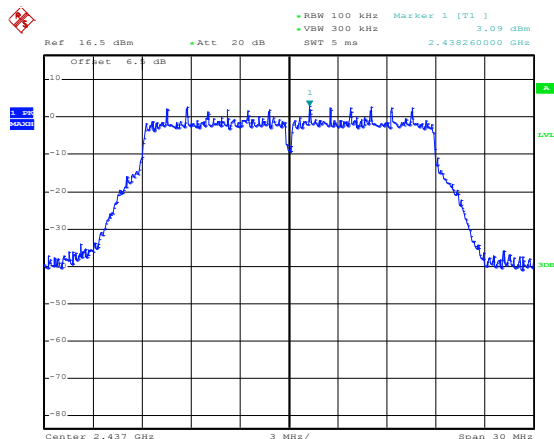


Date: 19.NOV.2019 17:24:53

Lowest channel

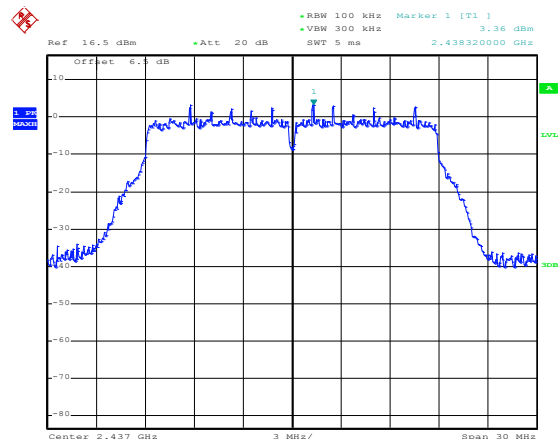


Date: 19.NOV.2019 17:25:09

Middle channel

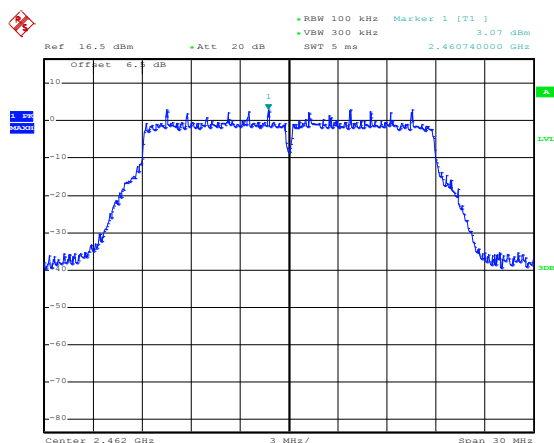

Date: 19.NOV.2019 17:25:31

Middle channel

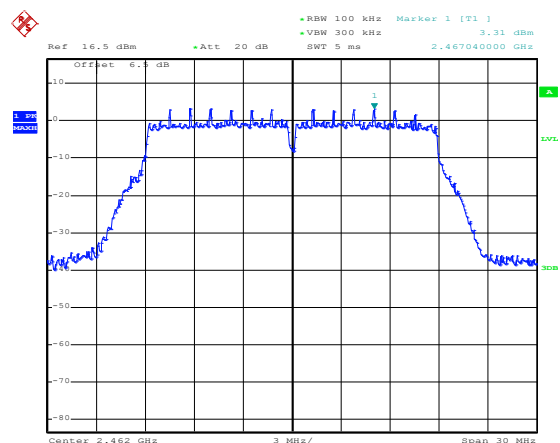


Date: 19.NOV.2019 17:25:44

Highest channel


Highest channel

6.6 Band Edge

6.6.1 Conducted Emission Method

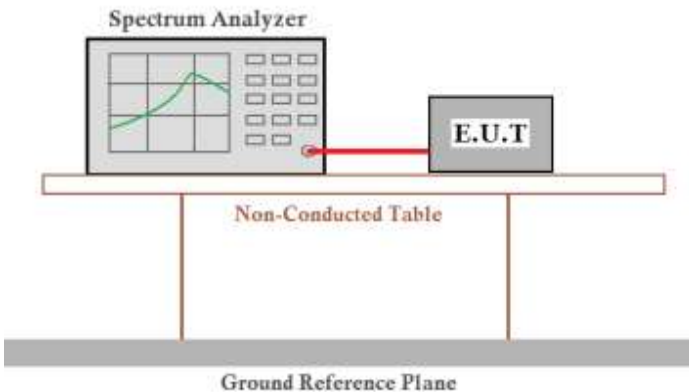
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows (Left module):

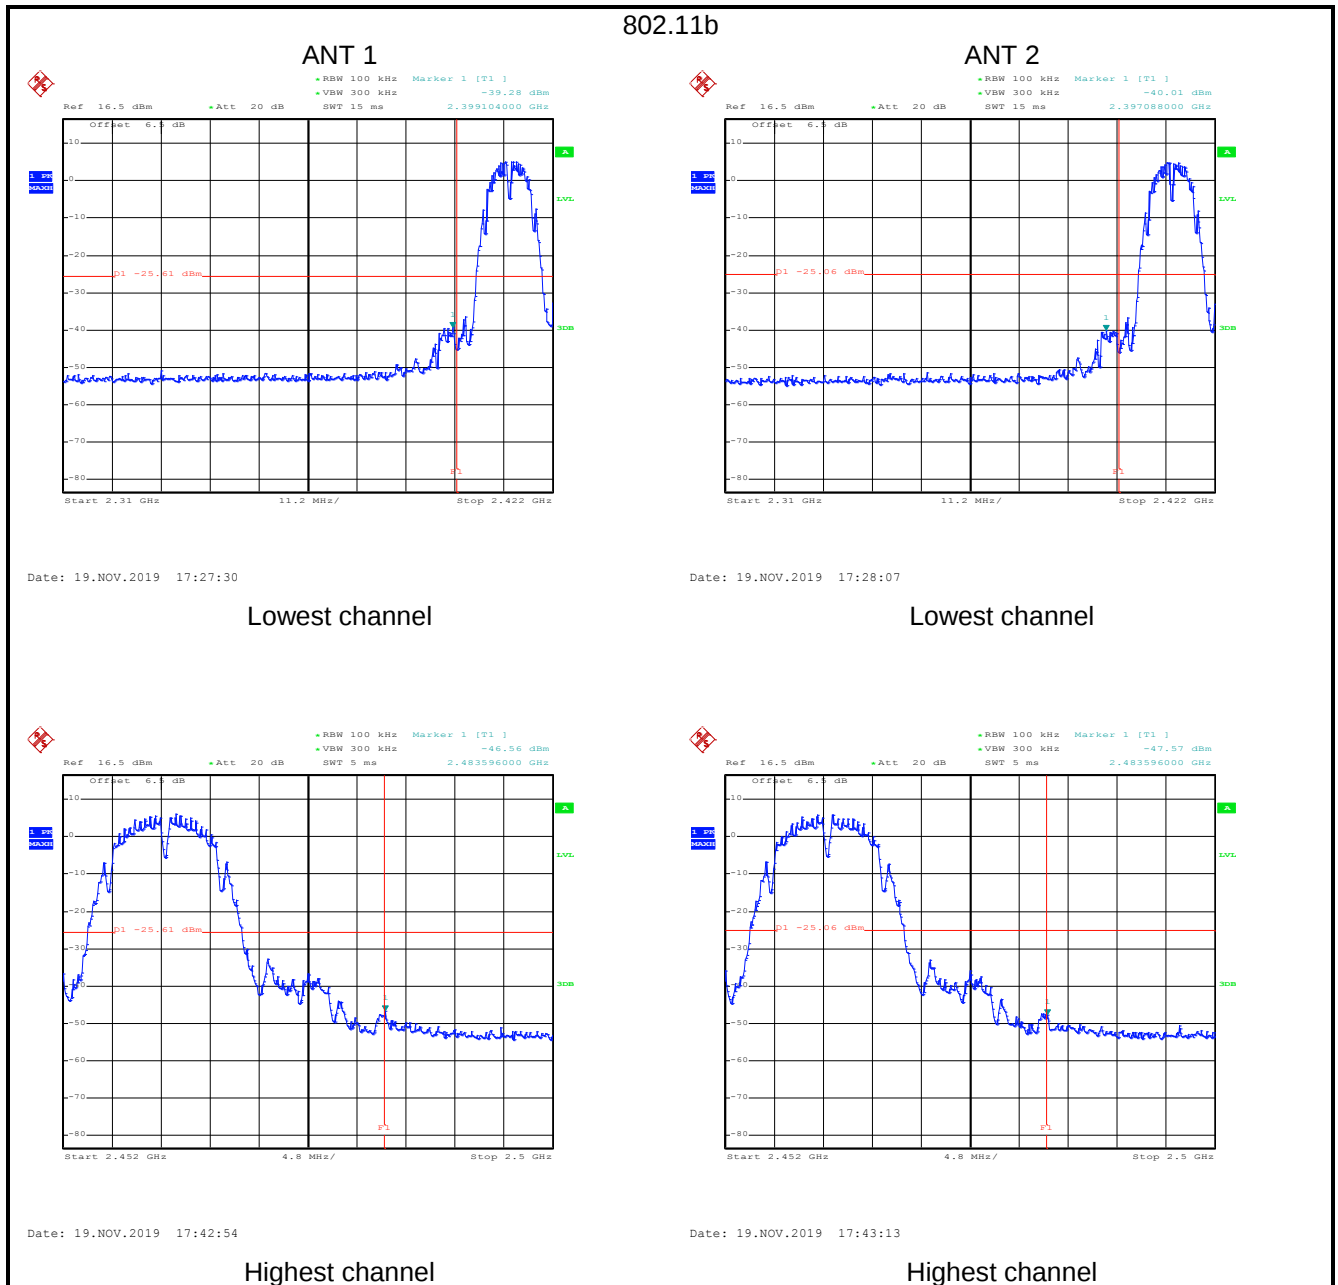

802.11g


ANT 1

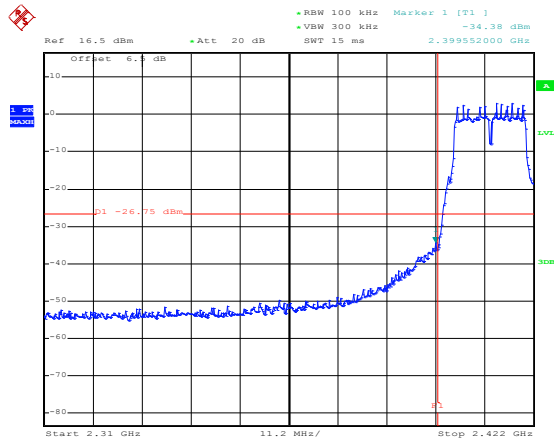

Date: 19.NOV.2019 17:30:10


Lowest channel

ANT 2

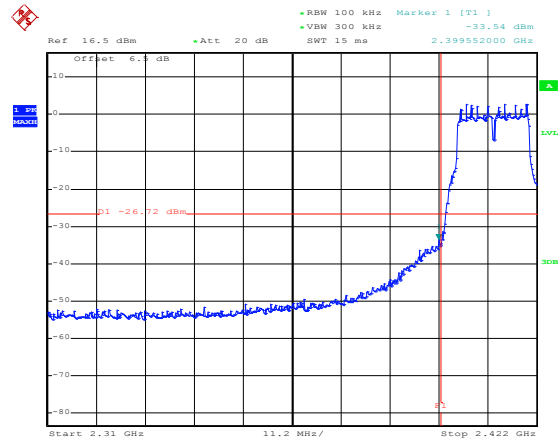


Date: 19.NOV.2019 17:30:32

Lowest channel

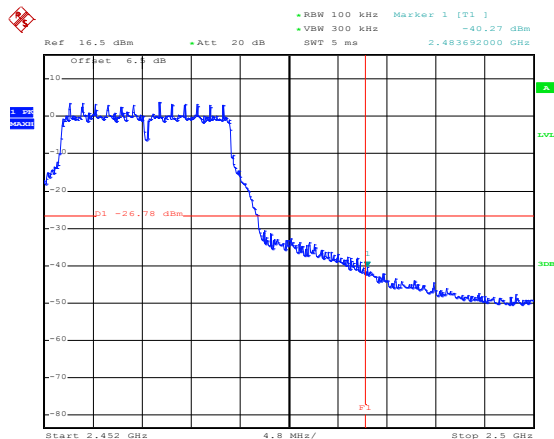

Date: 19.NOV.2019 17:44:47


Highest channel

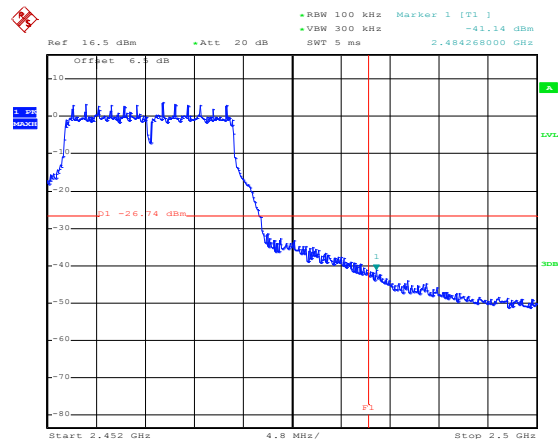

Date: 19.NOV.2019 17:45:05


Highest channel

802.11n20(MIMO)

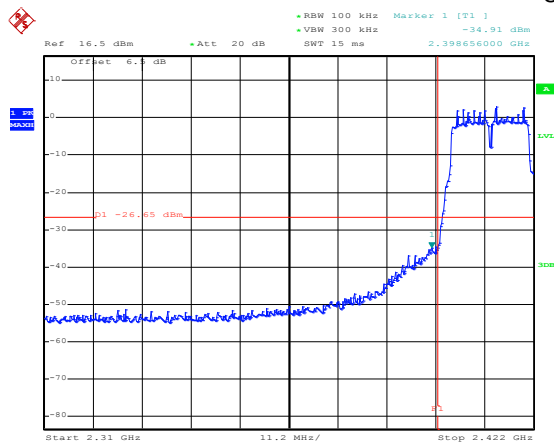

Date: 19.NOV.2019 17:32:20

Lowest channel

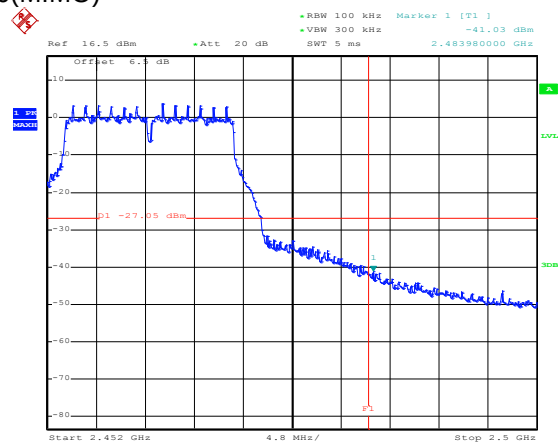


Date: 19.NOV.2019 17:46:30

Highest channel

(Right module):

802.11b


ANT 3

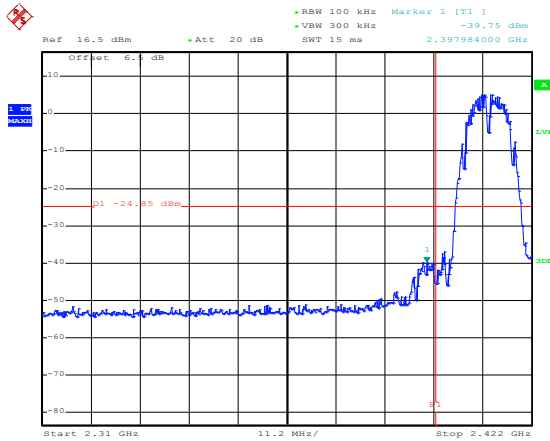

Date: 19.NOV.2019 17:28:45


Lowest channel

ANT 4

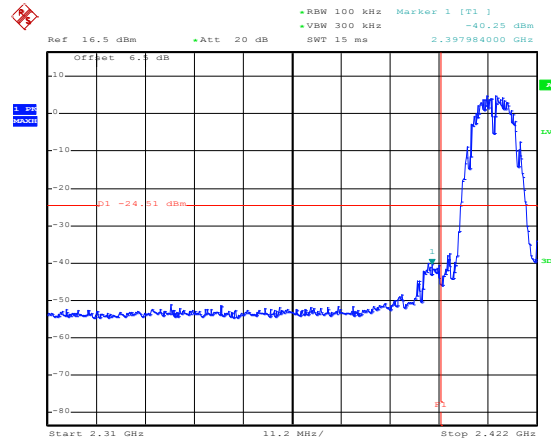


Date: 19.NOV.2019 17:29:28

Lowest channel

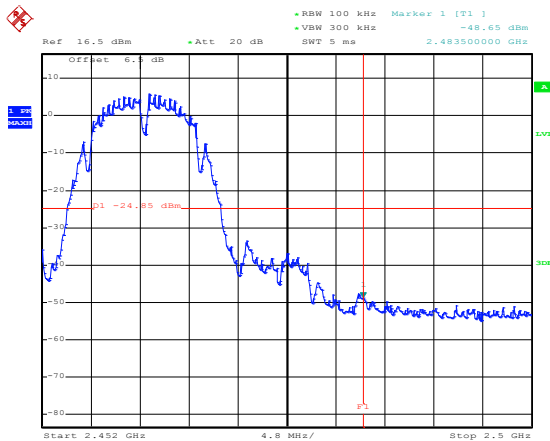

Date: 19.NOV.2019 17:43:28

Highest channel

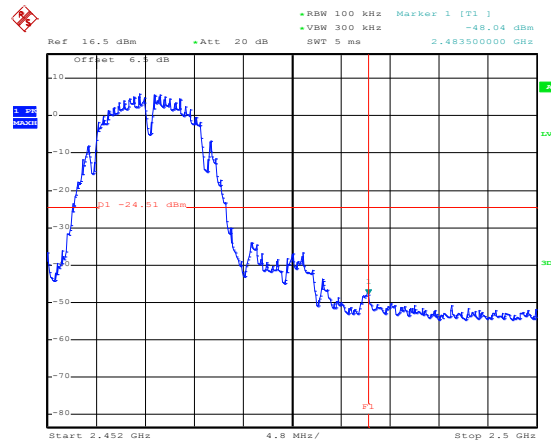


Date: 19.NOV.2019 17:43:46

Highest channel

802.11g


ANT 3

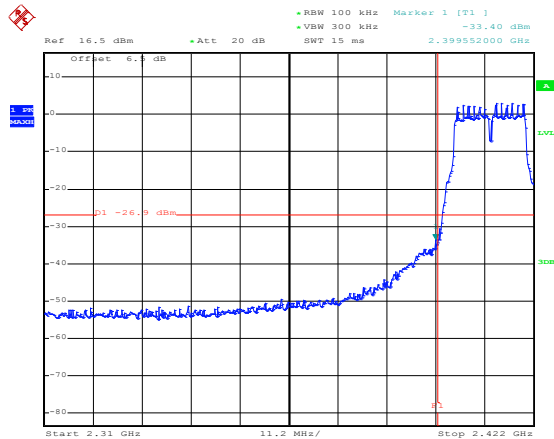

Date: 19.NOV.2019 17:30:57


Lowest channel

ANT 4

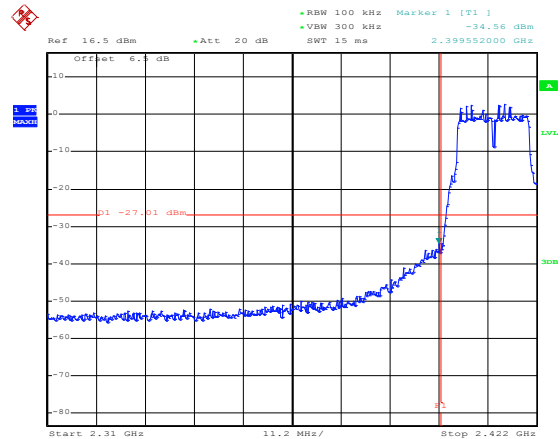


Date: 19.NOV.2019 17:31:26

Lowest channel

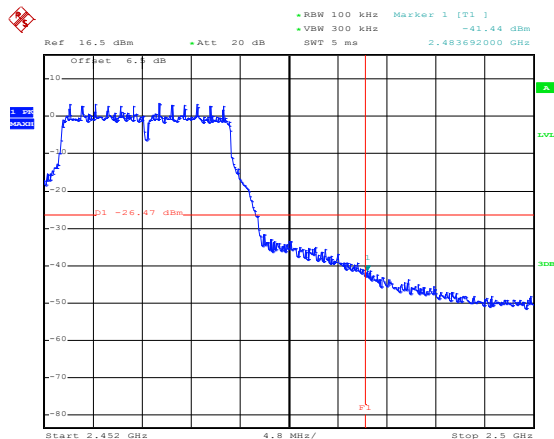

Date: 19.NOV.2019 17:45:27


Highest channel

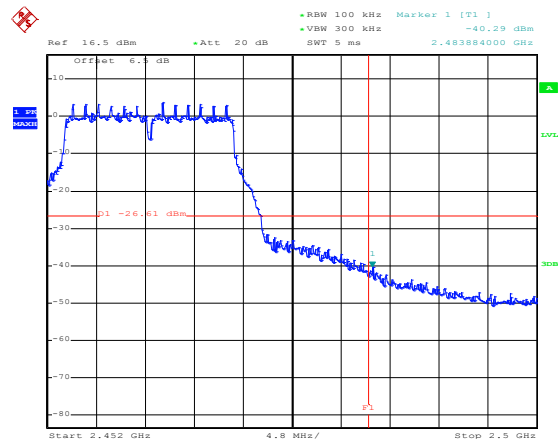

Date: 19.NOV.2019 17:45:41


Highest channel

802.11n20(MIMO)

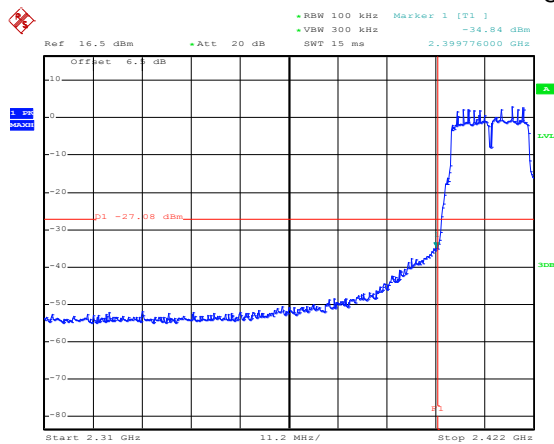

Date: 19.NOV.2019 17:33:09


Lowest channel

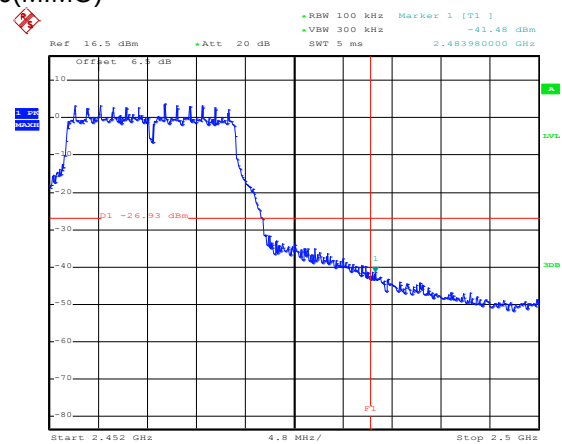

Date: 19.NOV.2019 17:47:00


Highest channel

6.6.2 Radiated Emission Method

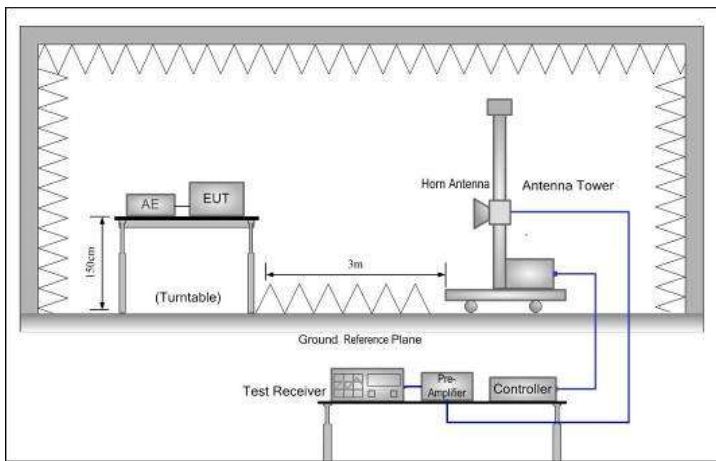Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	2.3GHz to 2.5GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

802.11b mode (Left module ANT 1):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

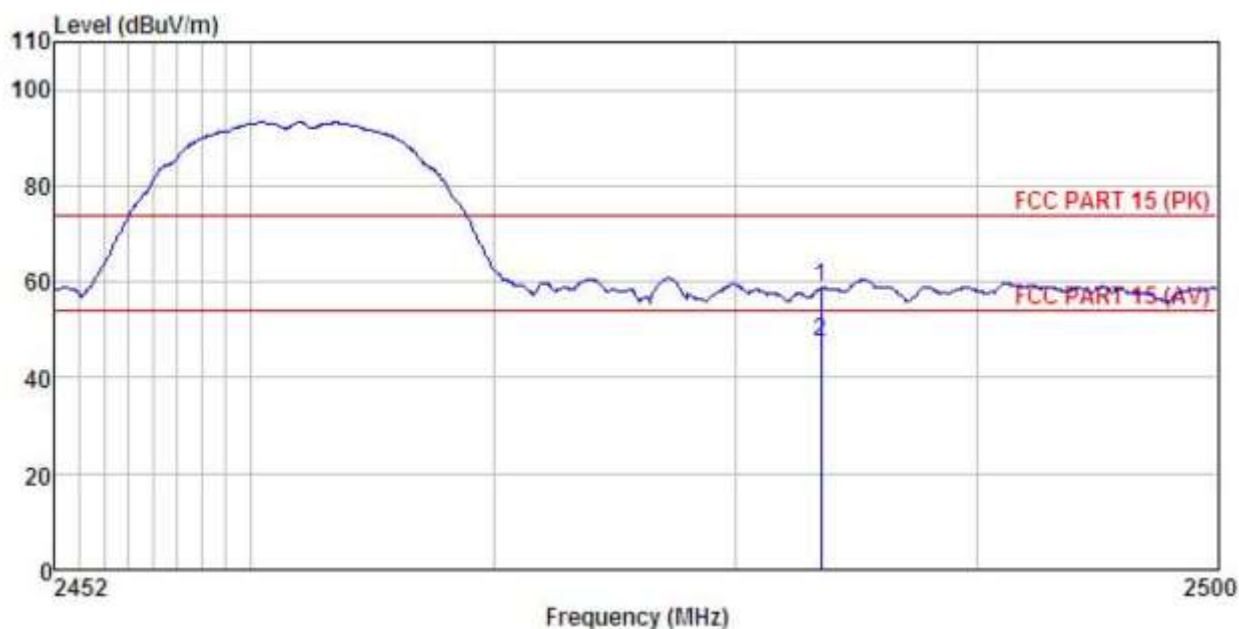


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.83	27.36	4.81	0.00	58.70	74.00	-15.30	Peak
2	2483.500	13.74	27.36	4.81	0.00	47.61	54.00	-6.39	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

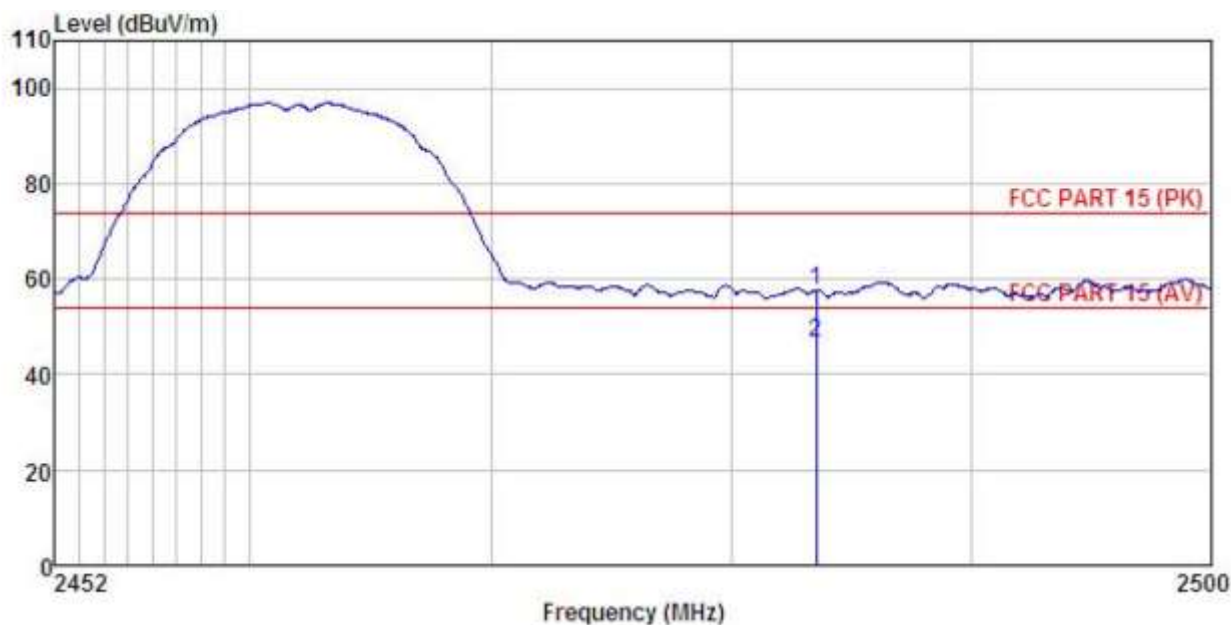


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.83	27.35	4.81	0.00	57.69	74.00	-16.31	Peak
2	2483.500	12.73	27.35	4.81	0.00	46.59	54.00	-7.41	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

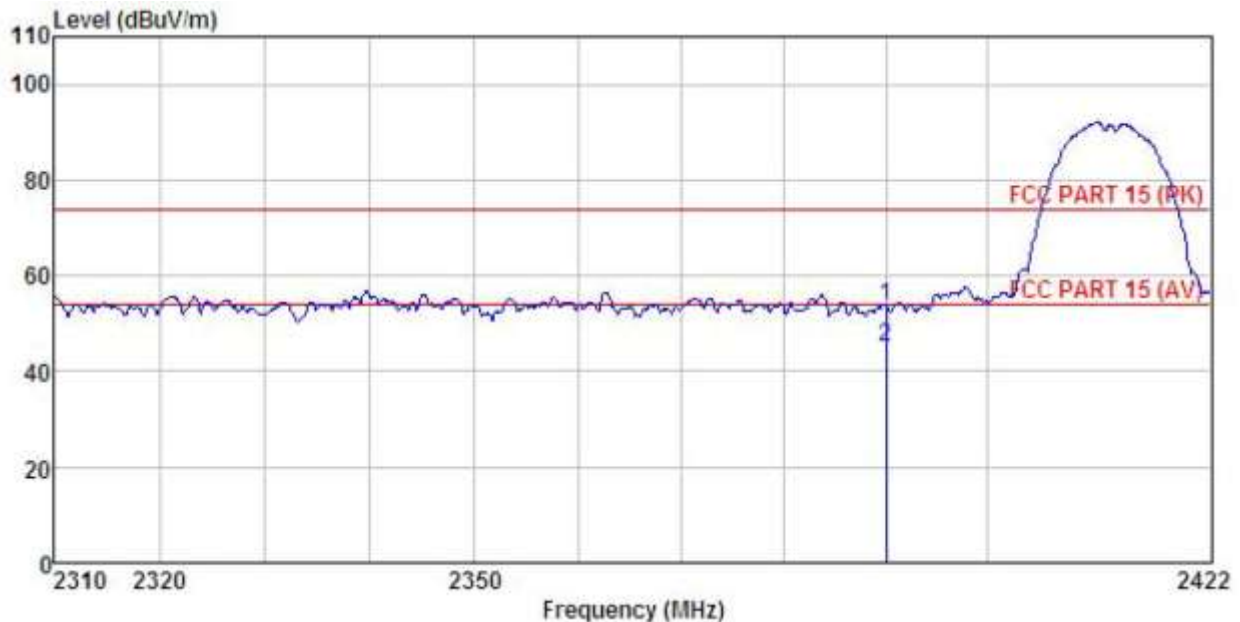


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.24	27.07	4.69	0.00	53.68	74.00	-20.32	Peak
2	2390.000	11.78	27.07	4.69	0.00	45.22	54.00	-8.78	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

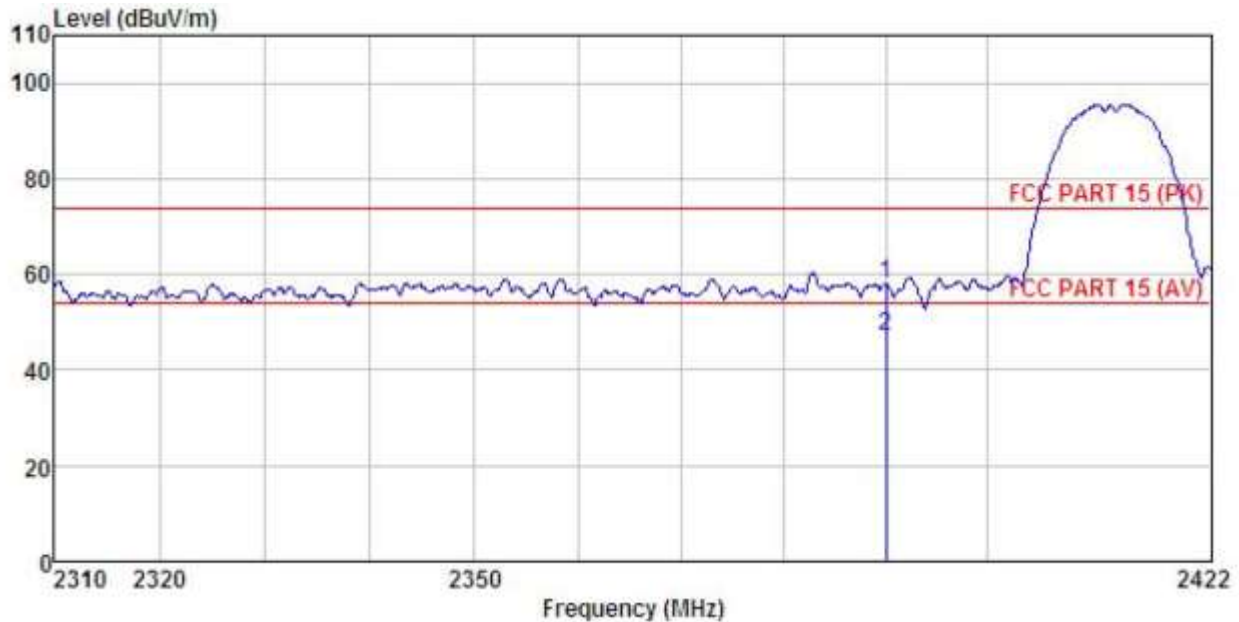


	Freq	ReadAntenna	Cable Preamp		Limit	Over		
	Level	Factor	Loss	Factor	Level	Line	Limit Remark	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	24.54	27.08	4.69	0.00	57.99	74.00	-16.01 Peak
2	2390.000	13.62	27.08	4.69	0.00	47.07	54.00	-6.93 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11b mode (Left module ANT 2):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

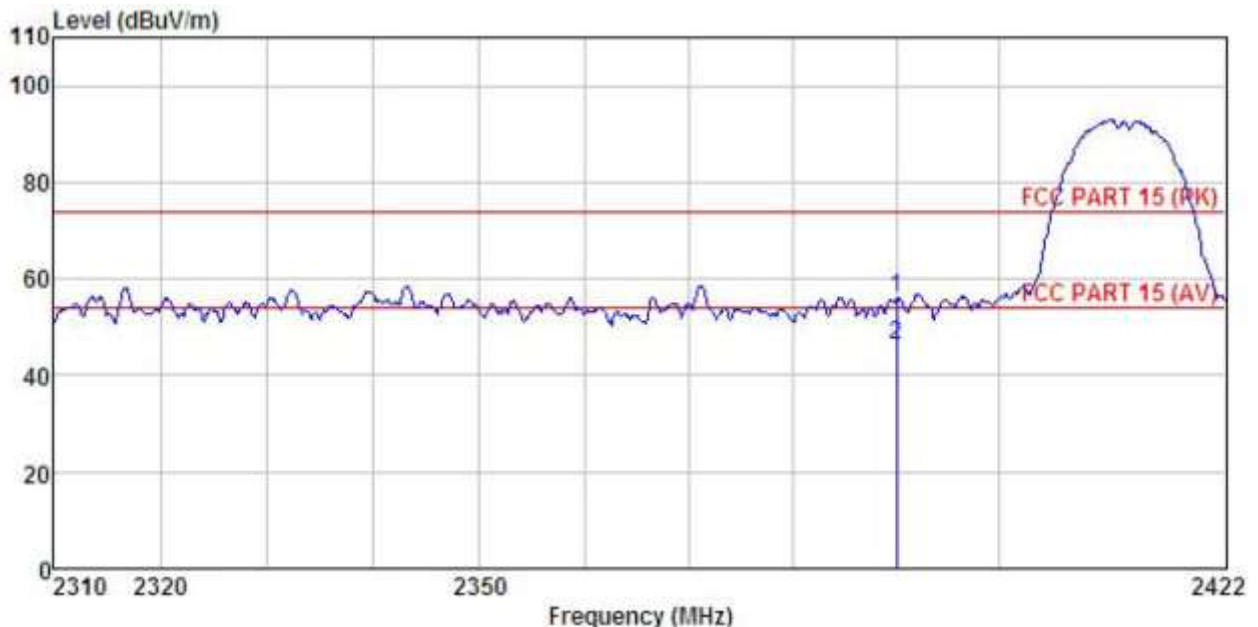


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.47	27.07	4.69	0.00	55.91	74.00	-18.09	Peak
2	2390.000	12.92	27.07	4.69	0.00	46.36	54.00	-7.64	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

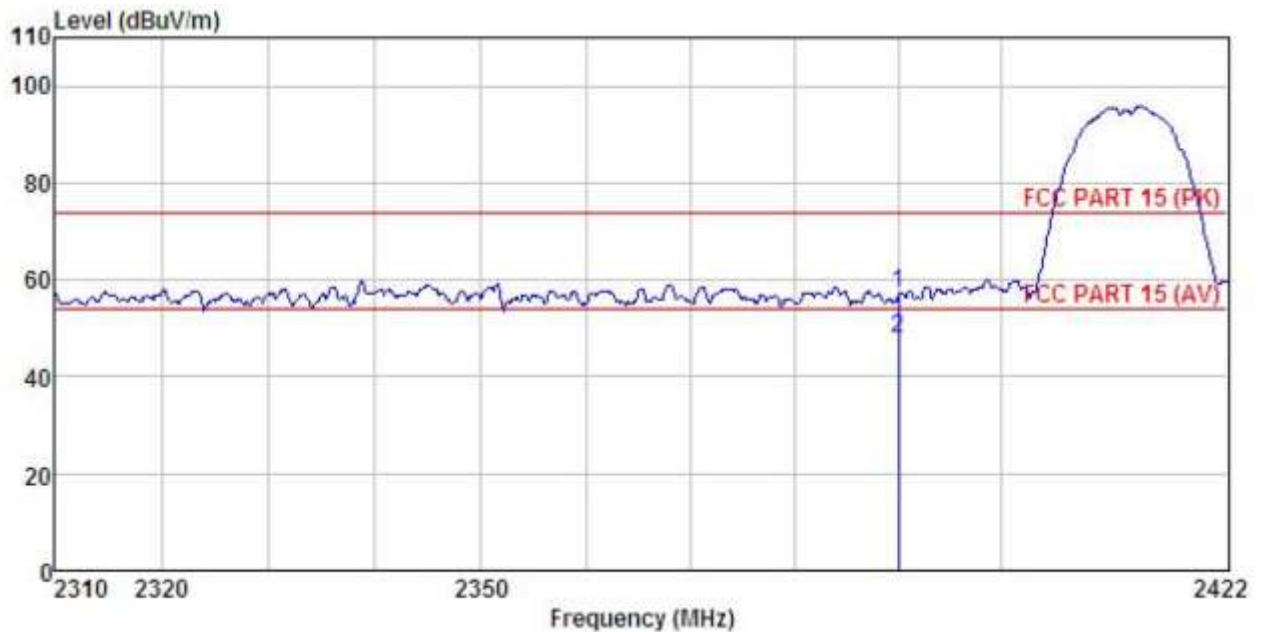


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.64	27.08	4.69	0.00	57.09	74.00	-16.91	Peak
2	2390.000	14.58	27.08	4.69	0.00	48.03	54.00	-5.97	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

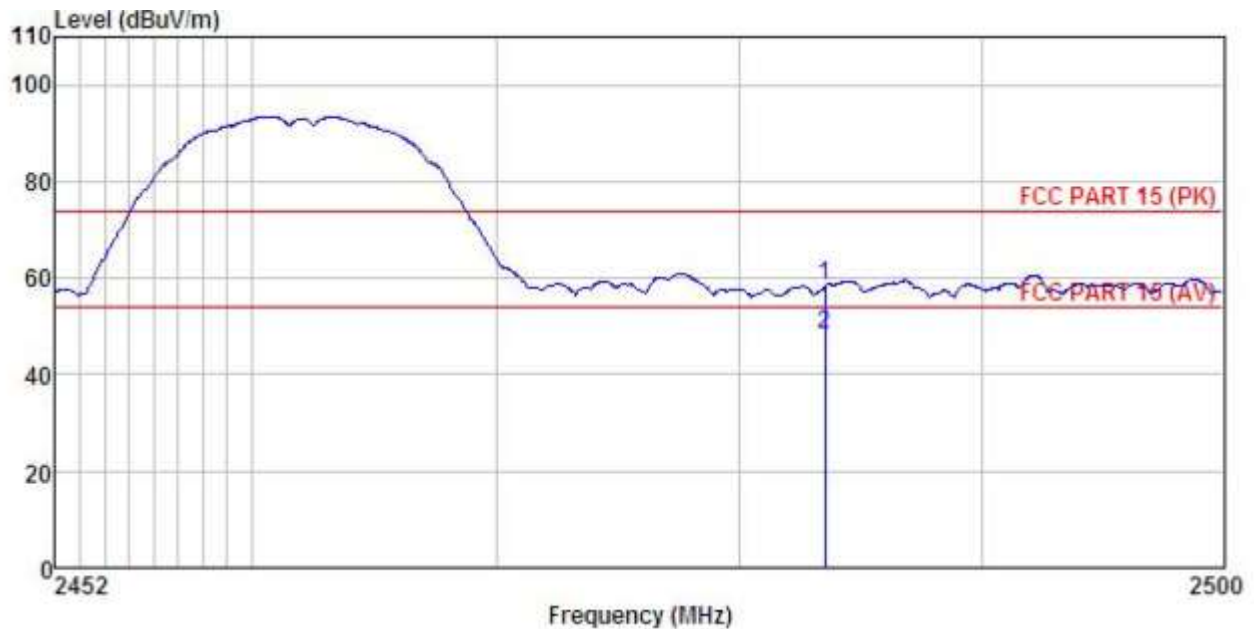


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.68	27.36	4.81	0.00	58.55	74.00	-15.45	Peak
2	2483.500	14.36	27.36	4.81	0.00	48.23	54.00	-5.77	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

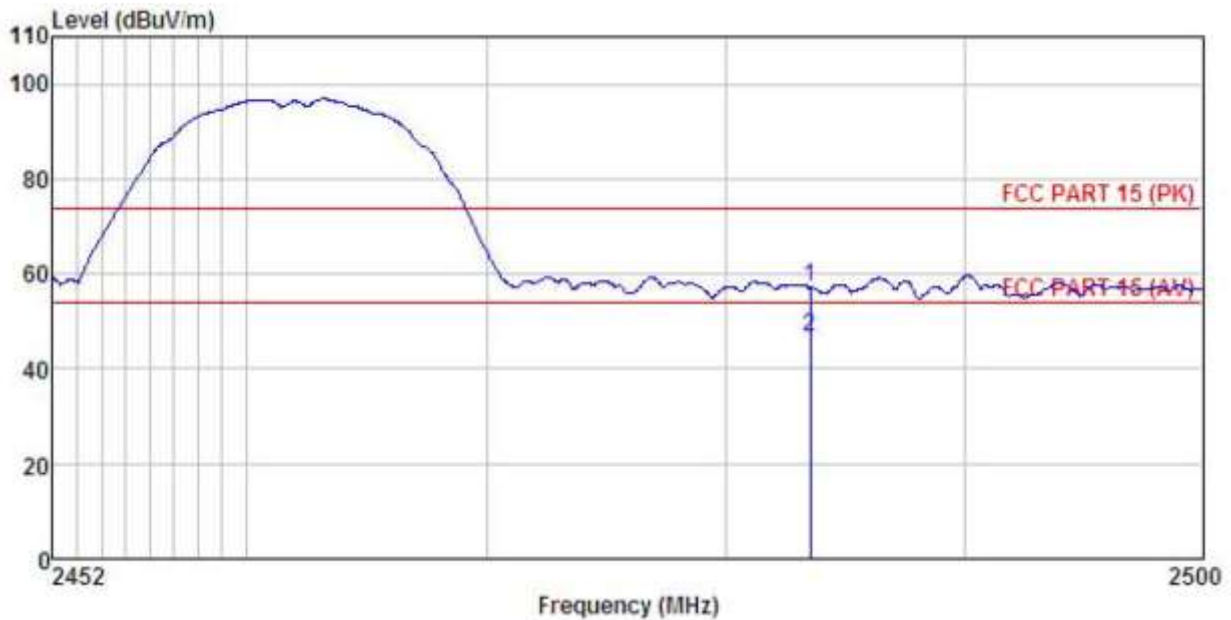


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB			dB	
1	2483.500	23.18	27.35	4.81	0.00	57.04	74.00	-16.96	Peak
2	2483.500	12.64	27.35	4.81	0.00	46.50	54.00	-7.50	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g mode (Left module ANT 1):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

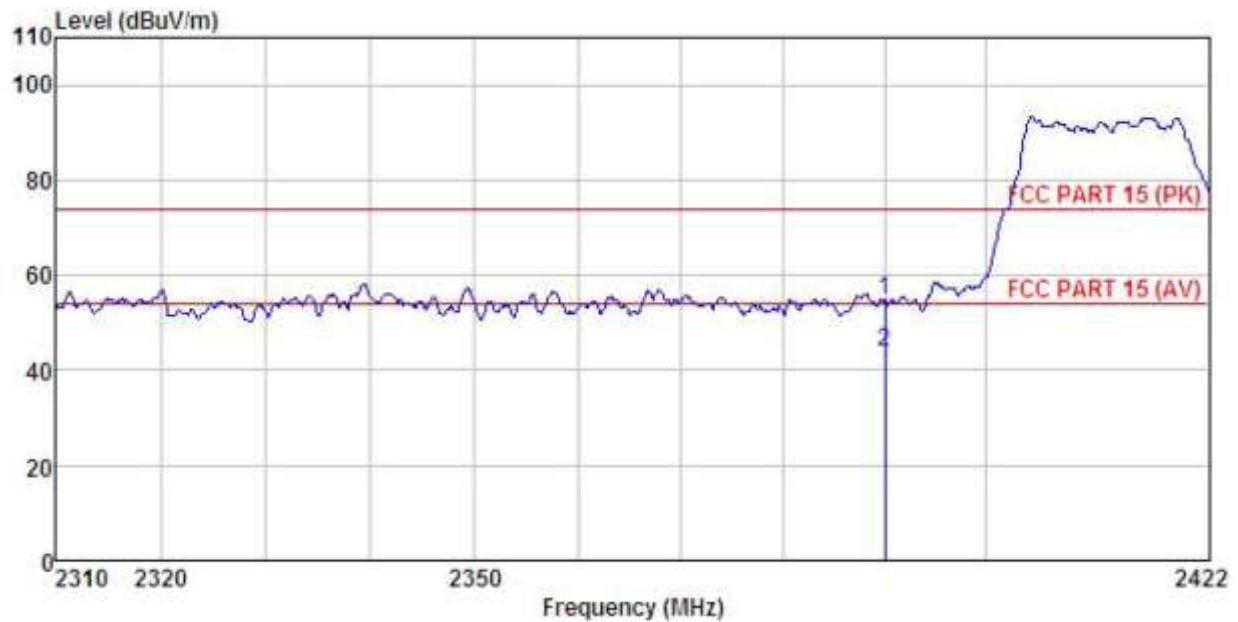


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.17	27.07	4.69	0.00	54.61	74.00	-19.39	Peak
2	2390.000	10.52	27.07	4.69	0.00	43.96	54.00	-10.04	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

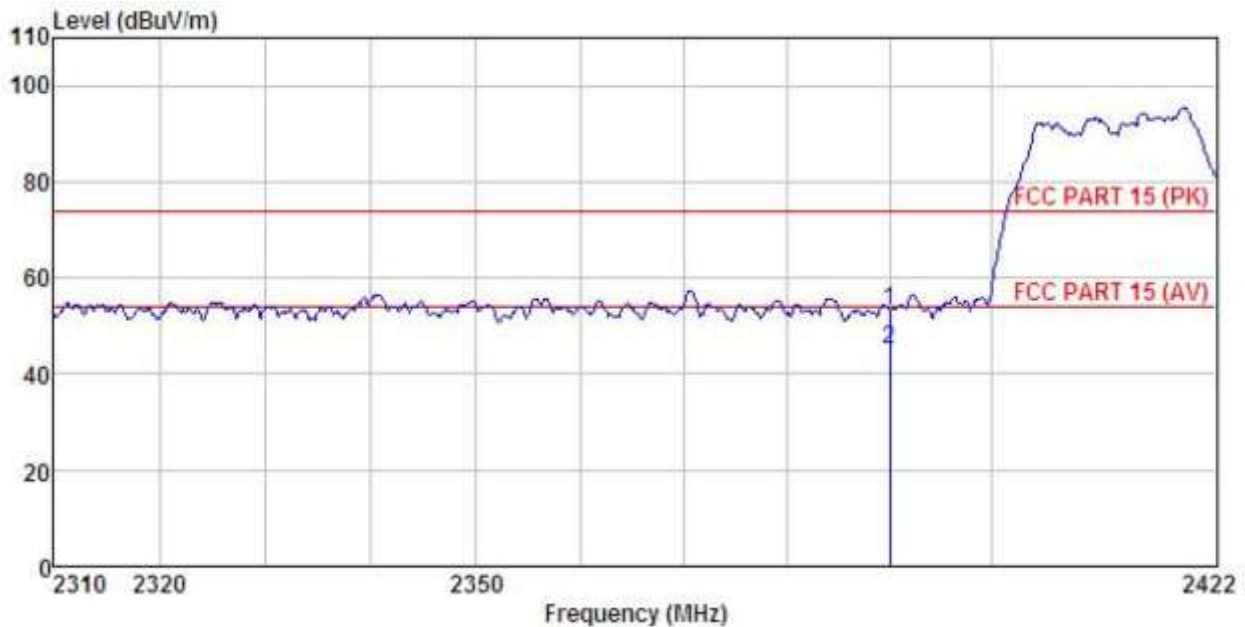


	Freq	ReadAntenna	Cable Preamp			Limit	Over	
		Level Factor	Loss Factor	Level		Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	19.77	27.08	4.69	0.00	53.22	74.00	-20.78 Peak
2	2390.000	11.78	27.08	4.69	0.00	45.23	54.00	-8.77 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

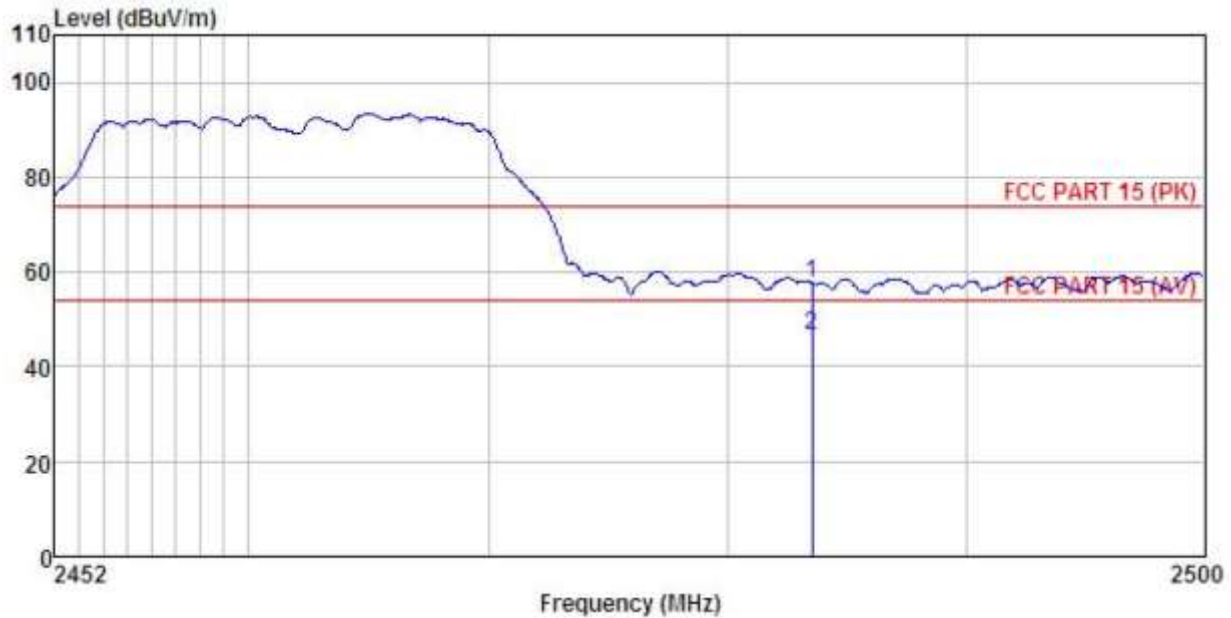


	Freq	ReadAntenna	Cable Preamp			Limit	Over	
		Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	23.75	27.36	4.81	0.00	57.62	74.00	-16.38 Peak
2	2483.500	12.72	27.36	4.81	0.00	46.59	54.00	-7.41 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

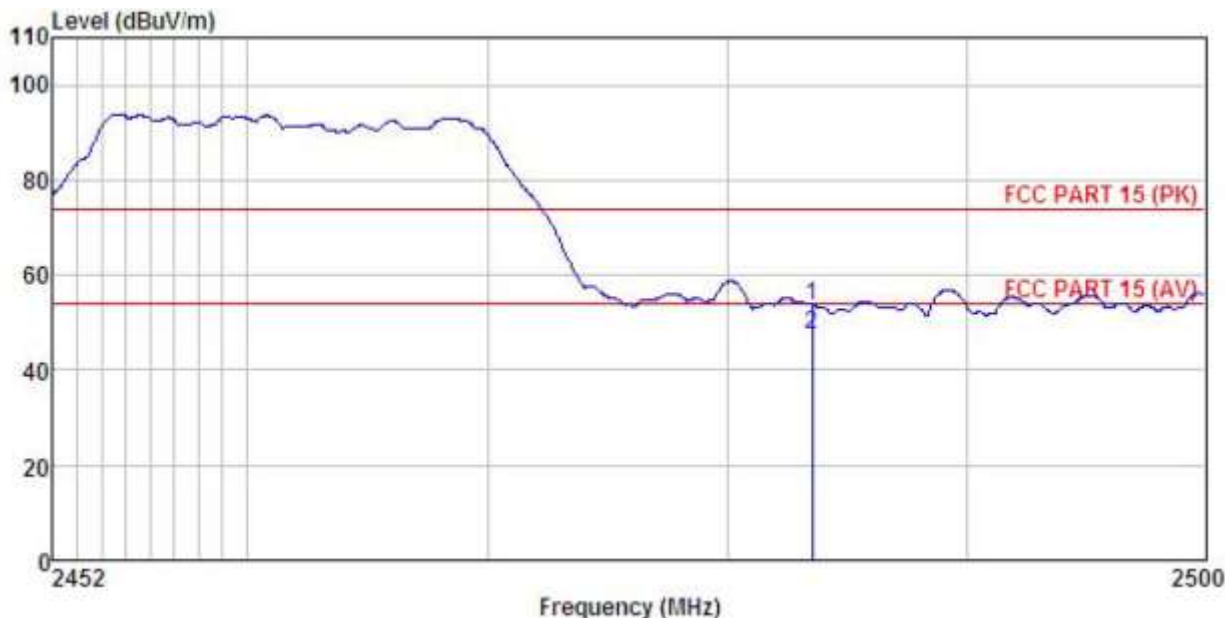


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.88	27.35	4.81	0.00	53.74	74.00	-20.26	Peak
2	2483.500	13.74	27.35	4.81	0.00	47.60	54.00	-6.40	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g mode (Left module ANT 2):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

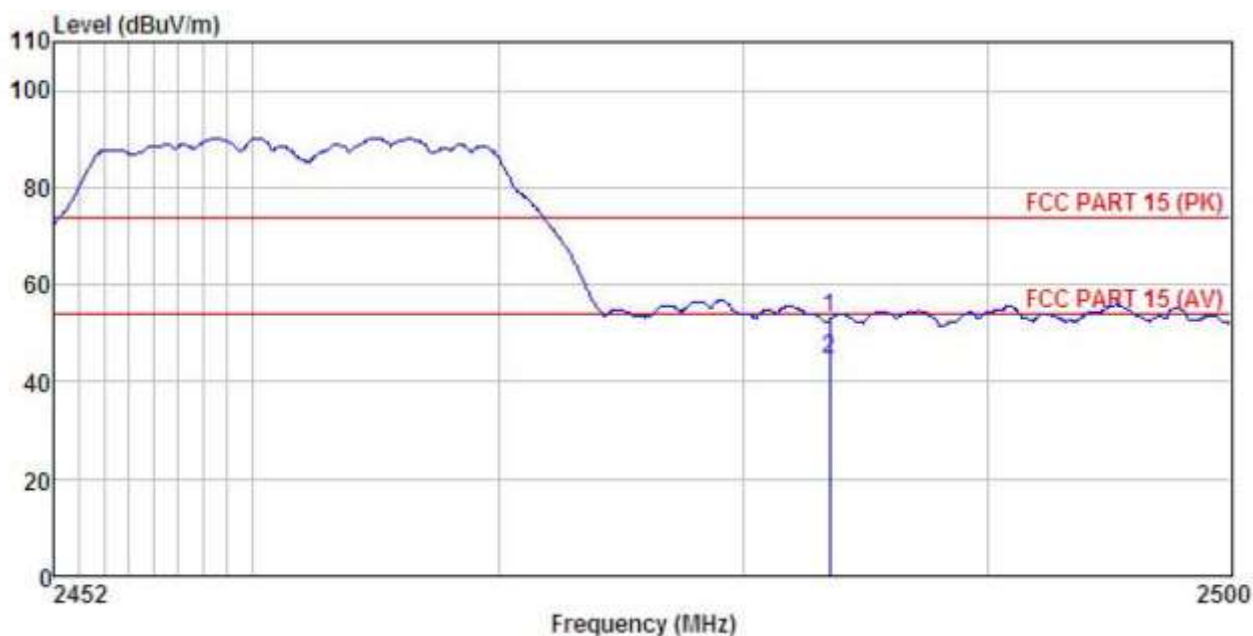


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.13	27.36	4.81	0.00	53.00	74.00	-21.00	Peak
2	2483.500	10.75	27.36	4.81	0.00	44.62	54.00	-9.38	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

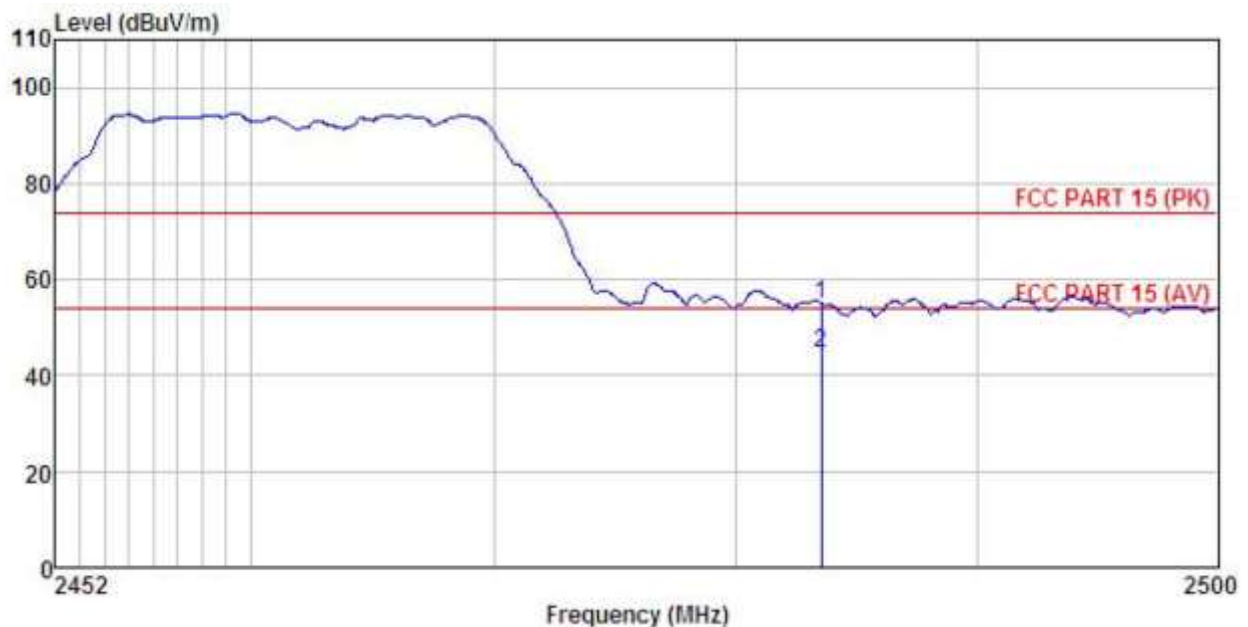


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.97	27.35	4.81	0.00	54.83	74.00	-19.17	Peak
2	2483.500	10.76	27.35	4.81	0.00	44.62	54.00	-9.38	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

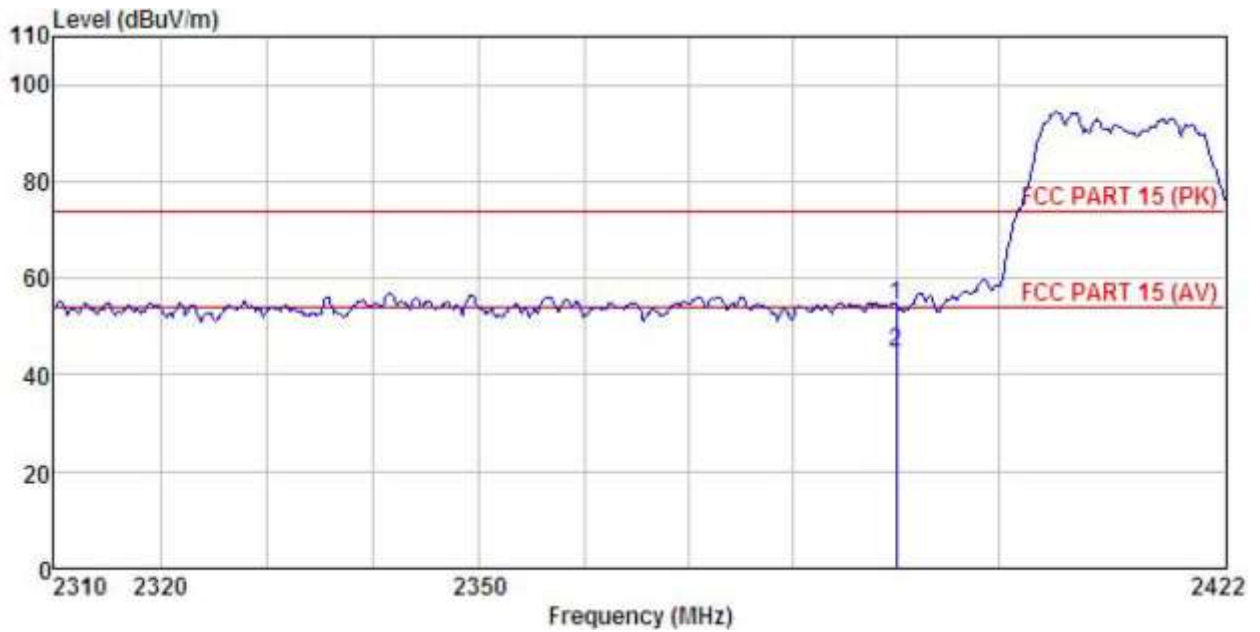


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB			dB	
1	2390.000	20.90	27.07	4.69	0.00	54.34	74.00	-19.66	Peak
2	2390.000	11.24	27.07	4.69	0.00	44.68	54.00	-9.32	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

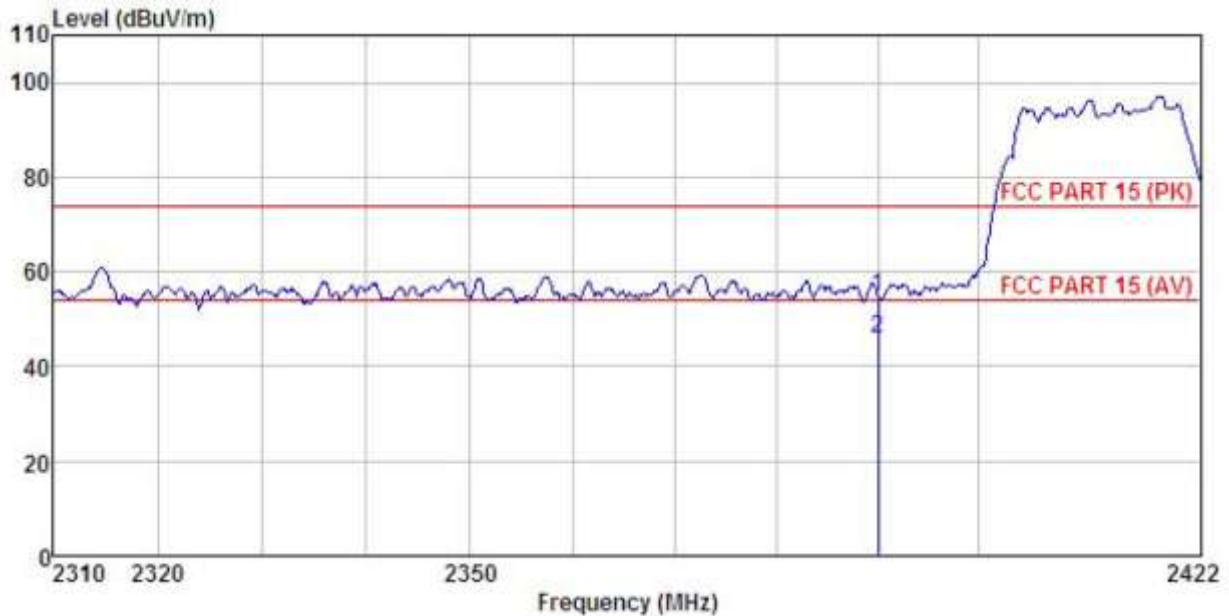


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.33	27.08	4.69	0.00	54.78	74.00	-19.22	Peak
2	2390.000	12.35	27.08	4.69	0.00	45.80	54.00	-8.20	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode (Left module):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

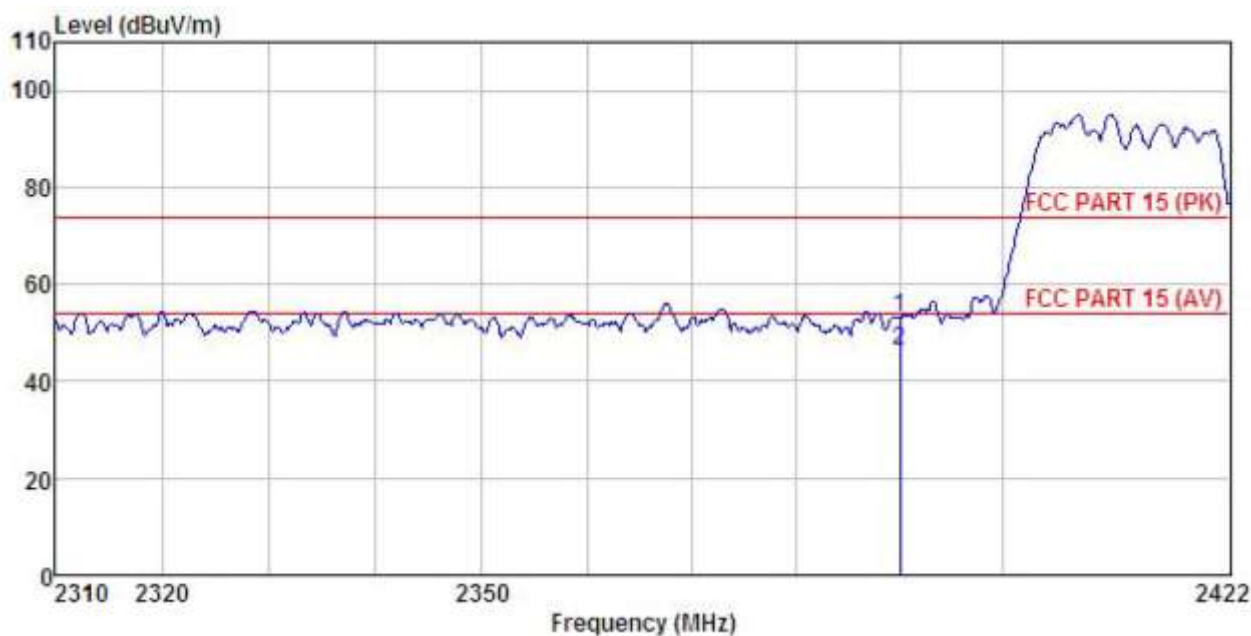


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.79	27.07	4.69	0.00	53.23	74.00	-20.77	Peak
2	2390.000	12.78	27.07	4.69	0.00	46.22	54.00	-7.78	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

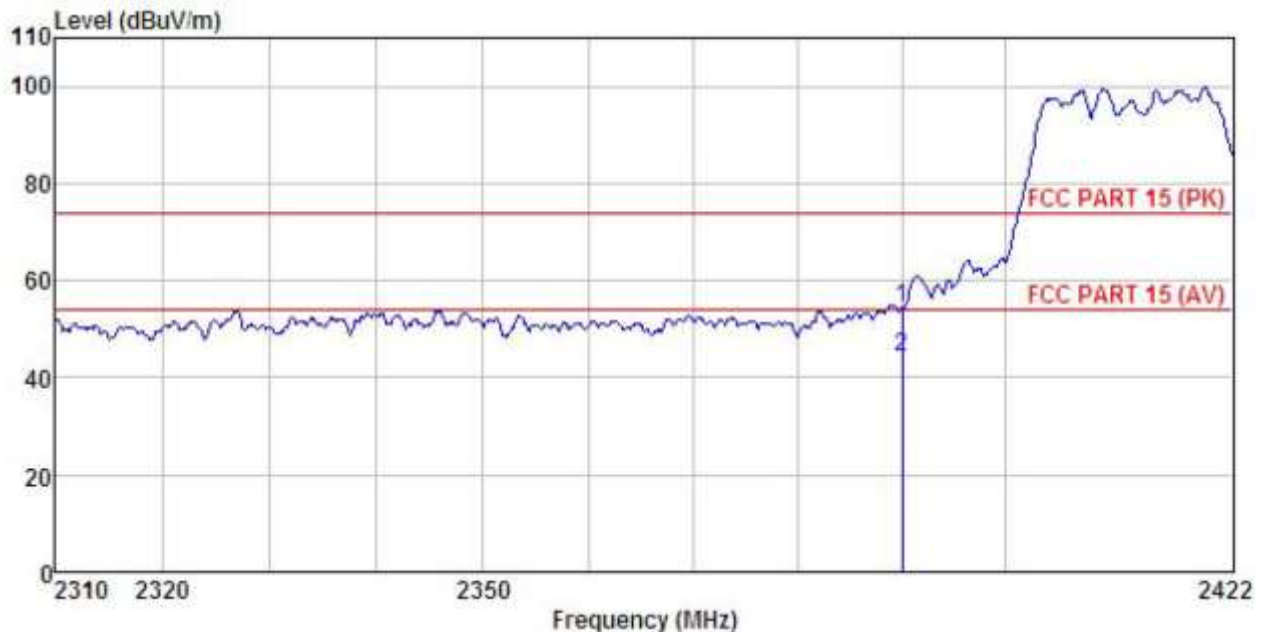


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.92	27.08	4.69	0.00	54.37	74.00	-19.63	Peak
2	2390.000	10.74	27.08	4.69	0.00	44.19	54.00	-9.81	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Huni: 57%

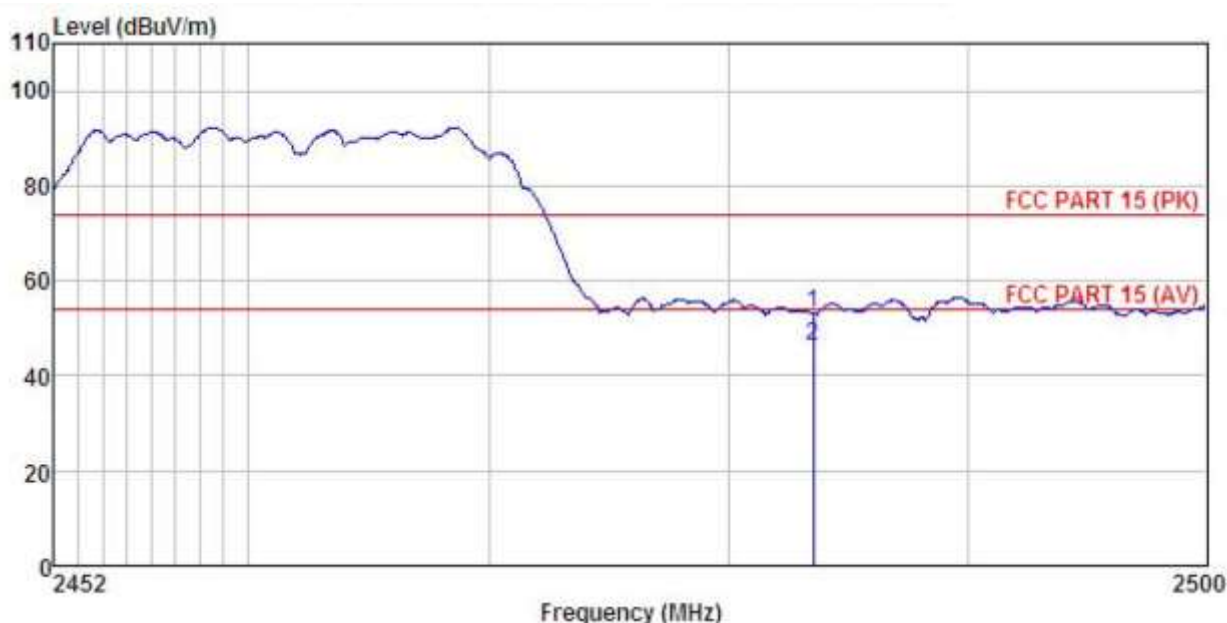


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	19.32	27.36	4.81	0.00	53.19	74.00	-20.81	Peak
2	2483.500	12.45	27.36	4.81	0.00	46.32	54.00	-7.68	Average

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

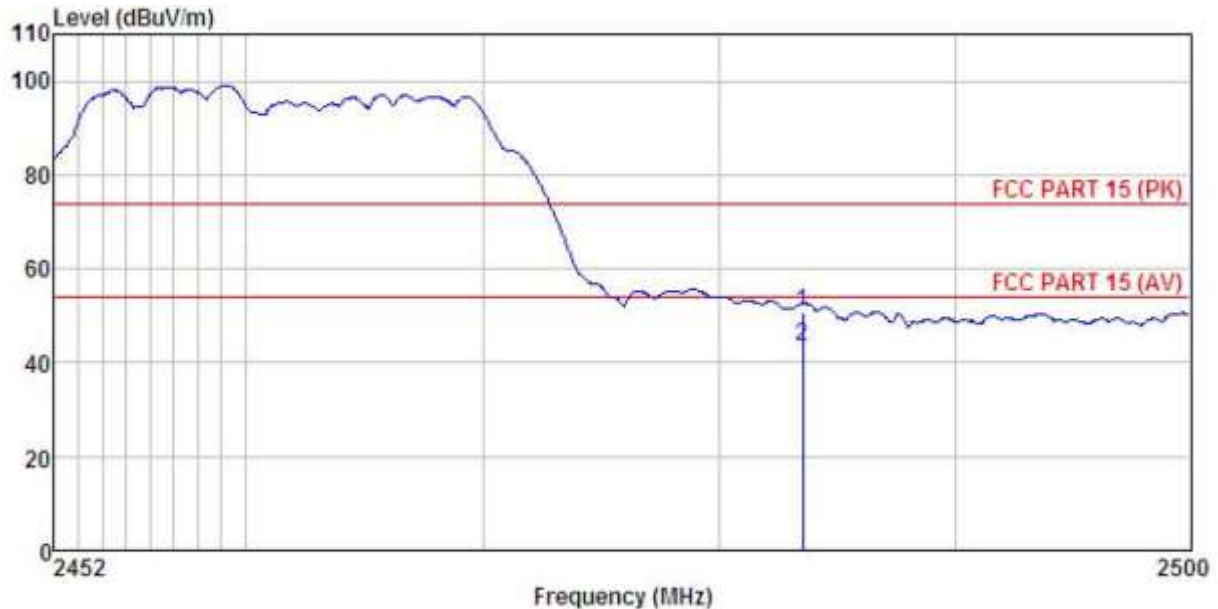


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	16.69	27.35	4.81	0.00	50.55	74.00	-23.45	Peak
2	2483.500	9.76	27.35	4.81	0.00	43.62	54.00	-10.38	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11b mode (Right module ANT 3):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

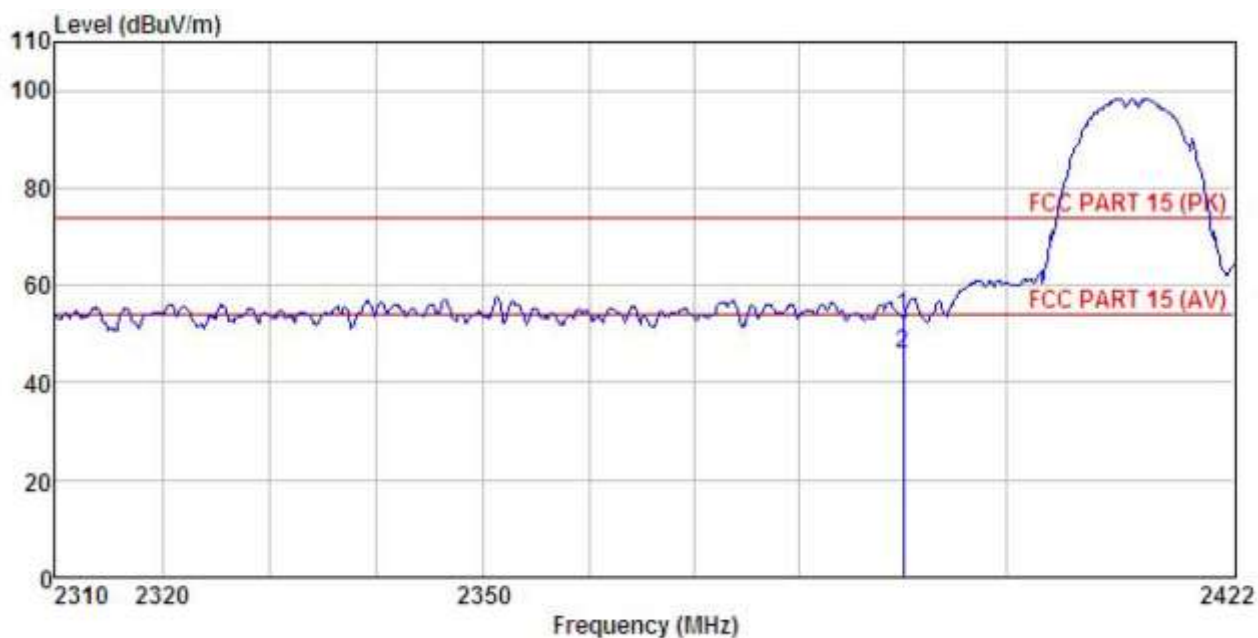


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	20.01	27.07	4.69	0.00	53.45	74.00	-20.55 Peak
2	2390.000	12.45	27.07	4.69	0.00	45.89	54.00	-8.11 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

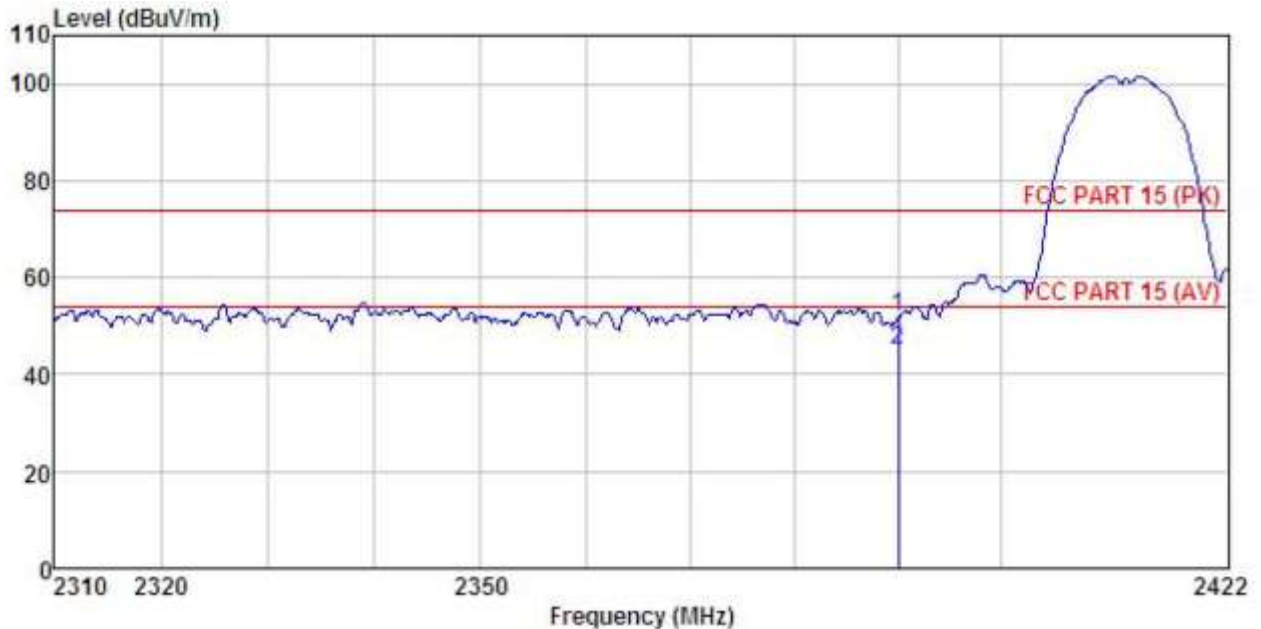


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	2390.000	18.62	27.08	4.69	0.00	52.07	74.00 -21.93 Peak
2	2390.000	11.46	27.08	4.69	0.00	44.91	54.00 -9.09 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

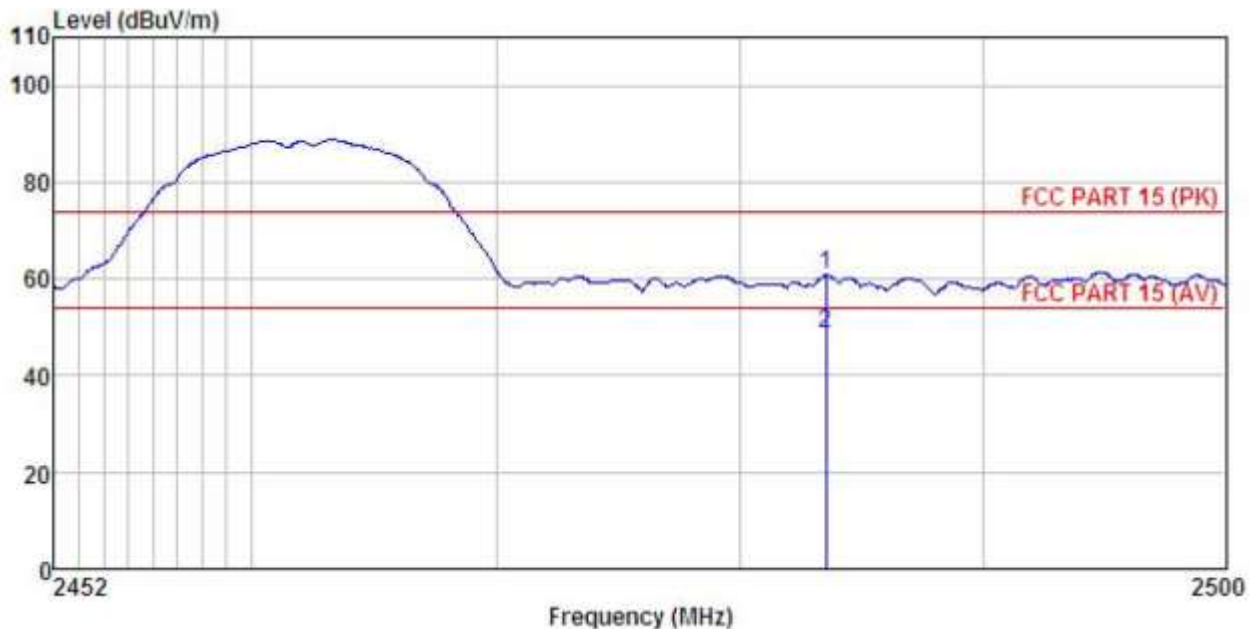


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	26.86	27.36	4.81	0.00	60.73	74.00	-13.27	Peak
2	2483.500	14.66	27.36	4.81	0.00	48.53	54.00	-5.47	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

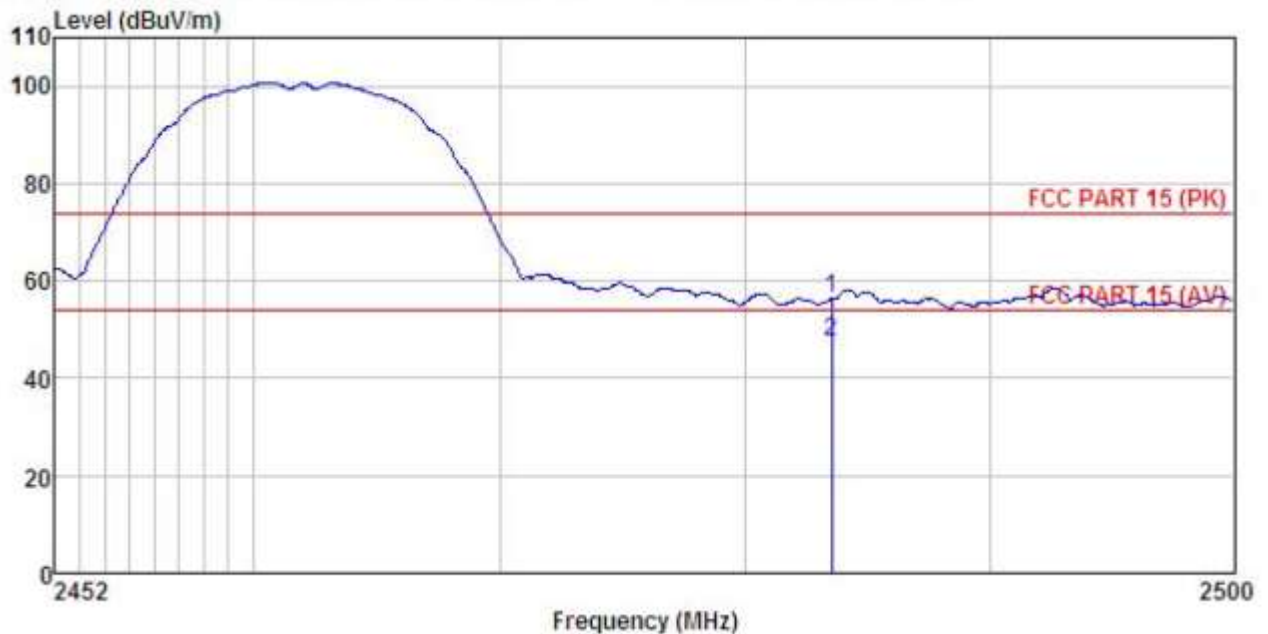


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	22.47	27.35	4.81	0.00	56.33	74.00	-17.67	Peak
2	2483.500	13.46	27.35	4.81	0.00	47.32	54.00	-6.68	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11b mode (Right module ANT 4):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

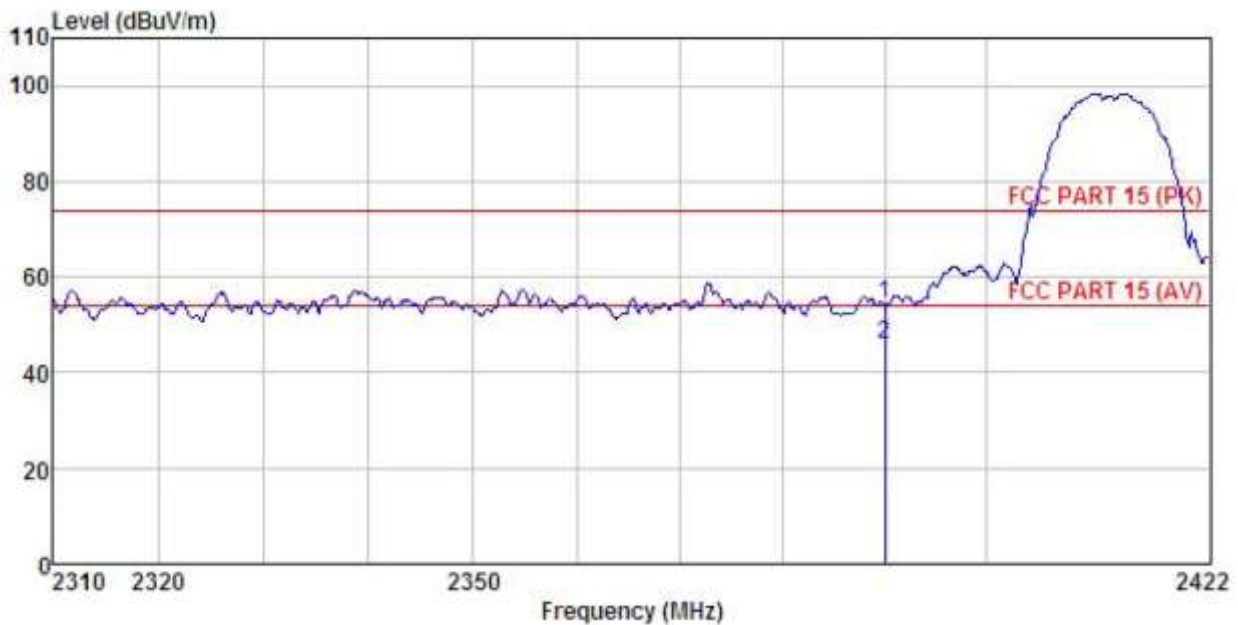


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.89	27.07	4.69	0.00	54.33	74.00	-19.67	Peak
2	2390.000	12.44	27.07	4.69	0.00	45.88	54.00	-8.12	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

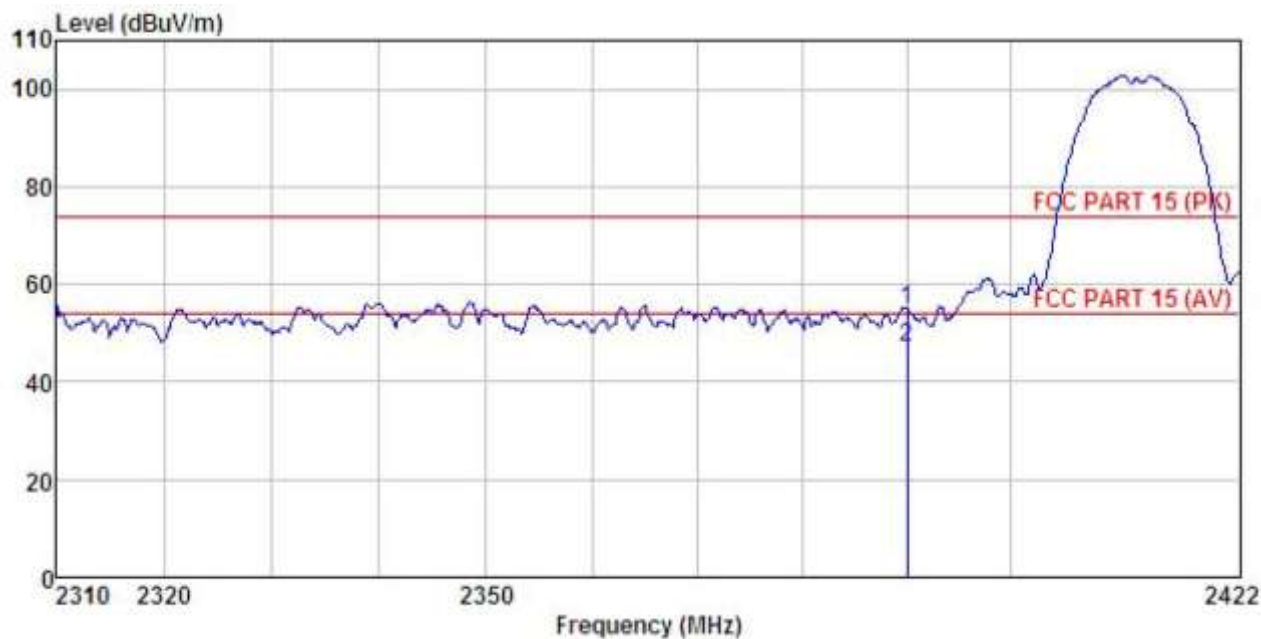


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	dB	dB	Limit	dB
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m		
1	2390.000	21.40	27.08	4.69	0.00	54.85	74.00	-19.15	Peak
2	2390.000	13.46	27.08	4.69	0.00	46.91	54.00	-7.09	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

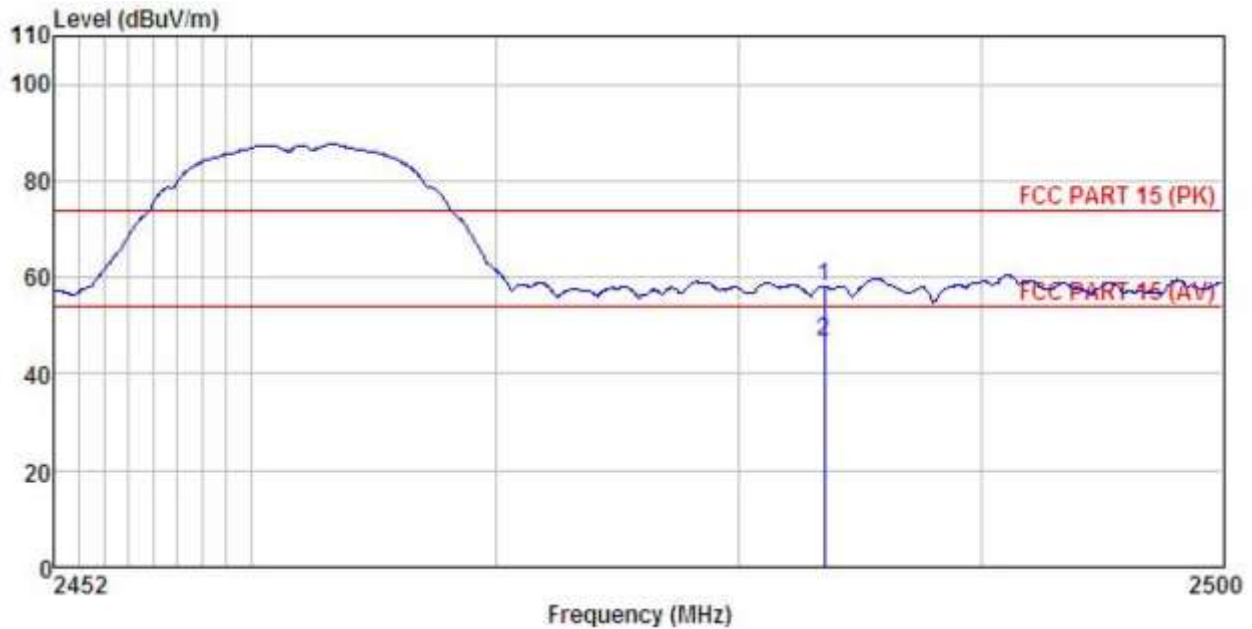


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.15	27.36	4.81	0.00	58.02	74.00	-15.98	Peak
2	2483.500	12.75	27.36	4.81	0.00	46.62	54.00	-7.38	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11b Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

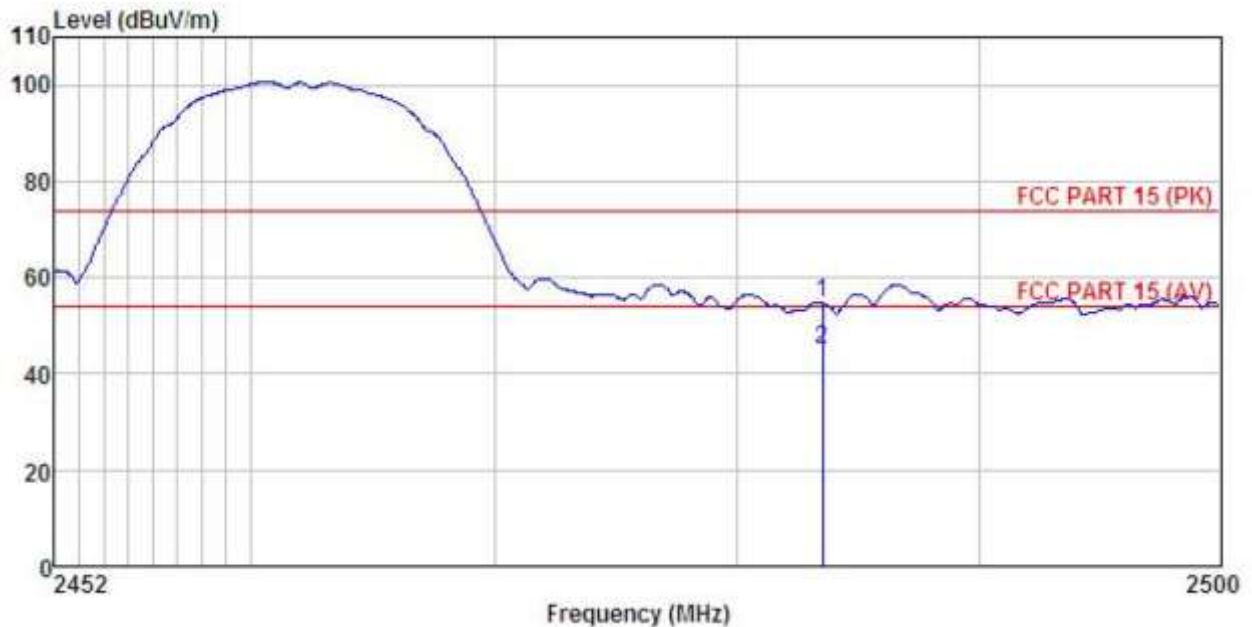


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	20.74	27.35	4.81	0.00	54.60	74.00	-19.40	Peak
2	2483.500	11.37	27.35	4.81	0.00	45.23	54.00	-8.77	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g mode (Right module ANT 3):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

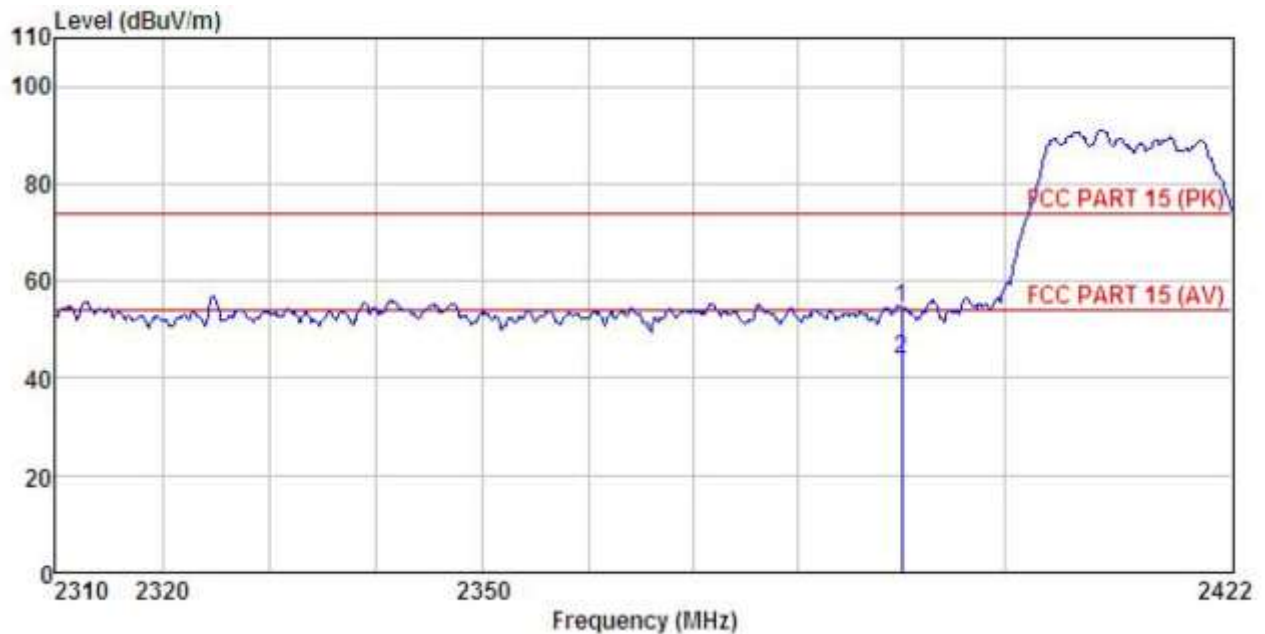


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.11	27.07	4.69	0.00	54.55	74.00	-19.45	Peak
2	2390.000	10.23	27.07	4.69	0.00	43.67	54.00	-10.33	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

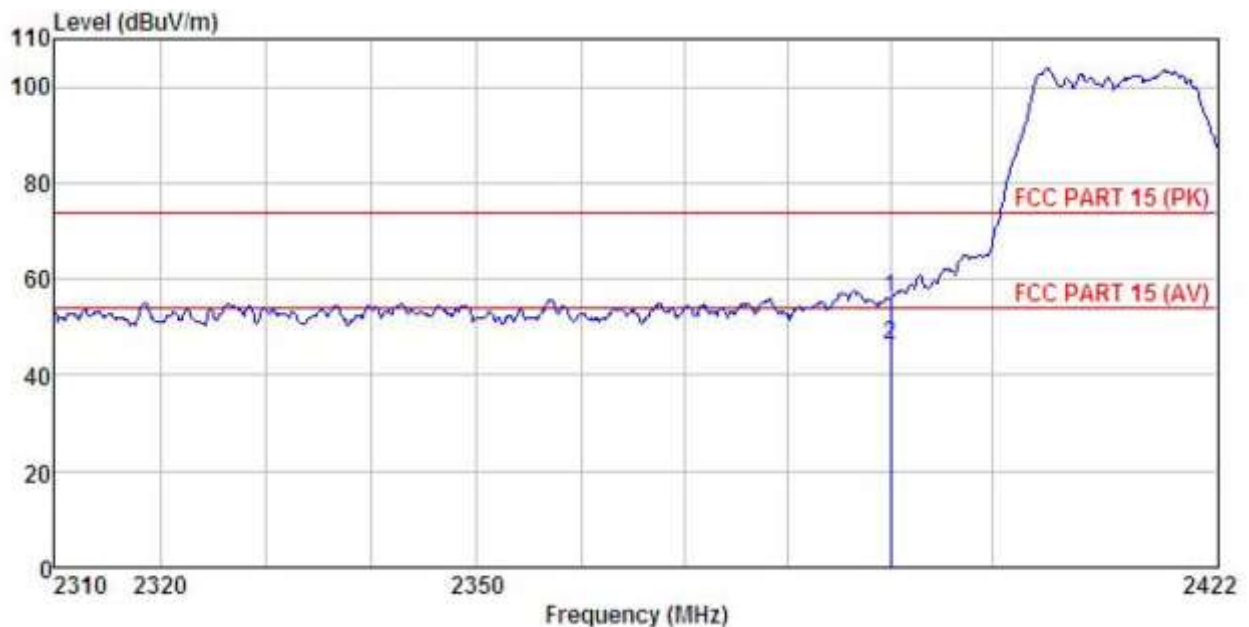


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.69	27.08	4.69	0.00	56.14	74.00	-17.86	Peak
2	2390.000	12.78	27.08	4.69	0.00	46.23	54.00	-7.77	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

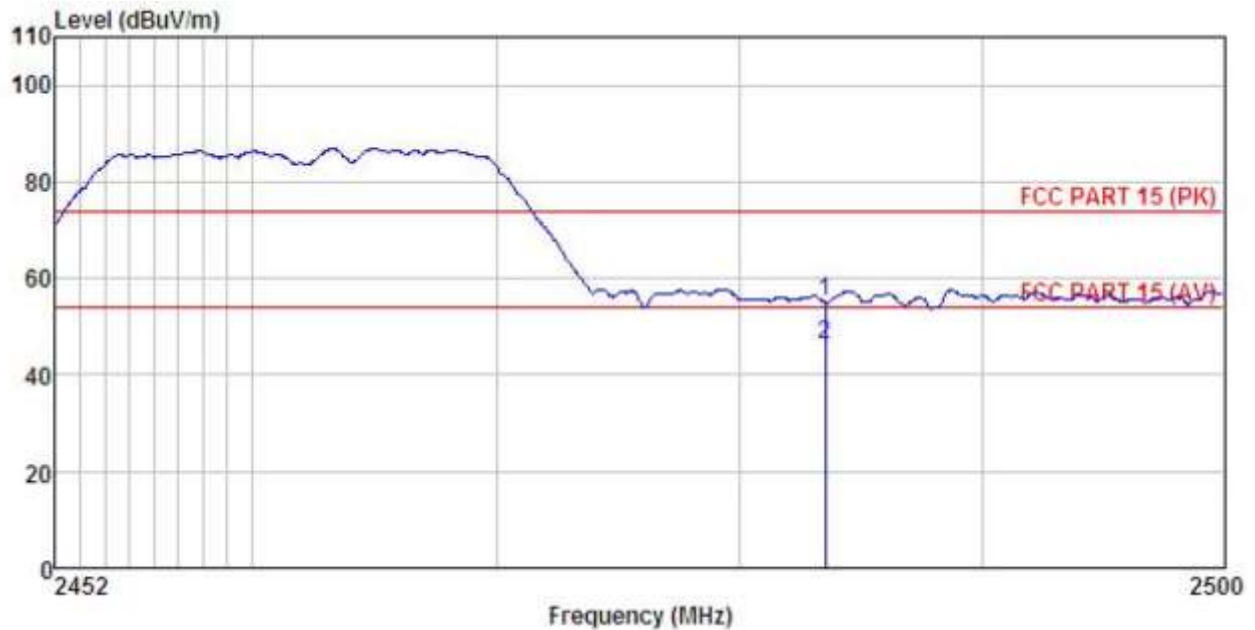


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	21.14	27.36	4.81	0.00	55.01	74.00	-18.99	Peak
2	2483.500	12.46	27.36	4.81	0.00	46.33	54.00	-7.67	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

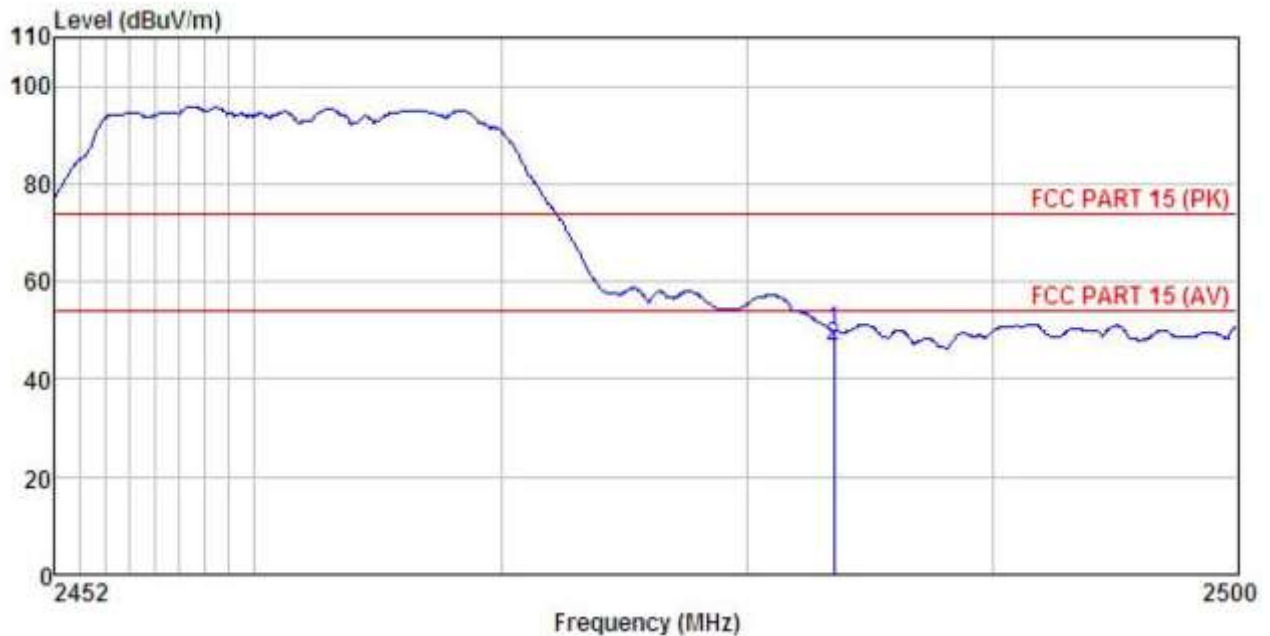


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	16.05	27.35	4.81	0.00	49.91	74.00	-24.09	Peak
2	2483.500	12.79	27.35	4.81	0.00	46.65	54.00	-7.35	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g mode (Right module ANT 4):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

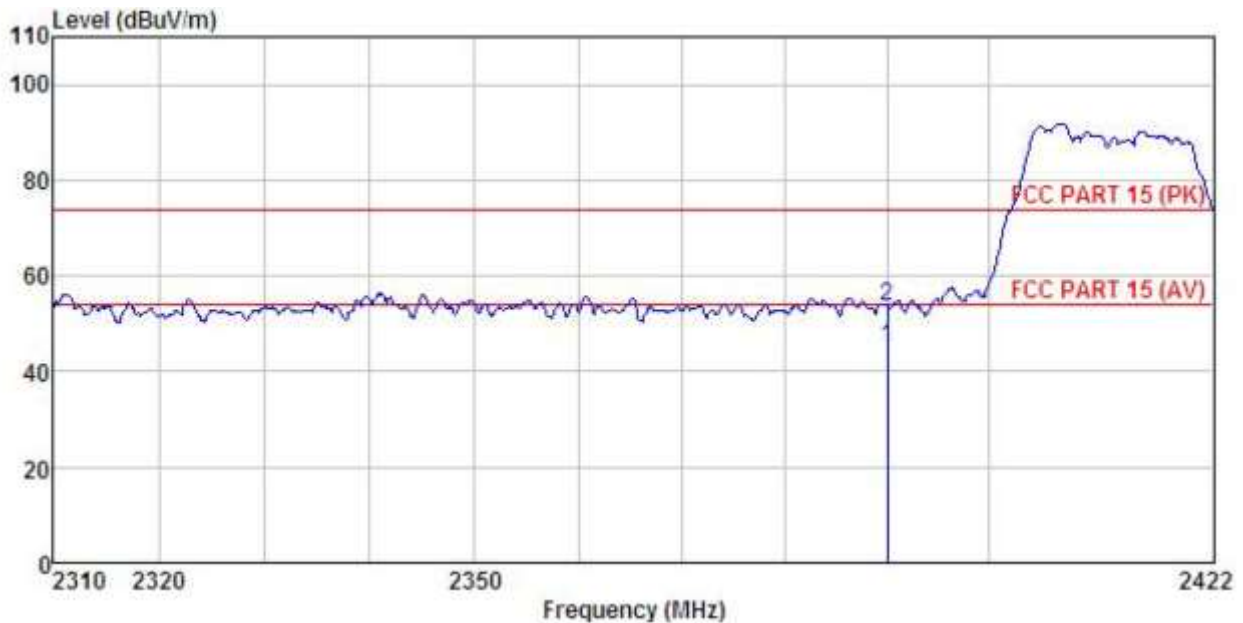


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	11.66	27.07	4.69	0.00	45.10	74.00	-28.90	QP
2	2390.000	20.13	27.07	4.69	0.00	53.57	74.00	-20.43	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

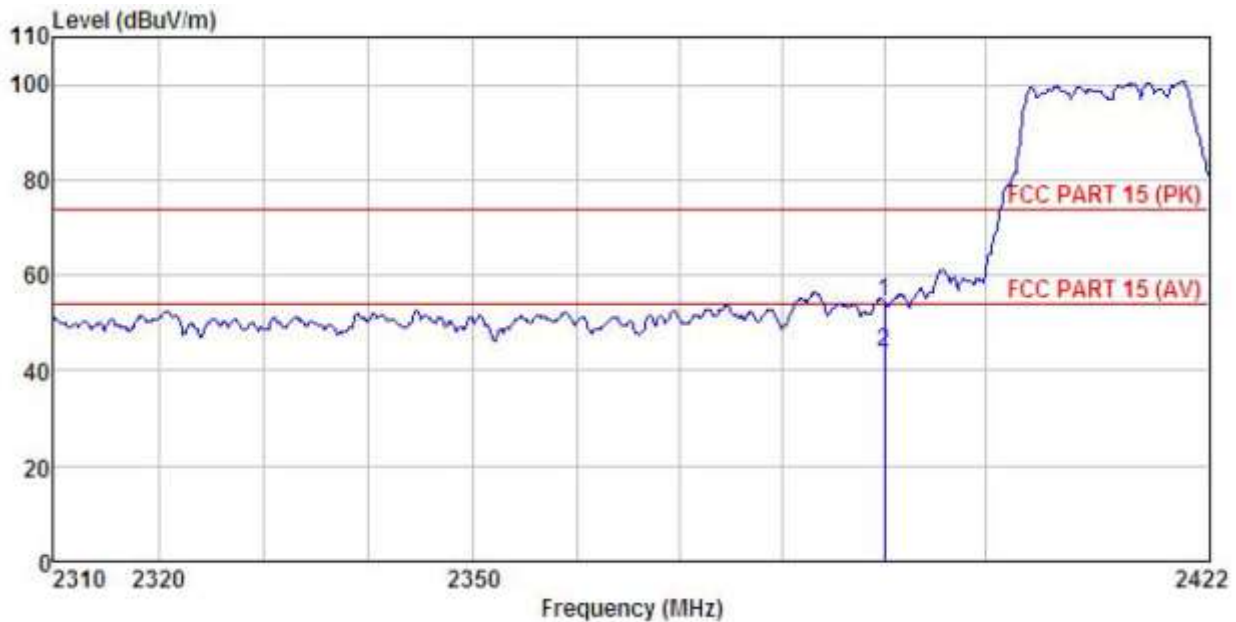


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	20.84	27.08	4.69	0.00	54.29	74.00	-19.71	Peak
2	2390.000	10.48	27.08	4.69	0.00	43.93	54.00	-10.07	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

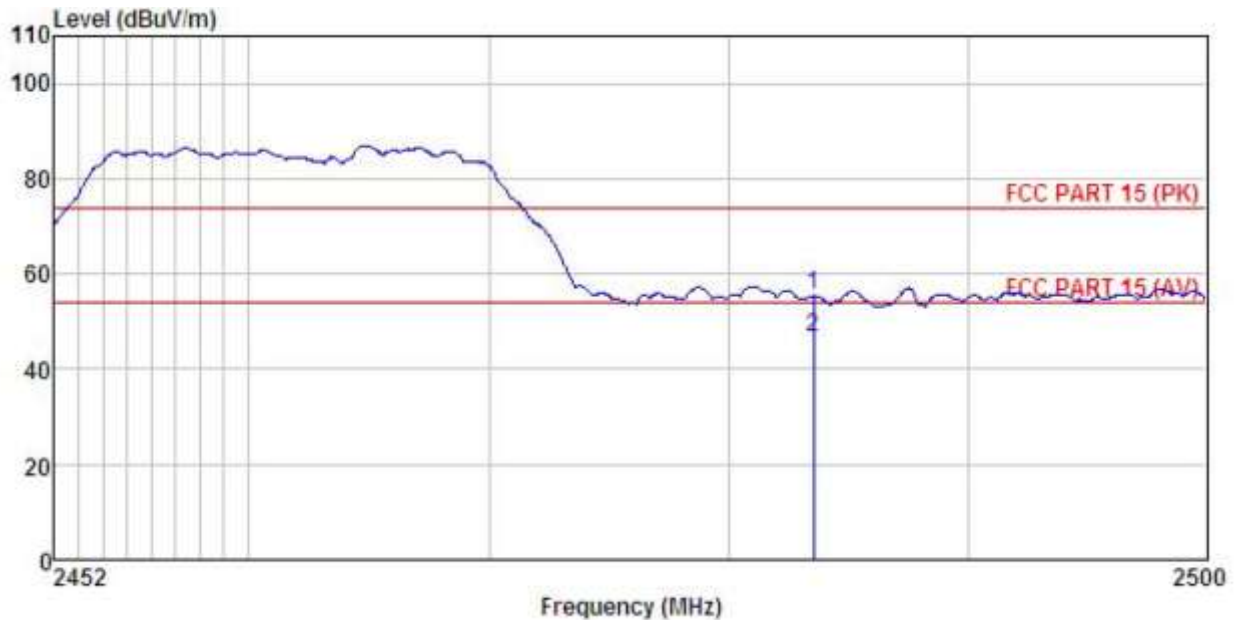


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	21.55	27.36	4.81	0.00	55.42	74.00 -18.58 Peak
2	2483.500	12.78	27.36	4.81	0.00	46.65	54.00 -7.35 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

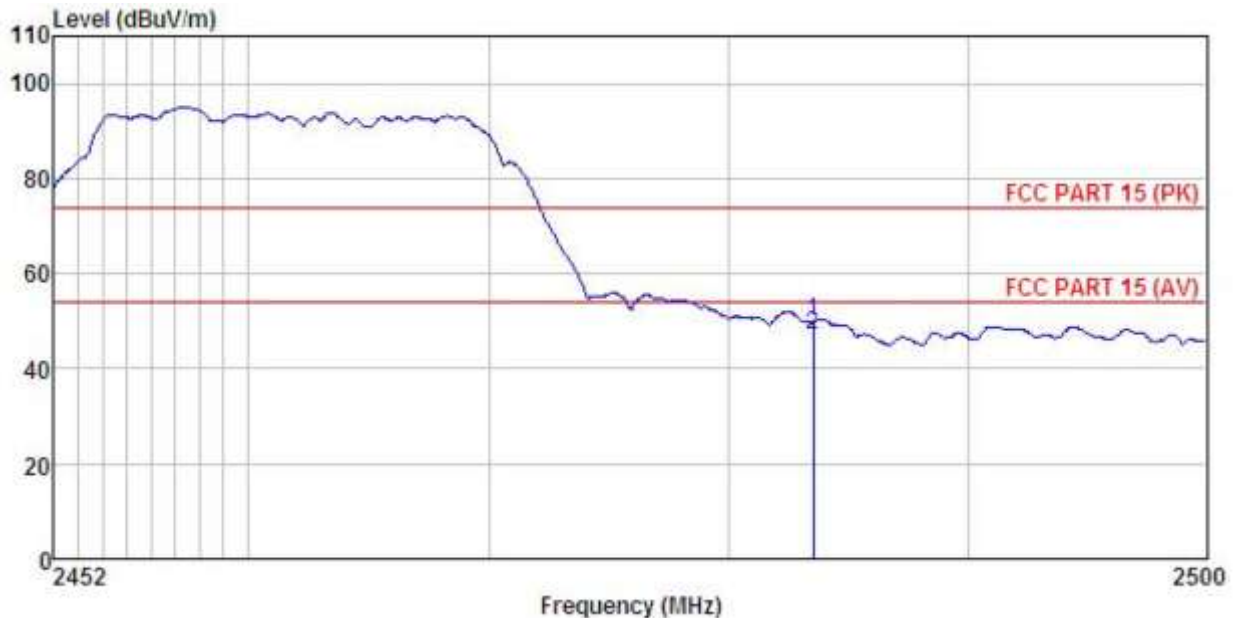


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	15.88	27.35	4.81	0.00	49.74	74.00	-24.26	Peak
2	2483.500	13.25	27.35	4.81	0.00	47.11	54.00	-6.89	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n20 mode (Right module):

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

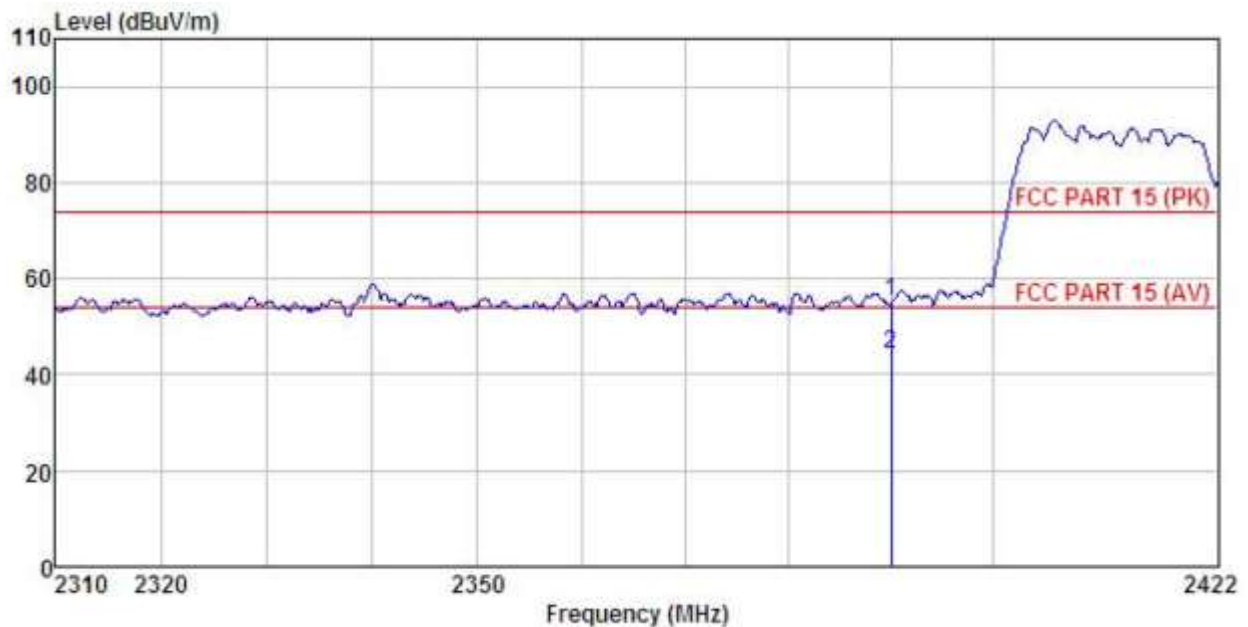


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	21.78	27.07	4.69	0.00	55.22	74.00	-18.78	Peak
2	2390.000	10.74	27.07	4.69	0.00	44.18	54.00	-9.82	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

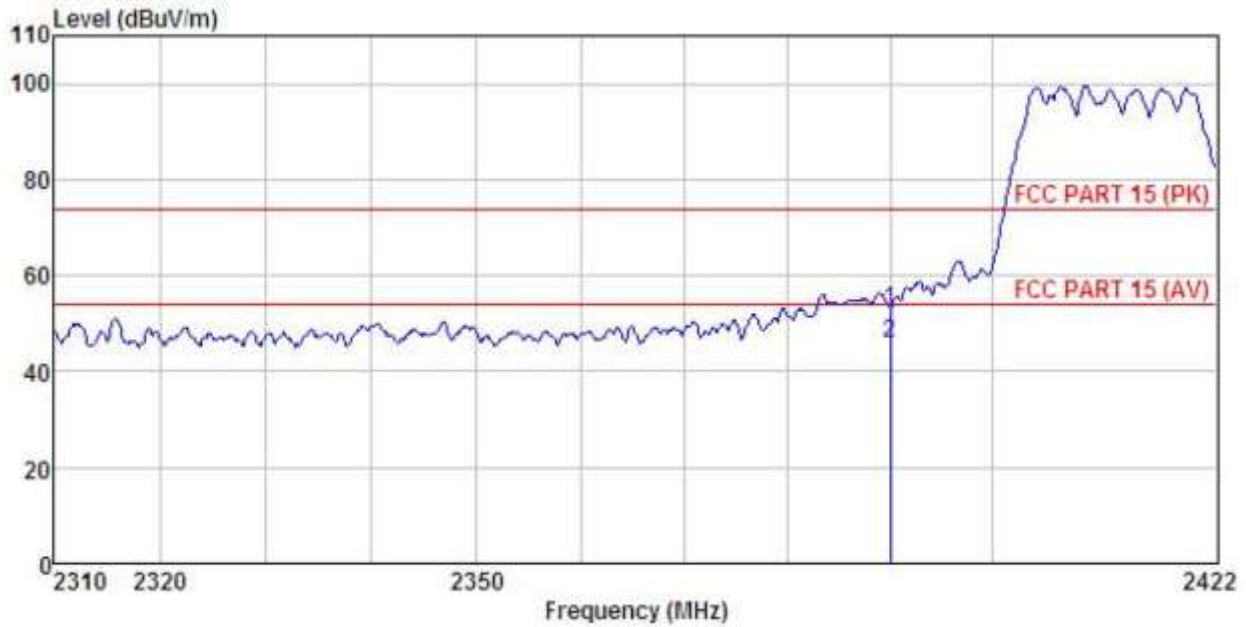


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	19.23	27.08	4.69	0.00	52.68	74.00	-21.32	Peak
2	2390.000	12.45	27.08	4.69	0.00	45.90	54.00	-8.10	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

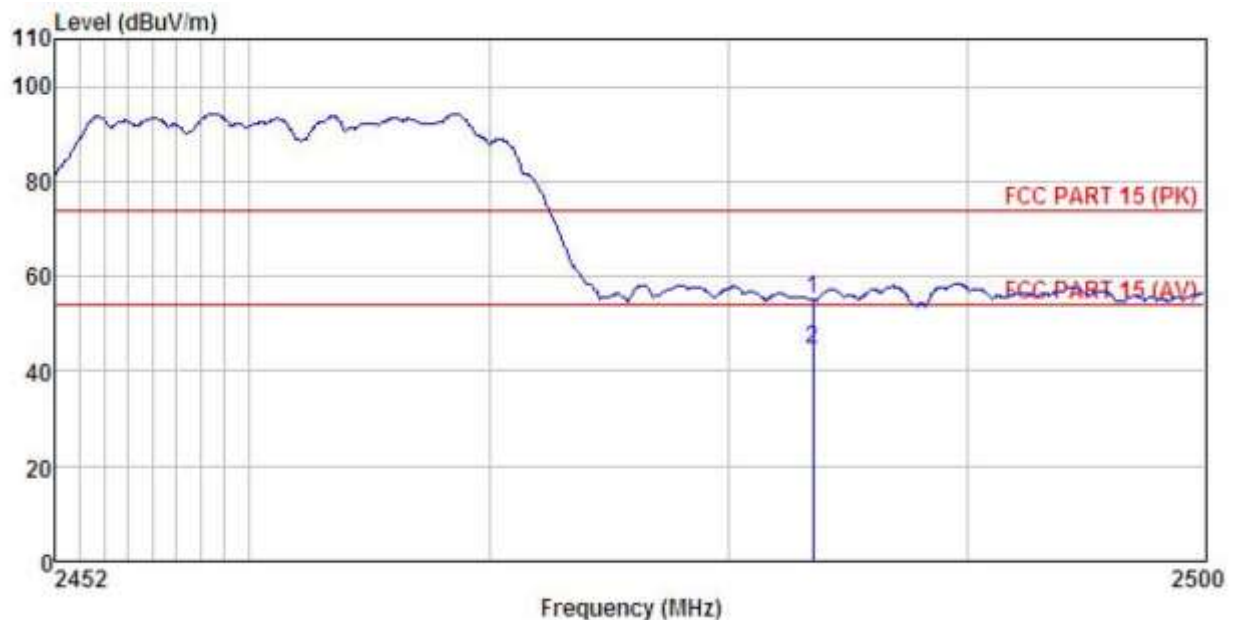


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	21.32	27.36	4.81	0.00	55.19	74.00	-18.81 Peak
2	2483.500	10.75	27.36	4.81	0.00	44.62	54.00	-9.38 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

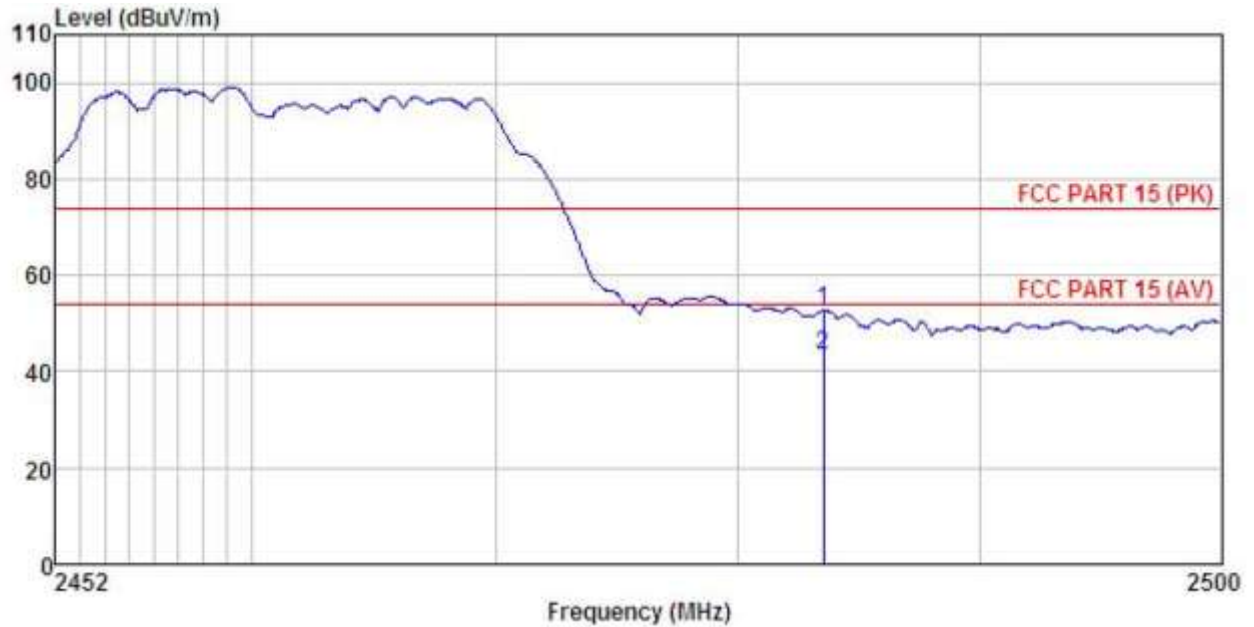


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	18.86	27.35	4.81	0.00	52.72	74.00	-21.28 Peak
2	2483.500	9.75	27.35	4.81	0.00	43.61	54.00	-10.39 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.7 Spurious Emission

6.7.1 Conducted Emission Method






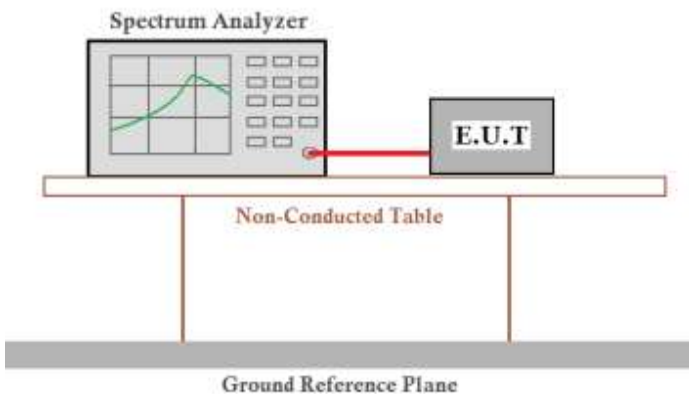
Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:


Left module 802.11b mode:

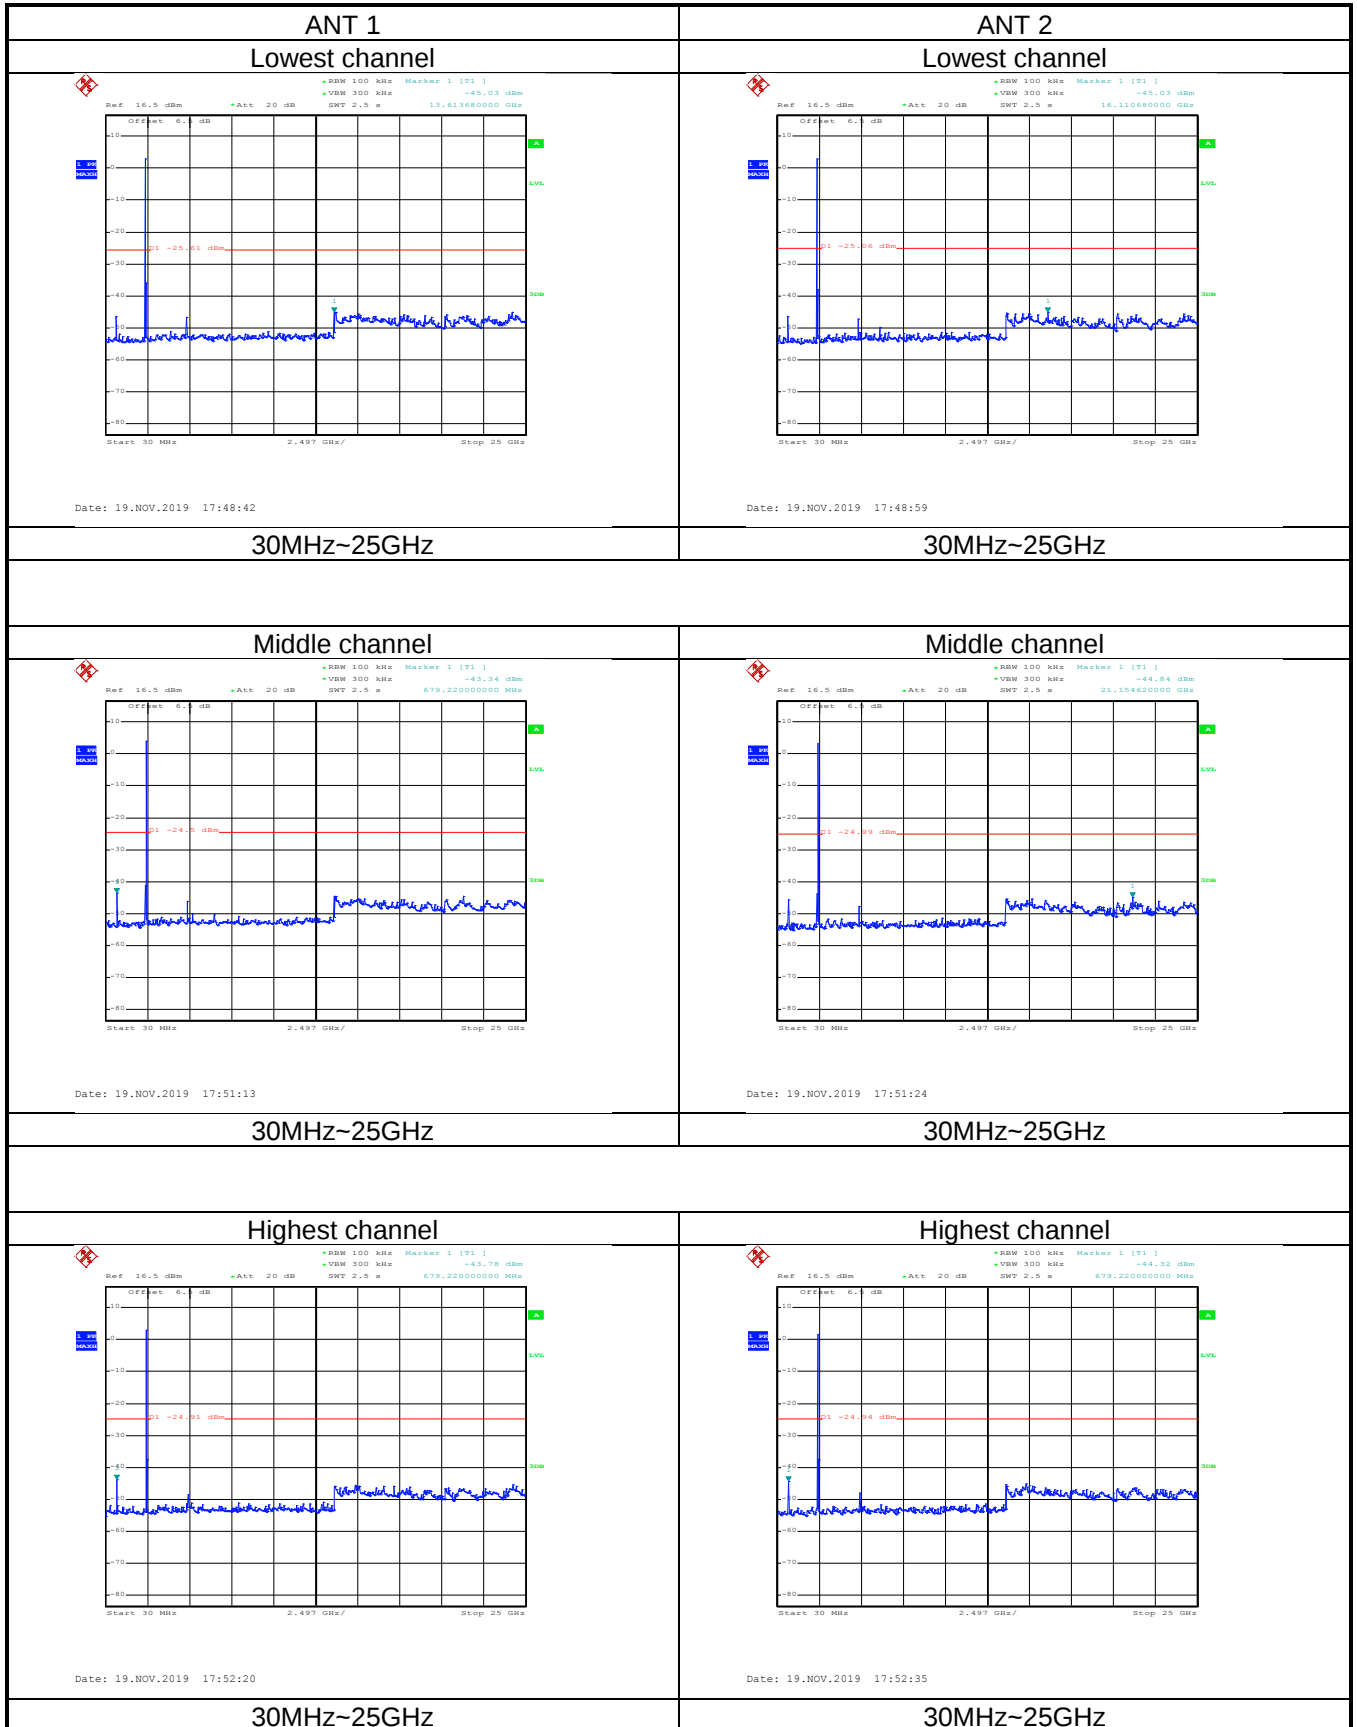







Left module 802.11g mode:

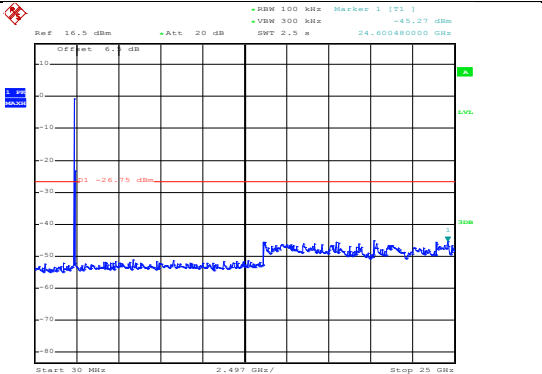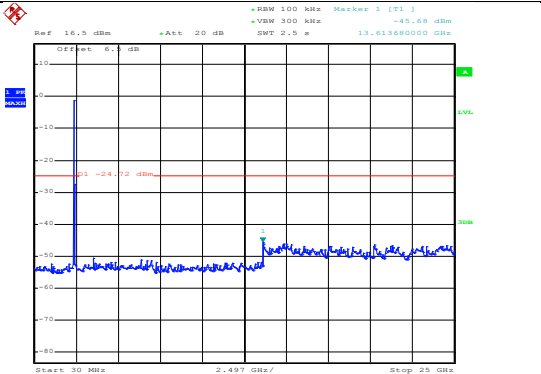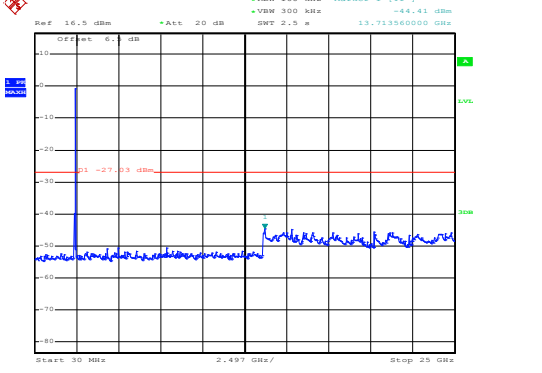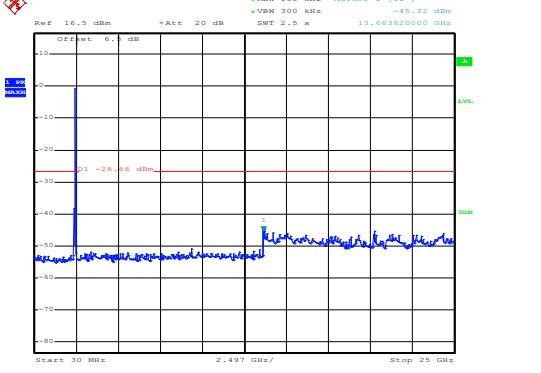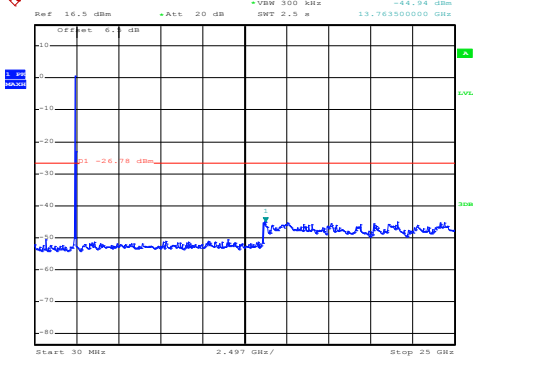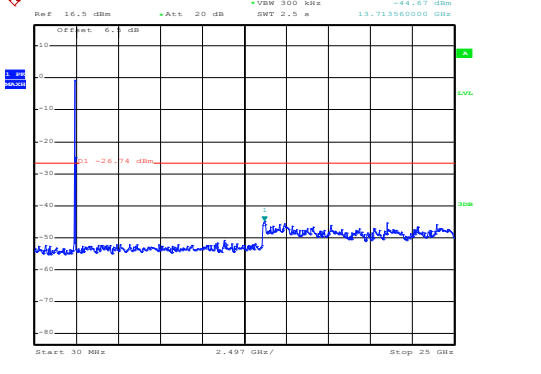ANT 1 Lowest channel	ANT 2 Lowest channel
 Date: 19.NOV.2019 17:53:37	 Date: 19.NOV.2019 17:53:49
30MHz~25GHz	30MHz~25GHz
Middle channel	Middle channel
 Date: 19.NOV.2019 17:54:51	 Date: 19.NOV.2019 17:55:03
30MHz~25GHz	30MHz~25GHz
Highest channel	Highest channel
 Date: 19.NOV.2019 17:56:41	 Date: 19.NOV.2019 17:56:54
30MHz~25GHz	30MHz~25GHz







Left module 802.11n20 mode:

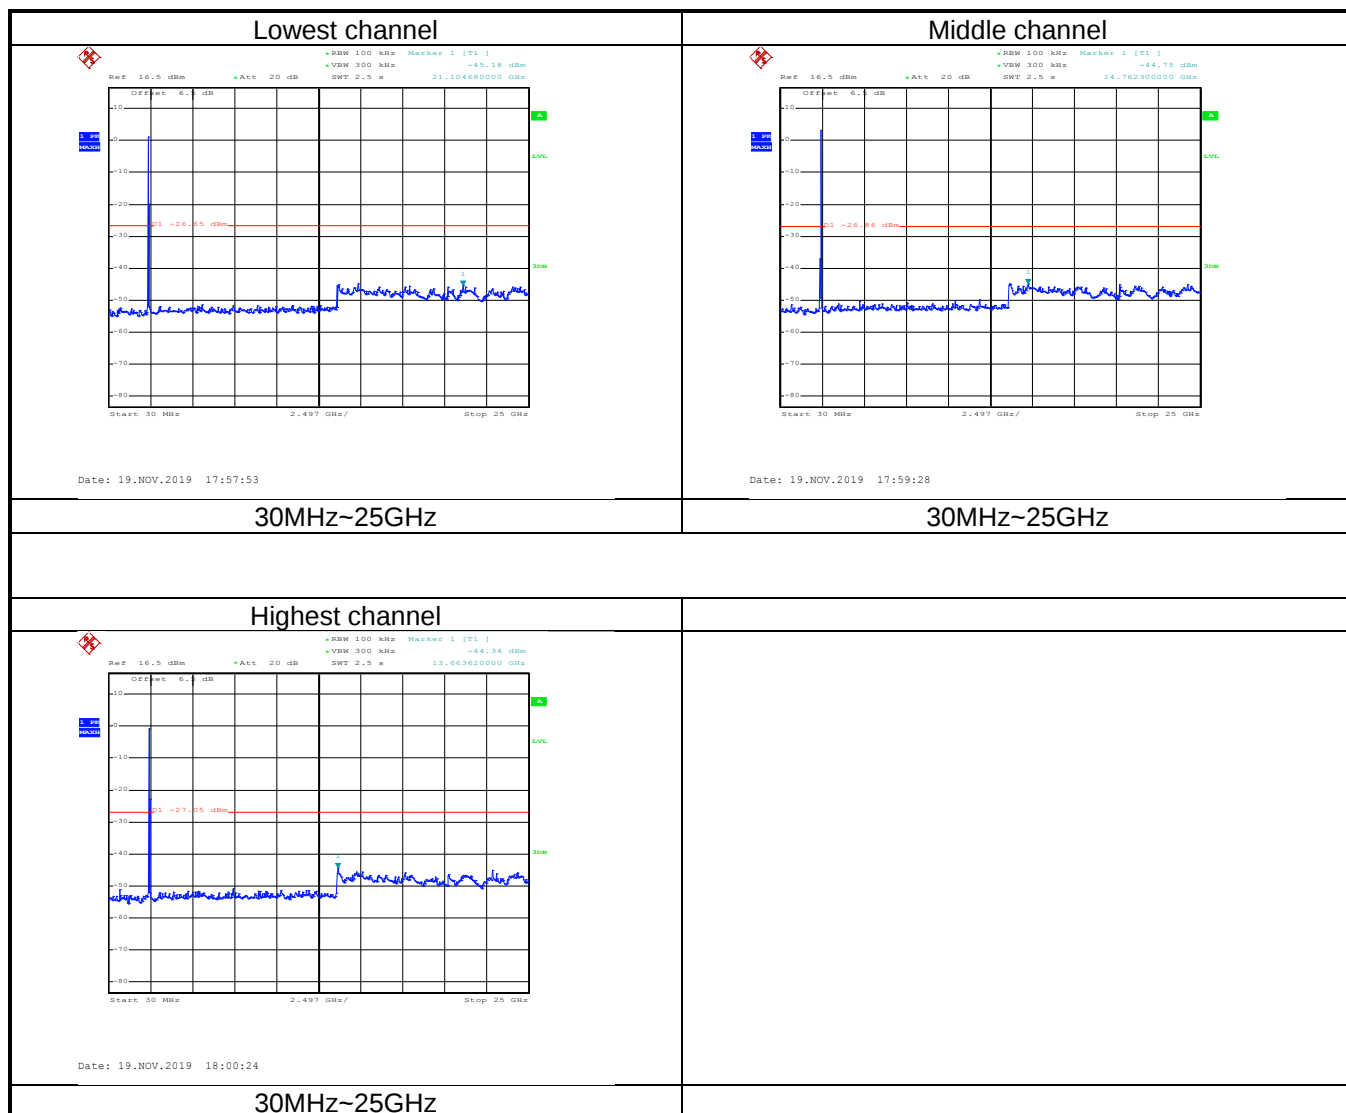


Right module 802.11b mode:

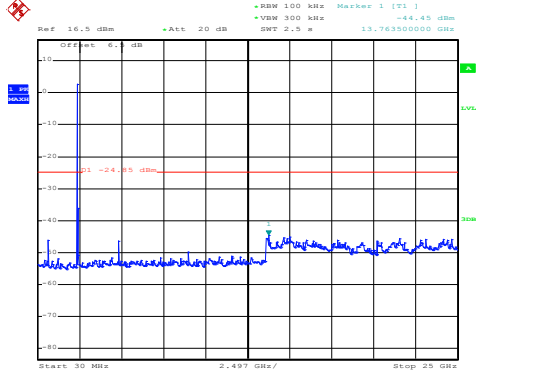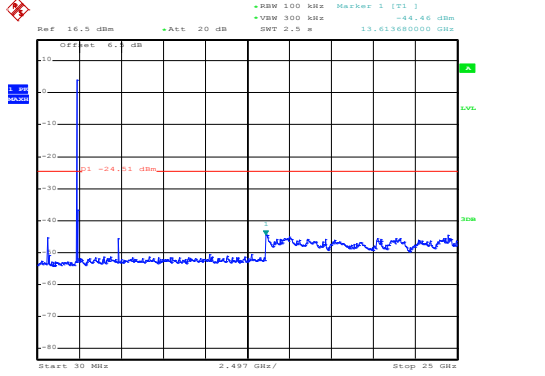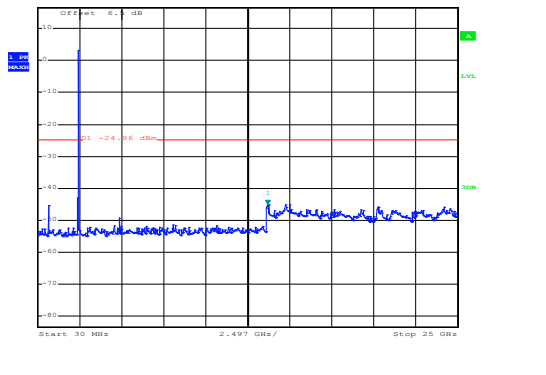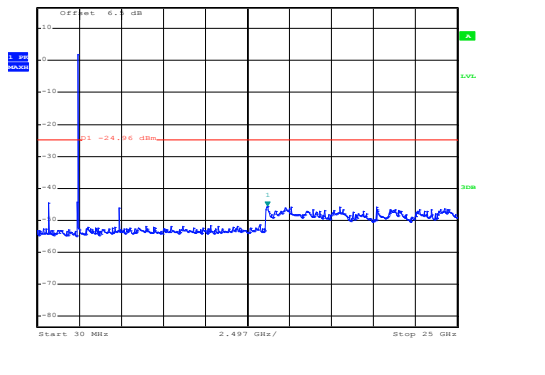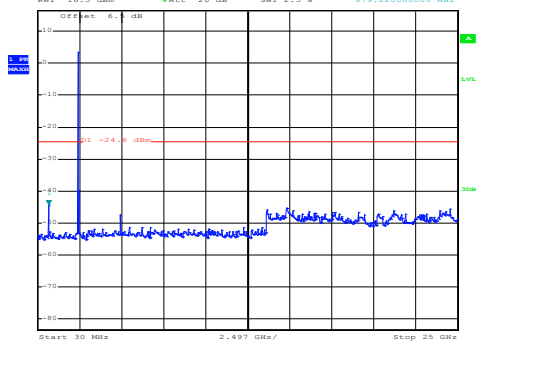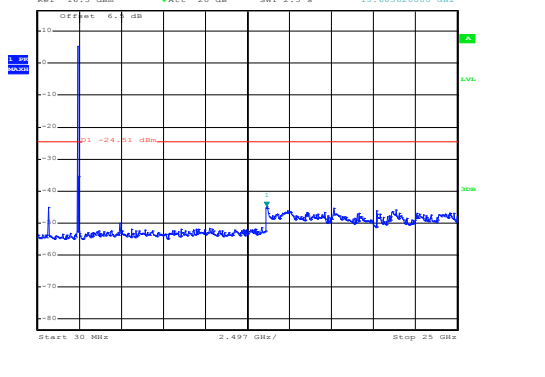ANT 3 Lowest channel  Date: 19.NOV.2019 17:49:16	ANT 4 Lowest channel  Date: 19.NOV.2019 17:50:10
30MHz~25GHz	30MHz~25GHz
Middle channel  Date: 19.NOV.2019 17:51:40	Middle channel  Date: 19.NOV.2019 17:51:54
30MHz~25GHz	30MHz~25GHz
Highest channel  Date: 19.NOV.2019 17:52:48	Highest channel  Date: 19.NOV.2019 17:53:02
30MHz~25GHz	30MHz~25GHz


Right module 802.11g mode:

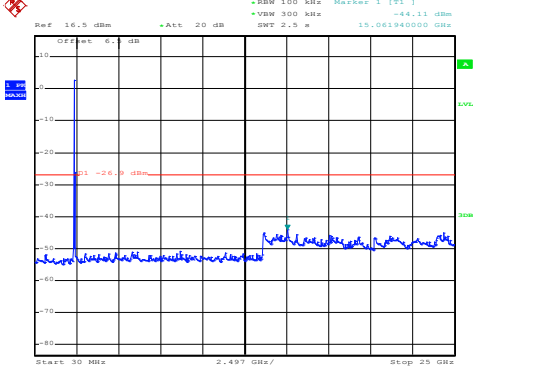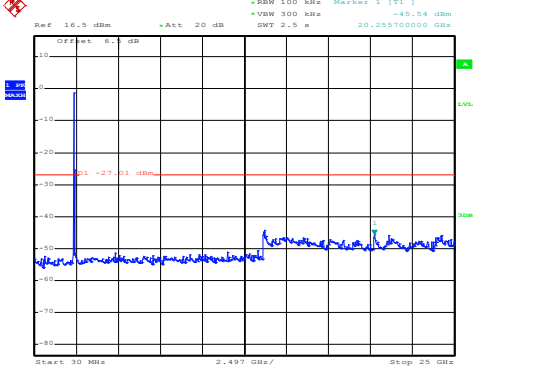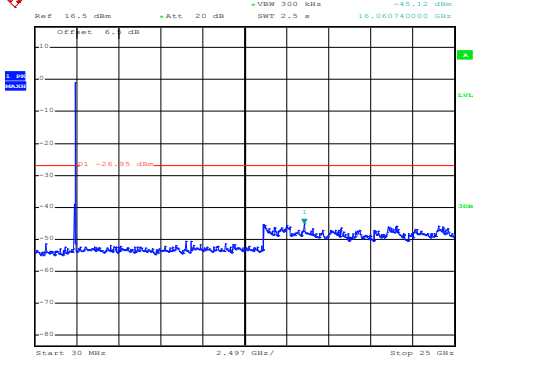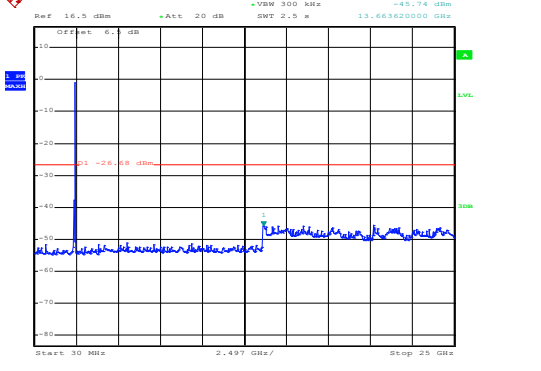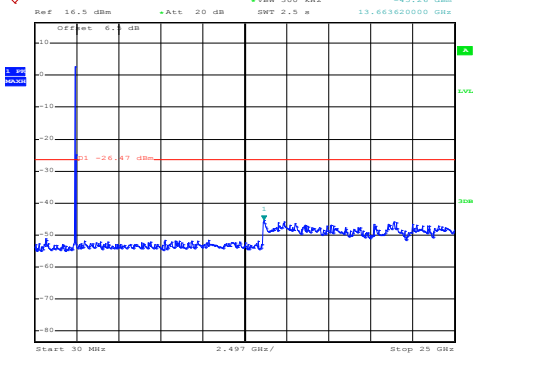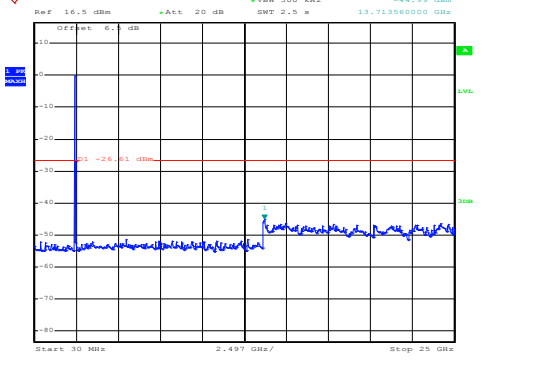
ANT 3 Lowest channel	ANT 4 Lowest channel
 Date: 19.NOV.2019 17:54:09	 Date: 19.NOV.2019 17:54:28
30MHz~25GHz	30MHz~25GHz
Middle channel	Middle channel
 Date: 19.NOV.2019 17:55:19	 Date: 19.NOV.2019 17:55:34
30MHz~25GHz	30MHz~25GHz
Highest channel	Highest channel
 Date: 19.NOV.2019 17:57:07	 Date: 19.NOV.2019 17:57:20
30MHz~25GHz	30MHz~25GHz

Right module 802.11n20 mode:

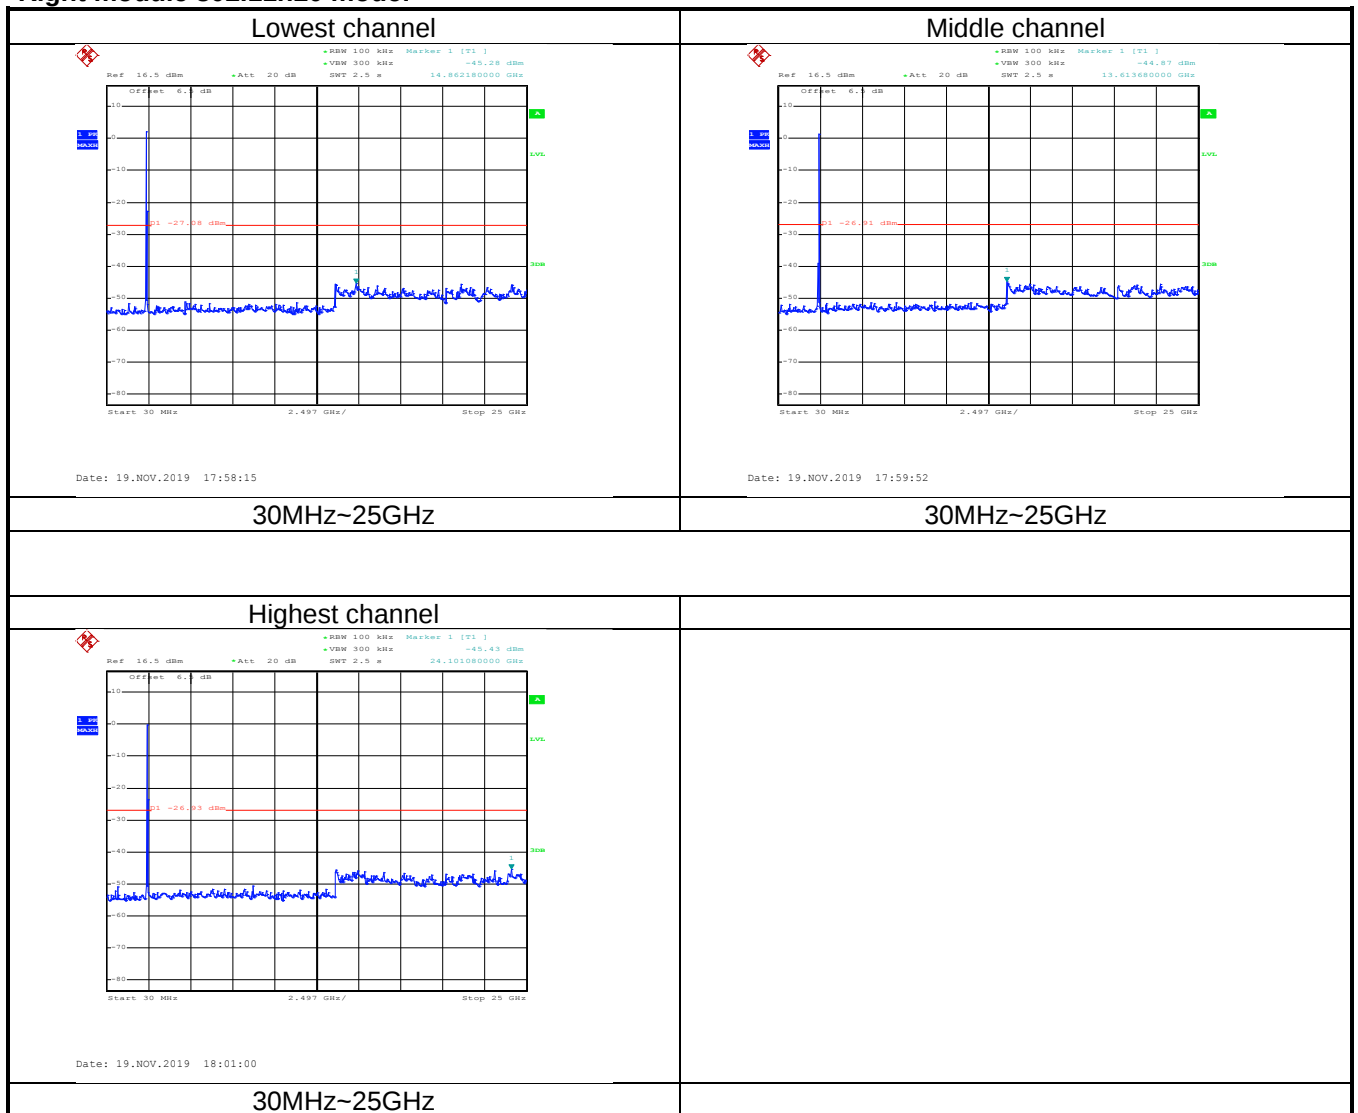

6.7.2 Radiated Emission Method

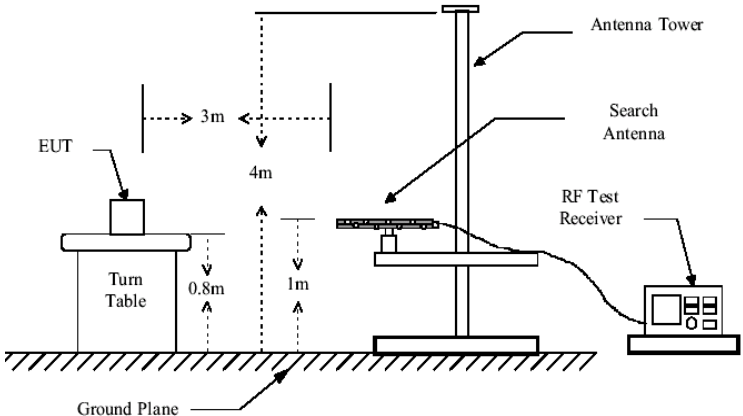
Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	960MHz-1GHz	54.0			Quasi-peak Value
	Above 1GHz	54.0			Average Value
74.0			Peak Value		
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz  Above 1GHz				

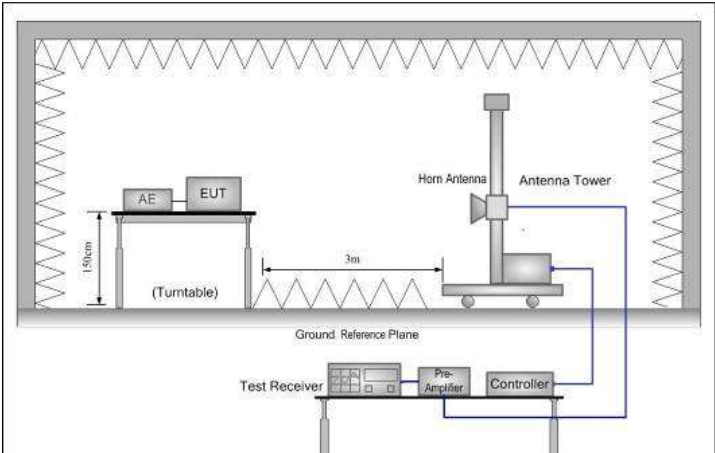	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24°C Humi: 57%

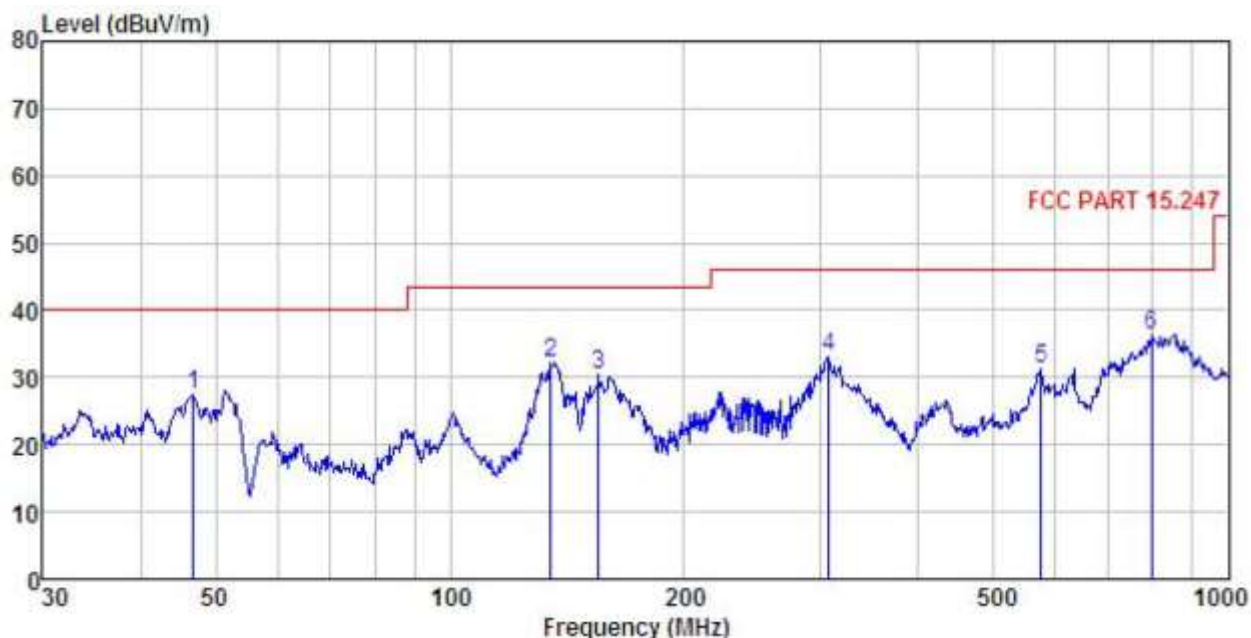


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	46.830	43.68	12.23	1.28	29.85	27.34	40.00	-12.66	QP
2	134.559	49.39	9.88	2.34	29.30	32.31	43.50	-11.19	QP
3	155.364	47.94	9.12	2.55	29.17	30.44	43.50	-13.06	QP
4	306.754	44.68	13.76	2.96	28.47	32.93	46.00	-13.07	QP
5	574.626	37.55	18.95	3.91	29.02	31.39	46.00	-14.61	QP
6	796.183	38.84	21.44	4.35	28.22	36.41	46.00	-9.59	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamp Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Test all adapters and modes to reflect only the worst mode

Product Name:	ADVANCED DIAGNOSTIC & ANALYSIS SYSTEM	Product model:	MaxiSys MS909
Test By:	YT	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz	Environment:	Temp: 24℃ Humi: 57%

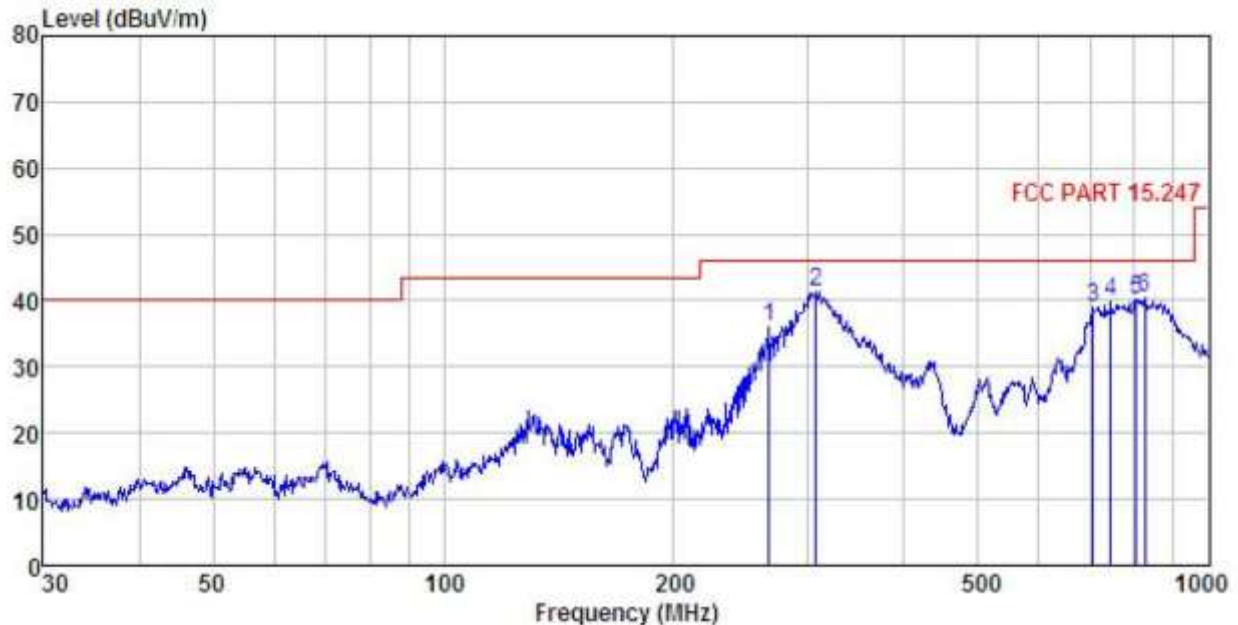

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	266.609	48.60	13.01	2.85	28.51	35.95	46.00	-10.05 QP
2	306.754	52.99	13.76	2.96	28.47	41.24	46.00	-4.76 QP
3	706.700	43.07	20.42	4.20	28.64	39.05	46.00	-6.95 QP
4	744.866	43.39	20.59	4.34	28.50	39.82	46.00	-6.18 QP
5	804.603	42.53	21.58	4.33	28.18	40.26	46.00	-5.74 QP
6	824.597	42.26	22.05	4.27	28.10	40.48	46.00	-5.52 QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Test all adapters and modes to reflect only the worst mode

Above 1GHz (Left Module ANT1):

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	52.56	30.94	6.81	41.82	48.49	74.00	-25.51	Vertical
4824.00	53.69	30.94	6.81	41.82	49.62	74.00	-24.38	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.53	30.94	6.81	41.82	42.46	54.00	-11.54	Vertical
4824.00	48.15	30.94	6.81	41.82	44.08	54.00	-9.92	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.52	31.20	6.85	41.84	50.73	74.00	-23.27	Vertical
4874.00	55.79	31.20	6.85	41.84	52.00	74.00	-22.00	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.26	31.20	6.85	41.84	43.47	54.00	-10.53	Vertical
4874.00	47.98	31.20	6.85	41.84	44.19	54.00	-9.81	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	53.36	31.46	6.89	41.86	49.85	74.00	-24.15	Vertical
4924.00	54.18	31.46	6.89	41.86	50.67	74.00	-23.33	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.55	31.46	6.89	41.86	43.04	54.00	-10.96	Vertical
4924.00	47.18	31.46	6.89	41.86	43.67	54.00	-10.33	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Left Module ANT2):

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	55.49	30.94	6.81	41.82	51.42	74.00	-22.58	Vertical
4824.00	54.63	30.94	6.81	41.82	50.56	74.00	-23.44	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.78	30.94	6.81	41.82	45.71	54.00	-8.29	Vertical
4824.00	48.55	30.94	6.81	41.82	44.48	54.00	-9.52	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.16	31.20	6.85	41.84	50.37	74.00	-23.63	Vertical
4874.00	53.99	31.20	6.85	41.84	50.20	74.00	-23.80	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.59	31.20	6.85	41.84	44.80	54.00	-9.20	Vertical
4874.00	48.56	31.20	6.85	41.84	44.77	54.00	-9.23	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.63	31.46	6.89	41.86	52.12	74.00	-21.88	Vertical
4924.00	54.78	31.46	6.89	41.86	51.27	74.00	-22.73	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.63	31.46	6.89	41.86	46.12	54.00	-7.88	Vertical
4924.00	47.58	31.46	6.89	41.86	44.07	54.00	-9.93	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Left Module ANT1):

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	55.74	30.94	6.81	41.82	51.67	74.00	-22.33	Vertical
4824.00	54.16	30.94	6.81	41.82	50.09	74.00	-23.91	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.86	30.94	6.81	41.82	45.79	54.00	-8.21	Vertical
4824.00	48.55	30.94	6.81	41.82	44.48	54.00	-9.52	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	56.78	31.20	6.85	41.84	52.99	74.00	-21.01	Vertical
4874.00	54.36	31.20	6.85	41.84	50.57	74.00	-23.43	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.53	31.20	6.85	41.84	42.74	54.00	-11.26	Vertical
4874.00	47.18	31.20	6.85	41.84	43.39	54.00	-10.61	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.56	31.46	6.89	41.86	52.05	74.00	-21.95	Vertical
4924.00	56.98	31.46	6.89	41.86	53.47	74.00	-20.53	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.52	31.46	6.89	41.86	45.01	54.00	-8.99	Vertical
4924.00	47.19	31.46	6.89	41.86	43.68	54.00	-10.32	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Left Module ANT2):

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	57.15	30.94	6.81	41.82	53.08	74.00	-20.92	Vertical
4824.00	58.59	30.94	6.81	41.82	54.52	74.00	-19.48	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.63	30.94	6.81	41.82	45.56	54.00	-8.44	Vertical
4824.00	48.57	30.94	6.81	41.82	44.50	54.00	-9.50	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	55.15	31.20	6.85	41.84	51.36	74.00	-22.64	Vertical
4874.00	56.47	31.20	6.85	41.84	52.68	74.00	-21.32	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.15	31.20	6.85	41.84	43.36	54.00	-10.64	Vertical
4874.00	48.98	31.20	6.85	41.84	45.19	54.00	-8.81	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.26	31.46	6.89	41.86	51.75	74.00	-22.25	Vertical
4924.00	56.39	31.46	6.89	41.86	52.88	74.00	-21.12	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.87	31.46	6.89	41.86	46.36	54.00	-7.64	Vertical
4924.00	48.17	31.46	6.89	41.86	44.66	54.00	-9.34	Horizontal
Remark:								
3. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
4. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Left Module):

802.11n(HT20)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	55.56	36.06	6.81	41.82	56.61	74.00	-17.39	Vertical
4824.00	57.15	36.06	6.81	41.82	58.20	74.00	-15.80	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.26	36.06	6.81	41.82	47.31	54.00	-6.69	Vertical
4824.00	45.19	36.06	6.81	41.82	46.24	54.00	-7.76	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	55.56	36.32	6.85	41.84	56.89	74.00	-17.11	Vertical
4874.00	58.78	36.32	6.85	41.84	60.11	74.00	-13.89	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	45.52	36.32	6.85	41.84	46.85	54.00	-7.15	Vertical
4874.00	47.19	36.32	6.85	41.84	48.52	54.00	-5.48	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.26	36.58	6.89	41.86	56.87	74.00	-17.13	Vertical
4924.00	56.38	36.58	6.89	41.86	57.99	74.00	-16.01	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.15	36.58	6.89	41.86	48.76	54.00	-5.24	Vertical
4924.00	48.55	36.58	6.89	41.86	50.16	54.00	-3.84	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Right Module ANT3):

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	53.26	30.94	6.81	41.82	49.19	74.00	-24.81	Vertical
4824.00	55.48	30.94	6.81	41.82	51.41	74.00	-22.59	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.53	30.94	6.81	41.82	42.46	54.00	-11.54	Vertical
4824.00	47.89	30.94	6.81	41.82	43.82	54.00	-10.18	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	56.35	31.20	6.85	41.84	52.56	74.00	-21.44	Vertical
4874.00	54.15	31.20	6.85	41.84	50.36	74.00	-23.64	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.52	31.20	6.85	41.84	44.73	54.00	-9.27	Vertical
4874.00	47.98	31.20	6.85	41.84	44.19	54.00	-9.81	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	54.25	31.46	6.89	41.86	50.74	74.00	-23.26	Vertical
4924.00	53.99	31.46	6.89	41.86	50.48	74.00	-23.52	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	45.52	31.46	6.89	41.86	42.01	54.00	-11.99	Vertical
4924.00	46.78	31.46	6.89	41.86	43.27	54.00	-10.73	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Right Module ANT4):

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	55.15	30.94	6.81	41.82	51.08	74.00	-22.92	Vertical
4824.00	56.78	30.94	6.81	41.82	52.71	74.00	-21.29	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.63	30.94	6.81	41.82	44.56	54.00	-9.44	Vertical
4824.00	47.19	30.94	6.81	41.82	43.12	54.00	-10.88	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	57.63	31.20	6.85	41.84	53.84	74.00	-20.16	Vertical
4874.00	55.29	31.20	6.85	41.84	51.50	74.00	-22.50	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.63	31.20	6.85	41.84	43.84	54.00	-10.16	Vertical
4874.00	48.89	31.20	6.85	41.84	45.10	54.00	-8.90	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	56.63	31.46	6.89	41.86	53.12	74.00	-20.88	Vertical
4924.00	55.45	31.46	6.89	41.86	51.94	74.00	-22.06	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	47.15	31.46	6.89	41.86	43.64	54.00	-10.36	Vertical
4924.00	48.29	31.46	6.89	41.86	44.78	54.00	-9.22	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Right Module ANT3):

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	54.53	30.94	6.81	41.82	50.46	74.00	-23.54	Vertical
4824.00	55.98	30.94	6.81	41.82	51.91	74.00	-22.09	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.56	30.94	6.81	41.82	45.49	54.00	-8.51	Vertical
4824.00	48.52	30.94	6.81	41.82	44.45	54.00	-9.55	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	55.26	31.20	6.85	41.84	51.47	74.00	-22.53	Vertical
4874.00	56.63	31.20	6.85	41.84	52.84	74.00	-21.16	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.15	31.20	6.85	41.84	43.36	54.00	-10.64	Vertical
4874.00	48.87	31.20	6.85	41.84	45.08	54.00	-8.92	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	56.63	31.46	6.89	41.86	53.12	74.00	-20.88	Vertical
4924.00	57.89	31.46	6.89	41.86	54.38	74.00	-19.62	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.25	31.46	6.89	41.86	42.74	54.00	-11.26	Vertical
4924.00	48.78	31.46	6.89	41.86	45.27	54.00	-8.73	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Right Module ANT4):

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	56.63	30.94	6.81	41.82	52.56	74.00	-21.44	Vertical
4824.00	57.15	30.94	6.81	41.82	53.08	74.00	-20.92	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.56	30.94	6.81	41.82	44.49	54.00	-9.51	Vertical
4824.00	49.26	30.94	6.81	41.82	45.19	54.00	-8.81	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	57.56	31.20	6.85	41.84	53.77	74.00	-20.23	Vertical
4874.00	55.98	31.20	6.85	41.84	52.19	74.00	-21.81	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.82	31.20	6.85	41.84	45.03	54.00	-8.97	Vertical
4874.00	49.26	31.20	6.85	41.84	45.47	54.00	-8.53	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	55.26	31.46	6.89	41.86	51.75	74.00	-22.25	Vertical
4924.00	57.49	31.46	6.89	41.86	53.98	74.00	-20.02	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.63	31.46	6.89	41.86	46.12	54.00	-7.88	Vertical
4924.00	49.15	31.46	6.89	41.86	45.64	54.00	-8.36	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

Above 1GHz (Right Module):

802.11n(HT20)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	57.52	36.06	6.81	41.82	58.57	74.00	-15.43	Vertical
4824.00	56.39	36.06	6.81	41.82	57.44	74.00	-16.56	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.52	36.06	6.81	41.82	49.57	54.00	-4.43	Vertical
4824.00	49.15	36.06	6.81	41.82	50.20	54.00	-3.80	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	54.26	36.32	6.85	41.84	55.59	74.00	-18.41	Vertical
4874.00	55.98	36.32	6.85	41.84	57.31	74.00	-16.69	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	46.36	36.32	6.85	41.84	47.69	54.00	-6.31	Vertical
4874.00	45.21	36.32	6.85	41.84	46.54	54.00	-7.46	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	54.19	36.58	6.89	41.86	55.80	74.00	-18.20	Vertical
4924.00	56.87	36.58	6.89	41.86	58.48	74.00	-15.52	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.32	36.58	6.89	41.86	47.93	54.00	-6.07	Vertical
4924.00	47.81	36.58	6.89	41.86	49.42	54.00	-4.58	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								