User's Manual

Solar Powered
Bluetooth In Vehicle

Bluetooth Hands-free Speakerphone & Digital FM transmitter

www.eznex.co.kr

EZNEX

Solar Power

New and Revolutionary
Solar Powered
Bluetooth Hands-free Speakerphone
ENA-9000





N0.	English	Français	Deutsch	Italiano	Русский	Español	한 국 어
1	Charging Indicator	Indicateur de charge	Ladeanzeige	Indicatore di carica	Индикатор зарядки	Indicador de carga	충전 표시등
2	Main indicator	Indicateur principal	Hauptanzeige	Indicatore principale	Основной индикатор	Indicador principal	FM 표시등
3	Power indicator	Indicateur de puissance	Statusanzeige	Spia di alimentazione	Индикатор питания	Indicador de energía	전원 표시등
4	Multi-function indicator	Indicateur multi-fonction	Multifunktionsanzeige	Indicatore multifunzione	Много - функциональный индикатор	Indicador multifunción	실행 표시등
5	Multi-function button	Bouton multi-fonction	Multifunktionstaste	Tasto multifunzione	Много-функциональная - кнопка	Botón multifunción	다기능 버튼
6	RW button	Bouton RW	RW Taste	Tasto indietro	Кнопка перемотки назад (RW)	Botón RW (Devolver)	RW 버튼
7	FF button	Bouton FF	FF Taste	Tasto avanti	Кнопка перемотки вперед (FF)	Botón FF (Adelantar)	FF 버튼
8	Play button	Bouton Lecture	Abspielen Taste	Tasto play	Кнопка проигрывания	Botón de Reproducción	플레이 버튼
9	Volume up button	Bouton pour monter le volume	Lautstärke auf Taste	Tasto volume +	Кнопка увеличения громкости	Aumenta el volumen	볼륨업 버튼
10	Volume down button	Bouton pour discendre le volume	Lautstärke runter Taste	Tasto volume -	Кнопка уменьшения громкости	Disminuye el volumen	볼륨다운 버튼
11	Speaker	Diffuseur	Lautsprecher	Altoparlante	Громкая связь	Parlante	스피커
12	FM button	Bouton FM	FM Taste	Tasto FM	Кнопка вещания в диапазоне FM	Botón FM para vehículo	FM 버튼
13	Voice prompt button	Bouton de commande vocale	Sprachanweisungstaste	Tasto messaggi vocali	Кнопка голосовой подсказки	Botón indicación por voz	안내스텝 버튼
14	DC charging port	Port de chargement DC	DC Ladestecker	Porta di carica CC	Порт подзарядки DC	Puerto de carga DC	충전단자
15	Solar cell	Cellule solaire	Solarzelle	Cellula solare	Фотоэлемент	Celda solar	태양광 충전판
16	Reset hole	Orifice de réinitialisation	Reset Loch	Foro di reset	Кнопка сброса	Ranura de restauración	리셋 홀

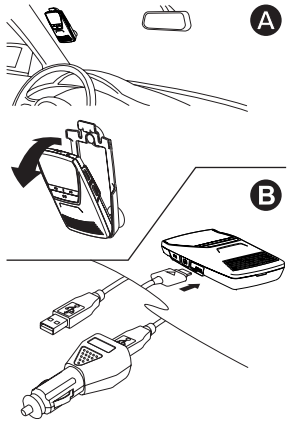

BEFORE YOU BEGIN

ENA-9000, PLEASE READ AND FOLLOW THESE INSTRUCTIONS.
Take a moment to familiarize yourself with your new ENA-9000 solar powered bluetooth hands-free speakerphone & digital FM transmitter.

AVANT DE COMMENCER

AVANT D'UTILISER ENA-9000, VEUILLEZ LIRE ET SUIVRE CES INSTRUCTIONS.
Prenez un moment pour vous familiariser avec votre nouvel émetteur FM numérique et téléphone haut-parleur mars libre solaire ENA-9000, alimenté par Bluetooth.

VOR DEM START

VOR DEM GEBRAUCH DES ENA-9000 LESEN UND BEFOLGEN SIE BITTE DIESE ANWEISUNGEN.
Nehmen Sie sich einen Moment Zeit, um sich mit Ihrem neuen ENA-9000 solarbetriebenen Bluetooth Freisprechtelefon und digitalem FM Transmitter vertraut zu machen.

PRIMA DI INIZIARE

PRIMA DI UTILIZZARE L'ENA-9000, SI PREGA DI LEGGERE E SEGUIRE LE SEGUENTI ISTRUZIONI.
Prendetevi qualche minuto per familiarizzare con il vostro nuovo vivavoce Bluetooth e trasmettitore FM digitale a energia solare ENA-9000.

ПРЕЖДЕ, ЧЕМ НАЧАТЬ

Перед началом использования гарнитуры громкой связи ENA-9000, внимательно ознакомьтесь с данными инструкциями по эксплуатации.
Внимательно ознакомьтесь с Вашей новой беспроводной Bluetooth гарнитурой громкой связи ENA-9000 - на солнечных батареях с возможностью вещания в FM диапазоне.

ANTES DE COMENZAR

ANTES DE UTILIZAR EL ENA-9000, LEA Y SIGA ESTAS INSTRUCCIONES.
Tómese un momento para familiarizarse con su nuevo teléfono Bluetooth ENA-9000 con parlante manos libres y transmisor digital FM potenciado por energía solar.

사용하기 전에

이 제품을 사용하기 전에 사용자 설명서를 충분히 읽어 주시고 내용을 숙지하시기 바랍니다.

1 PAIRING YOUR ENA-9000

YOU MUST PAIR YOUR ENA-9000 WITH YOUR PHONE/MUSIC PLAYER VIA BLUETOOTH BEFORE YOU CAN USE IT.

PAIRING :
1. Enable bluetooth on your phone/music player. (Consult the device's user guide)
2. Press and hold the multi-function button on the ENA-9000 for 5 seconds. The multi function indicator light will flash and you will then hear a voice indicating that the ENA-9000 has entered bluetooth pairing mode. (It gets in pairing mode once the power is turned on for the first time)
3. Search for nearby bluetooth devices with your phone/music player and select the ENA-9000.
4. Enter the password key - 0000.
5. After pairing successfully, your ENA-9000 will say, "pairing successful".
6. Your ENA-9000 will then say, "connected", and the power indicator light will remain lit to indicate that it is paired to your bluetooth device.

2 TESTING AND USE

Your ENA-9000 and phone/music player are now paired and connected. To verify that every thing is in good working order, follow the next few instructions.

TO VERIFY HANDS-FREE CALLING OPERATION :
Dial the number you want to call on the phone and tap the multi-function button on your ENA-9000 twice. If your phone and the ENA-9000 are successfully paired, you will hear a dial tone on your ENA-9000.

TO VERIFY STREAMING AUDIO OPERATION :
Play music on your portable bluetooth music player.
If your music player and the ENA-9000 are successfully paired, you will hear the music on your ENA-9000. If your phone/music player supports bluetooth AVRCP profile (Audio/Video remote control profile), you can control it using your ENA-9000

YOU'RE FINISHED!
After successfully completing these steps in the beginning, you can skip its paring procedure when you try to re-connect. For daily use, ensure that your ENA-9000 is turned ON and your phone/music player's bluetooth feature is turned ON.
If you want to use its FM transmitter function, please refer to the section "Using your FM Car Radio"in this instruction manual.
To configure your ENA-9000's settings, see "Configuring your ENA-9000"

TIPS
- If your ENA-9000 is not connected to a bluetooth device for 2 minutes, it will stop searching for the last connected device to pair with. If this occurs, you can manually initiate a search for the last connected device by tapping the multi-function button.
- If your ENA-9000 is not connected to a bluetooth device for 10 minutes, it will be automatically turned off.

- To initialize your ENA-9000, press the multi-function button for 5 seconds, the voice prompt button, and the volume down button at the same time when it is not connected to a bluetooth device.

3 CONFIGURING YOUR ENA-9000

Your ENA-9000 uses a default set of configuration settings.
There are 3 configurable settings on your ENA-9000.

VOICE PROMPT LANGUAGE
Description : Configure the voice prompt's language.
To configure : Press and hold the voice prompt button while in bluetooth pairing mode (Press and hold the multi-function button for 5 seconds). Next, tap the volume up/down button to switch between the different languages. Finally, press and hold the voice prompt button again to finalize your choice.
Options : English (UK), English (US), French, German, Spanish, Spanish (Mexico), Italian, Russian.

CALLER ID
Description : Hear incoming callers' phone numbers.
To configure : Tap the voice prompt button.
Options : On or off

FM TRANSMITTER
Description : Streams calls and music to your radio via FM radio signals.
To configure : Tap the FM button.
Options : On or off

TIPS

MULTI POINT FEAUTRE
The ENA-9000 supports the bluetooth HFP profile (Hands Free Profile) for hands-free operation of your phone. You can also utilize the bluetooth A2DP profile(Advanced Audio Distribution Profile) to stream music of other bluetooth device at the same time. Therefore, you will still be able to answer incoming call from a connected mobile phone while listening to the music over car stereo audio or built-in speaker by other connected bluetooth music device.

4 FEATURE AND FUNCTION GUIDE

TURNING THE ENA-9000 ON AND OFF

TURING ON YOUR ENA-9000
Press and hold the multi-function button. You will hear the ENA-9000 says, "ready" and the power indicator light will flash.
Once it is connected between ENA-9000 and your bluetooth device, you will hear that the ENA-9000 says "Connected "and its power indicator stays turned on.

TURING OFF YOUR ENA-9000
Press and hold the multi-function button. You will hear the ENA-9000 say, "powering down" and the power indicator light will turn off.

INSTALLING IN CAR
To install the ENA-9000 in your car, refer to the image shown below. (REFER TO FIGURE A)
You can install your ENA-9000 at the window of your car with air cup or mounting tape.

NOTICE
- Do not leave your ENA-9000 unattended in your vehicle for an extended period of time; It may overheat due to exposure to direct or indirect sunlight.

USING WITH YOUR FM CAR RADIO

STEPS :
1. Make sure whether ENA-9000 is turned on and push the FM button to activate FM transmitter.
2. Turn on the radio and match frequency perfectly between the radio and the ENA-9000.
3. From now on, you can root call and music to your car's stereo system using the ENA-9000's built-in FM transmitter.

NOTICE
- The ENA-9000 will automatically attempt to select the best radio frequency. However, if audio quality is unsatisfactory, you can select another radio frequency.
  As the environment you are in changes, the audio quality may begin to degrade. It may be occurred in urban area, if it does, either have the ENA-9000 perform its frequency scanning feature or manually select a different radio frequency.
- The FM transmitter automatically powers off if it is idle for 1 minute.

BATTERY CHARGE
Charging your ENA-9000 by cigar charger or USB cable which is provided as an accessory.
(REFER TO FIGURE B)

CHARGING BATTERY WITH SOLAR POWER
You can charge the ENA-9000 when its solar cell is facing the sun light.
The charging indicator light will turn on when the battery is charging.
The indicator light will turn off when the unit is close to fully charged.

LOW BATTERY
When there is less than an hour of battery life left, the power indicator will flash at every 10 minute interval and the unit will make audible warnings by beeping and saying, "low battery".
The unit will automatically turn off when the battery life is at a critical level. It will beep and it will say, "Powering down.

MAKING CALLS

Function	Action
Make a call	Tap the multi-function button twice.
End a call	Tap the multi-function button.
Answer a call	Tap the multi-function button while the phone is ringing.
Reject a call	Press and hold the multi-function button for one second while the phone is ringing.(depend on your phone)
Redial the last call	Tap the multi-function button twice.
Mute	Press and hold the volume down button for one second.
Transfer call audio to your phone	Press and hold the multi-function button for one second when talking on the phone. (depended on your phone)
Make a voice dial call	Press and hold the multi function button for one second until you hear a tone. (depended on your phone)

LISTENING TO MUSIC

Function	Action
Play/Pause music	Tap the play button.
Stop music	Press and hold the play button for one second.
Fast forward	Press and hold the forward button.
Rewind	Press and hold the backward button.
Skip to the next track	Tap the forward button.
Skip to the previous track	Tap the backward button.
Increase volume	Tap the volume up button.
Decrease volume	Tap the volume down button.

NOTICE
- You cannot use the volume up/down button when it is in FM broadcasting mode.

FM BROADCASTING MODE

Function	Action
Turn FM broadcasting on/off	Tap the FM button.
Search for a channel	Search for a new channel	Press and hold the FM button.
Change a channel manually.	Tap the volume up/down button when the FM indicator light is on.

STANDARD AND FEATURE

Name	ENA-9000 (WIRELESS TELECOMMUNICATION DEVICE)
Bluetooth version	V 2.0
Supported profile	Headset Profile, Hands Free Profile, A2DP Profile
Bluetooth frequency range	2.402~2.480GHz(ISM Band)
Transmission output	Class 2
Transmission range	Approximately 10 meters
Battery life on standby	Approximately 280 hours
Talk time	Approximately 14 hours
The number of device registration	8 devices
Battery Charge time	Approximately 3 hours with the charger Approximately 33 hours with the solar panel
FM transmitter frequency	88.1 ~ 107.9 MHz
FM transmitter output	Less than 50 mW
Operating temperature	-20 ~ 60℃
Charger Output	DC 5V, 500mA
Charger input	12V ~ 24V DC
Dimensions	5 cm X 9.4 cm X 1.9 cm (width x length x thickness)
Weight	69g

5 TROUBLESHOOTING

MY ENA-9000 IS NOT ENTERING PAIRING MODE.
Ensure that any other device is currently paired with the EN-9000 and turn the paired device off. After that, turn the ENA-9000 off and get in the paring mode by pressing and holding the multi-function button for five seconds. Once all of this process is finished, the ENA-9000 should now be in pairing mode.

MY PHONE/MUSIC PLAYER CAN'T FIND MY ENA-9000 TO PAIR WITH.
Ensure that your ENA-9000 has enough power by checking if the power indicator on the ENA-9000 is lit when the device is searching for your ENA-9000.

MY ENA-9000 WORKED BEFORE BUT NOT ANYMORE.
Make sure your phone/music player is on and that its Bluetooth feature is enabled. You may need to restart the bluetooth feature on your phone/music player and pair your device with the ENA-9000 again.

THERE IS UNWANTED NOISE WHEN USING THE FM BROADCASTING MODE.
Ensure that you are using an unused radio frequency. You may also need to adjust the volume of your radio and/or phone/music player.
Adjust the volume on your phone/music player first and then your radio's.

ALL FUNCTION TO ENA-9000 DOESN'T WORK PROPERLY OR IT IS EVEN TURNED OFF.
Reset the ENA-9000 by pushing its reset hole located at rear bottom. Any tools like a pin are highly recommended to push the hole.
If you need more help, contact authorized EZNEX local distributors or customer service centers.

⚠ Warning!

- Never operate your ENA-9000 while driving!
- Remember to always drive safely by avoiding distractions and following local laws!
- Pairing your ENA-9000 with your phone/music player and/or car stereo should always be done before you begin driving.
- Do not take notes or read while you are driving.
- Do not hold your ear to the ENA-9000's speaker; the high volume can cause hearing damage.
- Please use the included charger to charge the ENA-9000. Do not use the car charger and charging cable for other anything other than the ENA-9000.
- Do not use the ENA-9000 for any purpose other than which it was made for.
- There is a risk of explosion and/or injury if the battery is replaced with the incorrect type.
- Do not place heavy objects on the unit.
- Do not modify, repair, or take apart the unit.
- Do not directly expose the unit to water, alcohol, benzene, etc.
- Do not place or keep the unit near sources of extreme heat.
- Keep the unit away from humidity & dust.
- Exercise caution and ensure that children and animals do not suck on or bite the ENA-9000.
- Never try to dismantle the product yourself. None of the internal components can be replaced or repaired by users. Only authorized dealers or service centers may open the product. If any parts of your products require replacement for any reason, whether if it is due to normal wear and tear or user mishandling, please contact your dealer. Repairs should be only performed at authorized service centers.
- Calls and music streamed to your FM radio using the FM transmitter can potentially be picked up by another radio in close proximity.

Warranty

The limited one (1) year warranty from EZNEX warrants this product to be free from defects in materials and workmanship for a period of one (1) year from the date of purchase (Hereby known as the warranty period). During the warranty period, EZNEX will repair or replace (at EZNEX customer center's discretion) this product or any defective parts (warranty service). If repair or replacement is not commercially practical or cannot be performed in a timely manner, EZNEX may choose to refund you the amount of money paid for the affected product. Repair or replacement under the terms of this warranty does not give right to an extension of or a new beginning to the warranty period.
To obtain warranty service, please contact the EZNEX dealer from which you purchased this product or visit http://www.eznex.co.kr for further information about customer support. You will need to return this product to the dealer or to EZNEX (if so indicated on http://www.eznex.co.kr in either its original packaging or packaging affording an equal degree of protection. You will bear the cost of shipping the product to EZNEX. If the product is covered by the warranty, EZNEX will bear the cost of shipping product back to you after the completion of service under this warranty. Return shipping will be charged to you for products not covered by the warranty or requiring no warranty repair.

FCC Statement
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
1) This device may not cause harmful interference, and
2) This device must accept any interference received including interference that may cause undesired operation.

EZ-ENA9000D000E

FCC ID : WYJENA-9000 CE0984

RoHS Bluetooth

Technical Support

If the product has a problem or abnormality, discontinue use of the product and contact EZNEX headquarters or local distributors for assistance.

CONTACT INFORMATION
HOMEPAGE: http://www.eznex.co.kr
E-MAIL: sales@eznex.co.kr
Physical address :
#307, Point town Bldg,187-4, Gumi-dong,
Bundang-gu, Sungnam-si, Gyeonggi-do,
KOREA Republic.

EZNEX