

FCC RF Test Report

APPLICANT : Sonim Technologies, Inc.
EQUIPMENT : Mobile Hotspot
BRAND NAME : Sonim
MODEL NAME : H700B
FCC ID : WYPH700B
STANDARD : 47 CFR Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Aug. 15, 2024 ~ Apr. 18, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Maximum EIRP Power and Emission Designator	6
1.7 Testing Site	8
1.8 Test Software.....	9
1.9 Applied Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	13
3.1 Measuring Instruments	13
3.2 Test Setup	13
3.3 Test Result of Conducted Test	13
3.4 Conducted Output Power Measurement	14
3.5 Peak-to-Average Ratio	15
3.6 EIRP	16
3.7 Occupied Bandwidth.....	17
3.8 Conducted Band Edge Measurement	18
3.9 Conducted Spurious Emission Measurement	19
3.10 Frequency Stability Measurement.....	20
4 RADIATED TEST ITEMS	21
4.1 Measuring Instruments	21
4.2 Test Setup	21
4.3 Test Result of Radiated Test	22
4.4 Radiated Spurious Emission Measurement	23
5 LIST OF MEASURING EQUIPMENT	24
6 MEASUREMENT UNCERTAINTY	25
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG480204U	Rev. 01	Initial issue of report	May 27, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 15.90 dB at 9222.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego, CA92121 , USA

1.2 Manufacturer

Sonim Technologies, Inc.

4445 Eastgate Mall,Suite200,San Diego, CA92121 , USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Hotspot
Brand Name	Sonim
Model Name	H700B
FCC ID	WYPH700B
IMEI Code	Conducted: 351393280001029 Radiation: 351393280007273
HW Version	V3.0
SW Version	H70.0-01-22.3.0-10.25.00
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n77/78: 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 /100MHz
Antenna Gain	<External Antenna> <Ant. 0> 5G NR n77: 2.50 dBi 5G NR n78: 2.50 dBi <Ant. 1> 5G NR n77: 2.50 dBi 5G NR n78: 2.50 dBi <Internal Antenna> <Ant. 0> 5G NR n77: 1.39 dBi 5G NR n78: 1.39 dBi <Ant. 1> 5G NR n77: 2.56 dBi 5G NR n78: 2.56 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM

DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The device supports two types of WWAN antennas: Internal Antenna and External Antenna, they share the same RF test port, and the two antennas cannot work at the same time. After evaluation, the antenna difference does not affect the Conducted measurement. For RSE, only the test results of the worse External Antenna are shown.
2. The maximum EIRP is calculated from max output power and max antenna gain, so only the maximum EIRP of Antenna 1 (Internal Antenna) are shown in the report.
3. The Ant.0 of n77/n78 only works in UL MIMO mode.
4. 5G NR n77 supports SA and NSA mode, n78 supports SA mode only, according to the maximum power between SA and NSA mode, SA covers NSA mode, and n77 covers n78.
5. 5G NR n77/n78 support HPUE mode.
6. 5G NR n77/n78 support UL MIMO mode for Ant.0+1 (the two antennas are completely uncorrelated), so the directional gain is selected the maximum gain among all antennas.
7. For n77 MIMO mode, the conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{\text{ANT}})$ according to KDB 662911 D01.
8. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
9. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.7261	8M56G7D	0.5559	8M58W7D
15	3457.50 ~ 3542.49	0.6998	13M6G7D	0.5383	13M6W7D
20	3460.02 ~ 3540.00	0.7079	18M2G7D	0.5649	18M3W7D
25	3462.51 ~ 3537.48	0.7430	23M2G7D	0.5916	23M3W7D
30	3465.00 ~ 3534.99	0.7244	27M9G7D	0.5821	27M9W7D
40	3470.01 ~ 3529.98	0.6998	38M0G7D	0.5395	37M9W7D
50	3475.02 ~ 3525.00	0.7161	47M6G7D	0.5741	47M5W7D
60	3480.00 ~ 3519.99	0.6887	58M0G7D	0.5433	57M9W7D
70	3485.01 ~ 3514.98	0.6761	67M5G7D	0.5534	67M6W7D

80	3490.02 ~ 3510.00	0.6918	77M4G7D	0.5649	77M5W7D
90	3495.00 ~ 3504.99	0.7161	87M5G7D	0.5728	87M5W7D
100	3500.01	0.7516	97M6G7D	0.6124	97M7W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.7063	8M56G7D	0.5585	8M58W7D
15	3457.50 ~ 3542.49	0.6998	13M6G7D	0.5508	13M6W7D
20	3460.02 ~ 3540.00	0.6982	18M2G7D	0.5546	18M3W7D
25	3462.51 ~ 3537.48	0.6714	23M2G7D	0.5834	23M3W7D
30	3465.00 ~ 3534.99	0.7112	27M9G7D	0.5636	27M9W7D
40	3470.01 ~ 3529.98	0.7063	38M0G7D	0.5508	37M9W7D
50	3475.02 ~ 3525.00	0.7112	47M6G7D	0.5559	47M5W7D
60	3480.00 ~ 3519.99	0.6592	58M0G7D	0.5370	57M9W7D
70	3485.01 ~ 3514.98	0.6637	67M5G7D	0.5433	67M6W7D
80	3490.02 ~ 3510.00	0.6902	77M4G7D	0.5495	77M5W7D
90	3495.00 ~ 3504.99	0.6982	87M5G7D	0.5534	87M5W7D
100	3500.01	0.7129	97M6G7D	0.5610	97M7W7D

5G NR n77 UL MIMO		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.7762	8M58G7D	0.6683	8M60W7D
15	3457.50 ~ 3542.49	0.7780	13M6G7D	0.6637	13M6W7D
20	3460.02 ~ 3540.00	0.7798	18M2G7D	0.6714	18M2W7D
25	3462.51 ~ 3537.48	0.8166	23M3G7D	0.6966	23M3W7D
30	3465.00 ~ 3534.99	0.8017	27M9G7D	0.6776	27M9W7D
40	3470.01 ~ 3529.98	0.7980	37M8G7D	0.6808	37M9W7D
50	3475.02 ~ 3525.00	0.7962	47M5G7D	0.6887	47M6W7D
60	3480.00 ~ 3519.99	0.7852	57M9G7D	0.6637	58M0W7D
70	3485.01 ~ 3514.98	0.7691	67M6G7D	0.6823	67M6W7D
80	3490.02 ~ 3510.00	0.8110	77M5G7D	0.6950	77M6W7D
90	3495.00 ~ 3504.99	0.8166	87M6G7D	0.7031	87M7W7D
100	3500.01	0.8222	97M6G7D	0.6966	97M7W7D

5G NR n78 UL MIMO		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.7551	8M58G7D	0.6501	8M60W7D
15	3457.50 ~ 3542.49	0.7534	13M6G7D	0.6501	13M6W7D
20	3460.02 ~ 3540.00	0.7709	18M2G7D	0.6577	18M2W7D
25	3462.51 ~ 3537.48	0.7907	23M3G7D	0.6839	23M3W7D
30	3465.00 ~ 3534.99	0.7709	27M9G7D	0.6653	27M9W7D
40	3470.01 ~ 3529.98	0.7745	37M8G7D	0.6637	37M9W7D
50	3475.02 ~ 3525.00	0.7852	47M5G7D	0.6808	47M6W7D
60	3480.00 ~ 3519.99	0.7621	57M9G7D	0.6607	58M0W7D
70	3485.01 ~ 3514.98	0.7568	67M6G7D	0.6592	67M6W7D
80	3490.02 ~ 3510.00	0.7925	77M5G7D	0.6745	77M6W7D
90	3495.00 ~ 3504.99	0.7889	87M6G7D	0.6839	87M7W7D
100	3500.01	0.7943	97M6G7D	0.6808	97M7W7D

Note:

1. 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH02-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27 Subpart Q
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	5G NR	Bandwidth (MHz)										Modulation					RB #			Test Channel			
		10	15	20	25	30	40	50	60	70~90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Partial	Full	L	M	H	
Max. Output Power	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Peak-to-Average Ratio	n77			v								v	v						v		v		
26dB and 99% Bandwidth	n77	v	v	v	v	v	v	v	v	v	v		v	v	v	v			v		v		
Conducted Band Edge	n77	v						v			v	v	v				v		v	v		v	
Conducted Spurious Emission	n77	v						v			v	v	v				v			v	v	v	
Frequency Stability	n77			v									v						v		v		
E.I.R.P	n77	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
	n78	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v		v	v	v	v	
Radiated Spurious Emission	n77	Worst Case																				v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.8V; Low Voltage =3.5V; High Voltage =4.3V.																						

2.2 Connection Diagram of Test System

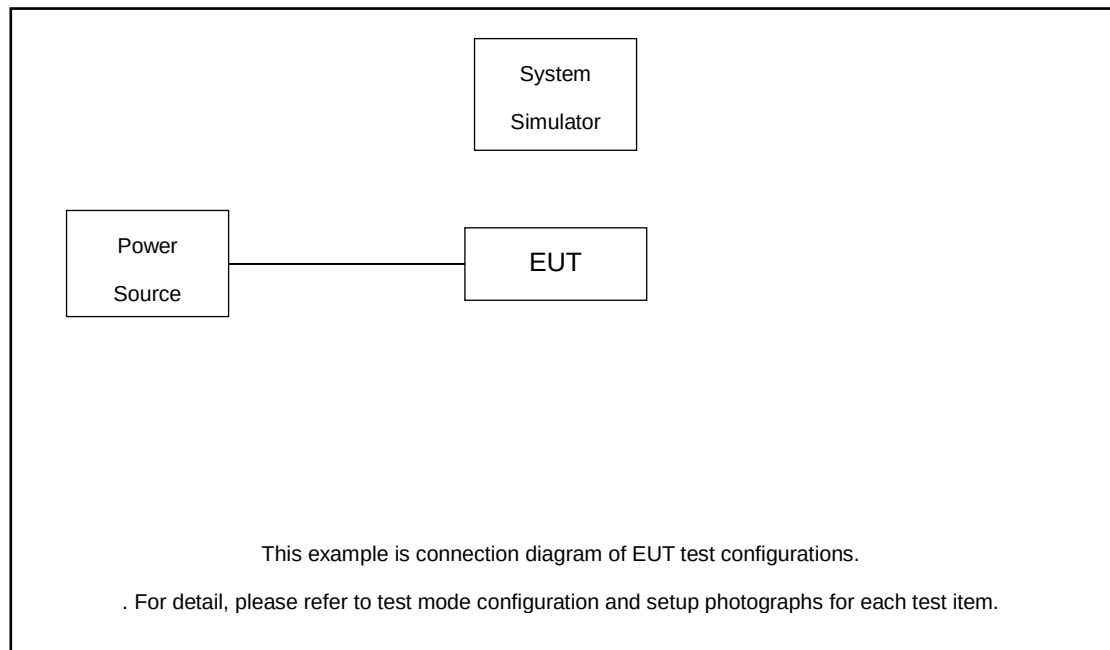

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	External Antenna	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable los.

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

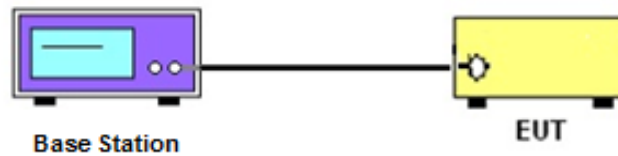

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

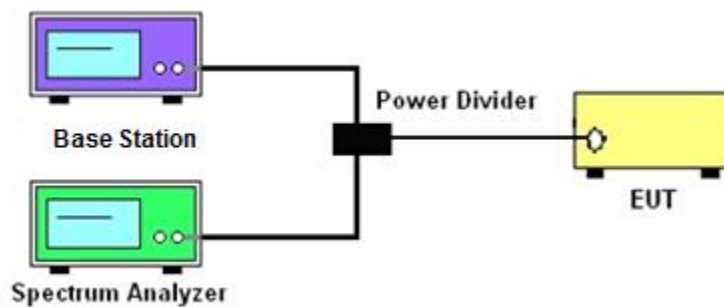

3.2.3 Frequency Stability

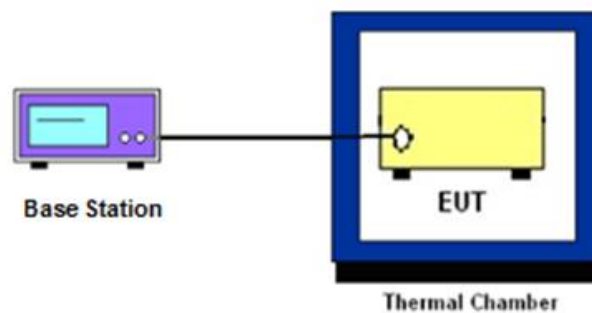

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

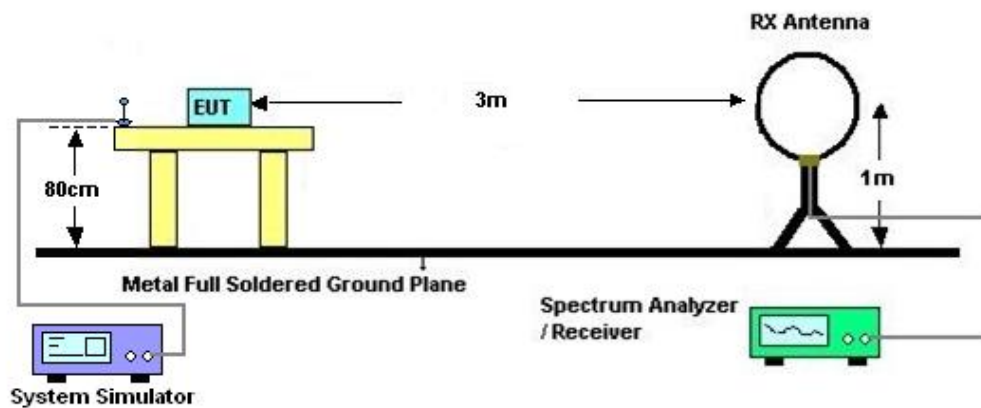

4.2.2 For radiated test from 30MHz to 1GHz

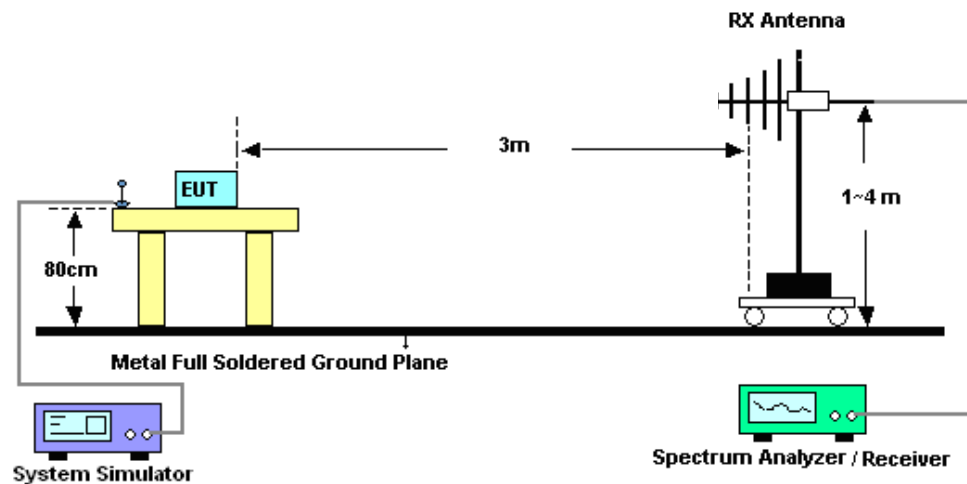

4.2.3 For radiated test above 1GHz

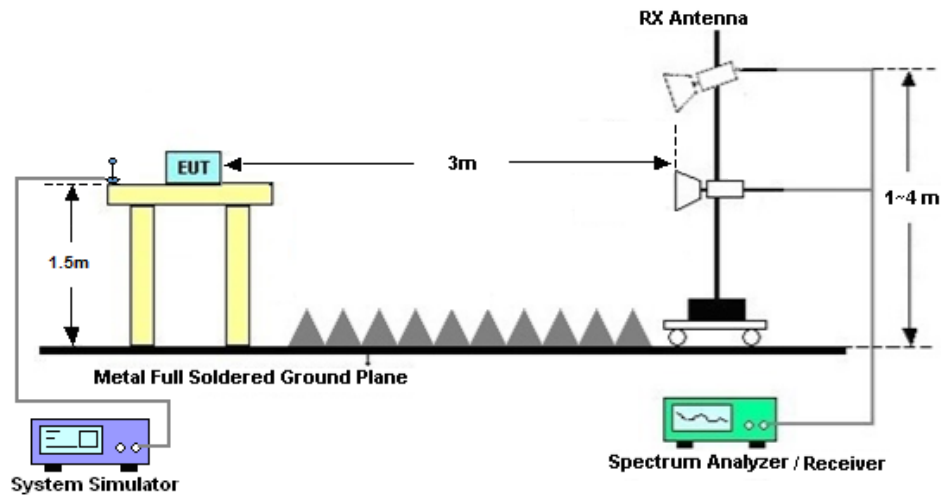

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Aug. 15, 2024~ Aug. 28, 2024	Apr. 08, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 15, 2024~ Aug. 28, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 03, 2024	Aug. 15, 2024~ Aug. 28, 2024	Jul. 02, 2025	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2023	Aug. 15, 2024~ Aug. 28, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 18, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 18, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Apr. 18, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 18, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 18, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 03, 2025	Apr. 18, 2025	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz-3GHz	Dec. 25, 2024	Apr. 18, 2025	Dec. 24, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Apr. 18, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 18, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 18, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 18, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N77 Ant 1

Transmitter Conducted Output Power And EIRP, (G_T-L_C)=2.56dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	25.42	27.98	0.6281
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	24.42	26.98	0.4989
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.68	28.24	0.6668
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.59	27.15	0.5188
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	26.05	28.61	0.7261
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	24.89	27.45	0.5559
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	25.42	27.98	0.6281
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	24.36	26.92	0.4920
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.64	28.2	0.6607
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.63	27.19	0.5236
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	25.89	28.45	0.6998
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	24.75	27.31	0.5383
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.36	27.92	0.6194
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.39	26.95	0.4955
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.63	28.19	0.6592
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.66	27.22	0.5272
77	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.94	28.5	0.7079
77	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	24.96	27.52	0.5649
77	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	25.48	28.04	0.6368
77	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	24.58	27.14	0.5176
77	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.74	28.3	0.6761
77	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.77	27.33	0.5408
77	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	26.15	28.71	0.7430
77	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	25.16	27.72	0.5916
77	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	25.59	28.15	0.6531
77	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.52	27.08	0.5105
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.81	28.37	0.6871
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.82	27.38	0.5470
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	26.04	28.6	0.7244
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	25.09	27.65	0.5821
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.42	27.98	0.6281
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.5	27.06	0.5082
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.78	28.34	0.6823
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.66	27.22	0.5272
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	25.89	28.45	0.6998
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.76	27.32	0.5395
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	25.71	28.27	0.6714
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.7	27.26	0.5321



77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.99	28.55	0.7161
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.94	27.5	0.5623
77	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	25.91	28.47	0.7031
77	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	25.03	27.59	0.5741
77	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.47	28.03	0.6353
77	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.56	27.12	0.5152
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.65	28.21	0.6622
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.72	27.28	0.5346
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.82	28.38	0.6887
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.79	27.35	0.5433
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	25.55	28.11	0.6471
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	24.61	27.17	0.5212
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.74	28.3	0.6761
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.87	27.43	0.5534
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	25.71	28.27	0.6714
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	24.87	27.43	0.5534
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.72	28.28	0.6730
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.7	27.26	0.5321
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.83	28.39	0.6902
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.93	27.49	0.5610
77	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	25.84	28.4	0.6918
77	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.96	27.52	0.5649
77	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	25.76	28.32	0.6792
77	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.77	27.33	0.5408
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.83	28.39	0.6902
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.79	27.35	0.5433
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	25.99	28.55	0.7161
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	25.02	27.58	0.5728
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	26.05	28.61	0.7261
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.2	28.76	0.7516
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	26.19	28.75	0.7499
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	26.05	28.61	0.7261
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.17	28.73	0.7464
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	26.14	28.7	0.7413
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	25.07	27.63	0.5794
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.31	27.87	0.6124
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	25.28	27.84	0.6081
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.59	26.15	0.4121
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.75	26.31	0.4276
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	23.77	26.33	0.4295
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	21.59	24.15	0.2600
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.56	24.12	0.2582
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	21.59	24.15	0.2600
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	24.55	27.11	0.5140
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	24.73	27.29	0.5358



77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	24.65	27.21	0.5260
----	----	-----	--------	---------	--------------	-------	-------	-------	--------

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	15.9	PASS	NV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.3	PASS	LV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	13.9	PASS	HV
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.4	PASS	-30℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	11.3	PASS	-20℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.8	PASS	-10℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.1	PASS	0℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	15.9	PASS	10℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	15	PASS	20℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	14.3	PASS	30℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	10.8	PASS	40℃
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	11.1	PASS	50℃


$|\text{MAX}(\Delta f)| = 17.4 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	3450.778753	$\geq 3450 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	3548.678838	$\leq 3550 \text{ MHz}$	


Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	4.21	13	PASS
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	5.33	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

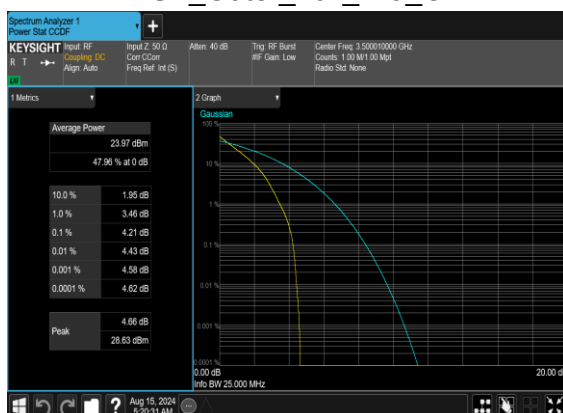

N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

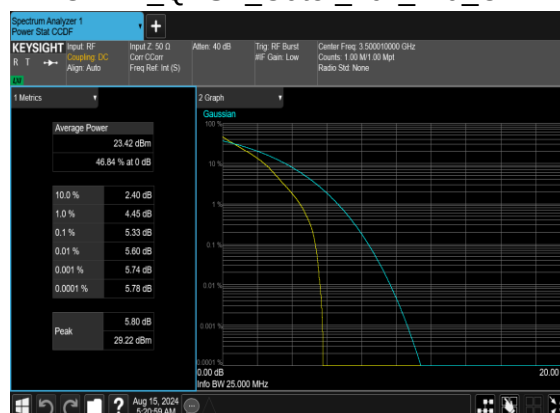

**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5638	9.702
77	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.5603	9.391
77	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.577	9.662
77	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5487	9.195
77	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.554	14.76
77	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.586	14.68
77	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.574	14.48
77	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.544	14.92
77	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.234	19.43
77	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.225	19.55
77	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.273	19.7
77	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.182	19.29
77	30	25	633334	3500.01	CP-OFDM QPSK	65@0	23.189	24.4
77	30	25	633334	3500.01	CP-OFDM 16 QAM	65@0	23.262	24.63
77	30	25	633334	3500.01	CP-OFDM 64 QAM	65@0	23.221	24.64
77	30	25	633334	3500.01	CP-OFDM 256 QAM	65@0	23.246	24.52
77	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.917	29.32
77	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.895	29.02
77	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.862	29.17
77	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.83	29.11
77	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.954	39.25
77	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.894	39.47
77	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.869	39.89
77	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.905	40.11
77	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.576	49.6
77	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.459	49.06
77	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.509	49.15
77	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.494	49.58
77	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.967	59.89
77	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.822	59.69
77	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.918	59.93
77	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.93	59.93
77	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.531	69.93
77	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.53	70.23
77	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.597	69.69
77	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.503	69.73




77	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.36	79.95
77	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.462	80.11
77	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.393	79.98
77	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.489	79.99
77	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.53	90.52
77	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.504	90.16
77	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.427	90.22
77	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.34	90.19
77	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.56	100.6
77	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.739	100.5
77	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.312	100.6
77	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.673	100.8




N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

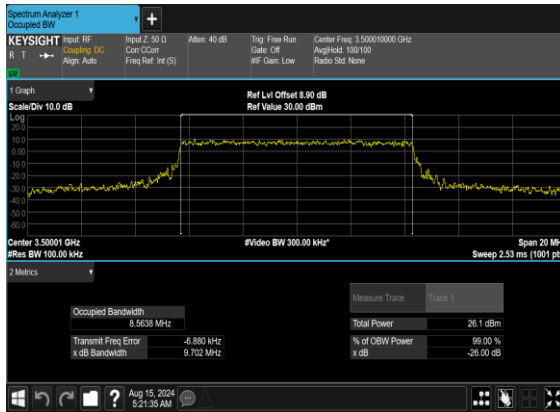


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

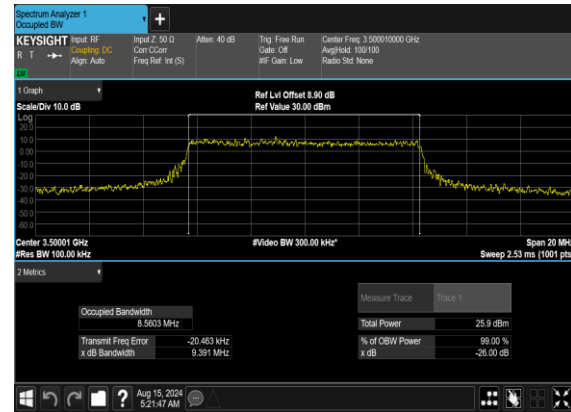

N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

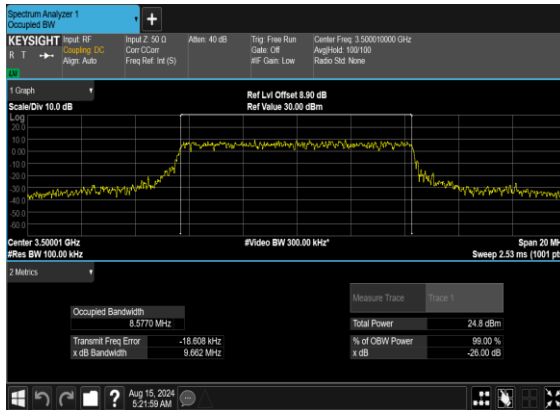


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

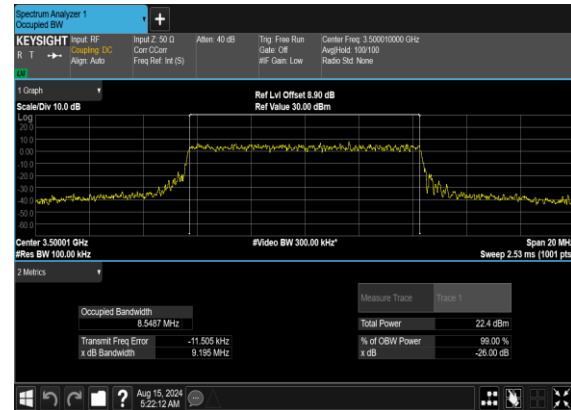





N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

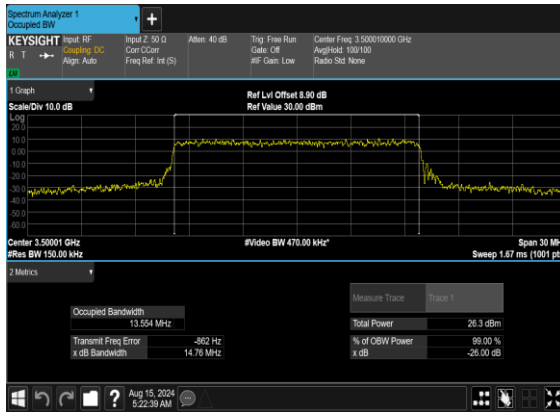


N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

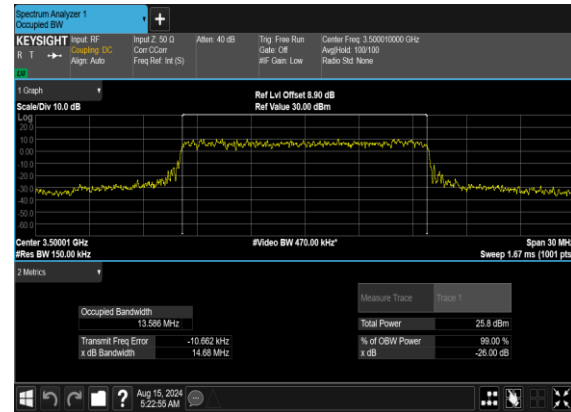

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

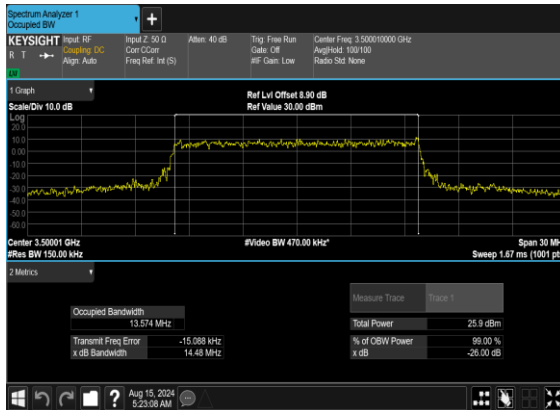


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

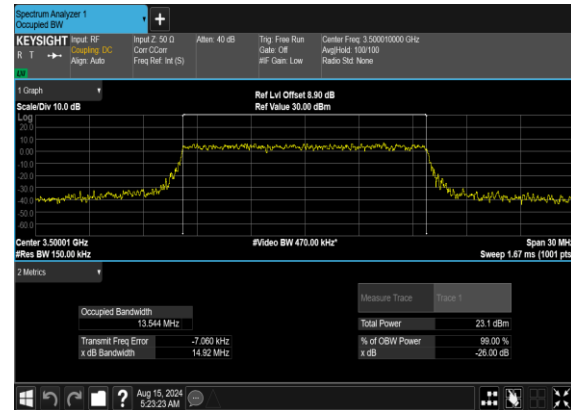





N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

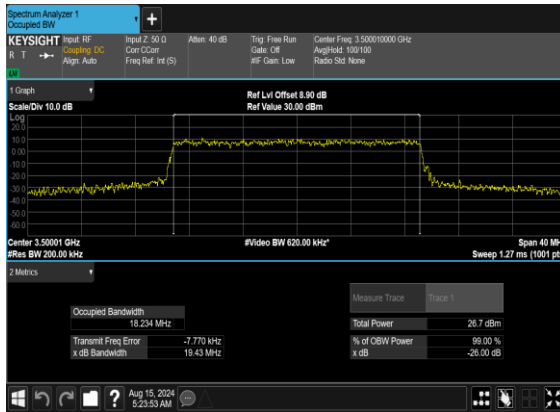


N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

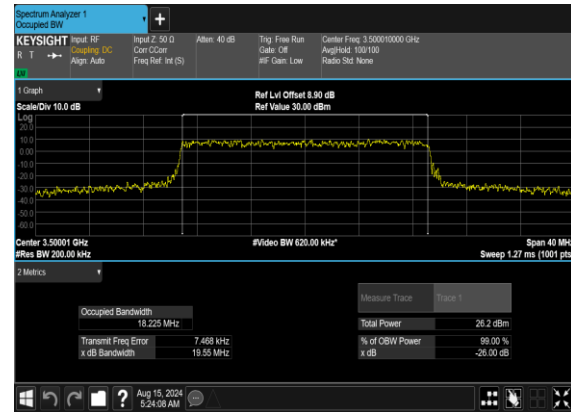

N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

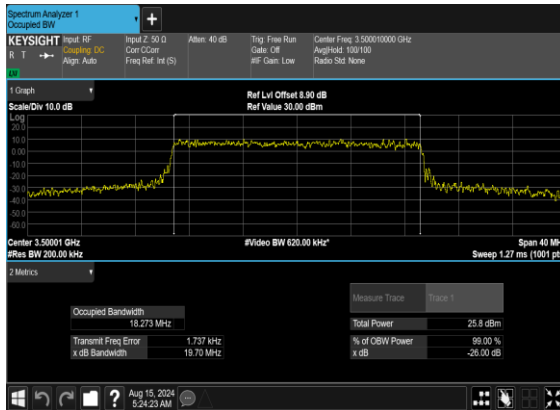


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

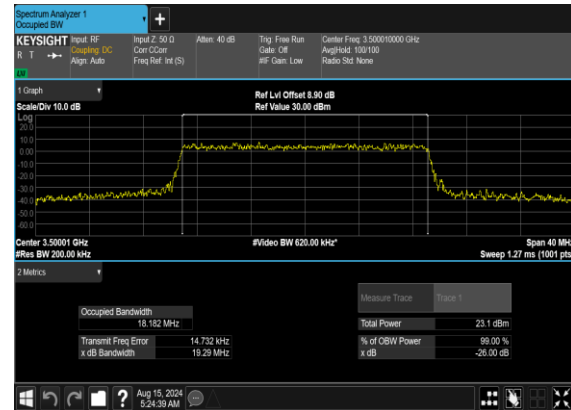





N77(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

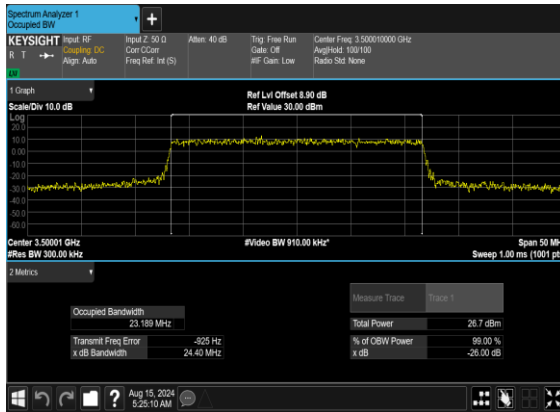


N77(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

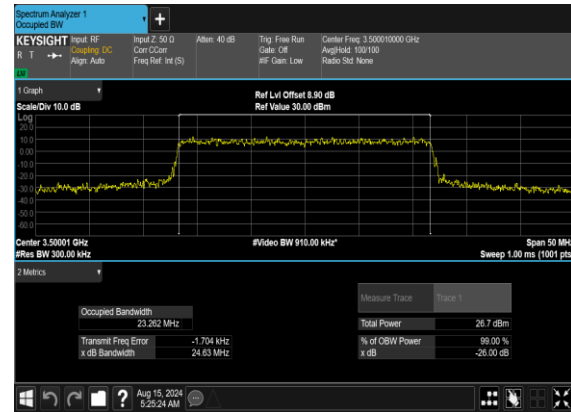

N77(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

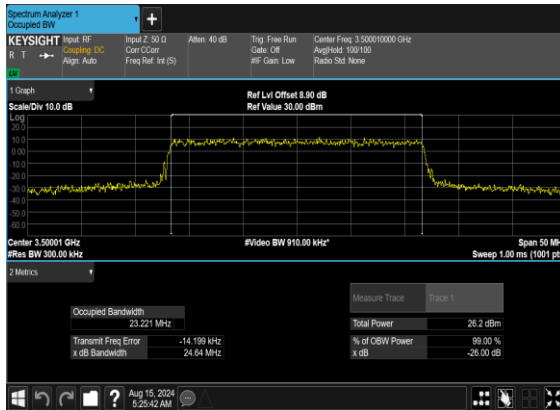


N77(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

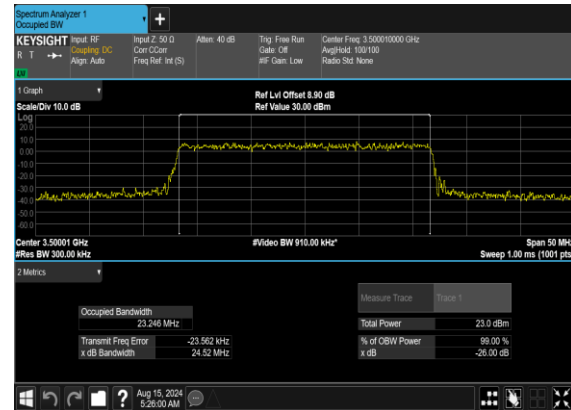





N77(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

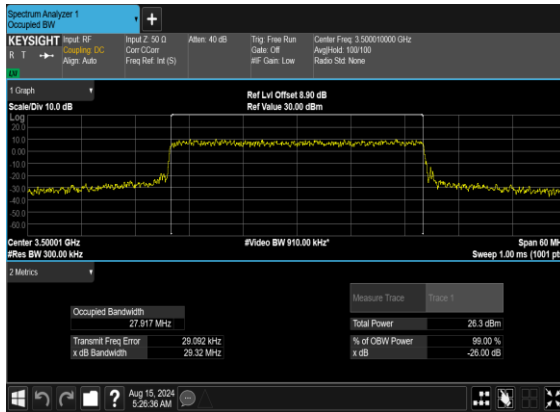


N77(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

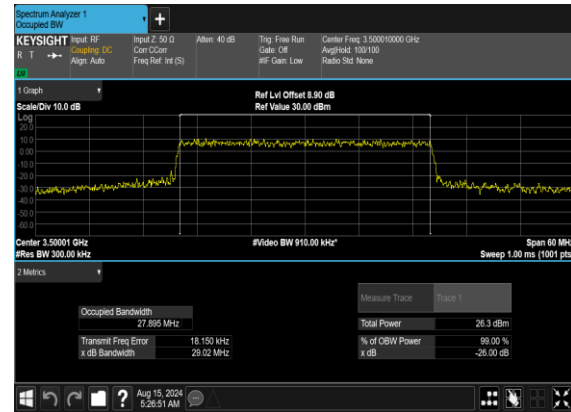

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

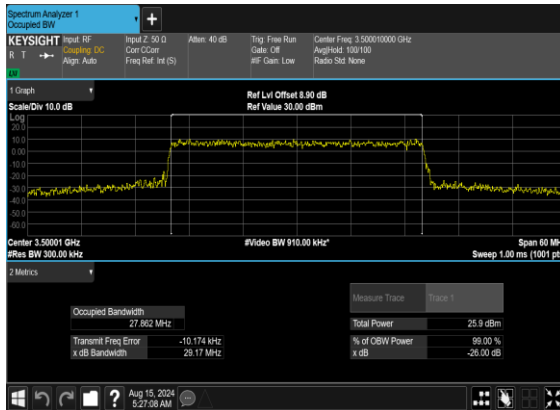


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

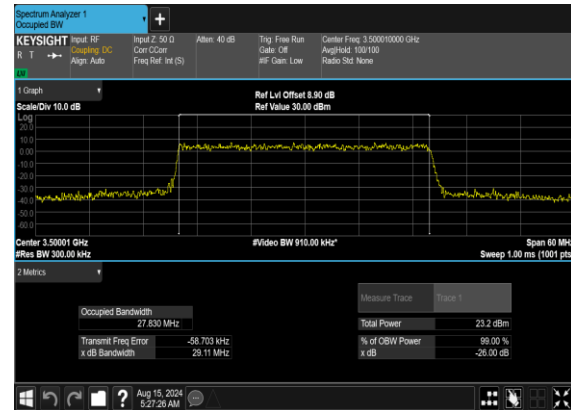





N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

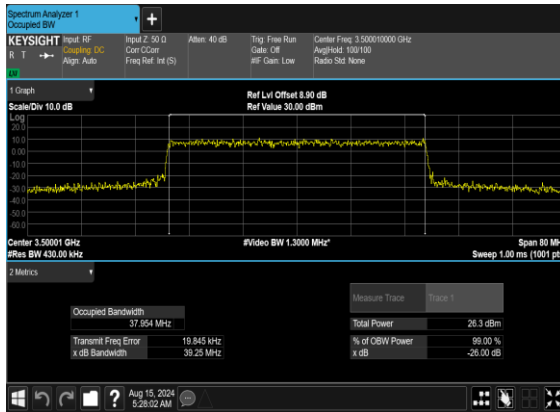


N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

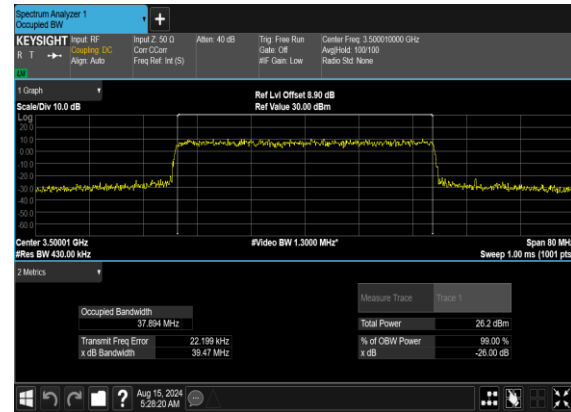

N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

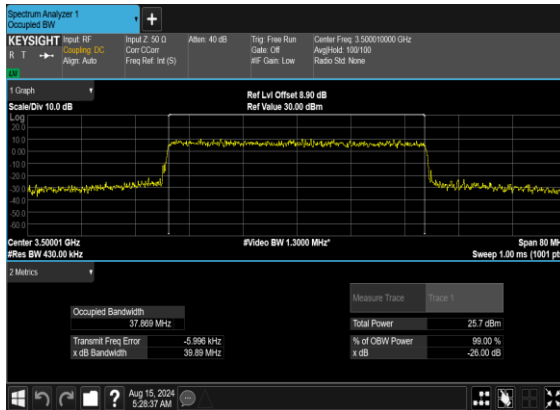


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

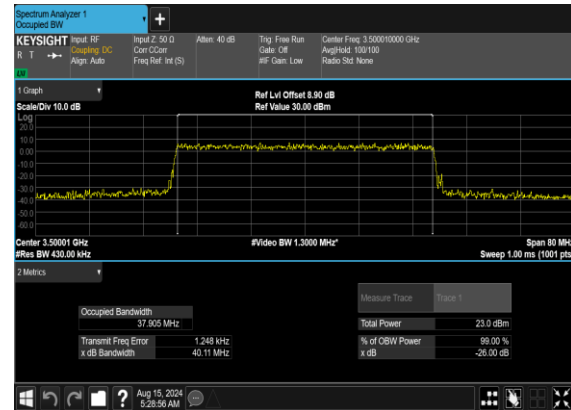





N77(50M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

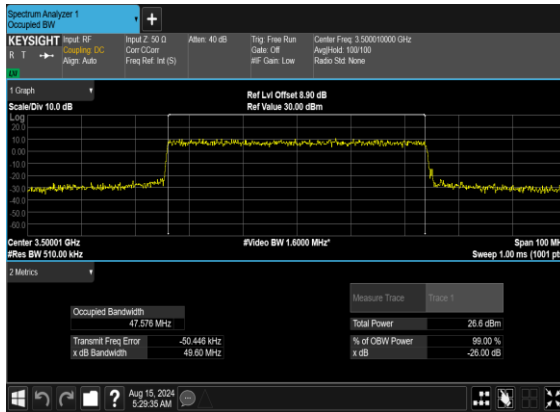


N77(50M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

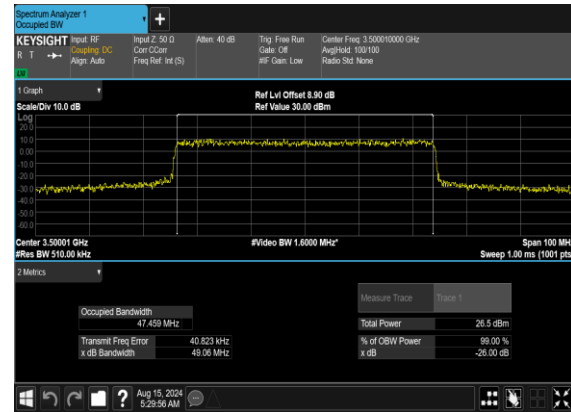

N77(50M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

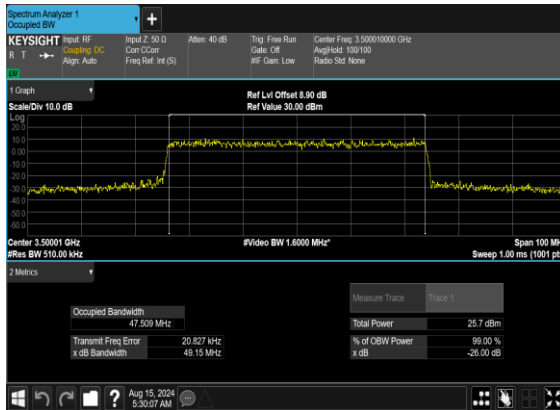


N77(50M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

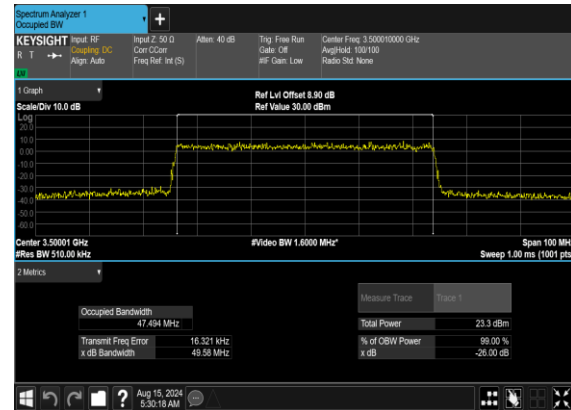





N77(60M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

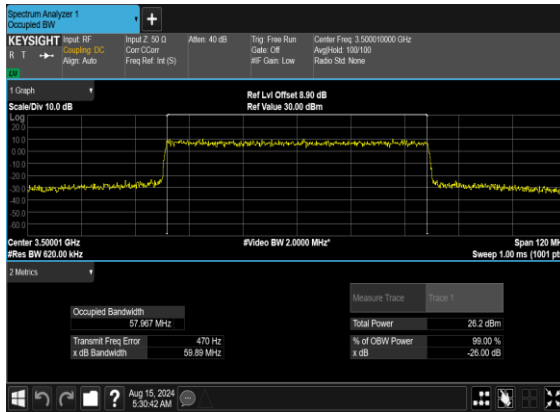


N77(60M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

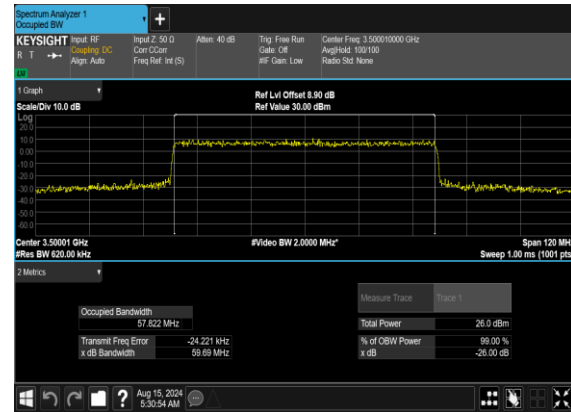

N77(60M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

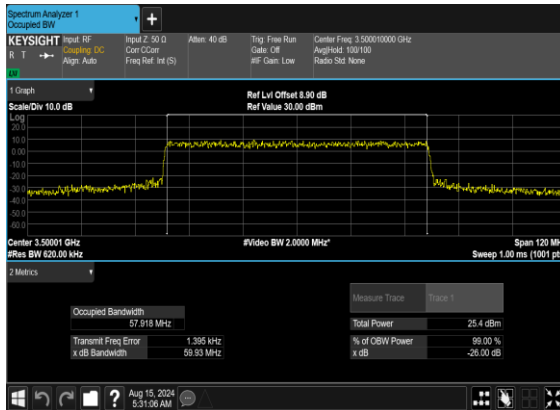


N77(60M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

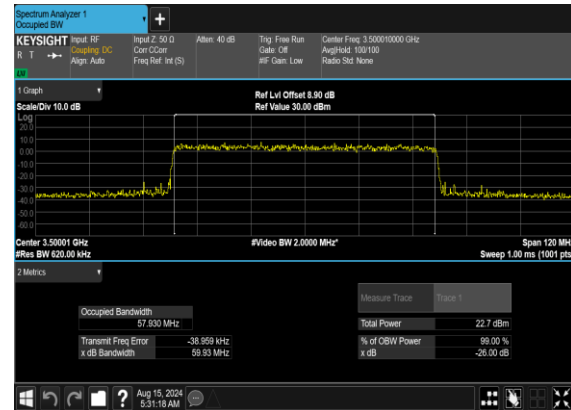





N77(70M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

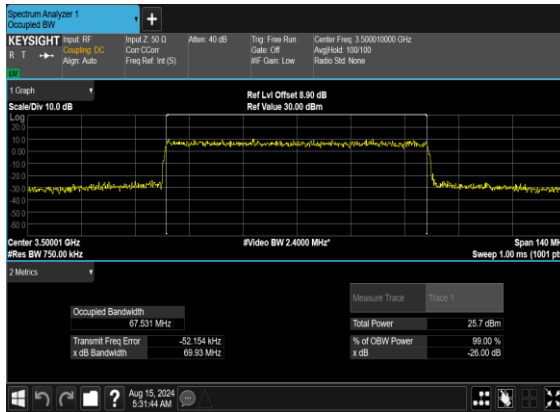


N77(70M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

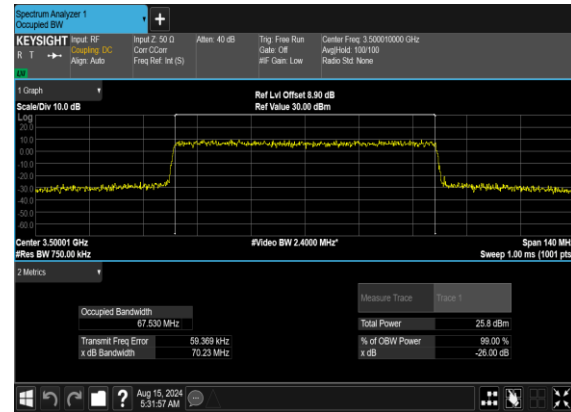

N77(70M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

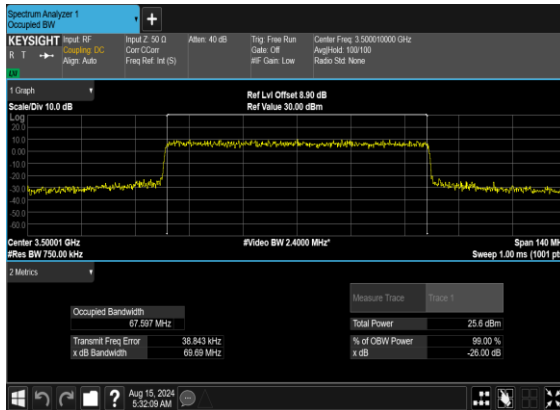

N77(70M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

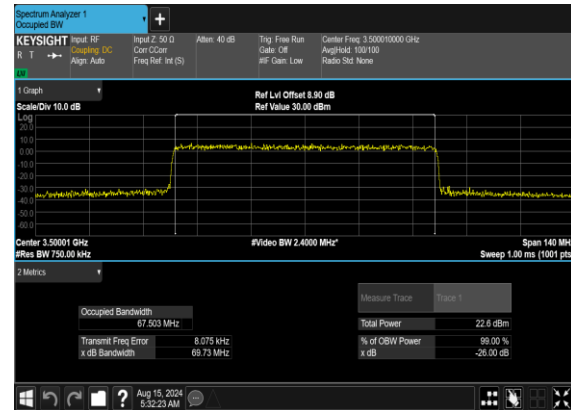





N77(80M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N77(80M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

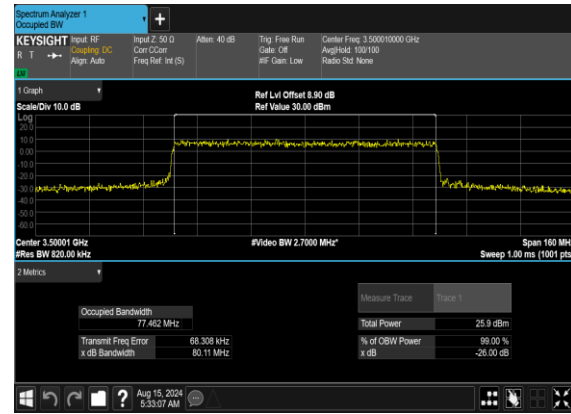

N77(80M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

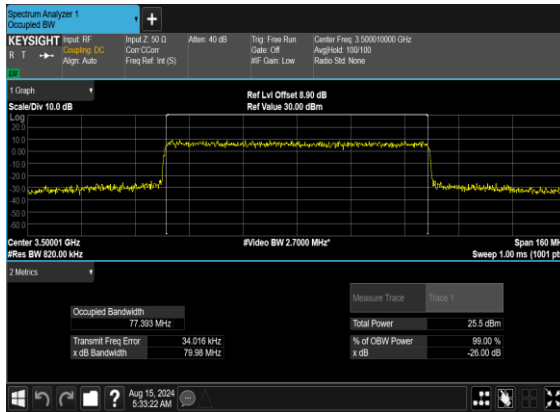


N77(80M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

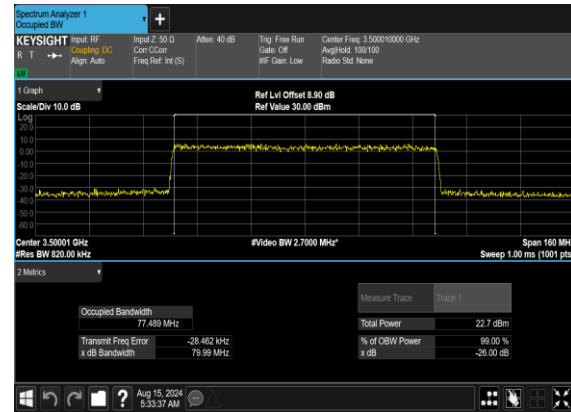





N77(90M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

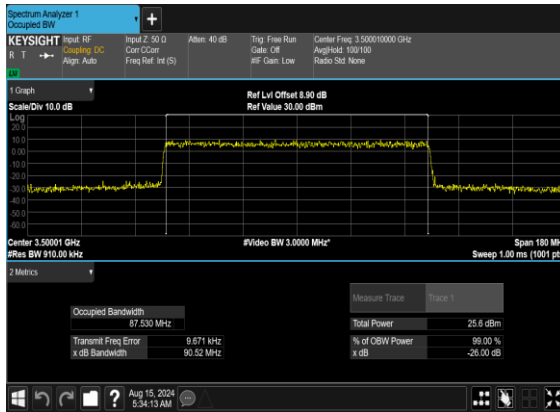


N77(90M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

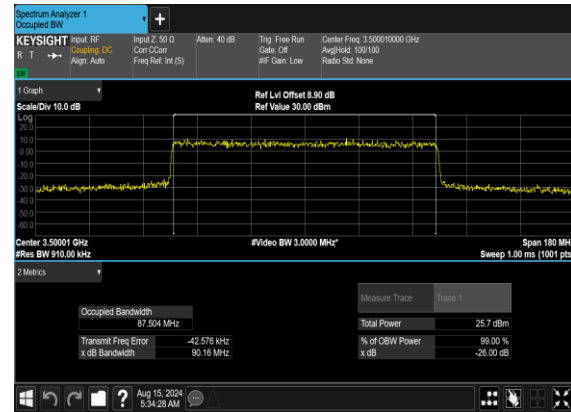

N77(90M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

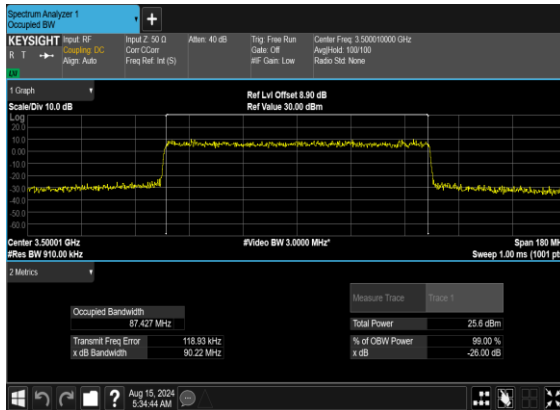


N77(90M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

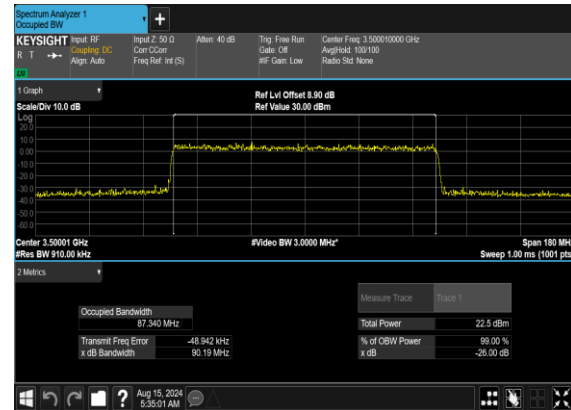





N77(100M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

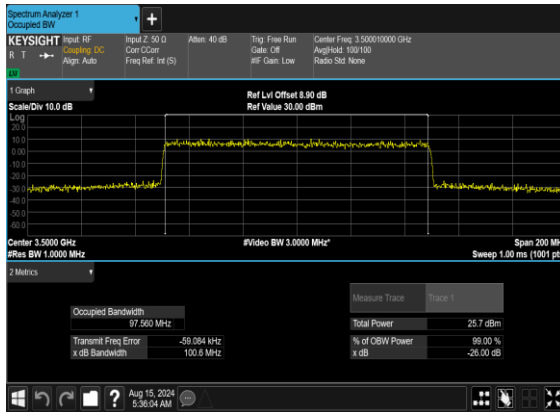


N77(100M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

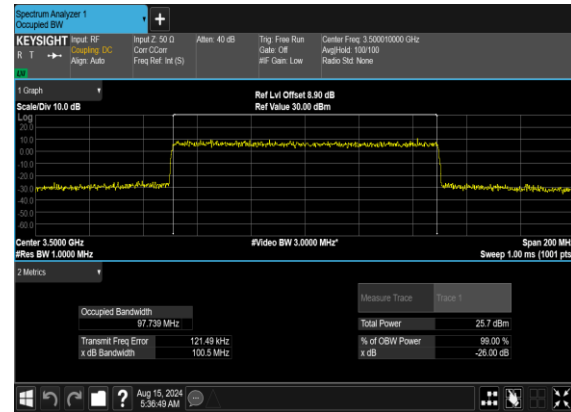

N77(100M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

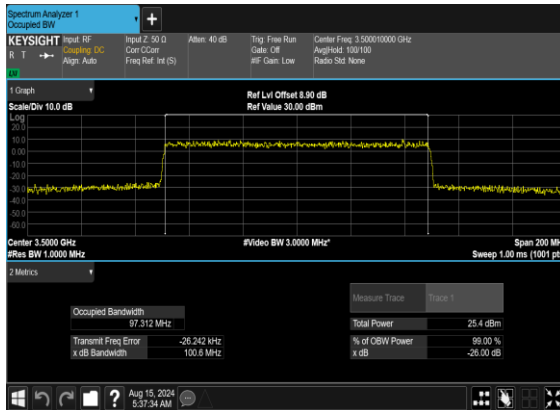

N77(100M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

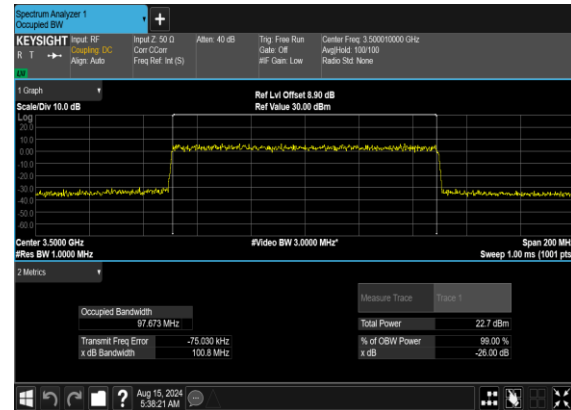



Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS




N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

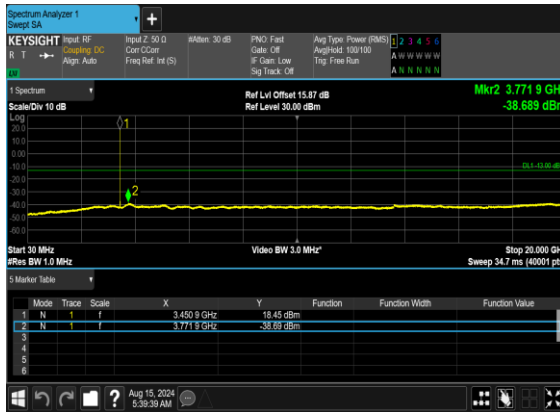


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

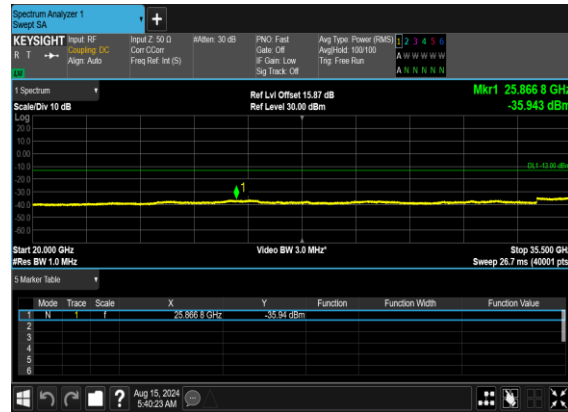

N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

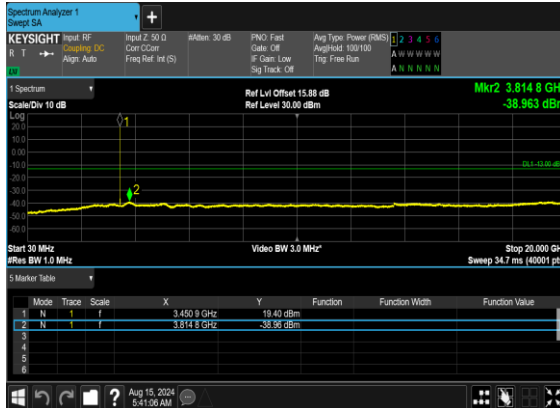


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

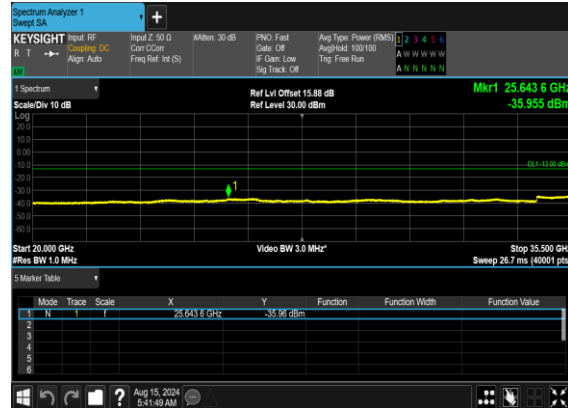





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

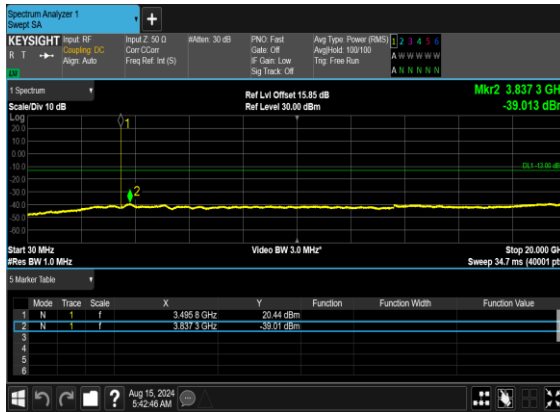


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

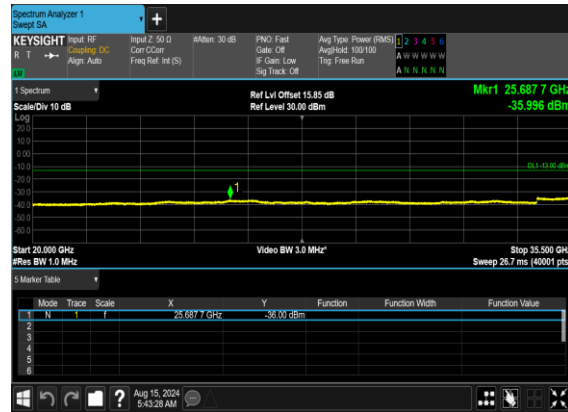

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

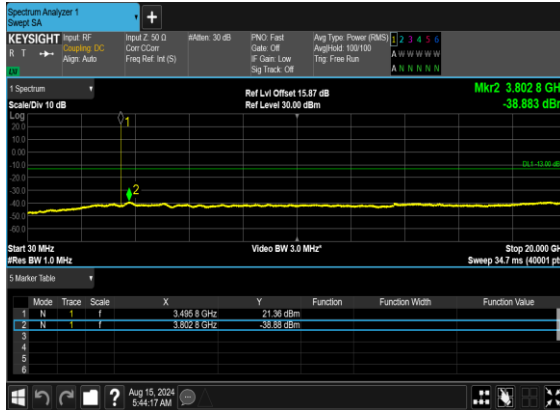


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

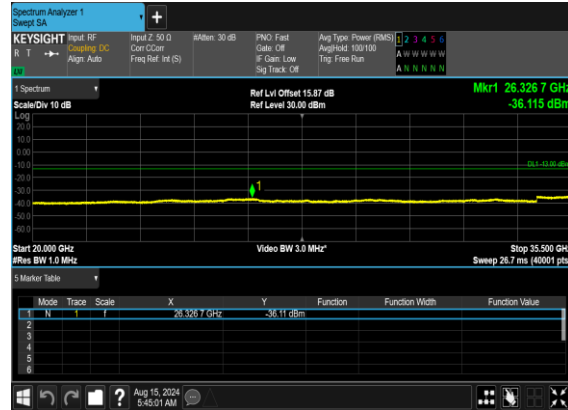





N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

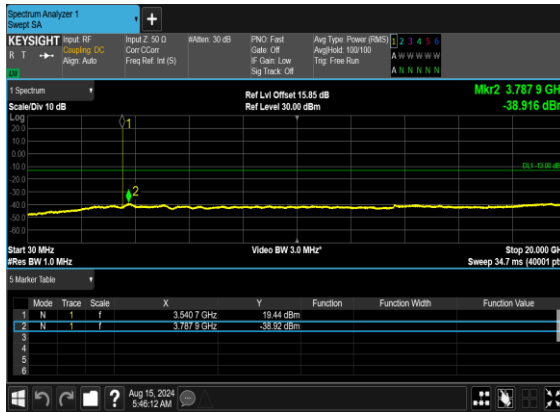


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

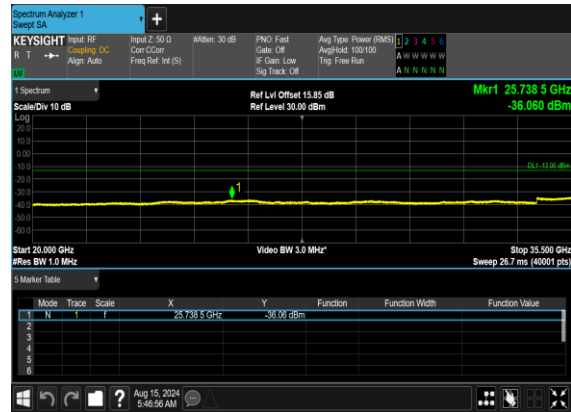

N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

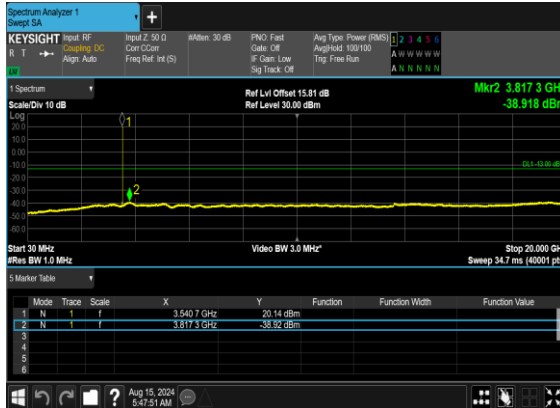


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

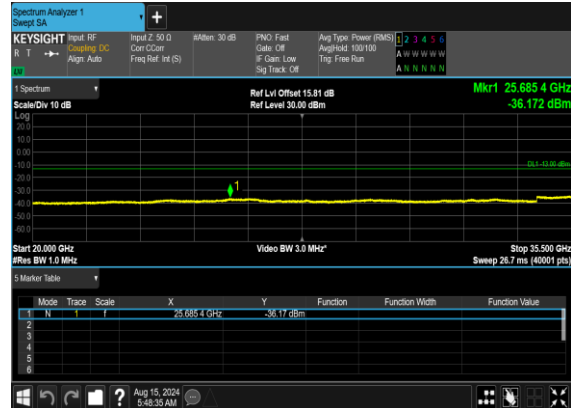





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

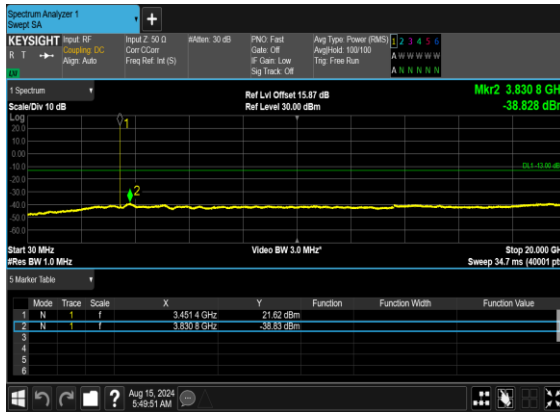


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

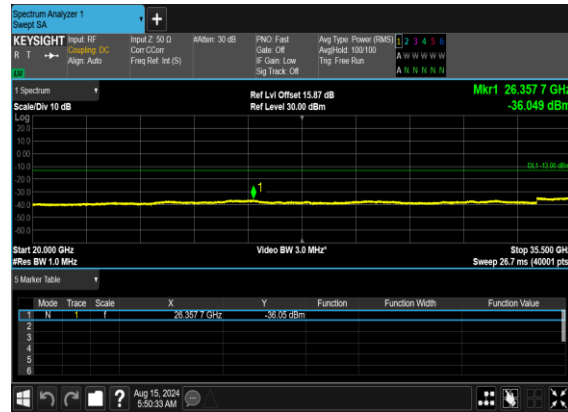

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

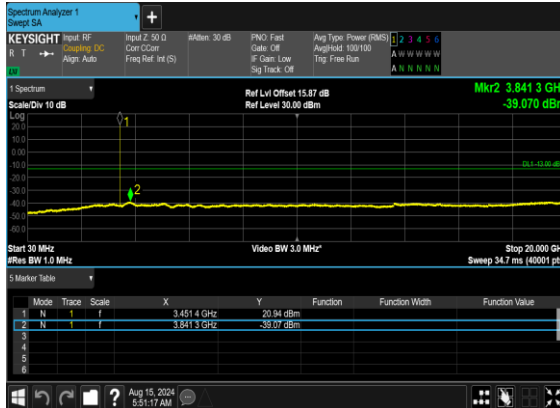


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

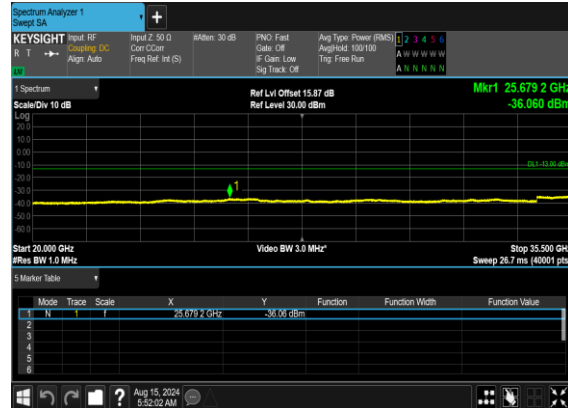





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

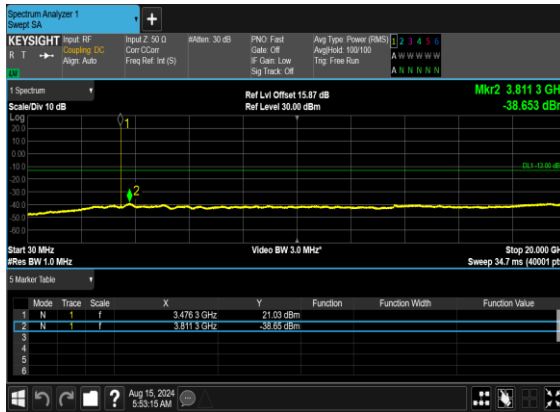


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

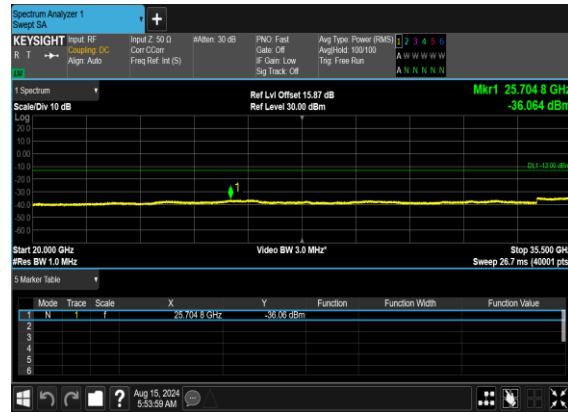

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

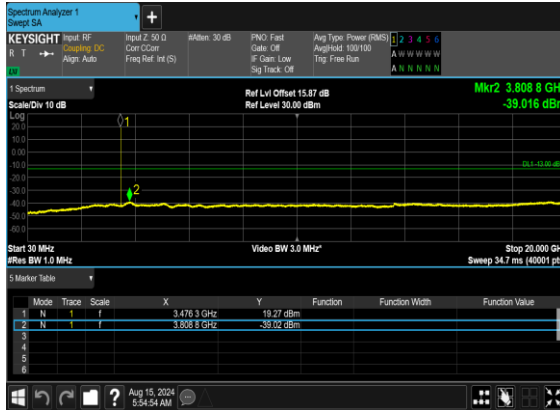


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

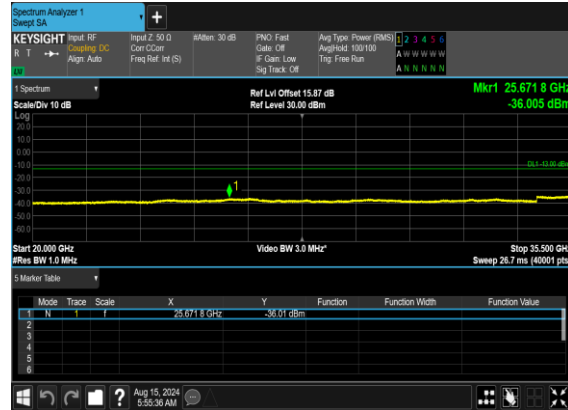





N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

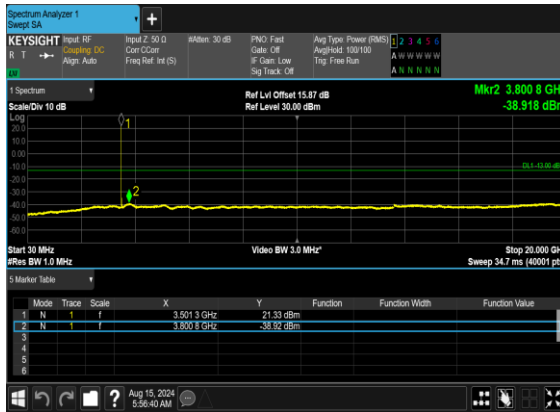


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

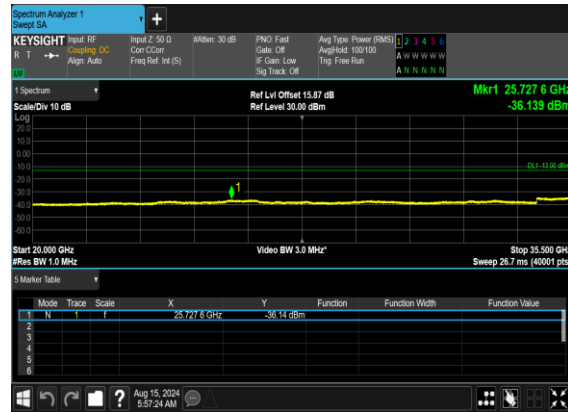

N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

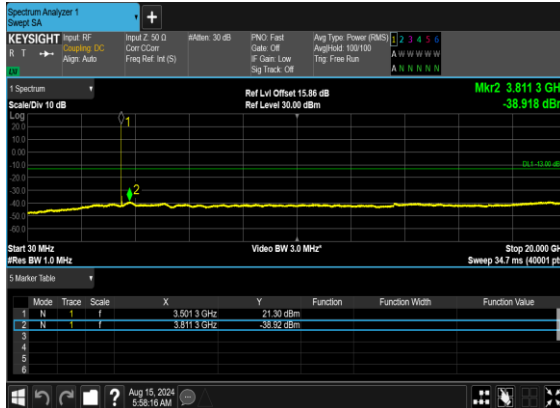


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

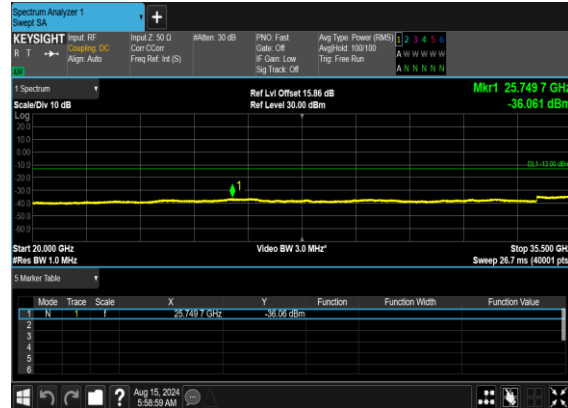





N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

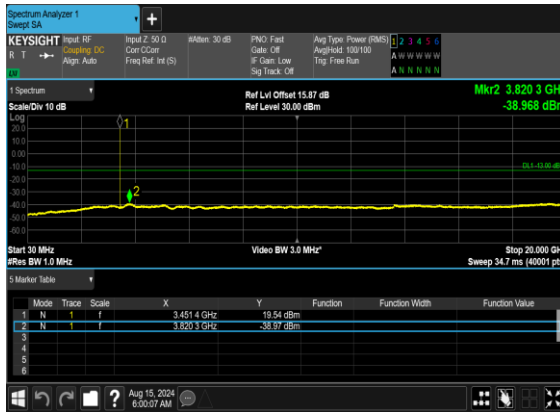


N77(100M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

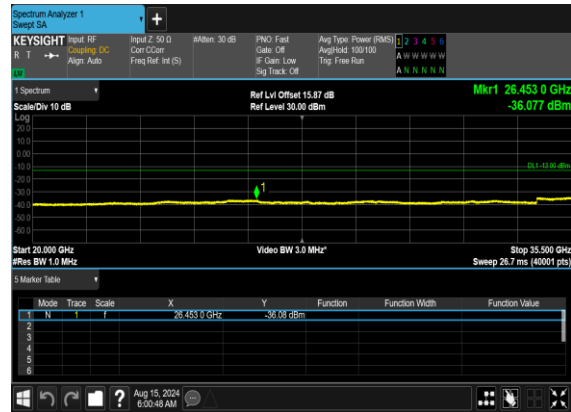

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

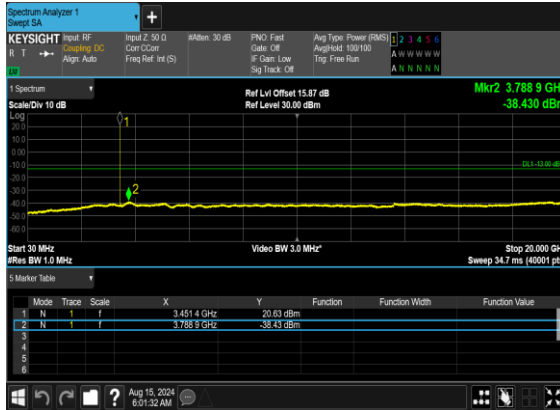

N77(100M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

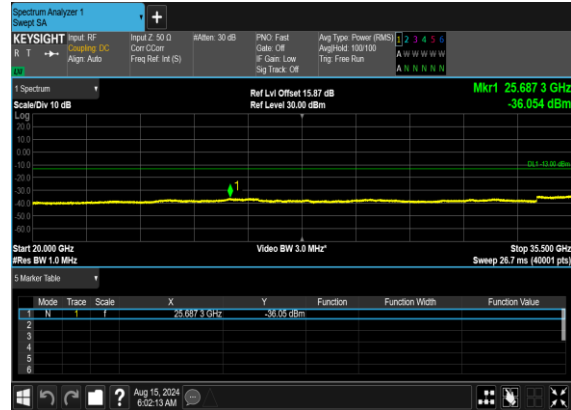


**Conducted Band Edge**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@23	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@23	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM BPSK	24@0	see graph	PASS
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	24@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@132	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@132	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@272	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	270@0	see graph	PASS




N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

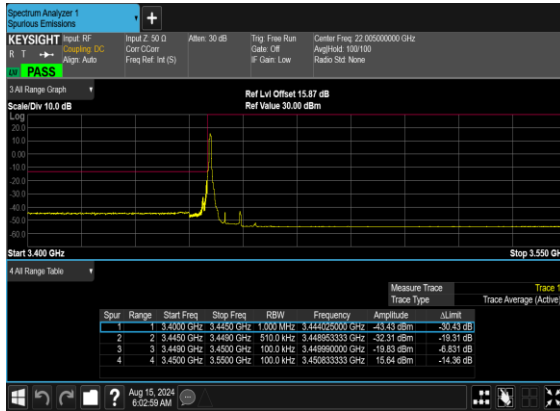


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



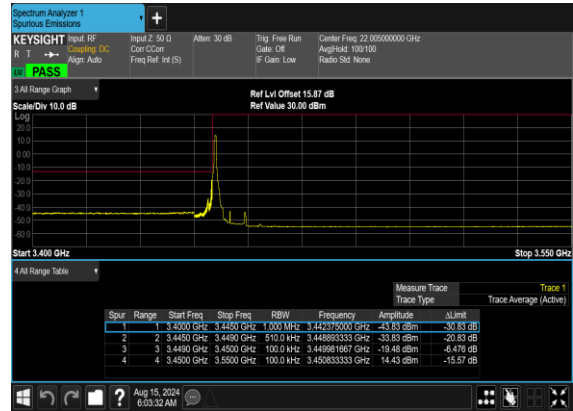


N77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

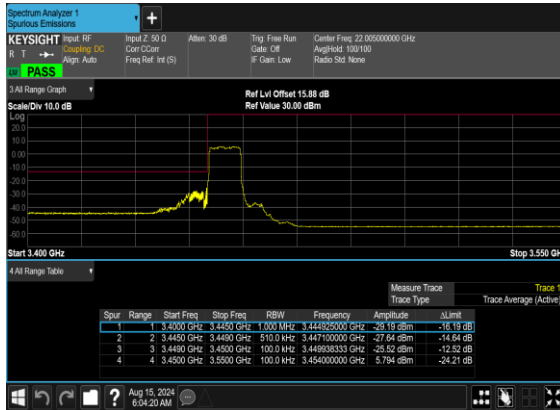

N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

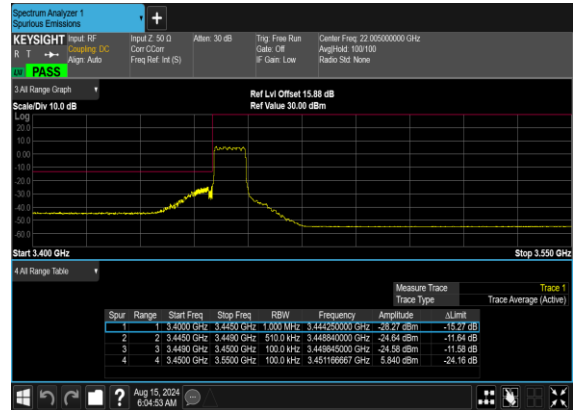

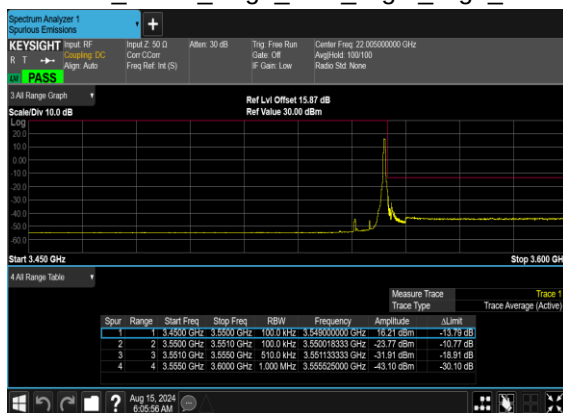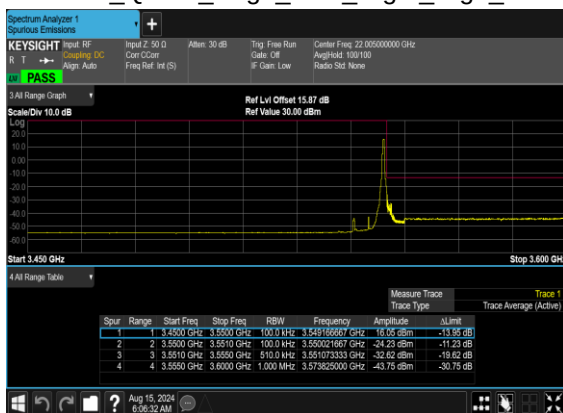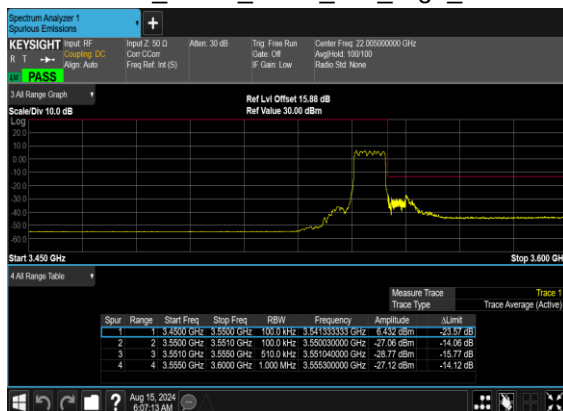N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CHN77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CHN77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CHN77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH