


Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/06/20
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

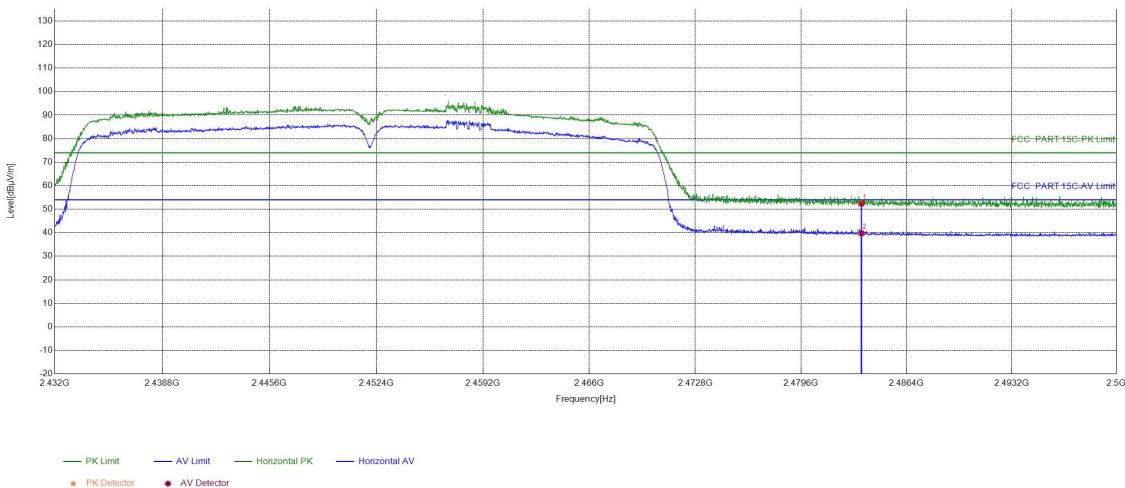

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	36.09	52.38	74.00	21.62	PASS	Horizontal	PK
2	2483.5	16.29	23.47	39.76	54.00	14.24	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/06/20
Remark	Adapter: MS-TA460J240-350B0		


Test Graph

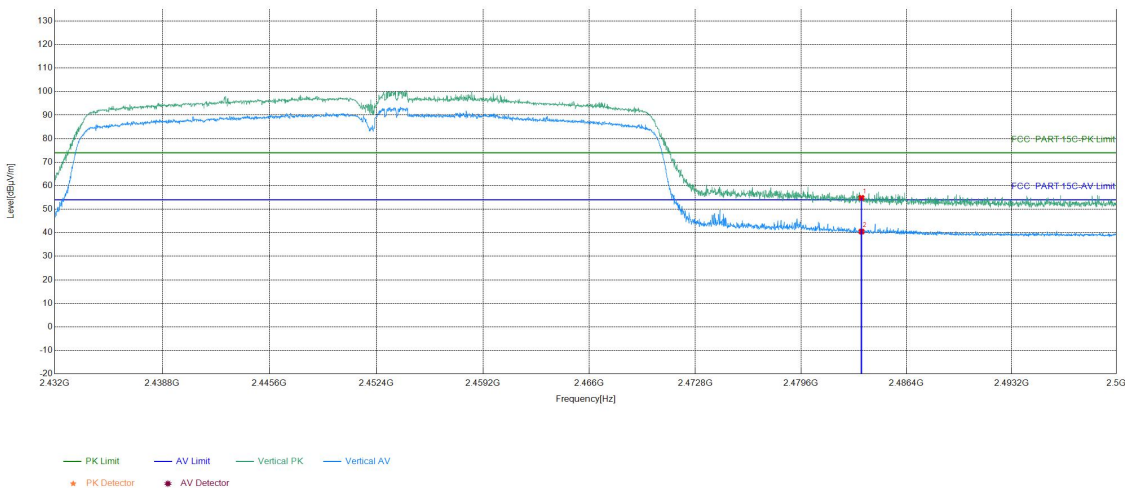

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.52	54.81	74.00	19.19	PASS	Vertical	PK
2	2483.5	16.29	24.22	40.51	54.00	13.49	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

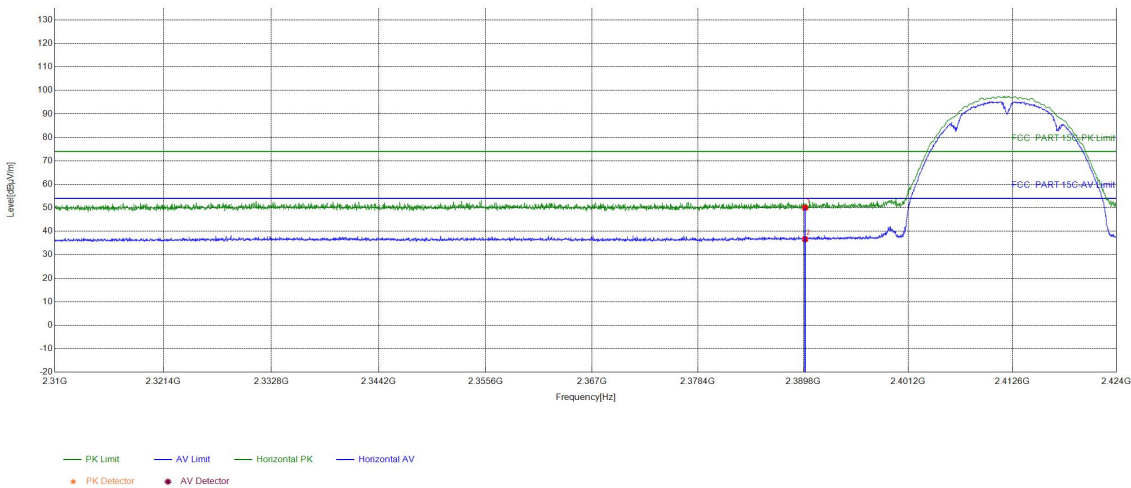

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	34.06	50.02	74.00	23.98	PASS	Horizontal	PK
2	2390	15.96	20.67	36.63	54.00	17.37	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

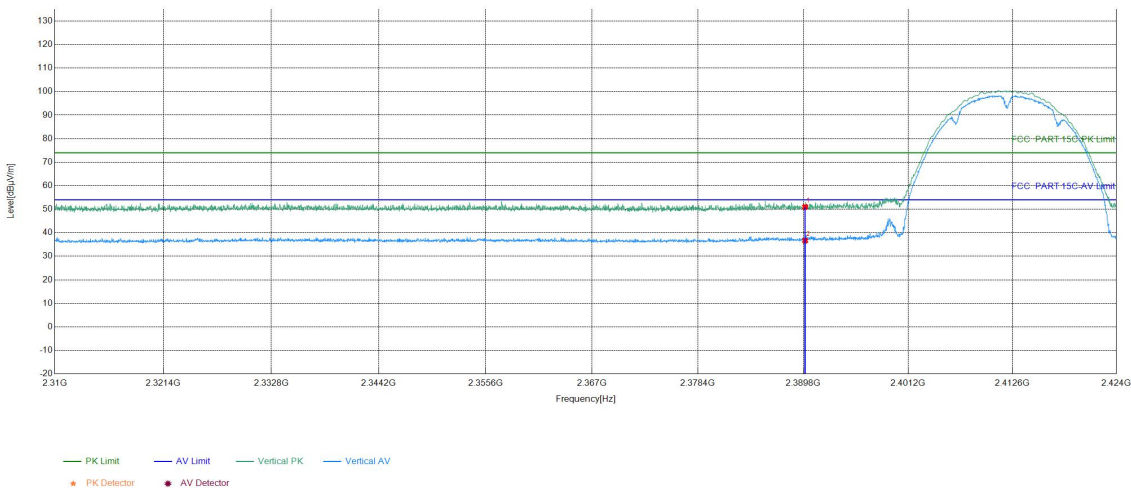

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	35.02	50.98	74.00	23.02	PASS	Vertical	PK
2	2390	15.96	20.71	36.67	54.00	17.33	PASS	Vertical	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

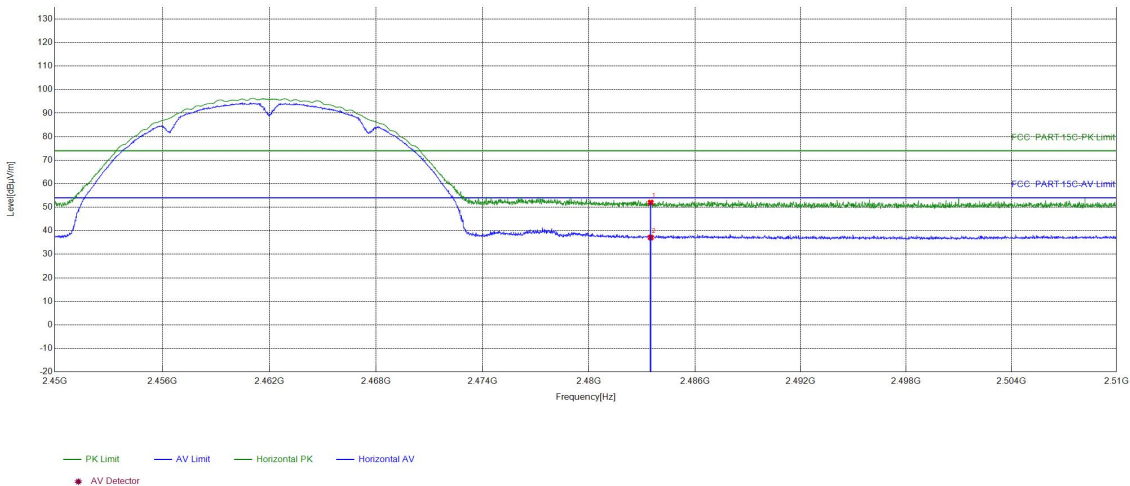

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	35.71	52.00	74.00	22.00	PASS	Horizontal	PK
2	2483.5	16.29	20.85	37.14	54.00	16.86	PASS	Horizontal	AV

Test_Mode	802.11 b Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

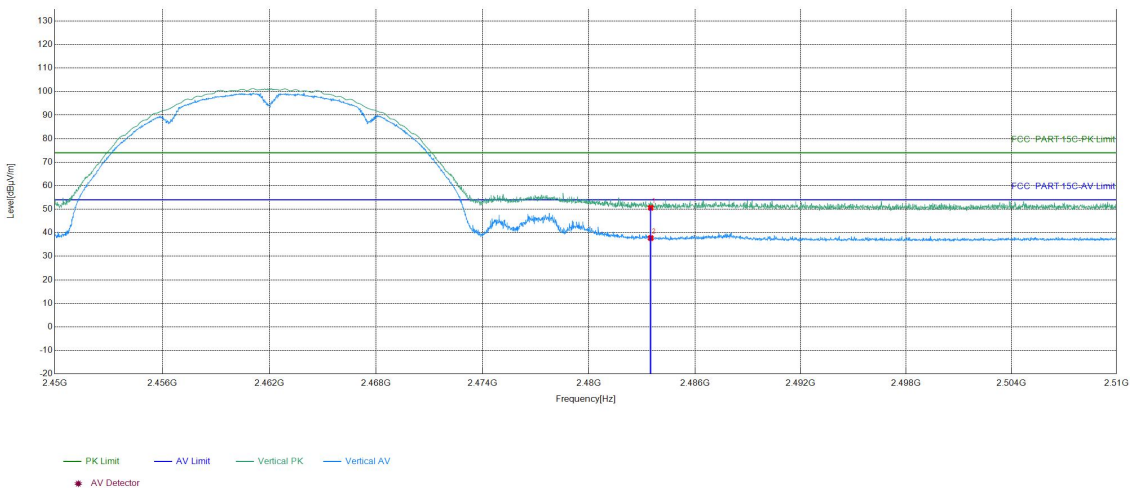

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	34.33	50.62	74.00	23.38	PASS	Vertical	PK
2	2483.5	16.29	21.46	37.75	54.00	16.25	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

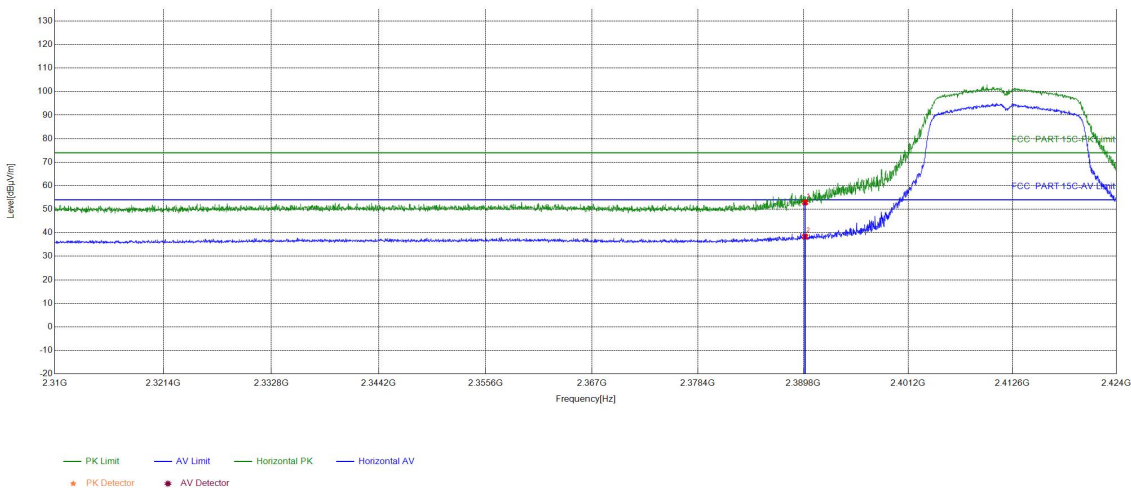

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.91	52.87	74.00	21.13	PASS	Horizontal	PK
2	2390	15.96	22.40	38.36	54.00	15.64	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

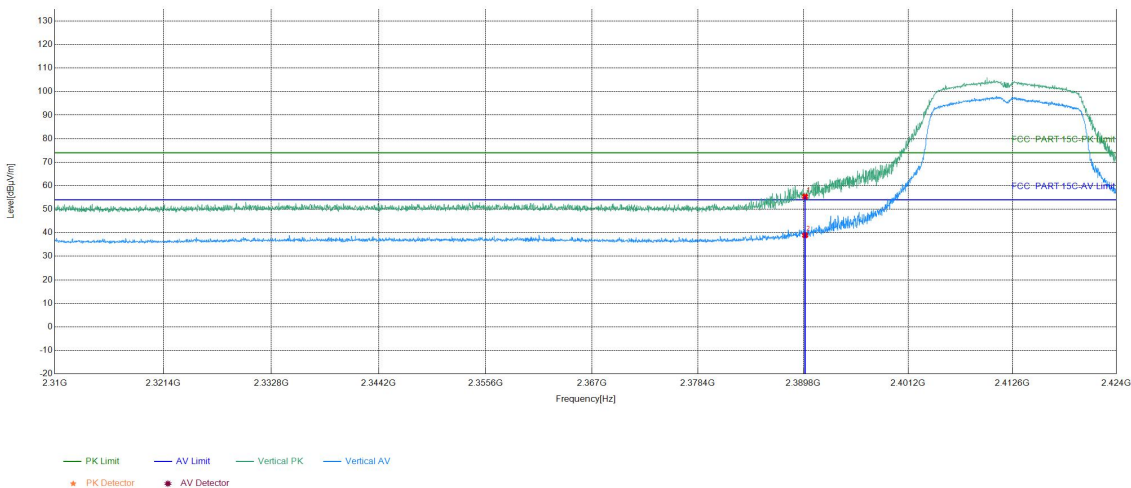

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	39.41	55.37	74.00	18.63	PASS	Vertical	PK
2	2390	15.96	22.98	38.94	54.00	15.06	PASS	Vertical	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

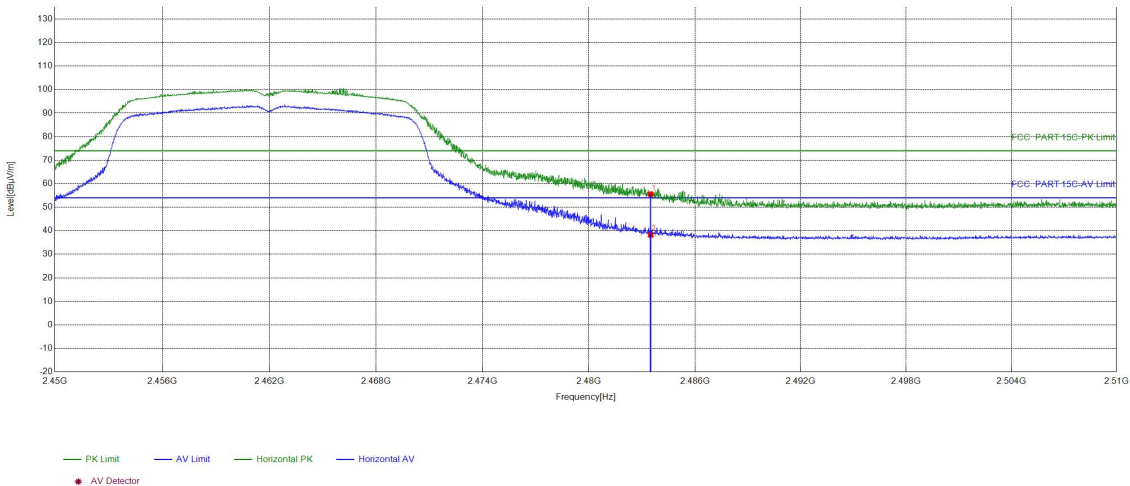

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	39.25	55.54	74.00	18.46	PASS	Horizontal	PK
2	2483.5	16.29	21.94	38.23	54.00	15.77	PASS	Horizontal	AV

Test_Mode	802.11 g Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

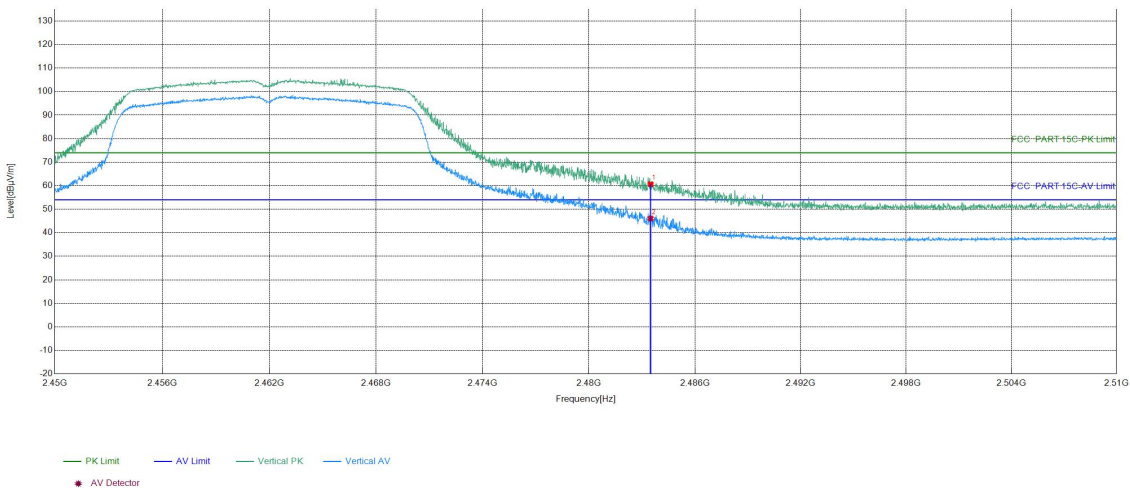

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.34	60.63	74.00	13.37	PASS	Vertical	PK
2	2483.5	16.29	29.76	46.05	54.00	7.95	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

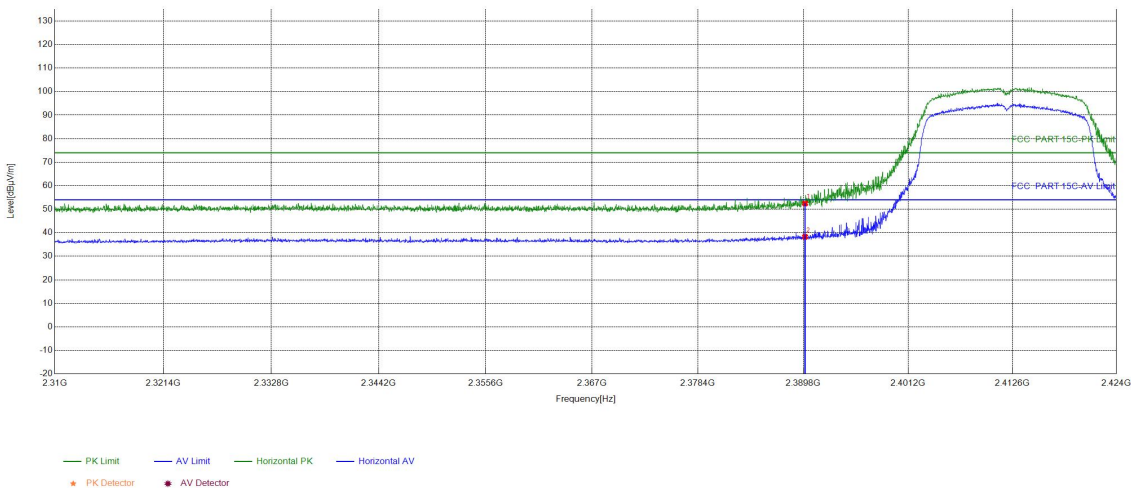

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	36.48	52.44	74.00	21.56	PASS	Horizontal	PK
2	2390	15.96	22.31	38.27	54.00	15.73	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2412MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

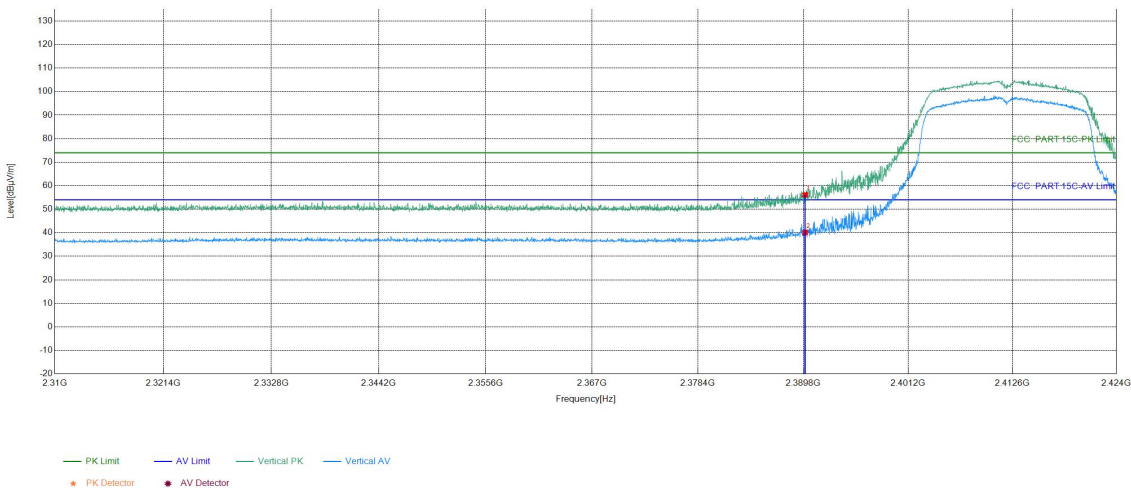

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	40.18	56.14	74.00	17.86	PASS	Vertical	PK
2	2390	15.96	24.16	40.12	54.00	13.88	PASS	Vertical	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

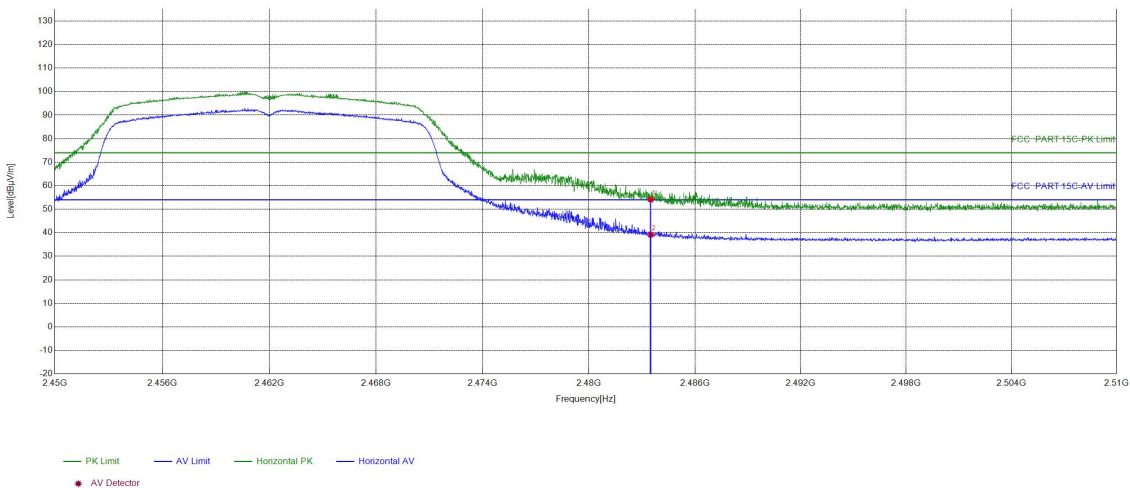

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	37.87	54.16	74.00	19.84	PASS	Horizontal	PK
2	2483.5	16.29	22.89	39.18	54.00	14.82	PASS	Horizontal	AV

Test_Mode	802.11 n(HT20) Transmitting	Test_Frequency	2462MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

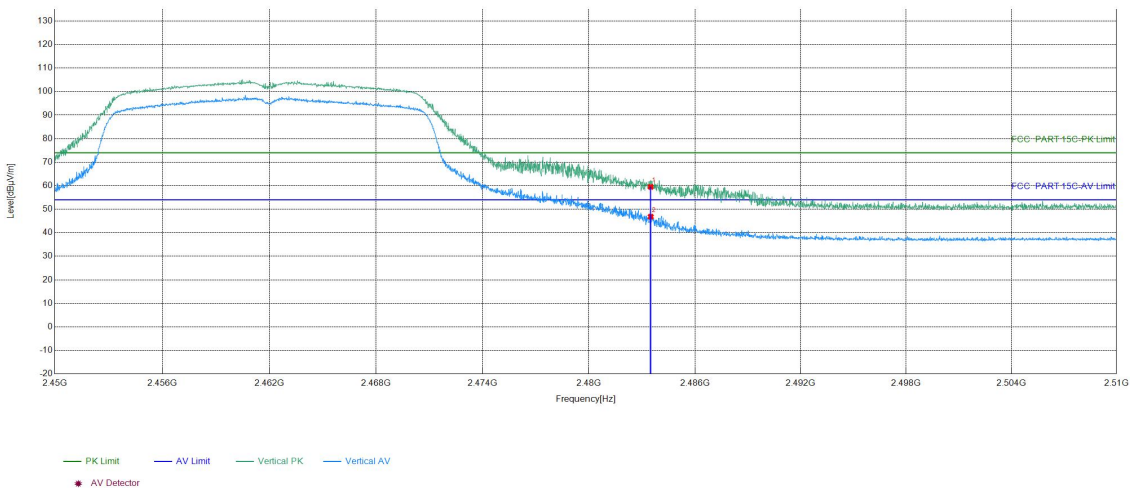

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	43.20	59.49	74.00	14.51	PASS	Vertical	PK
2	2483.5	16.29	30.54	46.83	54.00	7.17	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

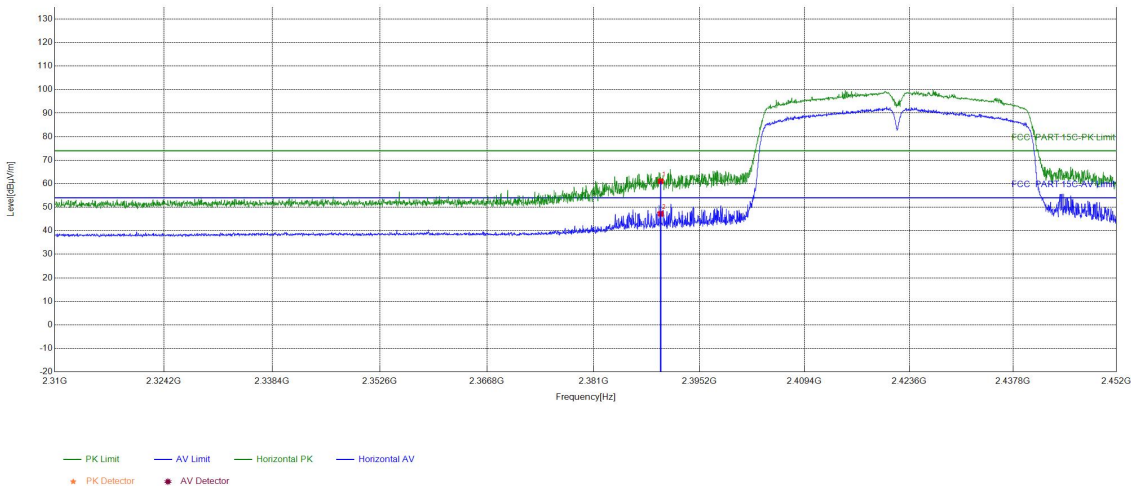

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	45.11	61.07	74.00	12.93	PASS	Horizontal	PK
2	2390	15.96	31.27	47.23	54.00	6.77	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2422MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

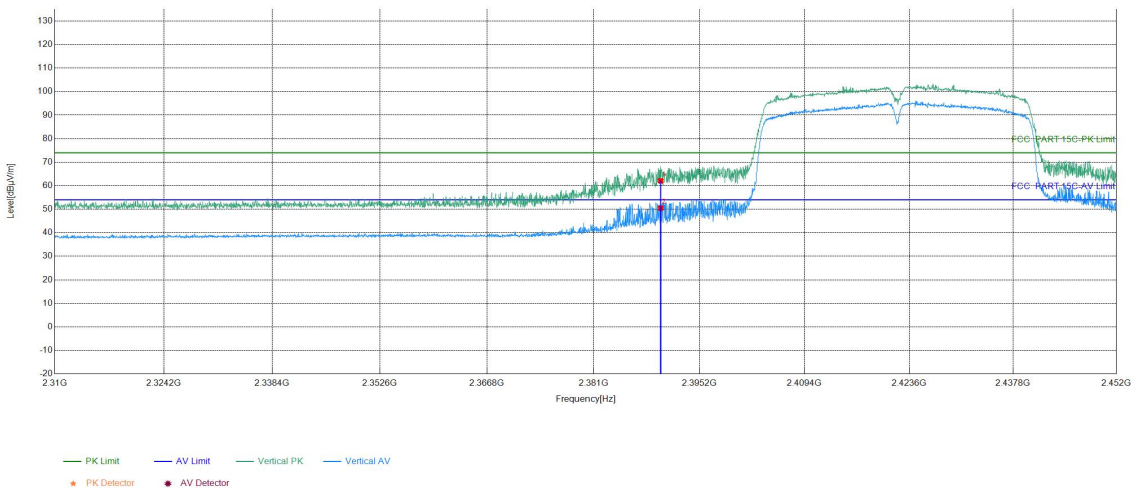

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390	15.96	46.13	62.09	74.00	11.91	PASS	Vertical	PK
2	2390	15.96	34.51	50.47	54.00	3.53	PASS	Vertical	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		


Test Graph

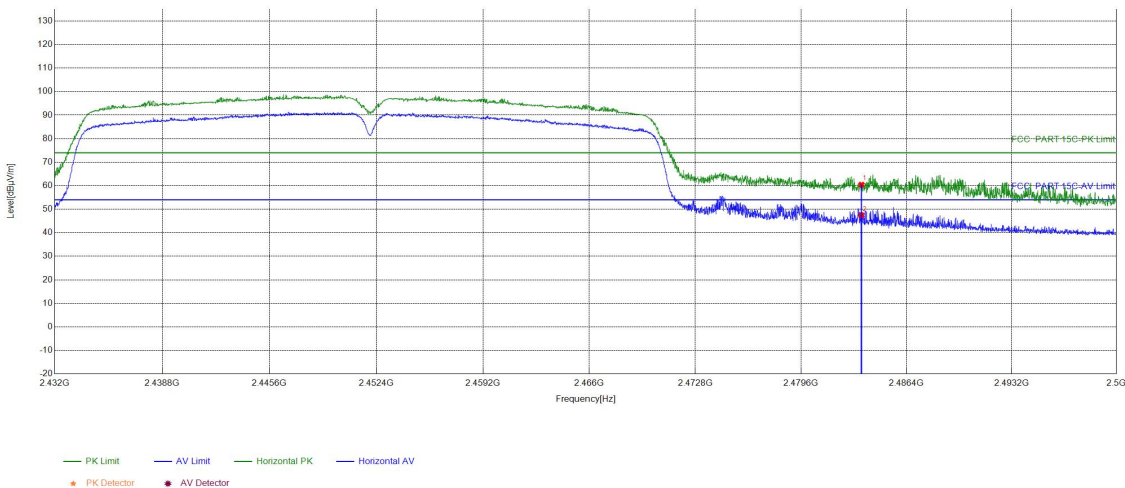

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	44.13	60.42	74.00	13.58	PASS	Horizontal	PK
2	2483.5	16.29	31.15	47.44	54.00	6.56	PASS	Horizontal	AV

Test_Mode	802.11 n(HT40) Transmitting	Test_Frequency	2452MHz
Tset_Engineer	chenjun	Test_Date	2025/07/10
Remark	Adapter: A-350FKD-24P-B0		

Test Graph

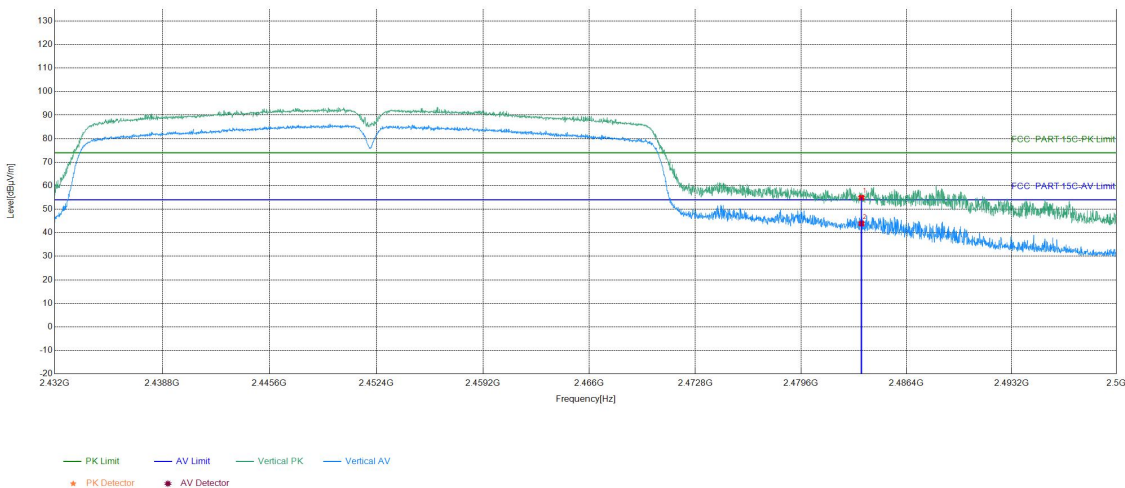

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5	16.29	38.63	54.92	74.00	19.08	PASS	Vertical	PK
2	2483.5	16.29	27.61	43.90	54.00	10.10	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

6 Appendix A

Refer to Appendix: 2.4G Wi-Fi of EED32R80632601

Statement

1. This report is considered invalid without approved signature, special seal and the seal on the perforation;
2. The Company Name shown on Report and Address, the sample(s) and sample information was/were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified;
3. The result(s) shown in this report refer(s) only to the sample(s) tested;
4. Unless otherwise stated, the decision rule for conformity reporting is based on Binary Statement for Simple Acceptance Rule stated in ILAC-G8:09/2019/CNAS-GL015:2022;
5. Without written approval of CTI, this report can't be reproduced except in full;

*** End of Report ***