



n7_15kHz_SISO_NTNV_15MHz_DFT-s-OFDM_QPSK_2507.5MHz_Edge_1RB_Left Ant2

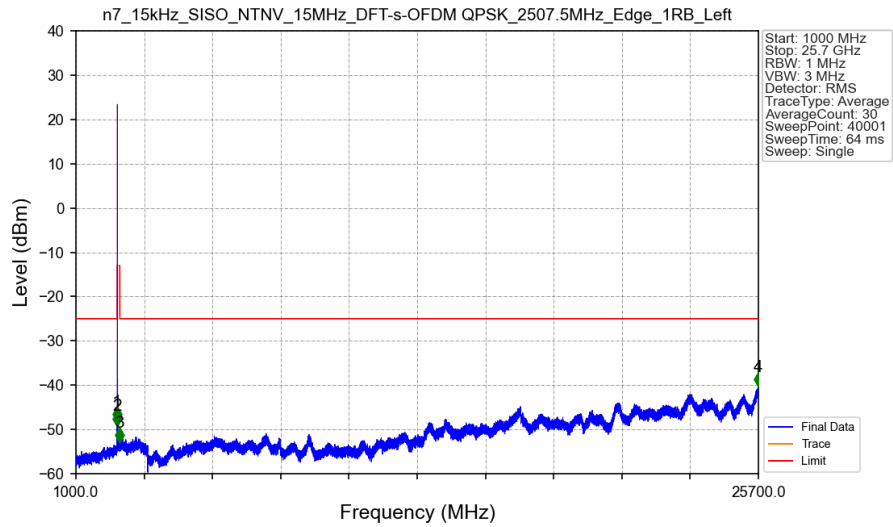


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2490.5	1	/	1	2490.028	-48.03	-25	Pass
2490.5	2495	1	/	2	2494.350	-49.11	-13	Pass
2495	2575	1	/	/	/	/	/	/
2575	2585	1	/	3	2577.095	-52.91	-13	Pass
2585	25700	1	/	4	25688.268	-40.35	-25	Pass

n7_15kHz_SISO_NTNV_15MHz_DFT-s-OFDM_QPSK_2507.5MHz_Outer_Full Ant2

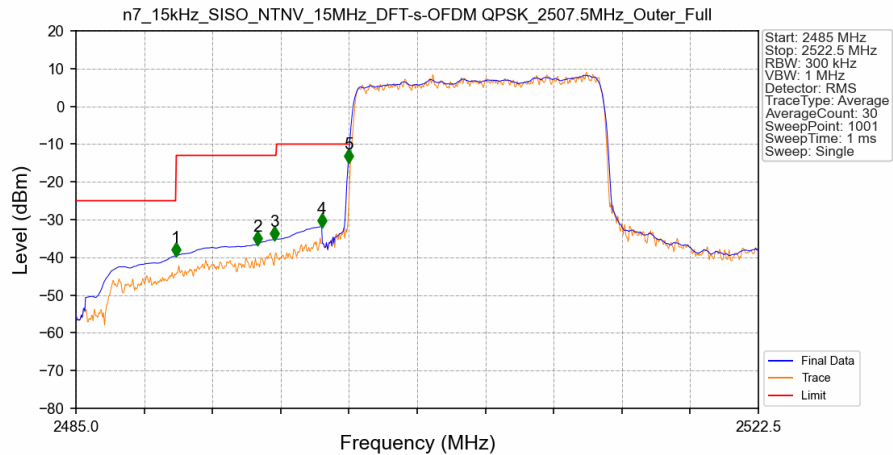


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.475	-39.58	-25	Pass
2490.5	2495	1	CHP	2	2494.975	-36.56	-13	Pass
2495	2496	1	CHP	3	2495.912	-35.20	-13	Pass
2496	2499	1	CHP	4	2498.500	-31.77	-10	Pass
2499	2500	0.383	CHP	5	2499.963	-14.74	-10	Pass
2500	2522.5	0.383	CHP	/	/	/	/	/

n7_15kHz_SISO_NTNV_15MHz_DFT-s-OFDM_QPSK_2507.5MHz_Inner_1RB_Left_Ant2

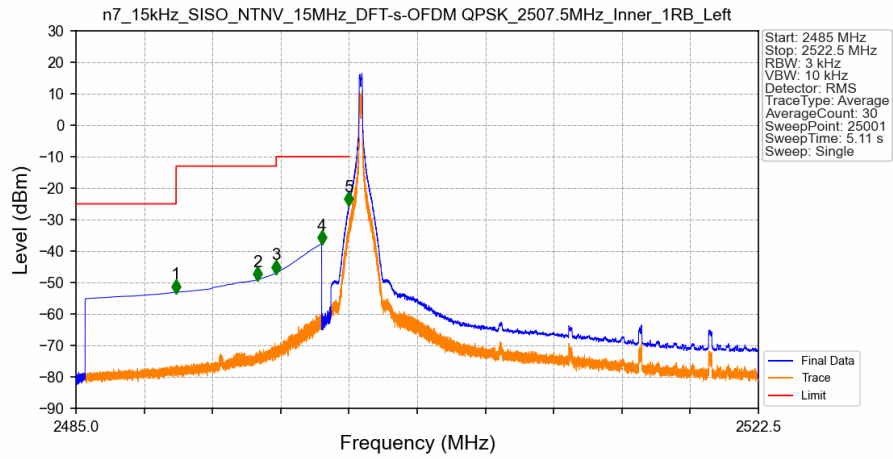


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.475	-53.12	-25	Pass
2490.5	2495	1	CHP	2	2494.987	-49.09	-13	Pass
2495	2496	1	CHP	3	2495.999	-46.97	-13	Pass
2496	2499	1	CHP	4	2498.500	-37.51	-10	Pass
2499	2500	0.02	CHP	5	2499.999	-25.31	-10	Pass
2500	2522.5	0.02	CHP	/	/	/	/	/

n7_15kHz_SISO_NTNV_15MHz_DFT-s-OFDM_QPSK_2535MHz_Edge_1RB_Left_Ant2

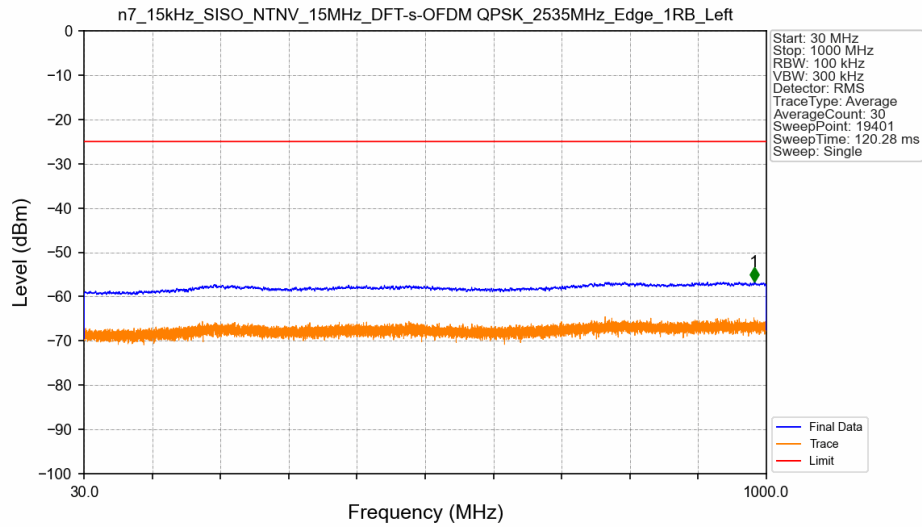


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	982.700	-56.66	-25	Pass

n7 15kHz SISO NTV 15MHz DFT-s-OFDM QPSK 2535MHz Edge 1RB Left Ant2

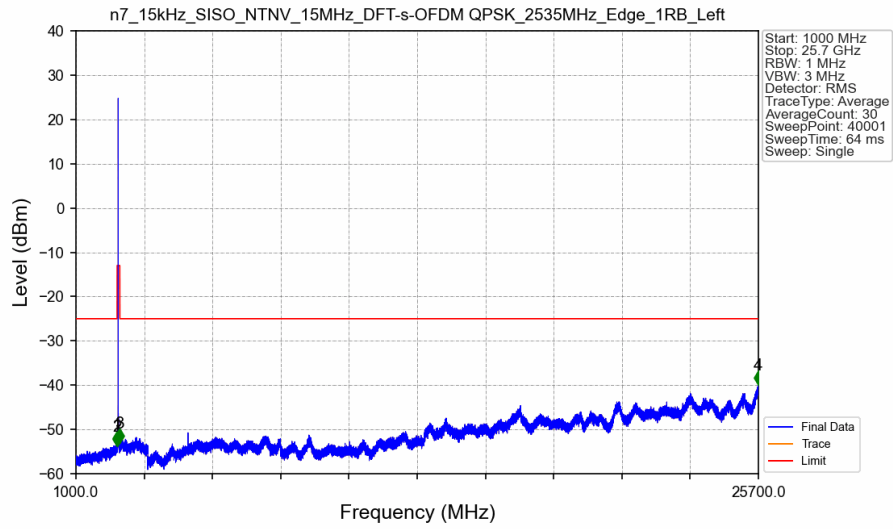


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2490.5	1	/	1	2474.590	-53.48	-25	Pass
2490.5	2495	1	/	2	2493.733	-53.71	-13	Pass
2495	2575	1	/	/	/	/	/	/
2575	2585	1	/	3	2581.418	-53.08	-13	Pass
2585	25700	1	/	4	25695.060	-39.88	-25	Pass

n7 15kHz SISO NTV 15MHz DFT-s-OFDM QPSK 2562.5MHz Edge 1RB Right Ant2

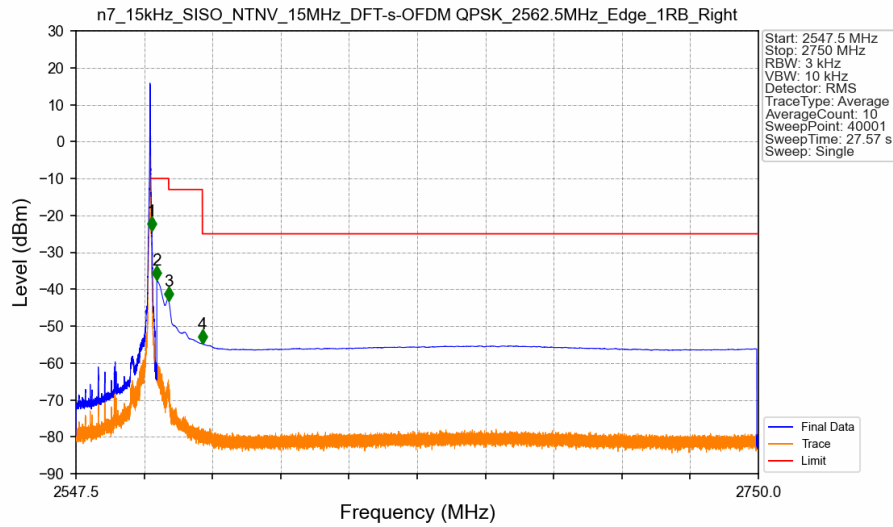


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2547.5	2570	0.02	CHP	/	/	/	/	/
2570	2571	0.02	CHP	1	2570.008	-24.12	-10	Pass
2571	2575	1	CHP	2	2571.501	-37.45	-10	Pass
2575	2585	1	CHP	3	2575.005	-43.09	-13	Pass
2585	2750	1	CHP	4	2585.003	-54.82	-25	Pass

n7 15kHz SISO NTN 15MHz DFT-s-OFDM QPSK 2562.5MHz Edge 1RB Right Ant2

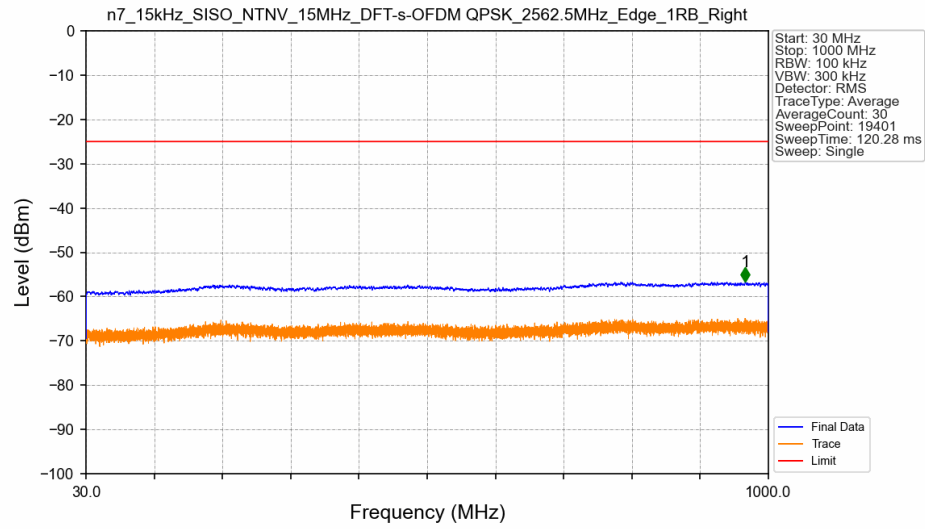


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	967.250	-56.64	-25	Pass

n7 15kHz SISO NTN 15MHz DFT-s-OFDM QPSK 2562.5MHz Edge 1RB Right Ant2

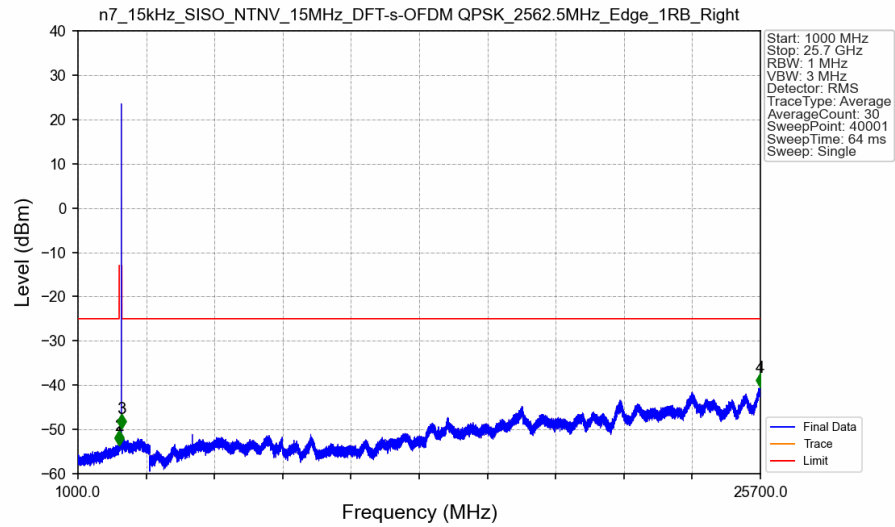


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2490.5	1	/	1	2490.028	-53.36	-25	Pass
2490.5	2495	1	/	2	2494.968	-53.63	-13	Pass
2495	2575	1	/	/	/	/	/	/
2575	2585	1	/	3	2575.242	-49.77	-13	Pass
2585	25700	1	/	4	25687.650	-40.49	-25	Pass

n7 15kHz SISO NTN 15MHz DFT-s-OFDM QPSK 2562.5MHz Outer Full Ant2

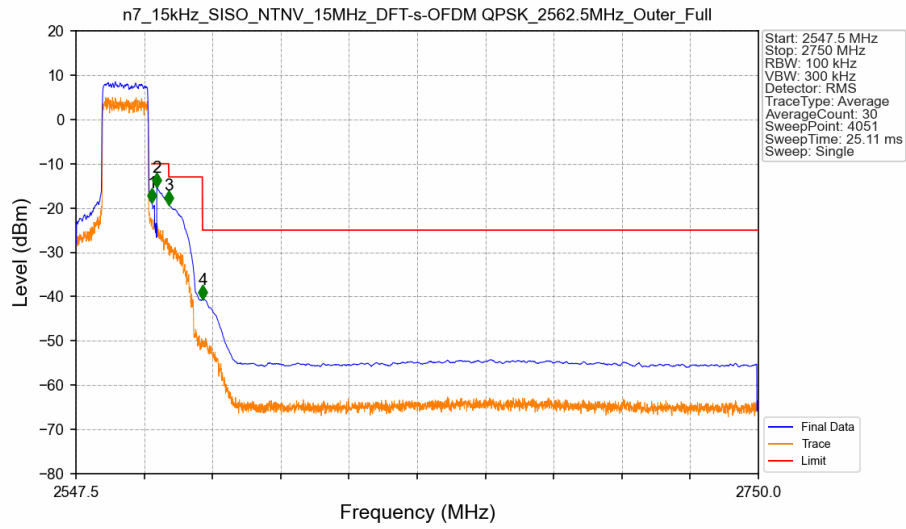

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2547.5	2570	0.307	CHP	/	/	/	/	/
2570	2571	0.307	CHP	1	2570.050	-18.79	-10	Pass
2571	2575	1	CHP	2	2571.550	-15.28	-10	Pass
2575	2585	1	CHP	3	2575.050	-19.22	-13	Pass
2585	2750	1	CHP	4	2585.150	-40.64	-25	Pass


n7 15kHz SISO NTN 15MHz DFT-s-OFDM QPSK 2562.5MHz Inner 1RB Right Ant2

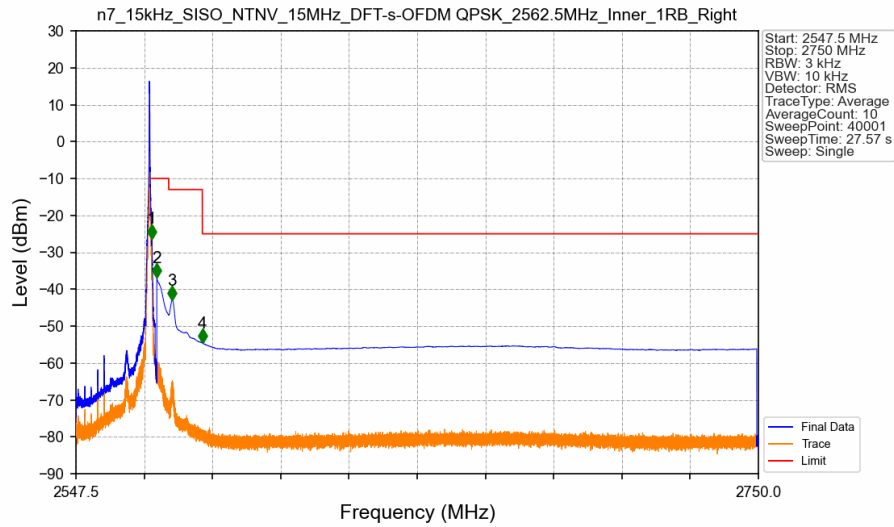

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2547.5	2570	0.02	CHP	/	/	/	/	/
2570	2571	0.02	CHP	1	2570.008	-26.22	-10	Pass
2571	2575	1	CHP	2	2571.501	-36.77	-10	Pass
2575	2585	1	CHP	3	2576.078	-43.02	-13	Pass
2585	2750	1	CHP	4	2585.003	-54.60	-25	Pass


5.2.4 15k_SISO_20MHz_NTNV

n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2510MHz_Edge_1RB_Left_Ant2

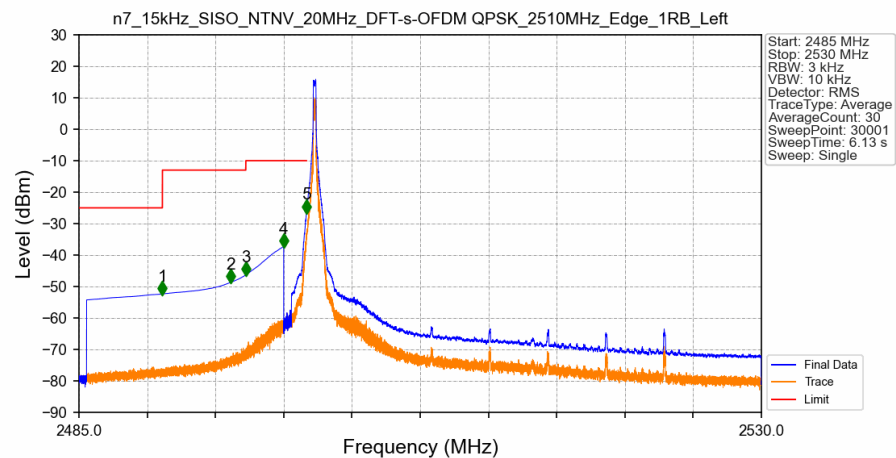


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.499	-52.38	-25	Pass
2490.5	2495	1	CHP	2	2494.996	-48.68	-13	Pass
2495	2496	1	CHP	3	2495.999	-46.33	-13	Pass
2496	2499	1	CHP	4	2498.497	-37.27	-10	Pass
2499	2500	0.02	CHP	5	2499.999	-26.46	-10	Pass
2500	2530	0.02	CHP	/	/	/	/	/

n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2510MHz_Edge_1RB_Left_Ant2

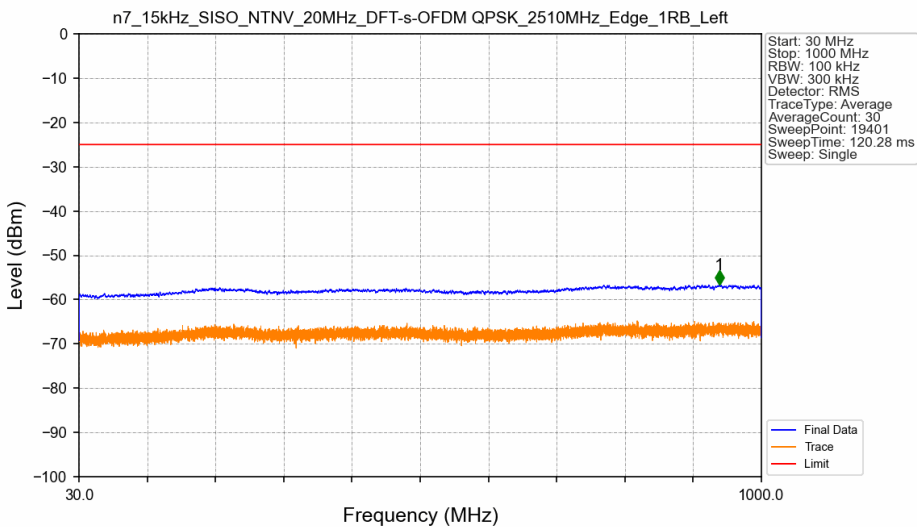


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	940.400	-56.68	-25	Pass

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2510MHz Edge 1RB Left Ant2

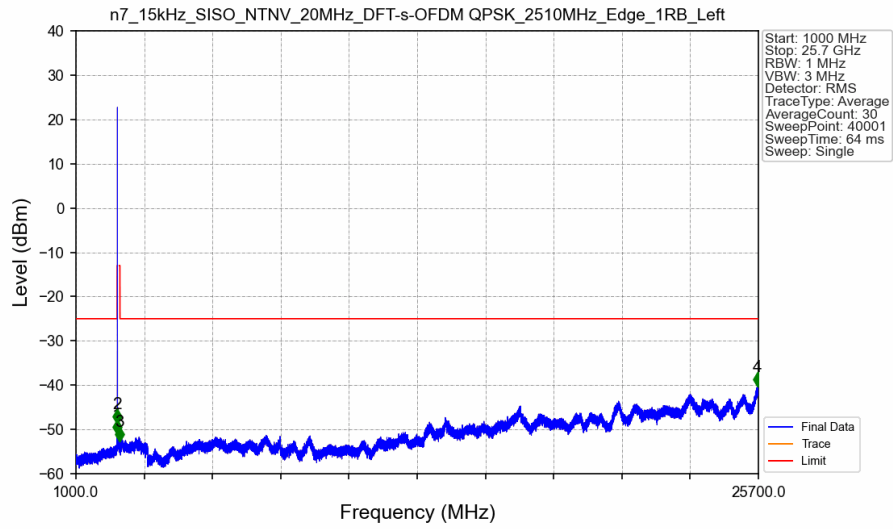


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2490.5	1	/	1	2490.028	-51.00	-25	Pass
2490.5	2495	1	/	2	2494.968	-48.67	-13	Pass
2495	2575	1	/	/	/	/	/	/
2575	2590	1	/	3	2588.210	-52.63	-13	Pass
2590	25700	1	/	4	25663.568	-40.32	-25	Pass

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2510MHz Outer Full Ant2

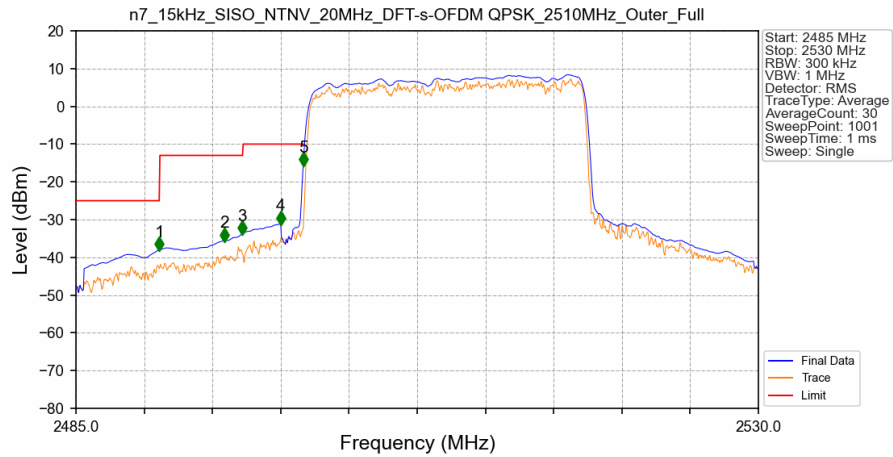


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.490	-38.08	-25	Pass
2490.5	2495	1	CHP	2	2494.810	-35.55	-13	Pass
2495	2496	1	CHP	3	2495.980	-33.68	-13	Pass
2496	2499	1	CHP	4	2498.500	-31.10	-10	Pass
2499	2500	0.54	CHP	5	2499.985	-15.55	-10	Pass
2500	2530	0.54	CHP	/	/	/	/	/

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2510MHz Inner 1RB Left Ant2

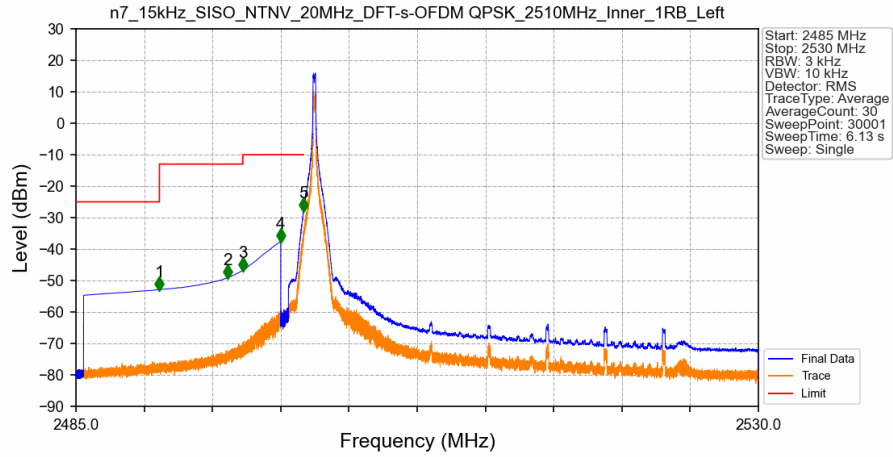


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2485	2490.5	1	CHP	1	2490.496	-52.89	-25	Pass
2490.5	2495	1	CHP	2	2494.999	-49.12	-13	Pass
2495	2496	1	CHP	3	2495.998	-46.79	-13	Pass
2496	2499	1	CHP	4	2498.500	-37.54	-10	Pass
2499	2500	0.02	CHP	5	2499.997	-27.90	-10	Pass
2500	2530	0.02	CHP	/	/	/	/	/

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2535MHz Edge 1RB Left Ant2

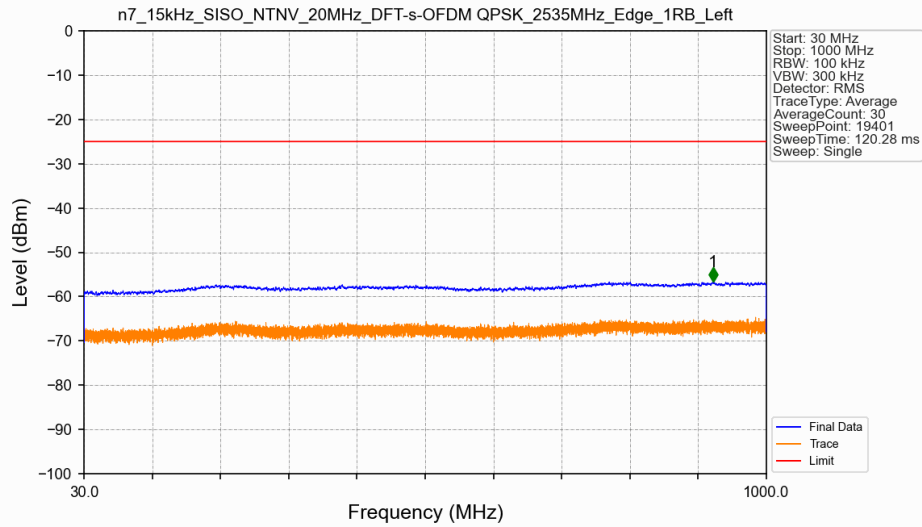


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
30	1000	1	CHP	1	924.000	-56.58	-25	Pass

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2535MHz Edge 1RB Left Ant2

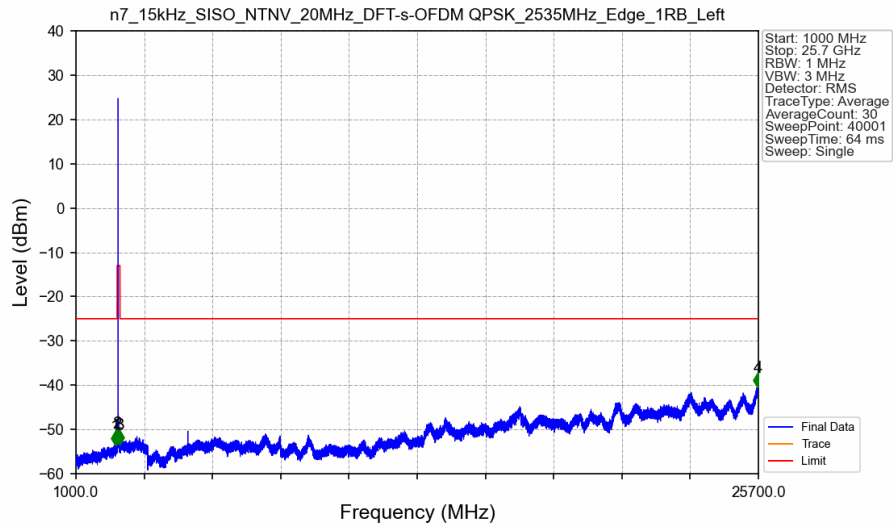


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
1000	2490.5	1	/	1	2428.895	-53.49	-25	Pass
2490.5	2495	1	/	2	2493.733	-53.05	-13	Pass
2495	2575	1	/	/	/	/	/	/
2575	2590	1	/	3	2582.035	-53.35	-13	Pass
2590	25700	1	/	4	25674.065	-40.40	-25	Pass

n7 15kHz SISO NTN 20MHz DFT-s-OFDM QPSK 2560MHz Edge 1RB Right Ant2

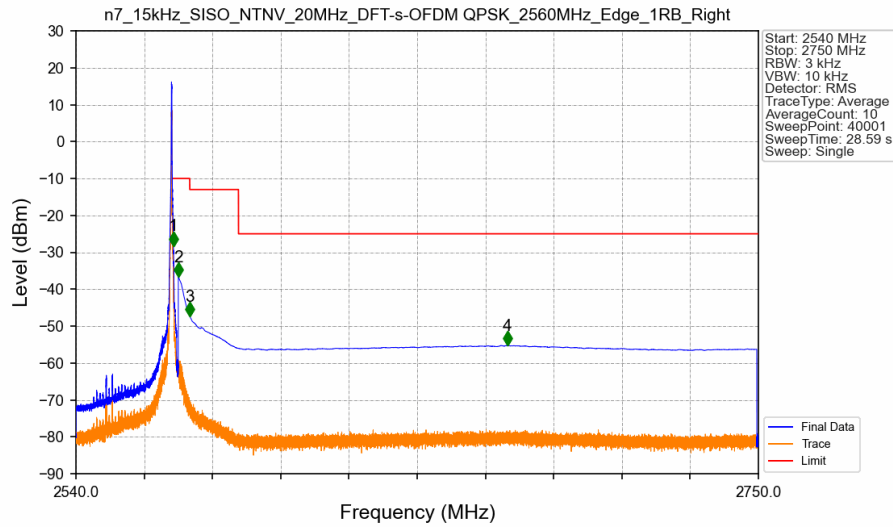


Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2540	2570	0.02	CHP	/	/	/	/	/
2570	2571	0.02	CHP	1	2570.009	-28.19	-10	Pass
2571	2575	1	CHP	2	2571.500	-36.64	-10	Pass
2575	2590	1	CHP	3	2575.002	-47.31	-13	Pass
2590	2750	1	CHP	4	2672.720	-55.26	-25	Pass


n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2560MHz_Edge_1RB_Right_Ant2

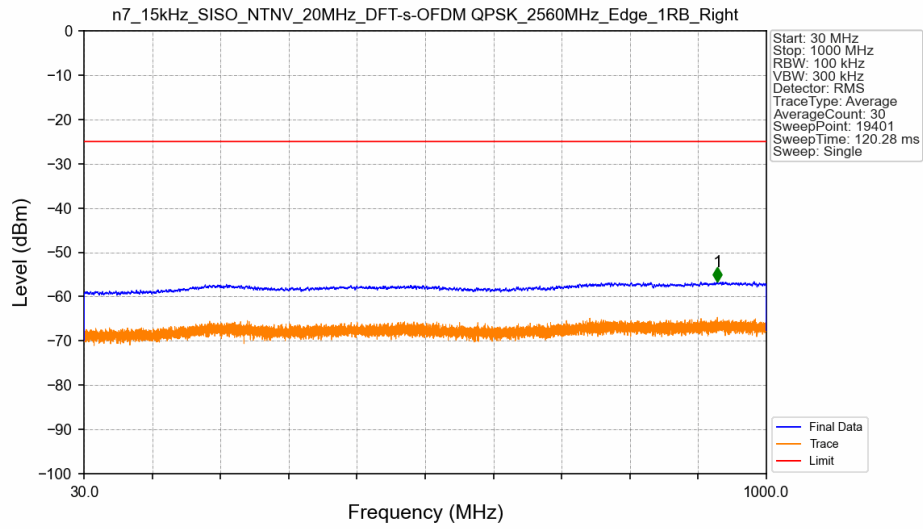

n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2560MHz_Edge_1RB_Right_Ant2

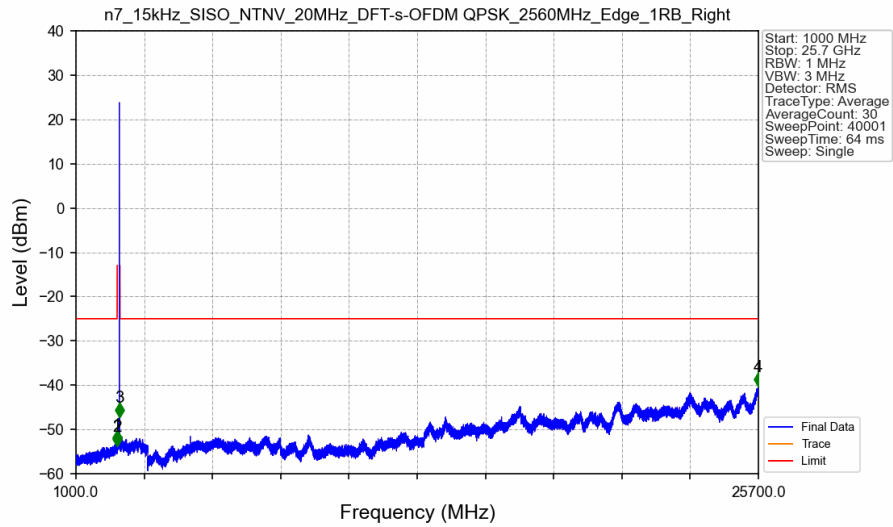


n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2560MHz_Outer_Full_Ant2

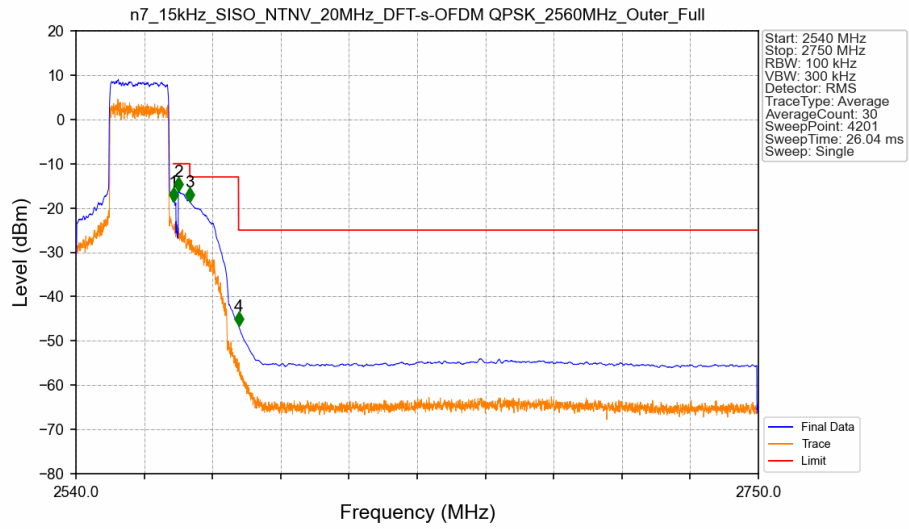

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2540	2570	0.433	CHP	/	/	/	/	/
2570	2571	0.433	CHP	1	2570.050	-18.49	-10	Pass
2571	2575	1	CHP	2	2571.500	-16.17	-10	Pass
2575	2590	1	CHP	3	2575.050	-18.53	-13	Pass
2590	2750	1	CHP	4	2590.050	-46.58	-25	Pass

n7_15kHz_SISO_NTNV_20MHz_DFT-s-OFDM_QPSK_2560MHz_Inner_1RB_Right_Ant2

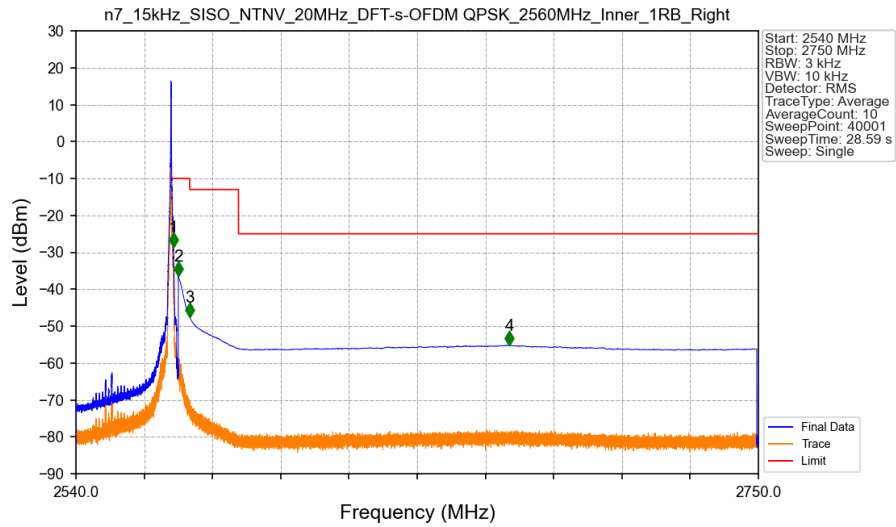

Start (MHz)	Stop (MHz)	RBW (MHz)	Method	Marker No.	Freq (MHz)	Level (dBm)	Limit (dBm)	Result
2540	2570	0.02	CHP	/	/	/	/	/
2570	2571	0.02	CHP	1	2570.014	-28.43	-10	Pass
2571	2575	1	CHP	2	2571.500	-36.49	-10	Pass
2575	2590	1	CHP	3	2575.002	-47.55	-13	Pass
2590	2750	1	CHP	4	2673.418	-55.23	-25	Pass