

RF-Emission Test Report

Application No.: SUCR2505000494WM
Applicant: Sonim Technologies, Inc.
Address of Applicant: 4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA
Manufacturer: Sonim Technologies, Inc.
Address of Manufacturer: 4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA
EUT Description: Smartphone
Model No.: X800
FCC ID: WYPS6002
Standards: ANSI C63.19-2019
CFR 47 FCC Part 20
Date of Receipt: 2025-05-28
Date of Test: 2025-06-09 to 2025-06-10
Date of Issue: 2025-06-16

Test Result:	PASS *
--------------	--------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Docment>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 2 of 30

Revision Record			
Version	Description	Date	Remark
01	Original	2025-06-16	/

Authorized for issue by:			
		 Alger Du/ Project Engineer	
		 Leon Liu/ Reviewer	

TEST SUMMARY

Frequency Band	HAC RF Emission Test result*		Results
GSM 850	E-Field dB(V/m)	37.86	PASS
PCS 1900	E-Field dB(V/m)	33.70	PASS
WCDMA band 2	E-Field dB(V/m)	/	PASS
WCDMA band 4	E-Field dB(V/m)	/	PASS
WCDMA band 5	E-Field dB(V/m)	/	PASS
LTE band 2	E-Field dB(V/m)	/	PASS
LTE band 4	E-Field dB(V/m)	/	PASS
LTE band 5	E-Field dB(V/m)	/	PASS
LTE band 7	E-Field dB(V/m)	/	PASS
LTE band 12	E-Field dB(V/m)	/	PASS
LTE band 13	E-Field dB(V/m)	/	PASS
LTE band 14	E-Field dB(V/m)	/	PASS
LTE band 25	E-Field dB(V/m)	/	PASS
LTE band 26	E-Field dB(V/m)	/	PASS
LTE band 30	E-Field dB(V/m)	/	PASS
LTE band 38	E-Field dB(V/m)	/	PASS
LTE band 41	E-Field dB(V/m)	/	PASS
LTE band 42	E-Field dB(V/m)	/	PASS
LTE band 48	E-Field dB(V/m)	/	PASS
LTE band 66	E-Field dB(V/m)	/	PASS
LTE band 71	E-Field dB(V/m)	/	PASS
FR1 n2	E-Field dB(V/m)	/	PASS
FR1 n5	E-Field dB(V/m)	/	PASS
FR1 n7	E-Field dB(V/m)	/	PASS
FR1 n14	E-Field dB(V/m)	/	PASS
FR1 n25	E-Field dB(V/m)	/	PASS
FR1 n26	E-Field dB(V/m)	/	PASS
FR1 n38	E-Field dB(V/m)	/	PASS
FR1 n41	E-Field dB(V/m)	/	PASS
FR1 n48	E-Field dB(V/m)	/	PASS
FR1 n66	E-Field dB(V/m)	/	PASS
FR1 n70	E-Field dB(V/m)	/	PASS
FR1 n71	E-Field dB(V/m)	/	PASS
FR1 n77	E-Field dB(V/m)	/	PASS
FR1 n78	E-Field dB(V/m)	/	PASS
WLAN2.4GHz	E-Field dB(V/m)	/	PASS
WLAN5GHz	E-Field dB(V/m)	/	PASS
WLAN6GHz	E-Field dB(V/m)	/	PASS
HAC ResultS: PASS			

Note:

1) This portable wireless equipment has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std.C63.19-2019 and had been tested in accordance with the specified measurement procedures, Hear-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. Test results reported herein relate only to the item(s) tested and are for North American Bands only.

2) *- HAC RF Emission Test for low power exemption according to ANSI C63.19-2019 and HAC RF Emission rating is PASS.

3) According to the manufacturer's statement, perform verification testing in the original report (original report number SUCR240600020102) and select the worst position for verification.

The worst case is presented by selecting the maximum value from the original report (report number SUCR240600020102) and this report (report number SUCR250500049402).

Please refer to section 9.4 of the report for the experimental values of this experiment.

CONTENTS

1	General Information	5
1.1	Introduction.....	5
1.2	Details of Client	6
1.3	Test Location.....	6
1.4	Test Facility	6
1.5	General Description of EUT	7
1.5.1	<i>DUT Antenna Locations</i>	9
1.5.2	<i>List of air interfaces/frequency bands</i>	10
1.6	Test Specification	12
1.7	ANSI C63.19-2019 limits	12
2	Calibration certificate	13
3	HAC (T Coil) Measurement System	14
3.1	Measurement System Diagram for SPEAG Robotic.....	14
3.2	E-Field Probe	15
3.3	Test Arch	15
3.4	Phone Holder	15
4	Measurement uncertainty evaluation	16
5	RF Emission Measurements Reference and Plane	17
6	System Verification Procedure	18
6.1	System Check	18
6.2	System Check Result	19
7	Modulation Interference Factor	20
8	HAC Measurement Procedure	22
9	HAC RF Measurement Results	23
9.1	Max Tune-up	23
9.2	Conducted RF Output Power	25
9.3	Low-power Exemption.....	26
9.4	HAC RF Emission Test Results	29
10	Equipment list	30

1 General Information

1.1 Introduction

The purpose of the Hearing Aid Compatibility is to enable measurements of the near electric fields generated by wireless communication devices in the region controlled for use by a hearing aid in accordance with ANSI-C63.19-2019.

The purpose of this standard is to establish categories for hearing aids and for WD (wireless communications devices) that can indicate to health care practitioners and hearing aid users which hearing aids are compatible with which WD, and to provide tests that can be used to assess the electromagnetic characteristics of hearing aids and WD and assign them to these categories. The various parameters required, in order to demonstrate compatibility and accessibility are measured. The design of the standard is such that when a hearing aid and WD achieve one of the categories specified, as measured by the methodology of this standard, the indicated performance is realized.

In order to provide for the usability of a hearing aid with a WD, several factors must be coordinated:
a) Radio frequency (RF) measurements of the near-field electric fields emitted by a WD to categorize these emissions for correlation with the RF immunity of a hearing aid.

Hence, the following are measurements made for the WD:
RF E-Field emissions

The measurement plane is parallel to, and 1.5cm in front of, the reference plane.

Applications for certification of equipment operation under part 20, that a manufacturer is seeking to certify as hearing aid compatible, as set forth in §20.19 of that part, shall include a statement indication compliance with the test requirements of §20.19 and indicating the appropriate U-rating for the equipment. The manufacturer of the equipment shall be responsible for maintaining the test results.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 6 of 30

1.2 Details of Client

Applicant:	Sonim Technologies, Inc.
Address:	4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA
Manufacturer:	Sonim Technologies, Inc.
Address:	4445 Eastgate Mall, Suite 200, San Diego, CA 92121, USA

1.3 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Alger Du

1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327

1.5 General Description of EUT

Device Type:	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Smartphone		
Model No.(EUT):	X800		
FCC ID:	WYPS6002		
Product Phase:	Identical Prototype		
IMEI:	351348280187947/351348280187954		
Hardware Version:	V1.0		
Software Version:	X80.0-06-14.0-19.50.00		
Antenna Type:	Inner Antenna		
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK;16QAM; LTE: QPSK,16QAM,64QAM,256QAM; NR: BPSK,QPSK,16QAM,64QAM,256QAM,CP-OFDM WIFI: DSSS, OFDM; BT: GFSK, π/4DQPSK,8DPSK		
	GPRS Multi-slots Class:	12	EGPRS Multi-slots Class: 33
	HSDPA UE Category:	10	HSUPA UE Category 6
	4, tested with power level 5(GSM850)		
	1, tested with power level 0(GSM1900)		
Power Class	3, tested with power control "all 1"(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
	Frequency Bands:	Band	Tx (MHz)
		GSM850	824 - 849 MHz
		GSM1900	1850 - 1910 MHz
		WCDMA Band II	1850 -1910 MHz
		WCDMA Band IV	1710 -1755MHz
		WCDMA Band V	824 - 849MHz
		LTE band 2	1850 - 1910 MHz
		LTE band 4	1710 - 1755 MHz
		LTE band 5	824 - 849 MHz
		LTE band 7	2500 - 2570 MHz
		LTE band 12	699 - 716 MHz
		LTE band 13	777 - 787 MHz
		LTE band 14	788 - 798 MHz
		LTE band 25	1850 - 1915 MHz
		LTE band 26	814 - 849 MHz
		LTE band 30	2305 - 2315 MHz
		LTE band 38	2570 - 2620 MHz
		LTE band 41	2496 - 2690 MHz
		LTE band 42	3400 - 3600 MHz
		LTE band 48	3550 - 3700 MHz


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 8 of 30

	LTE band 66	1710 - 1780 MHz	2110 - 2200 MHz
	LTE band 71	663 - 698 MHz	617 - 652 MHz
	FR1 n2	1850 - 1910 MHz	1930 - 1990 MHz
	FR1 n5	824 - 849 MHz	869 - 894 MHz
	FR1 n7	2500 - 2570 MHz	2620 - 2690 MHz
	FR1 n14	788 - 798 MHz	758- 768 MHz
	FR1 n25	1850 - 1915 MHz	1930 - 1995 MHz
	FR1 n26	814 - 849 MHz	859 - 894 MHz
	FR1 n38	2570 - 2620 MHz	2570 - 2620 MHz
	FR1 n41	2496 - 2690 MHz	2496 - 2690 MHz
	FR1 n48	3550 - 3700 MHz	3550 - 3700 MHz
	FR1 n66	1710 - 1780 MHz	2110 - 2200 MHz
	FR1 n70	1695 - 1710 MHz	1995 - 2020 MHz
	FR1 n71	663 - 698 MHz	617 - 652 MHz
	FR1 n77	3300 - 4200 MHz	3300 - 4200 MHz
	FR1 n78	3300 - 3800 MHz	3300 - 3800 MHz
	FR1 n77	3450 - 3550 MHz	3450 - 3550 MHz
		3700 - 3980 MHz	3700 - 3980 MHz
	WLAN2.4GHz	2412-2462 MHz	2412-2462 MHz
	WLAN5GHz	5180~5240MHz	5180~5240MHz
		5260~5320MHz	5260~5320MHz
		5500~5720MHz	5500~5720MHz
		5745~5825MHz	5745~5825MHz
	WLAN6GHz	5925-6425MHz	5925-6425MHz
	Bluetooth	2400~2483.5	2400~2483.5
Battery Information 1#:	Model:	BAT-05000-21S	
	Normal Voltage:	3.87V	
	Rated capacity:	5000 mAh	
	Manufacturer1:	Shenzhen Aerospace Electronic Co., Ltd.	
Battery Information 2#:	Model:	BAT-05000-21S	
	Normal Voltage:	3.87V	
	Rated capacity:	5000 mAh	
	Manufacturer1:	Tianjin Lishen Juyuan New Energy Technology Co., Ltd.	
Note:			
*Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.			
Remark:			
As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.			

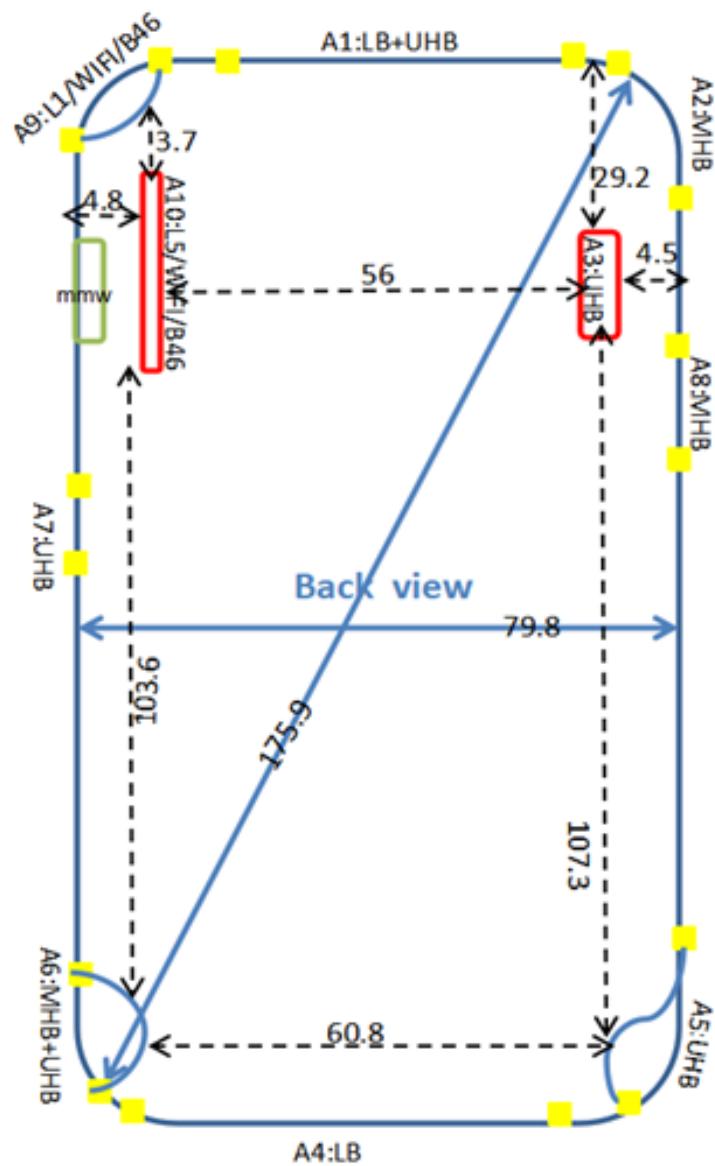1.5.1 DUT Antenna Locations

Note:

- 1) The diversity Antenna does not support transmitter function.

1.5.2 List of air interfaces/frequency bands

Air Interface	Band (MHz)	Type	ANSI C63.19	Simultaneous Transmitter	Name of Voice Service	Power Reduction
			Tested			
GSM	850	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	1900				Google Meet*	
	EDGE	VD	Yes			
WCDMA	Band II	VO	Yes	BT, Wi-Fi	CMRS Voice	NO
	Band IV				Google Meet*	
	Band V	VD	Yes			
	HSPA					
LTE FDD	LTE band 2	VD	Yes	BT, Wi-Fi	VoLTE Google Duo*	NO
	LTE band 4					
	LTE band 5					
	LTE band 7					
	LTE band 12					
	LTE band 13					
	LTE band 14					
	LTE band 25					
	LTE band 26					
	LTE band 30					
	LTE band 66					
	LTE band 71					
LTE TDD	LTE band 38	VD	Yes	BT, Wi-Fi	VoLTE Google Duo*	NO
	LTE band 41					
	LTE band 42					
	LTE band 48					
FR1 FDD	FR1 n2	DT	Yes	BT, Wi-Fi	VoNR Google Duo*	NO
	FR1 n5					
	FR1 n7					
	FR1 n14					
	FR1 n25					
	FR1 n26					
	FR1 n66					
	FR1 n70					
	FR1 n71					
FR1 TDD	FR1 n38	DT	Yes	BT, Wi-Fi	VoNR Google Duo*	NO
	FR1 n41					
	FR1 n48					
	FR1 n77					
	FR1 n78					
Wi-Fi	2450	VD	Yes	WWAN	Google Meet*	NO
	5200					
	5300					
	5500					
	5800					
	U-NII 5					
BT	2450	DT	No(1)	WWAN	NA	NO

VO: Legacy Cellular Voice Service

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 11 of 30

DT: Digital Transport (no voice)

VD: IP Voice Service over Digital Transport

*ANSI C63.19-2019 use table 6.1 to establish the Normal speech input level and NOTE 2 of table 6.1 identifies the group of VoIP voice services that use -16 dBm0 as the normal speech input level.

Remark:

1. The WLAN6GHz U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations.
2. The WLAN6GHz UNI-5 was evaluated for operations which are entirely below 6GHz, above 6 GHz were not evaluated due outside of the current scope of ANSI C63.19 and FCC HAC regulations.
3. Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
4. The Google Meet and google Fi the audio path, parameter and audio codec are all the same, therefore, the Google Meet is evaluation for this device to show compliance.

1.6 Test Specification

Identity	Document Title
CFR 47 FCC Part 20	§20.19 Hearing aid-compatible mobile handsets.
ANSI C63.19-2019	American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices
KDB 285076 D01	HAC Guidance v06r04

1.7 ANSI C63.19-2019 limits

Emission Categories	E-field emissions dB(V/m)		
	< 960 MHz	960MHz-2000MHz	>2000 MHz
E field level	<= 39dB (V/m)	<= 36dB (V/m)	<= 35dB (V/m)

Table 1: Telephone near-field categories in linear units

2 Calibration certificate

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%

Table 2: The Ambient Conditions

3 HAC (T Coil) Measurement System

3.1 Measurement System Diagram for SPEAG Robotic

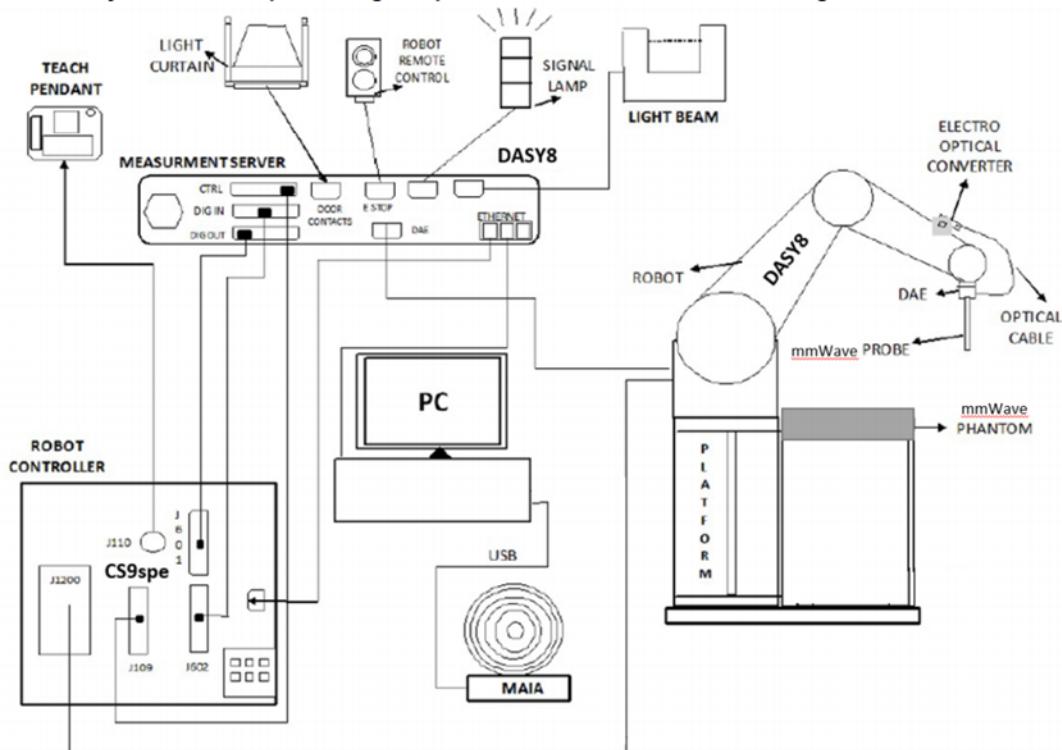


Fig. 1. The SPEAG Robotic Diagram

The DASY8 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stable RX family) with controller, teach pendant and software. An arm extension is for accommodating the data acquisition electronics (DAE).
- An Audio Magnetic probe.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows system.
- DASY8 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The Test Arch SAM phantom
- The device holder for handheld mobile phones.
- Validation dipole kits allowing to validate the proper functioning of the system.

3.2 E-Field Probe

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material	
Calibration	In air from 100 MHz to 6.0 GHz (absolute accuracy $\pm 6.0\%$, k=2)	
Frequency	(extended to 20 MHz for MRI), Linearity: ± 0.2 dB (100 MHz to 6 GHz)	
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)	
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB	
Dimensions	Tip diameter: 8 mm Distance from probe tip to dipole centers: 2.5 mm	EF3DV3 E-Field Probe

3.3 Test Arch

Description	Enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot.	
Dimensions	length: 370 mm width: 370 mm height: 370 mm	

3.4 Phone Holder

Description	Supports accurate and reliable positioning of any phone Effect on near field <+/- 0.5 dB	
-------------	---	---

4 Measurement uncertainty evaluation

Uncertainty Component	Uncertainty Value (%)	Probability Distribution	Divisor	ci €	Standard Uncertainty € (%)
Measurement system					
Probe calibration	±5.1	N	1	1	±5.1
Axial isotropy	±4.7	R	$\sqrt{3}$	1	±2.7
Sensor position	±16.5	R	$\sqrt{3}$	1	±9.5
Boundary effect	±2.4	R	$\sqrt{3}$	1	±1.4
Phantom Boundary Effect	±7.2	R	$\sqrt{3}$	1	±4.1
Linearity	±4.7	R	$\sqrt{3}$	1	±2.7
Scaling with PMR calibration	±10.0	R	$\sqrt{3}$	1	±5.8
System Detection limit	±1.0	R	$\sqrt{3}$	1	±0.6
Readout Electronics	±0.3	N	$\sqrt{3}$	1	±0.3
Response time	±0.8	R	$\sqrt{3}$	1	±0.5
Integration time	±2.6	R	$\sqrt{3}$	1	±1.5
RF ambient conditions	±3.0	R	$\sqrt{3}$	1	±1.7
RF reflection	±12.0	R	$\sqrt{3}$	1	±6.9
Probe positioner	±1.2	R	$\sqrt{3}$	1	±0.7
Probe positioning	±4.7	R	$\sqrt{3}$	1	±2.7
Extrapolation and interpolation	±1.0	R	$\sqrt{3}$	1	±0.6
Related to test samples					
Device Positioning Vertical	±4.7	R	$\sqrt{3}$	1	±2.7
Device Positioning Lateral	±1.0	R	$\sqrt{3}$	1	±0.6
Device Holder and Phantom	±2.4	R	$\sqrt{3}$	1	±1.4
Power drift	±5.0	R	$\sqrt{3}$	1	±2.9
Phantom and Setup Related					
Phantom Thickness	±2.4	R	$\sqrt{3}$	1	±1.4
Combined Std. Uncertainty	$u_c = \sqrt{\sum_{i=1}^{21} c_i^2 u_i^2}$				±16.3
Expanded Std. Uncertainty on Power (K=2)					±32.6
Expanded Std. Uncertainty on Field (K=2)					±16.3

Table 3: Measurement uncertainties for RF

5 RF Emission Measurements Reference and Plane

Fig.3 illustrate the references and reference plane that shall be used in a typical EUT emissions measurement. The principle of this section is applied to EUT with similar geometry. Please refer to Appendix C for the setup photographs.

- ◆ The area is 5 cm by 5 cm.
- ◆ The area is centered on the audio frequency output transducer of the EUT.
- ◆ The area is in a reference plane, which is defined as the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- ◆ The measurement plane is parallel to, and 10 mm in front of, the reference plane.



Fig.3 WD reference and plane for RF emission measurements

6 System Verification Procedure

6.1 System Check

Place a dipole antenna meeting the requirements given in ANSI C63.19-2019 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field probe so that the following occurs:

- The probes and their cables are parallel to the coaxial feed of the dipole antenna
- The probe cables and the coaxial feed of the dipole antenna approach the measurement area from opposite directions
- The center point of the probe element(s) are 15 mm from the closest surface of the dipole elements.

Scan the length of the dipole with the E-field probe and record the two maximum values found near the dipole ends. Average the two readings and compare the reading to the expected value in the calibration certificate or the expected value in this standard.

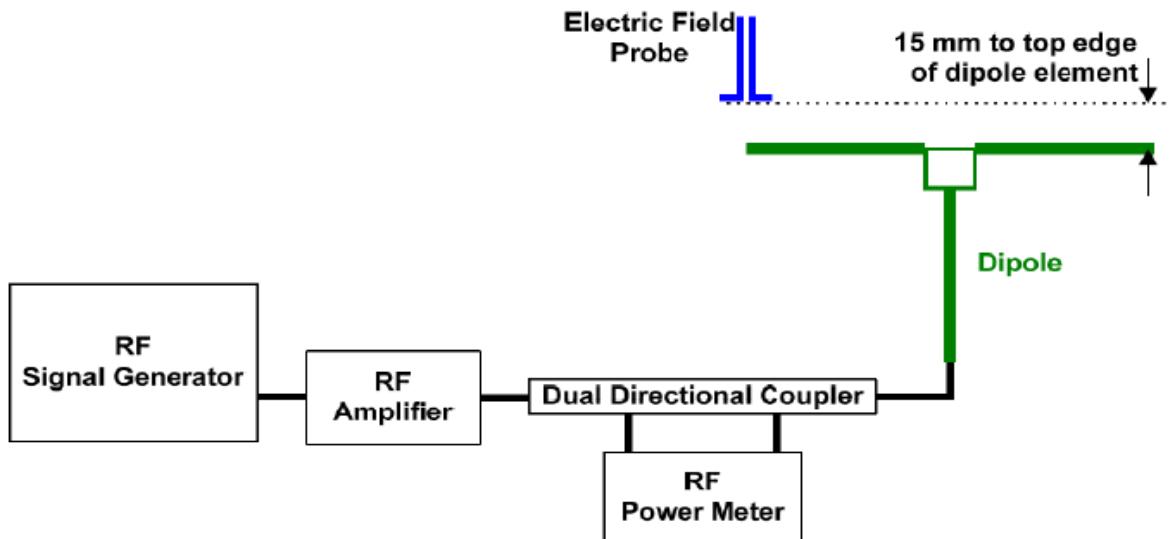


Fig.4 System verification

6.2 System Check Result

Mode	Frequency (MHz)	Input Power (mW)	E-Field (V/m)	Target Value (V/m)	Deviation (%)	Limit (%)	Test Date
CW	835	100	105.3	110.3	-4.53	±12.8	2025/6/9
CW	1880	100	89.5	86.9	2.99	±12.8	2025/6/9

Note:

* Please refer to the appendix A for detailed measurement data and plot.

** Target value is provided by SPEAD in the calibration certificate of specific dipoles.

*** Deviation (%) = 100 * (Measured value minus Target value) divided by Target value.

**** ANSI C63.19 requires values within ± 18% are acceptable.

7 Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a modulation interference factor (MIF, expressed in dB)

may be developed that relates its interference potential to its steady state rms signal level or average power level.

This factor is a function only of the audio-frequency amplitude modulation characteristics of the signal and is the

same for field-strength and conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio-frequency amplitude modulation characteristic. Any change in modulation

characteristic requires determination and application of a new MIF

The Modulation Interference factor (MIF, in dB) is added to the measured average E-field (in dBV/m) and converts it to the RF Audio Interference level (in dBV/m). This level considers the audible amplitude modulation components in the RF E-field. CW fields without amplitude modulation are assumed to not interfere with the hearing aid electronics.

Modulations without time slots and low fluctuations at low frequencies have low MIF values, TDMA modulations

with narrow transmission and repetition rates of few 100 Hz have high MIF values and give similar classifications as ANSI C63.19-2019.

DASY8 is therefore using the indirect measurement method according to ANSI C63.19-2019 which is the primary method. These near field probes read the averaged E-field measurement. Especially for the new high peak-to-average (PAR) signal types, the probes shall be linearized by PMR calibration in order to not overestimate the field reading. Probe Modulation Response (PMR) calibration linearizes the probe response over its dynamic range for specific modulations which are characterized by their UID and result in an uncertainty specified in the probe calibration certificate. The MIF is characteristic for a given waveform envelope and can be used as a constant conversion factor if the probe has been PMR calibrated.

The evaluation method for the MIF is defined in ANSI C63.19-2019 section D.7. An RMS demodulated RF signal is fed to a spectral filter (similar to an A weighting filter) and forwarded to a temporal filter acting as a quasi-peak

detector. The averaged output of these filtering is scaled to a 1 kHz 80% AM signal as reference. MIF measurement requires additional instrumentation and is not well suited for evaluation by the end user with reasonable uncertainty.

It may alliteratively be determined through analysis and simulation, because it is constant and characteristic for a

communication signal. DASY8 uses well-defined signals for PMR calibration. The MIF of these signals has been determined by simulation and it is automatically applied.

The MIF measurement uncertainty is estimated as follows, declared by HAC equipment provider SPEAG, for modulation frequencies from slotted waveforms with fundamental frequency and at least 2 harmonics within 10 kHz:

1. 0.2 dB for MIF: -7 to +5 dB
2. 0.5 dB for MIF: -13 to +11 dB
3. 1 dB for MIF: > -20 dB

MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst

values for all air interfaces are listed below to be determine the Low-power Exemption.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 21 of 30

SPEAG UID	UID version	Communication system	MIF (dB)
10021	DAC	GSM-FDD (TDMA, GMSK)	3.63
10025	DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	3.75
10460	AAA	UMTS-FDD (WCDMA, AMR)	-25.43
10225	AAA	UMTS-FDD (HSPA+)	-20.39
10169	CAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-15.63
10170	CAE	LTE-FDD (SC-FDMA, 1RB, 20 MHz, 16-QAM)	-9.76
10172	CAG	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	-1.62
10173	CAG	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08
10973	CAG	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	-1.64
10173	CAG	LTE-TDD (SC-FDMA, 1RB, 20 MHz, 16-QAM)	-1.44
10061	CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps)	0.12
10427	AAB	IEEE 802.11n (HT Green eld, 150 Mbps, 64-QAM)	-13.44
10069	CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	AAB	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57
10671	AAB	IEEE 802.11ax WiFi (20MHz, MCS0, 90pc duty cycle)	-5.58

8 HAC Measurement Procedure

The evaluation was performed with the following procedure:

- a) Confirm the proper operation of the field probe, probe measurement system, and other instrumentation and the positioning system.
- b) Position the WD in its intended test position.
- c) Set the WD to transmit a fixed and repeatable combination of signal power and modulation characteristic that is representative of the worst case (highest interference potential) encountered in normal use. Transiently occurring start-up, changeover, or termination conditions, or other operations likely to occur less than 1% of the time during normal operation, may be excluded from consideration.
- d) The center subgrid shall be centered on the T-Coil mode perpendicular measurement point or the acoustic output, as appropriate. Locate the field probe at the initial test position in the 50 mm by 50 mm grid, which is contained in the measurement plane, refer to illustrated in Figure 3. If the field alignment method is used, align the probe for maximum field reception.
- e) Record the reading at the output of the measurement system.
- f) Scan the entire 50 mm by 50 mm region in equally spaced increments and record the reading at each measurement point. The distance between measurement points shall be sufficient to assure the identification of the maximum reading.
- g) Identify the five contiguous subgrids around the center subgrid whose maximum reading is the lowest of all available choices. This eliminates the three subgrids with the maximum readings. Thus, the six areas to be used to determine the WD's highest emissions are identified.
- h) Identify the maximum reading within the no excluded subgrids identified in step g).
- i) Convert the maximum reading identified in step h) to RF audio interference level, in, V/m, by taking the square root of the reading and then dividing it by the measurement system transfer function, established in 5.5.1.1. Convert the result to dB(V/m) by taking the base-10 logarithm and multiplying it by 20.

Indirect measurement method

Replacing step i) of 5.5.1.2, the RF audio interference level in dB(V/m) is obtained by adding the MIF (in dB) to the maximum steady-state rms field-strength reading, in dB(V/m), from step h). Use this result to determine the category rating.

- j) Compare this RF audio interference level with the categories in Clause 8 and record the resulting WD category rating.
- k) For the T-Coil mode M-rating assessment, determine whether the chosen perpendicular measurement point is contained in an included subgrid of the first scan. If so, then a second scan is not necessary. The first scan and resultant category rating may be used for the T-Coil mode M rating.

Otherwise, repeat step a) through step i), with the grid shifted so that it is centered on the perpendicular measurement point. Record the WD category rating.

9 HAC RF Measurement Results

9.1 Max Tune-up

Ant 1				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
GSM	GSM850	190	836.6	31.00
	EDGE850	190	836.6	25.00
WCDMA	Band V	4183	836.6	21.00
	HSPA	4183	836.6	18.00
LTE FDD	Band 5	20525	836.5	21.00
	Band 12	23095	707.5	24.00
	Band 13	23230	782	22.50
	Band 14	23790	710	22.50
	Band 26	26865	831.5	21.00
	Band 71	133297	680.5	23.50
5G NR FDD	n5	167300	836.5	21.00
	n14	158600	793	22.50
	n26	166300	836.5	21.00
	n71	136100	680.5	23.50

Ant 2				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
GSM	GSM1900	661	1880	26.50
	EDGE1900	661	1880	22.50
WCDMA	Band II	9400	1880	18.50
	HSPA	9400	1880	15.50
	Band IV	1412	1732.4	18.50
	HSPA	1412	1732.4	16.00
LTE FDD	Band 2	18900	1880	18.50
	Band 4	20175	1732.5	18.50
	Band 7	21100	2535	19.00
	Band 25	26365	1882.5	18.50
	Band 30	27710	2310	21.00
	Band 66	132322	1745	21.00
LTE TDD	Band 38	38000	2595	19.50
	Band 41	40620	2593	21.50
FR1 FDD	N2	375960	1879.8	17.50
	N7	507000	2535	17.50
	N25	376520	1882.6	17.50
	N30	462000	2310	22.00
	N66	349000	1745	18.50
	N70	340500	1702.5	24.00
FR1 TDD	N38	519000	2595	16.00
	N41	518598	2592.99	17.50

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 24 of 30

Ant 3				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
LTE TDD	Band 42	42590	3500	21.00
	Band 48	55990	3625	20.50
5G NR TDD	n48	641666	3624.99	20.50
	n77	656000	3840	21.00
	n78	636666	3549.99	22.00

Ant 5				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
LTE FDD	Band 2	18900	1880	25.00
	Band 4	20175	1732.5	25.00
	Band 7	21100	2535	25.00
	Band 25	26365	1882.5	25.00
	Band 66	132322	1745	25.00
5G NR FDD	n7	507000	2535	25.00

Ant 7				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
5G NR TDD	n77	656000	3840	24.00
	n78	636666	3549.99	23.00

Ant 9+10				
Frequency Band		Channel	Frequency(MHz)	Tune up Power (dBm)
2.4GHz WLAN	802.11b	6	2437	17.50
	802.11g	6	2437	17.50
	802.11n-HT20	6	2437	17.50
	802.11n-HT40	6	2437	17.50
	802.11ac-VHT20	6	2437	17.50
	802.11ac-VHT40	6	2437	17.50
	802.11ax-HE20	6	2437	17.50
	802.11ax-HE40	6	2437	17.50
5GHz WLAN	802.11a	40	5200	22.00
	802.11n-HT20	40	5200	22.00
	802.11n-HT40	40	5200	22.00
	802.11ac-VHT20	40	5200	22.00
	802.11ac-VHT40	40	5200	22.00
	802.11ac-VHT80	40	5200	22.00
	802.11ac-VHT160	40	5200	22.00
	802.11ax-HE20	40	5200	22.00
	802.11ax-HE40	40	5200	22.00
	802.11ax-HE80	40	5200	22.00
6GHz WLAN	802.11ax-HE160	40	5200	22.00
	802.11ax-HE20	5	5975	19.00
	802.11ax-HE40	5	5975	19.00
	802.11ax-HE80	5	5975	19.00
	802.11ax-HE160	5	5975	19.00

9.2 Conducted RF Output Power

GSM 850 Ant 1					
Burst Output Power(dBm)					
Channel		128	190	251	Tune up
GSM(GMSK)	GSM	31.82	31.79	31.80	33.00

GSM 1900 Ant 2					
Burst Output Power(dBm)					
Channel		512	661	810	Tune up
GSM(GMSK)	GSM	24.76	24.79	24.75	26.00

9.3 Low-power Exemption

The primary method for establishing the RF interference potential of a WD is based on conducted power to the antenna. The waveform-specific modulation interference factor (MIF) is measured separately and added to the measured average conducted power, in dBm.

The WD's conducted power must be at or below either the stated RFAIPL (Table 4.1) or the stated peak power level (Table 4.2), or the average near-field emissions over the measurement area must be at or below the stated RFAIL (Table 4.3), or the stated peak field strength (Table 4.4).

The WD may demonstrate compliance by meeting any of these four requirements, but it must do so in each of its operating bands at its established worst-case normal speech-mode operating condition.

Table 4.1—Wireless device RF audio interference power level

Frequency range (MHz)	RFAIPL (dBm)
<960	29
960–2000	26
>2000	25

Table 4.2—Wireless device RF peak power level

Frequency range (MHz)	RF _{Peak} Power (dBm)
< 960	35
960–2000	32
>2000	31

Table 4.3—Wireless device RF audio interference level

Frequency range (MHz)	RF _{AIL} [dB(V/m)]
≤960	39
960–2000	36
>2000	35

Table 4.4—Wireless device RF peak near-field level

Frequency range (MHz)	RF _{peak} [dB(V/m)]
≤960	45
960–2000	42
>2000	41

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 27 of 30

An analysis shall be performed following the guidance of the RF air interface technology being evaluated. Factors that will affect the RF interference potential shall be evaluated, and the worst-case operating mode shall be identified and used in the evaluation. Any factor that can affect the RF interference potential shall be evaluated.

Examples of such factors are those that will change the RF signal envelope, such as discontinuous transmission due to data load, power management, or configuration options of the RF air interface technology.

RF audio interference power level is compared to the limits in Sec.5 Table 4.1.

Ant 1				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM850	31.00	3.63	34.63	YES
EDGE850	25.00	3.75	28.75	NO
WCDMA	21.00	-25.43	-4.43	NO
WCDMA - HSPA	18.00	-20.39	-2.39	NO
LTE - FDD	24.00	-9.76	14.24	NO
5G FR1 - FDD	23.50	-12.08	11.42	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

Ant 2				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
GSM1900	26.50	3.63	30.13	YES
EDGE1900	22.50	3.75	26.25	NO
WCDMA	18.50	-25.43	-6.93	NO
WCDMA - HSPA	16.00	-20.39	-4.39	NO
LTE - FDD	20.00	-9.76	10.24	NO
LTE - TDD	21.50	-1.44	20.06	NO
FR1 - FDD	24.00	-12.08	11.92	NO
FR1 - TDD	17.50	-1.64	15.86	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

Ant 3				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
LTE - TDD	21.00	-1.44	19.56	NO
5G FR1 - TDD	22.00	-1.64	20.36	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500049402

Rev.: 01

Page: 28 of 30

Ant 5				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
LTE - FDD	25.00	-9.76	15.24	NO
5G FR1 - FDD	25.00	-12.08	12.92	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

Ant 7				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
5G FR1 - TDD	24.00	-1.64	22.36	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

Ant 9+10				
Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dB)	C63.19 test required
802.11b	17.50	-2.02	15.48	NO
802.11g	17.50	0.12	17.62	NO
802.11n	22.00	-13.44	8.56	NO
802.11a	22.00	-3.15	18.85	NO
802.11ac	22.00	-5.57	16.43	NO
802.11ax	22.00	-5.58	16.42	NO

Note: Select tests with highest Power+MIF values for the same frequency band.

9.4 HAC RF Emission Test Results

Air Interface	Modulation / Mode	Channel	Frequency(MHz)	Ant	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)	RF Limit (dB V/m)	RF Pass/Fail	Date
GSM850	GSM Voice	251	848.8	Ant 1	31.80	3.63	37.86	39	PASS	2025/6/10
GSM1900	GSM Voice	810	1909.8	Ant 2	24.75	3.63	33.7	36	PASS	2025/6/9

Remark:

1. The detail RF Emission results please refer to appendix B.

10 Equipment list

Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
<input checked="" type="checkbox"/> Software	SPEAG	D8 HAC V1.2	NA	NCR	NCR
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	1374	2024-10-30	2025-10-29
<input checked="" type="checkbox"/> E-Field Probe	SPEAG	EF3DV3	4051	2024-08-14	2025-08-13
<input checked="" type="checkbox"/> Validation Kits	SPEAG	CD835V3	1030	2024-06-14	2027-06-13
<input checked="" type="checkbox"/> Validation Kits	SPEAG	CD1880V3	1023	2024-06-14	2027-06-13
<input checked="" type="checkbox"/> Test Arch SD HAC	SPEAG	NA	NA	NCR	NCR
<input checked="" type="checkbox"/> Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-10	2025-09-09
<input checked="" type="checkbox"/> RADIO COMMUNICATION TESTR	R&S	CMX500	101930	2025-01-16	2026-01-15
<input checked="" type="checkbox"/> Signal Generator	R&S	SMB100A	182393	2025-01-16	2026-01-15
<input checked="" type="checkbox"/> Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
<input checked="" type="checkbox"/> Power Sensor	Keysight	U2002H	MY5639004	2024-09-10	2025-09-09
<input checked="" type="checkbox"/> Power Sensor	Agilent	U2002H	MY48200110	2024-11-21	2025-11-20
<input checked="" type="checkbox"/> Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
<input checked="" type="checkbox"/> Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
<input checked="" type="checkbox"/> DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
<input checked="" type="checkbox"/> Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-06-14	2025-06-13

Note:

1. All the equipments are within the valid period when the tests are performed.

---End of Report---