


### Impedance Measurement Plot

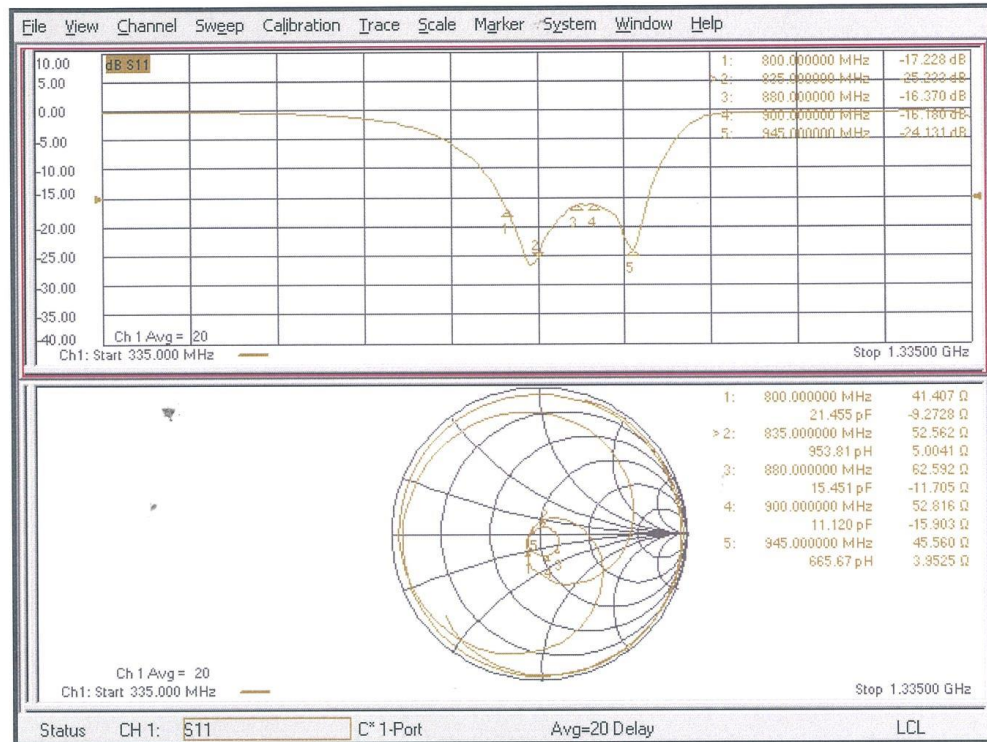

## DASY5 E-field Result

Date: 26.08.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: CD835V3 - SN: 1023**

Communication System: UID 0 - CW ; Frequency: 835 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF{1, 1, 1} @ 835 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

**Dipole E-Field measurement @ 835MHz/E-Scan - 835MHz d=15mm/Hearing Aid Compatibility Test (41x361x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 127.9 V/m; Power Drift = -0.01 dB


Applied MIF = 0.00 dB

RF audio interference level = 40.56 dBV/m

**Emission category: M3**

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M3<br>40.08 dBV/m | Grid 2 M3<br>40.56 dBV/m | Grid 3 M3<br>40.51 dBV/m |
| Grid 4 M4<br>35.34 dBV/m | Grid 5 M4<br>35.68 dBV/m | Grid 6 M4<br>35.67 dBV/m |
| Grid 7 M3<br>40.23 dBV/m | Grid 8 M3<br>40.56 dBV/m | Grid 9 M3<br>40.49 dBV/m |

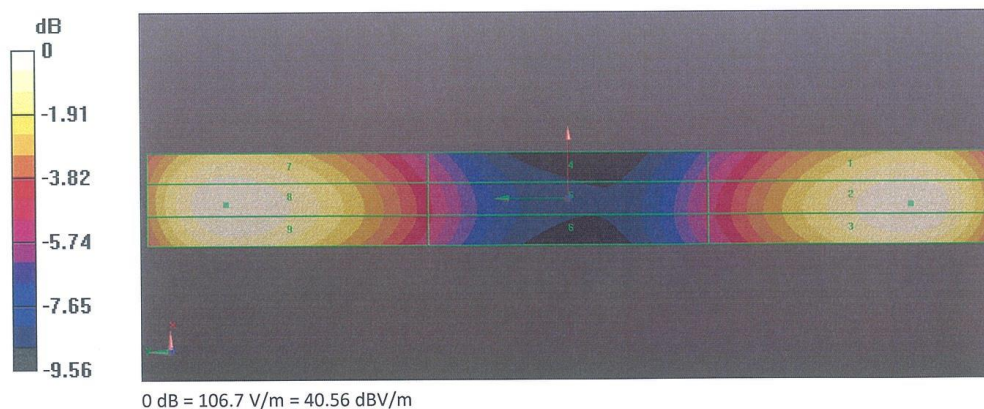

## Dipole 1880 MHz

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL (Auden)**

Certificate No: **CD1880V3-1018\_Aug19**

### CALIBRATION CERTIFICATE

Object **CD1880V3 - SN: 1018**

Calibration procedure(s) **QA CAL-20.v7  
Calibration Procedure for Validation Sources in air**

Calibration date: **August 26, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards               | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP                 | SN: 104778         | 03-Apr-19 (No. 217-02892/02893)   | Apr-20                 |
| Power sensor NRP-Z91            | SN: 103244         | 03-Apr-19 (No. 217-02892)         | Apr-20                 |
| Power sensor NRP-Z91            | SN: 103245         | 03-Apr-19 (No. 217-02893)         | Apr-20                 |
| Reference 20 dB Attenuator      | SN: 5058 (20k)     | 04-Apr-19 (No. 217-02894)         | Apr-20                 |
| Type-N mismatch combination     | SN: 5047.2 / 06327 | 04-Apr-19 (No. 217-02895)         | Apr-20                 |
| Probe EF3DV3                    | SN: 4013           | 03-Jan-19 (No. EF3-4013_Jan19)    | Jan-20                 |
| DAE4                            | SN: 781            | 09-Jan-19 (No. DAE4-781_Jan19)    | Jan-20                 |
| Secondary Standards             | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4419B       | SN: GB42420191     | 09-Oct-09 (in house check Oct-17) | In house check: Oct-20 |
| Power sensor HP E4412A          | SN: US38485102     | 05-Jan-10 (in house check Oct-17) | In house check: Oct-20 |
| Power sensor HP 8482A           | SN: US37295597     | 09-Oct-09 (in house check Oct-17) | In house check: Oct-20 |
| RF generator R&S SMT-06         | SN: 837633/005     | 10-Jan-19 (in house check Jan-19) | In house check: Oct-22 |
| Network Analyzer Agilent E8358A | SN: US41080477     | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

|                |               |                       |                                                                                       |
|----------------|---------------|-----------------------|---------------------------------------------------------------------------------------|
|                | Name          | Function              | Signature                                                                             |
| Calibrated by: | Leif Klysner  | Laboratory Technician |  |
| Approved by:   | Katja Pokovic | Technical Manager     |  |

Issued: August 27, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### References

- [1] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                      |          |
|------------------------------------|----------------------|----------|
| DASY Version                       | DASY5                | V52.10.2 |
| Phantom                            | HAC Test Arch        |          |
| Distance Dipole Top - Probe Center | 15 mm                |          |
| Scan resolution                    | dx, dy = 5 mm        |          |
| Frequency                          | 1880 MHz $\pm$ 1 MHz |          |
| Input power drift                  | < 0.05 dB            |          |

### Maximum Field values at 1880 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum                          |
|------------------------------------|--------------------|-----------------------------------------------|
| Maximum measured above high end    | 100 mW input power | 88.0 V/m = 38.89 dBV/m                        |
| Maximum measured above low end     | 100 mW input power | 86.5 V/m = 38.74 dBV/m                        |
| Averaged maximum above arm         | 100 mW input power | <b>87.3 V/m <math>\pm</math> 12.8 % (k=2)</b> |

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 1730 MHz  | 27.8 dB     | 54.3 $\Omega$ + 0.3 j $\Omega$  |
| 1880 MHz  | 21.6 dB     | 55.4 $\Omega$ + 7.0 j $\Omega$  |
| 1900 MHz  | 22.8 dB     | 56.3 $\Omega$ + 4.5 j $\Omega$  |
| 1950 MHz  | 33.3 dB     | 52.2 $\Omega$ - 0.1 j $\Omega$  |
| 2000 MHz  | 19.4 dB     | 47.6 $\Omega$ + 10.2 j $\Omega$ |

#### 3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

### Impedance Measurement Plot

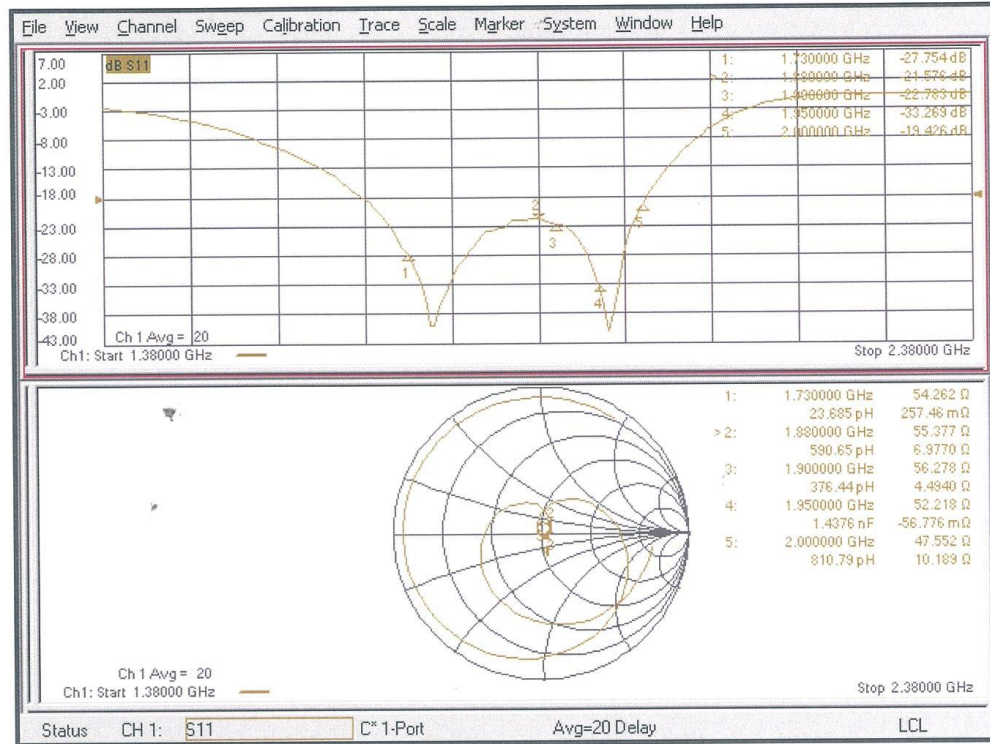



## DASY5 E-field Result

Date: 26.08.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: CD1880V3 - SN: 1018**

Communication System: UID 0 - CW ; Frequency: 1880 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 1880 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

**Dipole E-Field measurement @ 1880MHz/E-Scan - 1880MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 151.1 V/m; Power Drift = -0.01 dB


Applied MIF = 0.00 dB

RF audio interference level = 38.89 dBV/m

**Emission category: M2**

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.47 dBV/m | 38.89 dBV/m | 38.86 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 35.88 dBV/m | 36.02 dBV/m | 35.97 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.51 dBV/m | 38.74 dBV/m | 38.6 dBV/m  |

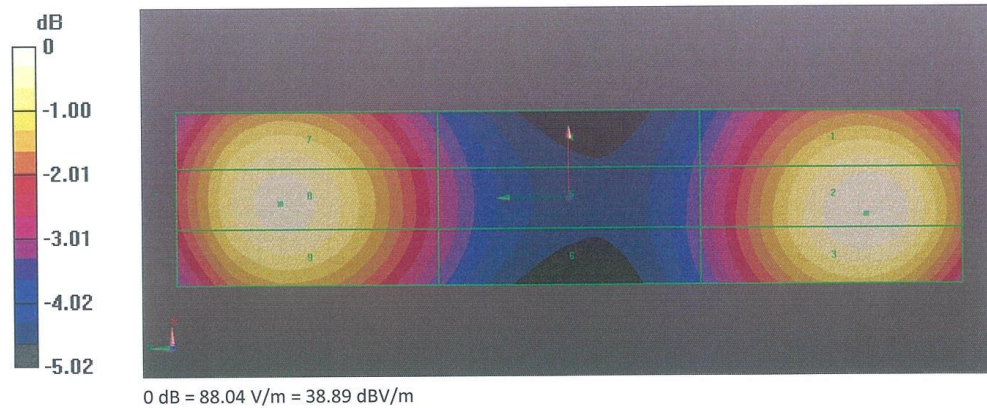

## Dipole 2600 MHz

**Calibration Laboratory of**  
**Schmid & Partner**  
**Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **CTTL (Auden)**

Certificate No: **CD2600V3-1017\_Aug19**

### CALIBRATION CERTIFICATE

Object **CD2600V3 - SN: 1017**

Calibration procedure(s) **QA CAL-20.v7  
Calibration Procedure for Validation Sources in air**

Calibration date: **August 23, 2019**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards               | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|---------------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP                 | SN: 104778         | 03-Apr-19 (No. 217-02892/02893)   | Apr-20                 |
| Power sensor NRP-Z91            | SN: 103244         | 03-Apr-19 (No. 217-02892)         | Apr-20                 |
| Power sensor NRP-Z91            | SN: 103245         | 03-Apr-19 (No. 217-02893)         | Apr-20                 |
| Reference 20 dB Attenuator      | SN: 5058 (20k)     | 04-Apr-19 (No. 217-02894)         | Apr-20                 |
| Type-N mismatch combination     | SN: 5047.2 / 06327 | 04-Apr-19 (No. 217-02895)         | Apr-20                 |
| Probe EF3DV3                    | SN: 4013           | 03-Jan-19 (No. EF3-4013_Jan19)    | Jan-20                 |
| DAE4                            | SN: 781            | 09-Jan-19 (No. DAE4-781_Jan19)    | Jan-20                 |
| Secondary Standards             | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter Agilent 4419B       | SN: GB42420191     | 09-Oct-09 (in house check Oct-17) | In house check: Oct-20 |
| Power sensor HP E4412A          | SN: US38485102     | 05-Jan-10 (in house check Oct-17) | In house check: Oct-20 |
| Power sensor HP 8482A           | SN: US37295597     | 09-Oct-09 (in house check Oct-17) | In house check: Oct-20 |
| RF generator R&S SMT-06         | SN: 837633/005     | 10-Jan-19 (in house check Jan-19) | In house check: Oct-22 |
| Network Analyzer Agilent E8358A | SN: US41080477     | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

|                |               |                       |                                                                                       |
|----------------|---------------|-----------------------|---------------------------------------------------------------------------------------|
|                | Name          | Function              | Signature                                                                             |
| Calibrated by: | Leif Klysner  | Laboratory Technician |  |
| Approved by:   | Katja Pokovic | Technical Manager     |  |

Issued: August 27, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

#### References

- [1] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications  
Devices and Hearing Aids.

#### Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with the standards [1], the measurement planes (probe sensor center) are selected to be at a distance of 15 mm above the top metal edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY5 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic E-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 15 mm (in z) above the metal top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, in the plane above the dipole surface.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

### Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                    |                      |          |
|------------------------------------|----------------------|----------|
| DASY Version                       | DASY5                | V52.10.2 |
| Phantom                            | HAC Test Arch        |          |
| Distance Dipole Top - Probe Center | 15 mm                |          |
| Scan resolution                    | dx, dy = 5 mm        |          |
| Frequency                          | 2600 MHz $\pm$ 1 MHz |          |
| Input power drift                  | < 0.05 dB            |          |

### Maximum Field values at 2600 MHz

| E-field 15 mm above dipole surface | condition          | Interpolated maximum                          |
|------------------------------------|--------------------|-----------------------------------------------|
| Maximum measured above high end    | 100 mW input power | 84.8 V/m = 38.57 dBV/m                        |
| Maximum measured above low end     | 100 mW input power | 83.4 V/m = 38.42 dBV/m                        |
| Averaged maximum above arm         | 100 mW input power | <b>84.1 V/m <math>\pm</math> 12.8 % (k=2)</b> |

### Appendix (Additional assessments outside the scope of SCS 0108)

#### Antenna Parameters

| Frequency | Return Loss | Impedance                       |
|-----------|-------------|---------------------------------|
| 2450 MHz  | 24.2 dB     | 44.3 $\Omega$ + 1.0 j $\Omega$  |
| 2550 MHz  | 22.2 dB     | 57.1 $\Omega$ + 4.4 j $\Omega$  |
| 2600 MHz  | 20.7 dB     | 59.5 $\Omega$ - 3.5 j $\Omega$  |
| 2650 MHz  | 19.3 dB     | 55.4 $\Omega$ - 10.1 j $\Omega$ |
| 2750 MHz  | 15.6 dB     | 40.8 $\Omega$ - 12.1 j $\Omega$ |

#### 3.2 Antenna Design and Handling


The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.

Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

### Impedance Measurement Plot

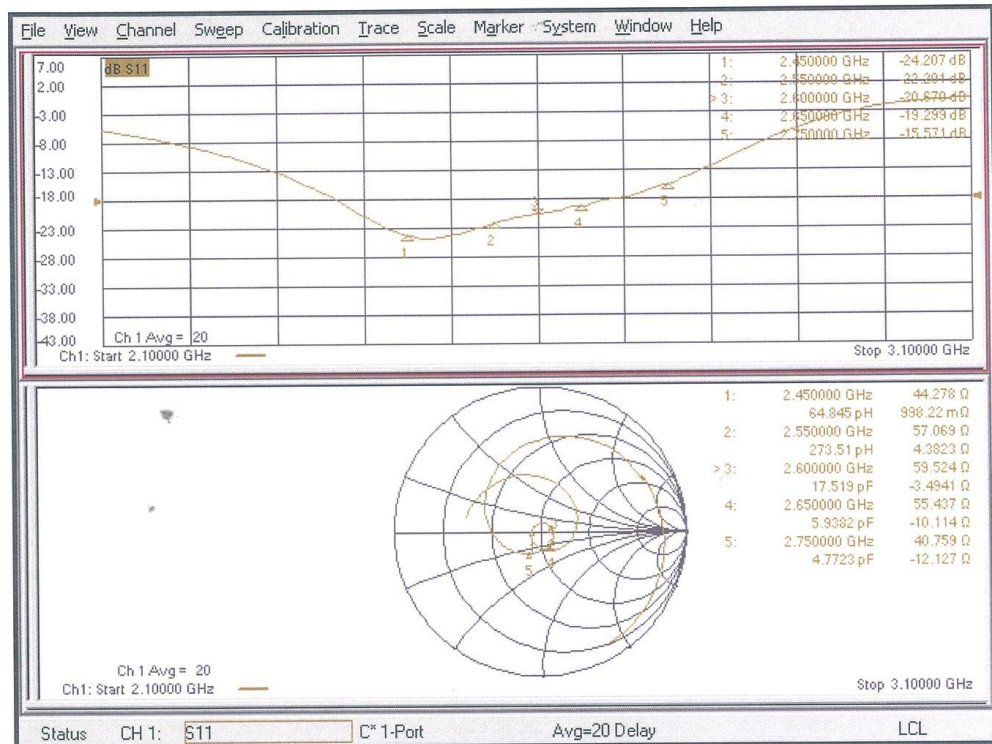



## DASY5 E-field Result

Date: 23.08.2019

Test Laboratory: SPEAG Lab2

**DUT: HAC Dipole 2600 MHz; Type: CD2600V3; Serial: CD2600V3 - SN: 1017**

Communication System: UID 0 - CW ; Frequency: 2600 MHz  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: RF Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EF3DV3 - SN4013; ConvF(1, 1, 1) @ 2600 MHz; Calibrated: 03.01.2019
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn781; Calibrated: 09.01.2019
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA; Serial: 1070
- DASY52 52.10.2(1504); SEMCAD X 14.6.12(7470)

**Dipole E-Field measurement @ 2600MHz/E-Scan - 2600MHz d=15mm/Hearing Aid Compatibility Test (41x181x1):**

Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 61.02 V/m; Power Drift = 0.01 dB


Applied MIF = 0.00 dB

RF audio interference level = 38.57 dBV/m

**Emission category: M2**

MIF scaled E-field

|             |             |             |
|-------------|-------------|-------------|
| Grid 1 M2   | Grid 2 M2   | Grid 3 M2   |
| 38.19 dBV/m | 38.42 dBV/m | 38.34 dBV/m |
| Grid 4 M2   | Grid 5 M2   | Grid 6 M2   |
| 37.8 dBV/m  | 38.05 dBV/m | 38.02 dBV/m |
| Grid 7 M2   | Grid 8 M2   | Grid 9 M2   |
| 38.31 dBV/m | 38.57 dBV/m | 38.51 dBV/m |

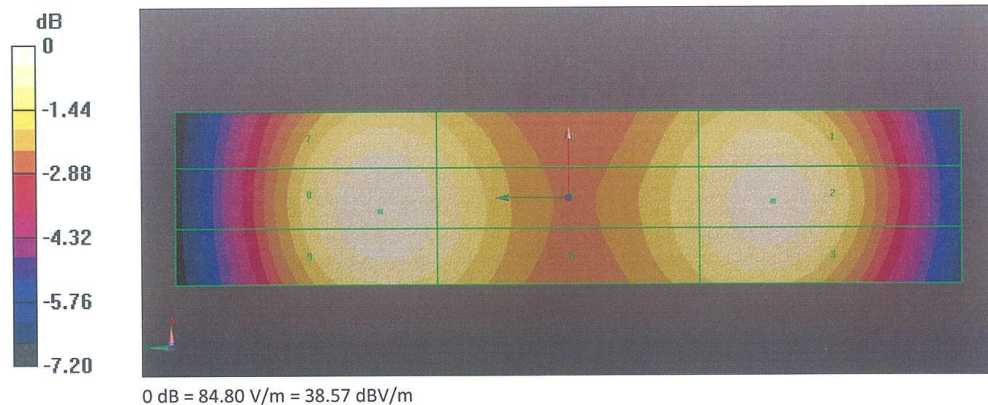

## ANNEX F THE EVALUATION OF SPOTCHECK AND GOOGLE DUO

### F.1 Validation Result

| E-Field Scan |                 |                  |                                    |                                  |                            |                        |
|--------------|-----------------|------------------|------------------------------------|----------------------------------|----------------------------|------------------------|
| Mode         | Frequency (MHz) | Input Power (mW) | Measured <sup>1</sup> Value(dBV/m) | Target <sup>2</sup> Value(dBV/m) | Deviation <sup>3</sup> (%) | Limit <sup>4</sup> (%) |
| CW           | 835             | 100              | 40.68                              | 40.56                            | 1.39                       | ± 25                   |
| CW           | 1880            | 100              | 39.14                              | 38.89                            | 2.92                       | ± 25                   |

Notes:

1. Please refer to the attachment for detailed measurement data and plot.
2. Target value is provided by SPEAD in the calibration certificate of specific dipoles.
3. Deviation (%) =  $100 * (\text{Measured value minus Target value})$  divided by Target value.
4. ANSI C63.19 requires values within ± 25% are acceptable, of which 12% is deviation and 13% is measurement uncertainty. Values independently validated for the dipole actually used in the measurements should be used, when available.

### F.2 Spot check results

| Frequency |         | Measured Value(dBV/m) | Power Drift (dB) | Category         |
|-----------|---------|-----------------------|------------------|------------------|
| MHz       | Channel |                       |                  |                  |
| GSM 850   |         |                       |                  |                  |
| 848.8     | 251     | 34.95                 | 0.18             | M4 (see Fig F.1) |
| GSM 1900  |         |                       |                  |                  |
| 1850.2    | 512     | 22.73                 | -0.17            | M4 (see Fig F.2) |

### F.3 The evaluation of Google duo

#### F.3.1 The evaluation of MIF

| Measured MIF levels |         |                                     |
|---------------------|---------|-------------------------------------|
| Band                | Channel | Modulation interference factor (dB) |
| GSM 850 EDGE        | 251     | -0.55                               |
|                     | 190     | -0.48                               |
|                     | 128     | -0.67                               |
| GSM 1900 EDGE       | 810     | -0.23                               |
|                     | 661     | -0.38                               |
|                     | 512     | -0.46                               |
| WCDMA 850 HSUPA     | 4233    | -21.65                              |
|                     | 4182    | -20.98                              |
|                     | 4132    | -21.28                              |

|                     |       |        |
|---------------------|-------|--------|
| WCDMA 1700 HSUPA    | 1513  | -20.87 |
|                     | 1412  | -21.09 |
|                     | 1312  | -20.56 |
| WCDMA 1900 HSUPA    | 9538  | -21.25 |
|                     | 9400  | -21.42 |
|                     | 9262  | -21.67 |
| LTE Band2<br>QPSK   | 19100 | -14.96 |
|                     | 18900 | -15.08 |
|                     | 18700 | -14.80 |
| LTE Band4<br>QPSK   | 20300 | -15.18 |
|                     | 20175 | -15.18 |
|                     | 20050 | -15.09 |
| LTE Band5<br>QPSK   | 20600 | -14.80 |
|                     | 20525 | -14.98 |
|                     | 20450 | -14.79 |
| LTE Band12<br>QPSK  | 23130 | -14.80 |
|                     | 23095 | -15.03 |
|                     | 23060 | -14.79 |
| LTE Band14<br>QPSK  | 23330 | -15.04 |
| LTE Band30<br>QPSK  | 27710 | -14.99 |
| LTE Band2<br>16QAM  | 19100 | -9.89  |
|                     | 18900 | -10.12 |
|                     | 18700 | -10.39 |
| LTE Band4<br>16QAM  | 20300 | -10.34 |
|                     | 20175 | -10.36 |
|                     | 20050 | -10.11 |
| LTE Band5<br>16QAM  | 20600 | -11.29 |
|                     | 20525 | -10.35 |
|                     | 20450 | -10.36 |
| LTE Band12<br>16QAM | 23130 | -11.36 |
|                     | 23095 | -10.34 |
|                     | 23060 | -10.33 |
| LTE Band14<br>16QAM | 23330 | -10.11 |
| LTE Band30<br>16QAM | 27710 | -10.61 |
| LTE Band2<br>64QAM  | 19100 | -10.10 |
|                     | 18900 | -10.08 |
|                     | 18700 | -11.36 |
| LTE Band4<br>64QAM  | 20300 | -10.03 |
|                     | 20175 | -10.10 |
|                     | 20050 | -10.01 |



|                     |       |        |
|---------------------|-------|--------|
| LTE Band5<br>64QAM  | 20600 | -11.12 |
|                     | 20525 | -11.13 |
|                     | 20450 | -11.10 |
| LTE Band12<br>64QAM | 23130 | -10.03 |
|                     | 23095 | -10.48 |
|                     | 23060 | -11.34 |
| LTE Band14<br>64QAM | 23330 | -11.31 |
| LTE Band30<br>64QAM | 27710 | -11.25 |
| WiFi-2.4G 11b       | 11    | -6.11  |
|                     | 6     | -6.35  |
|                     | 1     | -6.27  |

### F.3.2 The evaluation for low-power exemption

| Band              | Average power (dBm) | MIF (dB) | Sum (dBm) | C63.19 Tested |
|-------------------|---------------------|----------|-----------|---------------|
| GSM 850 - EDGE    | 30.89               | -0.48    | 30.41     | Yes*          |
| GSM 1900 - EDGE   | 27.20               | -0.23    | 26.97     | Yes*          |
| WCDMA 850 - HSPA  | 22.71               | -20.98   | 1.73      | No            |
| WCDMA 1700 - HSPA | 20.46               | -20.56   | -0.1      | No            |
| WCDMA 1900 - HSPA | 20.98               | -21.25   | -0.27     | No            |
| LTE Band 2 QPSK   | 23.61               | -14.80   | 8.81      | No            |
| LTE Band 4 QPSK   | 23.04               | -15.09   | 7.95      | No            |
| LTE Band 5 QPSK   | 24.28               | -14.78   | 9.5       | No            |
| LTE Band 12 QPSK  | 23.65               | -14.79   | 8.86      | No            |
| LTE Band 14 QPSK  | 23.37               | -15.04   | 8.33      | No            |
| LTE Band 30 QPSK  | 22.69               | -14.99   | 7.7       | No            |
| LTE Band 2 16QAM  | 22.86               | -9.89    | 12.97     | No            |
| LTE Band 4 16QAM  | 22.25               | -10.11   | 12.14     | No            |
| LTE Band 5 16QAM  | 23.45               | -10.35   | 13.1      | No            |
| LTE Band 12 16QAM | 22.69               | -10.33   | 12.36     | No            |
| LTE Band 14 16QAM | 22.51               | -10.11   | 12.4      | No            |
| LTE Band 30 16QAM | 21.87               | -10.61   | 11.26     | No            |
| LTE Band 2 64QAM  | 21.15               | -10.08   | 11.07     | No            |
| LTE Band 4 64QAM  | 21.18               | -10.01   | 11.17     | No            |
| LTE Band 5 64QAM  | 22.56               | -11.10   | 11.46     | No            |
| LTE Band 12 64QAM | 21.68               | -10.03   | 11.65     | No            |
| LTE Band 14 64QAM | 21.44               | -11.31   | 10.13     | No            |
| LTE Band 30 64QAM | 21.08               | -11.25   | 9.83      | No            |
| WiFi 2.4G 11b     | 20.29               | -6.35    | 13.94     | No            |

\*Note: For GSM bands, EDGE modes were not evaluated as Voice modes were found to the worst-case modes for the GSM air interface.

## F.4 System Validation Result

### E SCAN of Dipole 835 MHz

**Date:** 2020-1-12

Electronics: DAE4 Sn1331

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EF3DV3 - SN4060;ConvF(1, 1, 1)

**E Scan - measurement distance from the probe sensor center to CD835 Dipole =**

**15mm/Hearing Aid Compatibility Test (41x361x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 129.6 V/m; Power Drift = -0.05 dB


Applied MIF = 0.00 dB

RF audio interference level = 40.68 dBV/m

**Emission category: M3**

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M3<br>40.25 dBV/m | Grid 2 M3<br>40.68 dBV/m | Grid 3 M3<br>40.59 dBV/m |
| Grid 4 M4<br>35.46 dBV/m | Grid 5 M4<br>35.81 dBV/m | Grid 6 M4<br>35.79 dBV/m |
| Grid 7 M3<br>40.44 dBV/m | Grid 8 M3<br>40.64 dBV/m | Grid 9 M3<br>40.52 dBV/m |

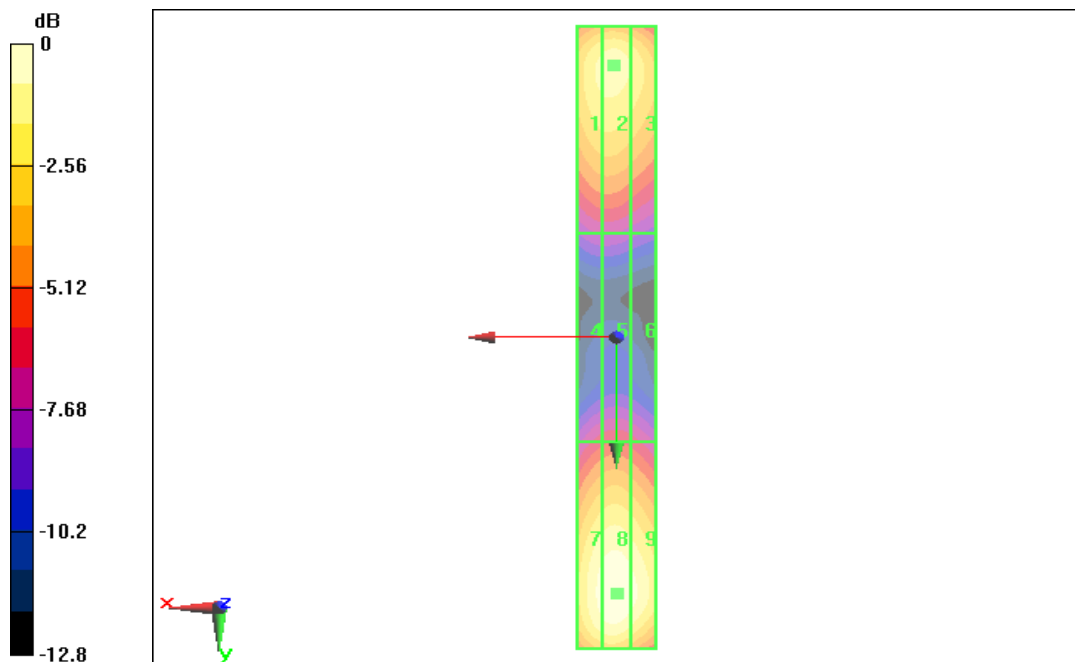

0 dB = 40.68 dBV/m

# E SCAN of Dipole 1880 MHz

**Date: 2020-1-13**

Electronics: DAE4 Sn1331

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EF3DV3 - SN4060;ConvF(1, 1, 1)

**E Scan - measurement distance from the probe sensor center to CD1880 Dipole = 15mm/Hearing Aid Compatibility Test (41x181x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 157.2 V/m; Power Drift = -0.04 dB


Applied MIF = 0.00 dB

RF audio interference level = 39.14 dBV/m

**Emission category: M2**

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M2<br>38.81 dBV/m | Grid 2 M2<br>39.14 dBV/m | Grid 3 M2<br>39.04 dBV/m |
| Grid 4 M2<br>36.23 dBV/m | Grid 5 M2<br>36.41 dBV/m | Grid 6 M2<br>36.36 dBV/m |
| Grid 7 M2<br>38.86 dBV/m | Grid 8 M2<br>39.08 dBV/m | Grid 9 M2<br>38.88 dBV/m |

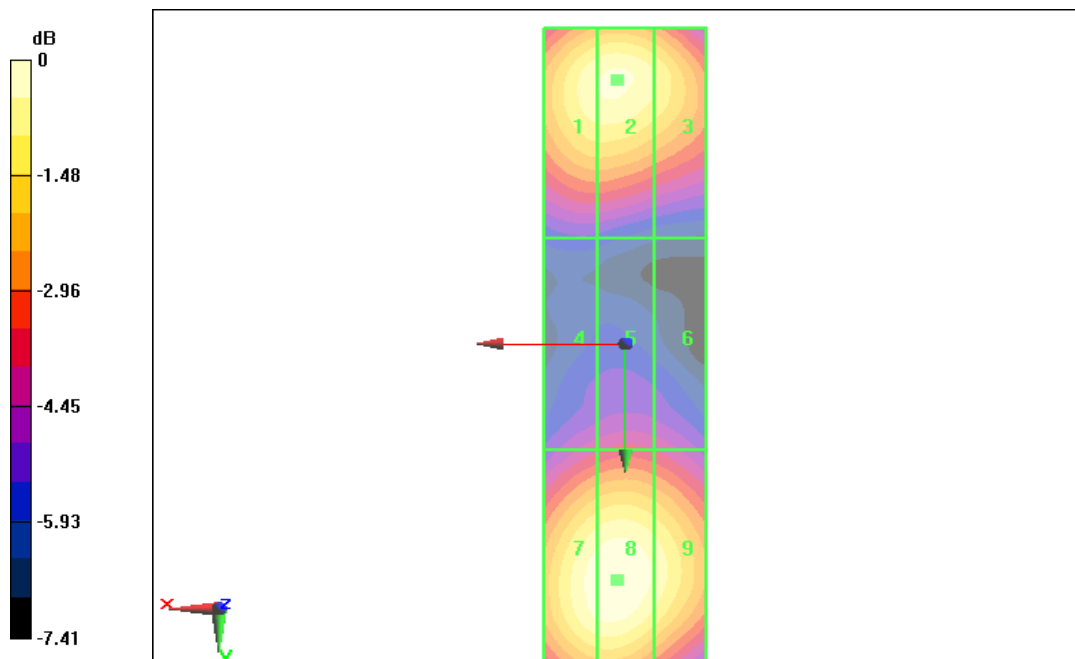

0 dB = 39.14 dBV/m



## F.5 Test Plots

### HAC RF E-Field GSM 850 High

**Date:** 2020-1-12

Electronics: DAE4 Sn1331

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4060;ConvF(1, 1, 1)

**GSM850/E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device/Hearing Aid**

**Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 46.07 V/m; Power Drift = 0.18 dB


Applied MIF = 3.34 dB

RF audio interference level = 34.95 dBV/m

**Emission category: M4**

MIF scaled E-field

|                          |                          |                          |
|--------------------------|--------------------------|--------------------------|
| Grid 1 M4<br>33.9 dBV/m  | Grid 2 M4<br>34.19 dBV/m | Grid 3 M4<br>33.6 dBV/m  |
| Grid 4 M4<br>34.62 dBV/m | Grid 5 M4<br>34.95 dBV/m | Grid 6 M4<br>34.44 dBV/m |
| Grid 7 M4<br>35.15 dBV/m | Grid 8 M4<br>35.36 dBV/m | Grid 9 M4<br>34.7 dBV/m  |

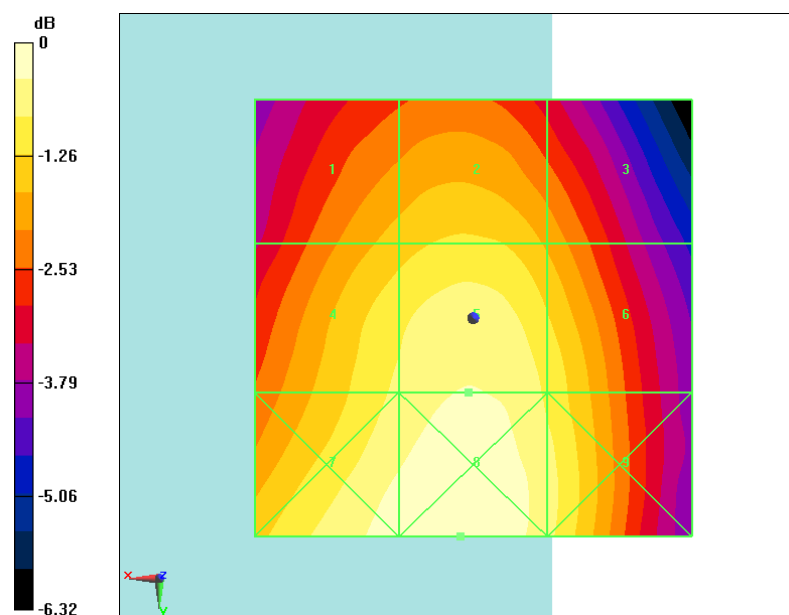

0 dB = 58.61 V/m = 35.36 dBV/m

**Fig F.1 HAC RF E-Field GSM 850 High**

## HAC RF E-Field GSM 1900 Low

**Date:** 2020-1-13

Electronics: DAE4 Sn1331

Medium: Air

Medium parameters used:  $\sigma = 0$  mho/m,  $\epsilon_r = 1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 22.0°C

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Probe: EF3DV3 - SN4060;ConvF(1, 1, 1)

**GSM1900/E Scan - ER3DV6 - 2011: 15 mm from Probe Center to the Device 3/Hearing Aid Compatibility Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 6.229 V/m; Power Drift = -0.17 dB


Applied MIF = 3.36 dB

RF audio interference level = 22.73 dBV/m

**Emission category: M4**

MIF scaled E-field

|                                 |                                 |                                 |
|---------------------------------|---------------------------------|---------------------------------|
| Grid 1 <b>M4</b><br>22.5 dBV/m  | Grid 2 <b>M4</b><br>22.73 dBV/m | Grid 3 <b>M4</b><br>22.08 dBV/m |
| Grid 4 <b>M4</b><br>19.55 dBV/m | Grid 5 <b>M4</b><br>21.24 dBV/m | Grid 6 <b>M4</b><br>21.4 dBV/m  |
| Grid 7 <b>M4</b><br>25.32 dBV/m | Grid 8 <b>M4</b><br>24.95 dBV/m | Grid 9 <b>M4</b><br>23.99 dBV/m |

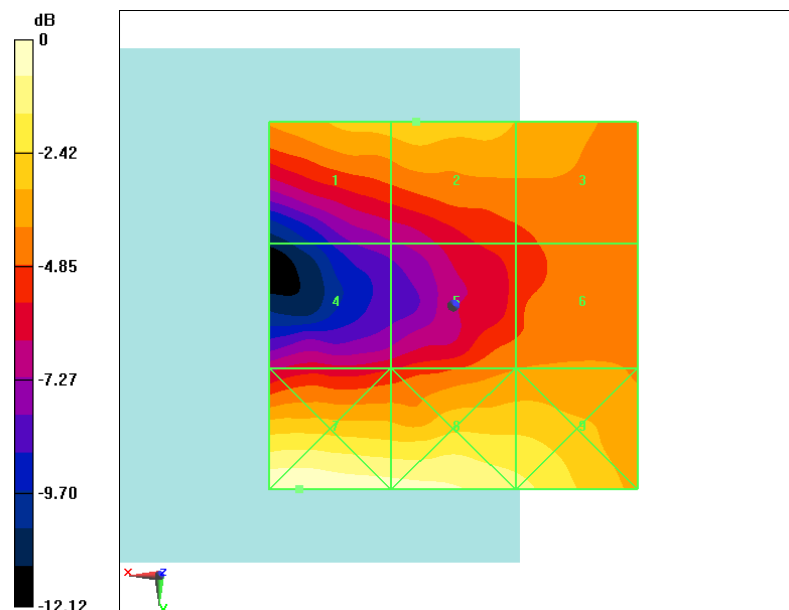

0 dB = 18.44 V/m = 25.32 dBV/m

**Fig F.2 HAC RF E-Field GSM 1900 Low**

**The photos of HAC test are presented in the additional document:**

Appendix to test report No.I19Z62348-SEM01/02

The photos of HAC test