



FCC RF Test Report

APPLICANT : Shenzhen Tinno Mobile Technology Corp.
EQUIPMENT : Watch
MODEL NAME : W568AA
FCC ID : XD6W568AA
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Apr. 01, 2025 ~ May 21, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Fly Liang



Approved by: Fly Liang

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	18
3.3 Power Spectral Density Measurement	19
3.4 Conducted Band Edges and Spurious Emission Measurement	26
3.5 Radiated Band Edges and Spurious Emission Measurement	35
3.6 AC Conducted Emission Measurement.....	39
3.7 Antenna Requirements.....	41
4 LIST OF MEASURING EQUIPMENT.....	42
5 MEASUREMENT UNCERTAINTY.....	43
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530516B	Rev. 01	Initial issue of report	Jun. 03, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.80 dB at 38.73 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 9.78 dB at 0.52 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

1.2 Manufacturer

Shenzhen Tinno Mobile Technology Corp.

27-001, South Side of Tianlong Mobile Headquarters Building, Tongfa South Road, Xili Community, Xili Street, Nanshan District, Shenzhen, PRC

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Watch
Model Name	W568AA
FCC ID	XD6W568AA
IMEI Code	Conducted: 865645070002080 Conduction: 865645070009598 Radiation: 865645070009895
HW Version	V1.0
SW Version	W568AAV01.05.10
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 1.72 dBm (0.0015 W) BLE 2Mbps: 1.81 dBm (0.0015 W)
99% Occupied Bandwidth	BLE 1Mbps:1.027MHz BLE 2Mbps:2.034MHz
Antenna Type / Gain	IFA Antenna type with gain -5.23 dBi
Type of Modulation	Bluetooth LE : GFSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps Mode 4: Bluetooth Tx CH00_2402 MHz_BLE 2Mbps Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps Mode 6: Bluetooth Tx CH39_2480 MHz_BLE 2Mbps Co-location mode : Bluetooth Tx CH39 2Mbps + LTE Band 7 Link
AC Conducted Emission	Mode 1: LTE Band 5 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable(charging form adapter) + Battery + Charger
Remark: For Radiated Test Cases, The tests were performance with USB Cable, Adapter, Battery and charger.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

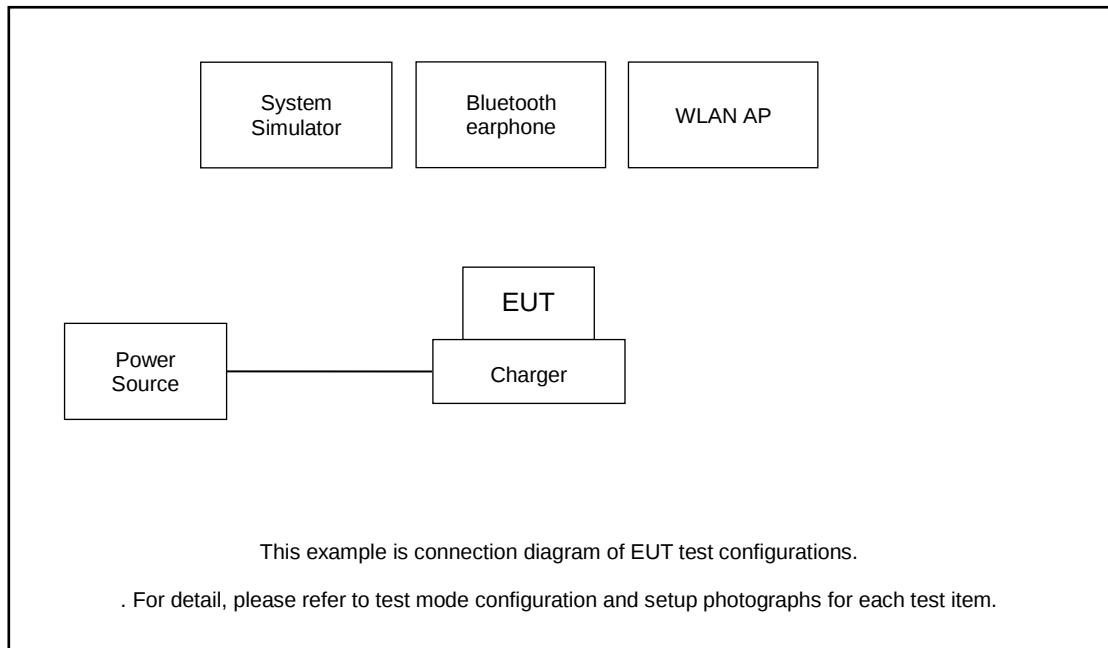

Radiated Emission:

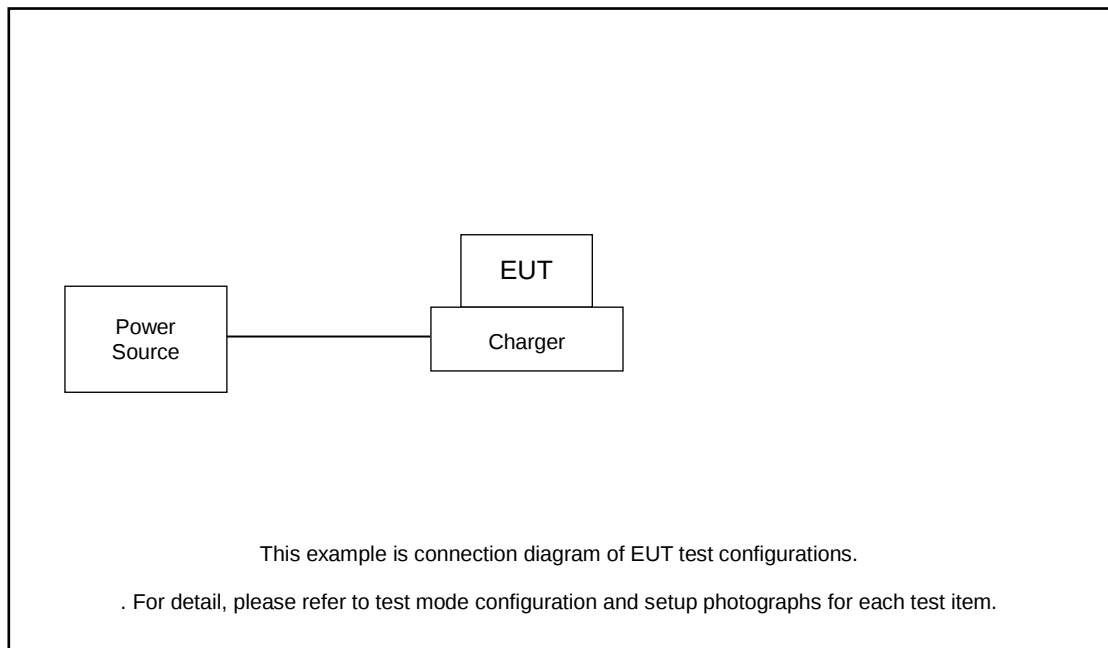

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the Bluetooth earphone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.3 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.3 + 10 = 11.3 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.


BLE 1Mbps

6 dB Bandwidth Plot on Channel 00

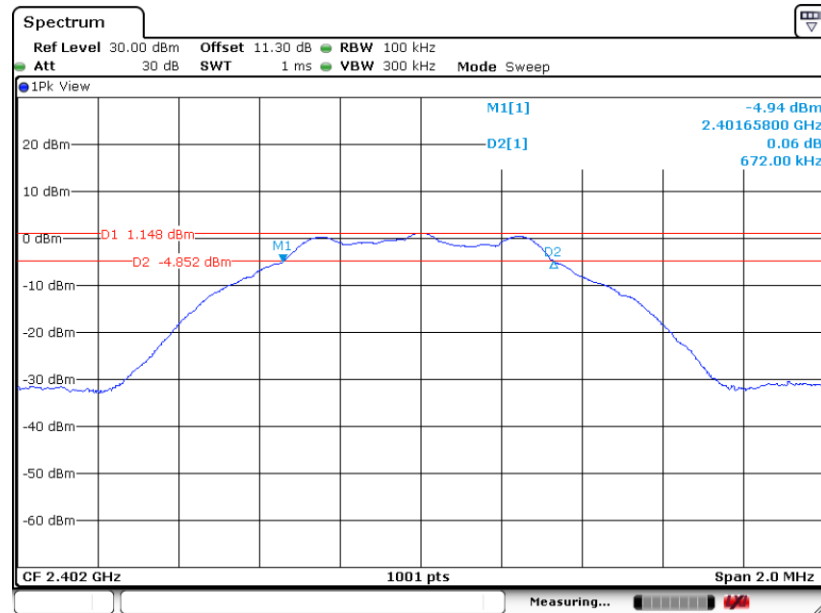

Date: 1.APR.2025 02:07:17


6 dB Bandwidth Plot on Channel 19

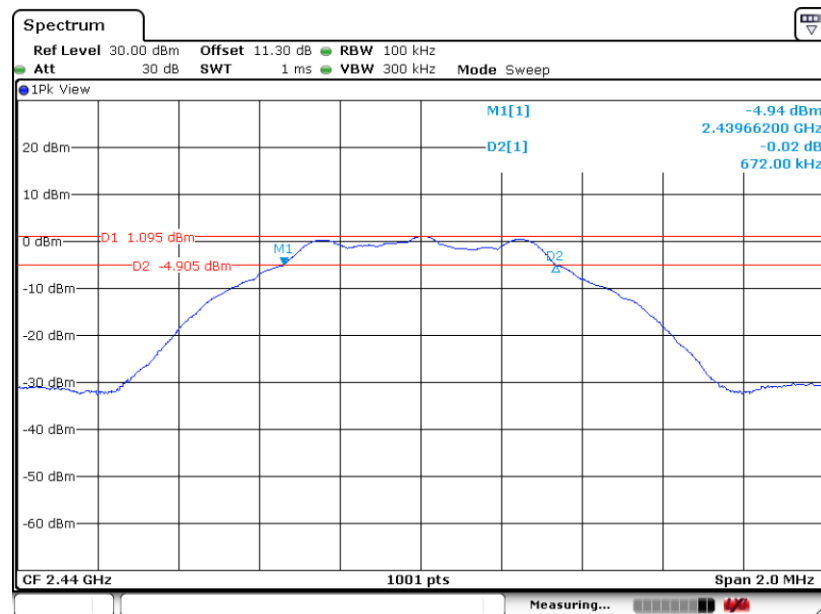

Date: 1.APR.2025 02:11:00




6 dB Bandwidth Plot on Channel 39

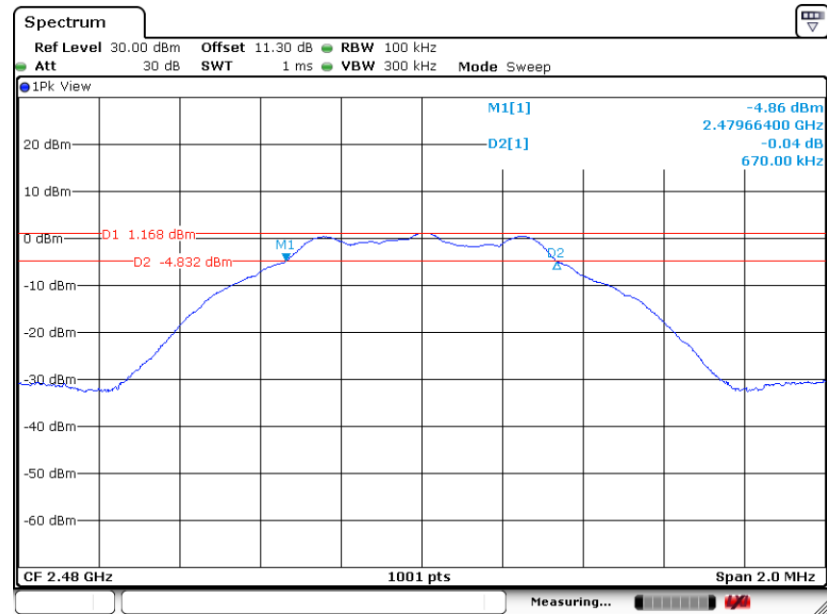

Date: 1.APR.2025 02:13:46

BLE 2Mbps


6 dB Bandwidth Plot on Channel 00

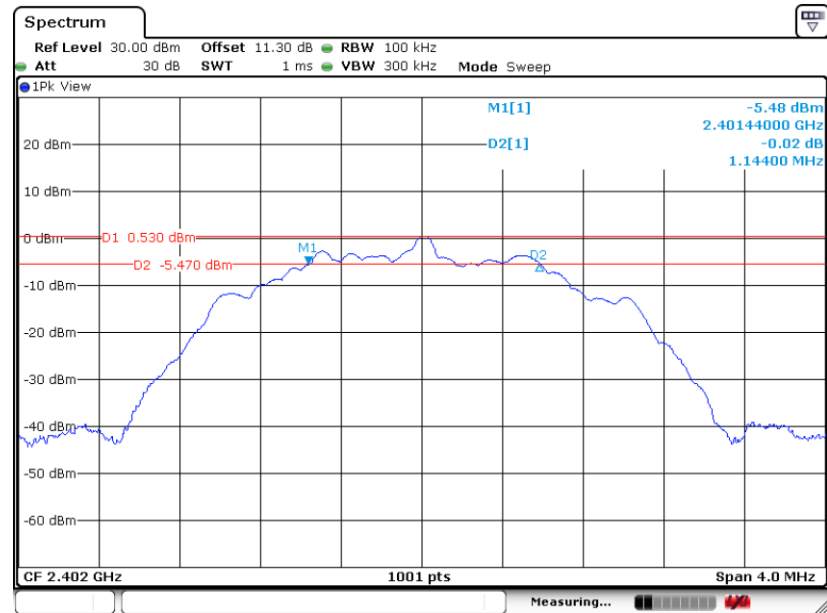

Date: 1.APR.2025 02:20:15




6 dB Bandwidth Plot on Channel 19

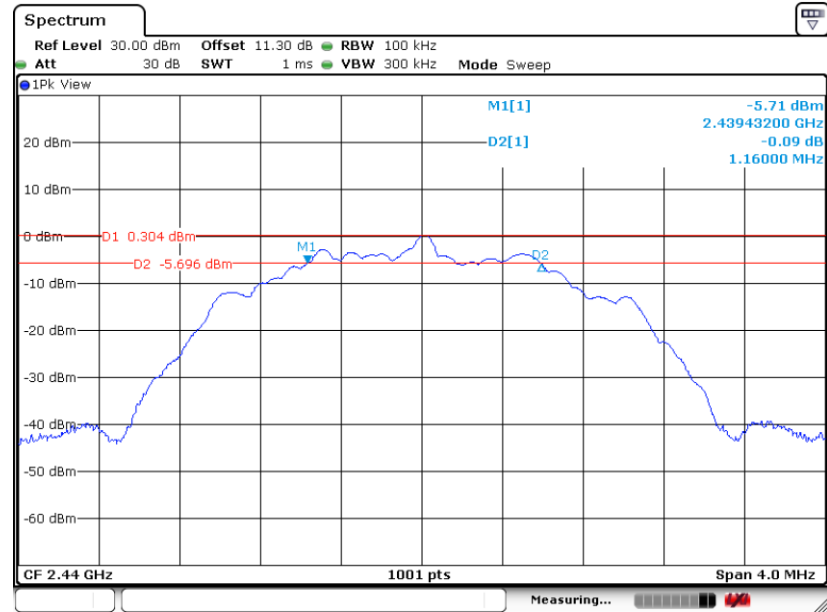

Date: 1.APR.2025 02:23:13

6 dB Bandwidth Plot on Channel 39

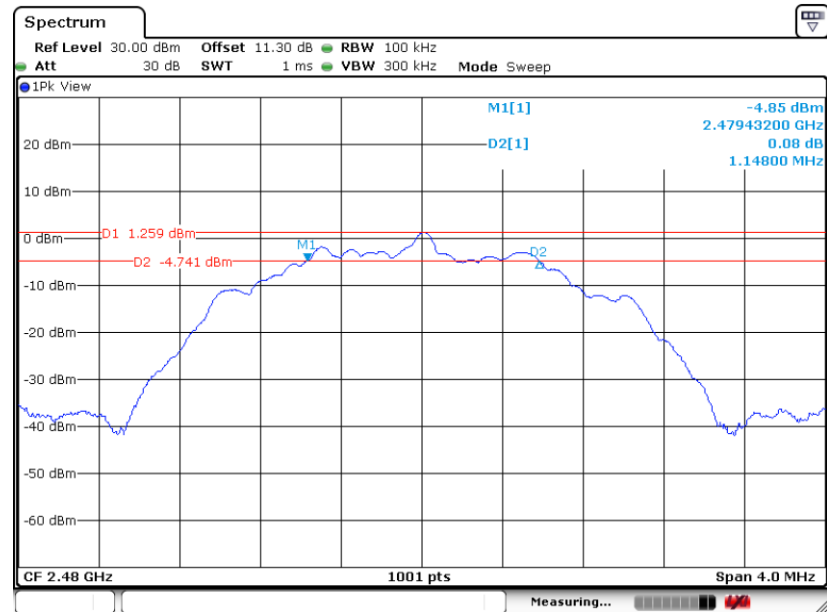

Date: 1.APR.2025 02:17:05




3.1.6 Test Result of 99% Occupied Bandwidth


Please refer to Appendix A.

BLE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

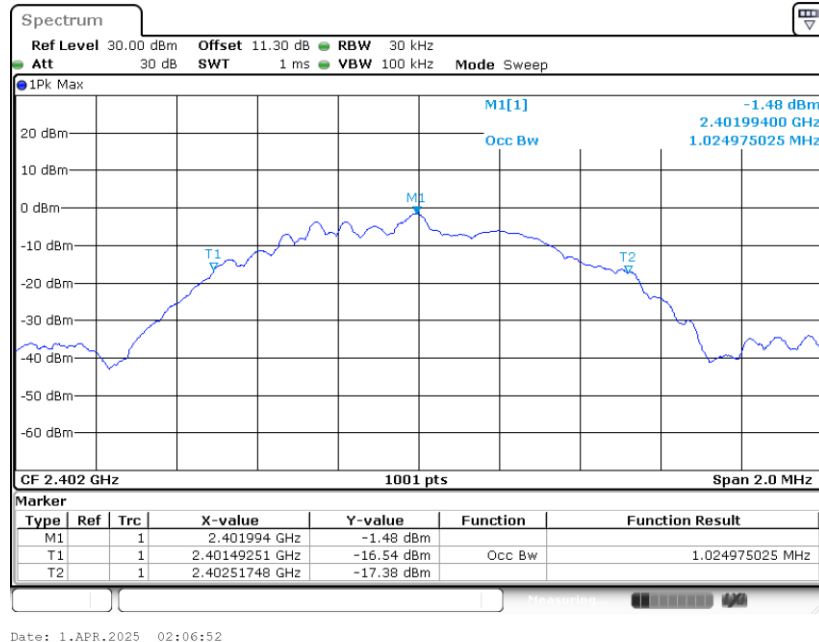


99% Occupied Bandwidth Plot on Channel 19

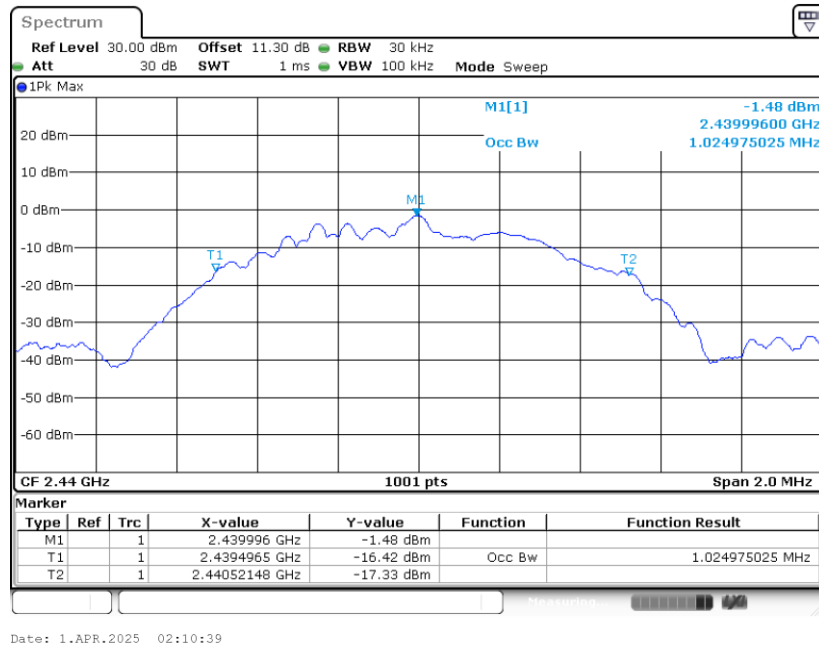




99% Occupied Bandwidth Plot on Channel 39

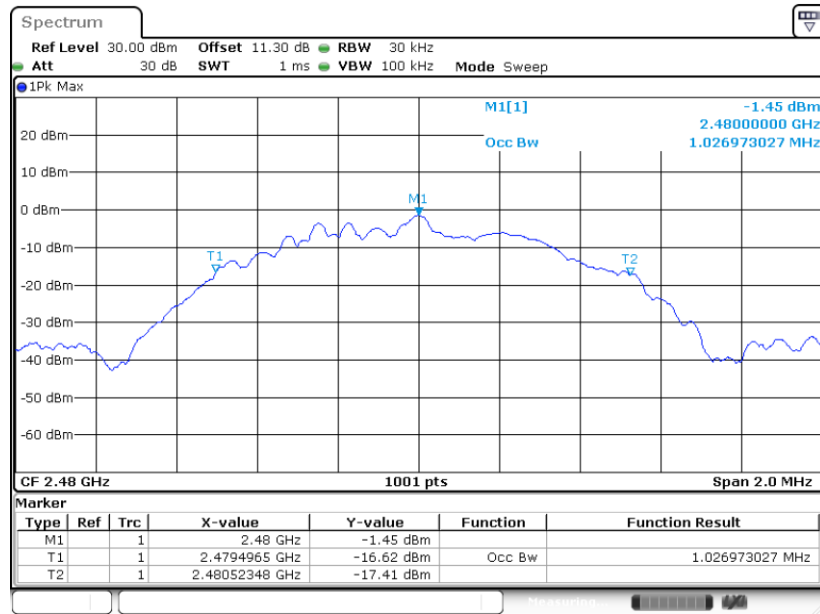


BLE 2Mbps

99% Occupied Bandwidth Plot on Channel 00

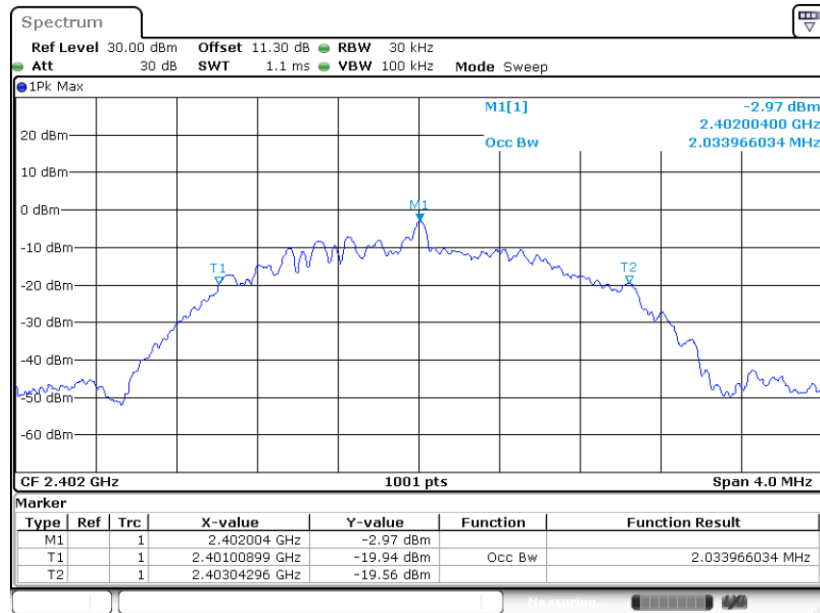




99% Occupied Bandwidth Plot on Channel 19

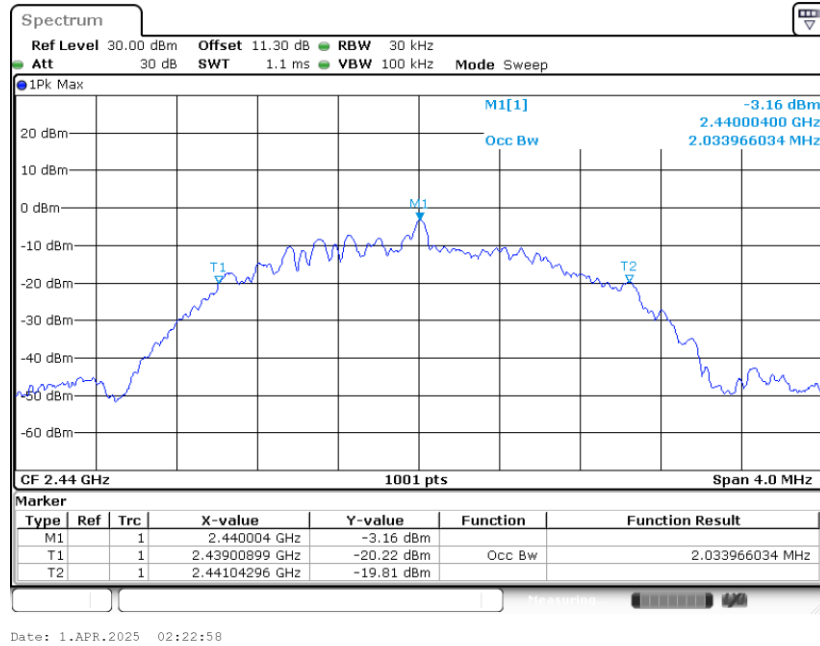

99% Occupied Bandwidth Plot on Channel 39

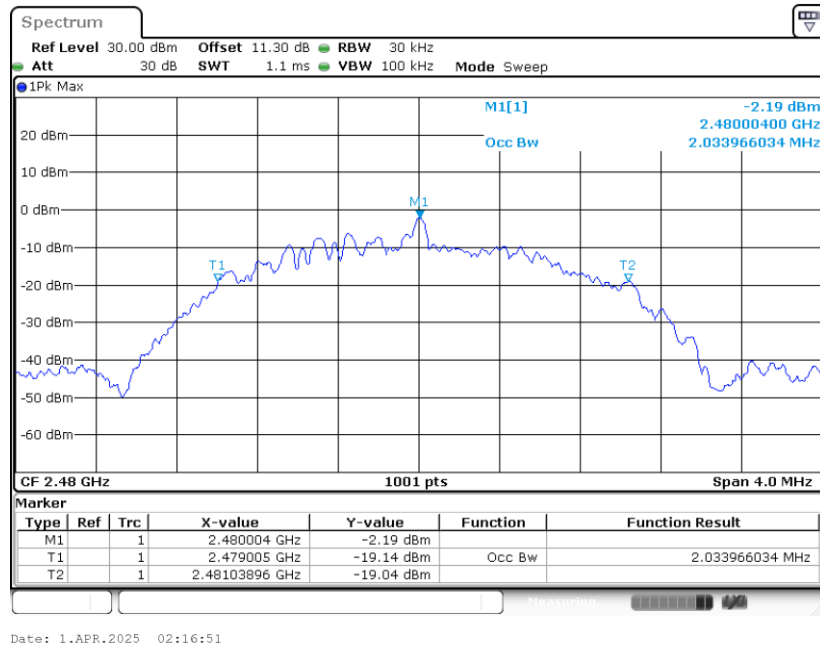

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

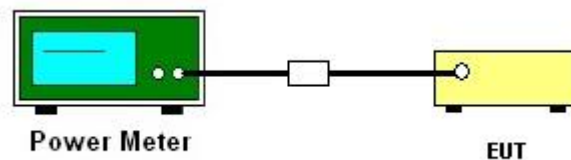

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

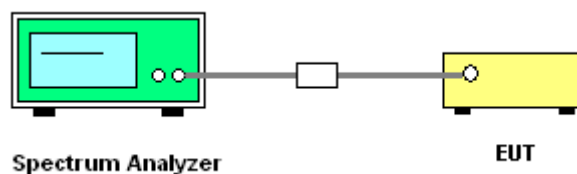

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

BLE 1Mbps

PSD 100kHz Plot on Channel 00

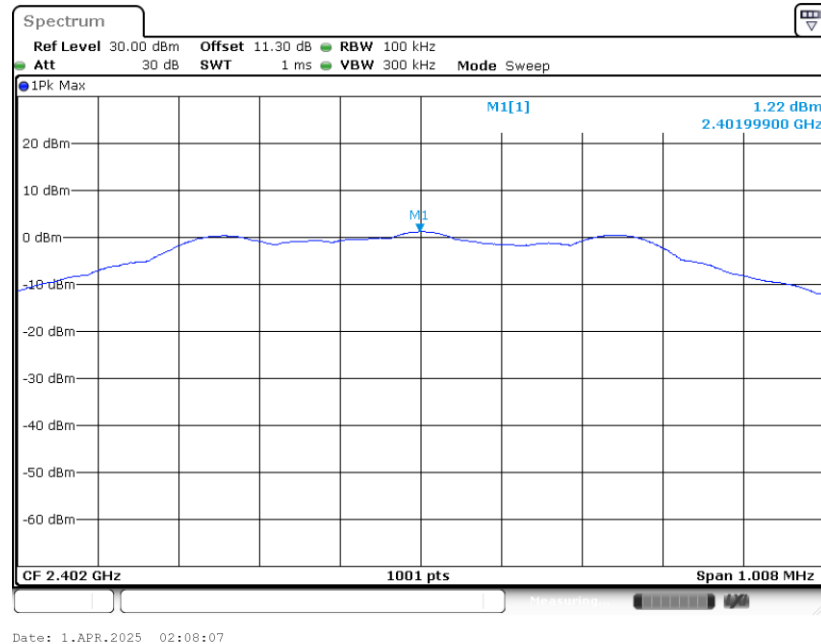


PSD 100kHz Plot on Channel 19

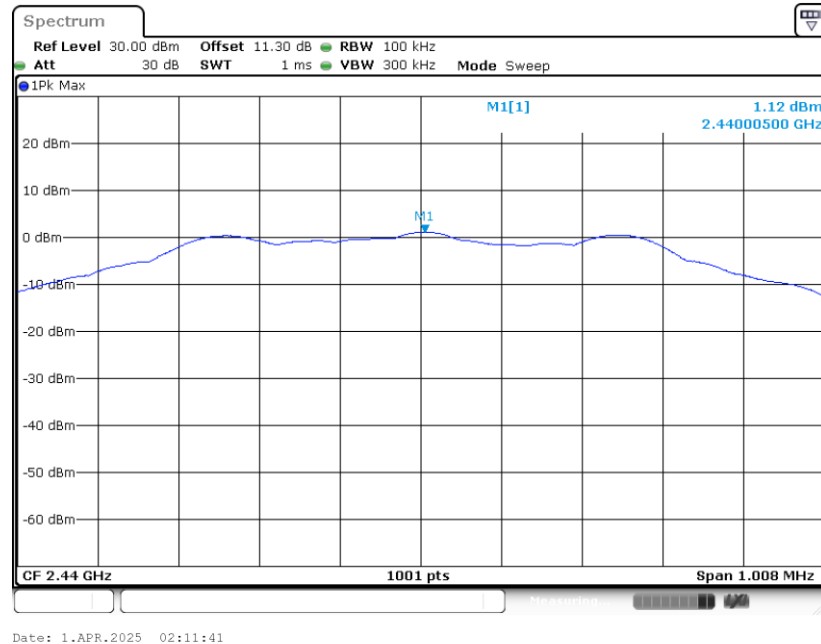




PSD 100kHz Plot on Channel 39

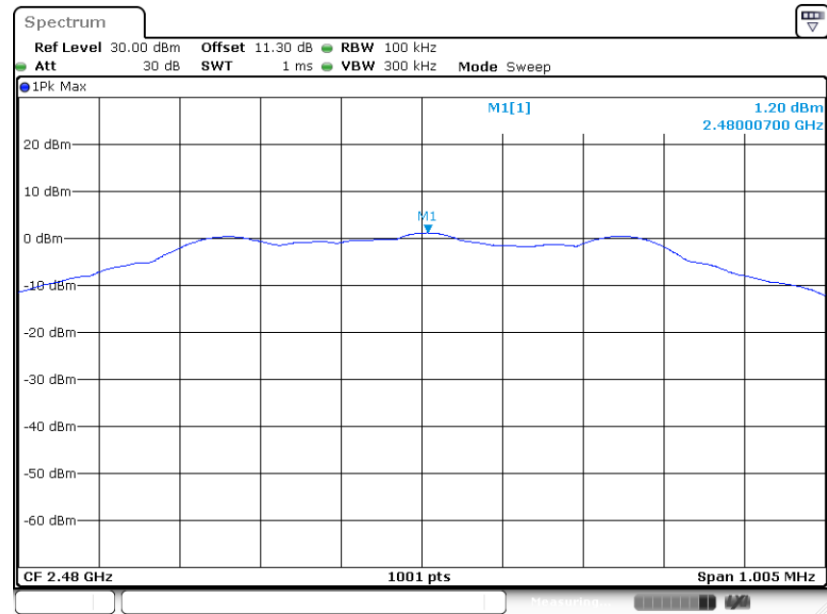

Date: 1.APR.2025 02:14:40

BLE 2Mbps


PSD 100kHz Plot on Channel 00

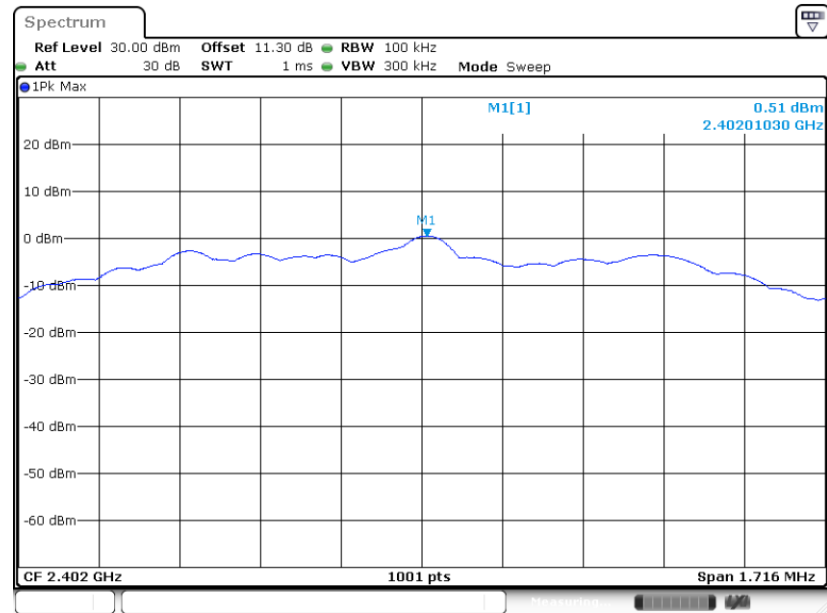


Date: 1.APR.2025 02:21:23



PSD 100kHz Plot on Channel 19

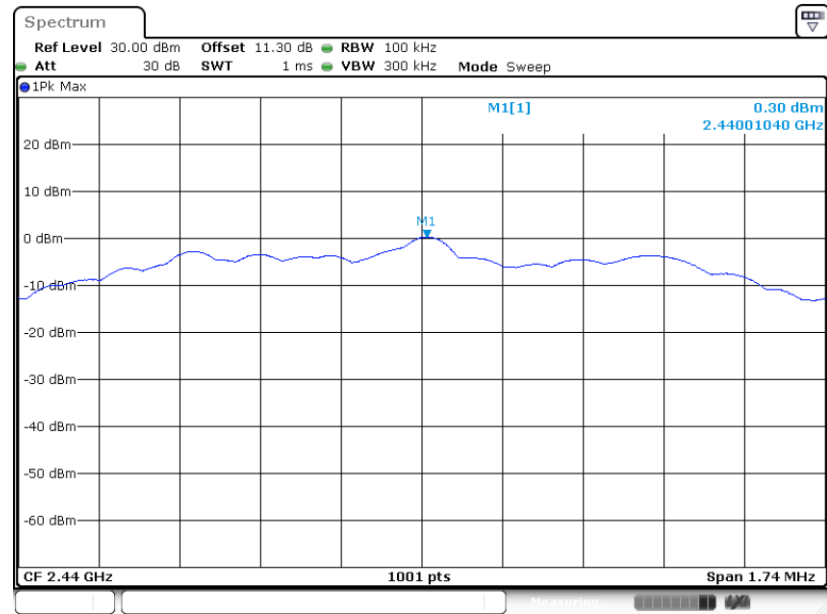

PSD 100kHz Plot on Channel 39

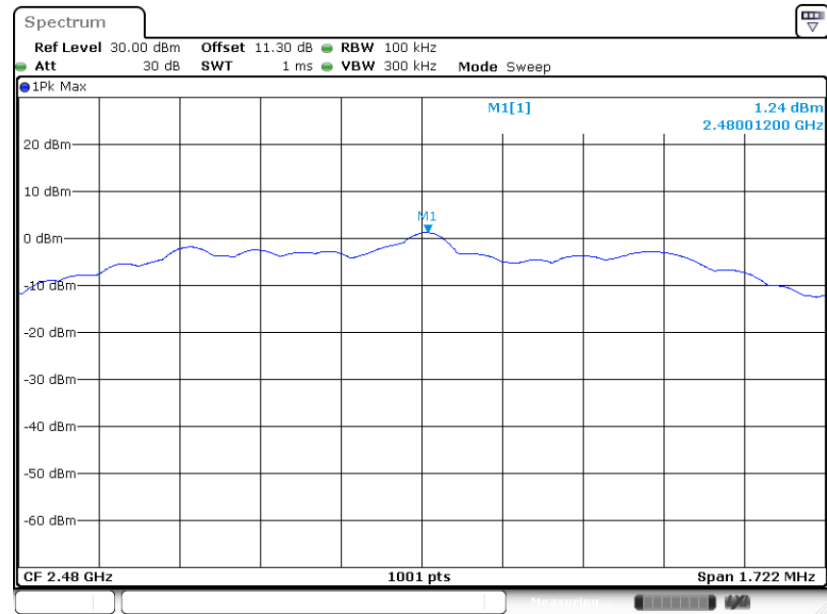





3.3.7 Test Result of Power Spectral Density Plots (3kHz)

BLE 1Mbps

PSD 3kHz Plot on Channel 00

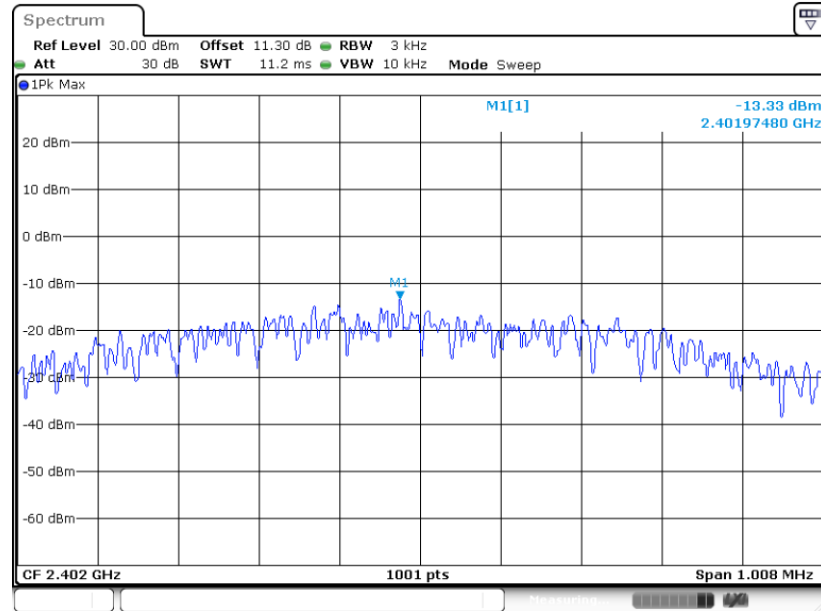


PSD 3kHz Plot on Channel 19

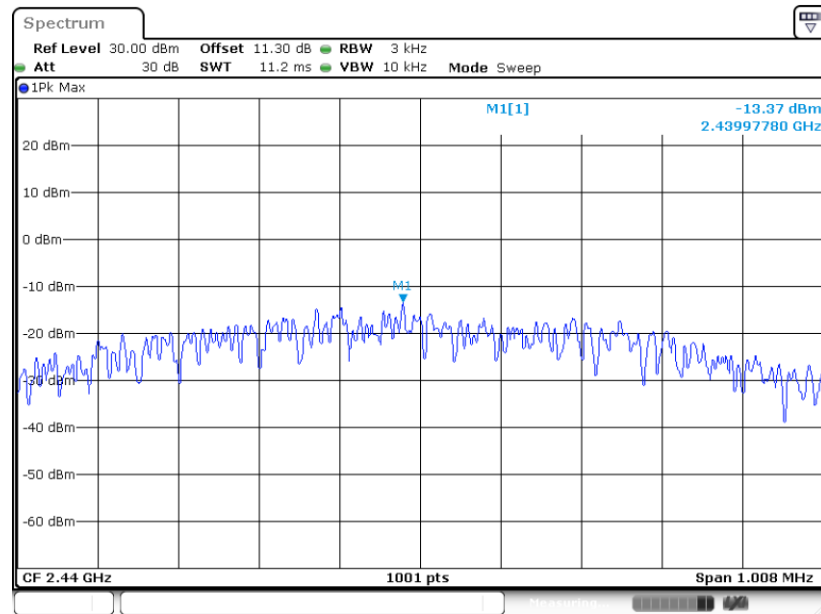




PSD 3kHz Plot on Channel 39

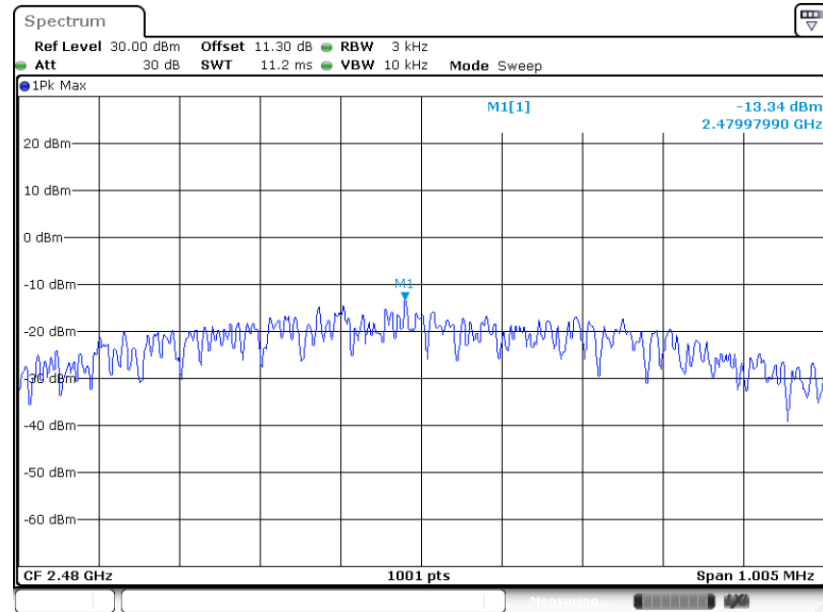

Date: 1.APR.2025 02:14:15

BLE 2Mbps


PSD 3kHz Plot on Channel 00

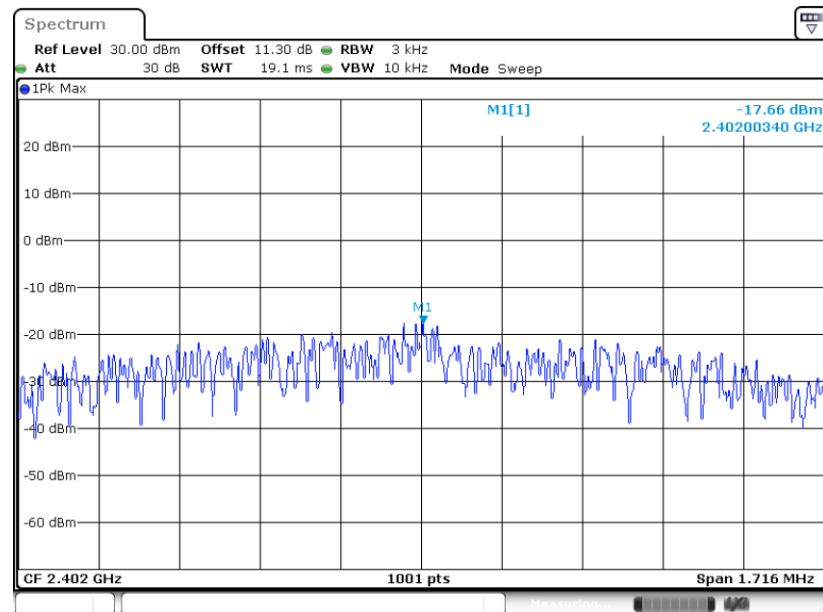

Date: 1.APR.2025 02:20:54




PSD 3kHz Plot on Channel 19

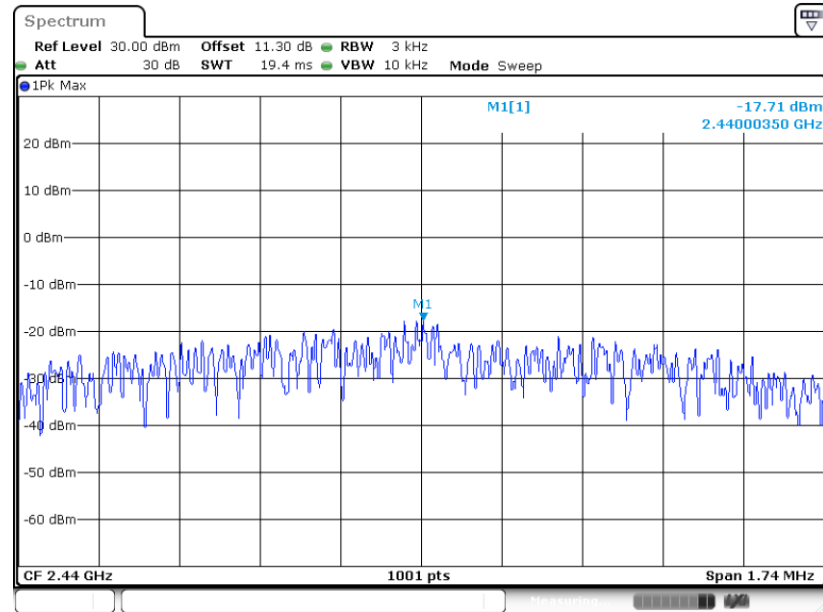

Date: 1.APR.2025 02:23:47

PSD 3kHz Plot on Channel 39

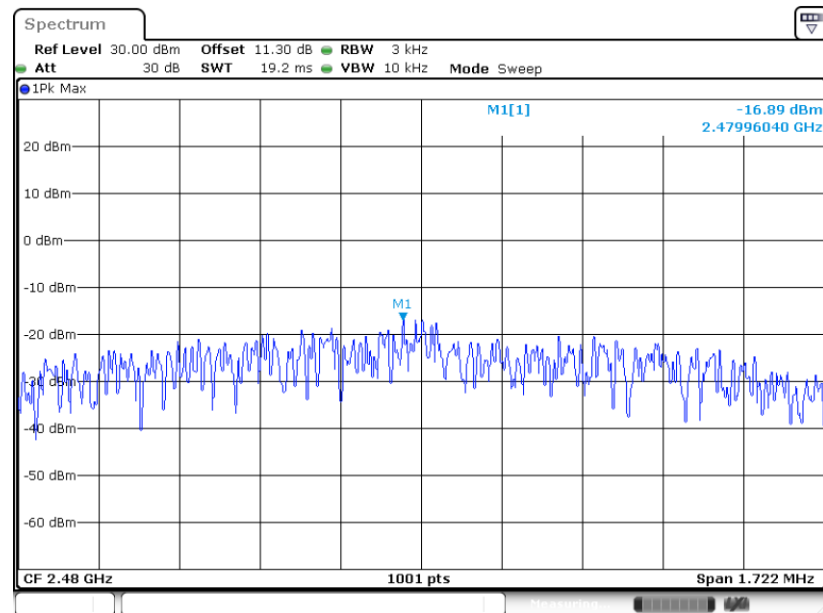

Date: 1.APR.2025 02:17:25

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges Plots


BLE 1Mbps

Low Band Edge Plot on Channel 00

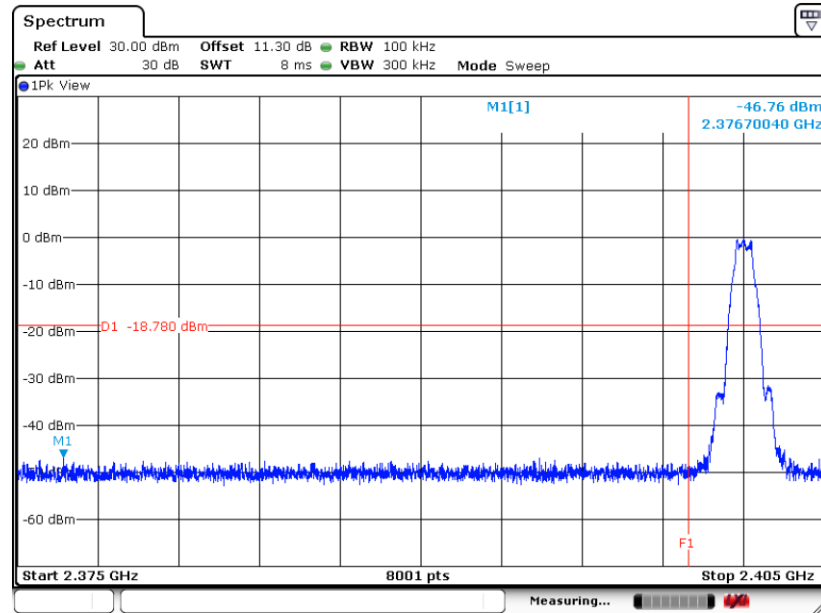

Date: 14.APR.2025 20:15:54

High Band Edge Plot on Channel 39

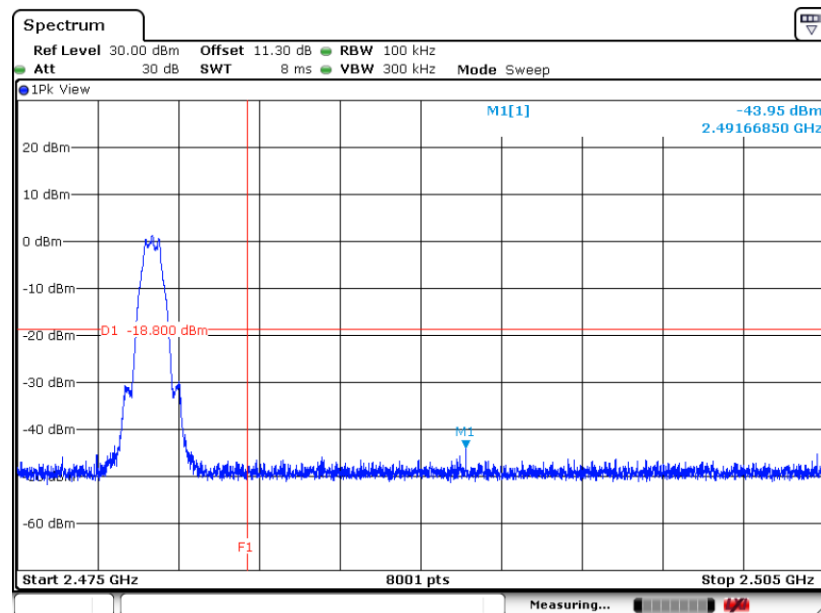


Date: 14.APR.2025 20:23:20




BLE 2Mbps

Low Band Edge Plot on Channel 00

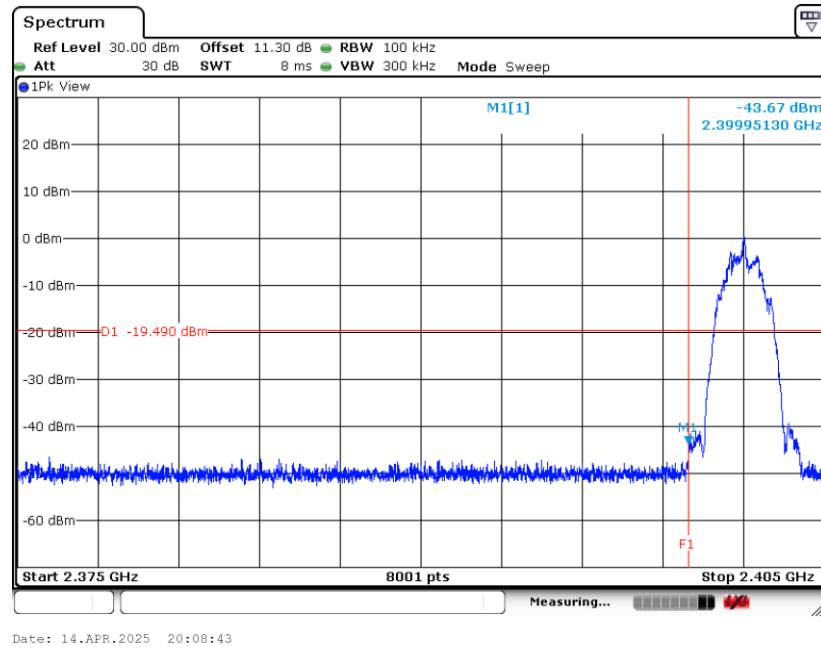


High Band Edge Plot on Channel 39

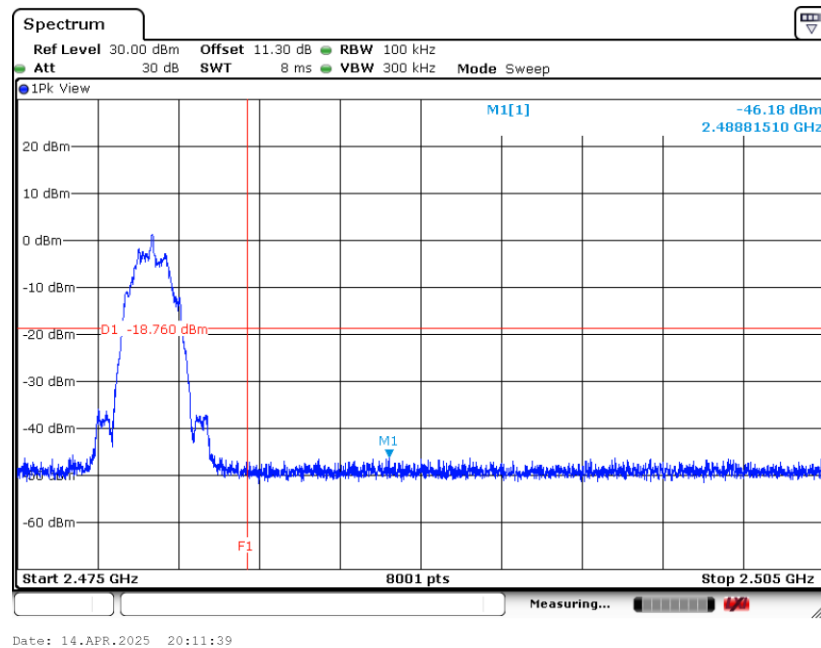




3.4.6 Test Result of Conducted Spurious Emission Plots

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

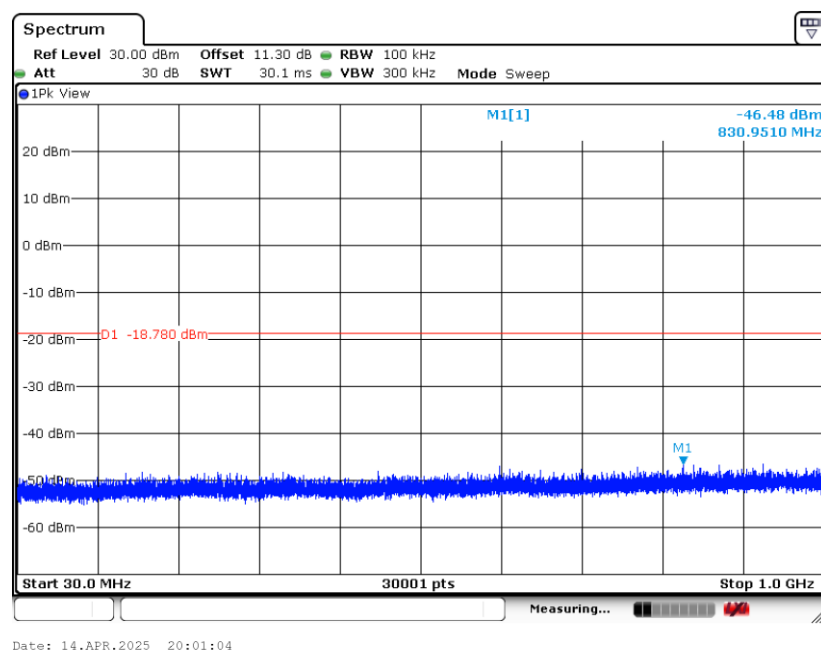


Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

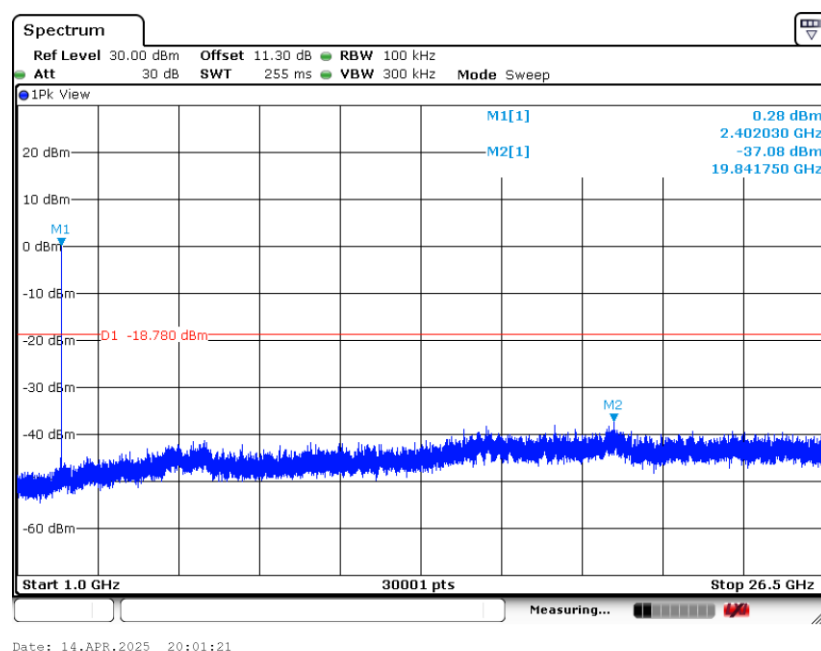



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 19

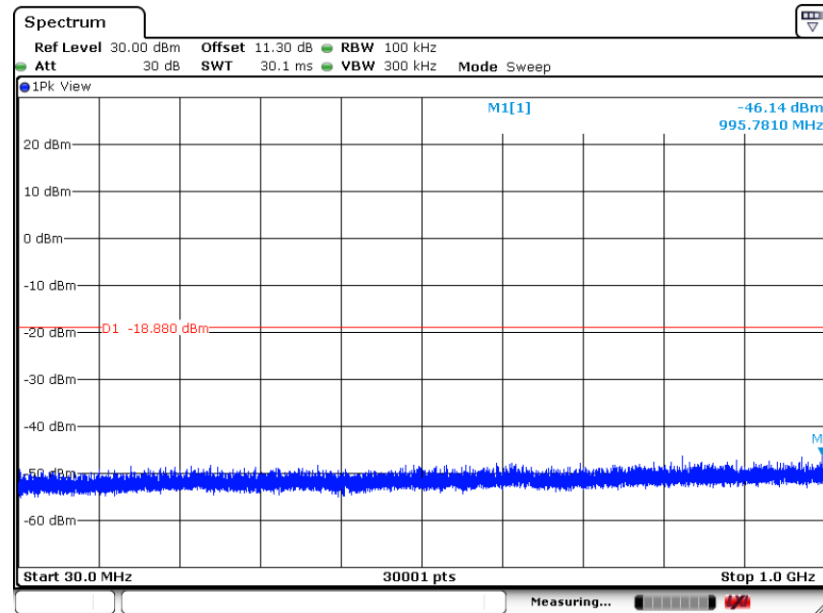

Date: 14.APR.2025 20:06:09

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

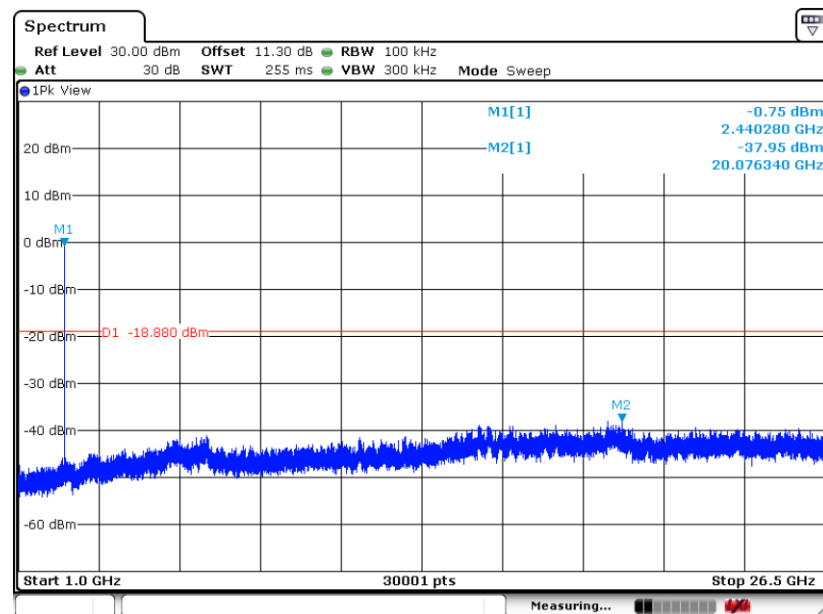


Date: 14.APR.2025 20:06:35



Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

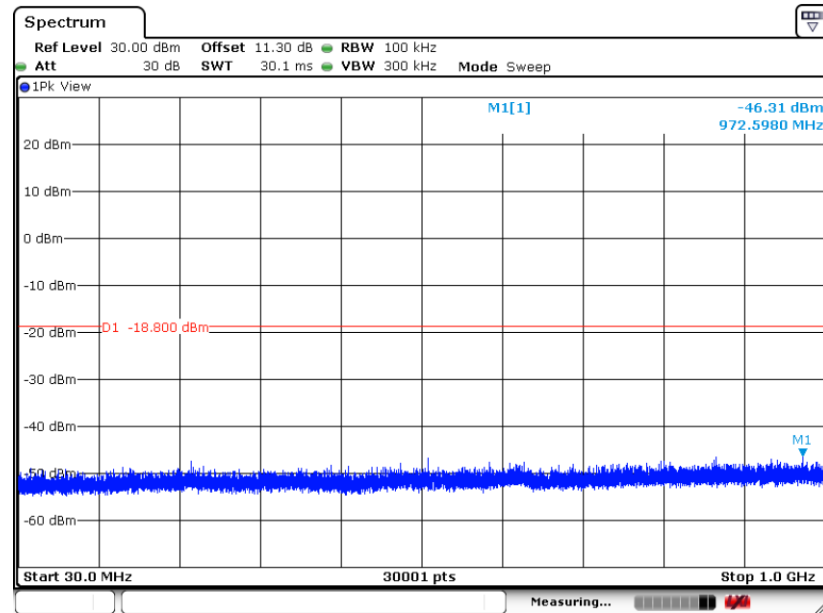

Date: 14.APR.2025 20:04:59

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps


GFSK Channel 39

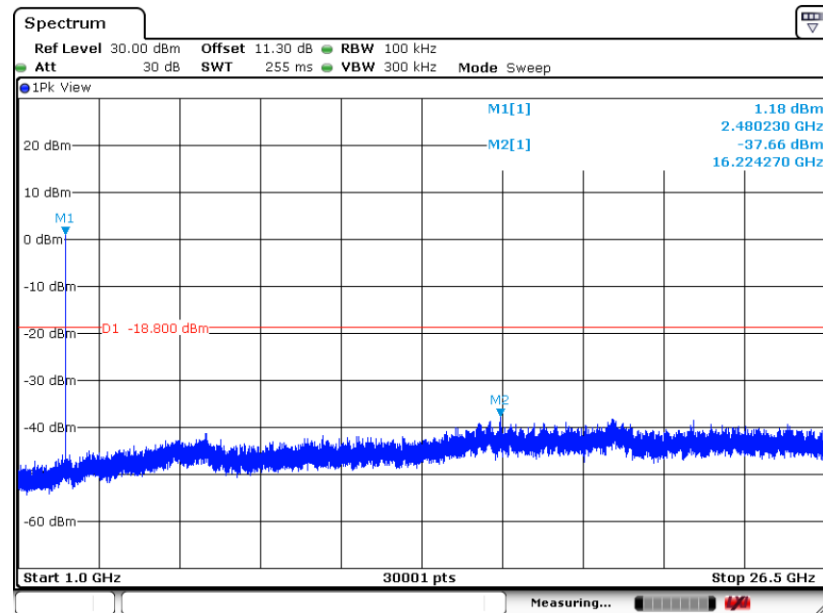


Date: 14.APR.2025 20:05:18



Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

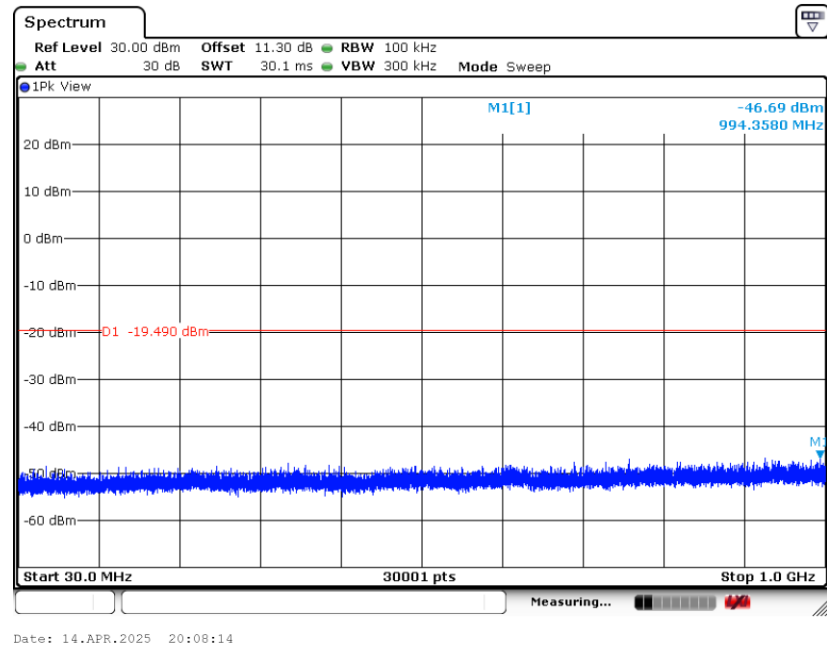


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 00

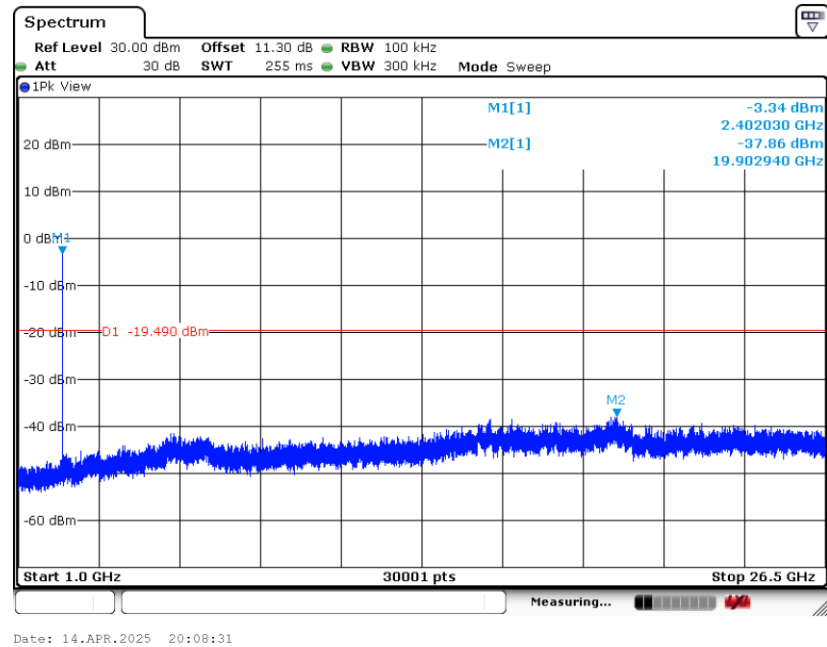





Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

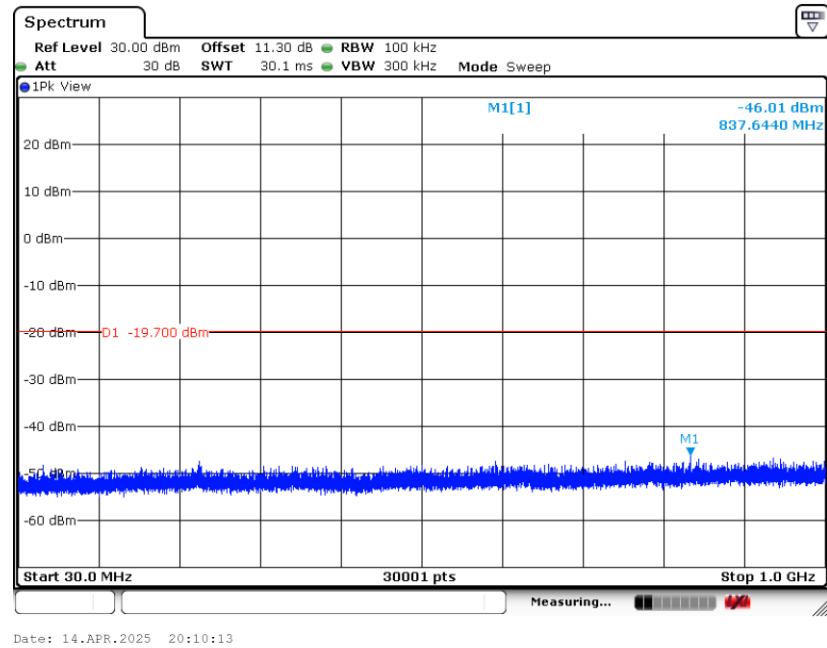


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps
GFSK Channel 19

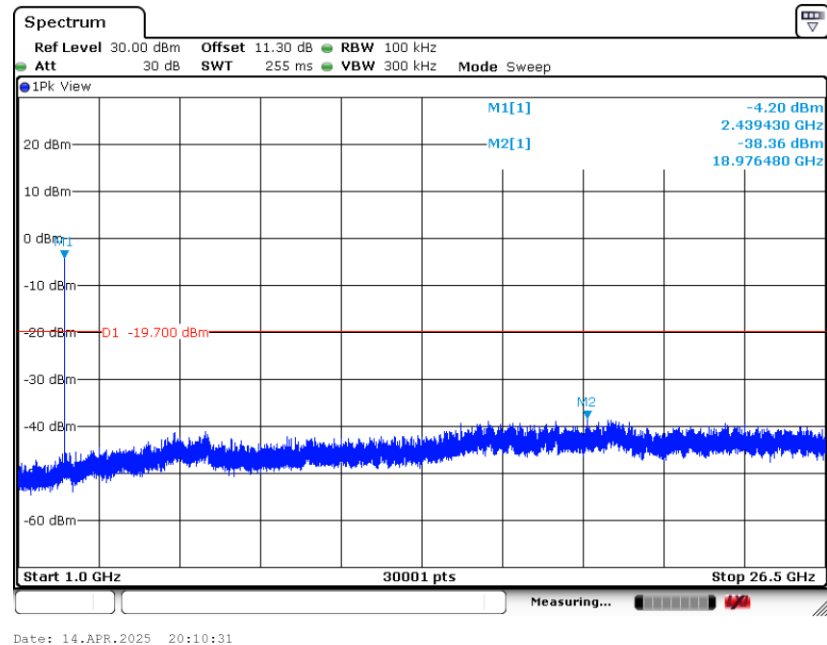

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

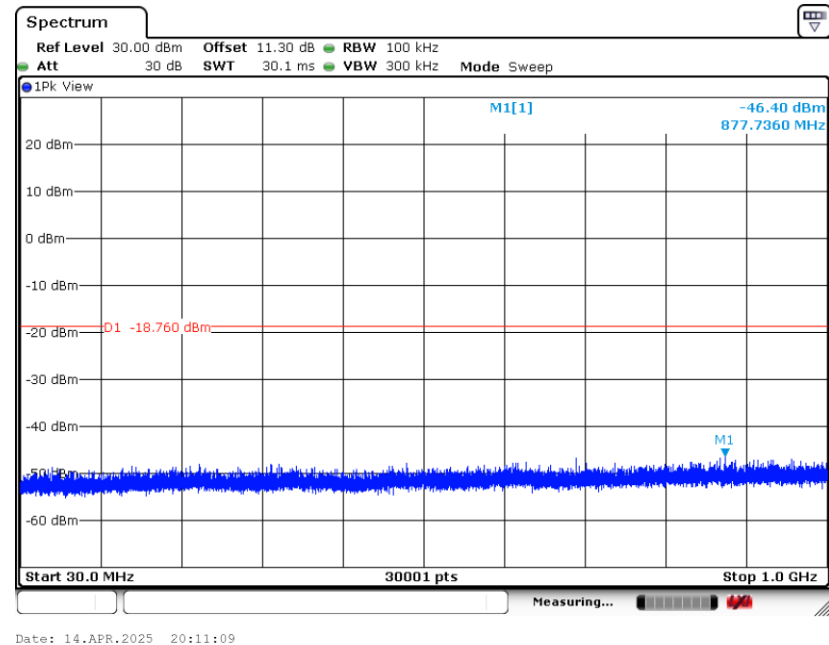

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 39

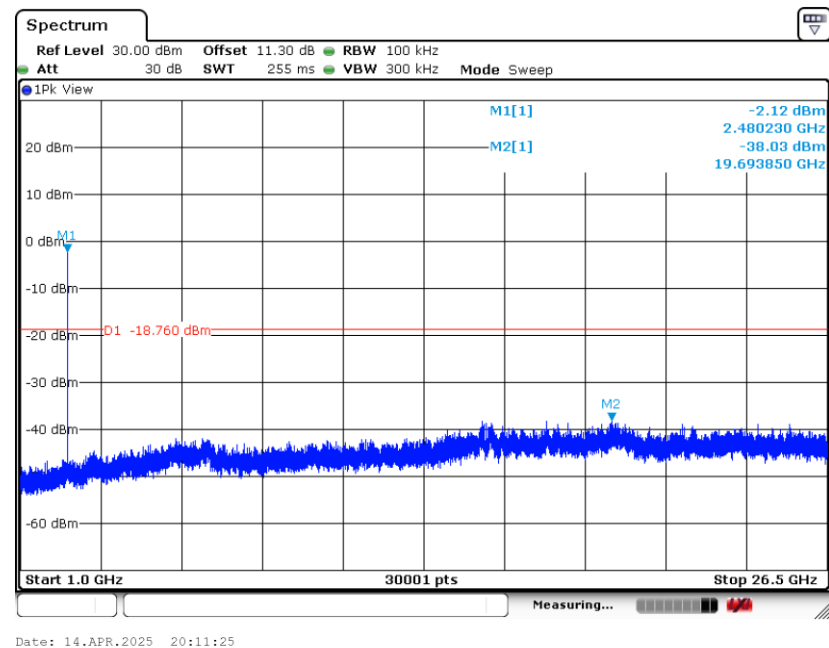

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW = RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f > 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

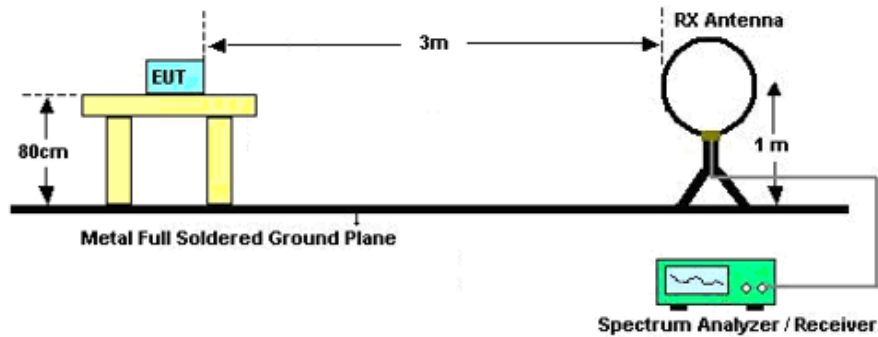

For radiated emissions from 30MHz to 1GHz

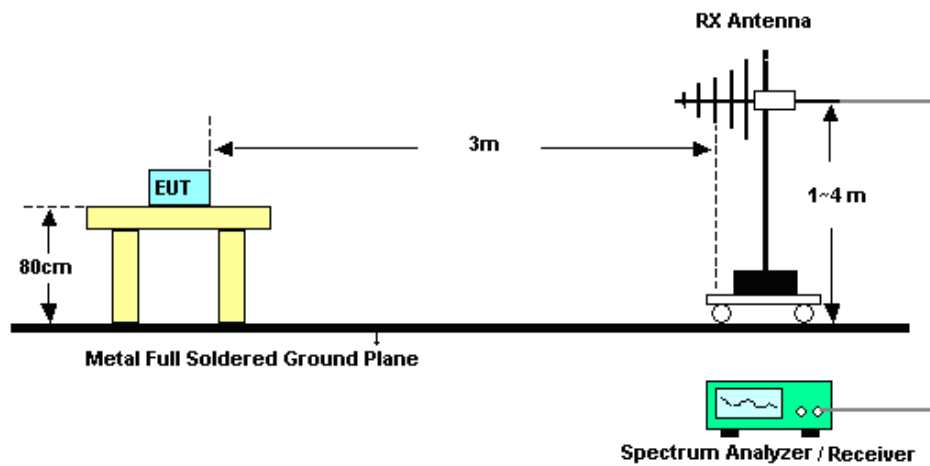

For radiated emissions above 1GHz

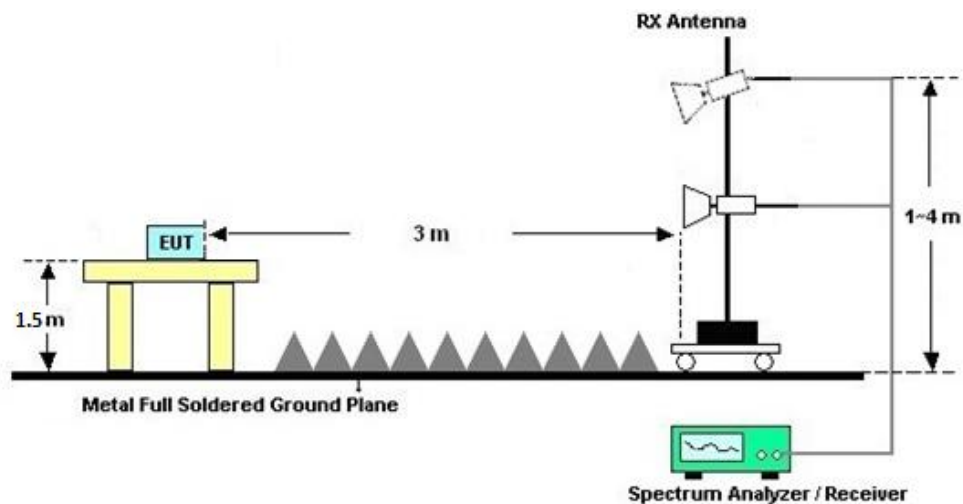



3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

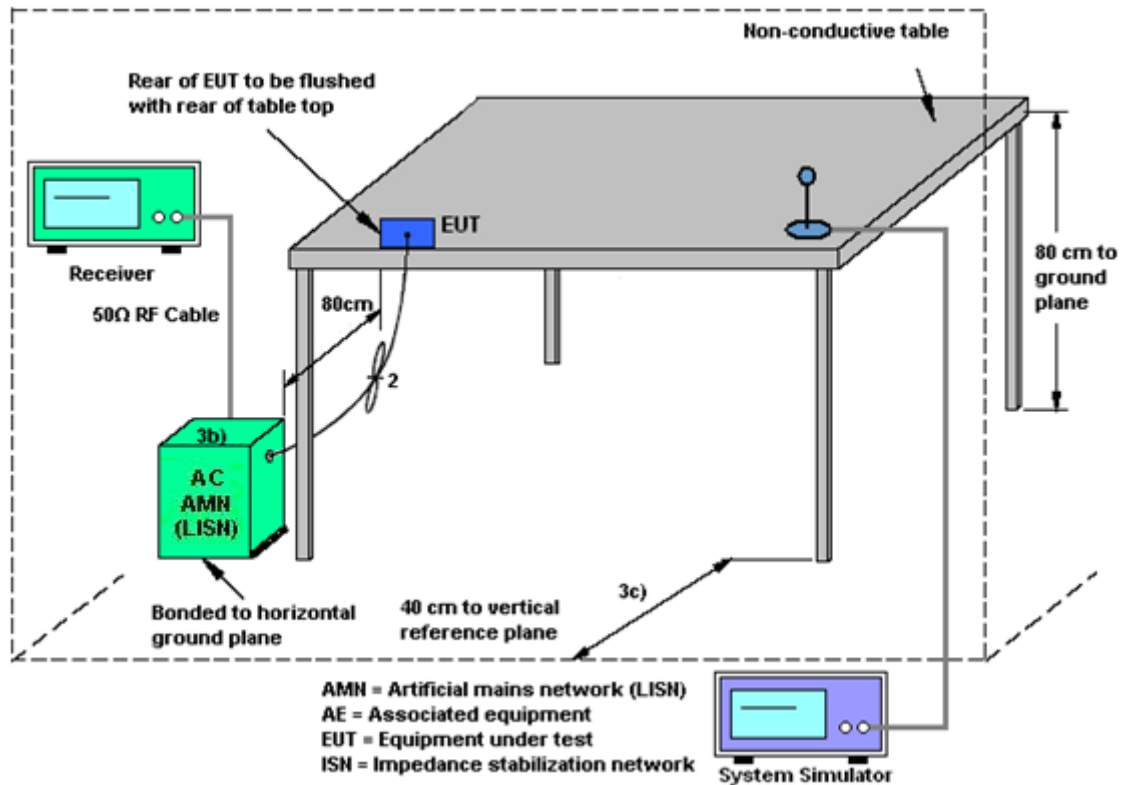

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 09, 2024	Apr. 01, 2025~ Apr. 14, 2025	Apr. 08, 2025	Conducted (TH01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025		Apr. 01, 2026	Conducted (TH01-SZ)
Power Sensor	Anritsu	MA24440A	11707	50MHz~40GHz	Jan. 02, 2025	Apr. 01, 2025~ Apr. 14, 2025	Jan. 01, 2026	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 21, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 21, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec.25, 2024	May 21, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY522601 85	20Hz~26.5GHz	Dec. 25, 2024	May 17, 2025~ May 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	May 17, 2025~ May 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	May 17, 2025~ May 18, 2025	Dec. 27, 2025	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	May 17, 2025~ May 18, 2025	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	May 17, 2025~ May 18, 2025	Jul. 03, 2025	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 03, 2025	May 17, 2025~ May 18, 2025	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2024	May 17, 2025~ May 18, 2025	Dec. 24, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101 800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	May 17, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY532701 05	0.5GHz~26.5Ghz	Oct. 14, 2024	May 17, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-H G	1871923	18GHz~40GHz	Jul. 03, 2024	May 17, 2025~ May 18, 2025	Jul. 02, 2025	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001 985	N/A	Oct. 14, 2024	May 17, 2025~ May 18, 2025	Oct. 13, 2025	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 17, 2025~ May 18, 2025	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 17, 2025~ May 18, 2025	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wen Shiwei	Temperature:	21~25	°C
Test Date:	2025/4/1~2025/4/14	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.025	0.672	0.50	Pass
BLE	1Mbps	1	19	2440	1.025	0.672	0.50	Pass
BLE	1Mbps	1	39	2480	1.027	0.670	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	0.90	Default	30.00	-5.23	-4.33	36.00	Pass
BLE	1Mbps	1	19	2440	0.63	Default	30.00	-5.23	-4.60	36.00	Pass
BLE	1Mbps	1	39	2480	1.72	Default	30.00	-5.23	-3.51	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.05	0.50	Default	30.00	-5.23	-4.73	36.00	Pass
BLE	1Mbps	1	19	2440	2.05	0.30	Default	30.00	-5.23	-4.93	36.00	Pass
BLE	1Mbps	1	39	2480	2.05	1.40	Default	30.00	-5.23	-3.83	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.22	-13.33	-5.23	8.00	Pass
BLE	1Mbps	1	19	2440	1.12	-13.37	-5.23	8.00	Pass
BLE	1Mbps	1	39	2480	1.20	-13.34	-5.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.034	1.144	0.50	Pass
BLE	2Mbps	1	19	2440	2.034	1.160	0.50	Pass
BLE	2Mbps	1	39	2480	2.034	1.148	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	1.06	Default	30.00	-5.23	-4.17	36.00	Pass
BLE	2Mbps	1	19	2440	0.78	Default	30.00	-5.23	-4.45	36.00	Pass
BLE	2Mbps	1	39	2480	1.81	Default	30.00	-5.23	-3.42	36.00	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	4.88	0.60	Default	30.00	-5.23	-4.63	36.00	Pass
BLE	2Mbps	1	19	2440	4.88	0.40	Default	30.00	-5.23	-4.83	36.00	Pass
BLE	2Mbps	1	39	2480	4.88	1.50	Default	30.00	-5.23	-3.73	36.00	Pass


TEST RESULTS DATA
Peak Power Density


Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	0.51	-17.66	-5.23	8.00	Pass
BLE	2Mbps	1	19	2440	0.30	-17.71	-5.23	8.00	Pass
BLE	2Mbps	1	39	2480	1.24	-16.89	-5.23	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



Appendix B. AC Conducted Emission Test Results

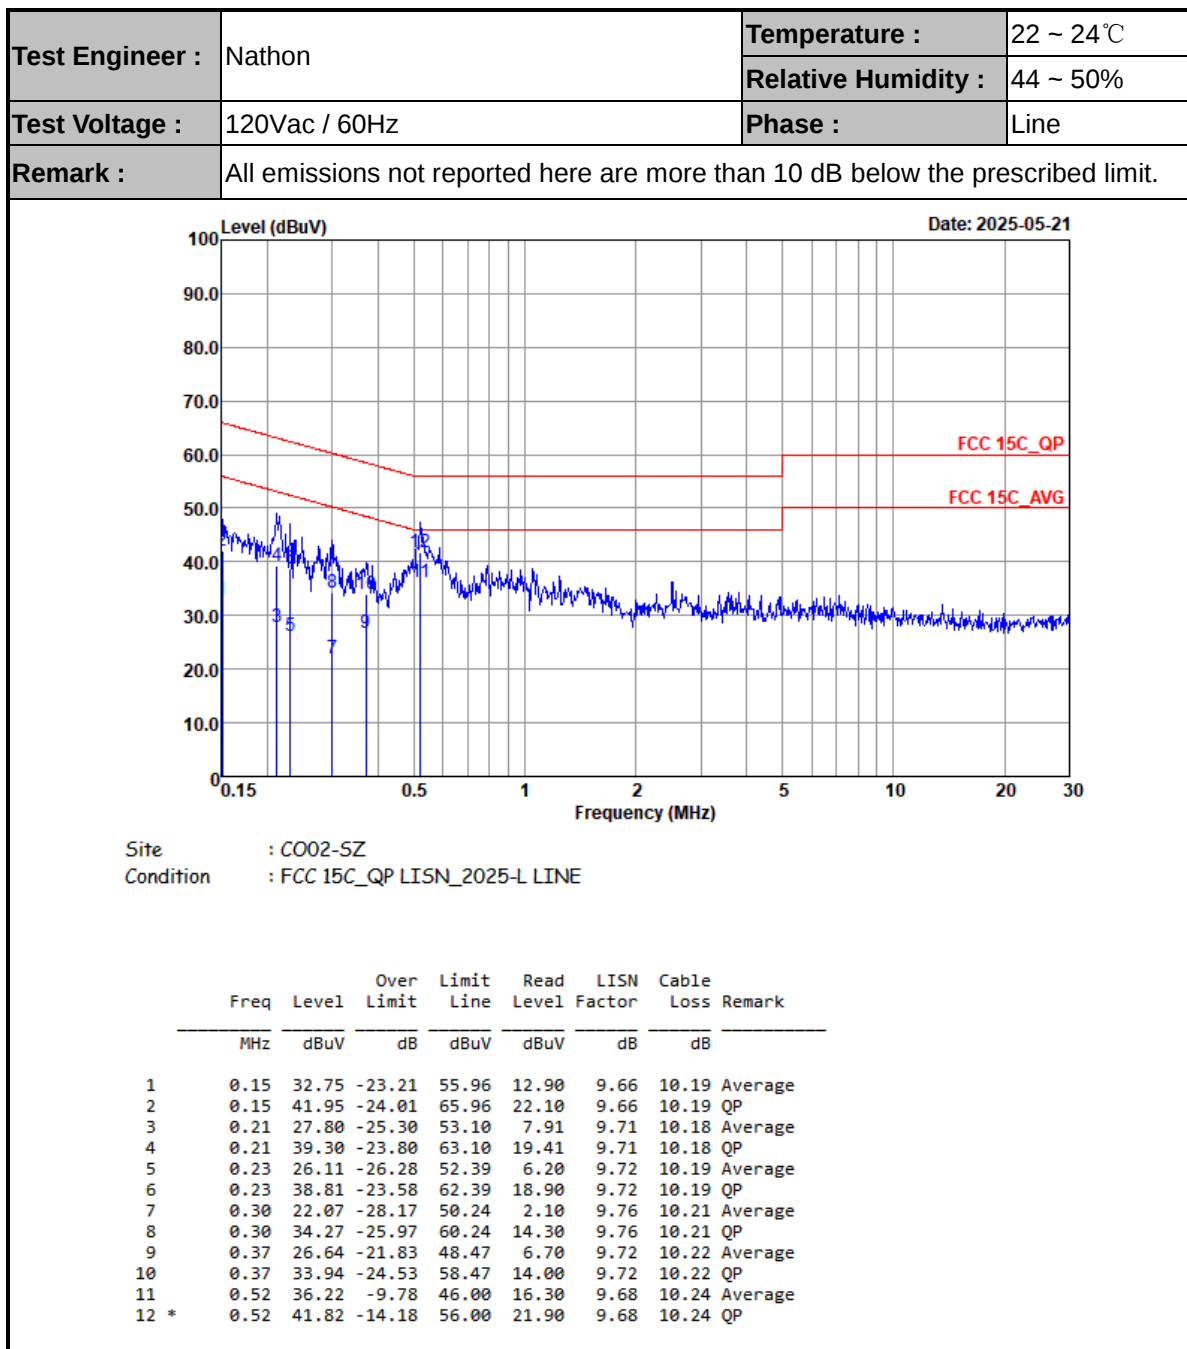

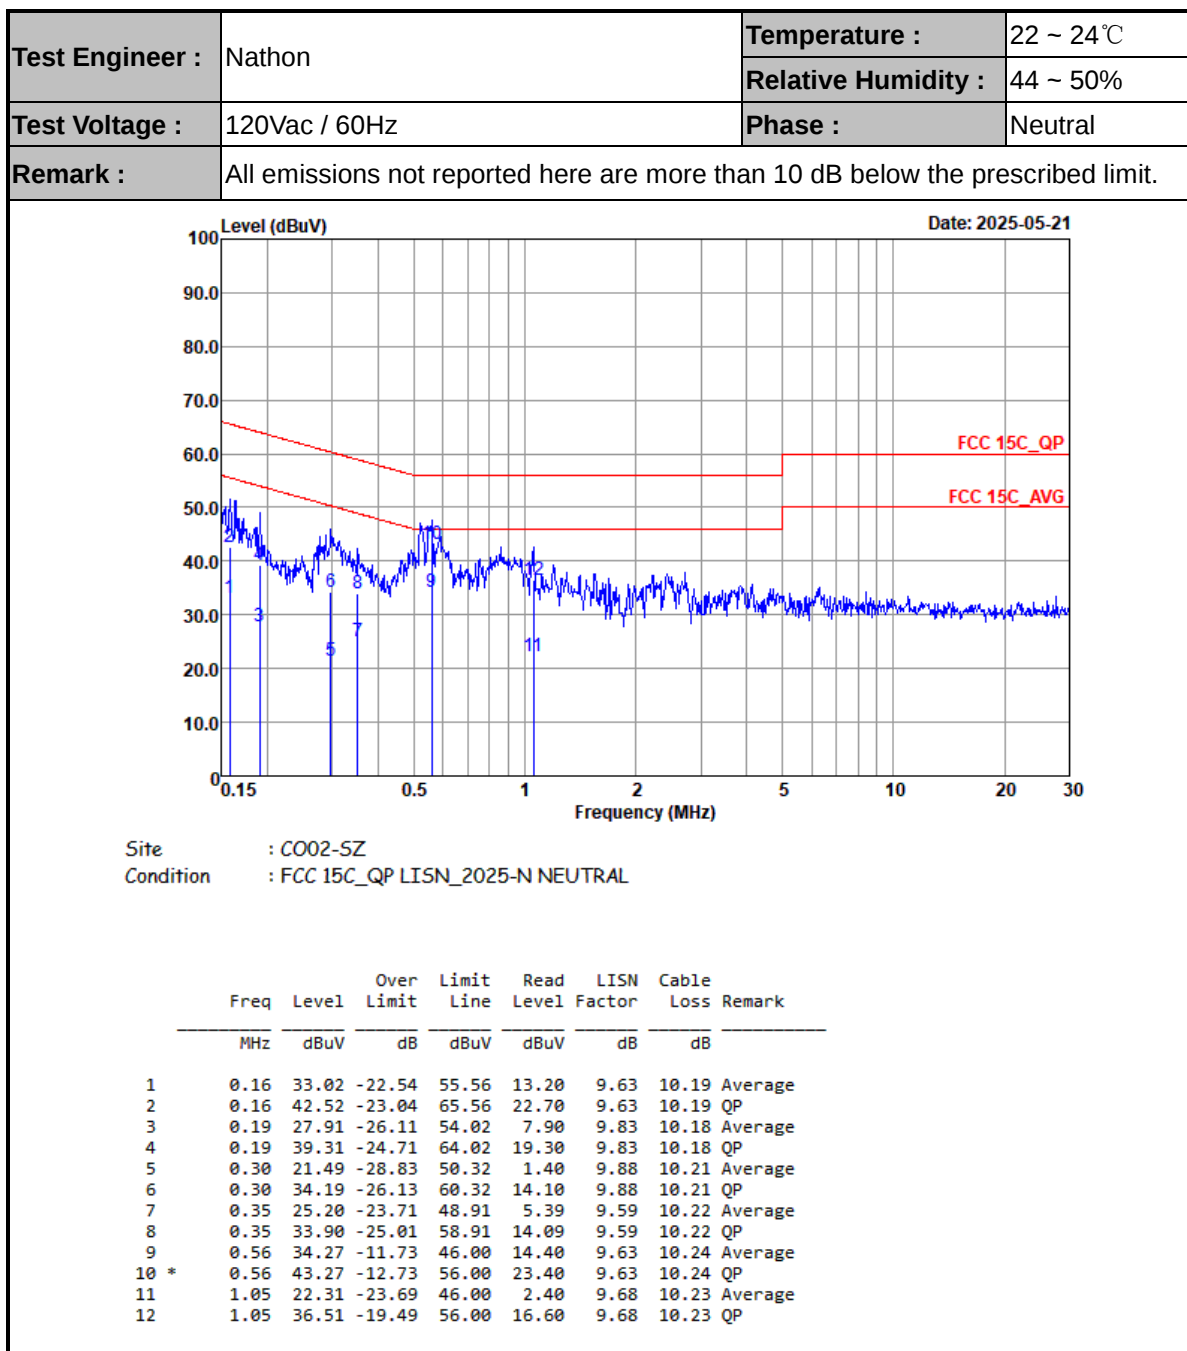

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	HuaCong Liang	Relative Humidity :	50%
		Temperature :	20-22℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 5	2400-2483.5	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 7	2400-2483.5	Bluetooth-LE	39	2480	2Mbps	-	LF
Mode 8	Co-location	Bluetooth-LE	39	2480	2Mbps	-	-
LTE B7 Link							

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2328.48	36.21	54.00	-17.79	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	45.08	74.00	-28.92	H	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	46.43	74.00	-27.57	H	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2495.84	36.51	54.00	-17.49	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	46.15	74.00	-27.85	H	Peak	Pass	Harmonic
4	Bluetooth-LE	00	2384.76	37.84	54.00	-16.16	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	44.58	74.00	-29.42	V	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.68	74.00	-28.32	H	Peak	Pass	Harmonic
6	Bluetooth-LE	39	2483.52	38.75	54.00	-15.25	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	46.11	74.00	-27.89	H	Peak	Pass	Harmonic
7	Bluetooth-LE	39	38.73	36.20	40.00	-3.80	V	Peak	Pass	LF
8	Bluetooth-LE	39	2490.24	38.19	54.00	-15.81	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	46.78	74.00	-27.22	V	Peak	Pass	Harmonic



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2350.01</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>41.26</td><td>30.60</td><td>6.82</td><td>32.66</td><td>149</td><td>360</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2350.01	46.02	74.00	-27.98	41.26	30.60	6.82	32.66	149	360	PEAK	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) PEAK_74 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.23</td><td>-----</td><td>-----</td><td>86.39</td><td>30.60</td><td>6.88</td><td>32.64</td><td>149</td><td>360</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.23	-----	-----	86.39	30.60	6.88	32.64	149	360	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2350.01	46.02	74.00	-27.98	41.26	30.60	6.82	32.66	149	360	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	91.23	-----	-----	86.39	30.60	6.88	32.64	149	360	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2341.50</td><td>36.14</td><td>54.00</td><td>-17.86</td><td>31.39</td><td>30.60</td><td>6.81</td><td>32.66</td><td>149</td><td>360</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2341.50	36.14	54.00	-17.86	31.39	30.60	6.81	32.66	149	360	AVERAGE	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) AVG_54 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>90.94</td><td>-----</td><td>-----</td><td>86.10</td><td>30.60</td><td>6.88</td><td>32.64</td><td>149</td><td>360</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.94	-----	-----	86.10	30.60	6.88	32.64	149	360	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2341.50	36.14	54.00	-17.86	31.39	30.60	6.81	32.66	149	360	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	90.94	-----	-----	86.10	30.60	6.88	32.64	149	360	AVERAGE																																																																							



Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2359.25</td><td>46.05</td><td>74.00</td><td>-27.95</td><td>41.28</td><td>30.60</td><td>6.83</td><td>32.66</td><td>129</td><td>177</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2359.25	46.05	74.00	-27.95	41.28	30.60	6.83	32.66	129	177	PEAK	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.42</td><td>-----</td><td>-----</td><td>88.58</td><td>30.60</td><td>6.88</td><td>32.64</td><td>129</td><td>177</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.42	-----	-----	88.58	30.60	6.88	32.64	129	177	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2359.25	46.05	74.00	-27.95	41.28	30.60	6.83	32.66	129	177	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	93.42	-----	-----	88.58	30.60	6.88	32.64	129	177	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2328.48</td><td>36.21</td><td>54.00</td><td>-17.79</td><td>31.48</td><td>30.60</td><td>6.80</td><td>32.67</td><td>129</td><td>177</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2328.48	36.21	54.00	-17.79	31.48	30.60	6.80	32.67	129	177	AVERAGE	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>92.52</td><td>-----</td><td>-----</td><td>87.68</td><td>30.60</td><td>6.88</td><td>32.64</td><td>129</td><td>177</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.52	-----	-----	87.68	30.60	6.88	32.64	129	177	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2328.48	36.21	54.00	-17.79	31.48	30.60	6.80	32.67	129	177	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	92.52	-----	-----	87.68	30.60	6.88	32.64	129	177	AVERAGE																																																																							







Mode	1																																																																																														
	Harmonic																																																																																														
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																														
Pol.	Horizontal										Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>45.08</td><td>74.00</td><td>-28.92</td><td>52.25</td><td>35.30</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	45.08	74.00	-28.92	52.25	35.30	10.11	52.58	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>51.17</td><td>35.30</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	44.00	74.00	-30.00	51.17	35.30	10.11	52.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	4804.00	45.08	74.00	-28.92	52.25	35.30	10.11	52.58	---	---	Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	4804.00	44.00	74.00	-30.00	51.17	35.30	10.11	52.58	---	---	Peak																																																																																				



Mode	2																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>44.57</td><td>74.00</td><td>-29.43</td><td>51.56</td><td>35.36</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.43</td><td>74.00</td><td>-27.57</td><td>50.09</td><td>36.56</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	44.57	74.00	-29.43	51.56	35.36	10.28	52.63	---	---	Peak	2	7320.00	46.43	74.00	-27.57	50.09	36.56	12.01	52.23	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>50.70</td><td>35.36</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>49.21</td><td>36.56</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	43.71	74.00	-30.29	50.70	35.36	10.28	52.63	---	---	Peak	2	7320.00	45.55	74.00	-28.45	49.21	36.56	12.01	52.23	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4880.00	44.57	74.00	-29.43	51.56	35.36	10.28	52.63	---	---	Peak																																																																																																									
2	7320.00	46.43	74.00	-27.57	50.09	36.56	12.01	52.23	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4880.00	43.71	74.00	-30.29	50.70	35.36	10.28	52.63	---	---	Peak																																																																																																									
2	7320.00	45.55	74.00	-28.45	49.21	36.56	12.01	52.23	---	---	Peak																																																																																																									

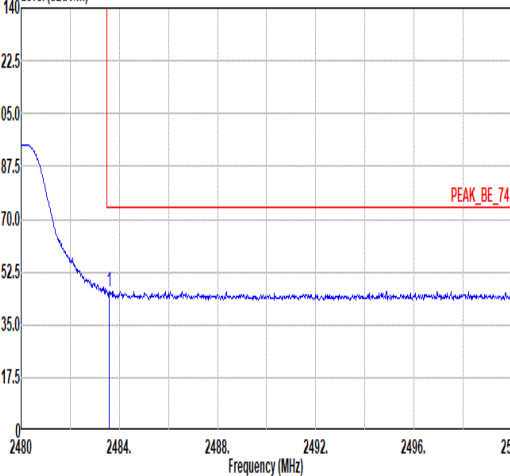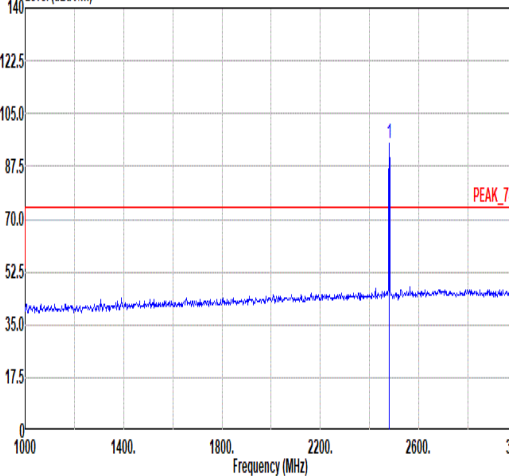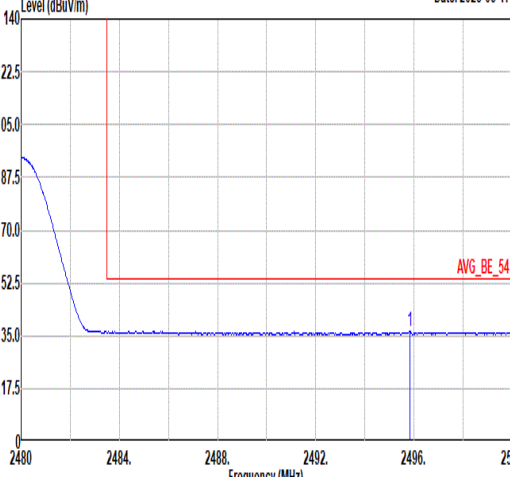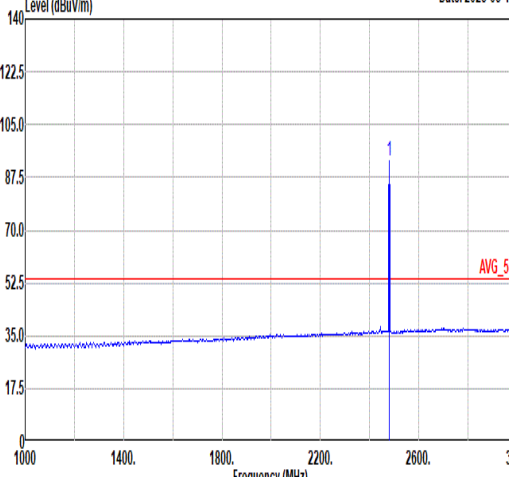

Mode	3																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-05-17  PEAK_BE_74 Frequency (MHz)					Level (dBuV/m) Date: 2025-05-17  PEAK_74 Frequency (MHz)																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.58</td><td>46.14</td><td>74.00</td><td>-27.86</td><td>41.14</td><td>30.63</td><td>6.98</td><td>32.61</td><td>161</td><td>354 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.58	46.14	74.00	-27.86	41.14	30.63	6.98	32.61	161	354 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>94.89</td><td>-----</td><td>-----</td><td>89.89</td><td>30.64</td><td>6.97</td><td>32.61</td><td>161</td><td>354 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.89	-----	-----	89.89	30.64	6.97	32.61	161
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.58	46.14	74.00	-27.86	41.14	30.63	6.98	32.61	161	354 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	94.89	-----	-----	89.89	30.64	6.97	32.61	161	354 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-05-17  AVG_BE_54 Frequency (MHz)					Level (dBuV/m) Date: 2025-05-17  AVG_54 Frequency (MHz)																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2495.84</td><td>36.51</td><td>54.00</td><td>-17.49</td><td>31.51</td><td>30.61</td><td>6.99</td><td>32.60</td><td>161</td><td>354 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2495.84	36.51	54.00	-17.49	31.51	30.61	6.99	32.60	161	354 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>93.11</td><td>-----</td><td>-----</td><td>88.11</td><td>30.64</td><td>6.97</td><td>32.61</td><td>161</td><td>354 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.11	-----	-----	88.11	30.64	6.97	32.61	161
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2495.84	36.51	54.00	-17.49	31.51	30.61	6.99	32.60	161	354 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	93.11	-----	-----	88.11	30.64	6.97	32.61	161	354 AVERAGE																																																																																	



3

Mode

Band Edge



2400-2483.5_Bluetooth-LE_CH39_2480MHz

Pol.



Vertical

Fundamental

Peak

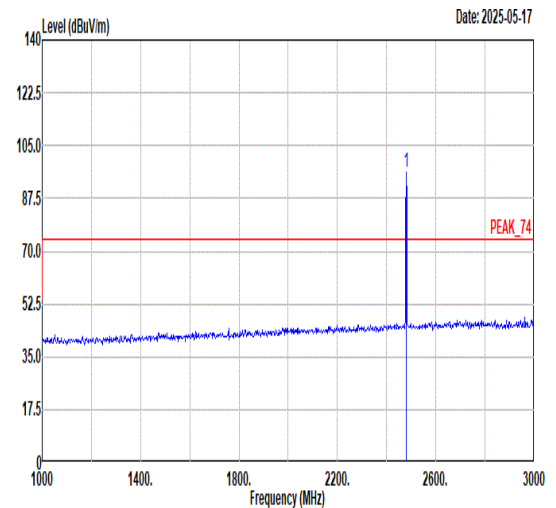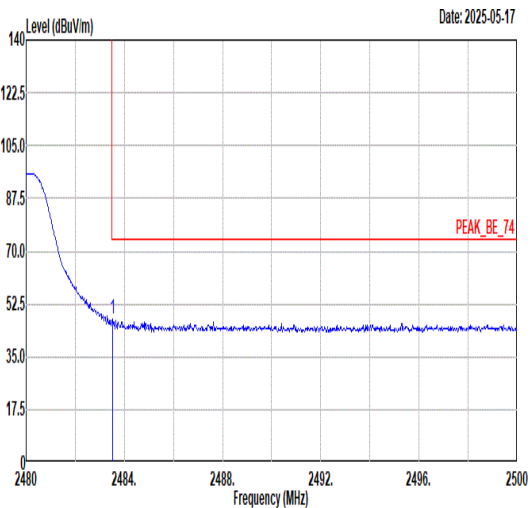





Avg

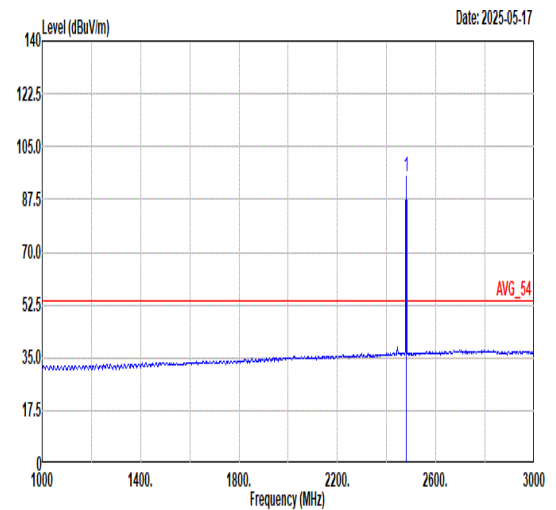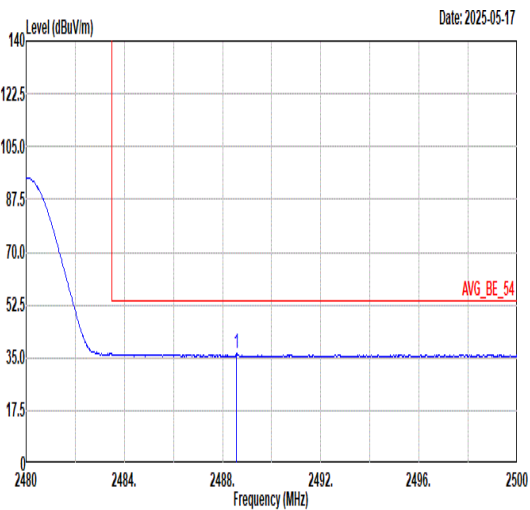



Mode	3																																																																																																																		
	Harmonic																																																																																																																		
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																		
Pol.	Horizontal										Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.34</td><td>74.00</td><td>-29.66</td><td>50.96</td><td>35.72</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>49.83</td><td>36.60</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.34	74.00	-29.66	50.96	35.72	10.34	52.68	---	---	Peak	2	7440.00	46.15	74.00	-27.85	49.83	36.60	12.00	52.28	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.61</td><td>74.00</td><td>-29.39</td><td>51.23</td><td>35.72</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>49.17</td><td>36.60</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	44.61	74.00	-29.39	51.23	35.72	10.34	52.68	---	---	Peak	2	7440.00	45.49	74.00	-28.51	49.17	36.60	12.00	52.28	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4960.00	44.34	74.00	-29.66	50.96	35.72	10.34	52.68	---	---	Peak																																																																																																								
2	7440.00	46.15	74.00	-27.85	49.83	36.60	12.00	52.28	---	---	Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4960.00	44.61	74.00	-29.39	51.23	35.72	10.34	52.68	---	---	Peak																																																																																																								
2	7440.00	45.49	74.00	-28.51	49.17	36.60	12.00	52.28	---	---	Peak																																																																																																								

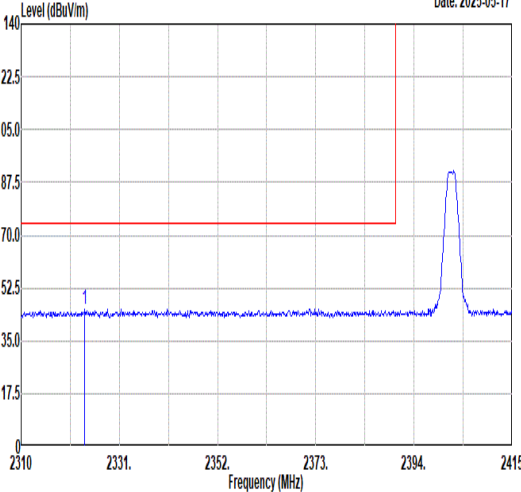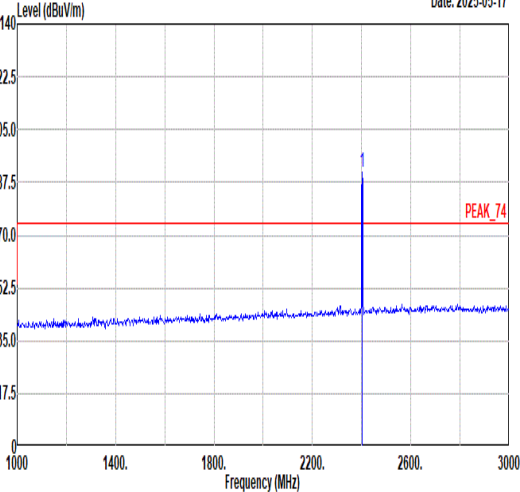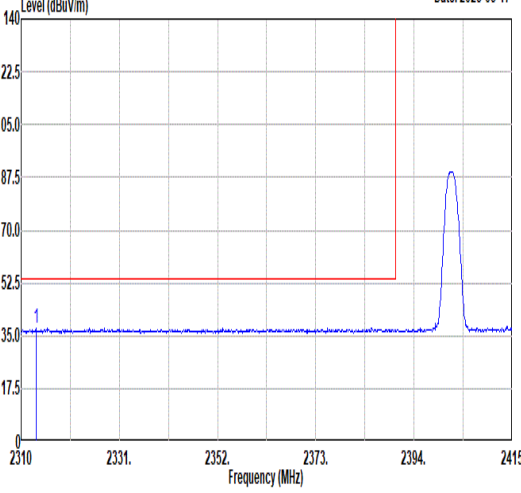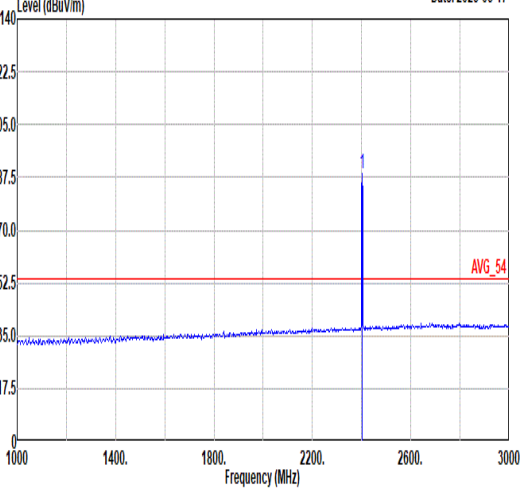

Mode	4																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2323.65</td><td>45.58</td><td>74.00</td><td>-28.42</td><td>40.86</td><td>30.60</td><td>6.79</td><td>32.67</td><td>168 360 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2323.65	45.58	74.00	-28.42	40.86	30.60	6.79	32.67	168 360 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>90.78</td><td>-----</td><td>85.94</td><td>30.60</td><td>6.88</td><td>32.64</td><td>168</td><td>360 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	90.78	-----	85.94	30.60	6.88	32.64	168
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2323.65	45.58	74.00	-28.42	40.86	30.60	6.79	32.67	168 360 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	90.78	-----	85.94	30.60	6.88	32.64	168	360 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2313.15</td><td>37.77</td><td>54.00</td><td>-16.23</td><td>33.06</td><td>30.60</td><td>6.78</td><td>32.67</td><td>168 360 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2313.15	37.77	54.00	-16.23	33.06	30.60	6.78	32.67	168 360 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>88.68</td><td>-----</td><td>83.84</td><td>30.60</td><td>6.88</td><td>32.64</td><td>168</td><td>360 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	88.68	-----	83.84	30.60	6.88	32.64	168
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2313.15	37.77	54.00	-16.23	33.06	30.60	6.78	32.67	168 360 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2402.00	88.68	-----	83.84	30.60	6.88	32.64	168	360 AVERAGE																																																																																





Mode	4																																																																																		
	Band Edge																																																																																		
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																		
Pol.	Vertical										Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2338.67</td><td>45.61</td><td>74.00</td><td>-28.39</td><td>40.86</td><td>30.60</td><td>6.81</td><td>32.66</td><td>128</td><td>193</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2338.67	45.61	74.00	-28.39	40.86	30.60	6.81	32.66	128	193	PEAK	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>93.08</td><td>-----</td><td>-----</td><td>88.24</td><td>30.60</td><td>6.88</td><td>32.64</td><td>128</td><td>193</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	93.08	-----	-----	88.24	30.60	6.88	32.64	128	193	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2338.67	45.61	74.00	-28.39	40.86	30.60	6.81	32.66	128	193	PEAK																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	93.08	-----	-----	88.24	30.60	6.88	32.64	128	193	PEAK																																																																								
Avg	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2384.76</td><td>37.84</td><td>54.00</td><td>-16.16</td><td>33.03</td><td>30.60</td><td>6.86</td><td>32.65</td><td>128</td><td>193</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2384.76	37.84	54.00	-16.16	33.03	30.60	6.86	32.65	128	193	AVERAGE	Level (dBuV/m) Date: 2025-05-17 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>91.23</td><td>-----</td><td>-----</td><td>86.39</td><td>30.60</td><td>6.88</td><td>32.64</td><td>128</td><td>193</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2402.00	91.23	-----	-----	86.39	30.60	6.88	32.64	128	193	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2384.76	37.84	54.00	-16.16	33.03	30.60	6.86	32.65	128	193	AVERAGE																																																																								
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2402.00	91.23	-----	-----	86.39	30.60	6.88	32.64	128	193	AVERAGE																																																																								



Mode	4																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																															
Pol.	Horizontal											Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-05-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>43.89</td><td>74.00</td><td>-30.11</td><td>51.06</td><td>35.30</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	43.89	74.00	-30.11	51.06	35.30	10.11	52.58	---	---	Peak	Level (dBuV/m) Date: 2025-05-17 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>51.75</td><td>35.30</td><td>10.11</td><td>52.58</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4804.00	44.58	74.00	-29.42	51.75	35.30	10.11	52.58	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4804.00	43.89	74.00	-30.11	51.06	35.30	10.11	52.58	---	---	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	4804.00	44.58	74.00	-29.42	51.75	35.30	10.11	52.58	---	---	Peak																																																																																					

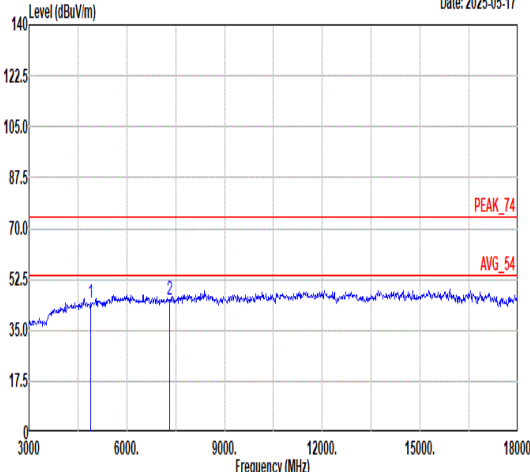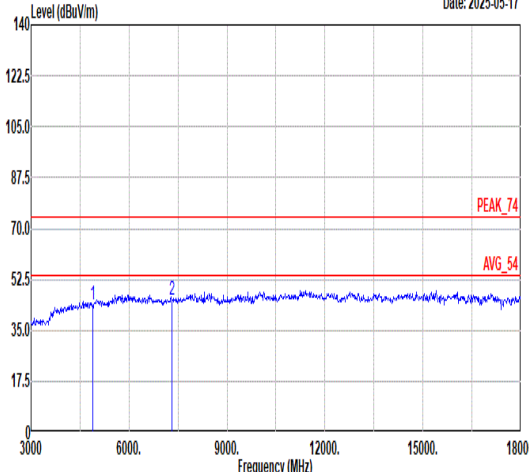

Mode	5																																																																																																																			
	Harmonic																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>44.30</td><td>74.00</td><td>-29.70</td><td>51.29</td><td>35.36</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.68</td><td>74.00</td><td>-28.32</td><td>49.34</td><td>36.56</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	44.30	74.00	-29.70	51.29	35.36	10.28	52.63	---	---	Peak	2	7320.00	45.68	74.00	-28.32	49.34	36.56	12.01	52.23	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>43.70</td><td>74.00</td><td>-30.30</td><td>50.69</td><td>35.36</td><td>10.28</td><td>52.63</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.58</td><td>74.00</td><td>-28.42</td><td>49.24</td><td>36.56</td><td>12.01</td><td>52.23</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	43.70	74.00	-30.30	50.69	35.36	10.28	52.63	---	---	Peak	2	7320.00	45.58	74.00	-28.42	49.24	36.56	12.01	52.23	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4880.00	44.30	74.00	-29.70	51.29	35.36	10.28	52.63	---	---	Peak																																																																																																									
2	7320.00	45.68	74.00	-28.32	49.34	36.56	12.01	52.23	---	---	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	4880.00	43.70	74.00	-30.30	50.69	35.36	10.28	52.63	---	---	Peak																																																																																																									
2	7320.00	45.58	74.00	-28.42	49.24	36.56	12.01	52.23	---	---	Peak																																																																																																									



6

Mode

Band Edge


2400-2483.5_Bluetooth-LE_CH39_2480MHz

Pol.


Horizontal

Fundamental

Peak

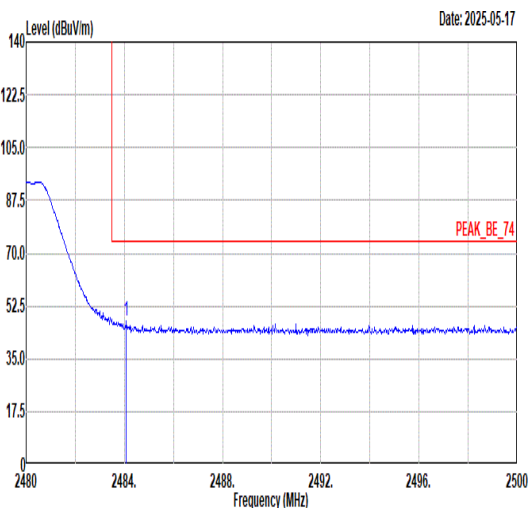


		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dBuV/m		dB/m	dB	dB	cm	deg	
1	2484.08	47.31	74.00	-26.69	42.31	30.63	6.98	32.61	158	359 PEAK

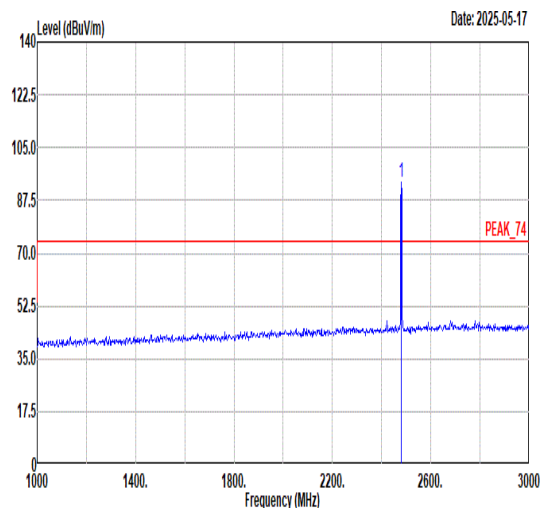


		Limit		Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor				
	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	93.49	-----	-----	88.49	30.64	6.97	32.61	158	359	PEAK

Avg

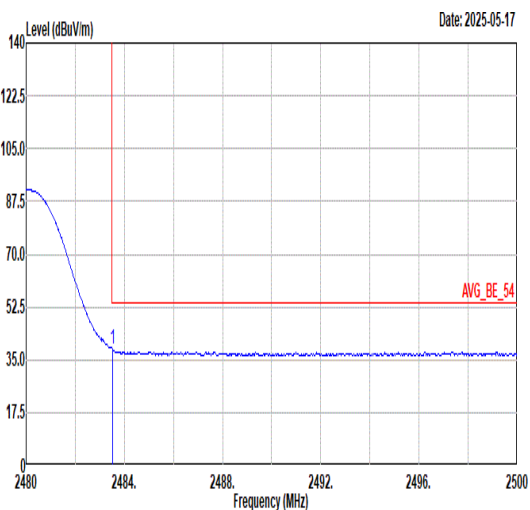

		Limit Margin		Read	Ant	Cable Preamp	APos	TPos	Remark	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			
	MHz	dBuV/m	dBuV/m		dBm	dB	dB	cm	deg	
1	2483.52	38.52	54.00	-15.48	33.52	30.63	6.98	32.61	158	359 AVERAGE

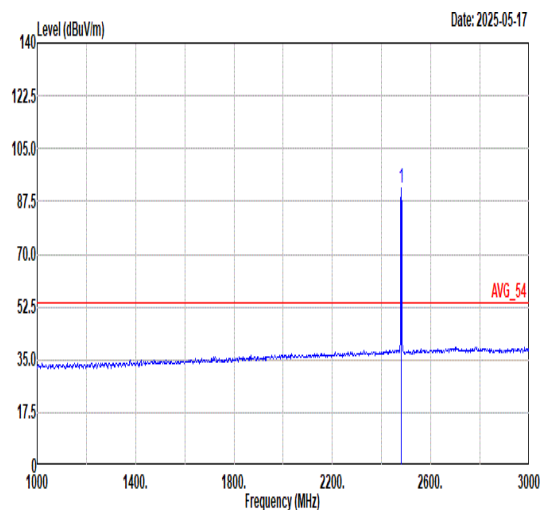

		Limit Margin		Read	Ant	Cable Preamp	APos	TPos	Remark
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	2480.00	91.87	-----	86.87	30.64	6.97	32.61	158	359 AVERAGE



6

Mode

Band Edge


2400-2483.5_Bluetooth-LE_CH39_2480MHz

Pol.


Vertical

Fundamental

Peak

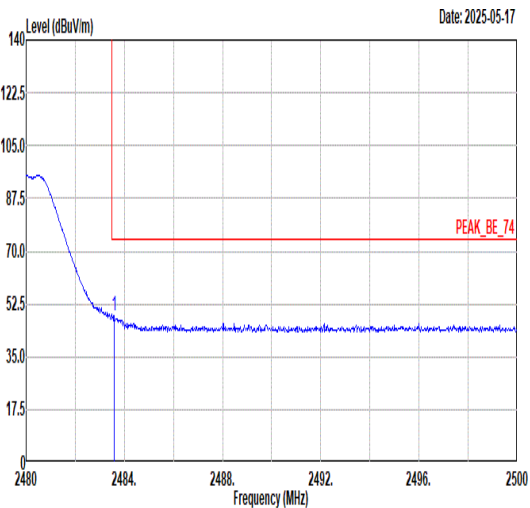


		Limit Margin		Read	Ant	Cable	Preamp	APos	TPos	Remark	
Freq	Level	Line	(db)	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		
1	2483.58	48.63	74.00	-25.37	43.63	30.63	6.98	32.61	124		203

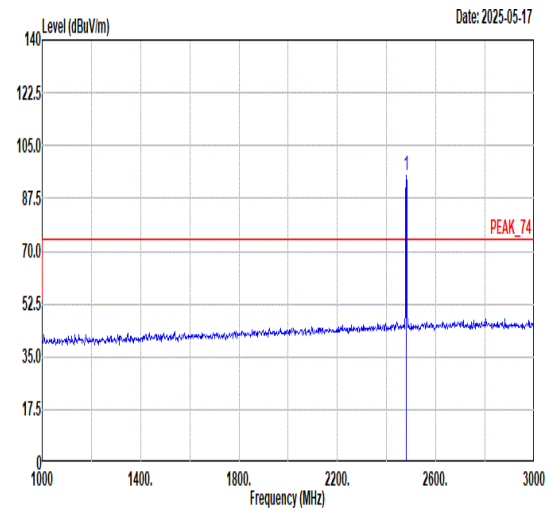


		Limit Margin		Read	Ant	Cable Preamp		APos	TPos	Remark
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	95.31	-----	90.31	30.64	6.97	32.61	124	203	

Avg

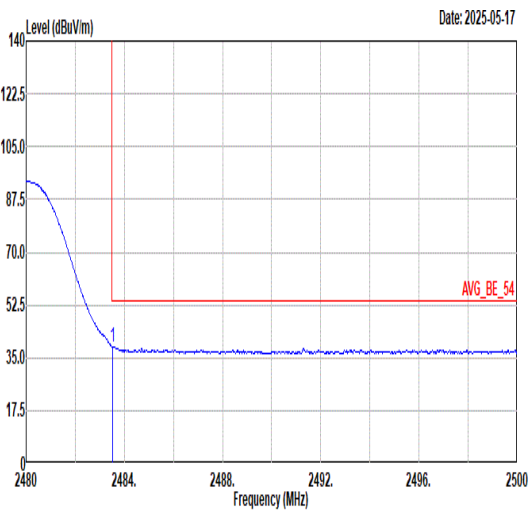

		Limit Margin		Read	Ant	Cable Preamp		APos	TPos	Remark	
Freq	Level	Line	(db)	Level	Factor	Loss	Factor				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		
1	2483.52	38.75	54.00	-15.25	33.75	30.63	6.98	32.61	124	203	AVERAGE


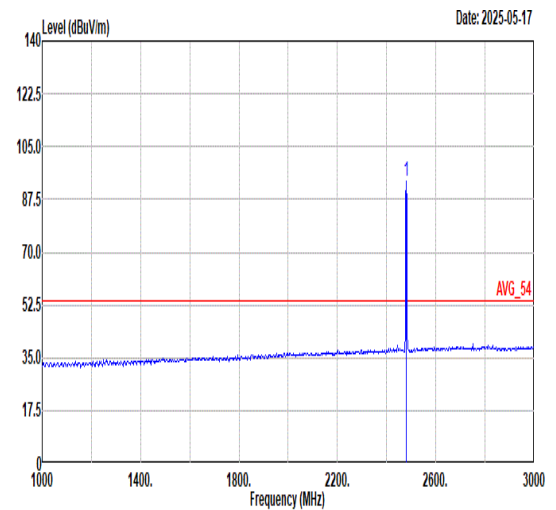


		Limit Margin		Read	Ant	Cable Preamp		APos	TPos	Remark
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	
1	2480.00	93.41	-----	88.41	30.64	6.97	32.61	124	203	



Mode	6																																																																				
	Harmonic																																																																				
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																				
Pol.	Horizontal																																																																				
Peak Avg	Level (dBuV/m) Date: 2025-05-18 <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.92</td><td>74.00</td><td>-29.08</td><td>51.54</td><td>35.72</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.11</td><td>74.00</td><td>-27.89</td><td>49.79</td><td>36.60</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	44.92	74.00	-29.08	51.54	35.72	10.34	52.68	---	---	Peak	2	7440.00	46.11	74.00	-27.89	49.79	36.60	12.00	52.28	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4960.00	44.92	74.00	-29.08	51.54	35.72	10.34	52.68	---	---	Peak																																																										
2	7440.00	46.11	74.00	-27.89	49.79	36.60	12.00	52.28	---	---	Peak																																																										
Level (dBuV/m) Date: 2025-05-18 <table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>44.43</td><td>74.00</td><td>-29.57</td><td>51.05</td><td>35.72</td><td>10.34</td><td>52.68</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>45.49</td><td>74.00</td><td>-28.51</td><td>49.17</td><td>36.60</td><td>12.00</td><td>52.28</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	44.43	74.00	-29.57	51.05	35.72	10.34	52.68	---	---	Peak	2	7440.00	45.49	74.00	-28.51	49.17	36.60	12.00	52.28	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4960.00	44.43	74.00	-29.57	51.05	35.72	10.34	52.68	---	---	Peak																																																										
2	7440.00	45.49	74.00	-28.51	49.17	36.60	12.00	52.28	---	---	Peak																																																										

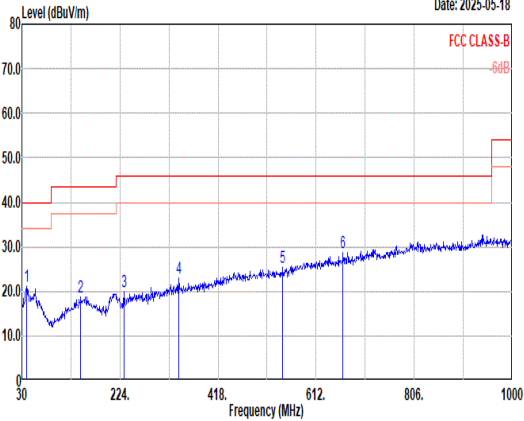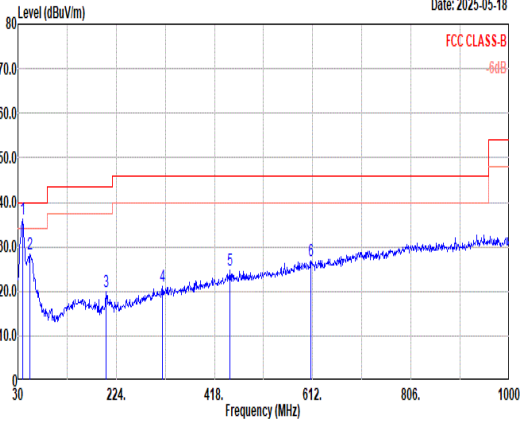





Mode	7																																																																																																																																																																																																				
	LF																																																																																																																																																																																																				
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																																				
Pol.	Horizontal					Vertical																																																																																																																																																																																															
Peak																																																																																																																																																																																																					
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>39.70</td><td>20.99</td><td>40.00</td><td>-19.01</td><td>40.01</td><td>19.73</td><td>1.16</td><td>39.91</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>146.40</td><td>18.67</td><td>43.50</td><td>-24.83</td><td>37.11</td><td>19.40</td><td>2.19</td><td>40.03</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>232.73</td><td>19.79</td><td>46.00</td><td>-26.21</td><td>39.32</td><td>17.68</td><td>2.76</td><td>39.97</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>340.40</td><td>23.03</td><td>46.00</td><td>-22.97</td><td>38.80</td><td>20.77</td><td>3.32</td><td>39.86</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>546.04</td><td>25.42</td><td>46.00</td><td>-20.58</td><td>36.24</td><td>24.64</td><td>4.21</td><td>39.67</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>665.35</td><td>28.82</td><td>46.00</td><td>-17.18</td><td>37.29</td><td>26.48</td><td>4.64</td><td>39.59</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	39.70	20.99	40.00	-19.01	40.01	19.73	1.16	39.91	---	---	Peak	2	146.40	18.67	43.50	-24.83	37.11	19.40	2.19	40.03	---	---	Peak	3	232.73	19.79	46.00	-26.21	39.32	17.68	2.76	39.97	---	---	Peak	4	340.40	23.03	46.00	-22.97	38.80	20.77	3.32	39.86	---	---	Peak	5	546.04	25.42	46.00	-20.58	36.24	24.64	4.21	39.67	---	---	Peak	6	665.35	28.82	46.00	-17.18	37.29	26.48	4.64	39.59	---	---	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>38.73</td><td>36.20</td><td>40.00</td><td>-3.80</td><td>55.30</td><td>19.65</td><td>1.15</td><td>39.90</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>54.25</td><td>28.41</td><td>40.00</td><td>-11.59</td><td>46.82</td><td>20.19</td><td>1.35</td><td>39.95</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>204.60</td><td>20.03</td><td>43.50</td><td>-23.47</td><td>40.93</td><td>16.49</td><td>2.60</td><td>39.99</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>315.18</td><td>21.19</td><td>46.00</td><td>-24.81</td><td>37.82</td><td>20.08</td><td>3.20</td><td>39.91</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>449.04</td><td>24.75</td><td>46.00</td><td>-21.25</td><td>37.52</td><td>23.14</td><td>3.82</td><td>39.73</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>608.12</td><td>26.99</td><td>46.00</td><td>-19.01</td><td>36.27</td><td>25.89</td><td>4.46</td><td>39.63</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	38.73	36.20	40.00	-3.80	55.30	19.65	1.15	39.90	---	---	Peak	2	54.25	28.41	40.00	-11.59	46.82	20.19	1.35	39.95	---	---	Peak	3	204.60	20.03	43.50	-23.47	40.93	16.49	2.60	39.99	---	---	Peak	4	315.18	21.19	46.00	-24.81	37.82	20.08	3.20	39.91	---	---	Peak	5	449.04	24.75	46.00	-21.25	37.52	23.14	3.82	39.73	---	---	Peak	6	608.12	26.99	46.00	-19.01	36.27	25.89	4.46	39.63	---	---
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																											
1	39.70	20.99	40.00	-19.01	40.01	19.73	1.16	39.91	---	---	Peak																																																																																																																																																																																										
2	146.40	18.67	43.50	-24.83	37.11	19.40	2.19	40.03	---	---	Peak																																																																																																																																																																																										
3	232.73	19.79	46.00	-26.21	39.32	17.68	2.76	39.97	---	---	Peak																																																																																																																																																																																										
4	340.40	23.03	46.00	-22.97	38.80	20.77	3.32	39.86	---	---	Peak																																																																																																																																																																																										
5	546.04	25.42	46.00	-20.58	36.24	24.64	4.21	39.67	---	---	Peak																																																																																																																																																																																										
6	665.35	28.82	46.00	-17.18	37.29	26.48	4.64	39.59	---	---	Peak																																																																																																																																																																																										
	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																											
1	38.73	36.20	40.00	-3.80	55.30	19.65	1.15	39.90	---	---	Peak																																																																																																																																																																																										
2	54.25	28.41	40.00	-11.59	46.82	20.19	1.35	39.95	---	---	Peak																																																																																																																																																																																										
3	204.60	20.03	43.50	-23.47	40.93	16.49	2.60	39.99	---	---	Peak																																																																																																																																																																																										
4	315.18	21.19	46.00	-24.81	37.82	20.08	3.20	39.91	---	---	Peak																																																																																																																																																																																										
5	449.04	24.75	46.00	-21.25	37.52	23.14	3.82	39.73	---	---	Peak																																																																																																																																																																																										
6	608.12	26.99	46.00	-19.01	36.27	25.89	4.46	39.63	---	---	Peak																																																																																																																																																																																										



Mode	8																																																	
	Band Edge																																																	
	Co-location_Bluetooth-LE_CH39_2480MHz																																																	
Pol.	Horizontal																																																	
Peak																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.70</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>46.46</td><td>30.80</td><td>5.46</td><td>34.11</td><td>382</td><td>352</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.70	48.61	74.00	-25.39	46.46	30.80	5.46	34.11	382	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2483.70	48.61	74.00	-25.39	46.46	30.80	5.46	34.11	382	352	PEAK																																							
Fundamental																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.55</td><td>-----</td><td>-----</td><td>92.40</td><td>30.80</td><td>5.46</td><td>34.11</td><td>382</td><td>352</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	94.55	-----	-----	92.40	30.80	5.46	34.11	382	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2480.00	94.55	-----	-----	92.40	30.80	5.46	34.11	382	352	PEAK																																							
Avg																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>38.04</td><td>54.00</td><td>-15.96</td><td>35.89</td><td>30.80</td><td>5.46</td><td>34.11</td><td>382</td><td>352</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.52	38.04	54.00	-15.96	35.89	30.80	5.46	34.11	382	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2483.52	38.04	54.00	-15.96	35.89	30.80	5.46	34.11	382	352	AVERAGE																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.60</td><td>-----</td><td>-----</td><td>90.45</td><td>30.80</td><td>5.46</td><td>34.11</td><td>382</td><td>352</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	92.60	-----	-----	90.45	30.80	5.46	34.11	382	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																									
1	2480.00	92.60	-----	-----	90.45	30.80	5.46	34.11	382	352	AVERAGE																																							



Note: The frequency point over limit line is LTE Band 7 RF signal which can be ignored.

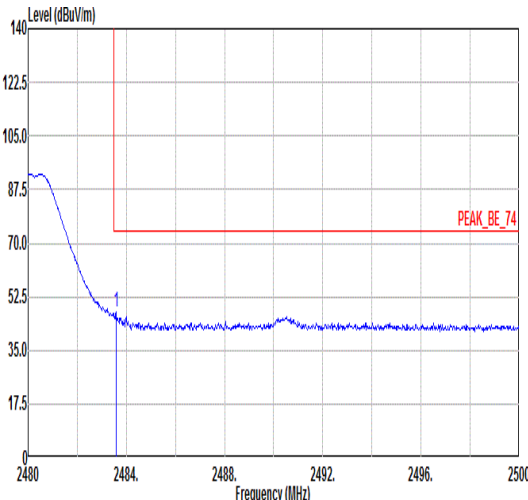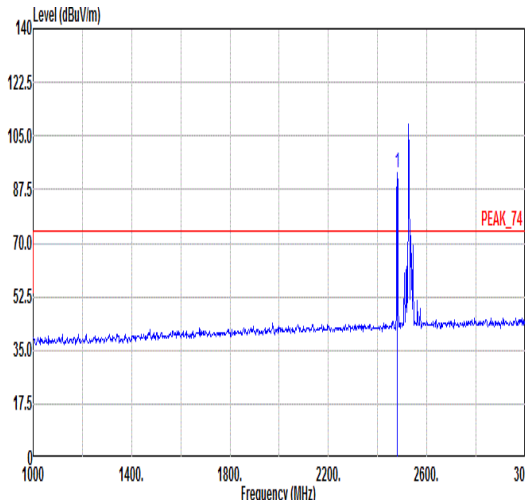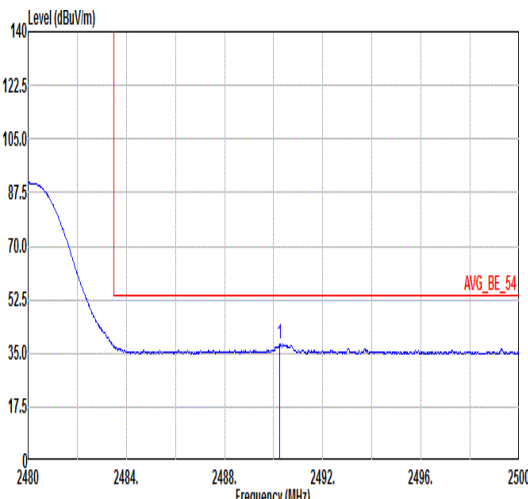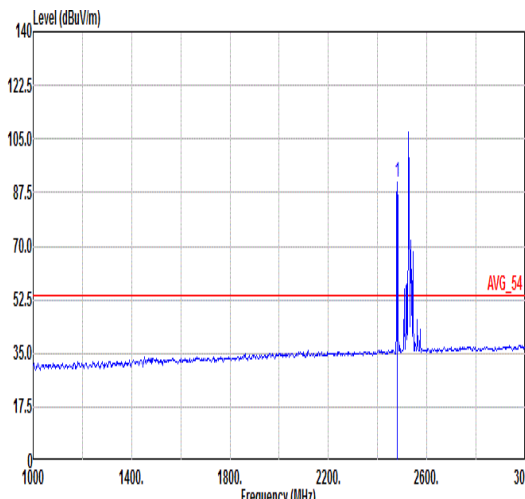

Mode	8																																																																																										
	Band Edge																																																																																										
	Co-location_Bluetooth-LE_CH39_2480MHz																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>45.21</td><td>30.80</td><td>5.46</td><td>34.11</td><td>192</td><td>222</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.58	47.36	74.00	-26.64	45.21	30.80	5.46	34.11	192	222	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.77</td><td>-----</td><td>-----</td><td>90.62</td><td>30.80</td><td>5.46</td><td>34.11</td><td>192</td><td>222</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	92.77	-----	-----	90.62	30.80	5.46	34.11	192	222
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.58	47.36	74.00	-26.64	45.21	30.80	5.46	34.11	192	222	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2480.00	92.77	-----	-----	90.62	30.80	5.46	34.11	192	222	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.24</td><td>38.19</td><td>54.00</td><td>-15.81</td><td>36.02</td><td>30.80</td><td>5.47</td><td>34.10</td><td>192</td><td>222</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2490.24	38.19	54.00	-15.81	36.02	30.80	5.47	34.10	192	222	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.81</td><td>-----</td><td>-----</td><td>88.66</td><td>30.80</td><td>5.46</td><td>34.11</td><td>192</td><td>222</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	90.81	-----	-----	88.66	30.80	5.46	34.11	192	222
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2490.24	38.19	54.00	-15.81	36.02	30.80	5.47	34.10	192	222	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2480.00	90.81	-----	-----	88.66	30.80	5.46	34.11	192	222	AVERAGE																																																																																

Note: The frequency point over limit line is LTE Band 7 RF signal which can be ignored.

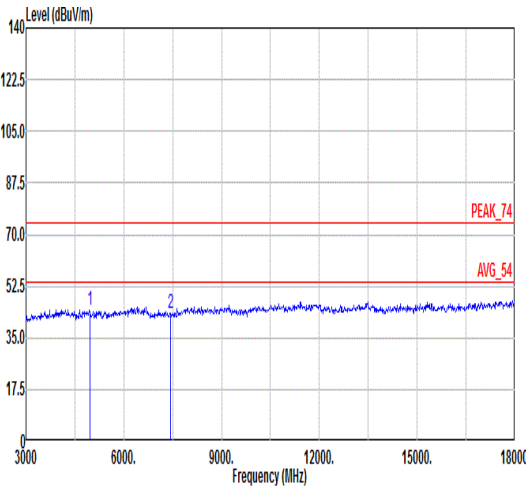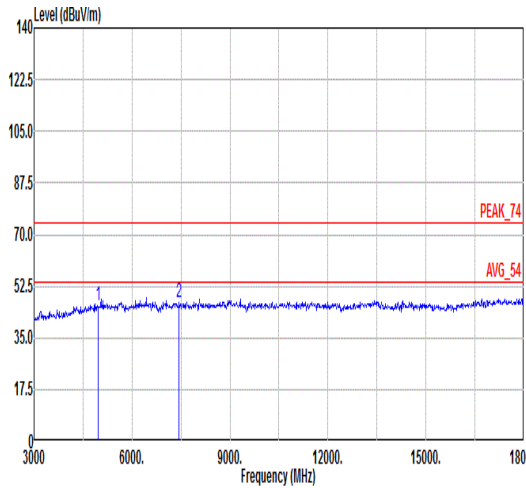


Mode	8																																																																																									
	Harmonic																																																																																									
	Co-location_Bluetooth-LE_CH39_2480MHz																																																																																									
Pol.	Horizontal					Vertical																																																																																				
Peak Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>44.45</td><td>74.00</td><td>-29.55</td><td>50.87</td><td>36.64</td><td>8.46</td></tr><tr><td>2</td><td>7440.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>47.73</td><td>36.76</td><td>10.17</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	44.45	74.00	-29.55	50.87	36.64	8.46	2	7440.00	43.47	74.00	-30.53	47.73	36.76	10.17	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>52.36</td><td>36.64</td><td>8.46</td></tr><tr><td>2</td><td>7440.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>51.04</td><td>36.76</td><td>10.17</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	45.94	74.00	-28.06	52.36	36.64	8.46	2	7440.00	46.78	74.00	-27.22	51.04	36.76	10.17
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	4960.00	44.45	74.00	-29.55	50.87	36.64	8.46																																																																																			
2	7440.00	43.47	74.00	-30.53	47.73	36.76	10.17																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	4960.00	45.94	74.00	-28.06	52.36	36.64	8.46																																																																																			
2	7440.00	46.78	74.00	-27.22	51.04	36.76	10.17																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>44.45</td><td>74.00</td><td>-29.55</td><td>50.87</td><td>36.64</td><td>8.46</td></tr><tr><td>2</td><td>7440.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>47.73</td><td>36.76</td><td>10.17</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	44.45	74.00	-29.55	50.87	36.64	8.46	2	7440.00	43.47	74.00	-30.53	47.73	36.76	10.17	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>45.94</td><td>74.00</td><td>-28.06</td><td>52.36</td><td>36.64</td><td>8.46</td></tr><tr><td>2</td><td>7440.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>51.04</td><td>36.76</td><td>10.17</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	45.94	74.00	-28.06	52.36	36.64	8.46	2	7440.00	46.78	74.00	-27.22	51.04	36.76	10.17
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	4960.00	44.45	74.00	-29.55	50.87	36.64	8.46																																																																																			
2	7440.00	43.47	74.00	-30.53	47.73	36.76	10.17																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																			
1	4960.00	45.94	74.00	-28.06	52.36	36.64	8.46																																																																																			
2	7440.00	46.78	74.00	-27.22	51.04	36.76	10.17																																																																																			

Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth -LE 1Mbps	62.42	0.392	2.551	3KHz
Bluetooth -LE 2Mbps	32.48	0.204	4.902	10KHZ

Bluetooth – LE 1Mbps

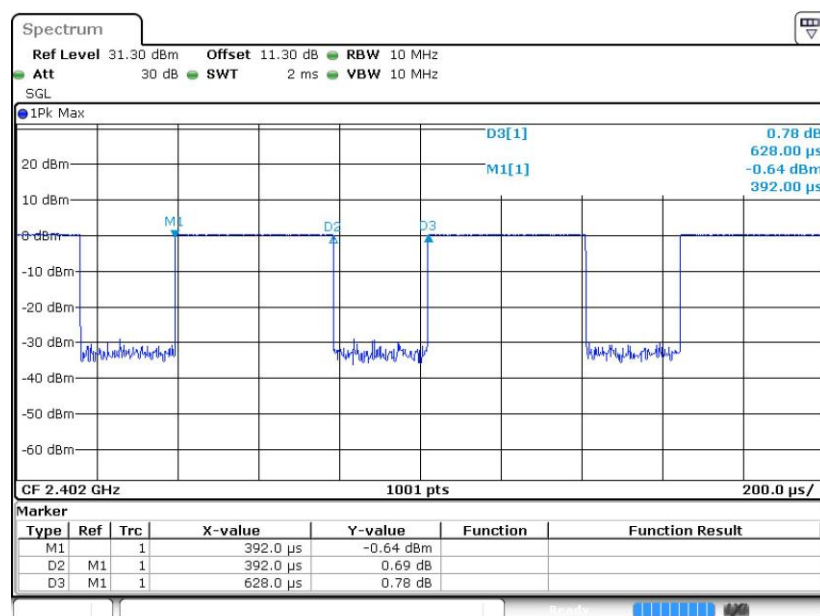

Bluetooth – LE 2Mbps

