



FCC TEST REPORT

FCC ID: XDQEF60-02

Product	:	Touch POS Terminal
Model Name	:	EF60, EF60D, EF60U, EF60S, EF60Pro, EF60E, EF60ultra, EF60mini, EF60W, EF60C, EF60M
Brand	:	NEXGO
Report No.	:	PTC24111313001E-FC04
Prepared for		
Shenzhen Xinguodu Technology Co.,Ltd.		
17B JinSong Mansion, Terra Industrial & Trade Park, Chegongmiao, Futian District, Shenzhen		
Prepared by		
Precise Testing & Certification Co., Ltd		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Xinguodu Technology Co.,Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park, Chegongmiao, Futian District, Shenzhen
Manufacture's name : Shenzhen Xinguodu Technology Co.,Ltd.
Address : 17B JinSong Mansion, Terra Industrial & Trade Park, Chegongmiao, Futian District, Shenzhen
Product name : Touch POS Terminal
Model name : EF60, EF60D, EF60U, EF60S, EF60Pro, EF60E, EF60ultra, EF60mini, EF60W, EF60C, EF60M
Standards : FCC CFR47 Part 15 Section 15.407
Test procedure : ANSI C63.10:2013
Test Date : Apr. 18, 2025 to May. 16, 2025
Date of Issue : May. 16, 2025
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink, appearing to read 'Jack Zhou'.

Jack zhou / Engineer

Technical Manager:

A handwritten signature in black ink, appearing to read 'Simon Pu'.

Simon Pu / Manager



Contents

	Page
1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 GENERAL INFORMATION.....	6
3.1 GENERAL DESCRIPTION OF E.U.T.	6
3.2 CHANNEL LIST	7
3.3 TEST SITE	8
4 EQUIPMENT DURING TEST	9
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
5 CONDUCTED EMISSION	13
5.1 E.U.T. OPERATION.....	13
5.2 EUT SETUP	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
5.4 MEASUREMENT PROCEDURE	14
5.5 CONDUCTED EMISSION LIMIT	14
5.6 MEASUREMENT DESCRIPTION.....	14
5.7 CONDUCTED EMISSION TEST RESULT	14
6 RADIATED SPURIOUS EMISSIONS	17
6.1 EUT OPERATION	18
6.2 TEST SETUP	19
6.3 SPECTRUM ANALYZER SETUP.....	20
6.4 TEST PROCEDURE	21
6.5 SUMMARY OF TEST RESULTS	22
6.6 BAND EDGE MEASUREMENTS	78
6.7 RESTRICTED BAND	90
7 EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	92
7.1 TEST PROCEDURE	92
7.2 TEST SETUP	93
7.3 TEST RESULT	93



8 MAXIMUM CONDUCTED OUTPUT POWER	115
8.1 TEST SETUP	115
8.2 TEST PROCEDURE.....	115
8.3 TEST RESULT	116
9 POWER SPECTRAL DENSITY	117
9.1 TEST PROCEDURE.....	118
9.2 TEST SETUP	118
9.3 TEST RESULT	119
9.4 ANTENNA REQUIREMENT.....	133
9.5 RESULT	133
10 FREQUENCY STABILITY	134
10.1 TEST PROCEDURE.....	134
10.2 TEST SETUP	134
10.3 TEST RESULT	135
11 TEST SETUP	144
12 EUT PHOTOS.....	146



2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.407(b)	PASS
Emission and Occupied Bandwidth	15.407(a)(e)	PASS
Maximum Conducted Output Power	15.407(a)	PASS
Power Spectral Density	15.407(a)	PASS
Frequency stability	15.407 (g)	PASS
Antenna Requirement	15.203	PASS



3 General Information

3.1 General Description of E.U.T.

Product Name	: Touch POS Terminal
Model Name	: EF60
Additional model	: EF60D, EF60U, EF60S, EF60Pro, EF60E, EF60ultra, EF60mini, EF60W, EF60C, EF60M
Specification	: 802.11a/n HT20/HT40/ac20/ac40
Operation Frequency	: 5G Wi-Fi:5180-5240 MHz 5.8G Wi-Fi:5745MHz~5825MHz
Number of Channel	: 4 channels for 802.11a/n20/ac20 5180-5240 MHz 5 channels for 802.11a/n20/ac20 5745MHz~5825MHz 2 channels for 802.11n40/ac40 5190-5230 MHz 2 channels for 802.11n40/ac40 5755MHz~5795MHz
Type of Modulation	: OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n/a/ac
Antenna installation	: PIFA Antenna
Antenna Gain	: 2.28 dBi
Power supply	: Input: DC12V Adapter: GM95-120700-F Input: AC 100-240V~50/60Hz 2.5A Output: DC 12.0V 7.0A 84W
Hardware Version	: N/A
Software Version	: N/A
Test sample No.	: PTC24111313001E-1/2, PTC24111313001E-2/2



3.2 Channel List

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11a: 6 Mbps; 802.11n (HT20): MCS0; 802.11ac: MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 a/N20/N40/AC20/AC40

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	46	5230	153	5765
38	5190	48	5240	157	5785
40	5200	149	5745	159	5795
44	5220	151	5755	161	5805
				165	5825



The maximum duty cycle as following table:

Test Mode	Duty Cycle(%)
802.11a	100%
802.11n/ac20	100%
802.11n/ac40	100%

3.3 Test Site

Precise Testing & Certification Co., Ltd

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A

FCC Designation Number: CN1219



4 Equipment During Test

4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-26.5GHz	Aug. 15, 2024	1 Year
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 15, 2024	1 Year
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 15, 2024	1 Year
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 15, 2024	1 Year
DC power Supply	Agilent	E3642A	MY52420017	0-8V,5A/0-20,2.5A	Aug. 15, 2024	1 Year
Humidity Chamber	AISRY	ASR-HW2-1000	20230926003	-40°C-150°C	Feb. 23 ,2025	1Year
Test S/W	Tonscend	JS1120-3	/	/	/	/

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Last Calibration	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESPI7	101671	9KHz-7GHz	Aug. 15, 2024	1 Year
Loop Antenna	Schwarzbeck	FMZB 1519	192	9 KHz -30MHz	Nov. 28, 2024	1 Year
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Sep. 10, 2024	1 Year
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	9KHz-1GHz	Mar. 21, 2025	1 Year
Cable	IMRO	AK-9515E(9m)	Cable-L	9KHz-3GHz	Aug. 15, 2024	1 Year
Spectrum Analyzer	Rohde&Schwarz	FSV40	6625-01-588-5515	9KHz-40GHz	Aug. 15, 2024	1 Year
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1246	1GHz-18GHz	Dec.12, 2024	1 Year



Report No.: PTC24111313001E-FC04

Power Amplifier	ZHINAN	ZN3380C	15002	1GHz-26.5GHz	Aug. 15, 2024	1 Year
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-1066	15GHz-40GHz	Jul. 24, 2024	1 Year
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Jul. 25, 2024	1 Year
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 15, 2024	1 Year
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 15, 2024	1 Year
Test S/W	Tonscend	TS+	/	/	/	/

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Date	Calibration Interval
EMI Test Receiver	Rohde&Schwarz	ESCI3	101417	9KHz-3GHz	Aug.15, 2024	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Oct. 30, 2024	1 Year
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Oct. 30, 2024	1 Year
Limiter	R&S	ESH3-Z2	0357.8810.54-102808-NB	0Hz-30MHz	Aug. 15, 2024	1 Year
RF Switch	DIAMOND ANTENNA	CX-210	/	0.09MHz-6GHz	Mar. 21,2025	1 Year
Test S/W	Tonscend	JS32-CE	/	/	/	/



4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(9kHz~30MHz)	$\pm 3.15\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~18GHz)	$\pm 4.74\text{dB}$
Radiated Emission(18GHz~40GHz)	$\pm 3.20\text{dB}$



Report No.: PTC24111313001E-FC04

4.3 Description of Support Units

Equipment	Model No.	Series No.
Mouse	OP-300	SA8177323
Keyboard	G2	SA8173709103

5 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10: 2013
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 23.9 °C
Humidity	: 51.4 % RH
Atmospheric Pressure	: 101.21kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

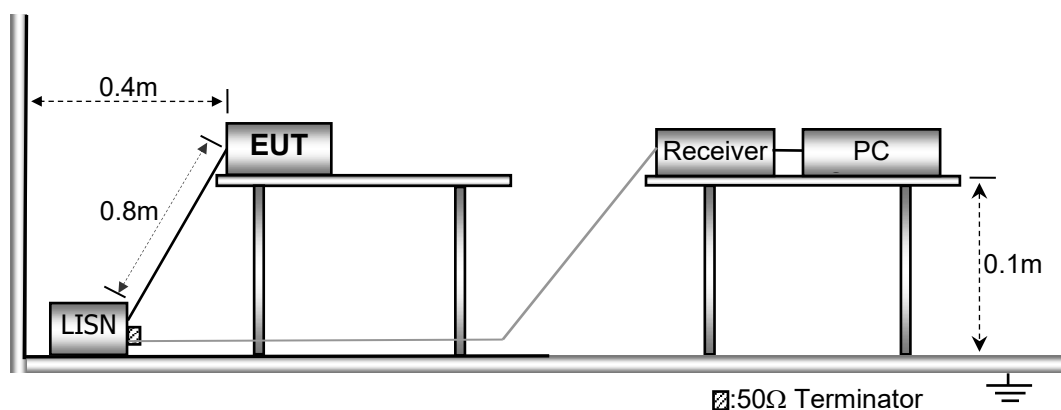

5.3 Test SET-UP (Block Diagram of Configuration)

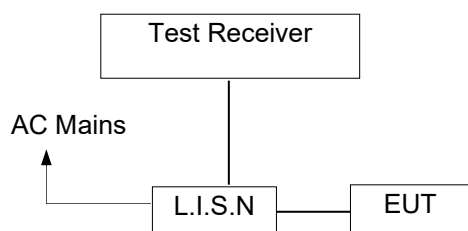

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, TX 5180MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.



Line-AC 120V/60Hz

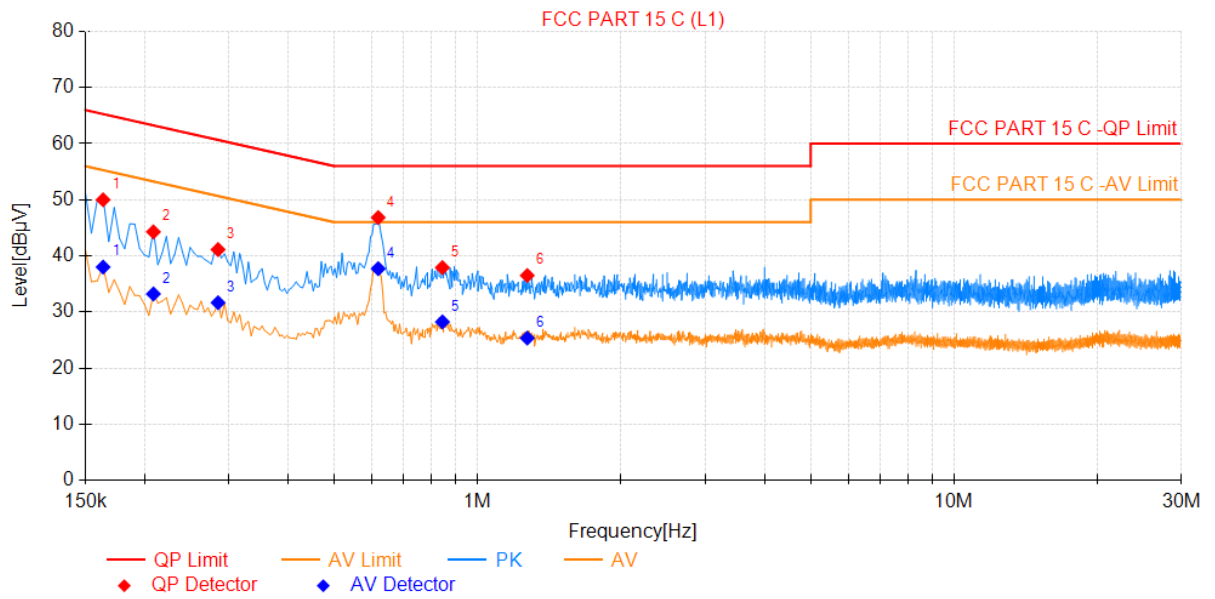


Final Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.164	30.44	19.56	50.00	65.28	15.28	18.44	38.00	55.28	17.28	PASS
2	0.209	24.82	19.46	44.28	63.26	18.98	13.75	33.21	53.26	20.05	PASS
3	0.285	21.59	19.53	41.12	60.67	19.55	12.12	31.65	50.67	19.02	PASS
4	0.618	27.11	19.72	46.83	56.00	9.17	18.00	37.72	46.00	8.28	PASS
5	0.843	18.34	19.57	37.91	56.00	18.09	8.66	28.23	46.00	17.77	PASS
6	1.271	16.85	19.65	36.50	56.00	19.50	5.70	25.35	46.00	20.65	PASS



Neutral-AC 120V/60Hz

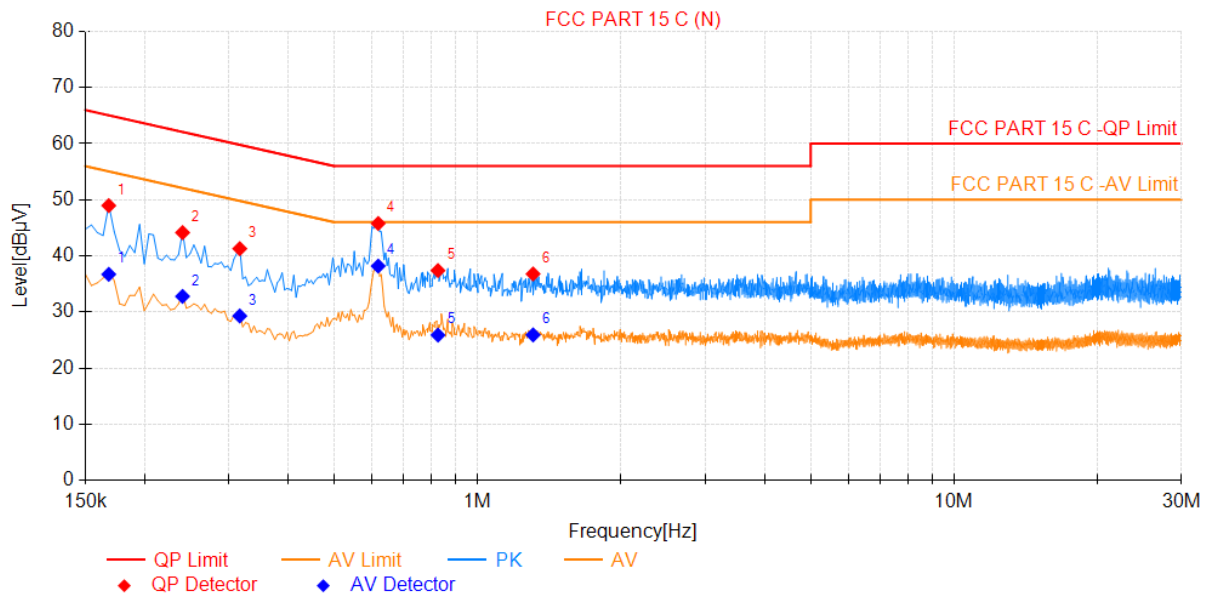

Final Data List											
NO.	Freq. [MHz]	QP Reading [dBμV]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.168	29.39	19.58	48.97	65.06	16.09	17.13	36.71	55.06	18.35	PASS
2	0.240	24.68	19.47	44.15	62.10	17.95	13.31	32.78	52.10	19.32	PASS
3	0.317	21.73	19.56	41.29	59.80	18.51	9.73	29.29	49.80	20.51	PASS
4	0.618	26.02	19.76	45.78	56.00	10.22	18.43	38.19	46.00	7.81	PASS
5	0.825	17.79	19.60	37.39	56.00	18.61	6.28	25.88	46.00	20.12	PASS
6	1.307	17.13	19.65	36.78	56.00	19.22	6.26	25.91	46.00	20.09	PASS

Note: QP Margin[dB]= QP Limit[dBμV]- QP Value[dBμV], AV Margin[dB]= AV Limit[dBμV]- AV Value[dBμV].



6 Radiated Spurious Emissions

Test Requirement	:	FCC CFR47 Part 15 Section 15.209 & 15.407(b)
Test Method	:	ANSI C63.10:2013
Test Result	:	PASS
Measurement Distance	:	3m

Limit

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

Further.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits. As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz



As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature: : 24.5 °C
 Humidity: : 52 % RH
 Atmospheric Pressure: : 101.3kPa
 Test Voltage : AC 120V 60Hz


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

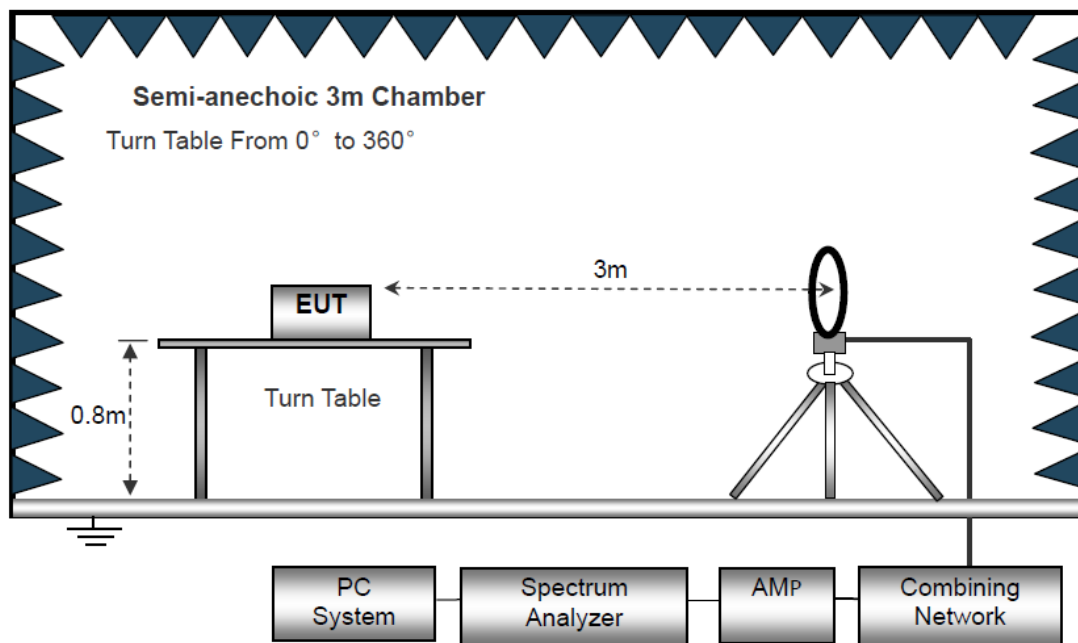

The test setup for emission measurement from 30 MHz to 1 GHz.

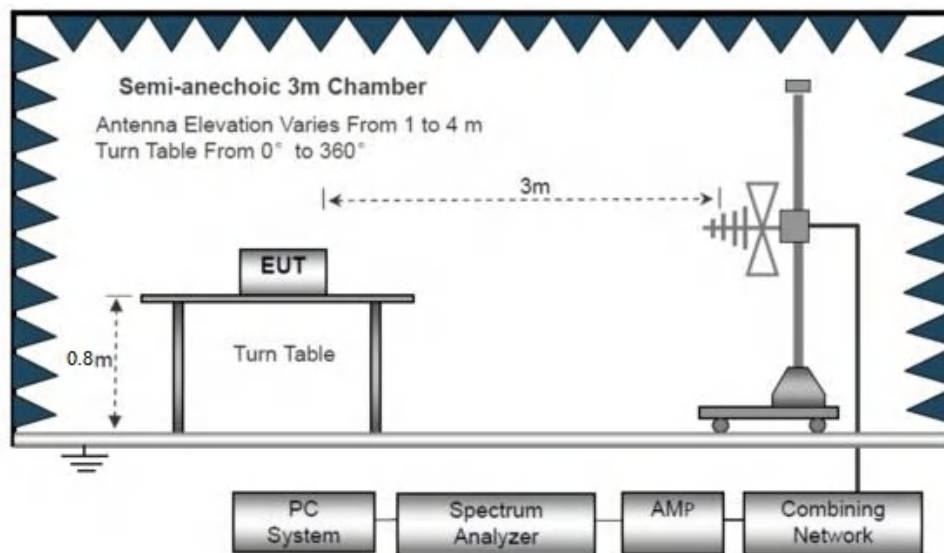

The test setup for emission measurement above 1 GHz

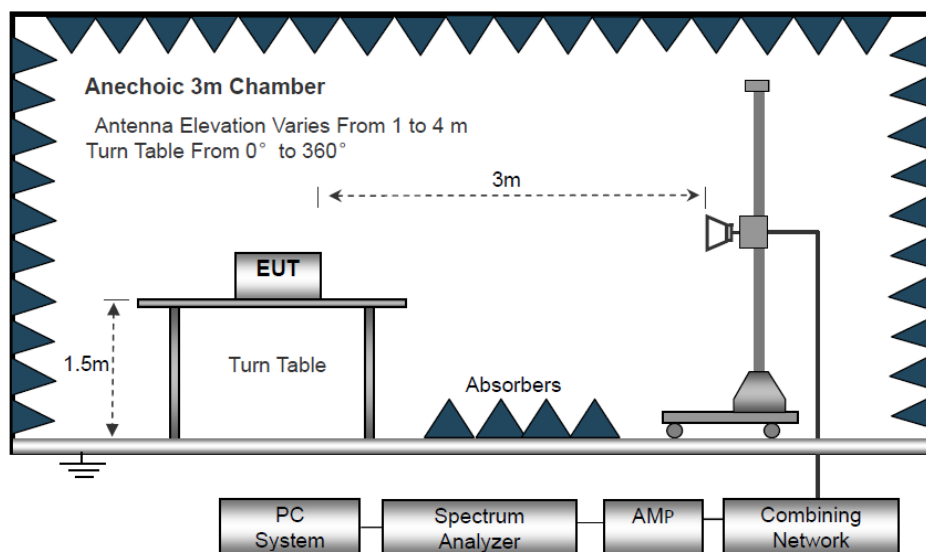

6.3 Spectrum Analyzer Setup

Receiver Setup	Frequency	Detector	RBW	VBW	Remark
	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



6.4 Test Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane, And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room



6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

All the modulation modes were tested the data of the worst mode (TX 802.11a Channel 36, CH149) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following test plots:



Antenna Polarization: Horizontal(CH36)

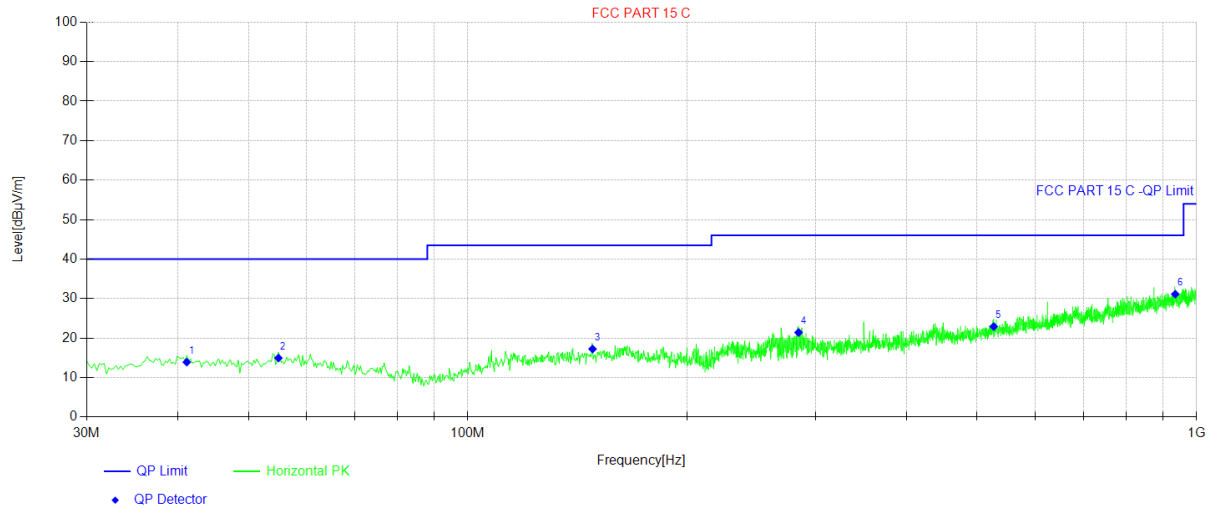


Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	41.16	24.9	-10.98	13.92	40.00	26.08	Horizontal	PASS
2	54.98	25.78	-10.83	14.95	40.00	25.05	Horizontal	PASS
3	148.34	26.84	-9.60	17.24	43.50	26.26	Horizontal	PASS
4	284.38	30.73	-9.31	21.42	46.00	24.58	Horizontal	PASS
5	526.88	26.38	-3.46	22.92	46.00	23.08	Horizontal	PASS
6	935.01	26.07	5.06	31.13	46.00	14.87	Horizontal	PASS

Remark:Emission Level=Reading+Cable Loss+ANT Factor-AMP Factor



Antenna Polarization: Vertical (CH36)

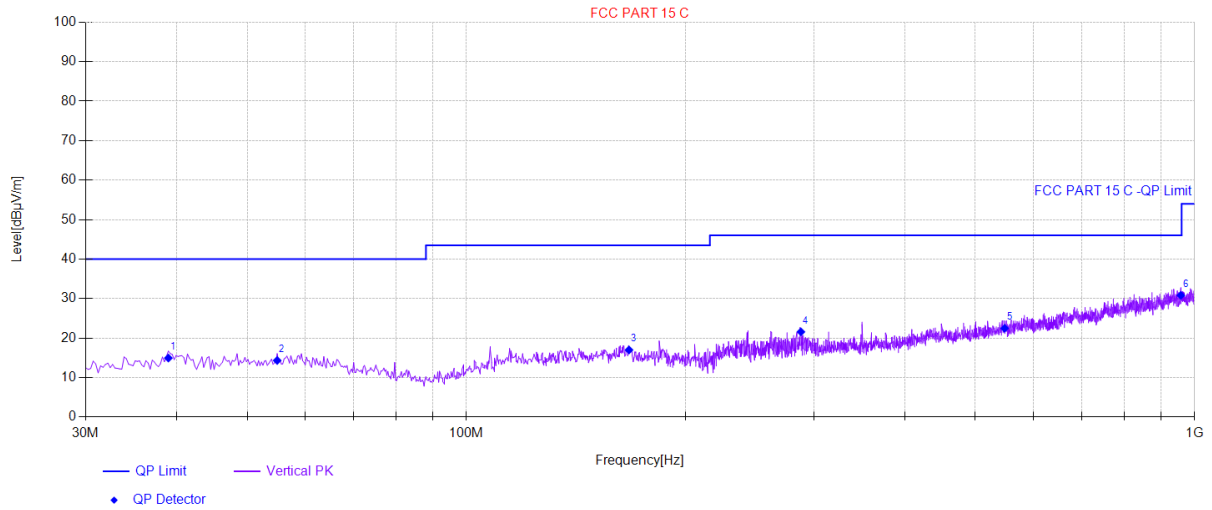

Final Data List[QP]								
NO.	Freq. [MHz]	QP Reading [dBμV/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	38.97	26.23	-11.27	14.96	40.00	25.04	Vertical	PASS
2	54.98	25.16	-10.83	14.33	40.00	25.67	Vertical	PASS
3	167.26	26.57	-9.57	17.00	43.50	26.50	Vertical	PASS
4	288.02	30.78	-9.19	21.59	46.00	24.41	Vertical	PASS
5	548.47	25.09	-2.61	22.48	46.00	23.52	Vertical	PASS
6	957.56	25.45	5.38	30.83	46.00	15.17	Vertical	PASS

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor
 Note: only the worst case recorded in the report.



Test Frequency: From 1GHz to 40GHz

Pre-scan all test modes

Only the worst case Main test data.

802.11a

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	47.51	35.22	5.36	31.25	56.84	68.23	-11.39	V
15540	42.03	35.96	7.85	30.63	55.21	68.23	-13.02	V
20720	43.52	39.12	8.56	34.95	56.25	68.23	-11.98	V
10360	48.46	34.12	5.36	31.25	56.69	68.23	-11.54	H
15540	42.55	36.52	7.85	30.63	56.29	68.23	-11.94	H
20720	42.65	40.01	8.56	34.95	56.27	68.23	-11.96	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	32.81	35.22	5.36	31.25	42.14	54	-11.86	V
15540	30.23	35.96	7.85	30.63	43.41	54	-10.59	V
20720	28.26	39.12	8.56	34.95	40.99	54	-13.01	V
10360	32.37	34.12	5.36	31.25	40.60	54	-13.40	H
15540	24.78	36.52	7.85	30.63	38.52	54	-15.48	H
20720	27.00	40.01	8.56	34.95	40.62	54	-13.38	H



802.11a

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	47.90	35.63	5.36	31.25	57.64	68.23	-10.59	V
15600	43.33	35.91	7.85	30.63	56.46	68.23	-11.77	V
20800	44.53	39.67	8.56	34.95	57.81	68.23	-10.42	V
10400	47.01	34.25	5.36	31.25	55.37	68.23	-12.86	H
15600	42.15	37.02	7.85	30.63	56.39	68.23	-11.84	H
20800	43.25	38.88	8.56	34.95	55.74	68.23	-12.49	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	33.45	35.63	5.36	31.25	43.19	54	-10.81	V
15600	28.96	35.91	7.85	30.63	42.09	54	-11.91	V
20800	29.75	39.67	8.56	34.95	43.03	54	-10.97	V
10400	32.98	34.25	5.36	31.25	41.34	54	-12.66	H
15600	29.08	37.02	7.85	30.63	43.32	54	-10.68	H
20800	30.13	38.88	8.56	34.95	42.62	54	-11.38	H



802.11a

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.43	34.68	5.36	31.25	54.22	68.23	-14.01	V
17520	43.35	36.52	7.85	30.63	57.09	68.23	-11.14	V
20960	43.90	38.77	8.56	34.95	56.28	68.23	-11.95	V
10480	47.21	33.99	5.36	31.25	55.31	68.23	-12.92	H
17520	45.00	36.84	7.85	30.63	59.06	68.23	-9.17	H
20960	46.35	39.93	8.56	34.95	59.89	68.23	-8.34	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	33.41	34.68	5.36	31.25	42.20	54	-11.80	V
17520	28.67	36.52	7.85	30.63	42.41	54	-11.59	V
20960	30.10	38.77	8.56	34.95	42.48	54	-11.52	V
10480	31.98	33.99	5.36	31.25	40.08	54	-13.92	H
17520	26.92	36.84	7.85	30.63	40.98	54	-13.02	H
20960	29.16	39.93	8.56	34.95	42.70	54	-11.30	H



802.11a

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	47.44	35.26	5.42	31.75	56.37	68.23	-11.86	V
17235	41.95	36.88	7.32	30.96	55.19	68.23	-13.04	V
22980	43.77	39.14	8.85	35.25	56.51	68.23	-11.72	V
11490	49.78	34.21	5.42	31.75	57.66	68.23	-10.57	H
17235	44.38	37.52	7.32	30.96	58.26	68.23	-9.97	H
22980	44.02	39.88	8.85	35.25	57.50	68.23	-10.73	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	32.03	35.26	5.42	31.75	40.96	54	-13.04	V
17235	29.99	36.88	7.32	30.96	43.23	54	-10.77	V
22980	29.61	39.14	8.85	35.25	42.35	54	-11.65	V
11490	31.58	34.21	5.42	31.75	39.46	54	-14.54	H
17235	28.85	37.52	7.32	30.96	42.73	54	-11.27	H
22980	29.11	39.88	8.85	35.25	42.59	54	-11.41	H



802.11a

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	48.49	35.26	5.42	31.75	57.42	68.23	-10.81	V
17355	44.38	36.88	7.32	30.96	57.62	68.23	-10.61	V
23140	45.22	39.14	8.85	35.25	57.96	68.23	-10.27	V
11570	48.74	34.21	5.42	31.75	56.62	68.23	-11.61	H
17355	42.11	37.52	7.32	30.96	55.99	68.23	-12.24	H
23140	43.27	39.88	8.85	35.25	56.75	68.23	-11.48	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.05	35.26	5.42	31.75	41.98	54	-12.02	V
17355	29.67	36.88	7.32	30.96	42.91	54	-11.09	V
23140	28.69	39.14	8.85	35.25	41.43	54	-12.57	V
11570	34.46	34.21	5.42	31.75	42.34	54	-11.66	H
17355	29.51	37.52	7.32	30.96	43.39	54	-10.61	H
23140	29.40	39.88	8.85	35.25	42.88	54	-11.12	H



802.11a

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	48.35	35.26	5.42	31.75	57.28	68.23	-10.95	V
17475	44.65	36.88	7.32	30.96	57.89	68.23	-10.34	V
23300	45.52	39.14	8.85	35.25	58.26	68.23	-9.97	V
11650	49.33	34.21	5.42	31.75	57.21	68.23	-11.02	H
17475	44.56	37.52	7.32	30.96	58.44	68.23	-9.79	H
23300	44.85	39.88	8.85	35.25	58.33	68.23	-9.90	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	34.69	34.96	5.42	31.75	43.32	54	-10.68	V
17475	28.79	36.74	7.32	30.96	41.89	54	-12.11	V
23300	30.08	39.14	8.85	35.25	42.82	54	-11.18	V
11650	33.42	34.02	5.42	31.75	41.11	54	-12.89	H
17475	28.75	36.57	7.32	30.96	41.68	54	-12.32	H
23300	28.33	39.88	8.85	35.25	41.81	54	-12.19	H



802.11n20

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	45.73	34.56	5.36	31.25	54.40	68.23	-13.83	V
15540	43.17	36.22	7.85	30.63	56.61	68.23	-11.62	V
20720	44.02	38.97	8.56	34.95	56.60	68.23	-11.63	V
10360	49.24	33.57	5.36	31.25	56.92	68.23	-11.31	H
15540	40.03	36.49	7.85	30.63	53.74	68.23	-14.49	H
20720	41.98	39.92	8.56	34.95	55.51	68.23	-12.72	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	32.54	34.56	5.36	31.25	41.21	54	-12.79	V
15540	29.72	36.22	7.85	30.63	43.16	54	-10.84	V
20720	28.02	38.97	8.56	34.95	40.60	54	-13.40	V
10360	31.96	33.57	5.36	31.25	39.64	54	-14.36	H
15540	27.09	36.49	7.85	30.63	40.80	54	-13.20	H
20720	27.98	39.92	8.56	34.95	41.51	54	-12.49	H



802.11n20

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	48.66	34.63	5.36	31.25	57.40	68.23	-10.83	V
15600	44.20	36.42	7.85	30.63	57.84	68.23	-10.39	V
20800	44.93	38.81	8.56	34.95	57.35	68.23	-10.88	V
10400	48.20	33.93	5.36	31.25	56.24	68.23	-11.99	H
15600	43.17	36.55	7.85	30.63	56.94	68.23	-11.29	H
20800	44.21	39.94	8.56	34.95	57.76	68.23	-10.47	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	32.78	34.63	5.36	31.25	41.52	54	-12.48	V
15600	28.78	36.42	7.85	30.63	42.42	54	-11.58	V
20800	29.05	38.81	8.56	34.95	41.47	54	-12.53	V
10400	33.14	33.93	5.36	31.25	41.18	54	-12.82	H
15600	28.38	36.55	7.85	30.63	42.15	54	-11.85	H
20800	29.64	39.94	8.56	34.95	43.19	54	-10.81	H



802.11n20

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.59	34.68	5.36	31.25	54.38	68.23	-13.85	V
17520	44.56	36.52	7.85	30.63	58.30	68.23	-9.93	V
20960	43.03	38.77	8.56	34.95	55.41	68.23	-12.82	V
10480	46.92	33.99	5.36	31.25	55.02	68.23	-13.21	H
17520	46.01	36.84	7.85	30.63	60.07	68.23	-8.16	H
20960	44.23	39.93	8.56	34.95	57.77	68.23	-10.46	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	31.54	34.68	5.36	31.25	40.33	54	-13.67	V
17520	27.66	36.52	7.85	30.63	41.40	54	-12.60	V
20960	28.38	38.77	8.56	34.95	40.76	54	-13.24	V
10480	30.45	33.99	5.36	31.25	38.55	54	-15.45	H
17520	27.32	36.84	7.85	30.63	41.38	54	-12.62	H
20960	29.68	39.93	8.56	34.95	43.22	54	-10.78	H



802.11n20

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	49.12	35.26	5.42	31.75	58.05	68.23	-10.18	V
17235	42.59	36.88	7.32	30.96	55.83	68.23	-12.40	V
22980	43.27	39.14	8.85	35.25	56.01	68.23	-12.22	V
11490	49.38	34.21	5.42	31.75	57.26	68.23	-10.97	H
17235	43.79	37.52	7.32	30.96	57.67	68.23	-10.56	H
22980	45.22	39.88	8.85	35.25	58.70	68.23	-9.53	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	33.63	35.26	5.42	31.75	42.56	54	-11.44	V
17235	29.58	36.88	7.32	30.96	42.82	54	-11.18	V
22980	29.50	39.14	8.85	35.25	42.24	54	-11.76	V
11490	33.07	34.21	5.42	31.75	40.95	54	-13.05	H
17235	28.37	37.52	7.32	30.96	42.25	54	-11.75	H
22980	28.94	39.88	8.85	35.25	42.42	54	-11.58	H



802.11n20

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	45.65	35.26	5.42	31.75	54.58	68.23	-13.65	V
17355	44.14	36.88	7.32	30.96	57.38	68.23	-10.85	V
23140	45.23	39.14	8.85	35.25	57.97	68.23	-10.26	V
11570	48.13	34.21	5.42	31.75	56.01	68.23	-12.22	H
17355	42.61	37.52	7.32	30.96	56.49	68.23	-11.74	H
23140	41.98	39.88	8.85	35.25	55.46	68.23	-12.77	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.51	35.26	5.42	31.75	42.44	54	-11.56	V
17355	30.10	36.88	7.32	30.96	43.34	54	-10.66	V
23140	29.37	39.14	8.85	35.25	42.11	54	-11.89	V
11570	33.50	34.21	5.42	31.75	41.38	54	-12.62	H
17355	29.90	37.52	7.32	30.96	43.78	54	-10.22	H
23140	29.33	39.88	8.85	35.25	42.81	54	-11.19	H



802.11n20

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	47.74	35.26	5.42	31.75	56.67	68.23	-11.56	V
17475	44.71	36.88	7.32	30.96	57.95	68.23	-10.28	V
23300	45.33	39.14	8.85	35.25	58.07	68.23	-10.16	V
11650	49.05	34.21	5.42	31.75	56.93	68.23	-11.30	H
17475	44.36	37.52	7.32	30.96	58.24	68.23	-9.99	H
23300	45.62	39.88	8.85	35.25	59.10	68.23	-9.13	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	35.90	35.26	5.42	31.75	44.83	54	-9.17	V
17475	29.14	36.88	7.32	30.96	42.38	54	-11.62	V
23300	27.58	39.14	8.85	35.25	40.32	54	-13.68	V
11650	33.32	34.21	5.42	31.75	41.20	54	-12.80	H
17475	28.66	37.52	7.32	30.96	42.54	54	-11.46	H
23300	29.23	39.88	8.85	35.25	42.71	54	-11.29	H



802.11ac20

Test Mode: 5180					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	47.24	35.22	5.36	31.25	56.57	68.23	-11.66	V
15540	41.91	35.96	7.85	30.63	55.09	68.23	-13.14	V
20720	43.17	39.12	8.56	34.95	55.90	68.23	-12.33	V
10360	48.63	34.12	5.36	31.25	56.86	68.23	-11.37	H
15540	42.68	36.52	7.85	30.63	56.42	68.23	-11.81	H
20720	42.85	40.01	8.56	34.95	56.47	68.23	-11.76	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10360	33.37	35.22	5.36	31.25	42.70	54	-11.30	V
15540	30.23	35.96	7.85	30.63	43.41	54	-10.59	V
20720	28.11	39.12	8.56	34.95	40.84	54	-13.16	V
10360	32.88	34.12	5.36	31.25	41.11	54	-12.89	H
15540	24.89	36.52	7.85	30.63	38.63	54	-15.37	H
20720	27.20	40.01	8.56	34.95	40.82	54	-13.18	H



802.11ac20

Test Mode:5200					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	47.70	35.63	5.36	31.25	57.44	68.23	-10.79	V
15600	43.18	35.91	7.85	30.63	56.31	68.23	-11.92	V
20800	44.55	39.67	8.56	34.95	57.83	68.23	-10.40	V
10400	47.09	34.25	5.36	31.25	55.45	68.23	-12.78	H
15600	42.29	37.02	7.85	30.63	56.53	68.23	-11.70	H
20800	43.40	38.88	8.56	34.95	55.89	68.23	-12.34	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10400	33.64	35.63	5.36	31.25	43.38	54	-10.62	V
15600	28.68	35.91	7.85	30.63	41.81	54	-12.19	V
20800	29.71	39.67	8.56	34.95	42.99	54	-11.01	V
10400	33.03	34.25	5.36	31.25	41.39	54	-12.61	H
15600	28.72	37.02	7.85	30.63	42.96	54	-11.04	H
20800	30.30	38.88	8.56	34.95	42.79	54	-11.21	H



802.11ac20

Test Mode:5240					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	45.59	34.68	5.36	31.25	54.38	68.23	-13.85	V
17520	43.46	36.52	7.85	30.63	57.20	68.23	-11.03	V
20960	44.21	38.77	8.56	34.95	56.59	68.23	-11.64	V
10480	47.14	33.99	5.36	31.25	55.24	68.23	-12.99	H
17520	45.37	36.84	7.85	30.63	59.43	68.23	-8.80	H
20960	46.20	39.93	8.56	34.95	59.74	68.23	-8.49	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10480	33.55	34.68	5.36	31.25	42.34	54	-11.66	V
17520	28.80	36.52	7.85	30.63	42.54	54	-11.46	V
20960	29.90	38.77	8.56	34.95	42.28	54	-11.72	V
10480	31.98	33.99	5.36	31.25	40.08	54	-13.92	H
17520	27.25	36.84	7.85	30.63	41.31	54	-12.69	H
20960	29.36	39.93	8.56	34.95	42.90	54	-11.10	H



802.11ac20

Test Mode: 5745					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	47.40	35.26	5.42	31.75	56.33	68.23	-11.90	V
17235	42.06	36.88	7.32	30.96	55.30	68.23	-12.93	V
22980	43.66	39.14	8.85	35.25	56.40	68.23	-11.83	V
11490	49.66	34.21	5.42	31.75	57.54	68.23	-10.69	H
17235	43.95	37.52	7.32	30.96	57.83	68.23	-10.40	H
22980	44.43	39.88	8.85	35.25	57.91	68.23	-10.32	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11490	32.50	35.26	5.42	31.75	41.43	54	-12.57	V
17235	30.10	36.88	7.32	30.96	43.34	54	-10.66	V
22980	29.81	39.14	8.85	35.25	42.55	54	-11.45	V
11490	31.67	34.21	5.42	31.75	39.55	54	-14.45	H
17235	28.79	37.52	7.32	30.96	42.67	54	-11.33	H
22980	28.91	39.88	8.85	35.25	42.39	54	-11.61	H



802.11ac20

Test Mode:5785					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	48.55	35.26	5.42	31.75	57.48	68.23	-10.75	V
17355	44.44	36.88	7.32	30.96	57.68	68.23	-10.55	V
23140	45.54	39.14	8.85	35.25	58.28	68.23	-9.95	V
11570	48.66	34.21	5.42	31.75	56.54	68.23	-11.69	H
17355	42.52	37.52	7.32	30.96	56.40	68.23	-11.83	H
23140	43.18	39.88	8.85	35.25	56.66	68.23	-11.57	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11570	33.22	35.26	5.42	31.75	42.15	54	-11.85	V
17355	29.38	36.88	7.32	30.96	42.62	54	-11.38	V
23140	28.58	39.14	8.85	35.25	41.32	54	-12.68	V
11570	34.72	34.21	5.42	31.75	42.60	54	-11.40	H
17355	29.39	37.52	7.32	30.96	43.27	54	-10.73	H
23140	29.30	39.88	8.85	35.25	42.78	54	-11.22	H



802.11ac20

Test Mode:5825					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	48.70	35.26	5.42	31.75	57.63	68.23	-10.60	V
17475	44.75	36.88	7.32	30.96	57.99	68.23	-10.24	V
23300	45.72	39.14	8.85	35.25	58.46	68.23	-9.77	V
11650	49.25	34.21	5.42	31.75	57.13	68.23	-11.10	H
17475	44.26	37.52	7.32	30.96	58.14	68.23	-10.09	H
23300	45.30	39.88	8.85	35.25	58.78	68.23	-9.45	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11650	34.44	35.26	5.42	31.75	43.37	54	-10.63	V
17475	28.37	36.88	7.32	30.96	41.61	54	-12.39	V
23300	30.05	39.14	8.85	35.25	42.79	54	-11.21	V
11650	33.49	34.21	5.42	31.75	41.37	54	-12.63	H
17475	28.55	37.52	7.32	30.96	42.43	54	-11.57	H
23300	28.67	39.88	8.85	35.25	42.15	54	-11.85	H



802.11n40

Test Mode:5190					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	47.67	35.26	5.42	31.75	56.60	68.23	-11.63	V
15570	44.75	36.88	7.32	30.96	57.99	68.23	-10.24	V
20760	45.13	39.14	8.85	35.25	57.87	68.23	-10.36	V
10380	49.00	34.21	5.42	31.75	56.88	68.23	-11.35	H
15570	44.78	37.52	7.32	30.96	58.66	68.23	-9.57	H
20760	45.19	39.88	8.85	35.25	58.67	68.23	-9.56	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	35.81	35.26	5.42	31.75	44.74	54	-9.26	V
15570	28.74	36.88	7.32	30.96	41.98	54	-12.02	V
20760	27.66	39.14	8.85	35.25	40.40	54	-13.60	V
10380	33.16	34.21	5.42	31.75	41.04	54	-12.96	H
15570	28.70	37.52	7.32	30.96	42.58	54	-11.42	H
20760	29.30	39.88	8.85	35.25	42.78	54	-11.22	H



802.11n40

Test Mode:5230					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	47.35	35.26	5.42	31.75	56.28	68.23	-11.95	V
15690	44.74	36.88	7.32	30.96	57.98	68.23	-10.25	V
20920	45.27	39.14	8.85	35.25	58.01	68.23	-10.22	V
10460	49.10	34.21	5.42	31.75	56.98	68.23	-11.25	H
15690	44.40	37.52	7.32	30.96	58.28	68.23	-9.95	H
20920	45.38	39.88	8.85	35.25	58.86	68.23	-9.37	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	35.90	35.26	5.42	31.75	44.83	54	-9.17	V
15690	29.02	36.88	7.32	30.96	42.26	54	-11.74	V
20920	27.75	39.14	8.85	35.25	40.49	54	-13.51	V
10460	33.40	34.21	5.42	31.75	41.28	54	-12.72	H
15690	28.62	37.52	7.32	30.96	42.50	54	-11.50	H
20920	28.82	39.88	8.85	35.25	42.30	54	-11.70	H



802.11 n40

Test Mode:5755					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11510	49.58	35.26	5.42	31.75	58.51	68.23	-9.72	V
17265	42.67	36.88	7.32	30.96	55.91	68.23	-12.32	V
23020	43.34	39.14	8.85	35.25	56.08	68.23	-12.15	V
11510	49.59	34.21	5.42	31.75	57.47	68.23	-10.76	H
17265	44.11	37.52	7.32	30.96	57.99	68.23	-10.24	H
23020	44.79	39.88	8.85	35.25	58.27	68.23	-9.96	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11510	33.46	35.26	5.42	31.75	42.39	54	-11.61	V
17265	29.61	36.88	7.32	30.96	42.85	54	-11.15	V
23020	29.40	39.14	8.85	35.25	42.14	54	-11.86	V
11510	33.35	34.21	5.42	31.75	41.23	54	-12.77	H
17265	28.36	37.52	7.32	30.96	42.24	54	-11.76	H
23020	29.01	39.88	8.85	35.25	42.49	54	-11.51	H



802.11 n40

Test Mode:5795					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11590	45.95	35.26	5.42	31.75	54.88	68.23	-13.35	V
17385	43.91	36.88	7.32	30.96	57.15	68.23	-11.08	V
23180	44.91	39.14	8.85	35.25	57.65	68.23	-10.58	V
11590	48.11	34.21	5.42	31.75	55.99	68.23	-12.24	H
17385	42.44	37.52	7.32	30.96	56.32	68.23	-11.91	H
23180	41.79	39.88	8.85	35.25	55.27	68.23	-12.96	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11590	33.45	35.26	5.42	31.75	42.38	54	-11.62	V
17385	30.07	36.88	7.32	30.96	43.31	54	-10.69	V
23180	29.60	39.14	8.85	35.25	42.34	54	-11.66	V
11590	33.75	34.21	5.42	31.75	41.63	54	-12.37	H
17385	29.83	37.52	7.32	30.96	43.71	54	-10.29	H
23180	29.27	39.88	8.85	35.25	42.75	54	-11.25	H



802.11ac40

Test Mode:5190					Test channel:LOW			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	47.55	35.26	5.42	31.75	56.48	68.23	-11.75	V
15570	44.23	36.88	7.32	30.96	57.47	68.23	-10.76	V
20760	45.07	39.14	8.85	35.25	57.81	68.23	-10.42	V
10380	48.96	34.21	5.42	31.75	56.84	68.23	-11.39	H
15570	44.42	37.52	7.32	30.96	58.30	68.23	-9.93	H
20760	45.08	39.88	8.85	35.25	58.56	68.23	-9.67	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10380	35.36	35.26	5.42	31.75	44.29	54	-9.71	V
15570	28.76	36.88	7.32	30.96	42.00	54	-12.00	V
20760	27.72	39.14	8.85	35.25	40.46	54	-13.54	V
10380	33.01	34.21	5.42	31.75	40.89	54	-13.11	H
15570	28.57	37.52	7.32	30.96	42.45	54	-11.55	H
20760	29.33	39.88	8.85	35.25	42.81	54	-11.19	H



802.11ac40

Test Mode:5230					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	47.77	35.26	5.42	31.75	56.70	68.23	-11.53	V
15690	44.25	36.88	7.32	30.96	57.49	68.23	-10.74	V
20920	45.34	39.14	8.85	35.25	58.08	68.23	-10.15	V
10460	49.26	34.21	5.42	31.75	57.14	68.23	-11.09	H
15690	44.52	37.52	7.32	30.96	58.40	68.23	-9.83	H
20920	45.16	39.88	8.85	35.25	58.64	68.23	-9.59	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
10460	35.36	35.26	5.42	31.75	44.29	54	-9.71	V
15690	28.93	36.88	7.32	30.96	42.17	54	-11.83	V
20920	27.93	39.14	8.85	35.25	40.67	54	-13.33	V
10460	32.91	34.21	5.42	31.75	40.79	54	-13.21	H
15690	28.71	37.52	7.32	30.96	42.59	54	-11.41	H
20920	28.74	39.88	8.85	35.25	42.22	54	-11.78	H



802.11ac40

Test Mode:5755					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11510	49.09	35.26	5.42	31.75	58.02	68.23	-10.21	V
17265	42.57	36.88	7.32	30.96	55.81	68.23	-12.42	V
23020	43.25	39.14	8.85	35.25	55.99	68.23	-12.24	V
11510	49.14	34.21	5.42	31.75	57.02	68.23	-11.21	H
17265	44.05	37.52	7.32	30.96	57.93	68.23	-10.30	H
23020	44.99	39.88	8.85	35.25	58.47	68.23	-9.76	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11510	33.41	35.26	5.42	31.75	42.34	54	-11.66	V
17265	29.86	36.88	7.32	30.96	43.10	54	-10.90	V
23020	29.86	39.14	8.85	35.25	42.60	54	-11.40	V
11510	33.43	34.21	5.42	31.75	41.31	54	-12.69	H
17265	28.54	37.52	7.32	30.96	42.42	54	-11.58	H
23020	29.06	39.88	8.85	35.25	42.54	54	-11.46	H



802.11ac40

Test Mode:5795					Test channel: High			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11590	45.92	35.26	5.42	31.75	54.85	68.23	-13.38	V
17385	44.04	36.88	7.32	30.96	57.28	68.23	-10.95	V
23180	45.20	39.14	8.85	35.25	57.94	68.23	-10.29	V
11590	48.14	34.21	5.42	31.75	56.02	68.23	-12.21	H
17385	42.61	37.52	7.32	30.96	56.49	68.23	-11.74	H
23180	42.01	39.88	8.85	35.25	55.49	68.23	-12.74	H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
11590	33.91	35.26	5.42	31.75	42.84	54	-11.16	V
17385	30.31	36.88	7.32	30.96	43.55	54	-10.45	V
23180	29.29	39.14	8.85	35.25	42.03	54	-11.97	V
11590	33.39	34.21	5.42	31.75	41.27	54	-12.73	H
17385	29.72	37.52	7.32	30.96	43.60	54	-10.40	H
23180	29.60	39.88	8.85	35.25	43.08	54	-10.92	H

Note:

1. The testing has been conformed to 40GHz.
2. All other emissions more than 30dB below the limit.
3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin=Emission Level-Limit
4. X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.




Undesirable emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~5140	3108.43	-39.55	≤-27	PASS
11A	Ant1	5180	5360~40000	25601.33	-33.03	≤-27	PASS
11A	Ant1	5200	30~5140	2669.66	-39.38	≤-27	PASS
11A	Ant1	5200	5360~40000	25205.32	-32.4	≤-27	PASS
11A	Ant1	5240	30~5140	3151.36	-38.94	≤-27	PASS
11A	Ant1	5240	5360~40000	25188.73	-32.62	≤-27	PASS
11A	Ant1	5745	30~5650	2606.21	-40.37	≤-27	PASS
11A	Ant1	5745	5925~40000	25696.16	-28.97	≤-27	PASS
11A	Ant1	5785	30~5650	3059.55	-39.56	≤-27	PASS
11A	Ant1	5785	5925~40000	25682.81	-29.3	≤-27	PASS
11A	Ant1	5825	30~5650	3031.45	-40.04	≤-27	PASS
11A	Ant1	5825	5925~40000	25115.19	-29.59	≤-27	PASS
11N20SISO	Ant1	5180	30~5140	3444.84	-39.79	≤-27	PASS
11N20SISO	Ant1	5180	5360~40000	25770.13	-33.35	≤-27	PASS
11N20SISO	Ant1	5200	30~5140	2860.94	-38.96	≤-27	PASS
11N20SISO	Ant1	5200	5360~40000	25703.76	-32.77	≤-27	PASS
11N20SISO	Ant1	5240	30~5140	3066.36	-38.9	≤-27	PASS
11N20SISO	Ant1	5240	5360~40000	25746.32	-32.73	≤-27	PASS
11N20SISO	Ant1	5745	30~5650	3218.98	-41.05	≤-27	PASS
11N20SISO	Ant1	5745	5925~40000	25759.39	-29.65	≤-27	PASS
11N20SISO	Ant1	5785	30~5650	3223.28	-40.3	≤-27	PASS
11N20SISO	Ant1	5785	5925~40000	25204.41	-30	≤-27	PASS
11N20SISO	Ant1	5825	30~5650	3066.49	-40.56	≤-27	PASS
11N20SISO	Ant1	5825	5925~40000	25783.97	-29.24	≤-27	PASS
11N40SISO	Ant1	5190	30~5140	5135.06	-37.93	≤-27	PASS
11N40SISO	Ant1	5190	5360~40000	25804.03	-32.34	≤-27	PASS
11N40SISO	Ant1	5230	30~5140	3334.47	-38.86	≤-27	PASS
11N40SISO	Ant1	5230	5360~40000	25737.67	-31.87	≤-27	PASS
11N40SISO	Ant1	5755	30~5650	3302.71	-40.54	≤-27	PASS
11N40SISO	Ant1	5755	5925~40000	25684.22	-30.62	≤-27	PASS
11N40SISO	Ant1	5795	30~5650	3080.91	-40.56	≤-27	PASS
11N40SISO	Ant1	5795	5925~40000	25640.66	-29.5	≤-27	PASS
11AC20SISO	Ant1	5180	30~5140	1736.57	-28.73	≤-27	PASS
11AC20SISO	Ant1	5180	5360~40000	25223.36	-32.42	≤-27	PASS
11AC20SISO	Ant1	5200	30~5140	3190.54	-38.91	≤-27	PASS
11AC20SISO	Ant1	5200	5360~40000	25752.09	-33.16	≤-27	PASS
11AC20SISO	Ant1	5240	30~5140	3877.66	-38.45	≤-27	PASS
11AC20SISO	Ant1	5240	5360~40000	25719.63	-32.16	≤-27	PASS
11AC20SISO	Ant1	5745	30~5650	3296.91	-40.89	≤-27	PASS
11AC20SISO	Ant1	5745	5925~40000	25675.79	-29.88	≤-27	PASS
11AC20SISO	Ant1	5785	30~5650	3190.69	-40.36	≤-27	PASS
11AC20SISO	Ant1	5785	5925~40000	25172.8	-29.62	≤-27	PASS
11AC20SISO	Ant1	5825	30~5650	3303.28	-40.83	≤-27	PASS
11AC20SISO	Ant1	5825	5925~40000	25122.22	-30.19	≤-27	PASS
11AC40SISO	Ant1	5190	30~5140	5138.81	-31.72	≤-27	PASS
11AC40SISO	Ant1	5190	5360~40000	25672.03	-32.66	≤-27	PASS
11AC40SISO	Ant1	5230	30~5140	3208.25	-39.24	≤-27	PASS
11AC40SISO	Ant1	5230	5360~40000	25165.65	-32.3	≤-27	PASS
11AC40SISO	Ant1	5755	30~5650	3883.07	-39.83	≤-27	PASS
11AC40SISO	Ant1	5755	5925~40000	25689.14	-30.6	≤-27	PASS
11AC40SISO	Ant1	5795	30~5650	3191.81	-40.24	≤-27	PASS
11AC40SISO	Ant1	5795	5925~40000	25118	-29.32	≤-27	PASS

Note: 27~40GHz at least have 20dB margin. No recording in the test report.




Test Graphs:

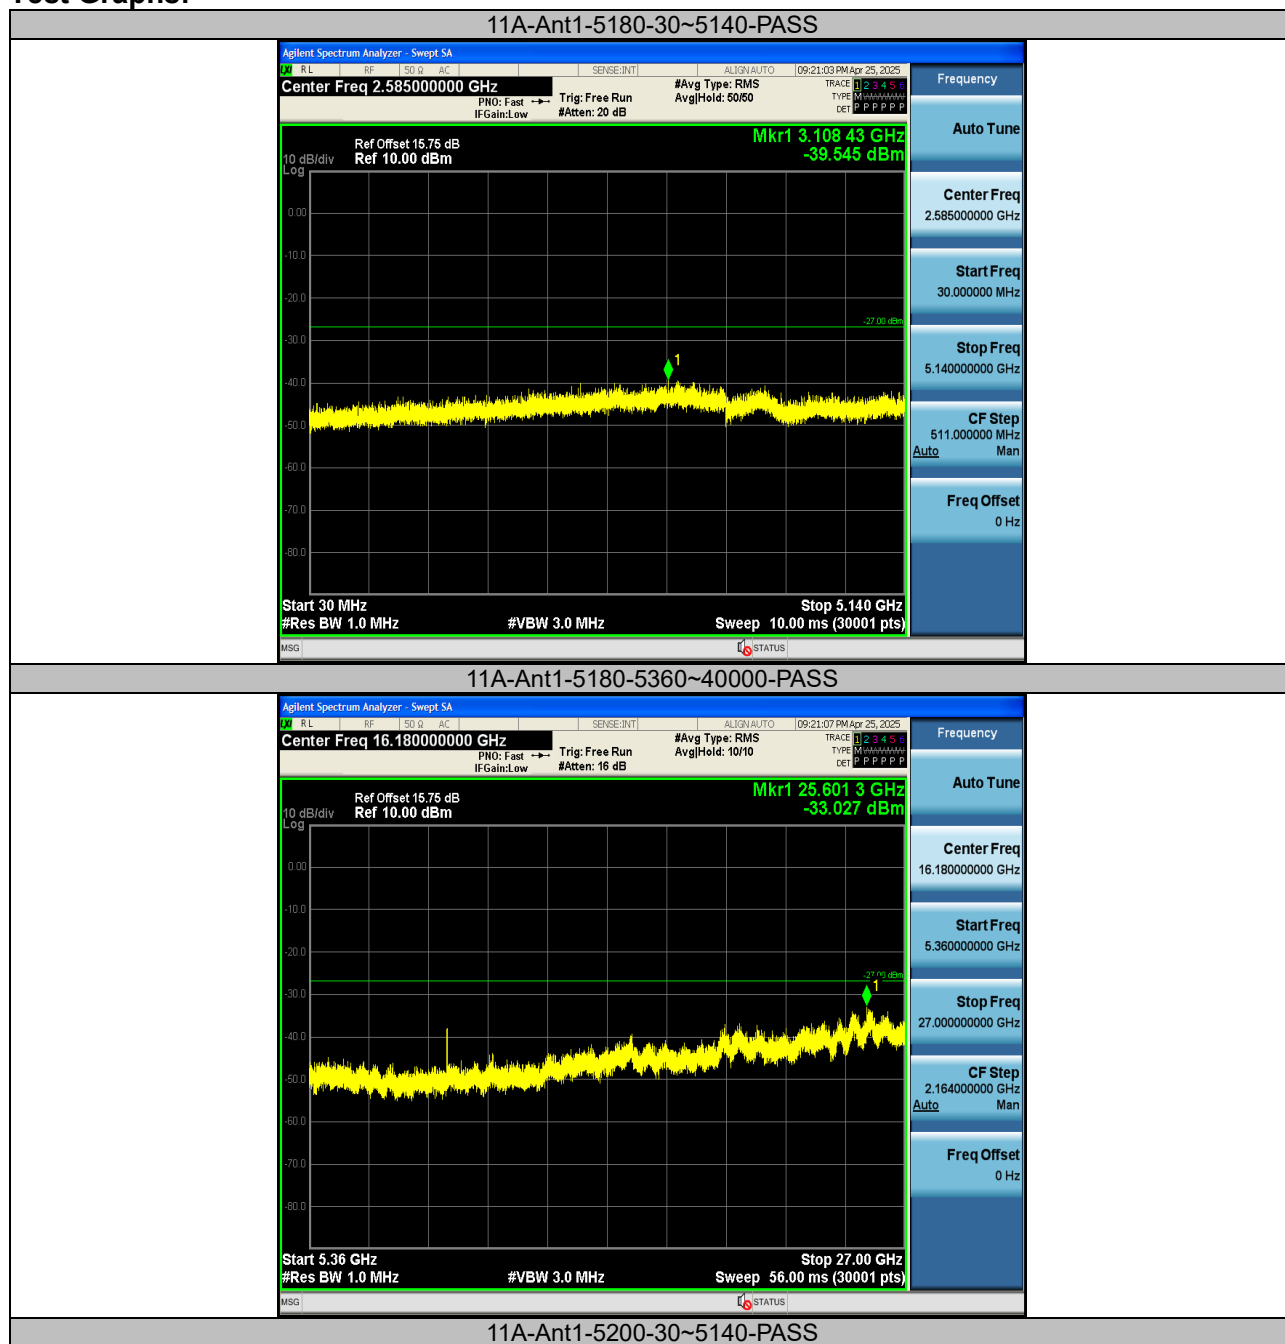


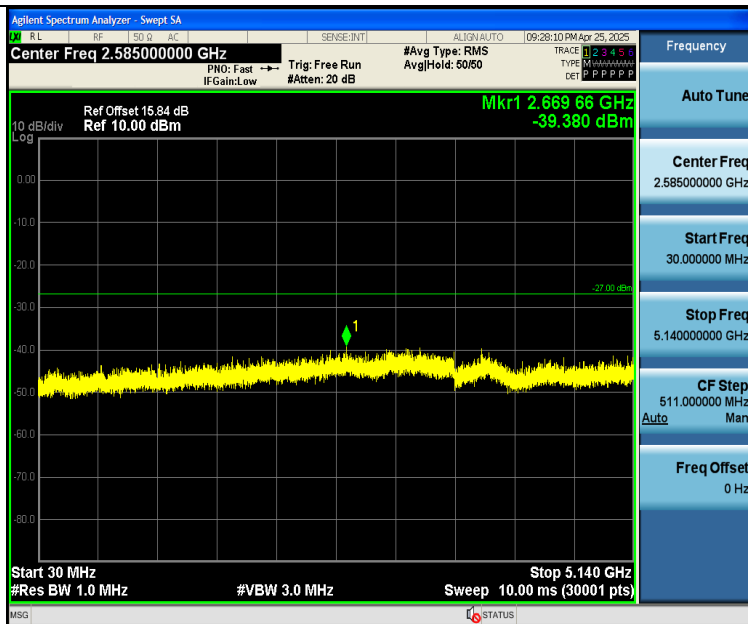

11A-Ant1-5200-5360~40000-PASS

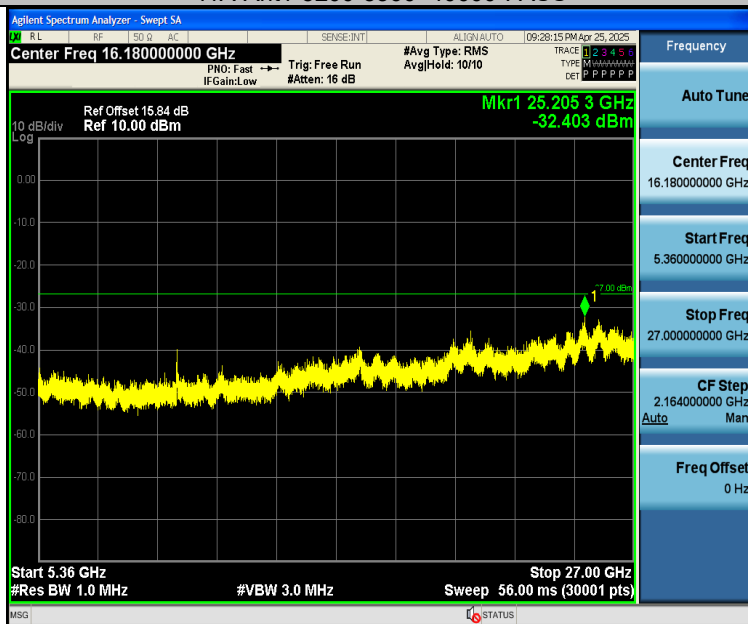


11A-Ant1-5240-30~5140-PASS

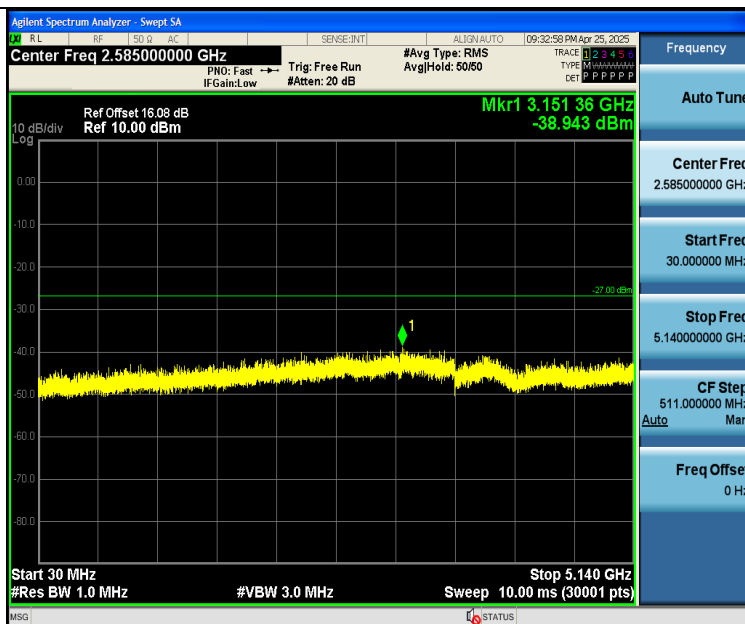


11A-Ant1-5240-5360~40000-PASS




11A-Ant1-5745-30~5650-PASS

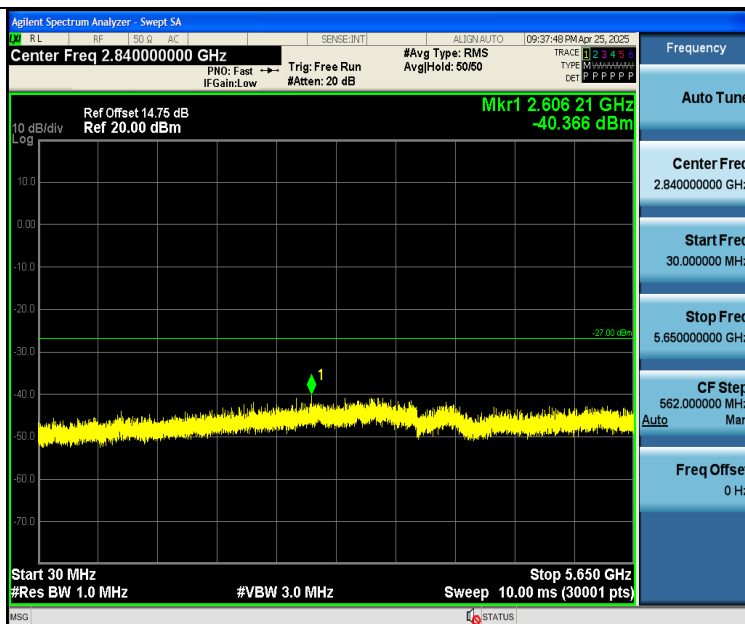


11A-Ant1-5745-5925~40000-PASS

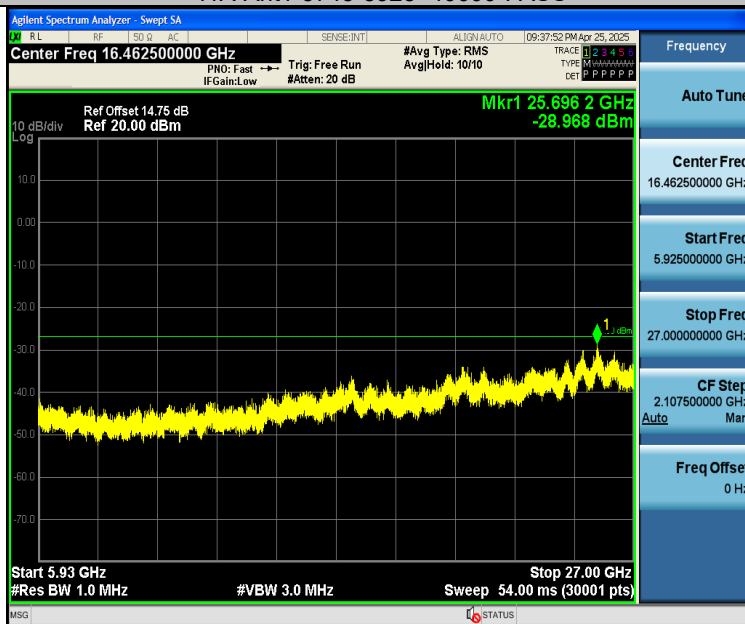


11A-Ant1-5785-30~5650-PASS

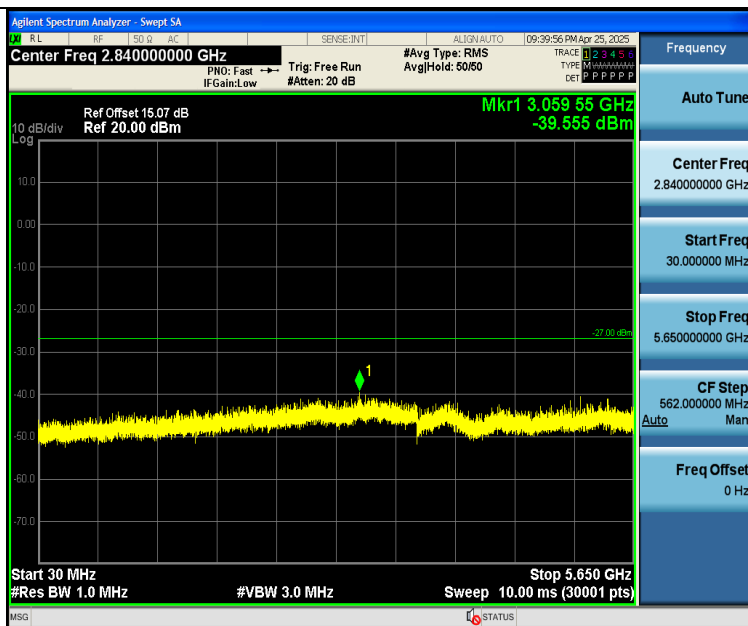


11A-Ant1-5785-5925~40000-PASS

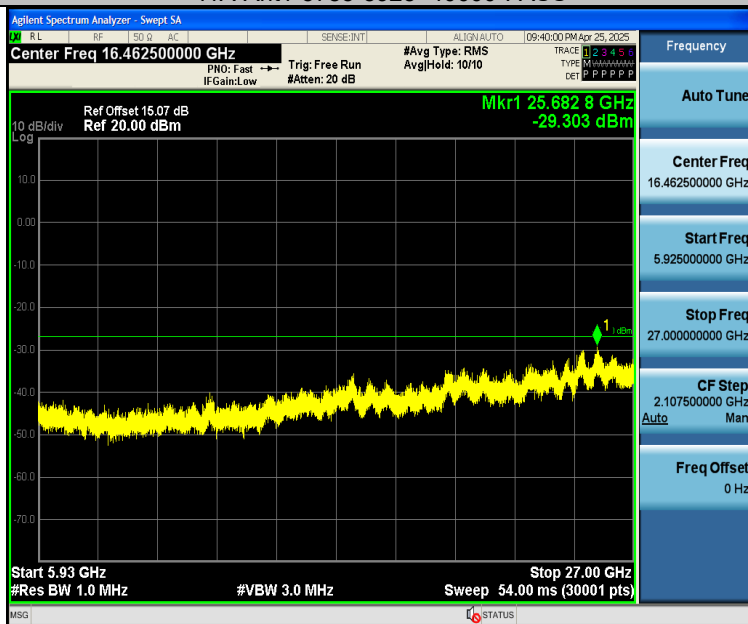


11A-Ant1-5825-30~5650-PASS

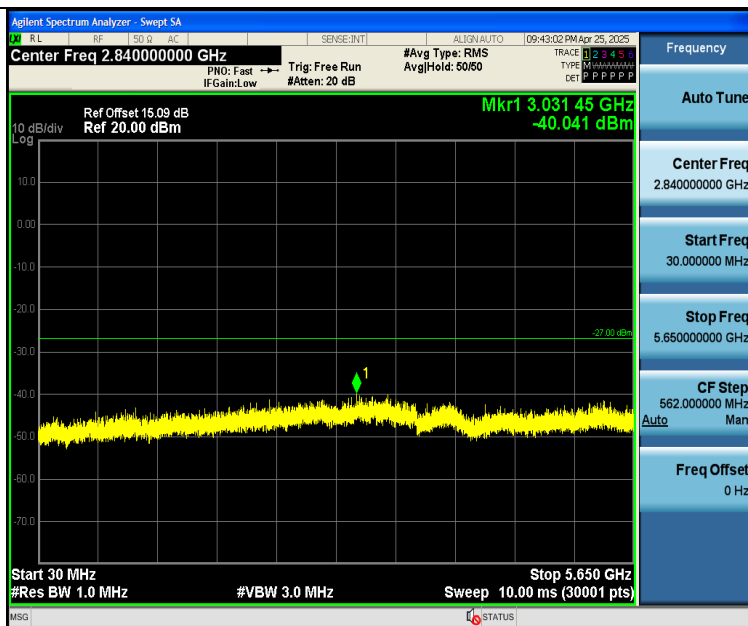


11A-Ant1-5825-5925~40000-PASS

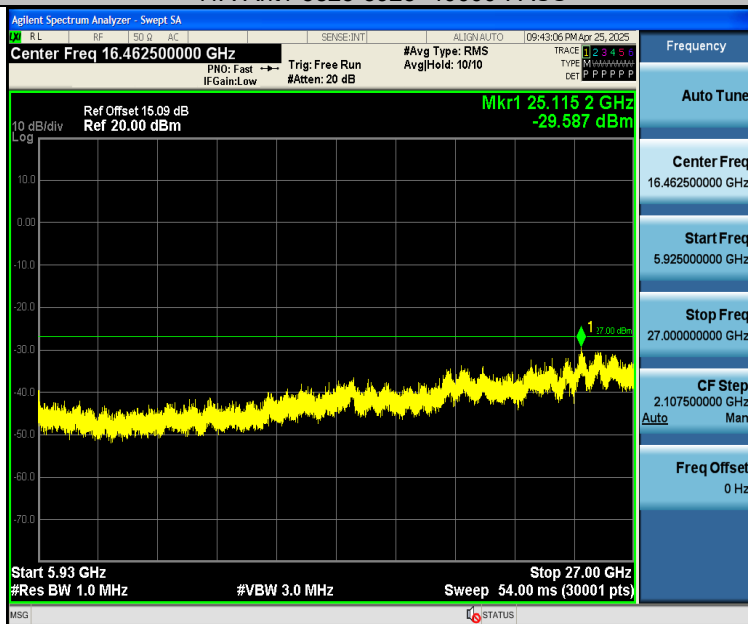


11N20SISO-Ant1-5180-30~5140-PASS

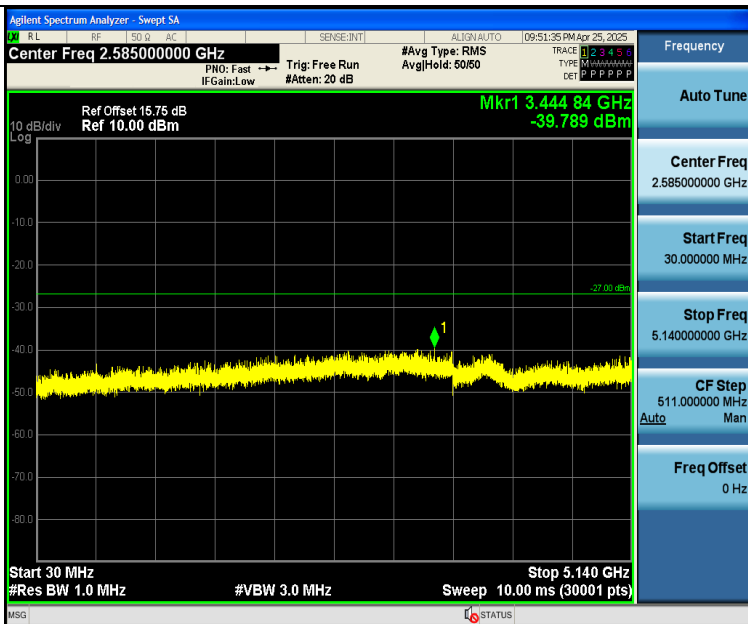


11N20SISO-Ant1-5180-5360~40000-PASS

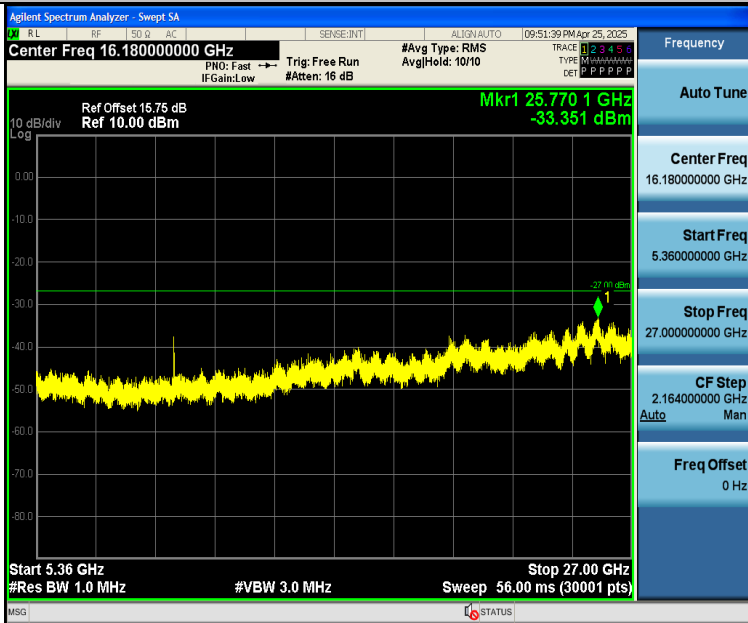


11N20SISO-Ant1-5200-30~5140-PASS

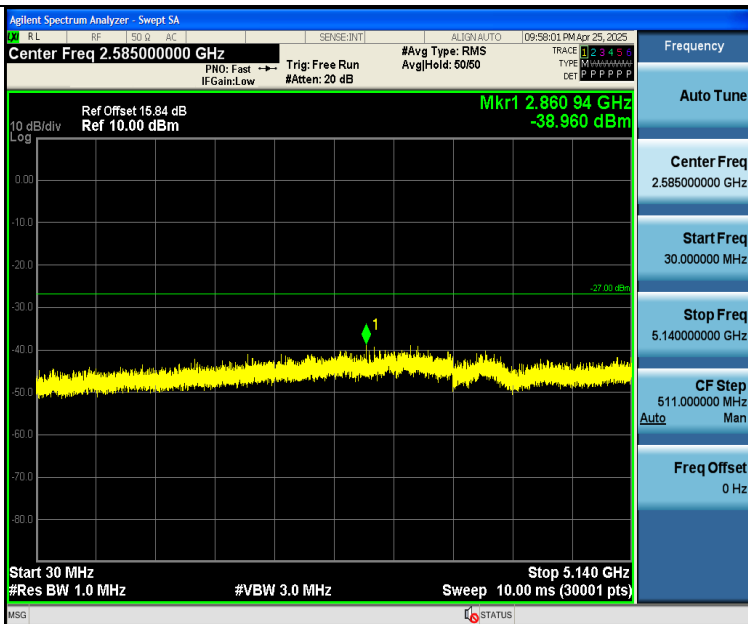


11N20SISO-Ant1-5200-5360~40000-PASS

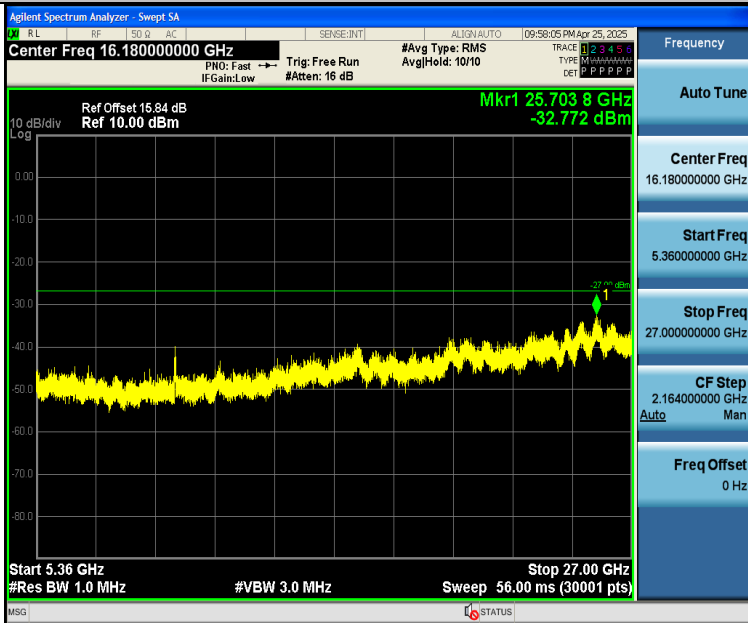


11N20SISO-Ant1-5240-30~5140-PASS

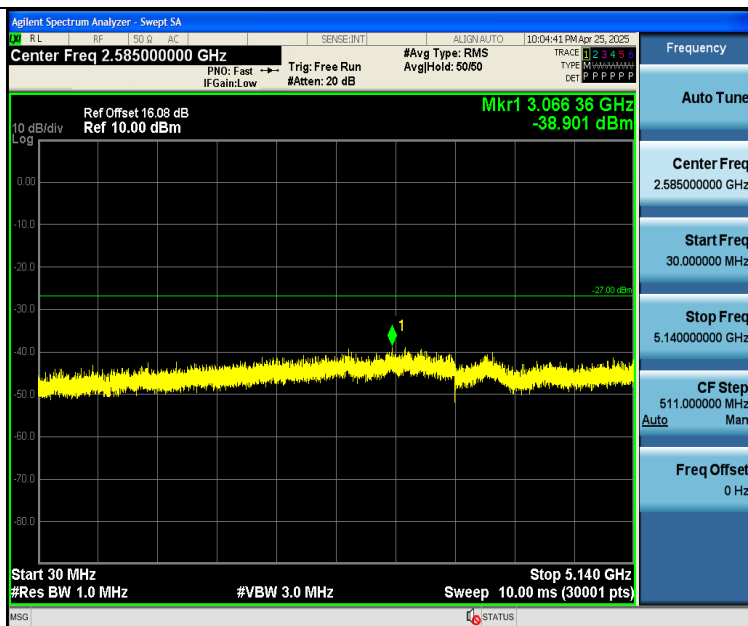


11N20SISO-Ant1-5240-5360~40000-PASS

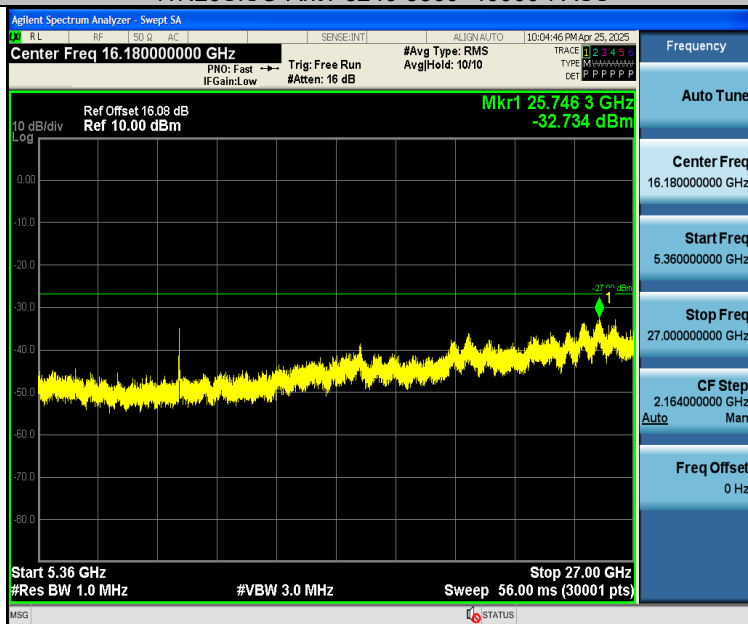


11N20SISO-Ant1-5745-30~5650-PASS

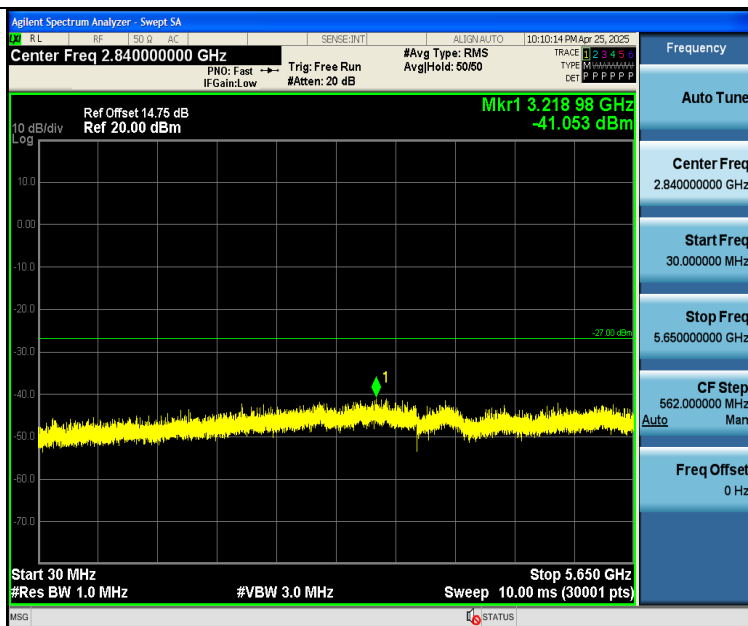


11N20SISO-Ant1-5745-5925~40000-PASS

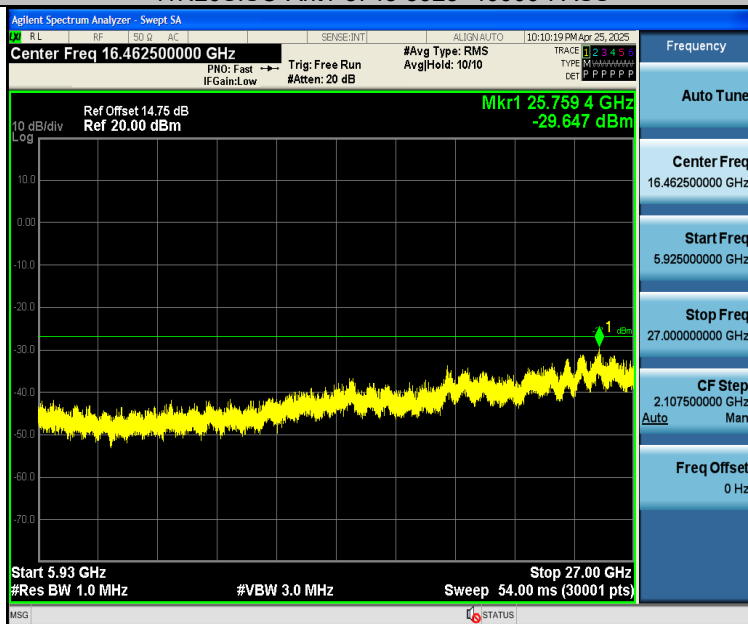


11N20SISO-Ant1-5785-30~5650-PASS

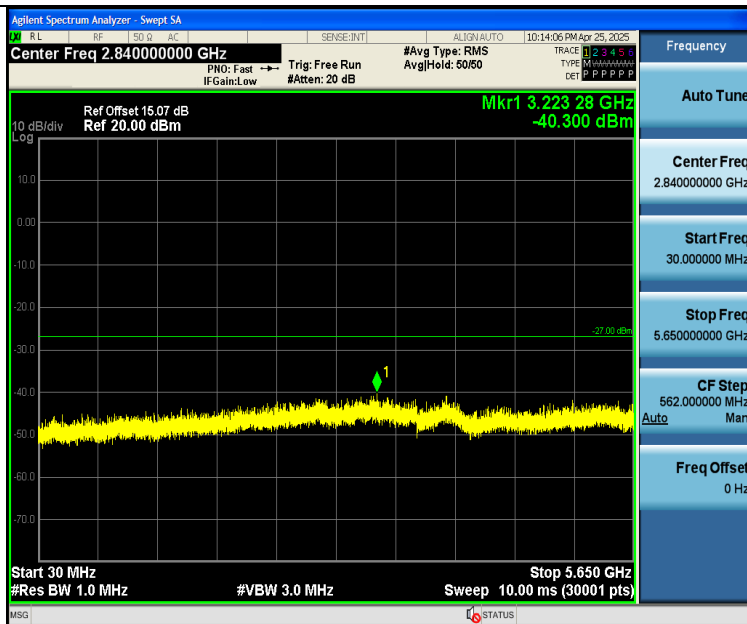


11N20SISO-Ant1-5785-5925~40000-PASS

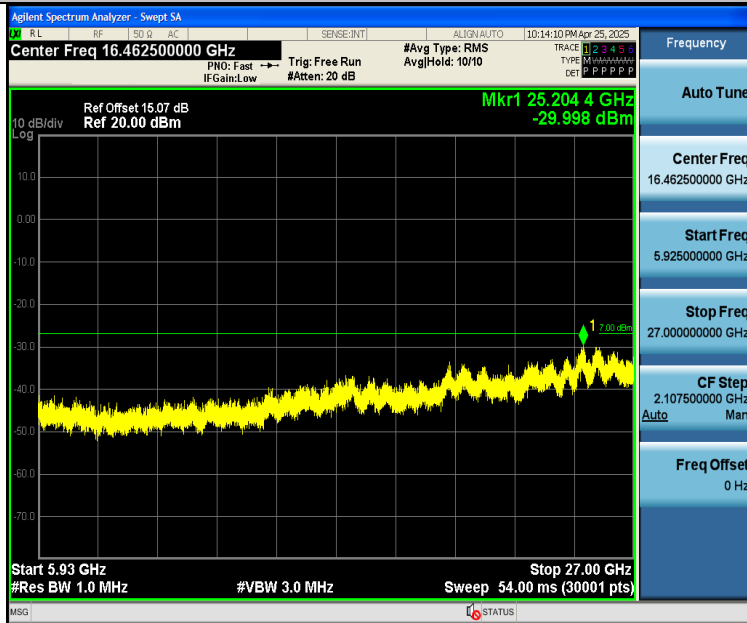


11N20SISO-Ant1-5825-30~5650-PASS

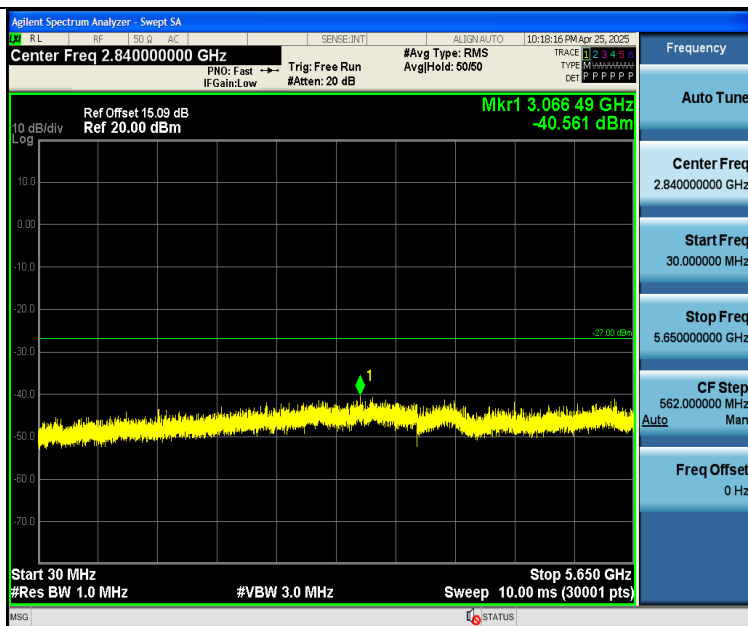

11N20SISO-Ant1-5825-5925~40000-PASS

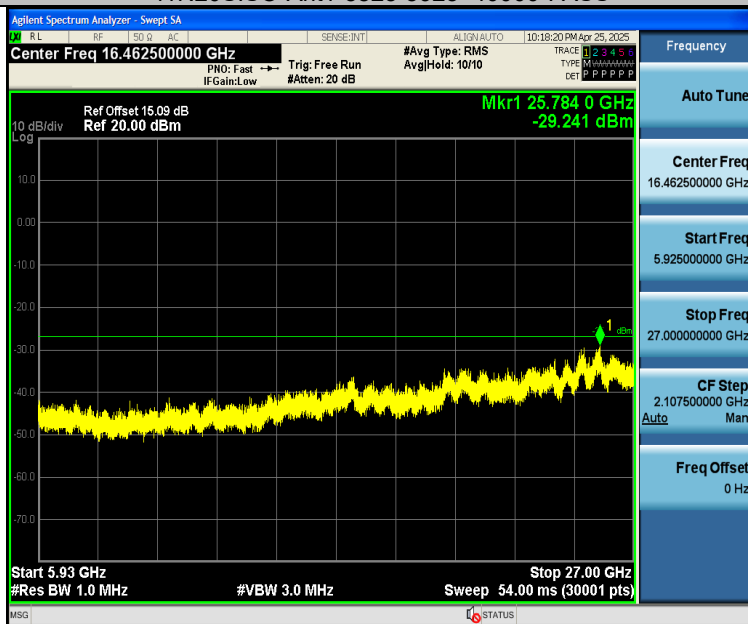


11N40SISO-Ant1-5190-30~5140-PASS

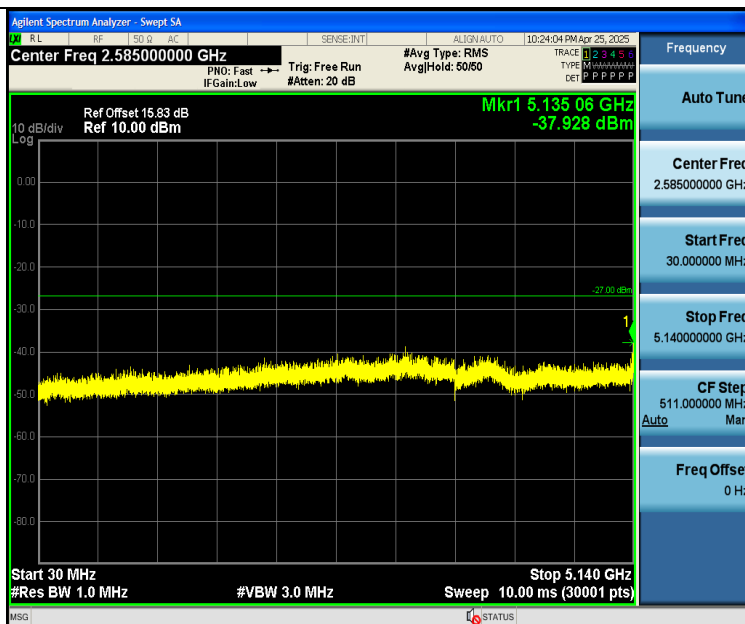


11N40SISO-Ant1-5190-5360~40000-PASS




11N40SISO-Ant1-5230-30~5140-PASS

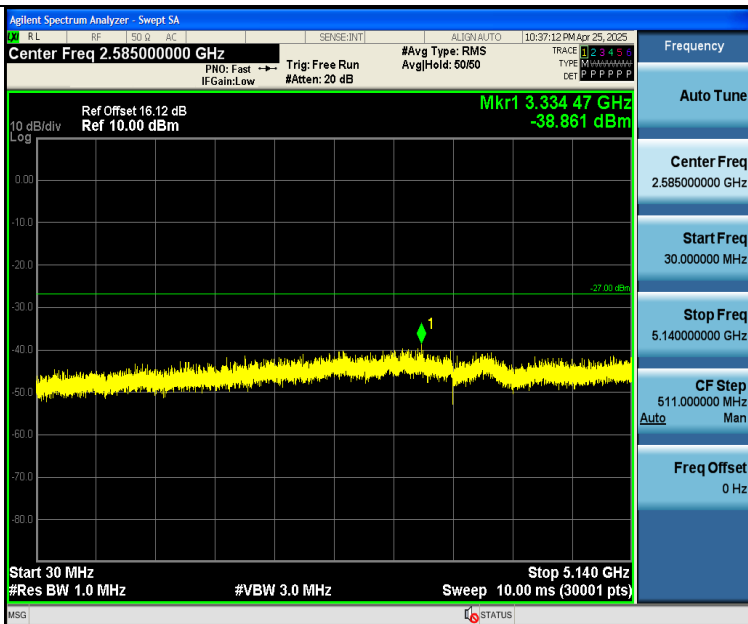


11N40SISO-Ant1-5230-5360~40000-PASS

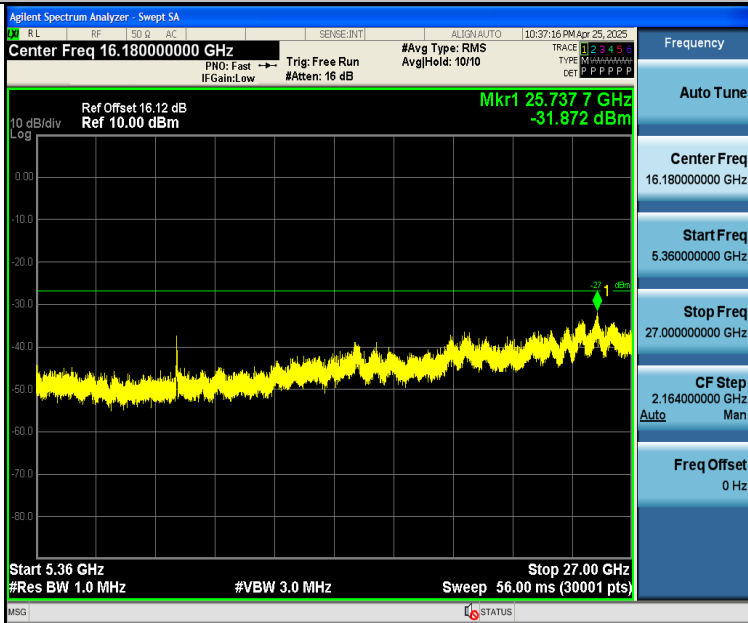


11N40SISO-Ant1-5755-30~5650-PASS

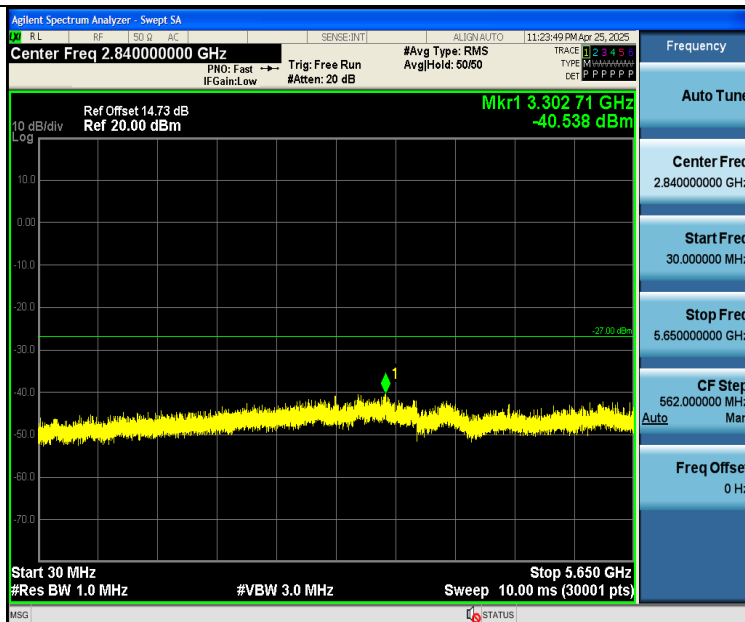


11N40SISO-Ant1-5755-5925~40000-PASS

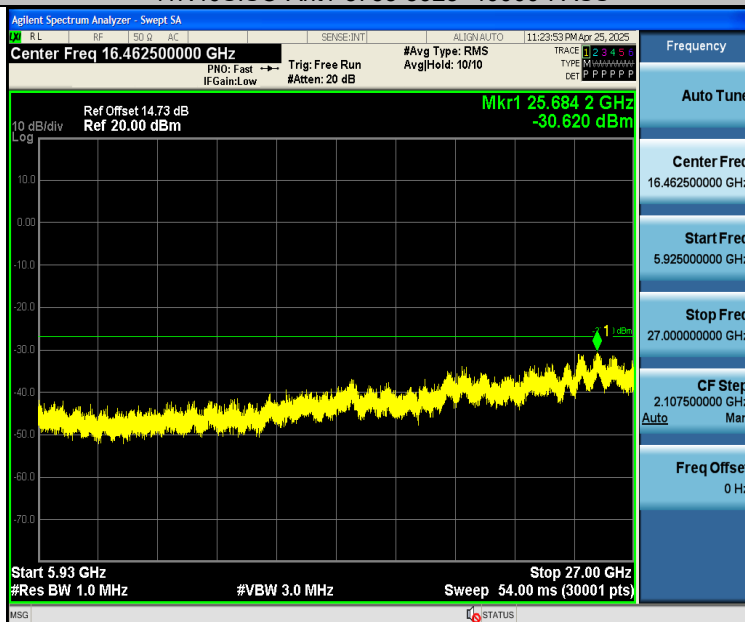


11N40SISO-Ant1-5795-30~5650-PASS

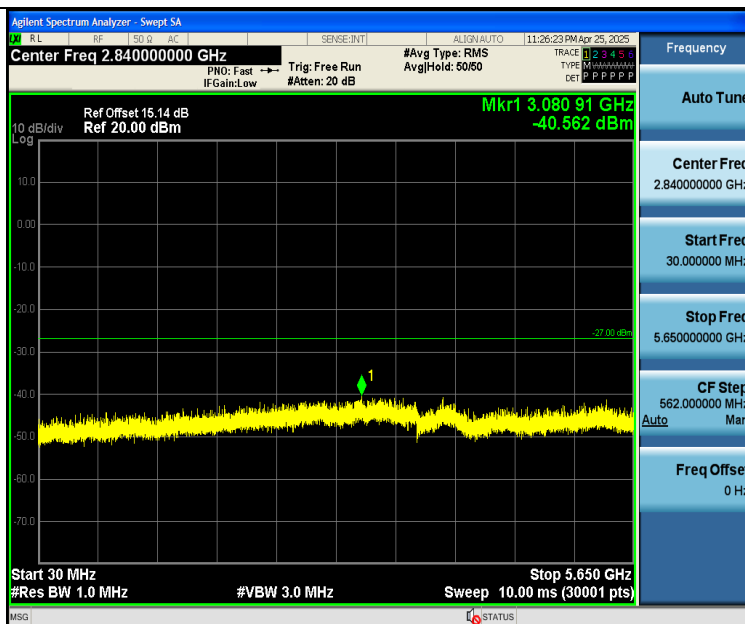


11N40SISO-Ant1-5795-5925~40000-PASS

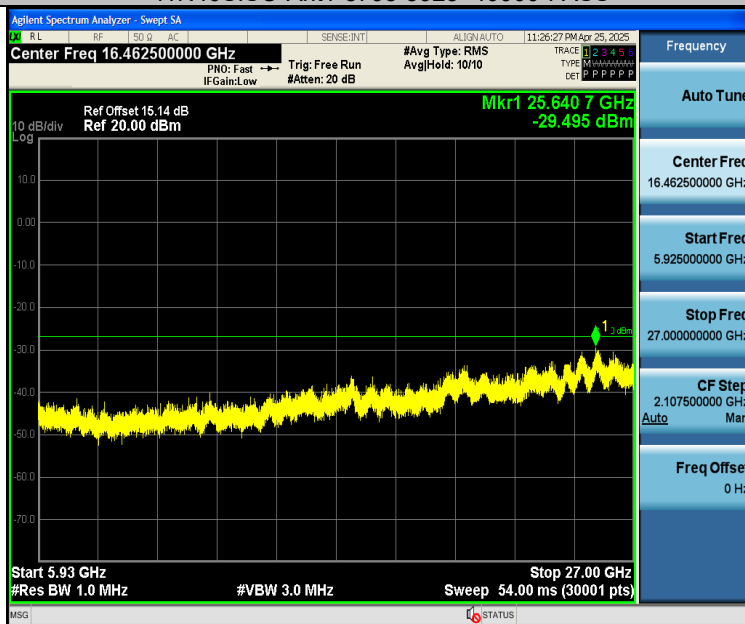


11AC20SISO-Ant1-5180-30~5140-PASS

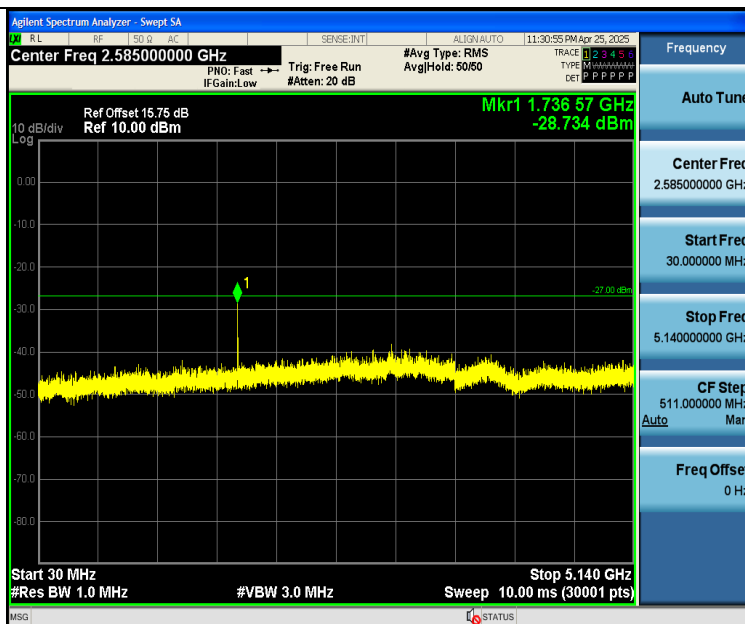


11AC20SISO-Ant1-5180-5360~40000-PASS

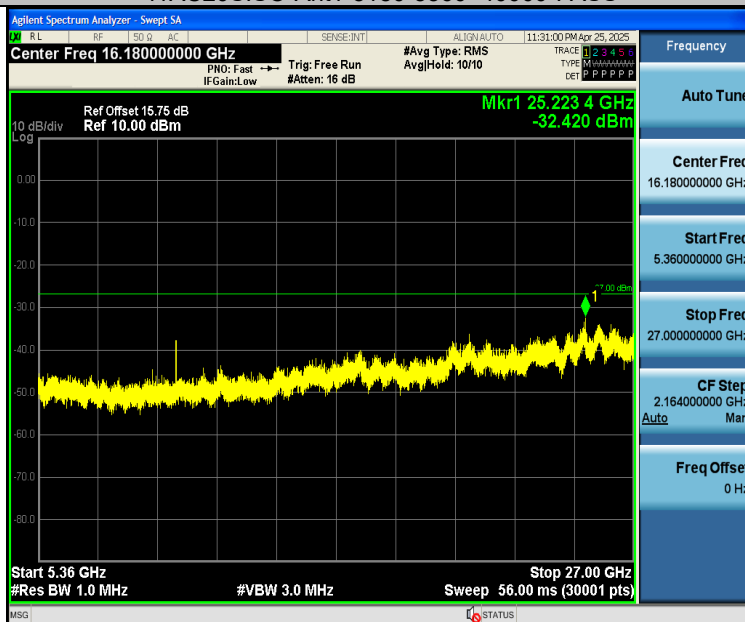


11AC20SISO-Ant1-5200-30~5140-PASS

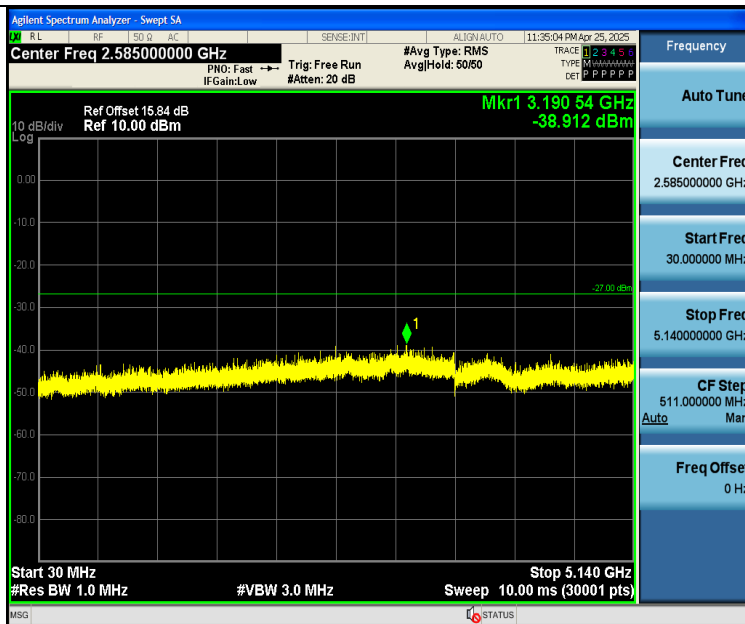


11AC20SISO-Ant1-5200-5360~40000-PASS

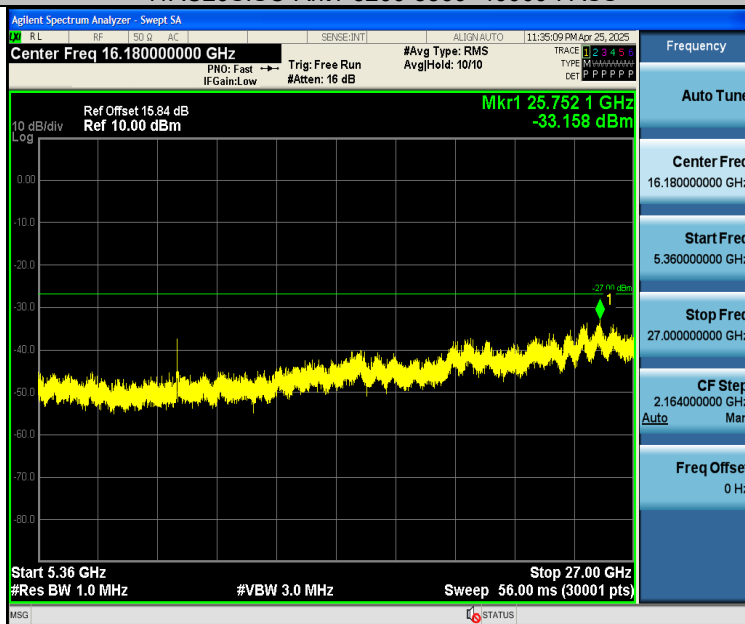


11AC20SISO-Ant1-5240-30~5140-PASS

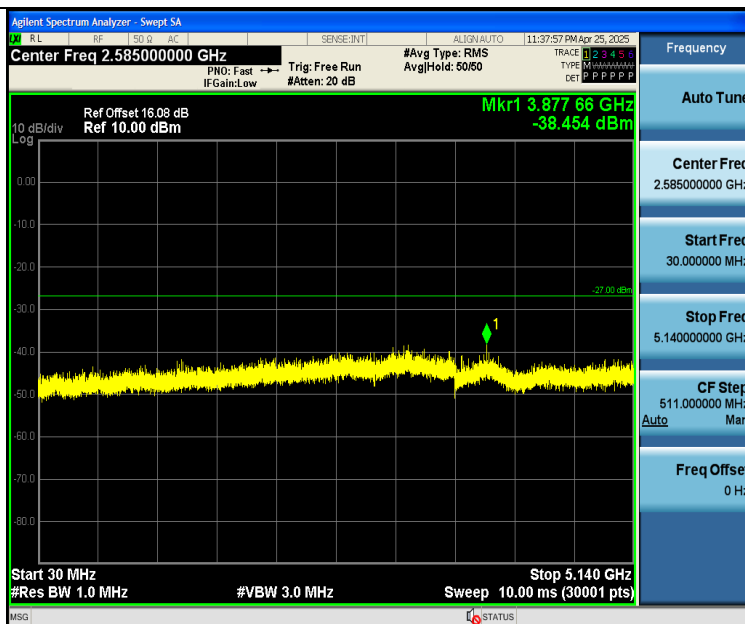


11AC20SISO-Ant1-5240-5360~40000-PASS

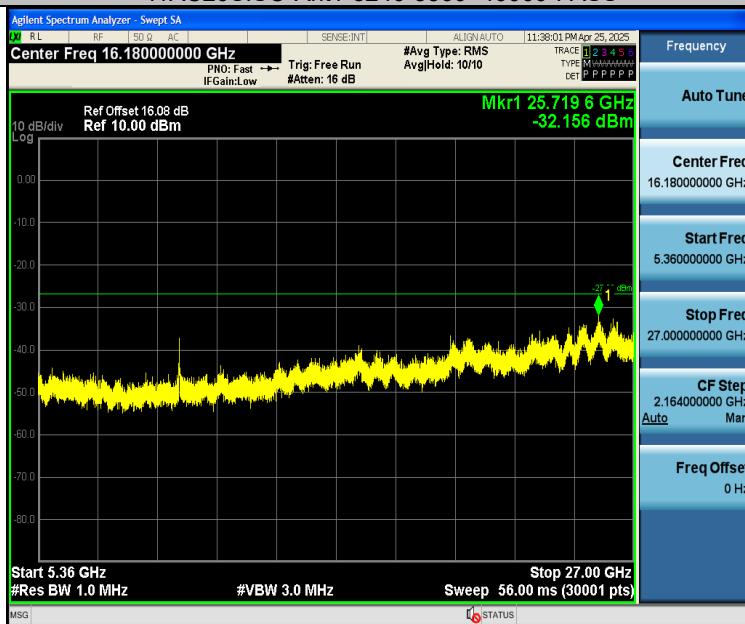


11AC20SISO-Ant1-5745-30~5650-PASS

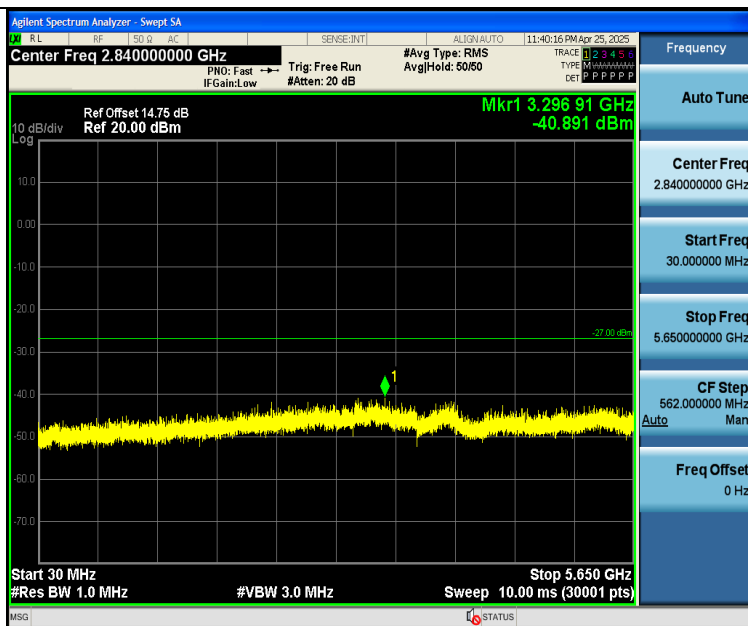


11AC20SISO-Ant1-5745-5925~40000-PASS

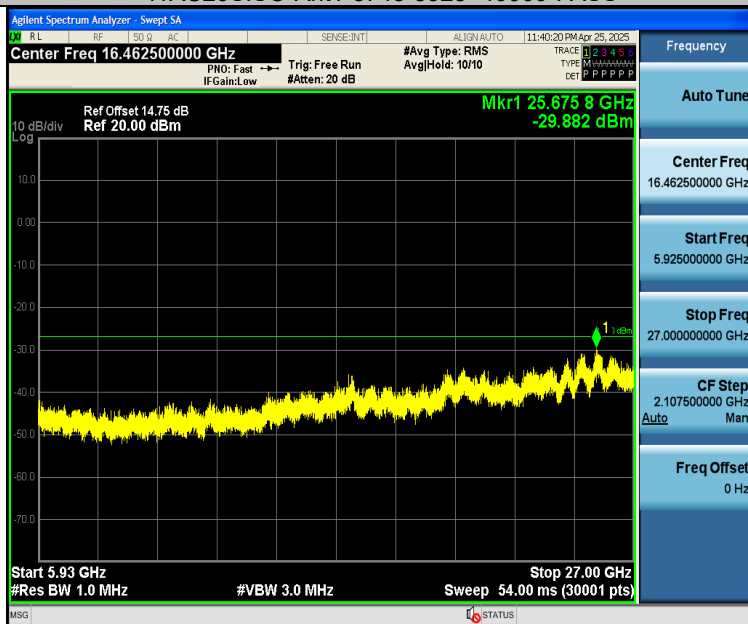


11AC20SISO-Ant1-5785-30~5650-PASS

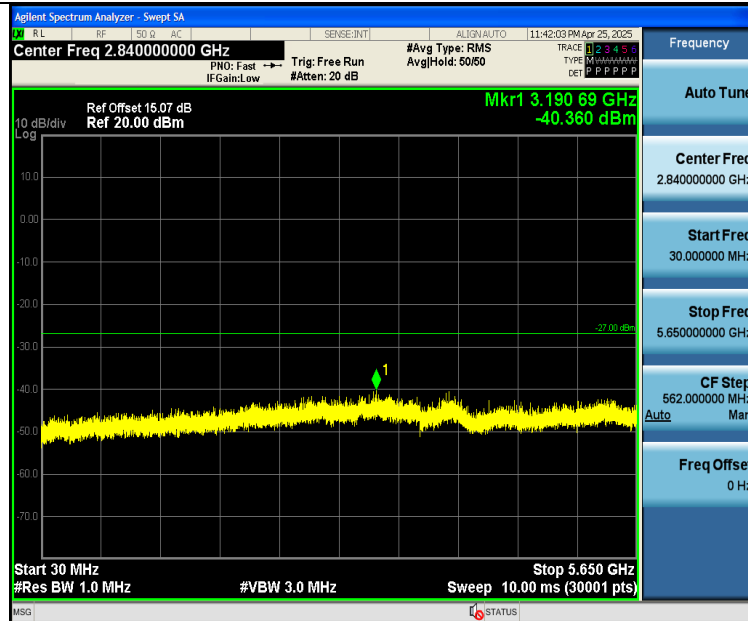


11AC20SISO-Ant1-5785-5925~40000-PASS

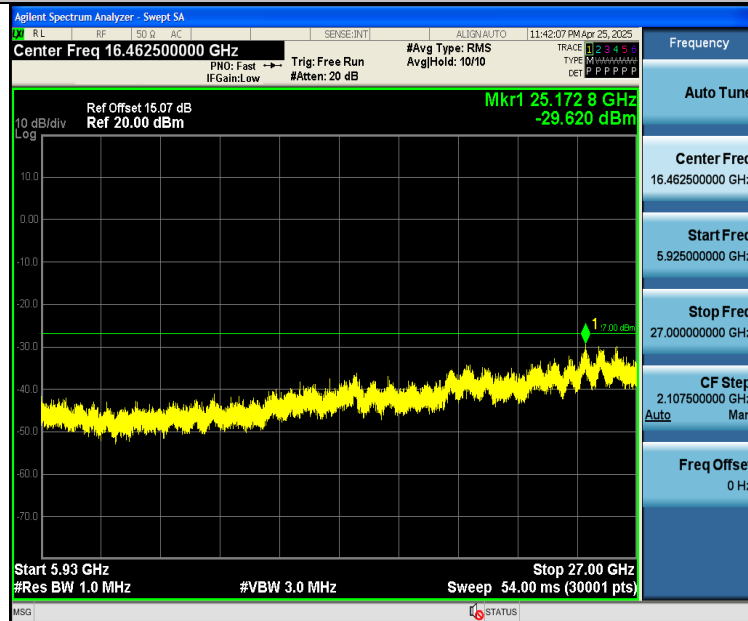

11AC20SISO-Ant1-5825-30~5650-PASS

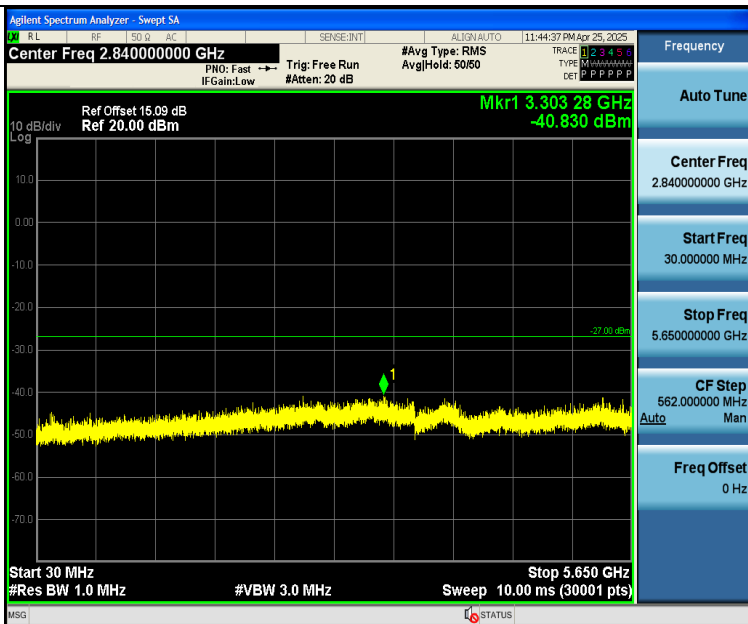


11AC20SISO-Ant1-5825-5925~40000-PASS

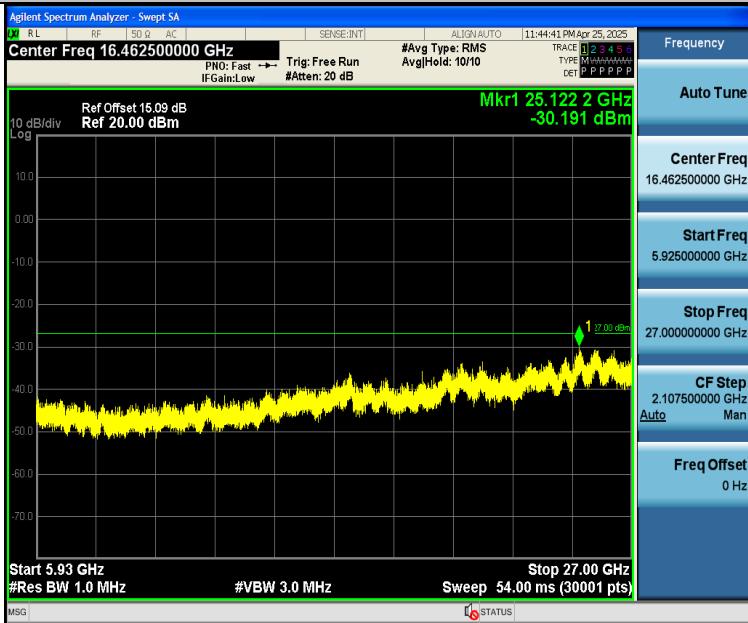

11AC40SISO-Ant1-5190-30~5140-PASS



11AC40SISO-Ant1-5190-5360~40000-PASS

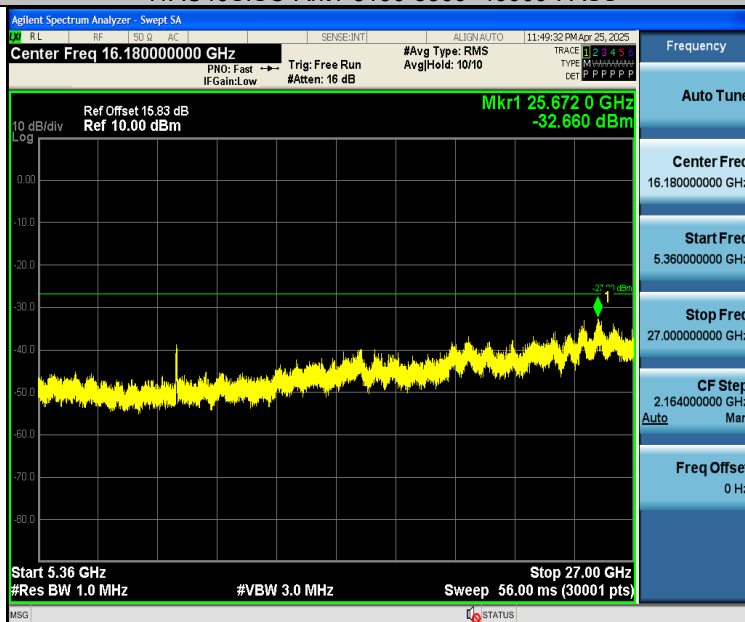


11AC40SISO-Ant1-5230-30~5140-PASS




11AC40SISO-Ant1-5230-5360~40000-PASS




11AC40SISO-Ant1-5755-30~5650-PASS

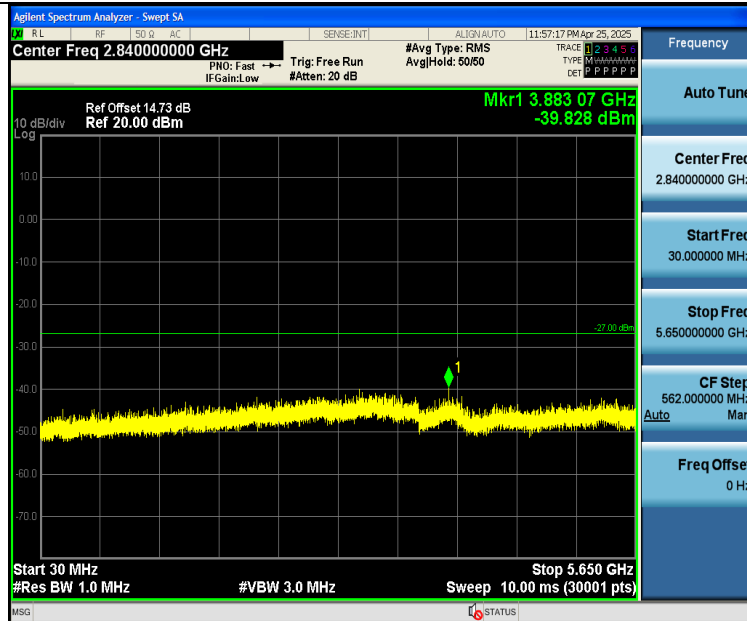

11AC40SISO-Ant1-5755-5925~40000-PASS

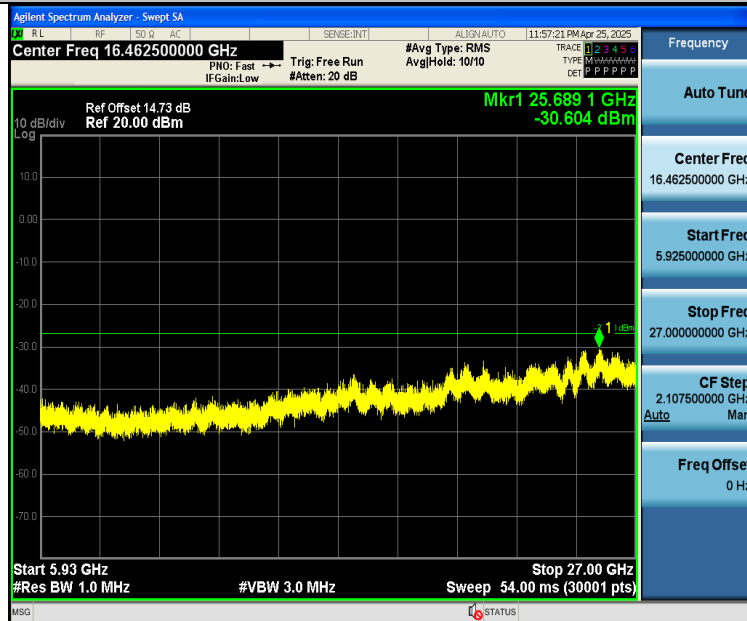

11AC40SISO-Ant1-5795-30~5650-PASS

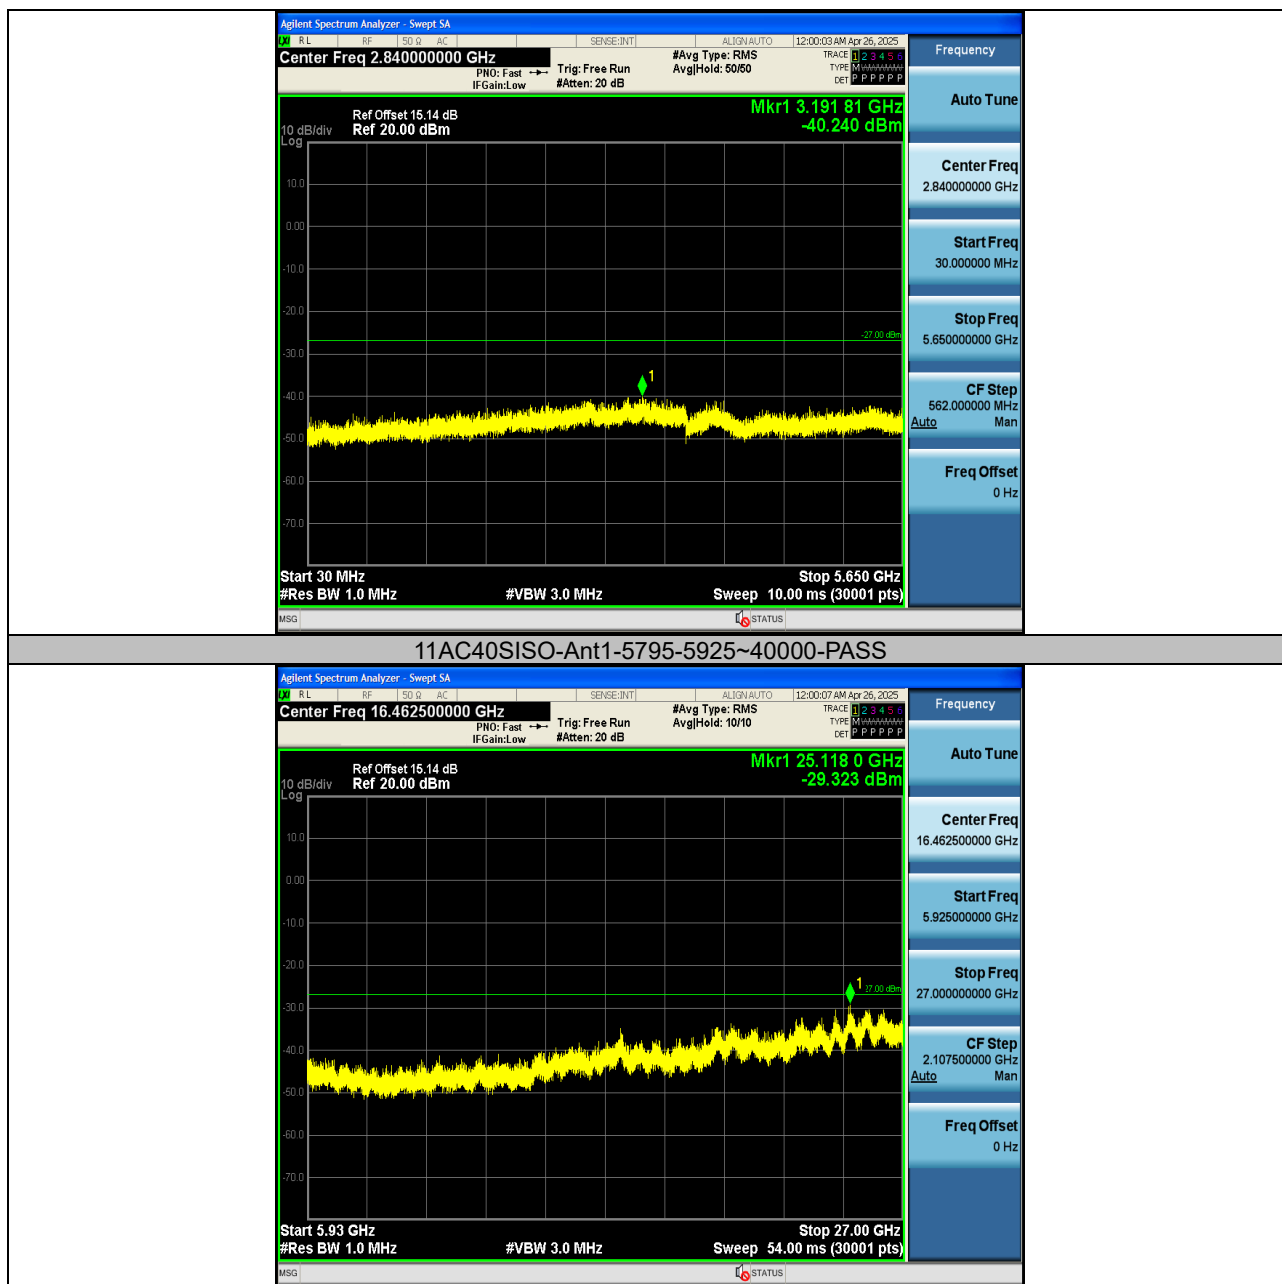

Note: 27~40GHz at least have 20dB margin. No recording in the test report.



6.6 Band edge measurements

Test Result:

TestMode	Antenna	ChName	Frequency[MHz]	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	Low	5180	-38.9	≤ -27	PASS
11A	Ant1	High	5240	-39.02	≤ -27	PASS
11N20SISO	Ant1	Low	5180	-38.55	≤ -27	PASS
11N20SISO	Ant1	High	5240	-38.84	≤ -27	PASS
11N40SISO	Ant1	Low	5190	-36.64	≤ -27	PASS
11N40SISO	Ant1	High	5230	-38.88	≤ -27	PASS
11AC20SISO	Ant1	Low	5180	-39.19	≤ -27	PASS
11AC20SISO	Ant1	High	5240	-39.2	≤ -27	PASS
11AC40SISO	Ant1	Low	5190	-36.8	≤ -27	PASS
11AC40SISO	Ant1	High	5230	-38.13	≤ -27	PASS

TestMode	Antenna	ChName	Frequency[MHz]	FreqRange [MHz]	Result [dBm]	Limit [dBm]	Verdict
11A	Ant1	Low	5745	5720~5725	-37.97	≤ 25.52	PASS
11A	Ant1	Low	5745	5700~5720	-39.61	≤ 12.08	PASS
11A	Ant1	Low	5745	5650~5700	-40.55	≤ -9.51	PASS
11A	Ant1	Low	5745	5760~5650	-42.89	≤ -27	PASS
11A	Ant1	High	5825	5850~5855	-40.49	≤ 26.26	PASS
11A	Ant1	High	5825	5855~5875	-39.81	≤ 12.86	PASS
11A	Ant1	High	5825	5875~5925	-39.41	≤ -18.26	PASS
11A	Ant1	High	5825	5925~5935	-40.24	≤ -27	PASS
11N20SISO	Ant1	Low	5745	5720~5725	-37.55	≤ 24.99	PASS
11N20SISO	Ant1	Low	5745	5700~5720	-39.91	≤ 15.59	PASS
11N20SISO	Ant1	Low	5745	5650~5700	-40.65	≤ -26.87	PASS
11N20SISO	Ant1	Low	5745	5760~5650	-42.88	≤ -27	PASS
11N20SISO	Ant1	High	5825	5850~5855	-39.9	≤ 25.34	PASS
11N20SISO	Ant1	High	5825	5855~5875	-39.27	≤ 10.17	PASS
11N20SISO	Ant1	High	5825	5875~5925	-39.78	≤ -3.28	PASS
11N20SISO	Ant1	High	5825	5925~5935	-38.86	≤ -27	PASS
11N40SISO	Ant1	Low	5755	5720~5725	-33.35	≤ 24.97	PASS
11N40SISO	Ant1	Low	5755	5700~5720	-35.3	≤ 15.58	PASS
11N40SISO	Ant1	Low	5755	5650~5700	-41	≤ 7.66	PASS
11N40SISO	Ant1	Low	5755	5780~5650	-42.45	≤ -27	PASS
11N40SISO	Ant1	High	5795	5850~5855	-40.03	≤ 25.06	PASS
11N40SISO	Ant1	High	5795	5855~5875	-39.44	≤ 12.95	PASS
11N40SISO	Ant1	High	5795	5875~5925	-39.34	≤ 3.97	PASS
11N40SISO	Ant1	High	5795	5925~5935	-40.3	≤ -27	PASS
11AC20SISO	Ant1	Low	5745	5720~5725	-37.91	≤ 26.30	PASS
11AC20SISO	Ant1	Low	5745	5700~5720	-41.53	≤ 15.50	PASS
11AC20SISO	Ant1	Low	5745	5650~5700	-41.68	≤ 9.72	PASS
11AC20SISO	Ant1	Low	5745	5760~5650	-42.27	≤ -27	PASS
11AC20SISO	Ant1	High	5825	5850~5855	-39.7	≤ 17.33	PASS
11AC20SISO	Ant1	High	5825	5855~5875	-40.02	≤ 14.63	PASS
11AC20SISO	Ant1	High	5825	5875~5925	-39.26	≤ -1.38	PASS
11AC20SISO	Ant1	High	5825	5925~5935	-40.36	≤ -27	PASS
11AC40SISO	Ant1	Low	5755	5720~5725	-31.03	≤ 26.20	PASS
11AC40SISO	Ant1	Low	5755	5700~5720	-33.24	≤ 15.43	PASS
11AC40SISO	Ant1	Low	5755	5650~5700	-41.01	≤ -6.22	PASS
11AC40SISO	Ant1	Low	5755	5780~5650	-42.5	≤ -27	PASS




11AC40SISO	Ant1	High	5795	5850~5855	-39.67	≤ 24.69	PASS
11AC40SISO	Ant1	High	5795	5855~5875	-38.98	≤ 14.06	PASS
11AC40SISO	Ant1	High	5795	5875~5925	-39.56	≤ 6.53	PASS
11AC40SISO	Ant1	High	5795	5925~5935	-39.81	≤ -27	PASS

Note: 1.27~40GHz at least have 20dB margin. No recording in the test report.


2. The Max. Level has been corrected by the cable loss and antenna gain.




Test Graphs:

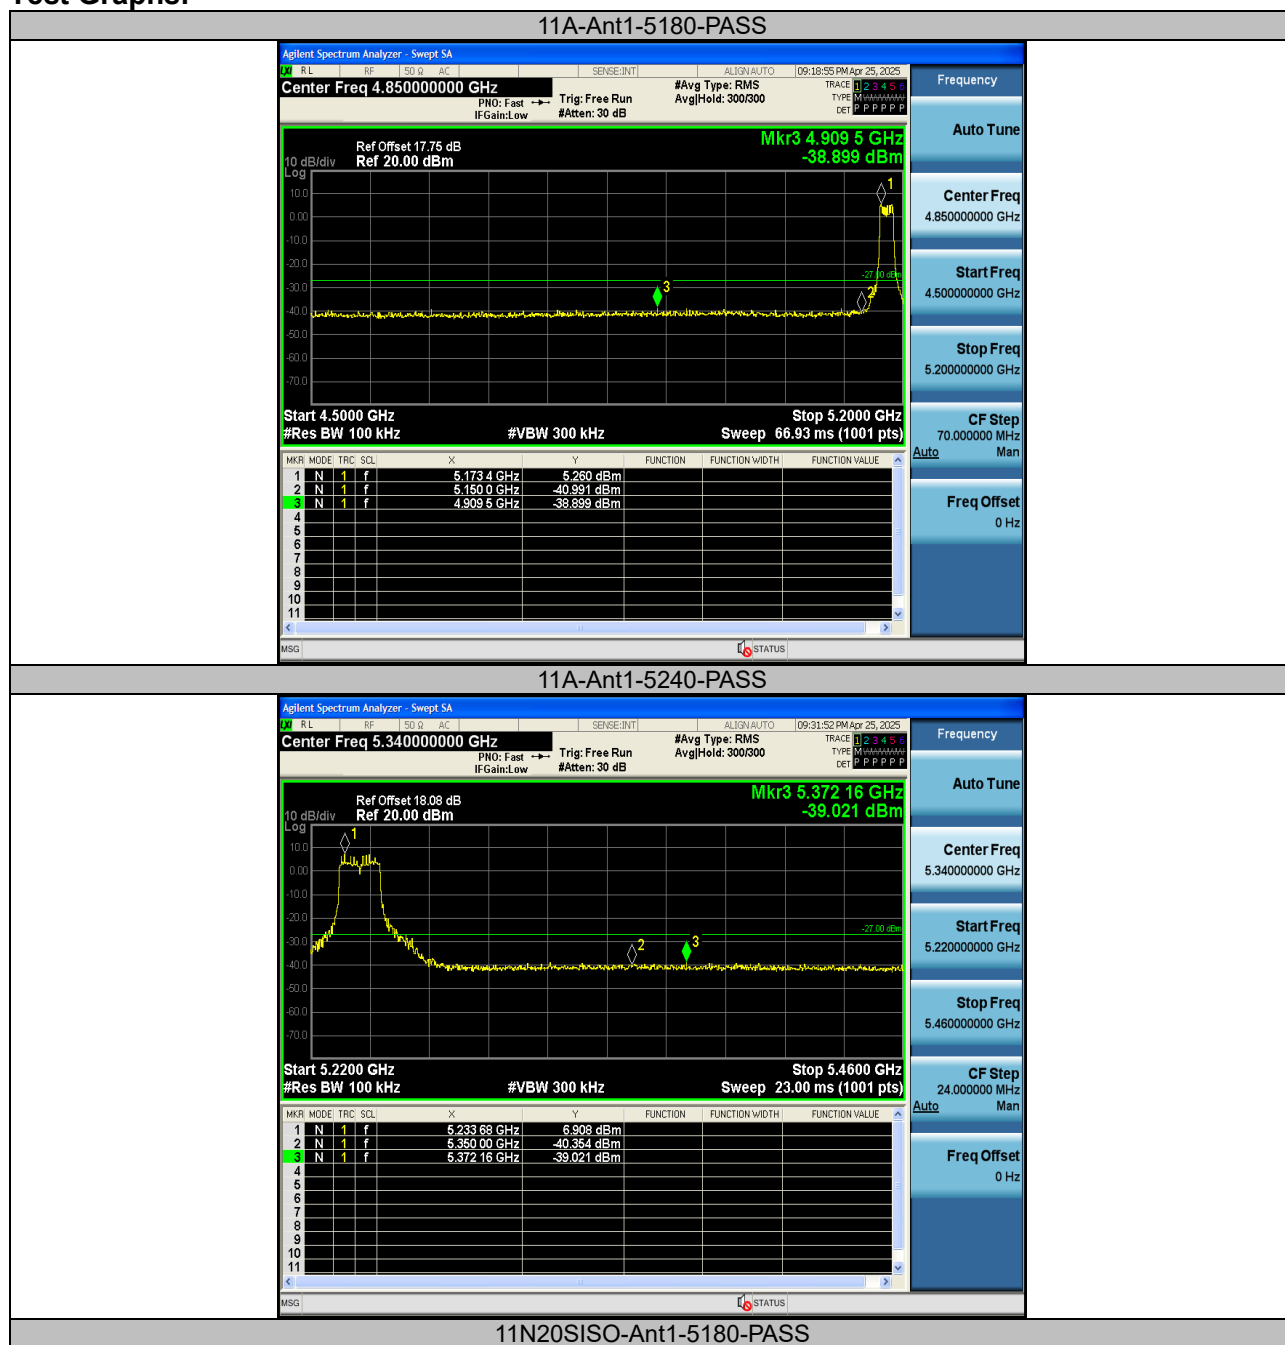


11N20SISO-Ant1-5180-PASS

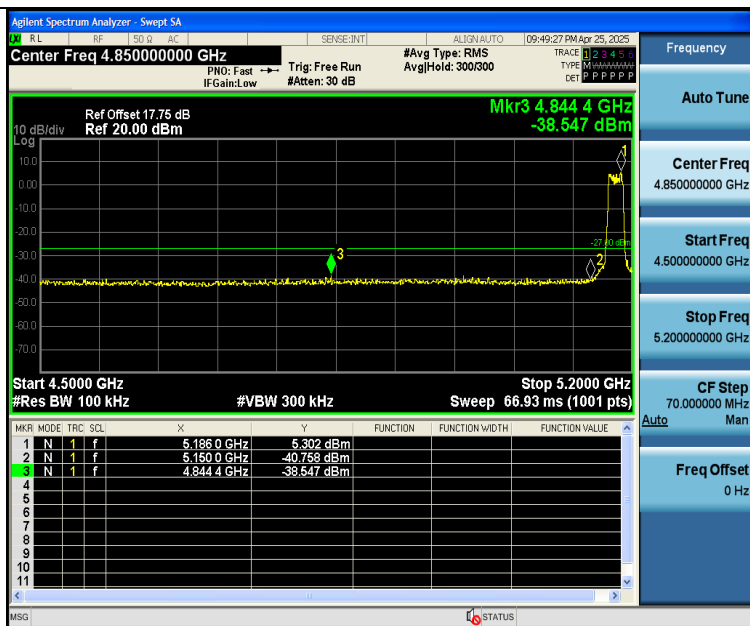


11N20SISO-Ant1-5240-PASS

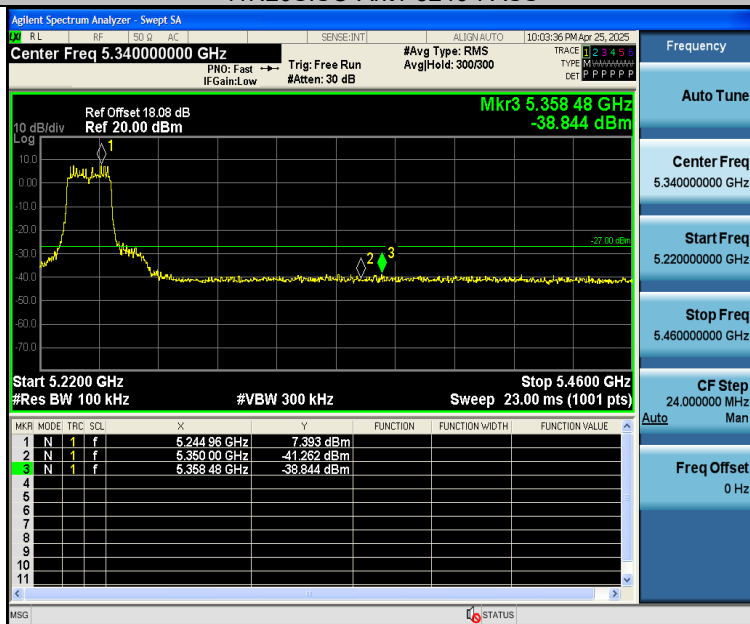


11N40SISO-Ant1-5190-PASS

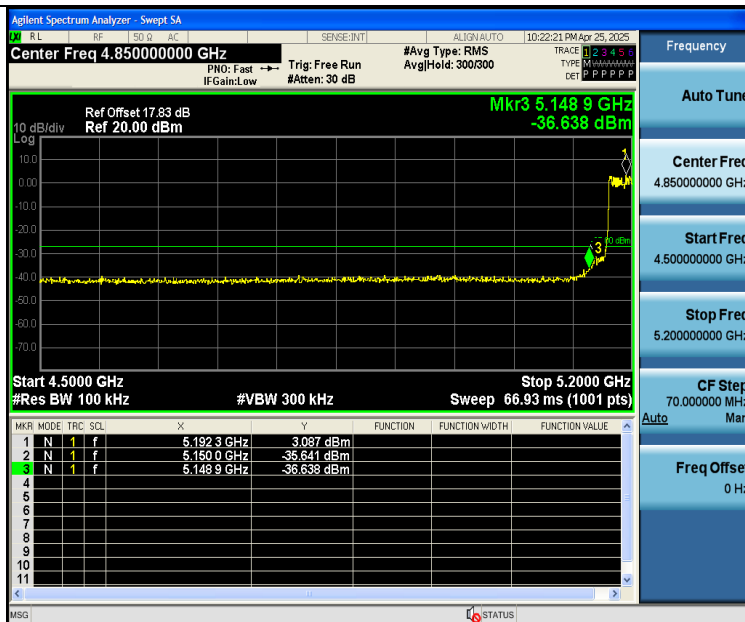


11N40SISO-Ant1-5230-PASS

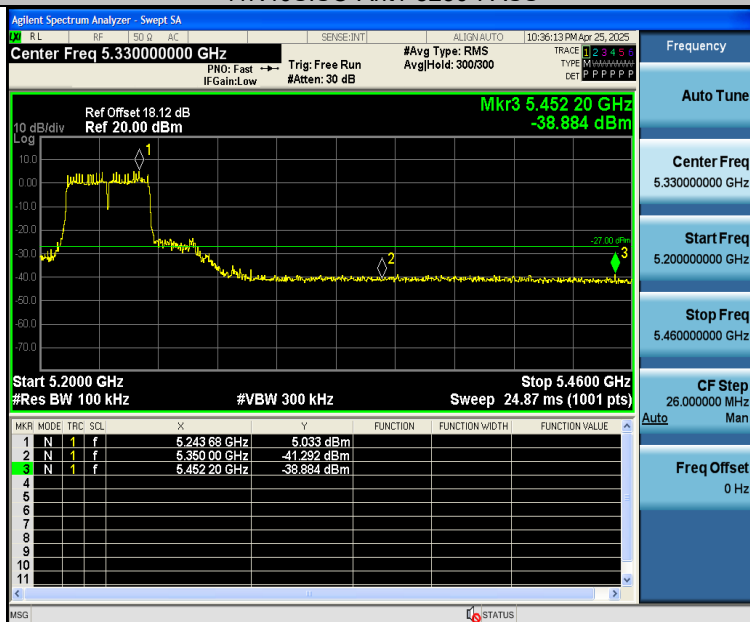


11AC20SISO-Ant1-5180-PASS

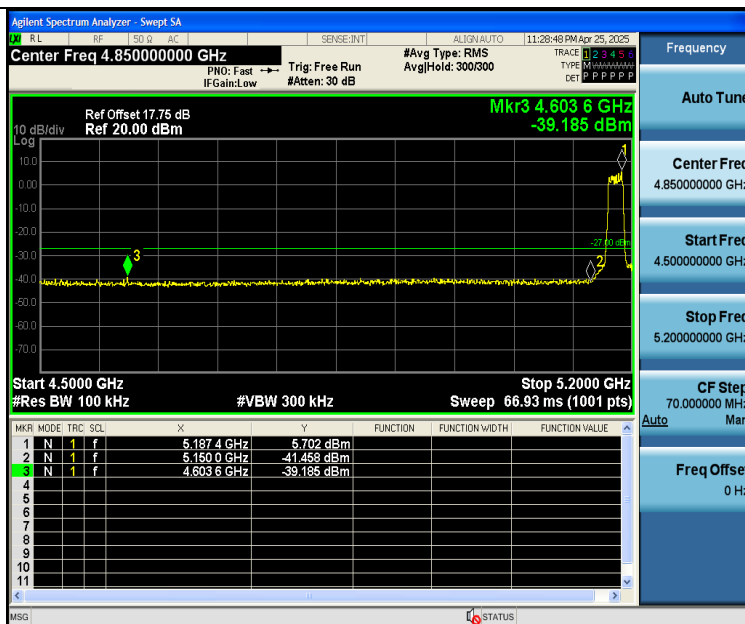

11AC20SISO-Ant1-5240-PASS

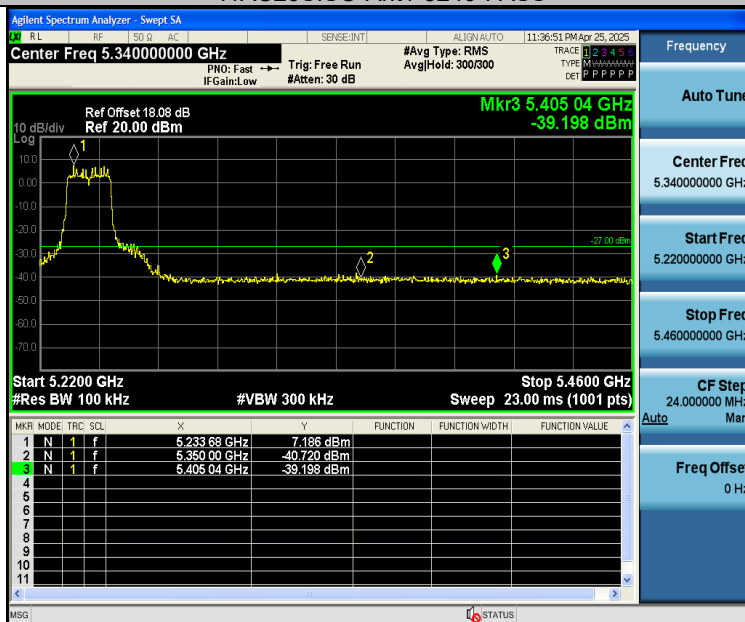

11AC40SISO-Ant1-5190-PASS

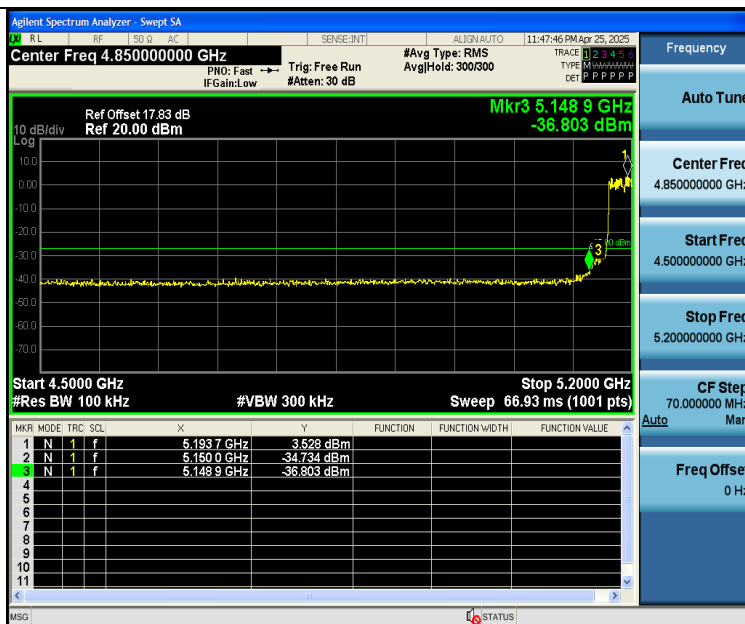


11AC40SISO-Ant1-5230-PASS




Note: 27~40GHz at least have 20dB margin. No recording in the test report.




Test plots B4:

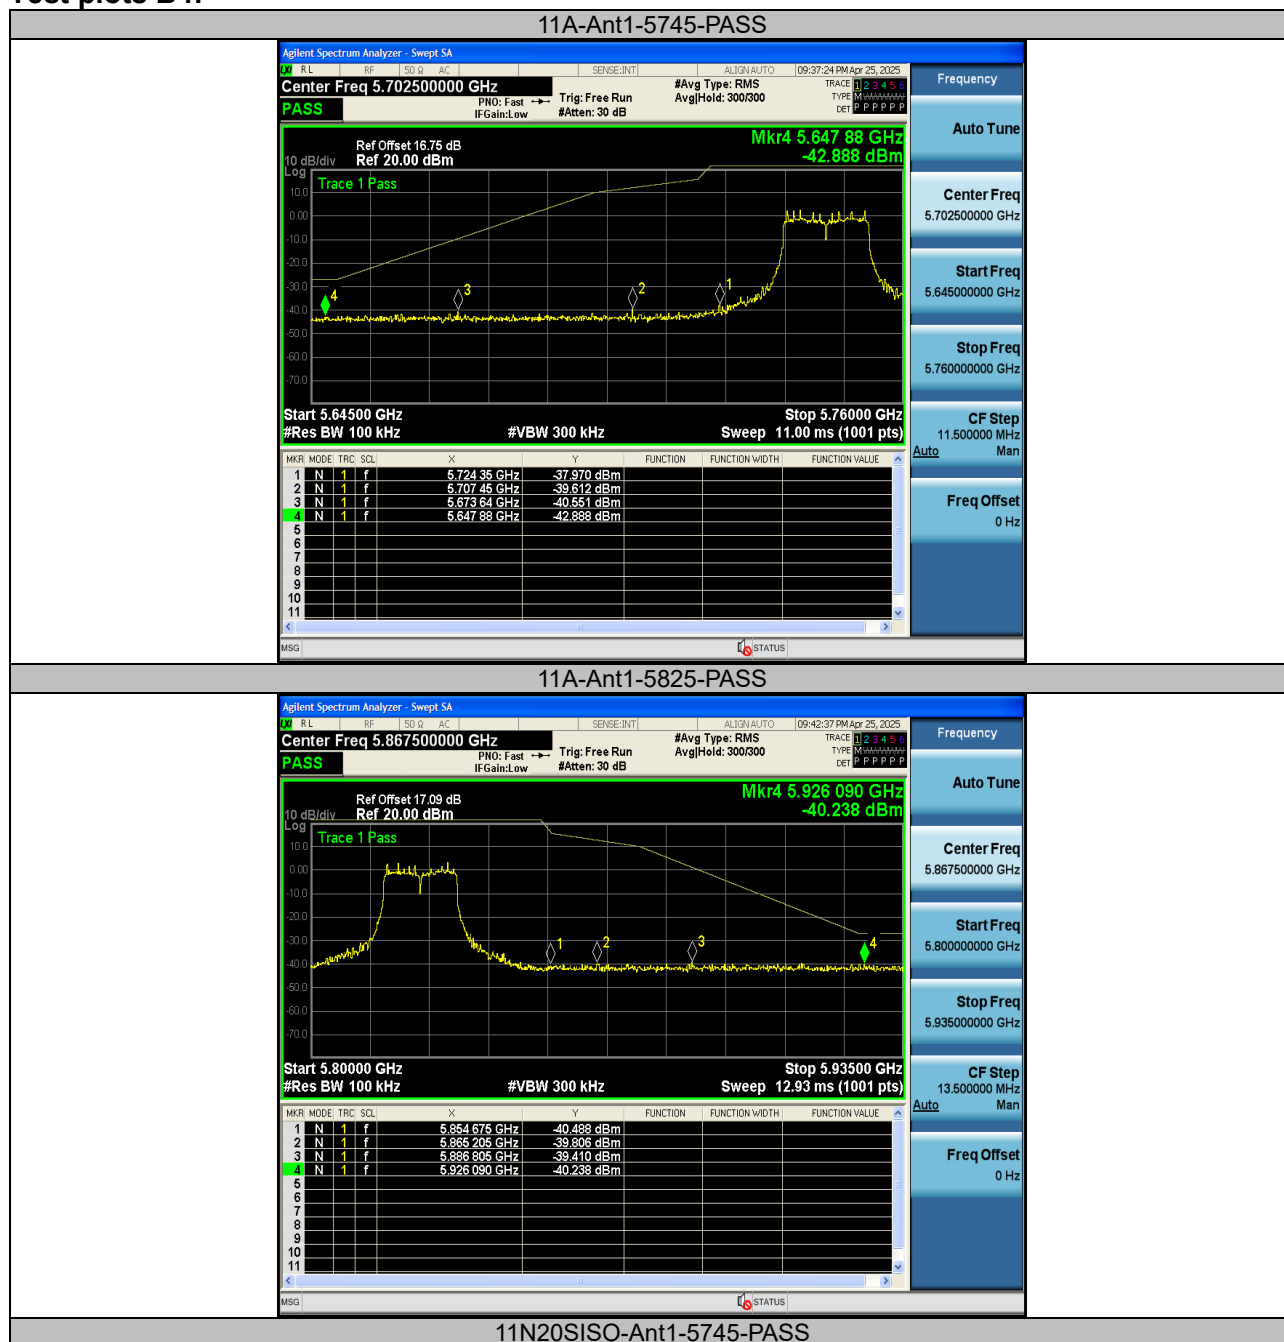

11N20SISO-Ant1-5745-PASS

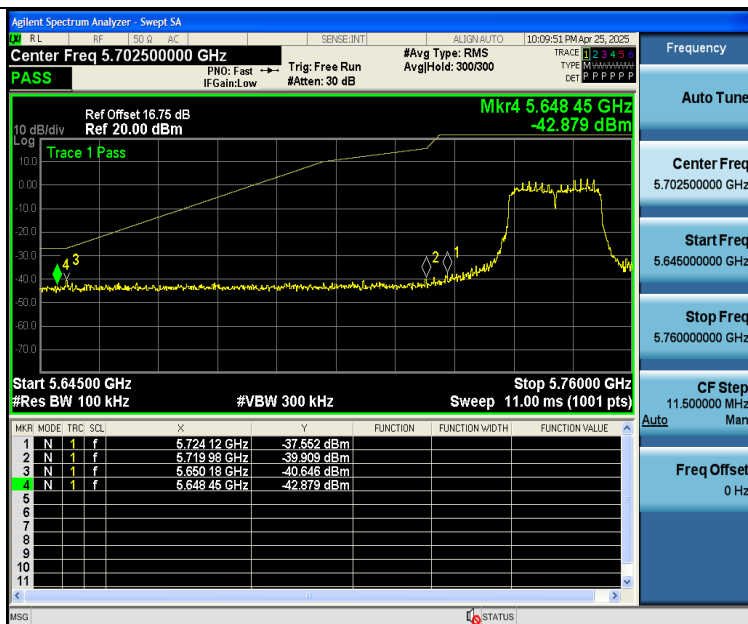

11N20SISO-Ant1-5825-PASS

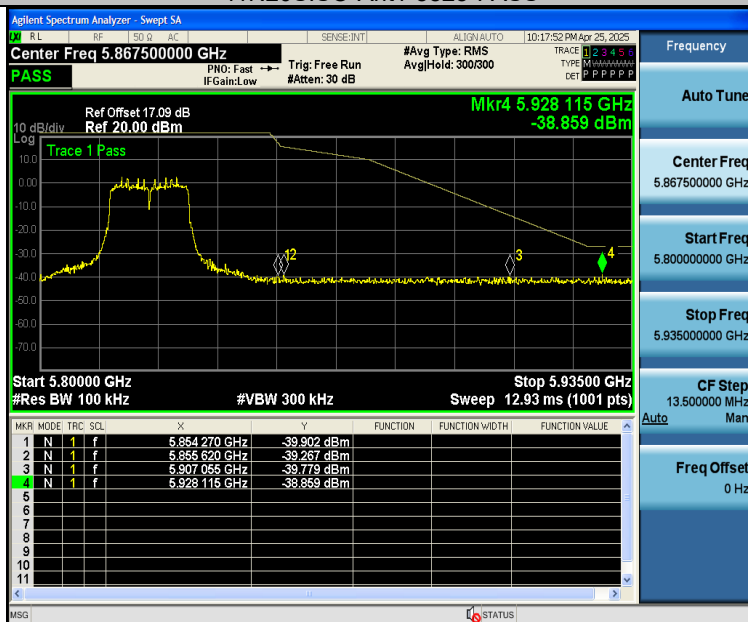

11N40SISO-Ant1-5755-PASS




11N40SISO-Ant1-5795-PASS




11AC20SISO-Ant1-5745-PASS



11AC20SISO-Ant1-5825-PASS

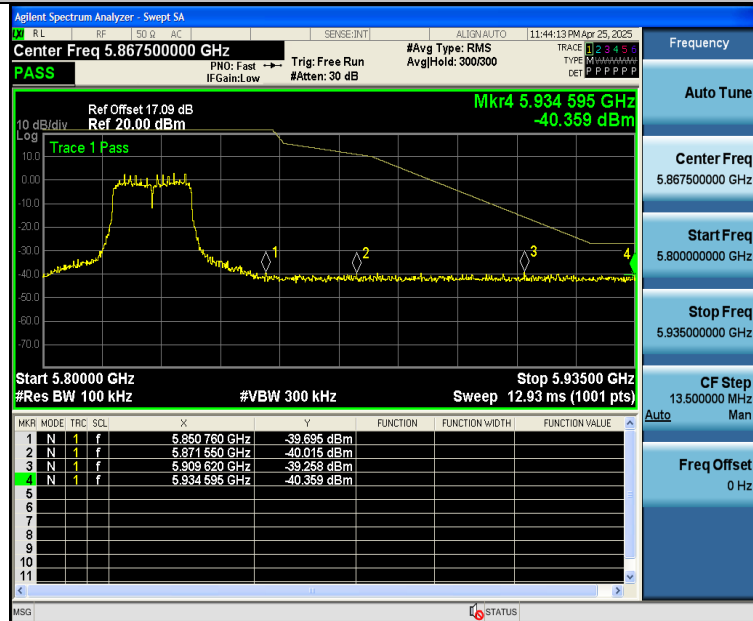

11AC40SISO-Ant1-5755-PASS

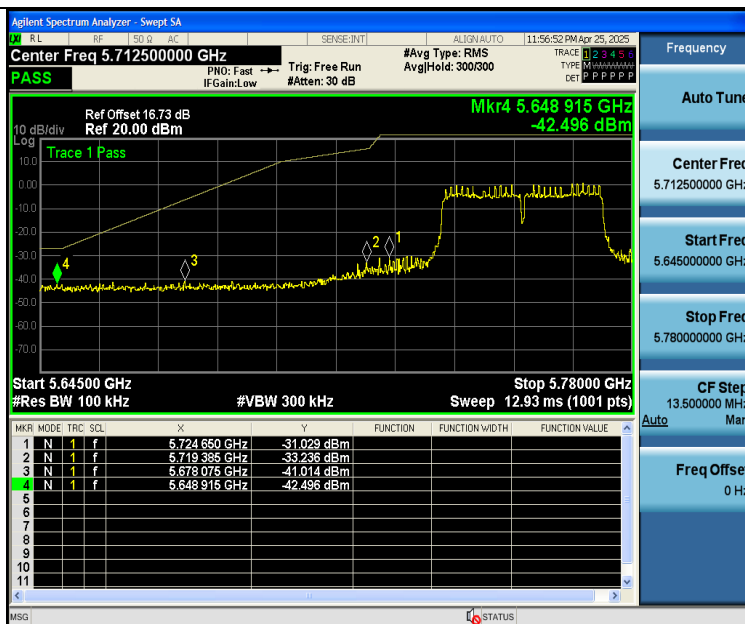

11AC40SISO-Ant1-5795-PASS





6.7 Restricted Band

Test Requirement : FCC Part15 E Section 15.407(b)

Test site : Measurement Distance: 3m

Test Limit :

Frequency	Limit (dBuV/m @3m)	Remark
Above 1GHz	74	Peak Value
	54	Average Value

Test Procedure:

1. The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
8. The test above 1GHz must be use the fully anechoic room, and the test below 1GHz use the half anechoic room

Test Result:

Worst case mode:		802.11a(6Mbps)		Test channel:		36		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5150	50.56	6.53	57.09	68.23	11.14	H	Peak
2	5150	39.81	6.53	46.34	54	7.66	H	Average
3	5150	49.61	6.53	56.14	68.23	12.09	V	Peak
4	5150	38.37	6.53	44.9	54	9.1	V	Average



Worst case mode:		802.11a(6Mbps)		Test channel:		48		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5250	50.11	6.55	56.66	68.23	11.57	H	Peak
2	5250	40.16	6.55	46.71	54	7.29	H	Average
3	5250	49.18	6.55	55.73	68.23	12.5	V	Peak
4	5250	38.39	6.55	44.94	54	9.06	V	Average

Worst case mode:		802.11a(6Mbps)		Test channel:		CH149(5745MHz)		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5640	50.37	6.61	56.98	68.23	11.25	H	Peak
2	5640	39.77	6.61	46.38	54	7.62	H	Average
3	5640	49.38	6.61	55.99	68.23	12.24	V	Peak
4	5640	38.53	6.61	45.14	54	8.86	V	Average

Worst case mode:		802.11a(6Mbps)		Test channel:		CH 165(5825MHz)		
NO.	Freq. [MHz]	level [dBμV/m]	Factor [dB]	Emission level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Detector Type
1	5850	49.48	6.64	56.12	68.23	12.11	H	Peak
2	5850	40.06	6.64	46.7	54	7.3	H	Average
3	5850	48.73	6.64	55.37	68.23	12.86	V	Peak
4	5850	38.57	6.64	45.21	54	8.79	V	Average

Note: We test all modes and only the worst case for each bandwidth recorded in the report..



7 Emission Bandwidth and Occupied Bandwidth

Test Requirement	: FCC CFR47 Part 15 Section 15.407(a)(e)
Test Method	: ANSI C63.10:2013 According to FCC §15.407(a), The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.
Test Limit	: Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth. As per FCC §15.407(e): for equipment operating in the band 5725 – 5850 MHz, the minimum 6 dB bandwidth of U-NII devices shall be 500 kHz.

7.1 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01,
Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth; b) Set the VBW > RBW; c) Detector = Peak; d) Trace mode = max hold; e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%; 99% Occupied Bandwidth
The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).


The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set $VBW \geq 3 \cdot RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.



The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.2 Test setup



7.3 Test Result

PASS

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations / data rates and antenna ports.
Following channel was selected for the final test as listed below.

26 dB emission bandwidth:


TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	20.360	5169.680	5190.040	---	---
11A	Ant1	5200	20.520	5189.600	5210.120	---	---
11A	Ant1	5240	22.360	5229.200	5251.560	---	---
11A	Ant1	5745	20.160	5734.960	5755.120	---	---
11A	Ant1	5785	20.160	5774.920	5795.080	---	---
11A	Ant1	5825	20.440	5814.640	5835.080	---	---
11N20SISO	Ant1	5180	20.920	5169.600	5190.520	---	---
11N20SISO	Ant1	5200	21.120	5189.440	5210.560	---	---
11N20SISO	Ant1	5240	21.320	5229.280	5250.600	---	---
11N20SISO	Ant1	5745	21.120	5734.640	5755.760	---	---
11N20SISO	Ant1	5785	20.920	5774.480	5795.400	---	---
11N20SISO	Ant1	5825	20.920	5814.680	5835.600	---	---
11N40SISO	Ant1	5190	41.760	5168.880	5210.640	---	---
11N40SISO	Ant1	5230	48.160	5209.760	5257.920	---	---
11N40SISO	Ant1	5755	44.160	5734.520	5778.680	---	---
11N40SISO	Ant1	5795	41.360	5774.280	5815.640	---	---
11AC20SISO	Ant1	5180	20.640	5169.760	5190.400	---	---
11AC20SISO	Ant1	5200	20.760	5189.560	5210.320	---	---
11AC20SISO	Ant1	5240	21.160	5229.000	5250.160	---	---
11AC20SISO	Ant1	5745	21.080	5734.440	5755.520	---	---
11AC20SISO	Ant1	5785	21.200	5774.280	5795.480	---	---
11AC20SISO	Ant1	5825	21.080	5814.480	5835.560	---	---
11AC40SISO	Ant1	5190	41.600	5169.280	5210.880	---	---
11AC40SISO	Ant1	5230	56.000	5209.200	5265.200	---	---
11AC40SISO	Ant1	5755	43.120	5733.800	5776.920	---	---
11AC40SISO	Ant1	5795	41.760	5774.120	5815.880	---	---



minimum 6 dB bandwidth:

TestMode	Antenna	Frequency[MHz]	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.320	5736.840	5753.160	0.5	PASS
11A	Ant1	5785	16.280	5776.880	5793.160	0.5	PASS
11A	Ant1	5825	16.320	5816.840	5833.160	0.5	PASS
11N20SISO	Ant1	5745	17.280	5736.480	5753.760	0.5	PASS
11N20SISO	Ant1	5785	16.960	5776.480	5793.440	0.5	PASS
11N20SISO	Ant1	5825	17.000	5816.480	5833.480	0.5	PASS
11N40SISO	Ant1	5755	35.120	5737.480	5772.600	0.5	PASS
11N40SISO	Ant1	5795	35.520	5777.000	5812.520	0.5	PASS
11AC20SISO	Ant1	5745	16.800	5736.600	5753.400	0.5	PASS
11AC20SISO	Ant1	5785	16.800	5776.600	5793.400	0.5	PASS
11AC20SISO	Ant1	5825	17.080	5816.480	5833.560	0.5	PASS
11AC40SISO	Ant1	5755	34.160	5738.440	5772.600	0.5	PASS
11AC40SISO	Ant1	5795	35.520	5777.080	5812.600	0.5	PASS

Test Graphs:

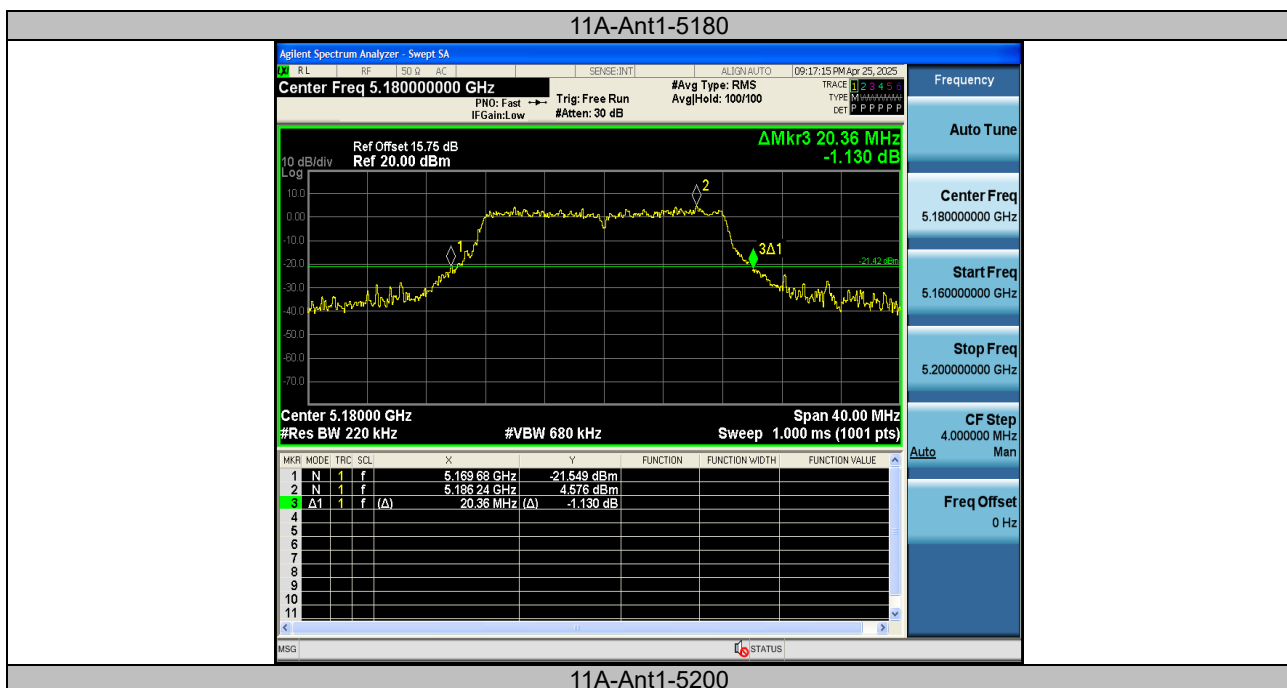





11A-Ant1-5240




11A-Ant1-5745

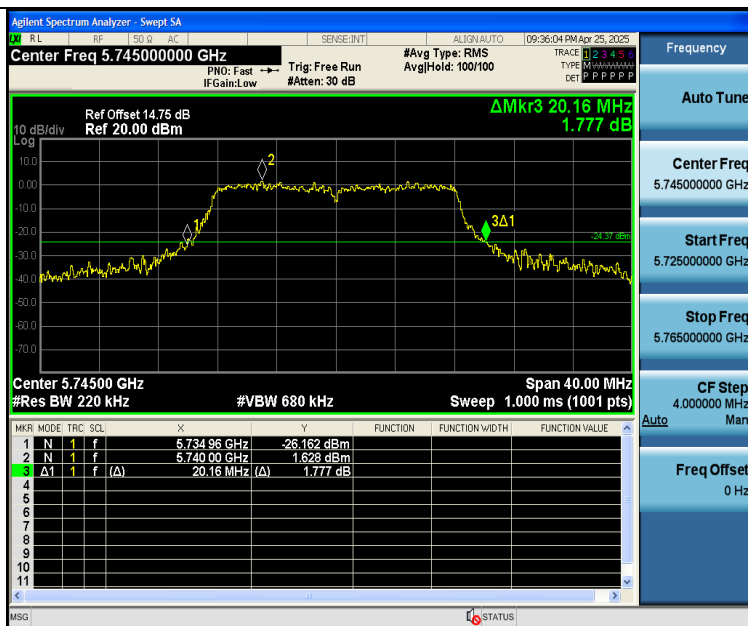


11A-Ant1-5785

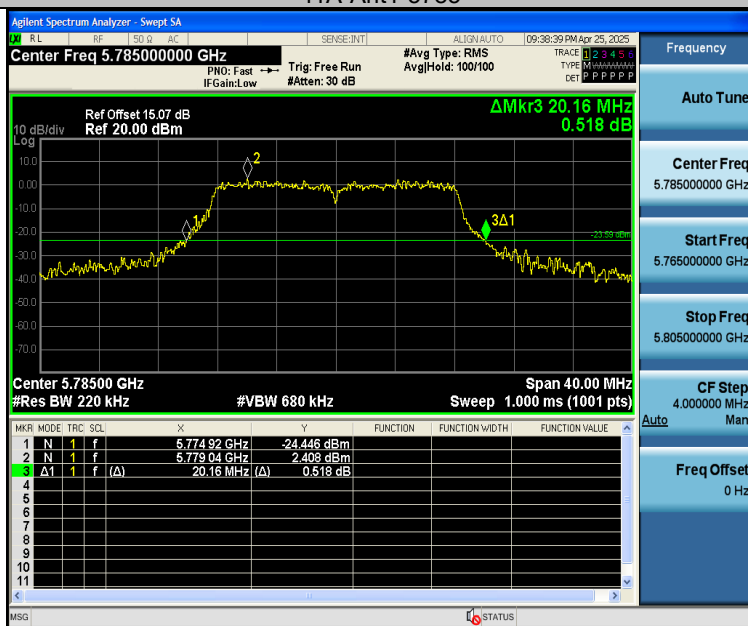


11A-Ant1-5825

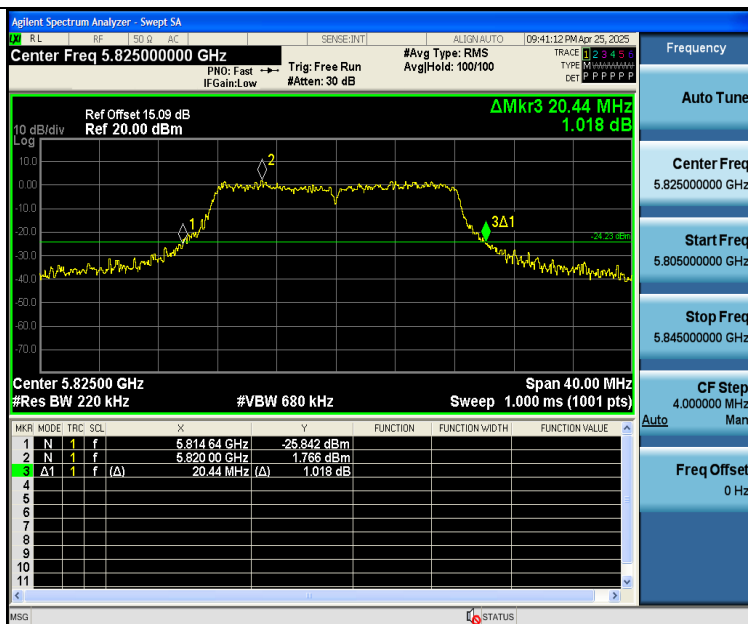

11N20SISO-Ant1-5180

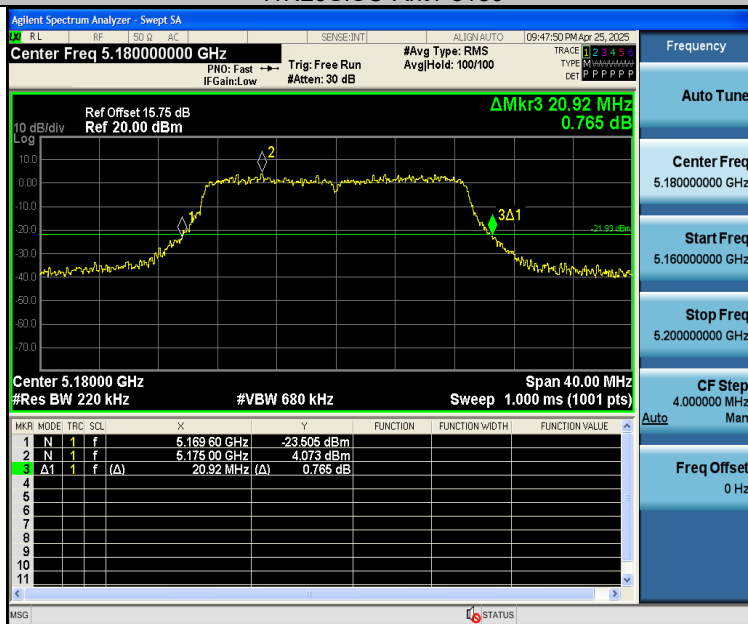


11N20SISO-Ant1-5200

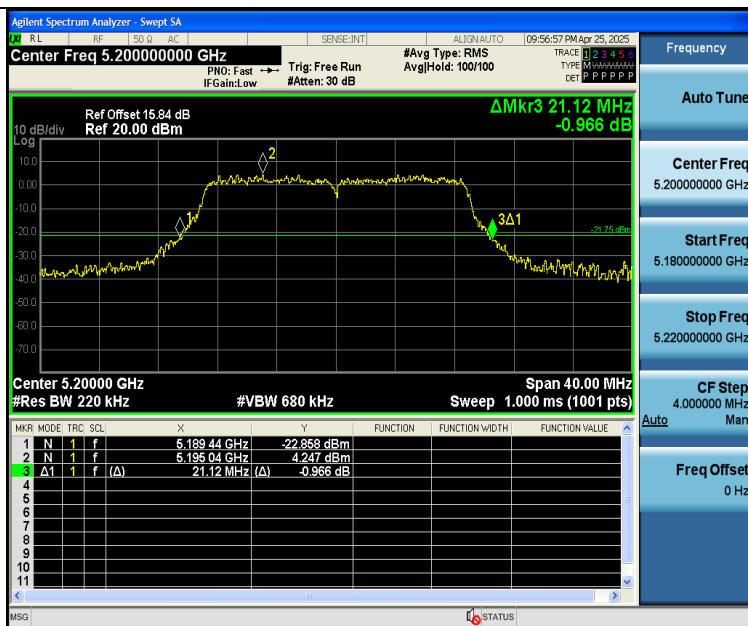


11N20SISO-Ant1-5240



11N20SISO-Ant1-5745

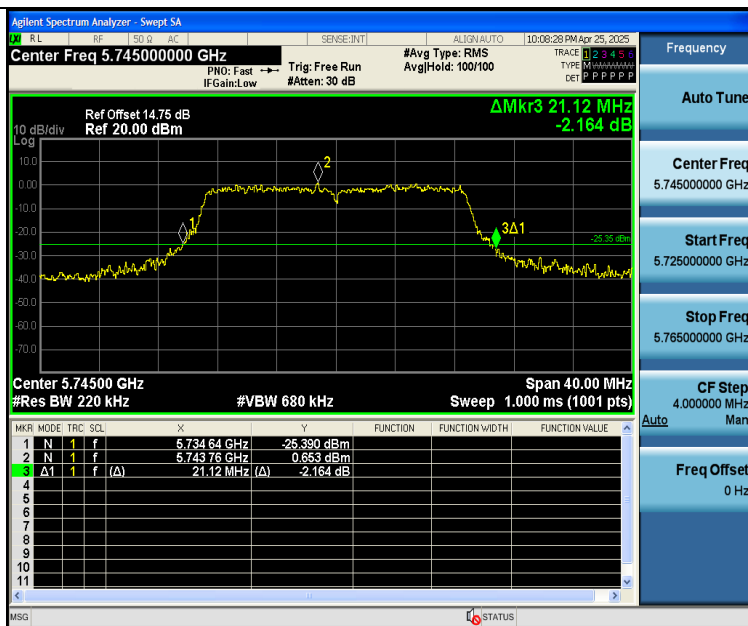

11N20SISO-Ant1-5785

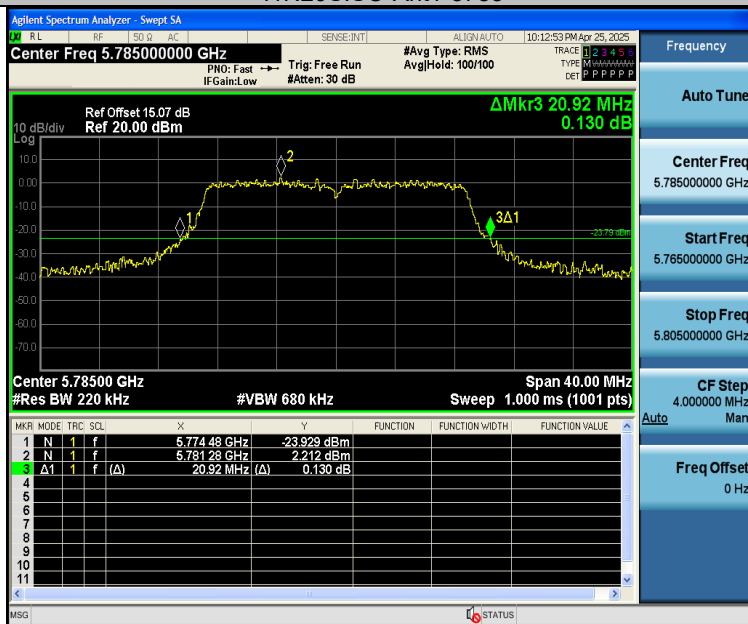

11N20SISO-Ant1-5825




11N40SISO-Ant1-5190




11N40SISO-Ant1-5230



11N40SISO-Ant1-5755

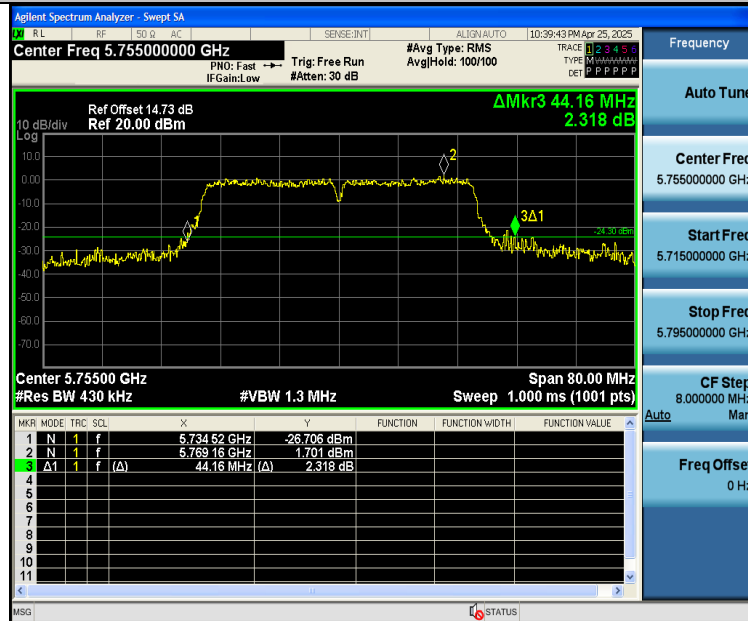

11N40SISO-Ant1-5795

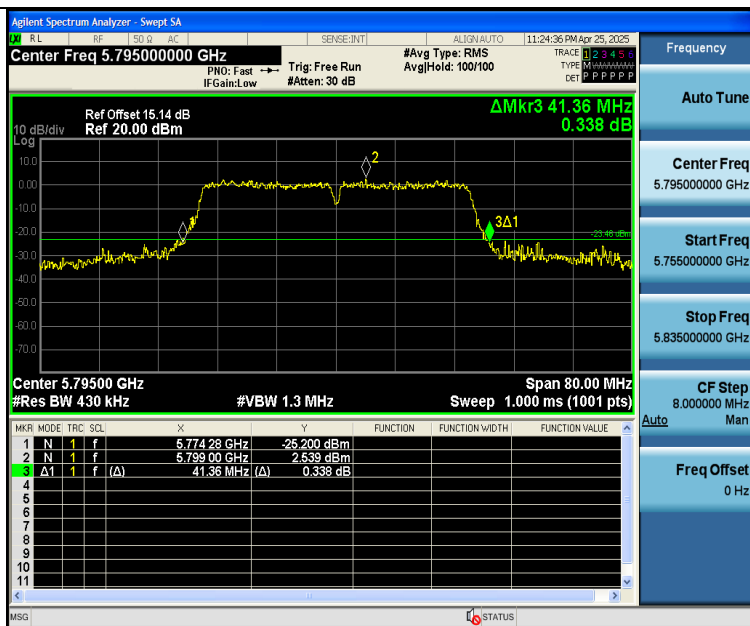

11AC20SISO-Ant1-5180



11AC20SISO-Ant1-5200



11AC20SISO-Ant1-5240




11AC20SISO-Ant1-5745




11AC20SISO-Ant1-5785




11AC20SISO-Ant1-5825

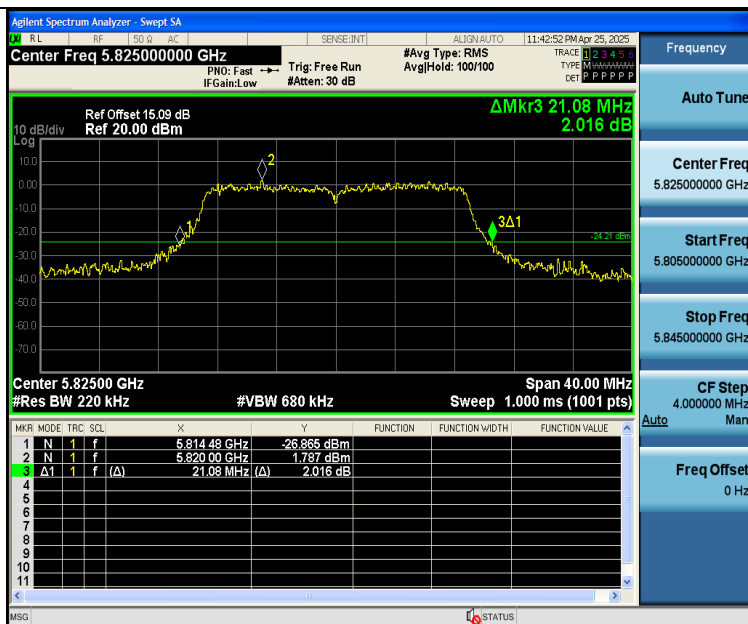


11AC40SISO-Ant1-5190

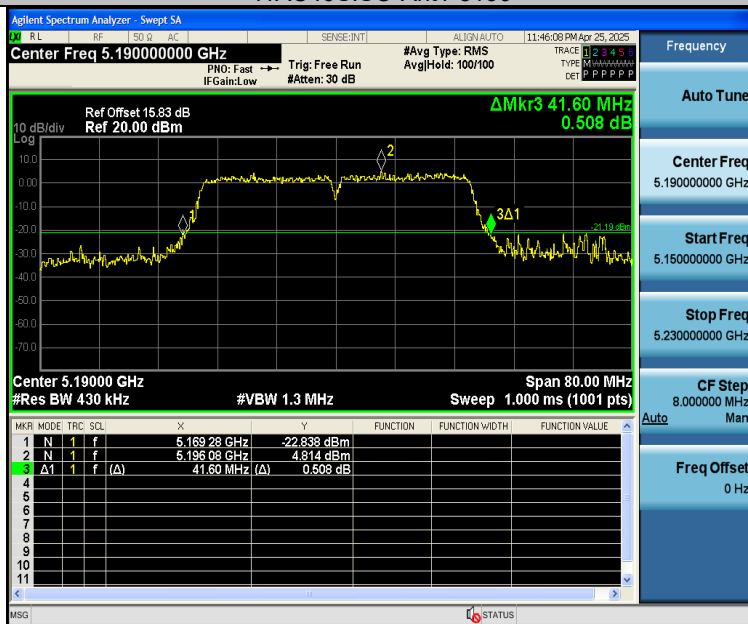


11AC40SISO-Ant1-5230

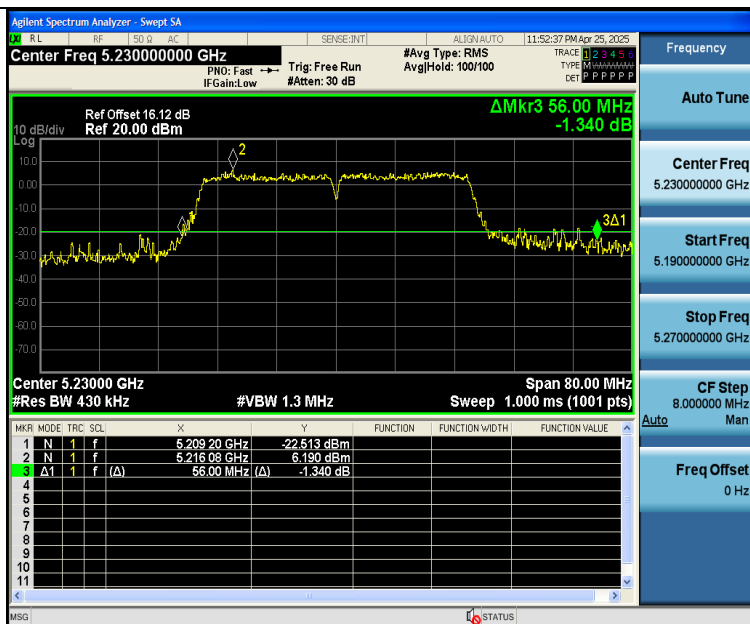

11AC40SISO-Ant1-5755

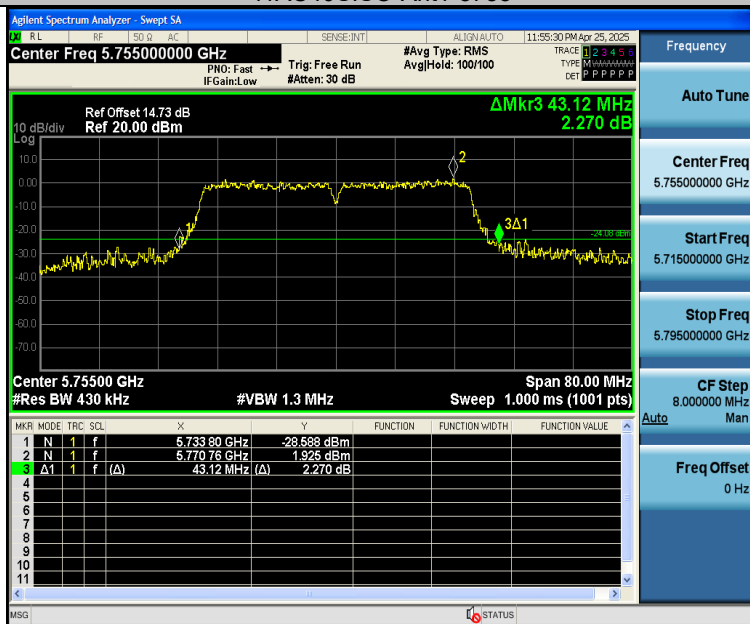



11AC40SISO-Ant1-5795

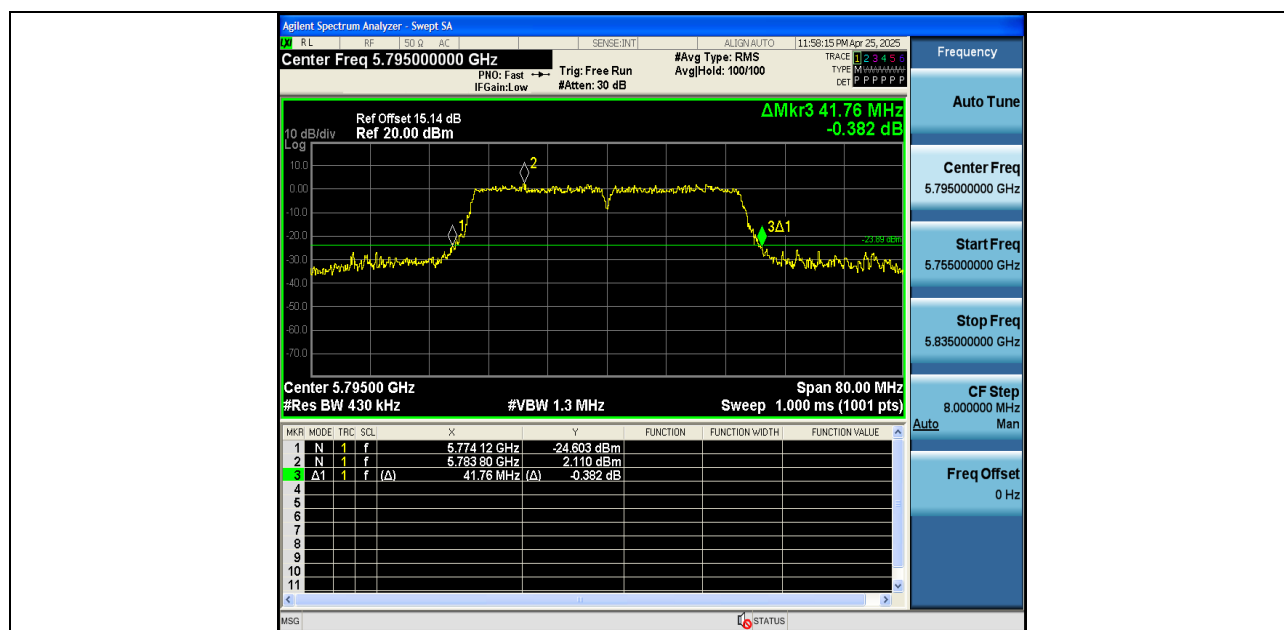




Min emission bandwidth Test Graphs:

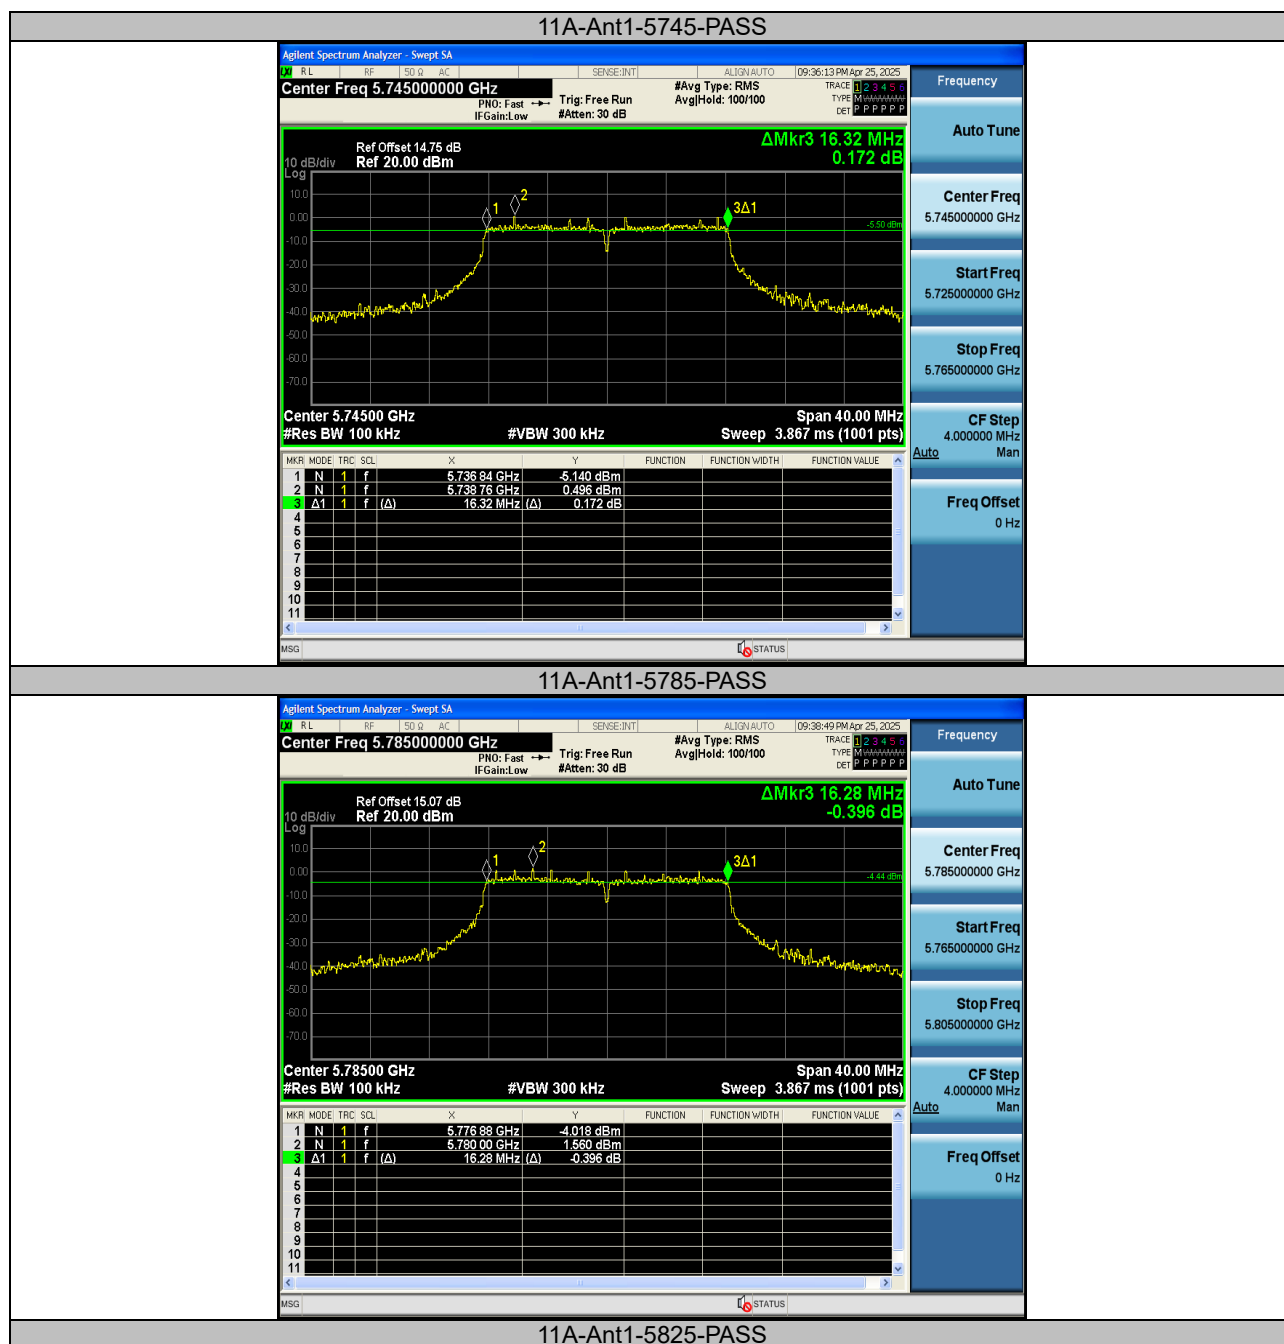


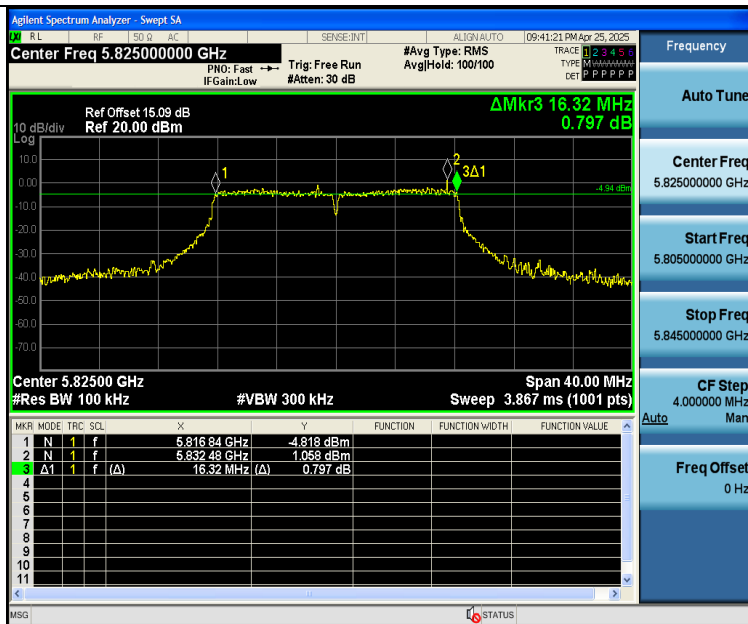


11N20SISO-Ant1-5745-PASS

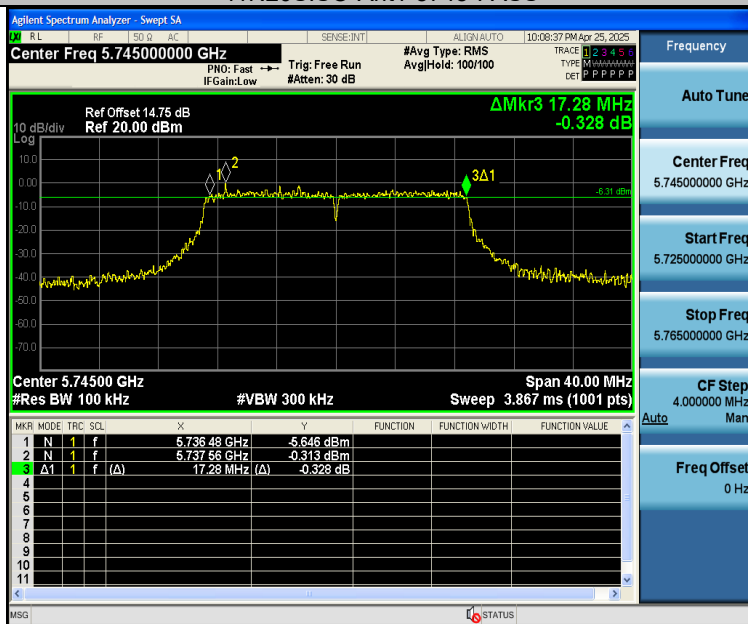

11N20SISO-Ant1-5785-PASS

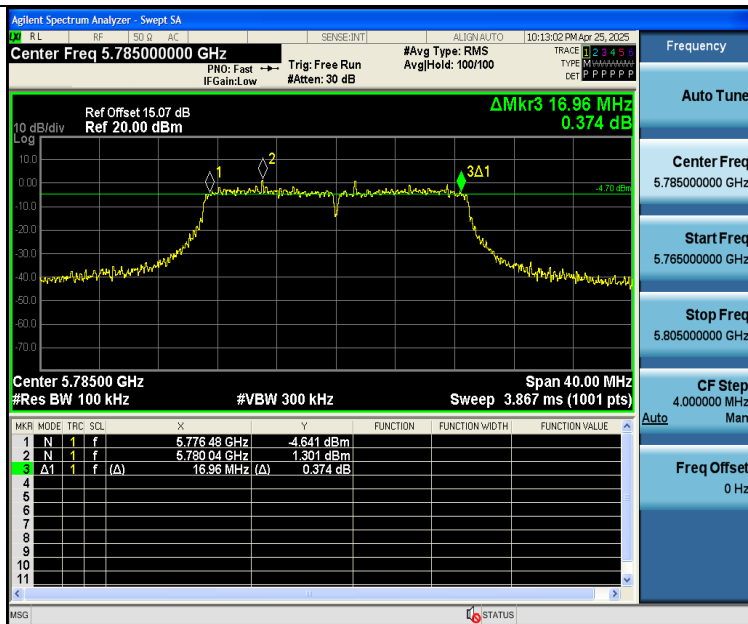

11N20SISO-Ant1-5825-PASS

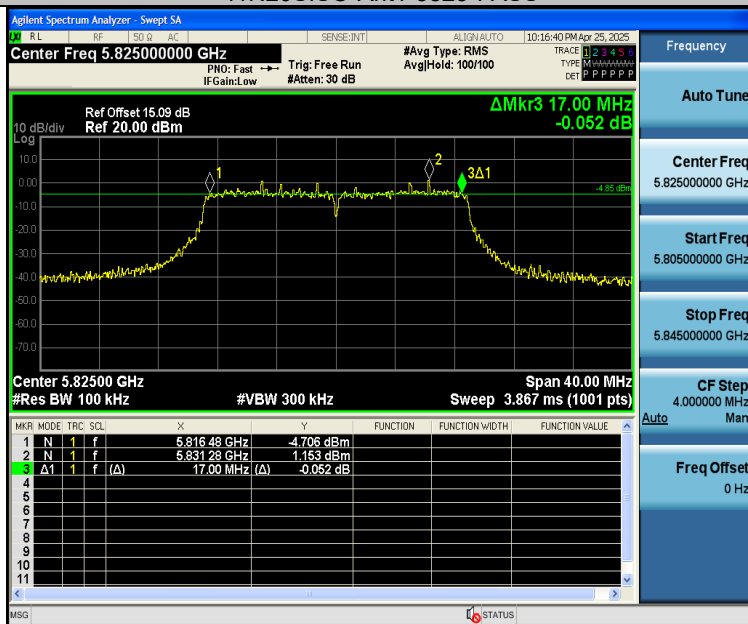

11N40SISO-Ant1-5755-PASS