

FCC & IC REPORT

(GSM & WCDMA)

Applicant: COPPERNIC

Address of Applicant: 185 avenue Archimede, 13857 Aix en Provence, FRANCE

Equipment Under Test (EUT)

Product Name: C-One HF iClass / LF Prox

Model No.: C-One HLF HID

Trade mark: COPPERNIC

FCC ID: XGK-C-ONE-HLF-HID

Canada IC: 8402A-CONEHLFHID

FCC CFR Title 47 Part 2

FCC CFR Title 47 Part 22 Subpart H

FCC CFR Title 47 Part 24 Subpart E

RSS-Gen Issue 5, April 2018

RSS-132 Issue 3, January 2013

RSS-133 Issue 6 January 2018 Amendment

Date of sample receipt: 11 Nov., 2019

Date of Test: 12 Nov., 2019 to 10 Mar., 2020

Date of report issued: 16 Jun., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	30 Apr., 2020	Original
01	12 Jun., 2020	Update page 4
02	16 Jun., 2020	Update Model No

Tested by:



Date:

16 Jun., 2020

Test Engineer

Reviewed by:



Date:

16 Jun., 2020

Project Engineer

3. Contents

	Page
1. COVER PAGE	1
2. VERSION	2
3. CONTENTS	3
4. TEST SUMMARY	4
5. GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.	5
5.3 TEST MODES	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 MEASUREMENT UNCERTAINTY	7
5.6 LABORATORY FACILITY	7
5.7 LABORATORY LOCATION	8
5.8 TEST INSTRUMENTS LIST	8
6. TEST RESULTS	9
6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP	9
6.2 PEAK-TO-AVERAGE POWER RATIO	10
6.3 OCCUPY BANDWIDTH	11
6.4 MODULATION CHARACTERISTIC	12
6.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS	12
6.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	13
6.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	14
6.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	15
7 TEST SETUP PHOTO	16
8 EUT CONSTRUCTIONAL DETAILS	17

4. Test Summary

Test Item	Section		Result
	FCC	IC	
RF Exposure (SAR)	Part 1.1307 Part 2.1093	RSS-102	Pass (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c)	RSS-Gen section 6.12 RSS-132 section 5.4 RSS-133 section 6.4	Pass*
Peak-to-Average Power Ratio	Part 24.232 (d)	RSS-132 section 5.4 RSS-133 section 6.4	Pass*
Modulation Characteristics	Part 2.1047	RSS-132 section 5.2 RSS-133 section 6.2	Pass*
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b)	RSS-Gen section 6.6	Pass*
Out of band emission at antenna terminals	Part 2.1051 Part 22.917 (a) Part 24.238 (a)	RSS-Gen section 6.13 RSS-132 section 5.5 RSS-133 section 6.5	Pass*
Field strength of spurious radiation	Part 2.1053 Part 22.917 (a) Part 24.238 (a)	RSS-Gen section 6.13 RSS-132 section 5.5 RSS-133 section 6.5	Pass*
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 2.1055(a)(1)(b)	RSS-Gen section 6.11 RSS-132 section 5.3 RSS-133 section 6.3	Pass*
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 2.1055(d)(2)	RSS-Gen section 6.11 RSS-132 section 5.3 RSS-133 section 6.3	Pass*

Note:

1. Pass*: please refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.
2. Pass*: Product FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR and another product FCC ID: XGK-C-ONE-HLF-HID, Canada IC: 8402A-CONEHLFID; Their internal structure, circuit design, layout, components and internal wiring are the same; GSM, WCDMA, LTE and BT, WiFi circuit design and antenna are also the same. The only difference is that the RFID module is different.

5. General Information

5.1 Client Information

Applicant:	COPERNIC
Address:	185 avenue Archimede, 13857 Aix en Provence, FRANCE
Manufacturer	ASKEY COMPUTER Corp.
Address:	10 F, N°119, JIANKANG RD., ZHONGHE DIST., New Tapei City, TAIWAN

5.2 General Description of E.U.T.

Product Name:	C-One HF iClass / LF Prox
Model No.:	C-One HLF HID
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.4MHz-846.6MHz WCDMA Band II: 1852.4 MHz-1907.6 MHz
Modulation type:	GSM/GPRS: GMSK, UMTS: QPSK, EGPRS: 8PSK
Antenna type:	Internal Antenna
Antenna gain:	GSM 850: -5.07 dBi PCS 1900: 3.55 dBi WCDMA Band V: -5.07 dBi WCDMA Band II: 3.55 dBi
Power supply:	Rechargeable Li-ion Battery DC3.7V-3300mAh
AC adapter:	Model: SYS1561-1105-1 Input: AC100-240V, 50/60Hz, 1A Output: DC 5.35V, 2A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

Operation Frequency List:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
Lowest channel	128	824.20	Lowest channel	512	1850.20
Middle channel	190	836.60	Middle channel	661	1880.00
Highest channel	251	848.80	Highest channel	810	1909.80
WCDMA Band V			WCDMA Band II		
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
Lowest channel	4132	826.40	Lowest channel	9262	1852.40
Middle channel	4183	836.60	Middle channel	9400	1880.00
Highest channel	4233	846.60	Highest channel	9538	1907.60

5.3 Test modes

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.7Vdc, Extreme: Low 3.5 Vdc, High 4.2 Vdc
Test mode:	
GSM mode	Keep the EUT communication with simulated station in GSM mode
GPRS mode	Keep the EUT communication with simulated station in GPRS mode
EGPRS mode	Keep the EUT communication with simulated station in EGPRS mode
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA	Keep the EUT communication with simulated station in HSDPA mode
HSUPA	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.38 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.36 dB (k=2)

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.
 Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road,
 Bao'an District, Shenzhen, Guangdong, China
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

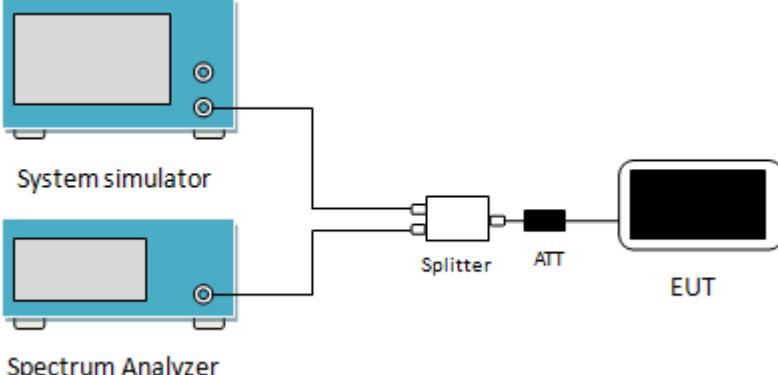
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2019	03-17-2020
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2019	03-17-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2018	11-17-2019
				11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3		Version: 6.110919b	
Pre-amplifier	HP	8447D	2944A09358	03-18-2019	03-17-2020
Pre-amplifier	CD	PAP-1G18	11804	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2019	03-17-2020
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2018	11-17-2019
				11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2019	03-17-2020
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2018	11-17-2019
				11-18-2019	11-17-2020
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-18-2019	03-17-2020
Signal Generator	R&S	SMR20	1008100050	03-18-2019	03-17-2020
RF Switch Unit	MWRFTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTEST	MTS8200		Version: 2.0.0.0	
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2019	03-17-2020
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2019	03-17-2020
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2019	03-17-2020
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2019	09-24-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	10-31-2020
Simulated Station	Rohde & Schwarz	CMW500	140493	07-22-2019	07-21-2020

6. Test results

6.1 Conducted Output Power, ERP and EIRP

Test Requirement:	FCC part 22.913(a)(5), FCC part 24.232(c) RSS-132 section 5.4, RSS-133 section 6.4
Test Method:	RSS-GEN section 6.12, ANSI/TIA-603-D 2010
Limit:	FCC: GSM 850: 7W, PCS 1900: 2W WCDMA Band V: 7W, WCDMA Band II: 2W IC: GSM 850: 11.5W, PCS 1900: 2W WCDMA Band V: 11.5W, WCDMA Band II: 2W
Test setup:	<p>The diagram illustrates the test setup. On the left is a blue rectangular box labeled 'System simulator' with a white rectangular window. Two small circles are on the right side of the simulator. A horizontal line extends from the right side of the simulator to a small black square labeled 'ATT'. From the right side of the ATT, another horizontal line extends to a black rectangular box labeled 'EUT'.</p>
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.

6.2 Peak-to-Average Power Ratio

Test Requirement:	FCC part 24.232(d) RSS-132 section 5.4, RSS-133 section 6.4
Test Method	ANSI/TIA-603-D 2010
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, $RBW \geq OBW$, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONEFLAGR.

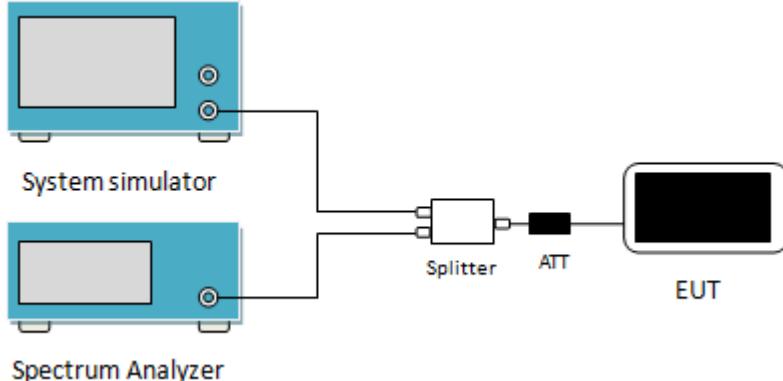
6.3 Occupy Bandwidth

Test Requirement:	FCC part 22.917(b), FCC part 24.238(b) RSS-GEN section 6.6
Test Method:	RSS-GEN section 6.6, ANSI/TIA-603-D 2010
Test setup:	<p>System simulator</p> <p>Spectrum Analyzer</p> <p>Splitter</p> <p>ATT</p> <p>EUT</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.

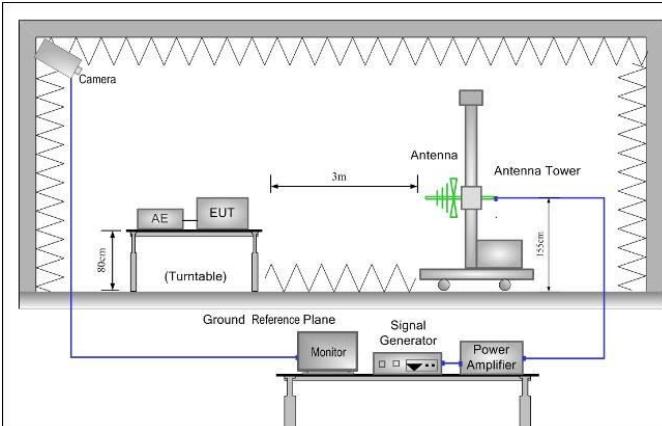
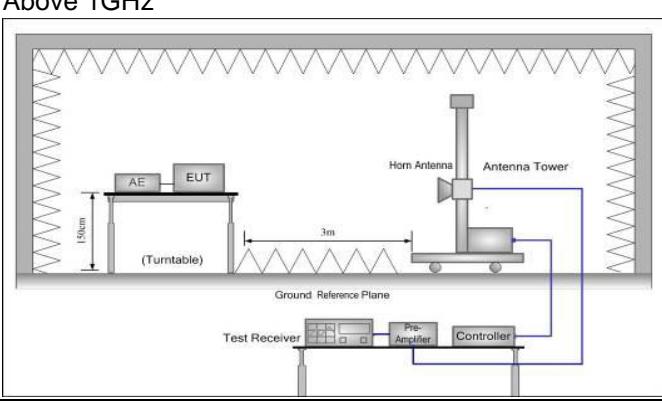
6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E & RSS-132 & RSS-133 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

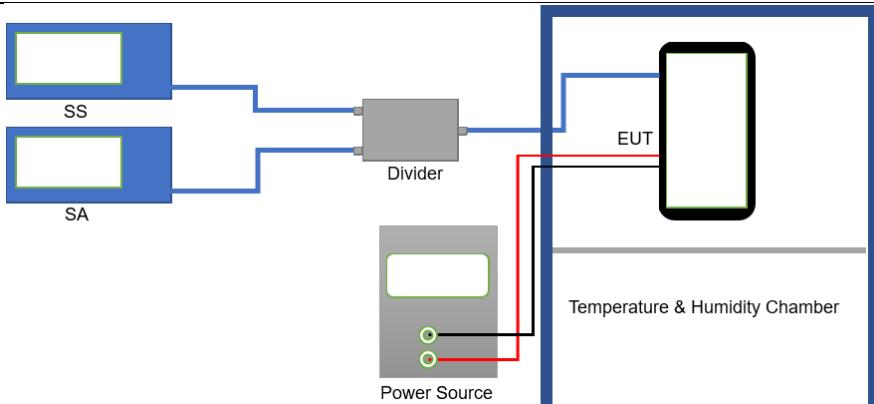
6.5 Out of band emission at antenna terminals

Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) RSS-132 section 5.5, RSS-133 section 6.5
Test Method:	RSS-GEN section 6.13, ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	 <p>System simulator</p> <p>Spectrum Analyzer</p> <p>Splitter</p> <p>ATT</p> <p>EUT</p>
Test Procedure:	<ol style="list-style-type: none"> 1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic. 3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.

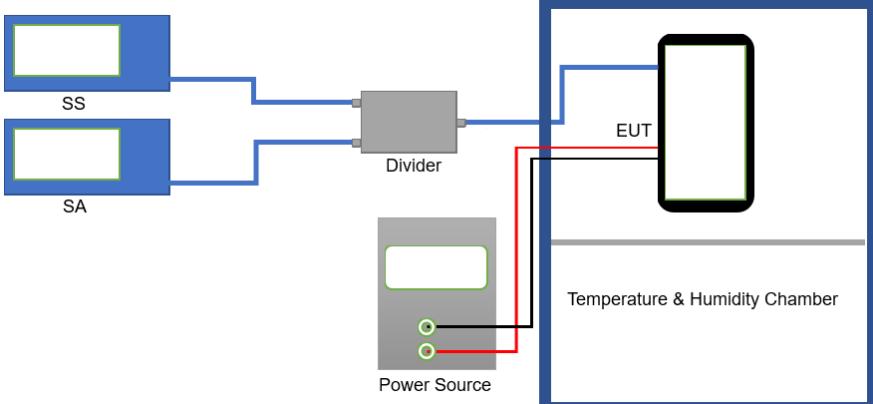
6.6 Field strength of spurious radiation measurement

Test Requirement:	FCC part 22.917(a), FCC part 24.238(a) RSS-132 section 5.5, RSS-133 section 6.5
Test Method:	RSS-GEN section 6.13, ANSI/TIA-603-D 2010
Limit:	-13dBm
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $\text{ERP / EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.

6.7 Frequency stability V.S. Temperature measurement

Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(a)(1)(b) RSS-132 section 5.3, RSS-133 section 6.3
Test Method:	RSS-GEN section 6.11, ANSI/TIA-6-3-D 2010
Limit:	± 2.5 ppm
Test setup:	
Test procedure:	<ol style="list-style-type: none"> 1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.

6.8 Frequency stability V.S. Voltage measurement

Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 2.1055(d)(2) RSS-132 section 5.3, RSS-133 section 6.3
Test Method:	RSS-GEN section 6.11, ANSI/TIA-603-D 2010
Limit:	$\pm 2.5\text{ppm}$
Test setup:	 <p>The diagram illustrates the test setup. A Power Source provides power to a Divider. The output of the Divider connects to the EUT (Equipment Under Test), which is located within a Temperature & Humidity Chamber. A Signal Source (SS) and a Spectrum Analyzer (SA) are connected to the input of the Divider. A red line indicates a connection from the Power Source to the EUT.</p>
Test procedure:	<ol style="list-style-type: none"> 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Refer to FCC ID: XGK-C-ONE-LF-AGR, Canada IC: 8402A-CONELFAGR.