



Sep 8, 2010

SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.
NO.1 Shuoying Rd., Hebei Industry Area,
Dalang, Longhua Town, Baoan, Shenzhen, China

Dear Tony Pan,

Enclosed you will find your file copy of a Part 15 report (FCC ID: XJN-SYNET07526).

For your reference, TCB will normally take another one week for reviewing the report.
Approval will then be granted when no query is sorted.

Please contact me if you have any questions regarding the enclosed material.

Sincerely,

A handwritten signature in black ink, appearing to read "Shawn Xing".

Shawn Xing
Assistant Manager

Enclosure



SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

Application For Certification (FCC ID: XJN-SYNET07526)

Netbook

Billy Li

SZ10070204-1

Billy Li

Sep 8, 2010

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_PC_a
FCC ID: XJN-SYNET07526

Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch
6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: www.china.intertek-etslsemko.com

INTERTEK TESTING SERVICES

LIST OF EXHIBITS

INTRODUCTION

| | |
|-------------------|---------------------------|
| <i>EXHIBIT 1:</i> | General Description |
| <i>EXHIBIT 2:</i> | System Test Configuration |
| <i>EXHIBIT 3:</i> | Emission Results |
| <i>EXHIBIT 4:</i> | Equipment Photographs |
| <i>EXHIBIT 5:</i> | Product Labeling |
| <i>EXHIBIT 6:</i> | Technical Specifications |
| <i>EXHIBIT 7:</i> | Instruction Manual |
| <i>EXHIBIT 8:</i> | Miscellaneous Information |
| <i>EXHIBIT 9:</i> | Test Equipment List |

INTERTEK TESTING SERVICES

MEASUREMENT / TECHNICAL REPORT

SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD. – MODEL: UMPC7800
FCC ID: XJN-SYNET07526

Sep 8, 2010

This report concerns (check one:) Original Grant Class II Change

Equipment Type: JBC-Class B Computing Device/Personal Computer

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on
that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-09
Edition] provision.

Report prepared by:

Shawn Xing
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
6F, D Block, Huahan Building, Langshan Road
Nanshan District, Shenzhen, P. R. China
Phone: (86 755) 8601 6288
Fax: (86 755) 8601 6751

INTERTEK TESTING SERVICES

Table of Contents

| | |
|---|----|
| 1.0 General Description | 2 |
| 1.1 Product Description..... | 2 |
| 1.2 Related Submittal(s) Grants..... | 2 |
| 1.3 Test Methodology..... | 3 |
| 1.4 Test Facility..... | 3 |
| 2.0 System Test Configuration | 5 |
| 2.1 Justification | 5 |
| 2.2 EUT Exercising Software | 5 |
| 2.3 Special Accessories | 5 |
| 2.4 Equipment Modification..... | 5 |
| 2.5 Measurement Uncertainty | 6 |
| 2.6 Support Equipment List and Description | 6 |
| 3.0 Emission Results | 8 |
| 3.1 Field Strength Calculation | 9 |
| 3.2 Radiated Emission Configuration Photograph | 11 |
| 3.3 Radiated Emission Data | 12 |
| 3.4 Conducted Emission Configuration Photograph | 14 |
| 3.5 Conducted Emission Data..... | 15 |
| 4.0 Equipment Photographs | 19 |
| 5.0 Product Labelling | 21 |
| 6.0 Technical Specifications | 23 |
| 7.0 Instruction Manual | 25 |
| 8.0 Miscellaneous Information | 27 |
| 8.1 Emissions Test Procedures | 28 |
| 9.0 Test Equipment List | 31 |

INTERTEK TESTING SERVICES

List of attached file

| Exhibit Type | File Description | Filename |
|---------------------|----------------------------|----------------------|
| Test Report | Test Report | report.pdf |
| Test Setup Photo | Radiated Emission | radiated photos.pdf |
| Test Setup Photo | Conducted Emission | conducted photos.pdf |
| External Photo | External Photo | external photos.pdf |
| Internal Photo | Internal Photo | internal photos.pdf |
| Block Diagram | Block Diagram | block.pdf |
| ID Label / Location | Label Artwork and Location | label.pdf |
| User Manual | User Manual | manual.pdf |
| Cover Letter | Letter of Agency | agency.pdf |

INTERTEK TESTING SERVICES

EXHIBIT 1

GENERAL DESCRIPTION

INTERTEK TESTING SERVICES

1.0 General Description

1.1 Product Description

The Equipment Under Test (EUT) is a Netbook with internal WiFi module operating at 2.412-2.462GHz, 11 channels with 5MHz channel spacing. The EUT is installed with Windows CE operating system and can carry out base function of the PC. The device is powered by 1 X 8.4V internal rechargeable battery or an AC/DC Adapter (Input AC 120V/60Hz, output DC 9V, 1.5A).

1.2 Related Submittal(s) Grants

This is an application for certification of a personal computer.

INTERTEK TESTING SERVICES

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC.

INTERTEK TESTING SERVICES

EXHIBIT 2

SYSTEM TEST CONFIGURATION

INTERTEK TESTING SERVICES

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The device is powered by an Input AC 120V/60Hz, output DC 9V, 1.5A Adapter and 1 X 8.4V fully charged battery during the test. The EUT works in the modes of downloading, playing video, pinging with LAN etc, the worst case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 5GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

2.2 EUT Exercising Software

There is no software attached to exercise the device.

2.3 Special Accessories

The device is tested with an adapter with ferrite bead attached. They are marketed together with the device.

2.4 Equipment Modification

Any modifications installed previous to testing by SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD. will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

INTERTEK TESTING SERVICES

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

This product was tested in the following configuration:


Refer List:

| | Manufacturer | Model No. |
|---|--------------|---|
| Hard Disk | Smart.drive | HD-003 |
| SD Card | Sandisk | 1G/ BB0723011986D |
| 1.5m USB Cable | N/A | N/A |
| USB Keyboard with 1.8m unshielded cable | Dell | SK-8115 |
| USB Mouse with 1.5m unshielded cable | HP | R41126 |
| Earphone with 1.5m unshielded cable | NA | NA |
| Microphone with 1.2m unshielded cable | NA | NA |
| Adapter | NA | SAW-0901500 (INPUT: 100-240, 50/60Hz; OUTPUT: DC 9V-1.5A) |
| Laptop | IBM | T61 |
| 5.0m RJ45 Cable | N/A | N/A |

All the items listed under section 2.0 of this report are

Confirmed by:

Shawn Xing
Assistant Manager
Intertek Testing Services Shenzhen Ltd.
Kejiyuan Branch
Agent for SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

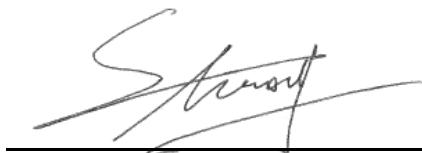

Signature

Sep 8, 2010 Date

INTERTEK TESTING SERVICES

EXHIBIT 3

EMISSION RESULTS

INTERTEK TESTING SERVICES

3.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

INTERTEK TESTING SERVICES

3.1 Field Strength Calculation (cont'd)

Example

Assume a receiver reading of 62.0dB μ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{dB}\mu\text{V}$$

$$AF = 7.4 \text{dB}$$

$$CF = 1.6 \text{dB}$$

$$AG = 29.0 \text{dB}$$

$$PD = 0 \text{dB}$$

$$AV = -10 \text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission

At

450.016 and 465.836MHz

(Operating Mode with downloading & playing video & pinging with LAN, etc)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.


INTERTEK TESTING SERVICES

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 0.7dB margin

TEST PERSONNEL:



Signature

Billy Li Compliance Engineer

Typed / Printed Name

Sep 8, 2010

Date

INTERTEK TESTING SERVICES

Company: SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

Date of Test: Sep 8, 2010

Model: UMPC7800

Worst Case Operating Mode: (downloading & playing video & pinging with LAN, etc)

Table 1

Radiated Emissions

| Polarization | Frequency (MHz) | Reading (dB μ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m (dB μ V/m) | Limit at 3m (dB μ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|-------------------|---------------------|--------------------------|----------------------------|-------------|
| Horizontal | 288.155 | 48.1 | 20.0 | 13.2 | 41.3 | 46.0 | -4.7 |
| Horizontal | 318.165 | 44.7 | 20.0 | 15.9 | 40.6 | 46.0 | -5.4 |
| Horizontal | 469.764 | 40.4 | 20.0 | 18.8 | 39.2 | 46.0 | -6.8 |
| Horizontal | 1579.021 | 39.8 | 20.0 | 26.8 | 46.6 | 54.0 | -7.4 |
| Vertical | 450.016 | 48.4 | 20.0 | 16.9 | 45.3 | 46.0 | -0.7 |
| Vertical | 456.382 | 45.9 | 20.0 | 17.3 | 43.2 | 46.0 | -2.8 |
| Vertical | 465.836 | 47.2 | 20.0 | 18.1 | 45.3 | 46.0 | -0.7 |
| Vertical | 1602.480 | 41.2 | 20.0 | 28.1 | 49.3 | 54.0 | -4.7 |
| Vertical | 4911.635 | 53.5 | 36.1 | 34.7 | 52.1 | 54.0 | -1.9 |

NOTES:

1. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
2. Negative value in the margin column shows emission below limit.
3. All emissions below 1000MHz are below the QP limit and all emissions above 1000MHz are below the AV limit.
4. Peak detector was used when the frequency above 1000MHz and QP detector was used when the frequency below 1000MHz.

Test Engineer: Billy Li

INTERTEK TESTING SERVICES

3.4 Conducted Emission Configuration Photograph

Worst Case Neutral-Conducted Configuration
at
2.721 MHz

(Operating Mode with downloading & playing video & pinging with LAN, etc)

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

INTERTEK TESTING SERVICES

3.5 Conducted Emission Data

Judgement: Passed by 0.3 dB margin

TEST PERSONNEL:



Signature

Billy Li, Compliance Engineer
Typed/Printed Name

Sep 8, 2010

Date

INTERTEK TESTING SERVICES


Company: SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

Date of Test: Sep 8, 2010

Model: UMPC7800

Worst Case Operating Mode: (downloading & playing video & pinging with LAN, etc)

Conducted Emission Test - FCC

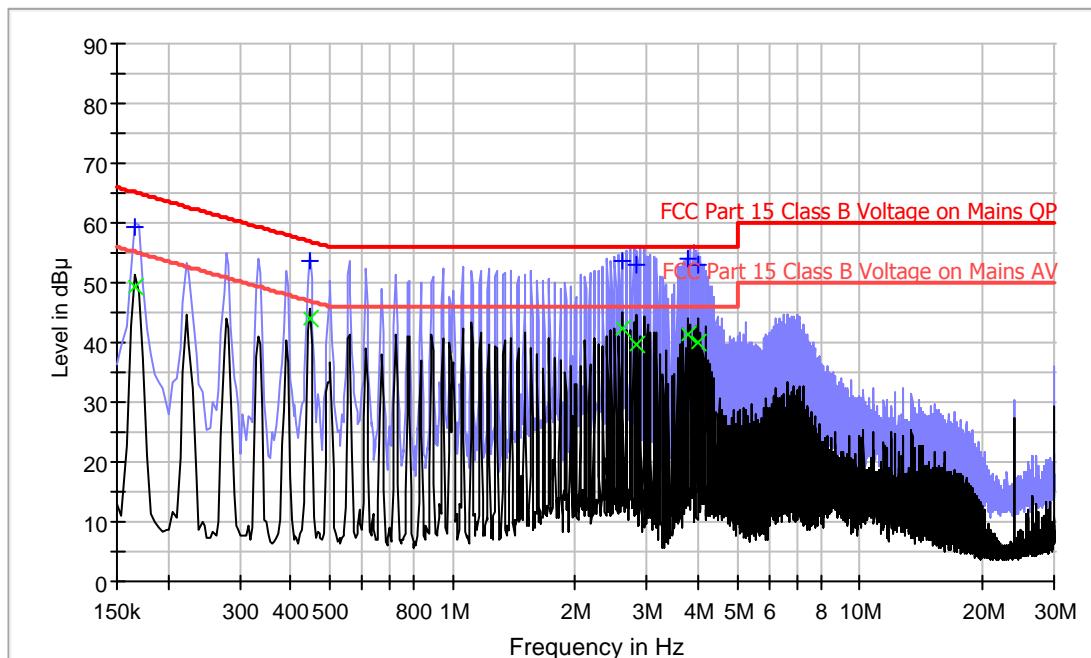

Result Table-QP

| Frequency (MHz) | QuasiPeak (dB μ V) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|------------------------|------|------------|-------------|--------------------|
| 0.166000 | 59.3 | L1 | 9.6 | 5.9 | 65.2 |
| 0.446000 | 53.6 | L1 | 9.6 | 3.3 | 56.9 |
| 2.618000 | 53.7 | L1 | 9.7 | 2.3 | 56.0 |
| 2.842000 | 52.9 | L1 | 9.7 | 3.1 | 56.0 |
| 3.786000 | 54.0 | L1 | 9.7 | 2.0 | 56.0 |
| 4.010000 | 53.0 | L1 | 9.7 | 3.0 | 56.0 |

Result Table-AV

| Frequency (MHz) | CAverage (dB μ V) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|-----------------------|------|------------|-------------|--------------------|
| 0.166000 | 49.3 | L1 | 9.6 | 5.9 | 55.2 |
| 0.446000 | 44.0 | L1 | 9.6 | 2.9 | 46.9 |
| 2.618000 | 42.2 | L1 | 9.7 | 3.8 | 46.0 |
| 2.842000 | 39.8 | L1 | 9.7 | 6.2 | 46.0 |
| 3.786000 | 41.2 | L1 | 9.7 | 4.8 | 46.0 |
| 4.010000 | 40.0 | L1 | 9.7 | 6.0 | 46.0 |

Test Engineer: Billy Li

TRF No.: FCC 15C_PC_a

FCC ID: XJN-SYNET07526

INTERTEK TESTING SERVICES


Company: SHUOYING INDUSTRIAL (SHENZHEN) CO., LTD.

Date of Test: Sep 8, 2010

Model: UMPC7800

Worst Case Operating Mode: (downloading & playing video & pinging with LAN, etc)

Conducted Emission Test - FCC

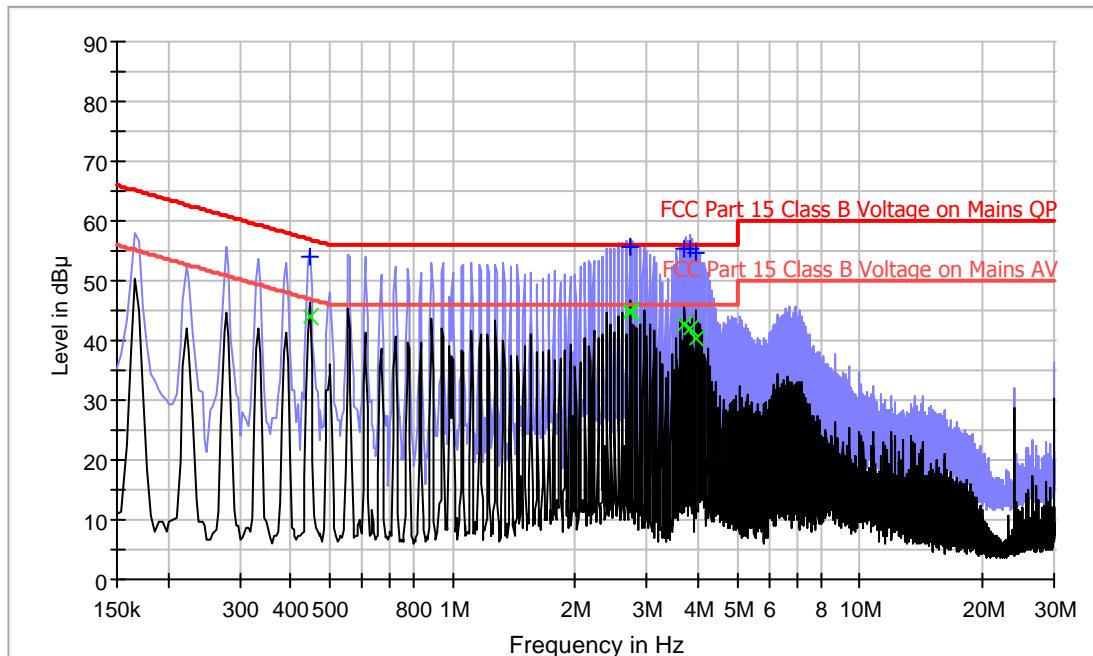

Result Table-QP

| Frequency (MHz) | QuasiPeak (dB μ V) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|------------------------|------|------------|-------------|--------------------|
| 0.446000 | 54.1 | N | 9.6 | 2.8 | 56.9 |
| 2.721000 | 55.7 | N | 9.7 | 0.3 | 56.0 |
| 2.722000 | 55.6 | N | 9.7 | 0.4 | 56.0 |
| 3.722000 | 55.5 | N | 9.8 | 0.5 | 56.0 |
| 3.834000 | 55.4 | N | 9.8 | 0.6 | 56.0 |
| 3.946000 | 54.7 | N | 9.8 | 1.3 | 56.0 |

Result Table-AV

| Frequency (MHz) | CAverage (dB μ V) | Line | Corr. (dB) | Margin (dB) | Limit (dB μ V) |
|-----------------|-----------------------|------|------------|-------------|--------------------|
| 0.446000 | 44.0 | N | 9.6 | 2.9 | 46.9 |
| 2.721000 | 44.9 | N | 9.7 | 1.1 | 46.0 |
| 2.722000 | 44.7 | N | 9.7 | 1.3 | 46.0 |
| 3.722000 | 42.8 | N | 9.8 | 3.2 | 46.0 |
| 3.834000 | 42.2 | N | 9.8 | 3.8 | 46.0 |
| 3.946000 | 40.3 | N | 9.8 | 5.7 | 46.0 |

Test Engineer: Billy Li

TRF No.: FCC 15C_PC_a

FCC ID: XJN-SYNET07526

INTERTEK TESTING SERVICES

EXHIBIT 4

EQUIPMENT PHOTOGRAPHS

INTERTEK TESTING SERVICES

4.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 5

PRODUCT LABELLING

INTERTEK TESTING SERVICES

5.0 Product Labelling

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 6

TECHNICAL SPECIFICATIONS

INTERTEK TESTING SERVICES

6.0 Technical Specifications

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

INTERTEK TESTING SERVICES

EXHIBIT 7

INSTRUCTION MANUAL

INTERTEK TESTING SERVICES

7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

INTERTEK TESTING SERVICES

EXHIBIT 8

MISCELLANEOUS INFORMATION

INTERTEK TESTING SERVICES

8.0 **Miscellaneous Information**

This miscellaneous information includes emission measuring procedure.

INTERTEK TESTING SERVICES

8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2003.

The computer peripheral equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in QP mode from the frequency band 30MHz to 1GHz and RBW setting is 120kHz. Above 1000 MHz, a resolution bandwidth of 1 MHz and Peak & AV detector are used. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 5GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

INTERTEK TESTING SERVICES

8.1 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2003.

INTERTEK TESTING SERVICES

EXHIBIT 9

TEST EQUIPMENT LIST

INTERTEK TESTING SERVICES

9.0 Test Equipment List

| Equipment No. | Equipment | Manufacturer | Model No. | Serial No. | Cal. Date | Due Date |
|---------------|--------------------|--------------|--------------|------------|-----------|-----------|
| SZ061-03 | BiConiLog Antenna | ETS | 3142C | 00066460 | 25-Nov-09 | 25-May-11 |
| SZ185-01 | EMI Receiver | R&S | ESCI | 100547 | 08-Mar-10 | 08-Mar-11 |
| SZ061-08 | Horn Antenna | ETS | 3115 | 00092346 | 15-Mar-10 | 15-Sep-11 |
| SZ056-03 | Spectrum Analyzer | R&S | FSP 30 | 101148 | 18-Mar-10 | 18-Mar-11 |
| SZ181-04 | Preamplifier | Agilent | 8449B | 3008A02474 | 18-Mar-10 | 18-Mar-11 |
| SZ188-01 | Anechoic Chamber | ETS | RFD-F/A-100 | 4102 | 09-Jan-10 | 09-Jan-11 |
| SZ062-02 | RF Cable | RADIALL | RG 213U | -- | 19-Apr-10 | 19-Oct-10 |
| SZ062-06 | RF Cable | RADIALL | 0.04-26.5GHz | -- | 17-Aug-09 | 11-Mar-11 |
| SZ062-12 | RF Cable | RADIALL | 0.04-26.5GHz | -- | 17-Aug-09 | 11-Mar-11 |
| SZ185-02 | EMI Test Receiver | R&S | ESCI | 100692 | 23-Nov-09 | 23-Nov-10 |
| SZ187-01 | Two-Line V-Network | R&S | ENV216 | 100072 | 23-Nov-09 | 23-Nov-10 |
| SZ187-02 | Two-Line V-Network | R&S | ENV216 | 100073 | 23-Nov-09 | 23-Nov-10 |
| SZ188-03 | Shielding Room | ETS | RFD-100 | 4100 | 05-Nov-09 | 05-Nov-10 |