

FCC CFR47 PART 90 SUBPART Z

Test Report

3.65 GHz Fixed Wireless Base Station Transceiver

Model Numbers: Quantum 6636, Quantum 2236

**FCC ID: XN3-QUANTUM6636
IC: 8974A-QUANTUM6636**

Report Number: 11PRO009

Issue Date: 13 December 2011

Prepared for
PureWave Networks Inc.
2660-C Marine Way
Mountain View, CA 94043

Prepared by
T.N. Cokenias Consulting
P.O. Box 1086
El Granada CA 94018

Report Revision History

Revision No.	Description	Revised by	Date
-	Original issue	T.N. Cokenias	15 Nov 2011
1	Correct PSD data: AVE detector Include -2.3 dBi correction	T.N. Cokenias	13 Nov 2011

TABLE OF CONTENTS

1. TEST AND TEST LOCATION INFORMATION.....	4
2. TEST METHODOLOGY.....	5
3. EQUIPMENT UNDER TEST.....	5
3.1. <i>DESCRIPTION OF EUT.....</i>	5
3.2. <i>MAXIMUM OUTPUT POWER.....</i>	5
3.3. <i>ANTENNA SELECTION AND EIRP LIMITS.....</i>	6
3.4. <i>SOFTWARE AND FIRMWARE.....</i>	6
3.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	6
3.6. <i>DESCRIPTION OF TEST SETUP.....</i>	7
<i>50 ohm term.....</i>	7
3.7. <i>Modifications to EUT.....</i>	7
<i>TEST AND MEASUREMENT EQUIPMENT.....</i>	8
LIMITS AND RESULTS.....	8
3.7. <i>ANTENNA PORT CHANNEL TESTS.....</i>	8
3.7.1. -26 dB and 99% OCCUPIED BANDWIDTH.....	8
3.7.2. CONDUCTED SPURIOUS EMISSIONS.....	19
3.8. <i>RADIATED EMISSIONS.....</i>	26
3.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	26
3.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ HARMONICS AND SPURIOUS EMISSIONS.....	27
3.8.3. TRANSMITTER RADIATED EMISSIONS BELOW 1 GHZ SPURIOUS AND DIGITAL SECTION EMISSIONS.....	28

1. TEST AND TEST LOCATION INFORMATION

COMPANY NAME: PureWave Networks, Inc.
2660-C Marine Way
Mountain View, CA 94043

EUT DESCRIPTION: FCC Part 90Z Base Station
Frequency Range: 3650-3675MHz
WiMax 6x6 MIMO Configuration
Channel Bandwidths: 5 MHz, 10 MHz
Modulations: QPSK, 16QAM, 64QAM

FCC ID: XN3-QUANTUM6636
IC: 8974A-QUANTUM6636

MODEL: Quantum 6636 (6x6)
Quantum 2236 (2x2)

DATE TESTED: 26-29 September, 25 October, 11 November 2011

Testing performed at:

PureWave Networks, Inc.
2660-C Marine Way
Mountain View, CA 94043



13 December 2011

T.N. Cokenias
Agent for PureWave Networks, Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with EIA/TIA 603, FCC CFR 47 Part 2 and FCC CFR 47 Part 90 Subpart Z.

3. EQUIPMENT UNDER TEST

3.1. DESCRIPTION OF EUT

The EUT is a WiMAX base station radio operating in the 3650-3675 MHz restricted contention-based protocol frequency band. Modulation is 802.16d/e in 5 MHz and 10 MHz channel bandwidths. The EUT is capable of operation in 2x2 MIMO and 6x6 MIMO modes. This report shows data taken on 6x6 MIMO configuration. A 2x2 MIMO configuration is also available, this configuration is identical to the 6x6 configuration but with only two of the chains populated. The maximum per chain output power of the 2x2 configuration is the same as that for the 6x6 configuration: 30 dBm setting for 5 MHz EBW channels and 33 dBm for 10 MHz EBW channels.

3.2. MAXIMUM OUTPUT POWER

5 MHz EBW		QPSK	16QAM	64QAM
	(MHz)	(dBm)	(dBm)	(dBm)
High	3697.5	33.44	33.4	33.4

10 MHz EBW		QPSK	16QAM	64QAM
	(MHz)	(dBm)	(dBm)	(dBm)
High	3695	35.5	35.3	35.4

3.3. ANTENNA SELECTION AND EIRP LIMITS

The licensee can select a variety of antenna types and gains from a variety of manufacturers in addition to PureWave Networks. It is the responsibility of the licensee to adjust transmitter output power such that the eirp limits specified in section 90.1321 (a) of the Rules are not exceeded:

90.1321(a) Base stations and fixed stations are limited to 25watts/25 MHz equivalent isotropic radiated power (EIRP). In any event the EIRP power density shall not exceed 1 watt in any on-megahertz slice of spectrum.

The antenna port output powers for this product are calculated based on the following typical installation parameters:

1. A minimum 6 dBi antenna for use with base stations,
2. 30m cable loss for TMC LMR-400 at 3.65 MHz = 8.3 dB
3. Effective antenna gain: $6 - 8.3 = -2.3$ dBi

The PureWave installation manual provides the installer guidance on how to calculate the maximum input power to the antenna so as to remain within the regulatory EIRP limits.

3.4. SOFTWARE AND FIRMWARE


The software controlling the EUT during testing was PureWave OS v1.1.1.

3.5. WORST-CASE CONFIGURATION AND MODE

Radiated and conducted emissions tests were performed for both 5 MHz and 10 MHz emission bandwidth channels. Testing was performed for all available modulations: QPSK, 16QAM and 64QAM. Worst-case emissions for both emissions bandwidths are reported.

3.6. DESCRIPTION OF TEST SETUP

SETUP DIAGRAM FOR TESTS

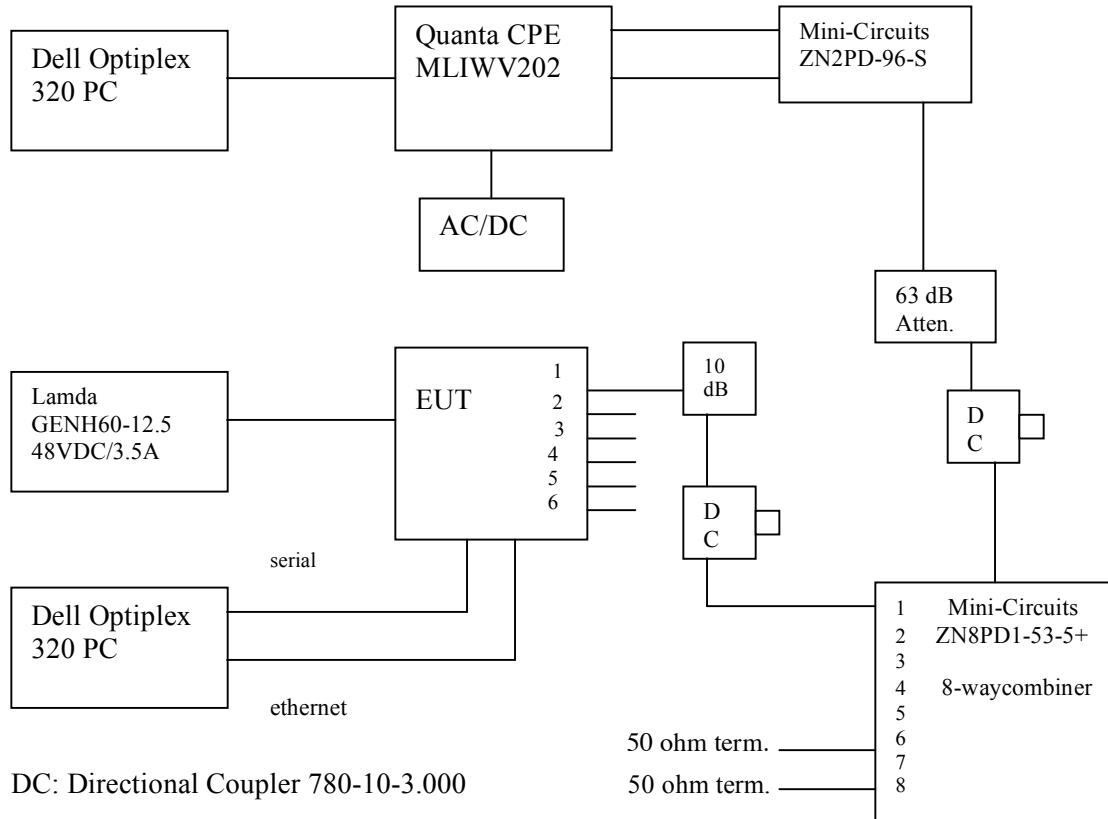

3.7 Modifications to EUT

None.

TEST AND MEASUREMENT EQUIPMENT

PureWave: Antenna Port Conducted Tests

Description	Manufacturer	Model	Asset/Serial Number	Cal Due
N9020A Signal Analyze	Agilent	N9020A	MY46472174	07/09/12

LIMITS AND RESULTS

3.7. ANTENNA PORT CHANNEL TESTS

3.7.1. -26 dB and 99% OCCUPIED BANDWIDTH

REQUIREMENT

2.1049 Measurements required: Occupied bandwidth.

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 99% bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The internal OCC BW function of the spectrum analyzer was activated to display both 99% BW and -26 dB BW values.

TEST RESULTS

For each EBW and modulation, occupied bandwidth was measured for each chain. The values obtained were very similar chain by chain, within 2% of each other. The same can be said for the different modulations – for a given EBW, the measured value changed very little from modulation to modulation or from chain to chain.

Spectrum analyzer plots for all chains and all modulations at 5 MHz EBW channel are presented below to document the fact that there are only small variations in value from chain to chain (B).

The second set of spectrum analyzer plots (C) show only the highest value single chain occupied bandwidth for each modulation at Low, Mid, and High channels. These values are summarized in the table below (A).

A. Occupied BW Summary

5MHz EBW QPSK

Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3697.5	4.5714	4.792

5MHz EBW 16QAM

Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3697.5	4.5693	4.791

5MHz EBW 64QAM

Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3697.5	4.5738	4.768

10 MHz EBW QPSK

Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3695	9.1249	9.503

10 MHz EBW 16QAM


Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3695	9.1242	9.505

10 MHz EBW 64QAM


Channel	Frequency MHz	99% Occupied Bandwidth, MHz	-26 dB Bandwidth, MHz
High	3695	9.1245	9.509

B. Chains 1-6, 5 MHz EBW, QPSK


Chain 1

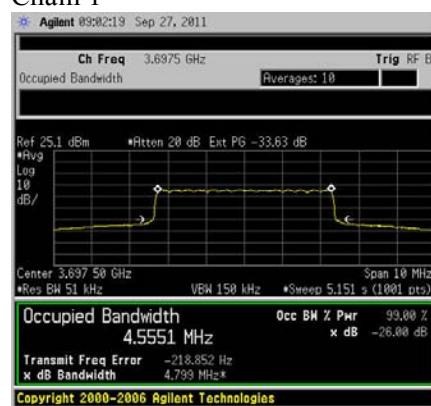


Chain 2

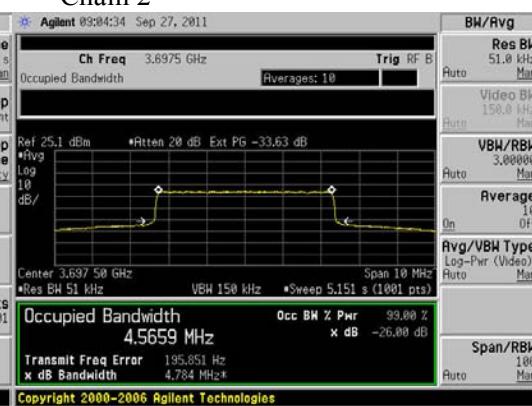


Chain 3

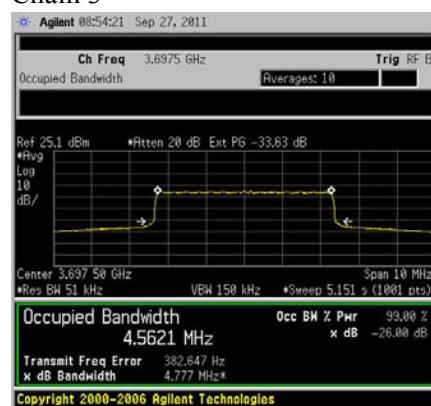


Chain 4

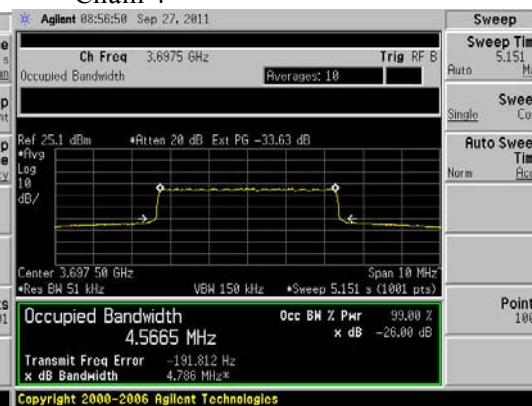

Chain 5

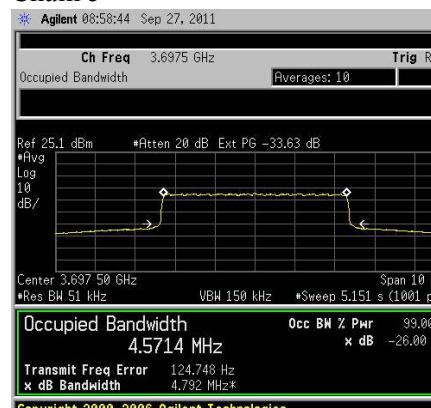


Chain 6

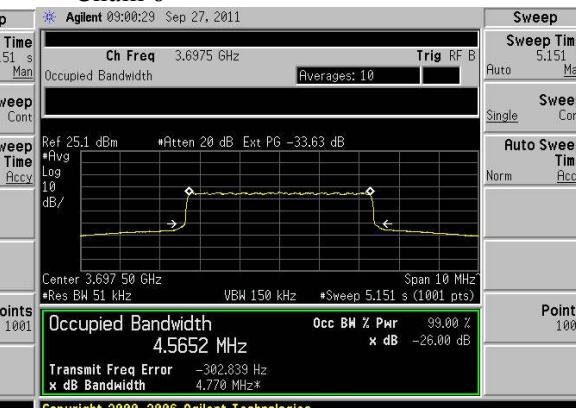


Highest Occ BW: 4.5714 MHz (Chain 5)

B. Chains 1-6, 5MHz EBW, 16QAM


Chain 1

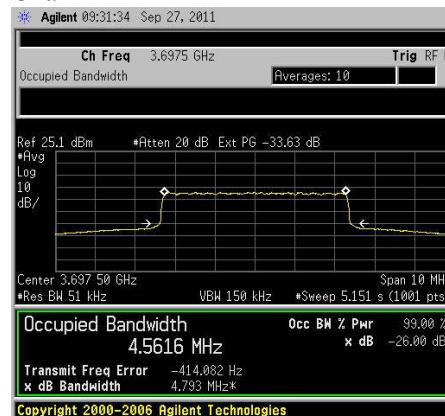


Chain 2

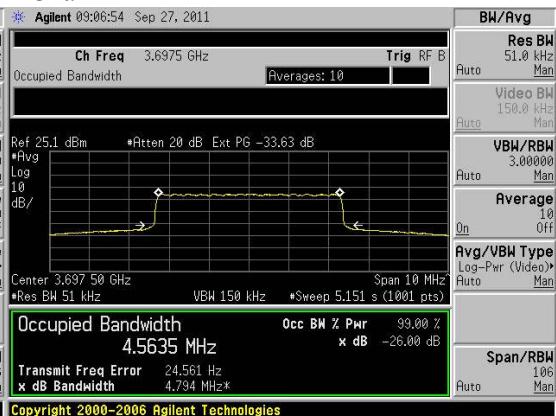


Chain 3

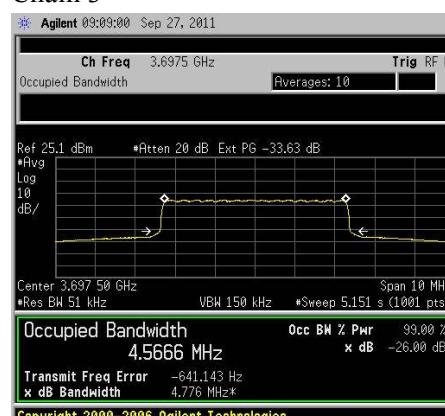


Chain 4

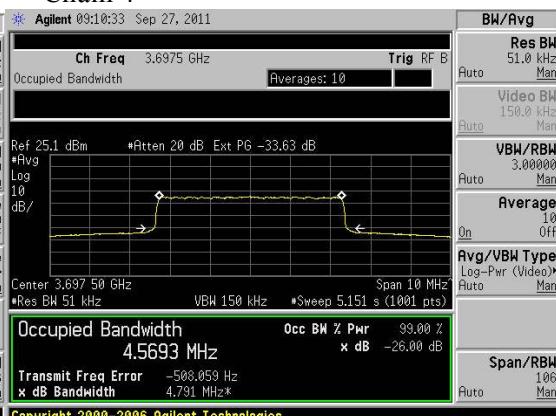

Chain 5

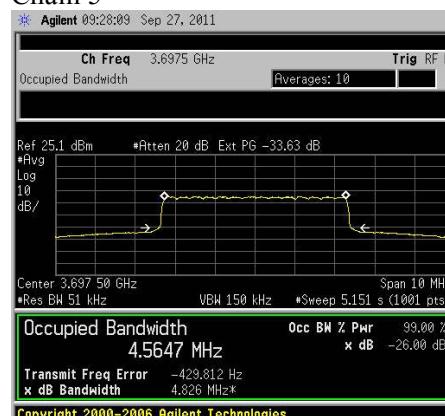


Chain 6

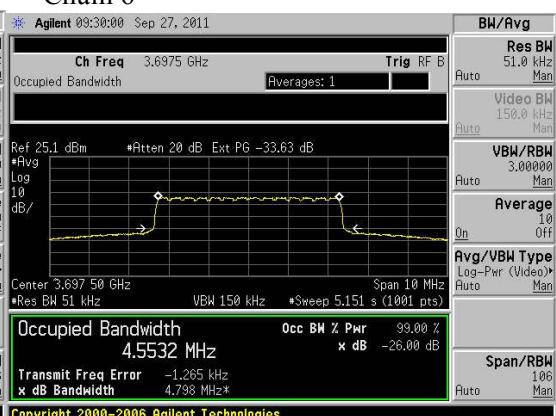


Highest Occ BW: 4.5693 MHz (Chain 4)

B. Chains 1-6, 5MHz EBW, High 64QAM


Chain 1

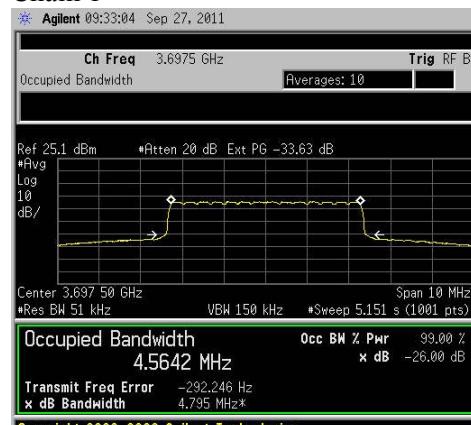


Chain 2

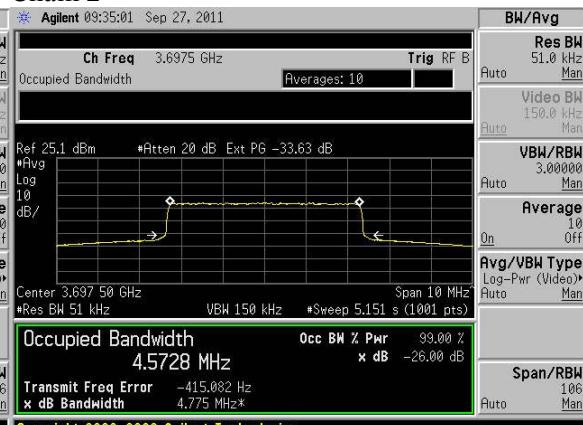


Chain 3

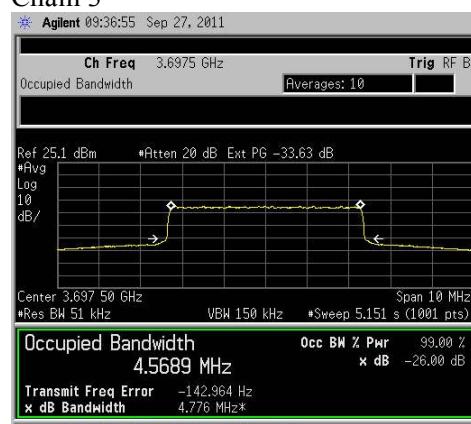


Chain 4

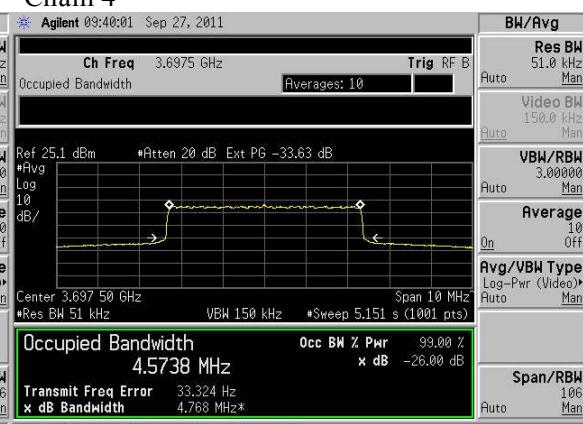

Chain 5

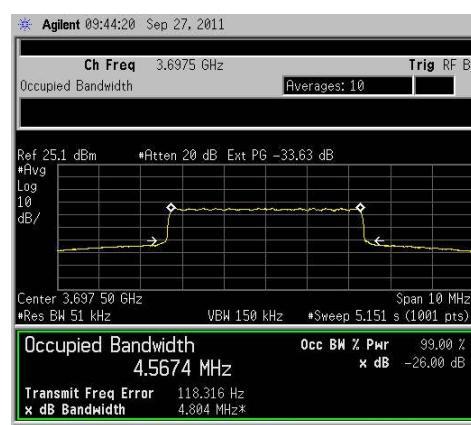

Chain 6

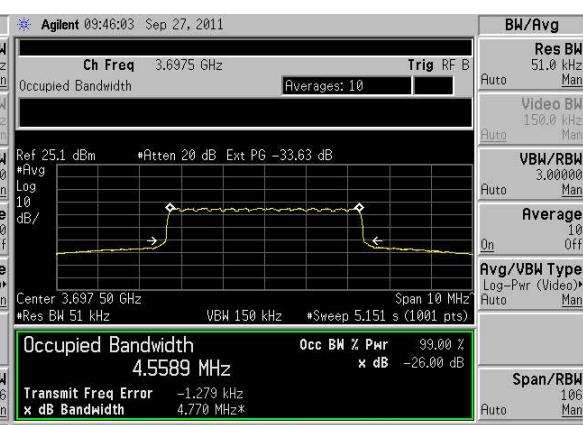


Highest Occ BW: 4.5738 MHz (Chain 4)

5MHz QPSK
 Chain 5




5MHz 16QAM
 Chain 4

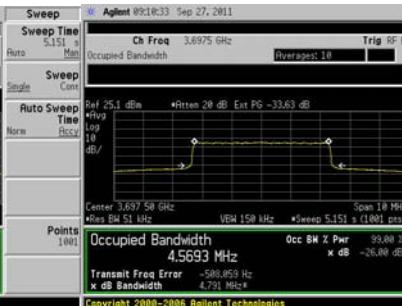


5MHz 64QAM
 Chain 4




10MHz QPSK
 Chain 2



10MHz 16QAM
 Chain 2

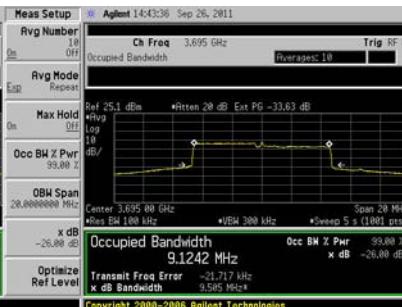

10MHz 64QAM
 Chain 2

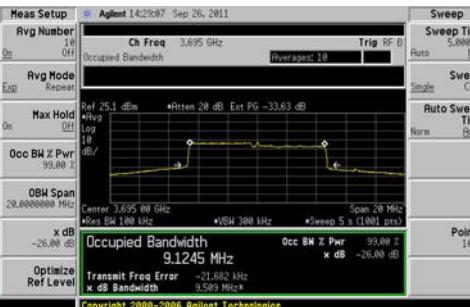

PEAK OUTPUT POWER

PEAK EIRP LIMIT

90.1321(a) Base stations and fixed stations are limited to 25watts/25 MHz equivalent isotropic radiated power (EIRP). In any event the EIRP power density shall not exceed 1 watt in any on-megahertz slice of spectrum.

The maximum permitted antenna port output powers for this product are calculated based on the following typical installation parameters:

- A minimum 6 dBi antenna for use with base stations,
- 30m cable loss for TMC LMR-400 at 3.65 MHz = 8.3 dB
- Effective antenna gain: $6 - 8.3 = -2.3$ dBi

TEST PROCEDURE

Channel power measurements were made using the spectrum analyzer built-in function. The settings and procedures followed are found in FCC KDB document 965270 D01 Pwr Meas Part 90 Z Equipment v01.

Measurements were taken for each modulation and for each chain at High frequencies, and the results summed algebraically to determine total output power and EIRP.

Power output calculations are found in the spreadsheet below. Spectrum analyzer plots of conducted antenna port channel power are located in Annex A of this report for reference.

Note: Power output measurements were taken at same transmitter power settings that were used for PSD tests, as PSD is the limiting factor.

Output Power High Channel eirp

Single Element Minimum Antenna Gain	6 dBi
Single Element Maximum Cable Loss	8.3 dB
Single Element Net Antenna Gain	-2.3 dBi

NOTE: Power readings 1-6 below in units of dBm eirp					
5MHz		Pout	30dBm	setting	
3697.5MHz					
QPSK	1	2	3	4	5
	26.24	25.4	25.56	25.81	25.52
					25.37
QAM16	1	2	3	4	5
	26.37	25.47	24.7	25.94	25.57
					25.48
QAM64	1	2	3	4	5
	26.62	24.66	24.85	26	25.75
					25.8

NOTE: Power readings 1-6 below in units of watts eirp					
10MHz		Pout	33dBm	setting	
3695					
QPSK	1	2	3	4	5
	28.37	27.01	27.22	27.32	27.1
					29.04
QAM16	1	2	3	4	5
	27.72	27.06	27.29	27.32	26.66
					28.67
QAM64	1	2	3	4	5
	27.83	27.3	27.29	27.76	27.13
					28.51

NOTE: Power readings 1-6 below in units of watts eirp					
10MHz		Pout	33dBm	setting	
3695					
EIRP	PoutdBm				
1	2	3	4	5	6 Avg
0.420727	0.346737	0.359749	0.381066	0.356451	0.34435 0.36817995
Combined	33.4406				
1	2	3	4	5	6 Avg
0.433511	0.352371	0.295121	0.392645	0.360579	0.353183 0.364568237
Combined	33.3979				
1	2	3	4	5	6 Avg
0.459198	0.292415	0.305492	0.398107	0.375837	0.380189 0.368539889
Combined	33.4448				
1	2	3	4	5	6 Avg
0.687068	0.502343	0.52723	0.539511	0.512861	0.801678 0.59511516
Combined	35.52601				
1	2	3	4	5	6 Avg
0.591562	0.508159	0.535797	0.539511	0.463447	0.736207 0.562447062
Combined	35.28082				
1	2	3	4	5	6 Avg
0.606736	0.537032	0.535797	0.597035	0.516416	0.709578 0.583765701
Combined	35.44239				

EIRP POWER DENSITY

PEAK EIRP POWER DENSITY LIMIT

90.1321(a) Base stations and fixed stations are limited to 25watts/25 MHz equivalent isotropic radiated power (EIRP). In any event the EIRP power density shall not exceed 1 watt in any on-megahertz slice of spectrum.

TEST PROCEDURE

Peak PSD measurements were made using the settings and procedures in FCC KDB document 965270 D01 Pwr Meas Part 90 Z Equipment v01.

Measurements were taken for each modulation and for each chain High frequencies, and the results summed algebraically to determine total output power and EIRP.

Peak PSD EIRP calculations are found in the spreadsheet below. Spectrum analyzer plots of conducted antenna port PSD measurements are located in Annex B of this report for reference.

Note: Power output measurements were taken at same transmitter power settings that were used for PSD tests, as PSD is the limiting factor.

Effective antenna gain: -2.3 dBi

5MHz 3697.5MHz						Pout 30dBm						PSD, watt						Sum 6 Chains Output Power			Effective antenna gain, dBi	Maximum Output EIRP
QPSK	1	2	3	4	5	6						1	2	3	4	5	6	Avg	31.23896	-2.3	28.9389	
	23.52	24.18	22.48	23.51	22.83	23.99						0.224905	0.261818	0.177011	0.224388	0.191867	0.250611	0.221767				
QAM16	1	2	3	4	5	6						1	2	3	4	5	6	Avg	31.56345	-2.3	29.2634	
	23.86	22.85	24.39	23.45	24.19	23.79						0.24322	0.192752	0.274789	0.221309	0.262422	0.239332	0.238971				
QAM64	1	2	3	4	5	6						1	2	3	4	5	6	Avg	30.43164	-2.3	28.1316	
	23.22	21.85	22.46	22.53	22.52	23.18						0.209894	0.153109	0.176198	0.179061	0.178649	0.20797	0.184147				
10MHz 3695	1	2	3	4	5	6						1	2	3	4	5	6	Avg	32.20314	-2.3	29.9031	
QPSK	23.75	26.01	21.95	25.29	24.13	24.34						0.237137	0.399025	0.156675	0.338065	0.258821	0.271644	0.276895				
QAM16	1	2	3	4	5	6						1	2	3	4	5	6	Avg	31.80946	-2.3	29.5094	
	22.87	24.27	21.89	24.77	24.07	25.4						0.193642	0.267301	0.154525	0.299916	0.25527	0.346737	0.252899				
QAM64	1	2	3	4	5	6						1	2	3	4	5	6	Avg	31.67076	-2.3	29.3707	
	23.08	24.48	22.54	23.6	25.49	23.49						0.203236	0.280543	0.179473	0.229087	0.353997	0.223357	0.244949				

MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P(\text{mW}) = P(\text{W}) / 1000 \text{ and}$$

$$d(\text{cm}) = 100 * d(\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm}) / 10)} \text{ and}$$

$$G(\text{numeric}) = 10^{(G(\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), S = 1.0 mW/cm²

RESULTS

RF exposure considerations will be addressed by the licensee at the time of installation. The maximum eirp allowed under Part 90 for this product is 10 Watts/10 MHz channels, or 40 dBm EIRP. The MPE distance for 40 dBm eirp calculated below:

Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
1.0	40.00	0.00	28.20

3.7.2. CONDUCTED SPURIOUS EMISSIONS

REQUIREMENT

2.1051 Measurements required: Spurious emissions at antenna terminals.

The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

90.1323(a) Emission limits.

(a) The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.


TEST PROCEDURE

The transmitter outputs are connected to a spectrum analyzer using a combiner. At the Low and High channels, in the 1 MHz band immediately adjacent to the band edge, RBW=1% EBW, VBW=3xRBW. Elsewhere RBW = 1 MHZ, VBW=3 MHz.


RESULTS

No non-compliance noted:


5 MHZ QPSK CONDUCTED SPURIOUS, HIGH CHANNEL P=30

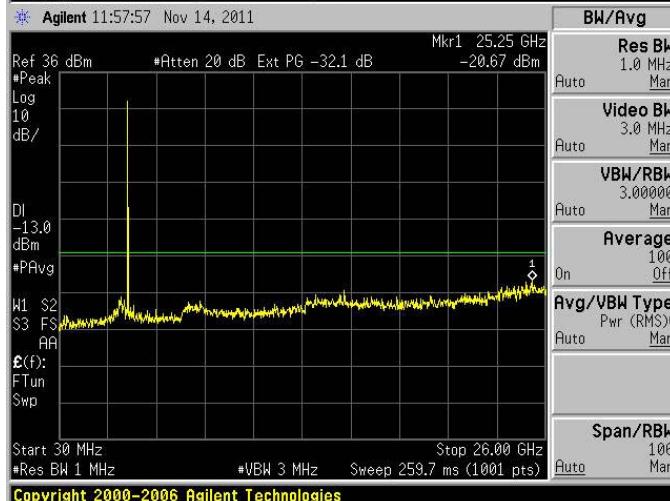


5 MHZ 16QAM CONDUCTED SPURIOUS, HIGH CHANNEL P=30

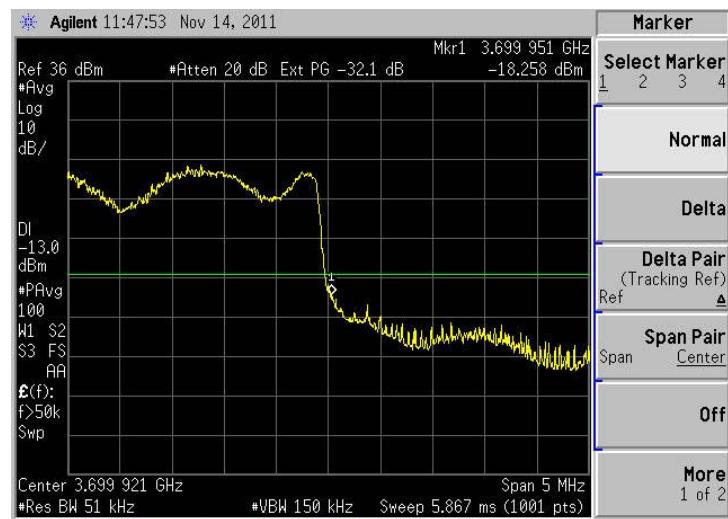

Copyright 2000-2006 Agilent Technologies



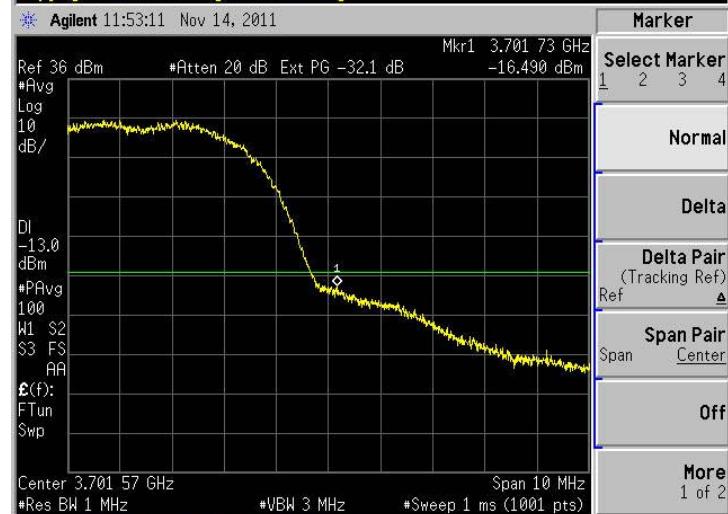


Copyright 2000-2006 Agilent Technologies



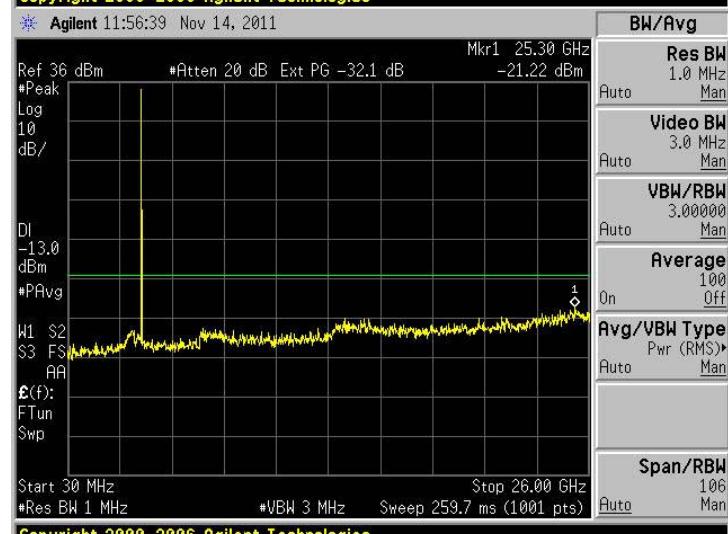


Copyright 2000-2006 Agilent Technologies


5 MHZ 64QAM CONDUCTED SPURIOUS, HIGH CHANNEL P=30

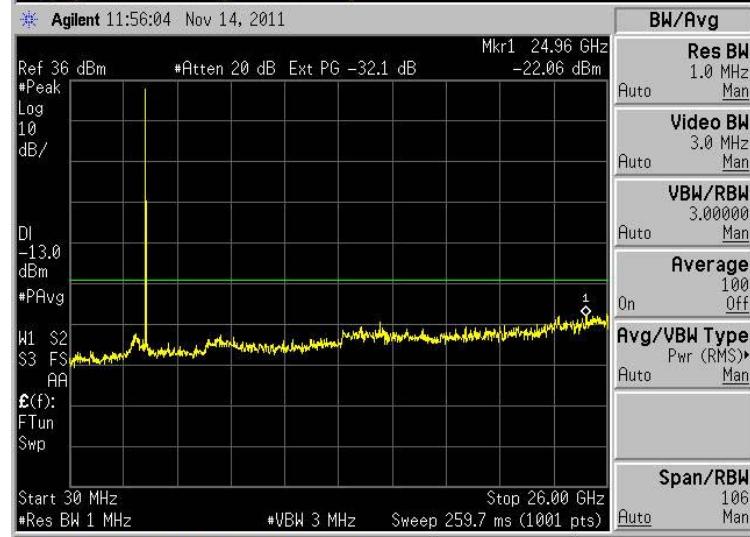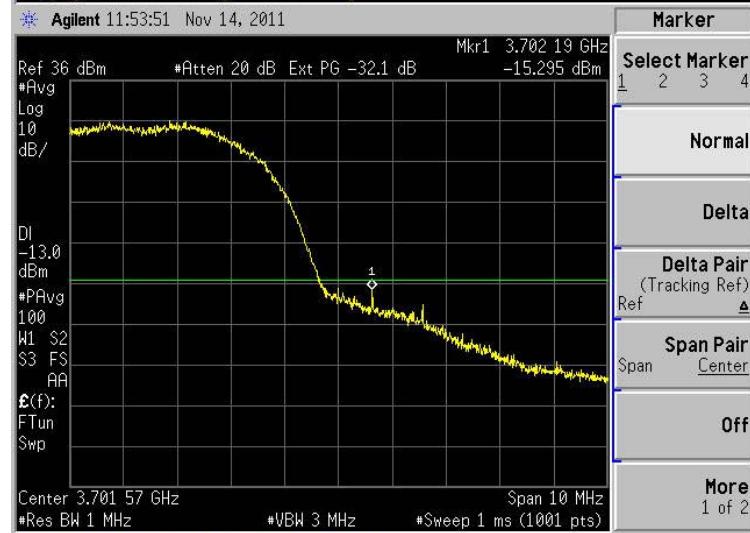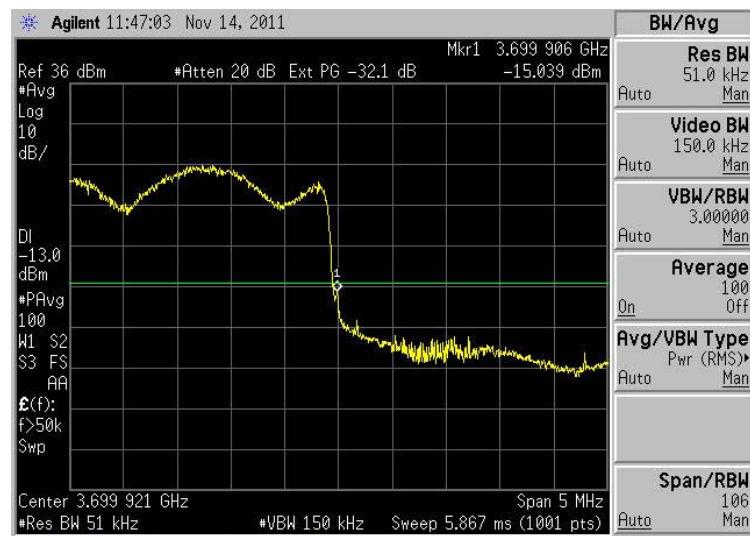


10 MHZ QPSK CONDUCTED SPURIOUS, HIGH CHANNEL, P=33

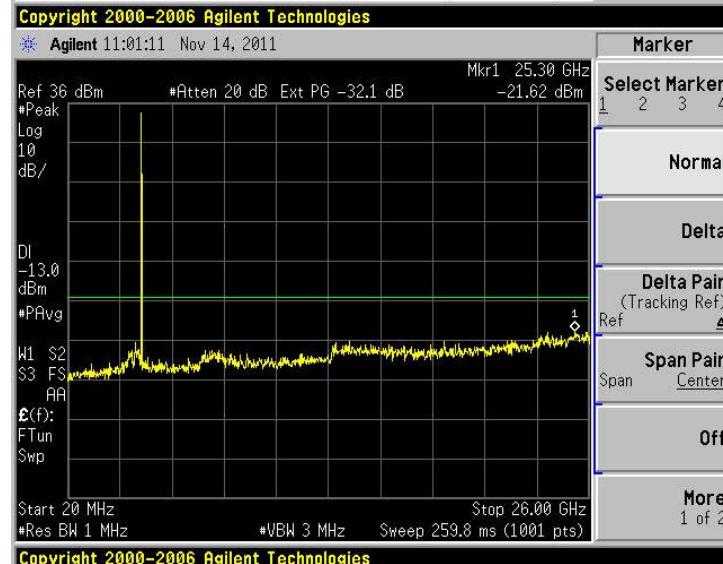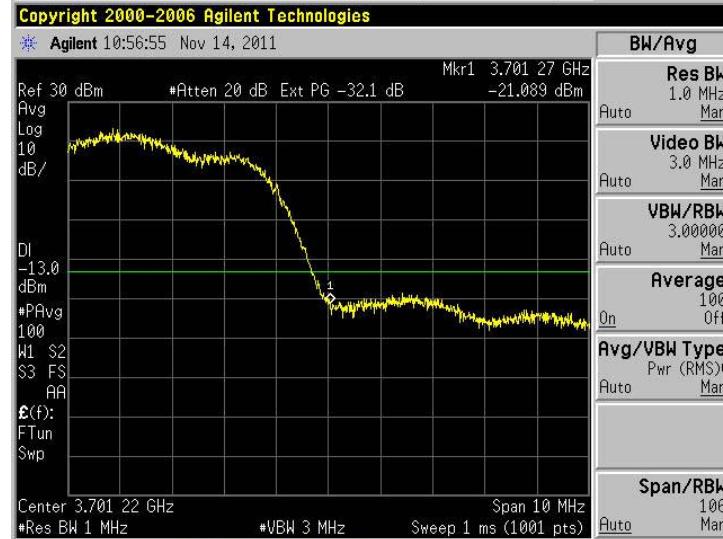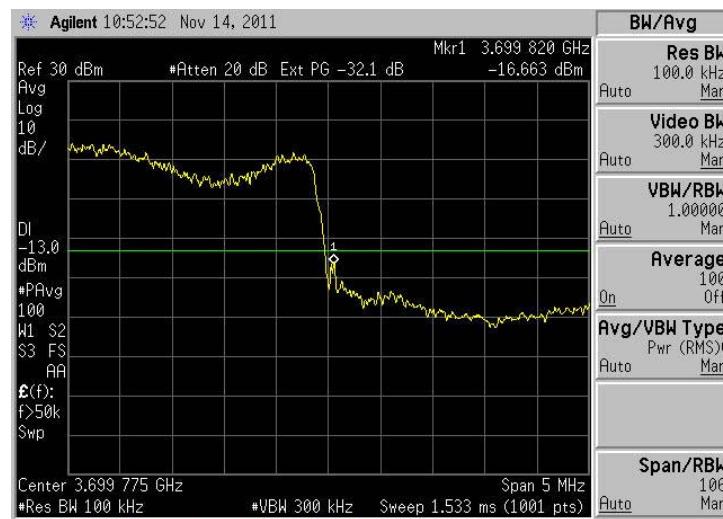


10 MHZ 16QAM CONDUCTED SPURIOUS, HIGH CHANNEL, P=33

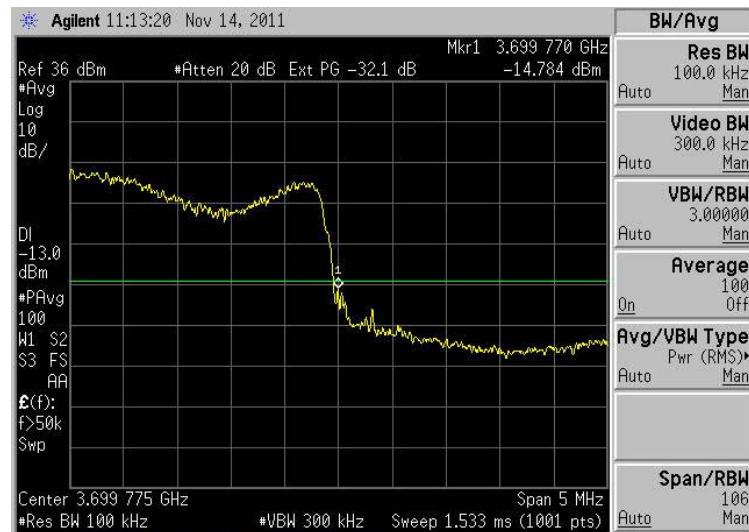

Copyright 2000-2006 Agilent Technologies

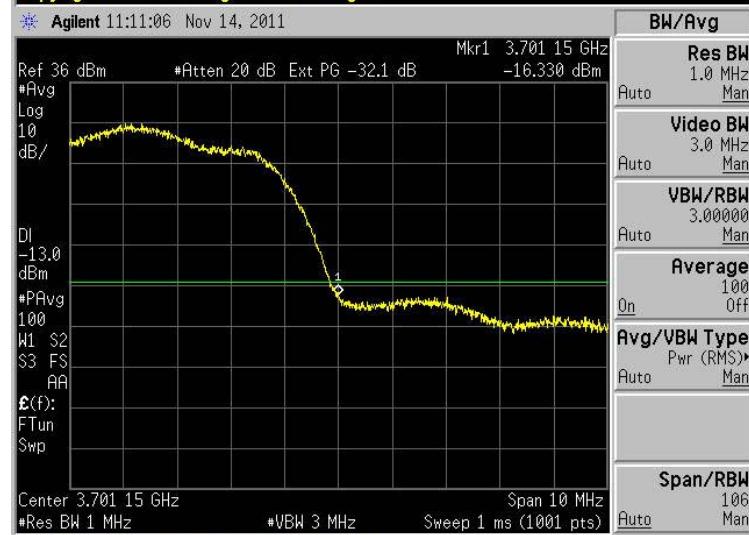


Copyright 2000-2006 Agilent Technologies

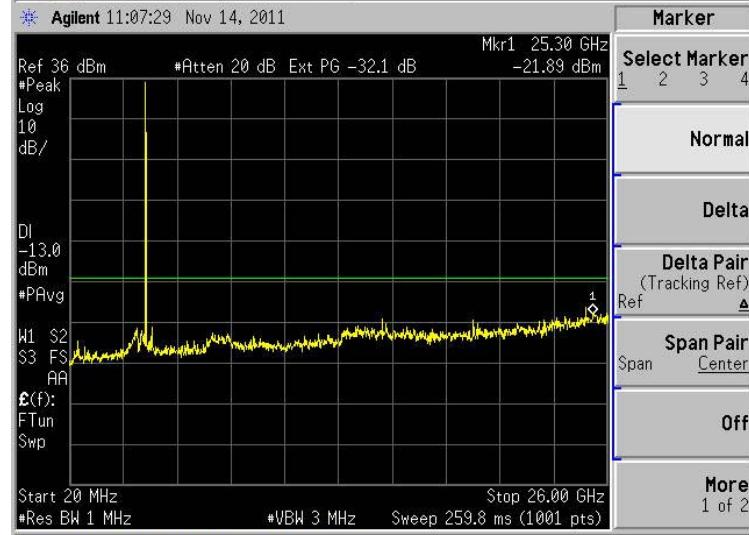

Copyright 2000-2006 Agilent Technologies

10 MHZ 64QAM CONDUCTED SPURIOUS, HIGH CHANNEL, P=33

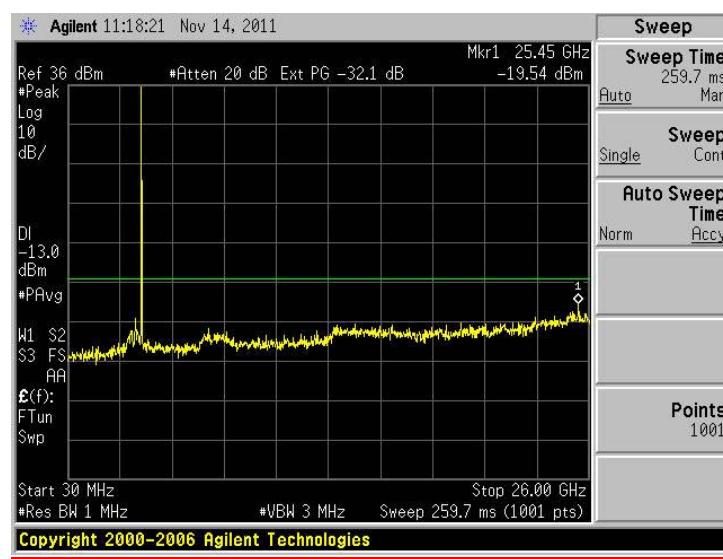

3.8. RADIATED EMISSIONS

3.8.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

REQUIREMENT

2.1053 Measurements required: Field strength of spurious radiation

Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half wave dipole antennas.

90.1323(a) Emission limits.

(a) The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.

TEST PROCEDURE

Testing was performed using the substitution method.

1. The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna port was terminated with a resistive non-radiating 50 ohm termination.
2. The spectrum from 30 MHz to 37 GHz was investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.
3. The frequency range of interest was monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.
4. The EUT was replaced by a signal generator and antenna. The signal generator was set to produce field strengths matching the levels obtained in step 3 above. The equivalent eirp was calculated from the signal generator output and antenna gain with respect to isotropic.

Note: For emissions below 1 GHz, the field strength of the emission is also compared against the EN55022 class A limits for digital devices

TEST RESULTS

TEST NOT PERFORMED AT 3697.5 MHz and 3695 MHz.

Refer to plots and tabulated data below from previous testing done on this product. All emissions below 1 GHz were at least 20 dB below -13 dBm limit and were determined to be from the digital section of the product. For all modulations for 5/10 MHz bandwidths, worst-case emissions above 1 GHz are at least 24 dB below limits. Engineering judgement indicates that test results at the new high channels would exhibit similar compliance levels. Data for previous test results are reproduced below.



3.8.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ HARMONICS AND SPURIOUS EMISSIONS

QPSK 5 MHz Channels

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Chamber		Pre-amplifier		Filter		Limit				
f GHz	SA reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Path Loss (dB)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Tx QPSK, 5 MHz BW										
Low Ch 3.652.5GHz										
1.08	-50.6	V	3.0	31.4	39.4		-58.5	-13.0	-45.5	
1.25	-49.3	V	3.0	32.9	38.9		-55.3	-13.0	-42.3	
1.87	-56.5	V	3.0	39.3	37.9		-55.0	-13.0	-42.0	
2.49	-58.6	V	3.0	41.8	37.5		-54.3	-13.0	-41.3	
3.02	-60.3	V	3.0	43.4	37.3		-54.3	-13.0	-41.3	
Harmonics Spurious										
7.31	-59.0	V	3.0	51.7	36.6		-43.8	-13.0	-30.8	
10.96	-59.7	V	3.0	56.2	36.9		-40.5	-13.0	-27.5	
14.61	-65.9	V	3.0	59.9	35.0		-41.0	-13.0	-28.0	Noise floor
			3.0							
7.31	-59.8	H	3.0	52.8	36.6		-43.6	-13.0	-30.6	
10.96	-58.6	H	3.0	55.9	36.9		-39.7	-13.0	-26.7	
14.61	-64.0	H	3.0	60.1	35.0		-38.9	-13.0	-25.9	Noise floor
Mid Ch 3662.5MHz										
7.33	-57.9	V	3.0	51.7	36.6		-42.7	-13.0	-29.7	
10.99	-61.3	V	3.0	56.2	36.9		-42.0	-13.0	-29.0	
14.65	-64.0	V	3.0	59.9	34.9		-39.1	-13.0	-26.1	
7.33	-58.1	H	3.0	52.8	36.6		-41.9	-13.0	-28.9	
10.99	-56.0	H	3.0	55.9	36.9		-37.0	-13.0	-24.0	
14.65	-63.5	H	3.0	60.2	34.9		-38.3	-13.0	-25.3	Noise floor
High Ch 3672.5MHz										
7.35	-57.1	V	3.0	51.8	36.6		-41.9	-13.0	-28.9	
11.01	-61.7	V	3.0	56.2	36.9		-42.4	-13.0	-29.4	
14.68	-62.8	V	3.0	59.9	34.9		-37.7	-13.0	-24.7	
7.35	-63.4	H	3.0	52.8	36.6		-47.1	-13.0	-34.1	
11.02	-57.8	H	3.0	55.9	36.9		-38.8	-13.0	-25.8	
14.69	-64.0	H	3.0	60.2	34.9		-38.7	-13.0	-25.7	Noise floor
Rev. 03.03.09										

3.8.3. TRANSMITTER RADIATED EMISSIONS BELOW 1 GHZ SPURIOUS AND DIGITAL SECTION EMISSIONS

64 QAM5 MHz Channels (Worst case emissions)

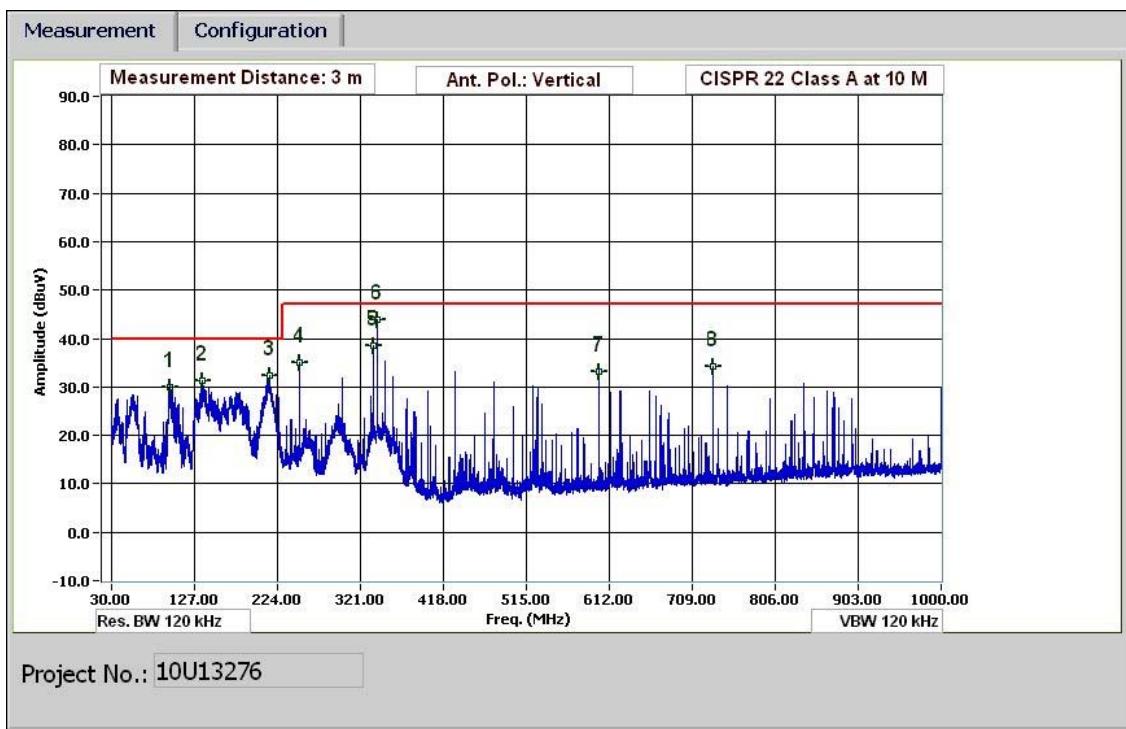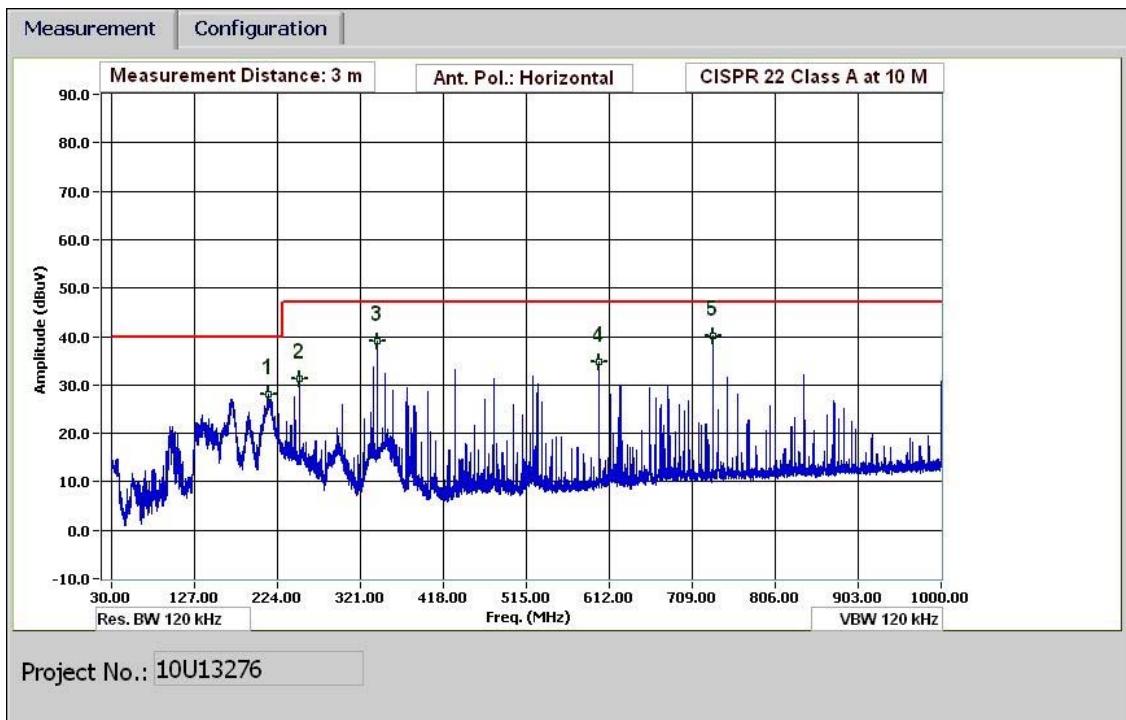

30-1000MHz Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber

Test Engr: **Thanh Nguyen**
 Date: **06/22/10**
 Project #: **10U13276**
 Company: **PureWave Networks Inc.**
 EUT Description: **6X6 3.65GHz WIMAX Base Station**
 EUT M/N: **Quantum 6600**
 Test Target: **EN55022 Class A**
 Mode Oper: **Tx 64QAM 5MHz BW, Low Ch 3652.5MHz**

	f	Measurement Frequency	Amp	Preamp Gain		Margin	Margin vs. Limit
	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters			
	Read	Analyzer Reading	Filter	Filter Insert Loss			
	AF	Antenna Factor	Corr.	Calculated Field Strength			
	CL	Cable Loss	Limit	Field Strength Limit			


f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	
98.163	3.0	58.3	9.5	0.9	28.3	-10.5	0.0	29.9	40.0	-10.1	V	P	
136.684	3.0	55.5	13.3	1.1	28.3	-10.5	0.0	31.2	40.0	-8.8	V	P	
215.528	3.0	57.8	11.9	1.3	28.2	-10.5	0.0	32.4	40.0	-7.6	V	P	
249.969	3.0	60.5	11.8	1.4	28.2	-10.5	0.0	35.0	47.0	-12.0	V	P	
336.013	3.0	61.5	14.0	1.6	28.1	-10.5	0.0	38.6	47.0	-8.4	V	P	
340.933	3.0	66.8	14.0	1.6	28.1	-10.5	0.0	43.9	47.0	-3.1	V	P	
599.904	3.0	50.5	18.4	2.2	27.5	-10.5	0.0	33.1	47.0	-13.9	V	P	
733.349	3.0	49.4	20.0	2.5	27.3	-10.5	0.0	34.3	47.0	-12.7	V	P	
212.768	3.0	53.4	11.9	1.3	28.2	-10.5	0.0	28.0	40.0	-12.0	H	P	
250.089	3.0	56.7	11.8	1.4	28.2	-10.5	0.0	31.2	47.0	-15.8	H	P	
340.933	3.0	61.9	14.0	1.6	28.1	-10.5	0.0	39.0	47.0	-8.0	H	P	
600.024	3.0	52.0	18.4	2.2	27.5	-10.5	0.0	34.7	47.0	-12.3	H	P	
733.349	3.0	55.4	20.0	2.5	27.3	-10.5	0.0	40.2	47.0	-6.8	H	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

5. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

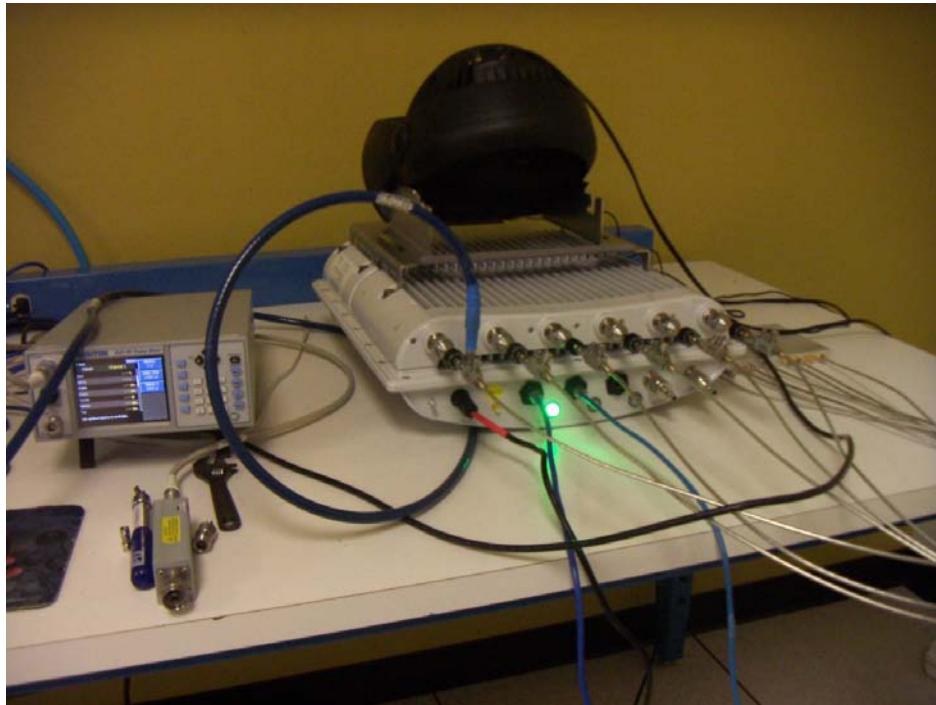

END OF REPORT