



User Manual

Guide System **GS-15**



JUNSUNG TECH CO., LTD.

Guide System **GS-15**

1. Guide system can be freely used as a microphone or headphones in the transceiver set menu.




2. Products set as microphone are used by connecting an earset microphone or boom microphone.



3. A product set as a headset is used by connecting earphones.



4. It is possible to use 15 groups separately without interfering with each other.

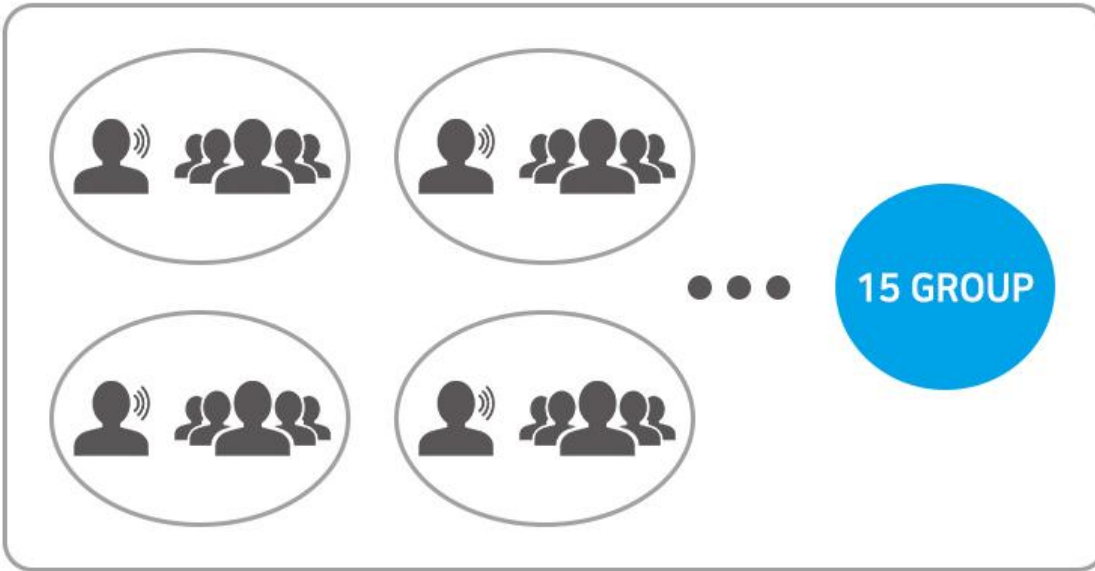

5. To set the menu, press No.4, select No.2~3, and press No.1 to complete.



Package Includes

Product Components



Main body



USB charger



Necklace strap

Product Configuration



- | | |
|-----------------------|--------------------------------------|
| ① Power/Select button | ⑥ Charge port |
| ② Up button | ⑦ Microphone or Headphone input port |
| ③ Down button | ⑧ LCD display |
| ④ Menu button | ⑨ Antenna strength display |
| ⑤ Mute button | ⑩ Battery level display |

Specifications

The battery used in this product is less than 400Wh/L.

	Item	Specification
송·수신기	Using Frequency	2.4GHz
	Modulation	FSK
	Transmit Power	TX Power 3dBm
	Operating Temperature	-10°C ~ 50°C
	Power Source	Li-polymer 3.7V
	Size	38 X 65 X 18 ±2mm (W.H.D)
	Weight	33 ±2gram
Adaptor	Output Volatage	DC 5V 1A / AC100-240V

Product Usage

• Power ON/OFF

- 1 Press and hold the power button for about 3 seconds to turn ON/OFF the power.



• How to set menu

- 1 4 press the button to display the menu screen.
- 2 To move to the menu, press the No.2 and No.3 button.
- 3 Press No.1 button to select.



1. How to setup Microphone/Headphone

- 1 4 press the button to display the menu screen.
- 2 Press No.1 button for selection. 1.Headphone 2. Microphone is displayed.
- 3 To move, press No.2(Up), No.3(Down) buttons, and to select, press No.1 button.



Changes cannot be made while the microphone and headphone are connected to each other.

2. How to setup a group

- ① Press No.4 button to display the menu screen.
- ② Press No.2(up), No.3(down) button to set the desired group number.
- ③ Groups can range from 1 to 15. Press No.1 button to finish.



3. How to set unique number

- ① Press No.4 button to display the menu screen.
- ② Press No.2(up), No.3(down) button to set the desired ID number.
- ③ ID can range from 1 to 15. Press No.1 button to finish.



The transmitter/receiver must have the same group and ID number for connection.

ex) Receiver group 01 / ID 01 - - Transmitter group 01 / ID 01

Receiver group 15 / ID 15 - - Transmitter group 15 / ID 15

If the receiver group number and ID number match the transmitter group number and ID number, connection is established.

4. Initialization method

- It is used to set the set group and ID value to the initial state.
Initial group, ID value is 01 and volume level is 01.
- In the initial state, everything is set to headphones.
The main body to be used as a microphone must be set as a microphone in the setup mode.

- ① **4** press button, to display the menu screen.
- ② **2** UP, **3** Down press button, 1.Yes or 2. No select.
- ③ **1** press button for finish. If you select Yes. the initialization screen is displayed and the power turns off after a while.



How to set the volume

After turning on the power, you can adjust the volume only with the headphones while the microphone and headphone are connected to each other.

- ② UP, ③ press button, set the desired volume level.
The volume level can be set from 1~5 step.



How to set the Mute function

- ⑤ press button, it becomes the mute function, and the headphone and microphone are muted.



Battery level display and charging

- ① If there is one remaining battery level on the LCD, charge the battery.
- ② You can charge it using a USB cable.
When charging, the LCD shows charging and when charging is complete, the charging indicator is displayed.

※



FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CAUTION: Any changes or modifications in construction of this device which are not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment complies its antenna must not be co-located or operation in conjunction with any other antenna or transmitter.

This equipment complies with FCC RF exposure requirements set forth in an uncontrolled environment and can be used without any restriction.

Manufacturer: JUNSUNGTECH Co., Ltd.

Address: 448-2, Shinwol-dong, Yangchun-gu, Seoul, Republic of Korea

Tel: +82-2-2697-2094

E-Mail: ivanchung1@naver.com