

FCC Measurement/Technical Report on SARA-R422M10S

FCC ID: XPYUBX20VA01
IC: 8595A-UBX20VA01

Test Report Reference: MDE_UBLOX_2401_FCC_01

Test Laboratory:

7layers GmbH
Borsigstrasse 11
40880 Ratingen
Germany



Deutsche
Akkreditierungsstelle
D-PL-12140-01-01
D-PL-12140-01-02
D-PL-12140-01-03

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7layers GmbH
Borsigstraße 11
40880 Ratingen, Germany
T +49 (0) 2102 749 0
F +49 (0) 2102 749 350

Geschäftsführer/
Managing Directors:
Sebastian Doose
Bernhard Retka

Registergericht/registered:
Düsseldorf HRB 75554
USt-Id.-Nr./VAT-No. DE203159652
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas
Group Company*

www.7layers.com

Table of Contents

1	Applied Standards and Test Summary	4
1.1	Applied Standards	4
1.2	FCC-IC Correlation Table	6
1.3	Measurement Summary	10
2	Revision History / Signatures	31
3	Administrative Data	32
3.1	Testing Laboratory	32
3.2	Project Data	32
3.3	Applicant Data	32
3.4	Manufacturer Data	32
4	Test object Data	33
4.1	General EUT Description	33
4.2	EUT Main components	33
4.3	Ancillary Equipment	33
4.4	Auxiliary Equipment	34
4.5	EUT Setups	34
4.6	Operating Modes / Test Channels	35
4.7	Product labelling	37
5	Test Results	38
5.1	RF Output Power	38
5.2	RF Output Power	41
5.3	RF Output Power	47
5.4	Emission and occupied bandwidth	50
5.5	Emission and occupied bandwidth	53
5.6	Emission and occupied bandwidth	56
5.7	RF Output Power	59
5.8	RF Output Power	62
5.9	RF Output Power	66
5.10	Emission and occupied bandwidth	69
5.11	Emission and occupied bandwidth	73
5.12	Emission and occupied bandwidth	77
5.13	RF Output Power	80
5.14	RF Output Power	91
5.15	Emission and occupied bandwidth	98
5.16	Emission and occupied bandwidth	103
5.17	RF Output Power	109
5.18	RF Output Power	112
5.19	EMISSION AND OCCUPIED BANDWIDTH	115
5.20	EMISSION AND OCCUPIED BANDWIDTH	118
5.21	RF Output Power	121
5.22	Emission and occupied bandwidth	124

6	Test Equipment	127
6.1	Test Equipment Hardware	127
6.2	Test Equipment Software	128
7	Antenna Factors, Cable Loss and Sample Calculations	129
7.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	129
7.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	130
7.3	Antenna R&S HL562 (30 MHz – 1 GHz)	131
7.4	Antenna R&S HF907 (1 GHz – 18 GHz)	132
7.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	133
7.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	134
8	Measurement Uncertainties	135
9	Photo Report	137

1 APPLIED STANDARDS AND TEST SUMMARY

1.1 APPLIED STANDARDS

Type of Authorization

Certification for a cellular mobile device.

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 90, (10-1-23 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 22, Subpart H – Cellular Radiotelephone Service

- § 22.905 – Channels for cellular service
- § 22.913 – Effective radiated power limits
- § 22.917 – Emission limitations for cellular equipment

Part 24, Subpart E – Broadband PCS

- § 24.232 – Power and antenna height limits
- § 24.235 – Frequency stability
- § 24.238 – Emission limitations for Broadband PCS equipment

Part 27; Miscellaneous Wireless Communications Services
Subpart C – Technical standards

- § 27.50 – Power and duty cycle limits
- § 27.53 – Emission limits
- § 27.54 – Frequency stability

Subpart P – Regulations Governing Licensing and Use of 900 MHz7 Broadband Service in the 897.5 – 900.5 MHz and 936.5 – 939.5 MHz Bands

- § 27.1506 – Frequencies
- § 27.1507 – Effective radiated power limits for 900 MHz broadband systems
- § 27.1508 – Field strength limit
- § 27.1509 – Emission limits

Part 90; Private Land Mobile Radio Services

Subpart S—REGULATIONS GOVERNING LICENSING AND USE OF FREQUENCIES IN THE 806-824, 851-869, 896-901, AND 935-940 MHZ BANDS

Subpart R—REGULATIONS GOVERNING THE LICENSING AND USE OF FREQUENCIES IN THE 763-775 AND 793-805 MHZ BANDS

§ 90.635 – Limitations on power and antenna height

§ 90.543 – Emission limitations

§ 90.539 – Frequency stability

The tests were selected and performed with reference to:

- ANSI C63.26: 2015
- FCC KDB 971168 applying "Measurement guidance for certification of licensed digital transmitters" 971168 D01 v03r01, 2018-04-09

In general tests are performed according to the ANSI standard. If the KDB is used for testing in addition to the ANSI, the result of the affected test is marked with ^{KDB}).

1.2 FCC-IC CORRELATION TABLE

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 90.635	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.12 RSS-140 Issue 1, 4.3
Peak to Average-Ratio	§ 90.635	RSS-140 Issue 1, 4.3
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 90.543	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-140 Issue 1, 4.4
Band Edge Compliance	§ 2.1051 § 90.543	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-140 Issue 1, 4.4
Frequency stability	§ 2.1055 § 90.539	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.11 RSS-140 Issue 1, 4.2
Field strength of spurious radiation	§ 2.1053 § 90.543	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-140 Issue 1, 4.4

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 22.913	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.12 RSS-132 Issue 4, 5.4
Peak-Average-Ratio	-	RSS 132 Issue 4: 5.4
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 22.917	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-132 Issue 4, 5.5
Band Edge Compliance	§ 2.1051 § 22.917	RSS-GEN Issue 4, 6.13 RSS-132 Issue 4, 5.5
Frequency stability	§ 2.1055 § 22.355	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.11 RSS-132 Issue 4: 5.3
Field strength of spurious radiation	§ 2.1053 § 22.917	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-132 Issue 4: 5.5

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 24.232	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.12 RSS-133 Issue 6 & AMD 1, 6.4
Peak-Average-Ratio	§ 24.232	RSS 133 Issue 6 & AMD 1: 6.4
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 24.238	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-133 Issue 6 & AMD 1, 6.5
Band Edge Compliance	§ 2.1051 § 24.238	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-133 Issue 6 & AMD 1, 6.5
Frequency stability	§ 2.1055 § 24.235	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.11 RSS-133 Issue 6 & AMD 1: 6.3
Field strength of spurious radiation	§ 2.1053 § 24.236	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-133 Issue 6 & AMD 1: 6.5

Correlation of measurement requirements for Cellular Mobile Devices from FCC and ISED Canada

Measurement	FCC reference	ISED reference
RF Output Power	§ 2.1046 § 27.50	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.12 RSS-130 Issue 2, 4.6.2/4.6.3 RSS-139 Issue 4, 5.5 RSS-199 Issue 4, 5.5
Peak to Average-Ratio	§ 27.50	RSS-130 Issue 2: 4.6.1 RSS 139 Issue 4: 5.5 RSS-199 Issue 4, 5.5
Emission and Occupied bandwidth	§ 2.1049	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.7
Spurious Emission at Antenna Terminals	§ 2.1051 § 27.53	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4, 5.6 RSS-199 Issue 4, 5.6
Band Edge Compliance	§ 2.1051 § 27.53	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4, 5.6 RSS-199 Issue 4, 5.6
Frequency stability	§ 2.1055 § 27.54	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.11 RSS-130 Issue 2: 4.5 RSS-139 Issue 4: 5.4 RSS-199 Issue 4, 5.4
Field strength of spurious radiation	§ 2.1053 § 27.53	RSS-GEN Issue 5 & AMD 1 & AMD 2, 6.13 RSS-130 Issue 2: 4.7.1/4.7.2 RSS-139 Issue 4: 5.6 RSS-199 Issue 4, 5.6

1.3 MEASUREMENT SUMMARY

47 CFR CHAPTER I FCC PART 22 Subpart H § 2.1046 § 22.913

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1

Narrowband Signal: 5.2.4.3.3

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Measurement method	Setup	Date	FCC	IC
GSM, GSM 850 EDGE, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 EDGE, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 EDGE, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H § 2.1046 § 22.913

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,

Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H
§ 2.1046 § 22.913
RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 26 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H

§ 2.1046 § 22.913

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 5 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H
§ 2.1046 § 22.913

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 5 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 5 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H
§ 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Measurement method	Setup	Date	FCC	IC
GSM, GSM 850 EDGE, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 EDGE, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 EDGE, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 850 GPRS, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H
§ 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 5 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])

Final Result

5.4.4 (Power bandwidth (99%))

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 5 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 5 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 5 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 5 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 5 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed

47 CFR CHAPTER I FCC PART 22 Subpart H § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])

Final Result

5.4.4 (Power bandwidth (99%))

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 5 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 5 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 5 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 5 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 5 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 5 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1
Narrowband Signal: 5.2.4.3.3

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Measurement method	Setup	Date	FCC	IC
GSM, GSM 1900 EDGE, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 EDGE, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 EDGE, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 2 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 2 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232
RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-22	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-24	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-24	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 2 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 2 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1046 § 24.232

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
NB-IoT, eFDD 2 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Measurement method				
GSM, GSM 1900 EDGE, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 EDGE, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 EDGE, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, high channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, low channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed
GSM, GSM 1900 GPRS, mid channel, 0.2 MHz, conducted	S01_BC08	2024-06-18	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3 (relative
meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power
bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 2 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 2 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 2 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 2 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 2 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 2 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 25 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 25 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 25 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 25 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 25 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 25 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
NB-IoT, eFDD 2 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 24 Subpart E § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])

Final Result

5.4.4 (Power bandwidth (99%))

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 2 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 2 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 2 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 2 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 2 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 12 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 12 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 13 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 13 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 4 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 10 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 10 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 10 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 10 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50
RF Output Power

 The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 66 QPSK, high channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 10 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 10 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-27	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50
RF Output Power

 The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 12 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-11	Passed	Passed
NB-IoT, eFDD 12 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50
RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
NB-IoT, eFDD 12 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 12 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 13 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 4 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 4 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	Passed
NB-IoT, eFDD 66 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1046 § 27.50
RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 66 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 66 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 85 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 85 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-06-20	Passed	Passed
NB-IoT, eFDD 85 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 85 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 85 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-29	Passed	Passed
NB-IoT, eFDD 85 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-29	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1049
Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 12 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 12 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 12 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 12 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 12 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 12 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 4 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	Passed
CAT-M1, eFDD 66 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 66 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 66 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 66 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 66 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed
CAT-M1, eFDD 66 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart C § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 12 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 12 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 12 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 12 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 12 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 12 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 13 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 4 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 66 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed
NB-IoT, eFDD 85 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	Passed

47 CFR CHAPTER I FCC PART 27 Subpart P § 2.1046 § 27.1507

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
CAT-M1, eFDD 8 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 16QAM, mid channel, 3 MHz, 5, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 3 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 3 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 3 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A

47 CFR CHAPTER I FCC PART 27 Subpart P § 2.1046 § 27.1507

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method	Setup	Date	FCC	IC
NB-IoT, eFDD 8 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, high channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, high channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, low channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, low channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, mid channel, 0.2 MHz, 3, conducted	S01_BC08	2024-05-28	Passed	N/A
NB-IoT, eFDD 8 QPSK, mid channel, 0.2 MHz, 6, conducted	S01_BC08	2024-05-28	Passed	N/A

47 CFR CHAPTER I FCC PART 27 Subpart P § 2.1049 § 27.1506

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 8 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	N/A
CAT-M1, eFDD 8 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	N/A
CAT-M1, eFDD 8 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-14	Passed	N/A
CAT-M1, eFDD 8 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	N/A
CAT-M1, eFDD 8 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	N/A
CAT-M1, eFDD 8 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-14	Passed	N/A

47 CFR CHAPTER I FCC PART 27 Subpart P § 2.1049 § 27.1506

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
(relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
NB-IoT, eFDD 8 BPSK, high channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	N/A
NB-IoT, eFDD 8 BPSK, low channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	N/A
NB-IoT, eFDD 8 BPSK, mid channel, 0.2 MHz, 1, conducted	S01_BC08	2024-06-17	Passed	N/A
NB-IoT, eFDD 8 QPSK, high channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	N/A
NB-IoT, eFDD 8 QPSK, low channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	N/A
NB-IoT, eFDD 8 QPSK, mid channel, 0.2 MHz, 12, conducted	S01_BC08	2024-06-17	Passed	N/A

47 CFR CHAPTER I FCC PART 90 Subpart S § 2.1046 § 90.635

RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, high channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, high channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, low channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, low channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 10 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 5 MHz, 5, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A

47 CFR CHAPTER I FCC PART 90 Subpart S § 2.1046 § 90.635
RF Output Power

The measurement was performed according to ANSI C63.26: 2015; 5.2.4.1,
Wideband Signal: 5.2.4.4

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 5 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-20	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 5 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 10 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 1, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 3, conducted	S01_BC08	2024-06-13	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 5 MHz, 6, conducted	S01_BC08	2024-06-13	Passed	N/A

47 CFR CHAPTER I FCC PART 90 Subpart S § 2.1049

Emission and occupied bandwidth

The measurement was performed according to ANSI C63.26: 2015; 5.4.3
 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA])
 5.4.4 (Power bandwidth (99%))

Final Result

OP-Mode	Setup	Date	FCC	IC
Technology, Radio Technology, Operating Frequency, ChBW, Ressource Blocks, Measurement method				
CAT-M1, eFDD 26 16QAM, high channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	N/A
CAT-M1, eFDD 26 16QAM, low channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	N/A
CAT-M1, eFDD 26 16QAM, mid channel, 1.4 MHz, 5, conducted	S01_BC08	2024-06-17	Passed	N/A
CAT-M1, eFDD 26 QPSK, high channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	N/A
CAT-M1, eFDD 26 QPSK, low channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	N/A
CAT-M1, eFDD 26 QPSK, mid channel, 1.4 MHz, 6, conducted	S01_BC08	2024-06-17	Passed	N/A

N/A: Not applicable

N/P: Not performed

2 REVISION HISTORY / SIGNATURES

Report version control			
Version	Release date	Change Description	Version validity
initial	2024-08-01	--	valid
--	--	--	--

COMMENT: Test plan is based on class 2 permissive change. Therefore not all tests were performed. Initial test report covering all tests: MDE_UBLOX_2005_FCC_01_REV04 dated 2021-03-15.



(responsible for accreditation scope)
Dipl.-Ing. Daniel Gall



(responsible for testing and report)
B.Sc. Mohamed Fraitat



7 layers GmbH, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

3 ADMINISTRATIVE DATA

3.1 TESTING LABORATORY

Company Name: 7layers GmbH
Address: Borsigstr. 11
40880 Ratingen
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkkS D-PL-12140-00
FCC Designation Number: DE0015
FCC Test Firm Registration: 929146
ISED CAB Identifier: DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Daniel Gall
Report Template Version: 2023-09-29

3.2 PROJECT DATA

Responsible for testing and report: B.Sc. Mohamed Fraitat
Employees who performed the tests: documented internally at 7Layers
Date of Report: 2024-08-01
Testing Period: 2024-05-22 to 2024-06-20

3.3 APPLICANT DATA

Company Name: u-blox AG
Address: Zürcherstrasse 68, 8800 Thalwil
Switzerland
Contact Person: Giulio Comar

3.4 MANUFACTURER DATA

Company Name: please see Applicant Data
Address:
Contact Person:

4 TEST OBJECT DATA

4.1 GENERAL EUT DESCRIPTION

Kind of Device product description	LTE CAT M1/ NB-IoT/ EGPRS Module
Product name	SARA-R422M10S
Type	SARA-R422M10S
Declared EUT data by the supplier	
General product description	The EUT is a LTE CAT-M1 / NB-IoT EGPRS module. It supports the following relevant bands for FCC/ISED approval: GSM/EDGE: 850 / 1900 CAT-M1: eFDD2 / eFDD4 / eFDD5 / eFDD8 / eFDD12 / eFDD13 / eFDD25 / eFDD26 / eFDD66 NB-IoT: eFDD2 / eFDD4 / eFDD5 / eFDD8 / eFDD12 / eFDD13 / eFDD66 / eFDD85
Voltage Level	3.8 V
Voltage Type	DC

4.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
bc08	DE1015154bc08	RF Sample
Sample Parameter	Value	
Serial No.	351166706376443	
HW Version	UBX-3602A2	
SW Version	01.24,A01.20	
Comment	-	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, HW, SW, S/N)	Description
AUX1	UNIFIVE, UUX324-1215, -, -, F04-0269354	AC/DC Adapter
AUX2	Ublox, EVB-WL3, -, -, -	Evaluation Board

4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

Setup	Combination of EUTs	Description and Rationale
S01_BC08	bc08, AUX1, AUX2	RF conducted setup

4.6 OPERATING MODES / TEST CHANNELS

This chapter describes the operating modes of the EUTs used for testing.

GSM / EDGE 850		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	128	190	251
	f [MHz]	824.2	836.6	848.8

GSM / EDGE 1900		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	512	661	810
	f [MHz]	1850.2	1880.0	1909.8

CAT-M1 eFDD 2		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	18607	18900	19193	18615	18900	19185	18625	18900	19175
	f [MHz]	1850.7	1880.0	1909.3	1851.5	1880.0	1908.5	1852.5	1880.0	1907.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	18650	18900	19150	-	-	-	-	-	-
	f [MHz]	1855.0	1880.0	1905.0	-	-	-	-	-	-

CAT-M1 eFDD 4		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	19957	20175	20393	19965	20175	20385	19975	20175	20375
	f [MHz]	1710.7	1732.5	1754.3	1711.5	1732.5	1753.5	1712.5	1732.5	1752.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	20000	20175	20350	-	-	-	-	-	-
	f [MHz]	1715.0	1732.5	1750.0	-	-	-	-	-	-

CAT-M1 eFDD 5		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	20407	20525	20643	20415	20525	20635	20425	20525	20625
	f [MHz]	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	20450	20525	20600	-	-	-	-	-	-
	f [MHz]	829.0	836.5	844.0	-	-	-	-	-	-

CAT-M1 eFDD 8		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	-	3	-	-	-	-
	CH no.	21632	21640	21648	-	20525	-	-	-	-
	f [MHz]	898.2	899.0	899.8	-	899.0	-	-	-	-
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	-	-	-	-	-	-	-	-	-
	CH no.	-	-	-	-	-	-	-	-	-
	f [MHz]	-	-	-	-	-	-	-	-	-

CAT-M1 eFDD 12		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	23017	23095	23173	23025	23095	23165	23035	23095	23155
	f [MHz]	699.7	707.5	715.3	700.5	707.5	714.5	701.5	707.5	713.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	23060	23095	23130	-	-	-	-	-	-
	f [MHz]	704.0	707.5	711.0	-	-	-	-	-	-

CAT-M1 eFDD 13		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	5	5	5	10	10	10	-	-	-
	CH no.	23205	23230	23255	-	23230	-	-	-	-
	f [MHz]	779.5	782.0	784.5	-	782.0	-	-	-	-
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	-	-	-	-	-	-	-	-	-
	CH no.	-	-	-	-	-	-	-	-	-
	f [MHz]	-	-	-	-	-	-	-	-	-

CAT-M1 eFDD 25		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	26047	26365	26683	26055	26365	26675	26065	26365	26665
	f [MHz]	1850.7	1882.5	1914.3	1851.5	1882.5	1913.5	1852.5	1882.5	1912.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	26090	26365	26640	-	-	-	-	-	-
	f [MHz]	1855.0	1882.5	1910.0	-	-	-	-	-	-

CAT-M1 eFDD 26 (Part 22)		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	26797	26915	27033	26805	26915	27025	26815	26915	27015
	f [MHz]	824.7	836.5	848.3	825.5	836.5	847.5	826.5	836.5	846.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	26840	26915	26990	-	-	-	-	-	-
	f [MHz]	829.0	836.5	844.0	-	-	-	-	-	-

CAT-M1 eFDD 26 (Part 90)		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	26697	26740	26783	26705	26740	26776	26715	26740	26766
	f [MHz]	814.7	819.0	823.3	815.5	819.0	822.5	816.5	819.0	821.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	-	10	-	-	-	-	-	-	-
	CH no.	-	26740	-	-	-	-	-	-	-
	f [MHz]	-	819.0	-	-	-	-	-	-	-

CAT-M1 eFDD 66		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	1.4	1.4	1.4	3	3	3	5	5	5
	CH no.	131979	132322	132665	131987	132322	132657	131997	132322	132647
	f [MHz]	1710.7	1745.0	1779.3	1711.5	1745.0	1778.5	1712.5	1745.0	1777.5
		LOW	MID	HIGH	LOW	MID	HIGH	LOW	MID	HIGH
	Cell BW [MHz]	10	10	10	-	-	-	-	-	-
	CH no.	132022	132322	132622	-	-	-	-	-	-
	f [MHz]	1715.0	1745.0	1775.0	-	-	-	-	-	-

NB-IoT eFDD 2		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	18601	18900	19199
	f [MHz]	1850.1	1880.0	1909.9

NB-IoT eFDD 4		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	19951	20175	20399
	f [MHz]	1710.1	1745.5	1754.9

NB-IoT eFDD 5		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	20401	20525	20649
	f [MHz]	824.1	836.5	848.9

NB-IoT eFDD 8		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	21626	21640	21654
	f [MHz]	897.6	899.0	900.4

NB-IoT eFDD 12		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	23011	23095	23178
	f [MHz]	699.1	707.5	715.8

NB-IoT eFDD 13		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	23181	23230	23279
	f [MHz]	777.1	782.0	786.9

NB-IoT eFDD 66		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	131973	132322	132671
	f [MHz]	1710.1	1745.0	1779.9

NB-IoT eFDD 85		LOW	MID	HIGH
	Cell BW [MHz]	0.2	0.2	0.2
	CH no.	134004	134092	134180
	f [MHz]	698.2	707.0	715.8

4.7 PRODUCT LABELLING

4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

5 TEST RESULTS

5.1 RF OUTPUT POWER

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.2.4.1 Narrowband Signal: 5.2.4.3.3

5.1.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

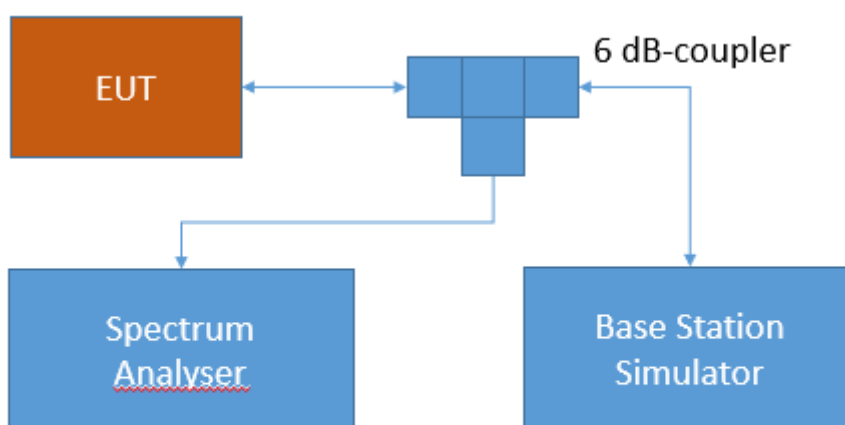

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 22, § 22.913

(a) *Maximum ERP*. The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.

5.1.3 TEST PROTOCOL

Ambient temperature: 20 - 28 °C
 Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Band-width [MHz]	Peak Cond. Power [dBm]	Average Cond. Power [dBm]	RMS Cond. Power [dBm]	FCC ERP Limit [W]	IC ERP Limit [W]	Max. Antenna Gain FCC [dBd]	Max. Antenna Gain IC [dBd]
GSM	GSM 850 GPRS	low	-	0.2	32.00	30.53	30.93	7	7	7.52	7.52
GSM	GSM 850 GPRS	mid	-	0.2	32.11	30.64	30.99	7	7	7.46	7.46
GSM	GSM 850 GPRS	high	-	0.2	32.13	30.65	31.07	7	7	7.45	7.45
GSM	GSM 850 EDGE	low	-	0.2	29.57	26.38	27.07	7	7	11.38	11.38
GSM	GSM 850 EDGE	mid	-	0.2	29.56	26.63	27.05	7	7	11.40	11.40
GSM	GSM 850 EDGE	high	-	0.2	29.56	26.65	27.02	7	7	11.43	11.43


Remarks:

Please see next sub-clause for the measurement plot.

The max. antenna gain is regarding the output power not SAR / MPE.


5.1.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = GPRS, Radio Technology = GPRS 850, Operating Frequency = high channel (S01_BC08)

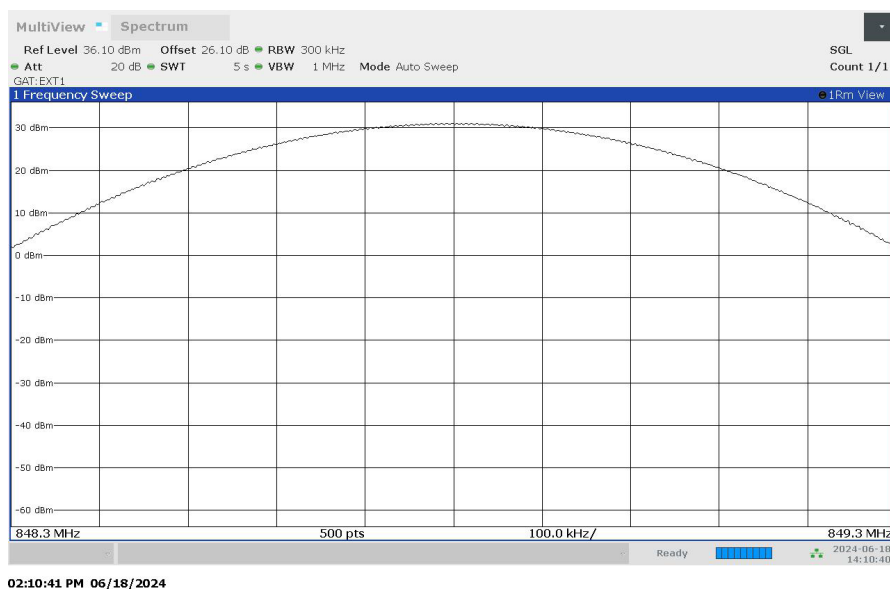

maximum value 31.07dBm measured at 848.8MHz

Technology = EDGE, Radio Technology = EDGE 850, Operating Frequency = low channel (S01_BC08)

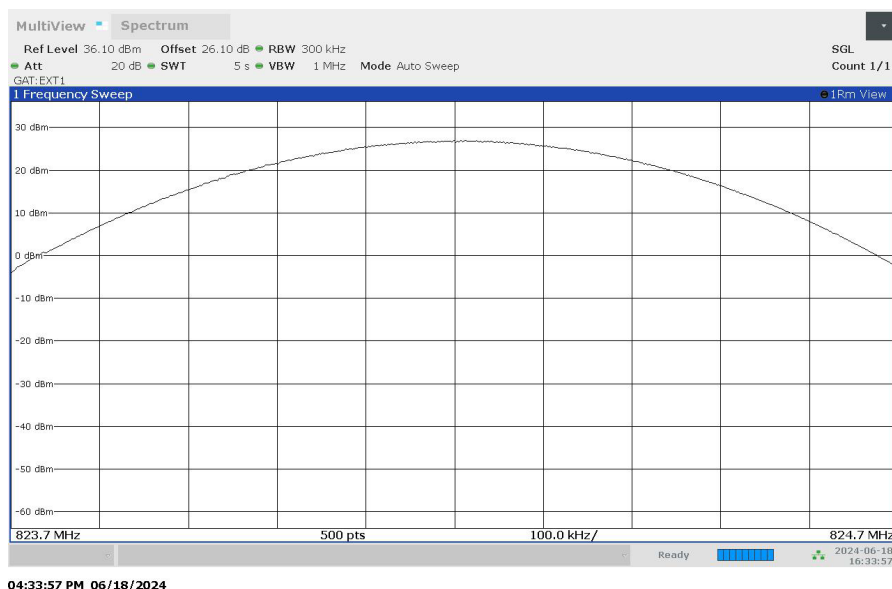

maximum value 27.07dBm measured at 824.2MHz

5.1.5 TEST EQUIPMENT USED

- Radio Lab

5.2 RF OUTPUT POWER

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.2.4.1, Wideband Signal: 5.2.4.4

5.2.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

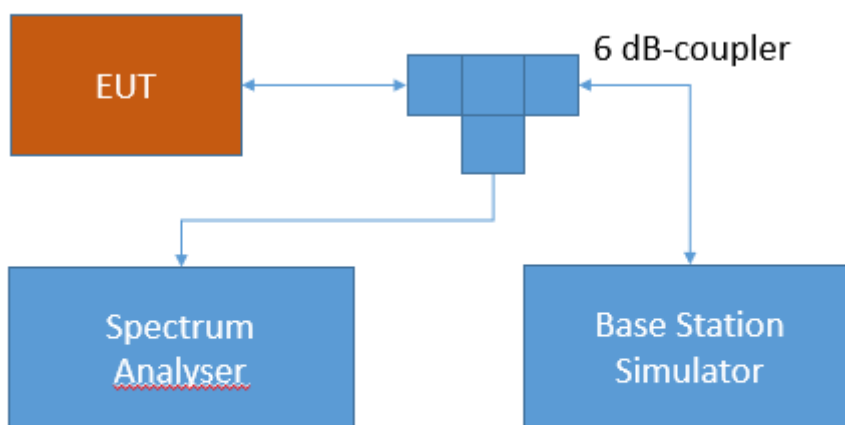

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 22, § 22.913

(a) *Maximum ERP*. The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.

5.2.3 TEST PROTOCOL

Ambient temperature: 20 - 28 °C
 Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Band-width [MHz]	Peak Cond. Power [dBm]	Average Cond. Power [dBm]	RMS Cond. Power [dBm]	FCC ERP Limit [W]	IC ERP Limit [W]	Max. Antenna Gain FCC [dBd]	Max. Antenna Gain IC [dBd]
CAT-M1	eFDD 5 QPSK	low	1	1.4	-	-	22.38	7	7	16.07	16.07
CAT-M1	eFDD 5 QPSK	low	3	1.4	-	-	21.55	7	7	16.90	16.90
CAT-M1	eFDD 5 QPSK	low	6	1.4	-	-	20.56	7	7	17.89	17.89
CAT-M1	eFDD 5 QPSK	mid	1	1.4	-	-	22.46	7	7	15.99	15.99
CAT-M1	eFDD 5 QPSK	mid	3	1.4	-	-	21.43	7	7	17.02	17.02
CAT-M1	eFDD 5 QPSK	mid	6	1.4	-	-	20.62	7	7	17.83	17.83
CAT-M1	eFDD 5 QPSK	high	1	1.4	-	-	22.40	7	7	16.05	16.05
CAT-M1	eFDD 5 QPSK	high	3	1.4	-	-	21.54	7	7	16.91	16.91
CAT-M1	eFDD 5 QPSK	high	6	1.4	-	-	20.53	7	7	17.92	17.92
CAT-M1	eFDD 5 16QAM	low	1	1.4	-	-	21.34	7	7	17.11	17.11
CAT-M1	eFDD 5 16QAM	low	5	1.4	-	-	20.64	7	7	17.81	17.81
CAT-M1	eFDD 5 16QAM	mid	1	1.4	-	-	21.38	7	7	17.07	17.07
CAT-M1	eFDD 5 16QAM	mid	5	1.4	-	-	20.69	7	7	17.76	17.76
CAT-M1	eFDD 5 16QAM	high	1	1.4	-	-	21.52	7	7	16.93	16.93
CAT-M1	eFDD 5 16QAM	high	5	1.4	-	-	20.70	7	7	17.75	17.75
CAT-M1	eFDD 5 QPSK	low	1	3	-	-	22.60	7	7	15.85	15.85
CAT-M1	eFDD 5 QPSK	low	3	3	-	-	21.53	7	7	16.92	16.92
CAT-M1	eFDD 5 QPSK	low	6	3	-	-	20.59	7	7	17.86	17.86
CAT-M1	eFDD 5 QPSK	mid	1	3	-	-	22.54	7	7	15.91	15.91
CAT-M1	eFDD 5 QPSK	mid	3	3	-	-	21.56	7	7	16.89	16.89
CAT-M1	eFDD 5 QPSK	mid	6	3	-	-	20.57	7	7	17.88	17.88
CAT-M1	eFDD 5 QPSK	high	1	3	-	-	22.52	7	7	15.93	15.93
CAT-M1	eFDD 5 QPSK	high	3	3	-	-	21.55	7	7	16.90	16.90
CAT-M1	eFDD 5 QPSK	high	6	3	-	-	20.51	7	7	17.94	17.94
CAT-M1	eFDD 5 16QAM	low	1	3	-	-	21.58	7	7	16.87	16.87
CAT-M1	eFDD 5 16QAM	low	5	3	-	-	20.56	7	7	17.89	17.89
CAT-M1	eFDD 5 16QAM	mid	1	3	-	-	21.52	7	7	16.93	16.93
CAT-M1	eFDD 5 16QAM	mid	5	3	-	-	20.54	7	7	17.91	17.91
CAT-M1	eFDD 5 16QAM	high	1	3	-	-	21.65	7	7	16.80	16.80

CAT-M1	eFDD 5 16QAM	high	5	3	-	-	20.54	7	7	17.91	17.91
CAT-M1	eFDD 5 QPSK	low	1	5	-	-	22.62	7	7	15.83	15.83
CAT-M1	eFDD 5 QPSK	low	3	5	-	-	21.37	7	7	17.08	17.08
CAT-M1	eFDD 5 QPSK	low	6	5	-	-	21.52	7	7	16.93	16.93
CAT-M1	eFDD 5 QPSK	mid	1	5	-	-	22.57	7	7	15.88	15.88
CAT-M1	eFDD 5 QPSK	mid	3	5	-	-	21.44	7	7	17.01	17.01
CAT-M1	eFDD 5 QPSK	mid	6	5	-	-	21.54	7	7	16.91	16.91
CAT-M1	eFDD 5 QPSK	high	1	5	-	-	22.46	7	7	15.99	15.99
CAT-M1	eFDD 5 QPSK	high	3	5	-	-	21.54	7	7	16.91	16.91
CAT-M1	eFDD 5 QPSK	high	6	5	-	-	21.48	7	7	16.97	16.97
CAT-M1	eFDD 5 16QAM	low	1	5	-	-	22.43	7	7	16.02	16.02
CAT-M1	eFDD 5 16QAM	low	5	5	-	-	20.59	7	7	17.86	17.86
CAT-M1	eFDD 5 16QAM	mid	1	5	-	-	22.57	7	7	15.88	15.88
CAT-M1	eFDD 5 16QAM	mid	5	5	-	-	20.62	7	7	17.83	17.83
CAT-M1	eFDD 5 16QAM	high	1	5	-	-	22.38	7	7	16.07	16.07
CAT-M1	eFDD 5 16QAM	high	5	5	-	-	20.54	7	7	17.91	17.91
CAT-M1	eFDD 5 QPSK	low	1	10	-	-	22.77	7	7	15.68	15.68
CAT-M1	eFDD 5 QPSK	low	3	10	-	-	22.50	7	7	15.95	15.95
CAT-M1	eFDD 5 QPSK	low	6	10	-	-	21.57	7	7	16.88	16.88
CAT-M1	eFDD 5 QPSK	mid	1	10	-	-	22.72	7	7	15.73	15.73
CAT-M1	eFDD 5 QPSK	mid	3	10	-	-	22.58	7	7	15.87	15.87
CAT-M1	eFDD 5 QPSK	mid	6	10	-	-	21.55	7	7	16.90	16.90
CAT-M1	eFDD 5 QPSK	high	1	10	-	-	22.32	7	7	16.13	16.13
CAT-M1	eFDD 5 QPSK	high	3	10	-	-	22.62	7	7	15.83	15.83
CAT-M1	eFDD 5 QPSK	high	6	10	-	-	21.48	7	7	16.97	16.97
CAT-M1	eFDD 5 16QAM	low	1	10	-	-	22.59	7	7	15.86	15.86
CAT-M1	eFDD 5 16QAM	low	5	10	-	-	21.67	7	7	16.78	16.78
CAT-M1	eFDD 5 16QAM	mid	1	10	-	-	22.72	7	7	15.73	15.73
CAT-M1	eFDD 5 16QAM	mid	5	10	-	-	21.62	7	7	16.83	16.83
CAT-M1	eFDD 5 16QAM	high	1	10	-	-	22.17	7	7	16.28	16.28
CAT-M1	eFDD 5 16QAM	high	5	10	-	-	21.48	7	7	16.97	16.97
CAT-M1	eFDD 26 QPSK	low	1	1.4	-	-	24.48	7	7	13.97	13.97
CAT-M1	eFDD 26 QPSK	low	3	1.4	-	-	22.07	7	7	16.38	16.38
CAT-M1	eFDD 26 QPSK	low	6	1.4	-	-	20.90	7	7	17.55	17.55
CAT-M1	eFDD 26 QPSK	mid	1	1.4	-	-	22.90	7	7	15.55	15.55
CAT-M1	eFDD 26 QPSK	mid	3	1.4	-	-	22.02	7	7	16.43	16.43
CAT-M1	eFDD 26 QPSK	mid	6	1.4	-	-	20.95	7	7	17.50	17.50
CAT-M1	eFDD 26 QPSK	high	1	1.4	-	-	22.89	7	7	15.56	15.56
CAT-M1	eFDD 26 QPSK	high	3	1.4	-	-	22.03	7	7	16.42	16.42
CAT-M1	eFDD 26 QPSK	high	6	1.4	-	-	20.97	7	7	17.48	17.48
CAT-M1	eFDD 26 16QAM	low	1	1.4	-	-	22.02	7	7	16.43	16.43
CAT-M1	eFDD 26 16QAM	low	5	1.4	-	-	21.10	7	7	17.35	17.35
CAT-M1	eFDD 26 16QAM	mid	1	1.4	-	-	21.78	7	7	16.67	16.67
CAT-M1	eFDD 26 16QAM	mid	5	1.4	-	-	21.00	7	7	17.45	17.45

CAT-M1	eFDD 26 16QAM	high	1	1.4	-	-	22.07	7	7	16.38	16.38
CAT-M1	eFDD 26 16QAM	high	5	1.4	-	-	21.06	7	7	17.39	17.39
CAT-M1	eFDD 26 QPSK	low	1	3	-	-	22.90	7	7	15.55	15.55
CAT-M1	eFDD 26 QPSK	low	3	3	-	-	21.83	7	7	16.62	16.62
CAT-M1	eFDD 26 QPSK	low	6	3	-	-	20.98	7	7	17.47	17.47
CAT-M1	eFDD 26 QPSK	mid	1	3	-	-	22.83	7	7	15.62	15.62
CAT-M1	eFDD 26 QPSK	mid	3	3	-	-	21.97	7	7	16.48	16.48
CAT-M1	eFDD 26 QPSK	mid	6	3	-	-	20.91	7	7	17.54	17.54
CAT-M1	eFDD 26 QPSK	high	1	3	-	-	22.86	7	7	15.59	15.59
CAT-M1	eFDD 26 QPSK	high	3	3	-	-	22.04	7	7	16.41	16.41
CAT-M1	eFDD 26 QPSK	high	6	3	-	-	20.96	7	7	17.49	17.49
CAT-M1	eFDD 26 16QAM	low	1	3	-	-	21.78	7	7	16.67	16.67
CAT-M1	eFDD 26 16QAM	low	5	3	-	-	21.02	7	7	17.43	17.43
CAT-M1	eFDD 26 16QAM	mid	1	3	-	-	21.91	7	7	16.54	16.54
CAT-M1	eFDD 26 16QAM	mid	5	3	-	-	21.05	7	7	17.40	17.40
CAT-M1	eFDD 26 16QAM	high	1	3	-	-	21.91	7	7	16.54	16.54
CAT-M1	eFDD 26 16QAM	high	5	3	-	-	21.02	7	7	17.43	17.43
CAT-M1	eFDD 26 QPSK	low	1	5	-	-	22.97	7	7	15.48	15.48
CAT-M1	eFDD 26 QPSK	low	3	5	-	-	21.78	7	7	16.67	16.67
CAT-M1	eFDD 26 QPSK	low	6	5	-	-	21.96	7	7	16.49	16.49
CAT-M1	eFDD 26 QPSK	mid	1	5	-	-	22.87	7	7	15.58	15.58
CAT-M1	eFDD 26 QPSK	mid	3	5	-	-	21.84	7	7	16.61	16.61
CAT-M1	eFDD 26 QPSK	mid	6	5	-	-	21.94	7	7	16.51	16.51
CAT-M1	eFDD 26 QPSK	high	1	5	-	-	22.84	7	7	15.61	15.61
CAT-M1	eFDD 26 QPSK	high	3	5	-	-	22.02	7	7	16.43	16.43
CAT-M1	eFDD 26 QPSK	high	6	5	-	-	21.97	7	7	16.48	16.48
CAT-M1	eFDD 26 16QAM	low	1	5	-	-	22.60	7	7	15.85	15.85
CAT-M1	eFDD 26 16QAM	low	5	5	-	-	20.94	7	7	17.51	17.51
CAT-M1	eFDD 26 16QAM	mid	1	5	-	-	22.80	7	7	15.65	15.65
CAT-M1	eFDD 26 16QAM	mid	5	5	-	-	21.04	7	7	17.41	17.41
CAT-M1	eFDD 26 16QAM	high	1	5	-	-	22.81	7	7	15.64	15.64
CAT-M1	eFDD 26 16QAM	high	5	5	-	-	21.04	7	7	17.41	17.41
CAT-M1	eFDD 26 QPSK	low	1	10	-	-	23.01	7	7	15.44	15.44
CAT-M1	eFDD 26 QPSK	low	3	10	-	-	22.73	7	7	15.72	15.72
CAT-M1	eFDD 26 QPSK	low	6	10	-	-	21.88	7	7	16.57	16.57
CAT-M1	eFDD 26 QPSK	mid	1	10	-	-	22.88	7	7	15.57	15.57
CAT-M1	eFDD 26 QPSK	mid	3	10	-	-	22.81	7	7	15.64	15.64
CAT-M1	eFDD 26 QPSK	mid	6	10	-	-	21.86	7	7	16.59	16.59
CAT-M1	eFDD 26 QPSK	high	1	10	-	-	22.58	7	7	15.87	15.87
CAT-M1	eFDD 26 QPSK	high	3	10	-	-	22.93	7	7	15.52	15.52
CAT-M1	eFDD 26 QPSK	high	6	10	-	-	21.86	7	7	16.59	16.59
CAT-M1	eFDD 26 16QAM	low	1	10	-	-	22.79	7	7	15.66	15.66
CAT-M1	eFDD 26 16QAM	low	5	10	-	-	21.91	7	7	16.54	16.54
CAT-M1	eFDD 26 16QAM	mid	1	10	-	-	22.91	7	7	15.54	15.54

CAT-M1	eFDD 26 16QAM	mid	5	10	-	-	21.85	7	7	16.60	16.60
CAT-M1	eFDD 26 16QAM	high	1	10	-	-	22.44	7	7	16.01	16.01
CAT-M1	eFDD 26 16QAM	high	5	10	-	-	21.82	7	7	16.63	16.63


Remark:

Please see next sub-clause for the measurement plot.


The max. antenna gain is regarding the output power not SAR / MPE.

5.2.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = CAT-M1, Radio Technology = eFDD 5 QPSK, Operating Frequency = low channel,
ChBW = 10 MHz, Ressource Blocks = 1
(S01_BC08)

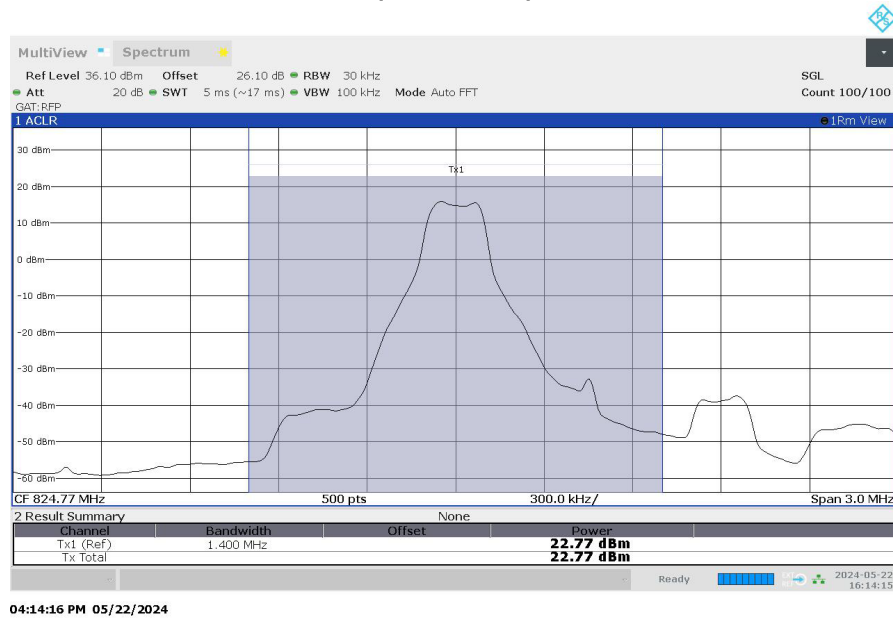

Technology = CAT-M1, Radio Technology = eFDD 26 QPSK, Operating Frequency = low
channel, ChBW = 1.4 MHz, Ressource Blocks = 1
(S01_BC08)

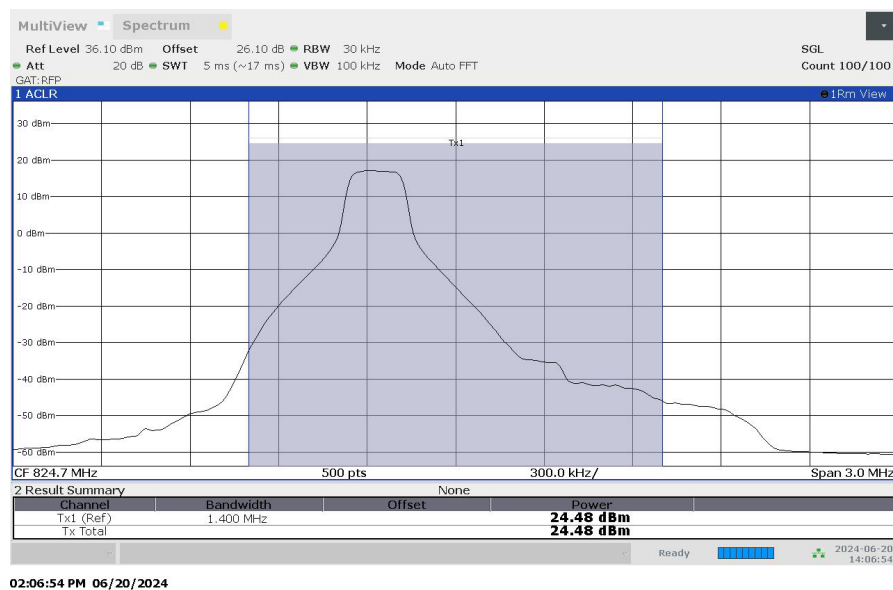

5.2.5 TEST EQUIPMENT USED

- Radio Lab

5.3 RF OUTPUT POWER

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.2.4.1, Wideband Signal: 5.2.4.4

5.3.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

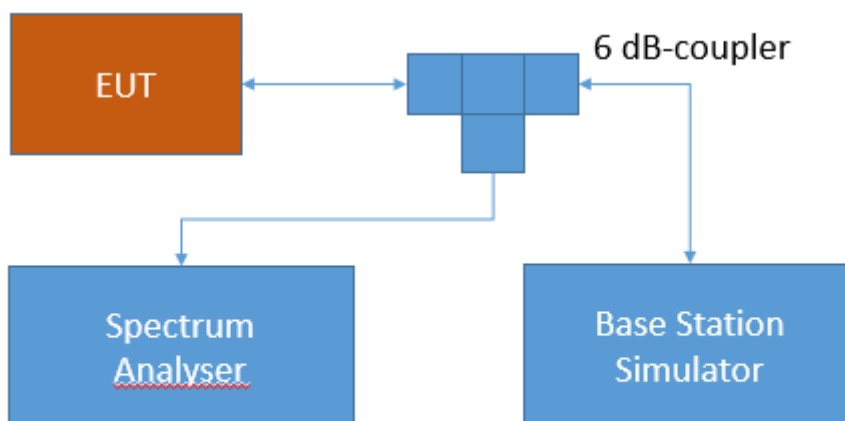

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.3.2 TEST REQUIREMENTS / LIMITS

FCC Part 22, § 22.913

(a) *Maximum ERP*. The ERP of transmitters in the Cellular Radiotelephone Service must not exceed the limits in this section.

(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

RSS-132; 5.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The transmitter output power shall be measured in terms of average power. The equivalent radiated power (e.r.p.) shall not exceed 7 watts for mobile equipment and 3 watts for portable equipment.

5.3.3 TEST PROTOCOL

Ambient temperature: 20 - 28 °C
 Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Bandwidth [MHz]	Peak Cond. Power [dBm]	Average Cond. Power [dBm]	RMS Cond. Power [dBm]	FCC ERP Limit [W]	IC ERP Limit [W]	Max. Antenna Gain FCC [dBd]	Max. Antenna Gain IC [dBd]
NB-IoT	eFDD 5 QPSK	low	1	0.2	-	-	21.82	7	7	16.63	16.63
NB-IoT	eFDD 5 QPSK	low	3	0.2	-	-	21.97	7	7	16.48	16.48
NB-IoT	eFDD 5 QPSK	low	6	0.2	-	-	21.91	7	7	16.54	16.54
NB-IoT	eFDD 5 QPSK	low	12	0.2	-	-	22.02	7	7	16.43	16.43
NB-IoT	eFDD 5 QPSK	mid	1	0.2	-	-	21.81	7	7	16.64	16.64
NB-IoT	eFDD 5 QPSK	mid	3	0.2	-	-	21.96	7	7	16.49	16.49
NB-IoT	eFDD 5 QPSK	mid	6	0.2	-	-	21.98	7	7	16.47	16.47
NB-IoT	eFDD 5 QPSK	mid	12	0.2	-	-	21.94	7	7	16.51	16.51
NB-IoT	eFDD 5 QPSK	high	1	0.2	-	-	21.70	7	7	16.75	16.75
NB-IoT	eFDD 5 QPSK	high	3	0.2	-	-	21.81	7	7	16.64	16.64
NB-IoT	eFDD 5 QPSK	high	6	0.2	-	-	21.87	7	7	16.58	16.58
NB-IoT	eFDD 5 QPSK	high	12	0.2	-	-	21.80	7	7	16.65	16.65
NB-IoT	eFDD 5 BPSK	low	1	0.2	-	-	21.84	7	7	16.61	16.61
NB-IoT	eFDD 5 BPSK	mid	1	0.2	-	-	21.73	7	7	16.72	16.72
NB-IoT	eFDD 5 BPSK	high	1	0.2	-	-	21.61	7	7	16.84	16.84


Remarks:

Please see next sub-clause for the measurement plot.

The max. antenna gain is regarding the output power not SAR / MPE.

5.3.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = NB-IoT, Radio Technology = eFDD 5 QPSK, Operating Frequency = low channel,
 ChBW = 0.2 MHz, Ressource Blocks = 12
 (S01_BC08)

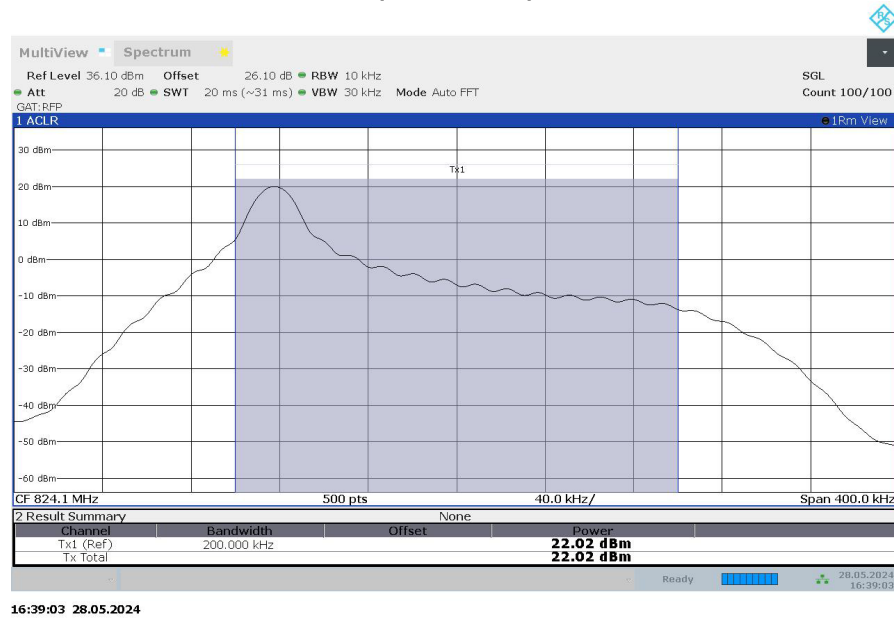

5.3.5 TEST EQUIPMENT USED

- Radio Lab

5.4 EMISSION AND OCCUPIED BANDWIDTH

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

5.4.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per FCC §2.1049 and RSS-GEN 6.7. The limit and the requirements come from the applicable rule part and ISED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setups according to the following diagram:

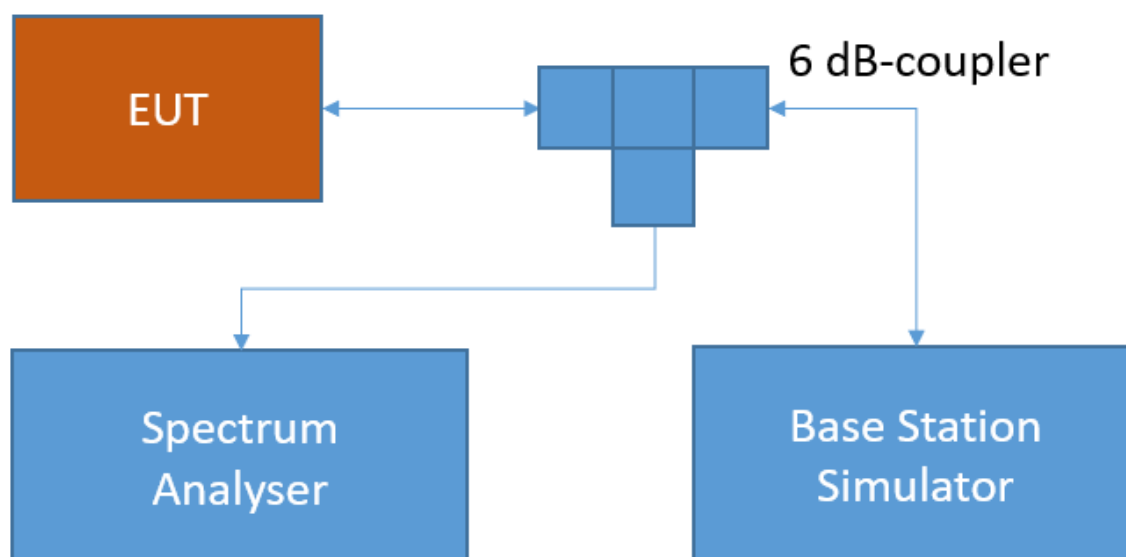

**Test Setup FCC / ISED Cellular;
Emission and occupied bandwidth**

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

RSS-GEN; 6.6 Occupied Bandwidth

The emission bandwidth ($\times$ dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated $\times$ dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least $3\times$ the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

5.4.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Bandwidth [MHz]	26 dB BW [kHz]	99 % BW [kHz]
GSM	GSM 850 GPRS	low	-	0.2	316	244
GSM	GSM 850 GPRS	mid	-	0.2	318	243
GSM	GSM 850 GPRS	high	-	0.2	324	248
GSM	GSM 850 EDGE	low	-	0.2	294	232
GSM	GSM 850 EDGE	mid	-	0.2	304	239
GSM	GSM 850 EDGE	high	-	0.2	290	235

Remark: Please see next sub-clause for the measurement plot.

5.4.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = GSM, Radio Technology = GPRS 850, Operating Frequency = high channel (S01_BC08)

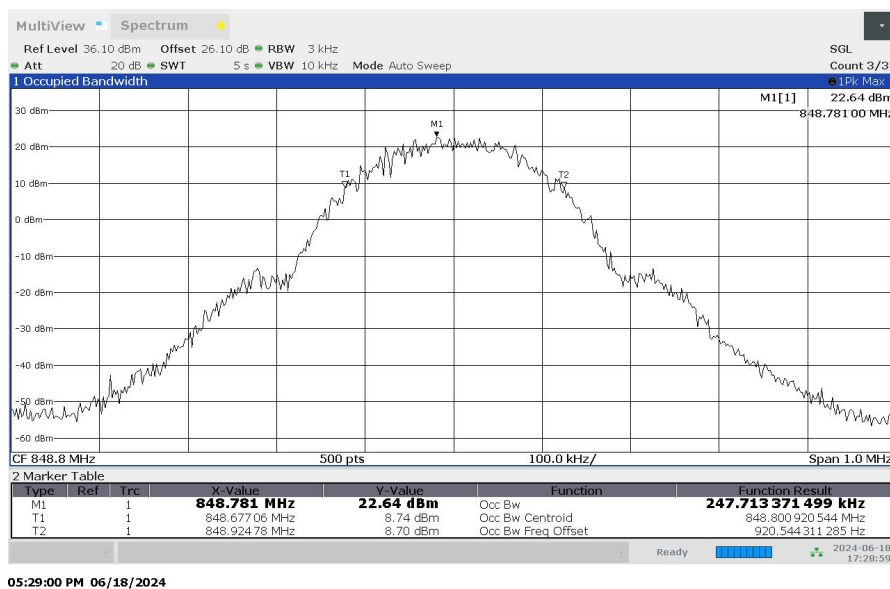

Technology = GSM, Radio Technology = EDGE 850, Operating Frequency = mid channel (S01_BC08)



5.4.5 TEST EQUIPMENT USED

- Radio Lab

5.5 EMISSION AND OCCUPIED BANDWIDTH

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

5.5.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per FCC §2.1049 and RSS-GEN 6.7. The limit and the requirements come from the applicable rule part and ISED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setups according to the following diagram:

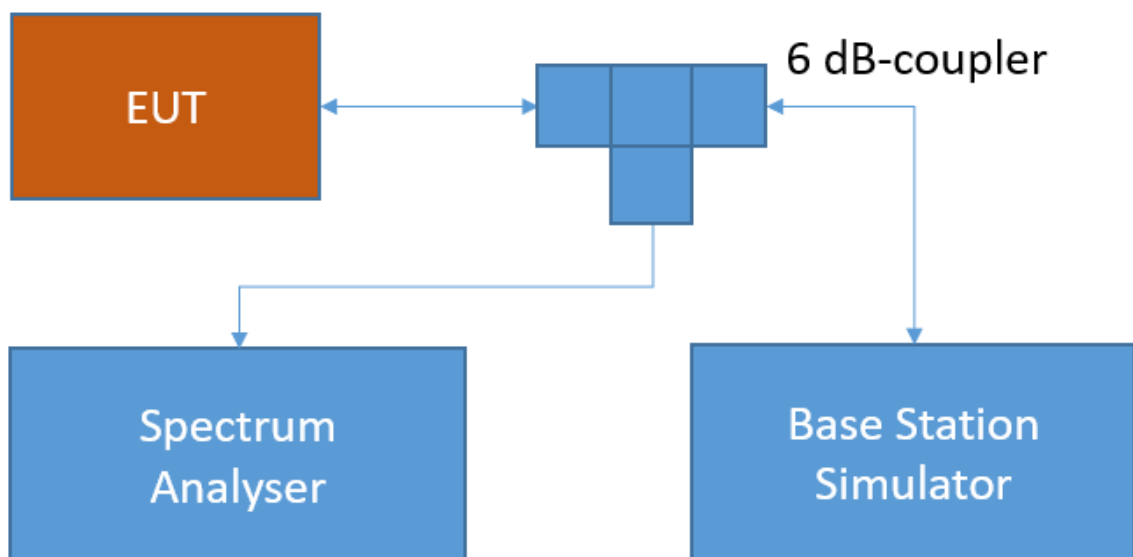

**Test Setup FCC / ISED Cellular;
Emission and occupied bandwidth**

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

RSS-GEN; 6.6 Occupied Bandwidth

The emission bandwidth ($\times$ dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated $\times$ dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least $3\times$ the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

5.5.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Bandwidth [MHz]	26 dB BW [kHz]	99 % BW [kHz]
CAT-M1	eFDD 5 QPSK	low	6	1.4	-	1101
CAT-M1	eFDD 5 QPSK	mid	6	1.4	-	1100
CAT-M1	eFDD 5 QPSK	high	6	1.4	-	1105
CAT-M1	eFDD 5 16QAM	low	5	1.4	-	937
CAT-M1	eFDD 5 16QAM	mid	5	1.4	-	935
CAT-M1	eFDD 5 16QAM	high	5	1.4	-	929
CAT-M1	eFDD 26 QPSK	low	6	1.4	-	1098
CAT-M1	eFDD 26 QPSK	mid	6	1.4	-	1099
CAT-M1	eFDD 26 QPSK	high	6	1.4	-	1100
CAT-M1	eFDD 26 16QAM	low	5	1.4	-	925
CAT-M1	eFDD 26 16QAM	mid	5	1.4	-	932
CAT-M1	eFDD 26 16QAM	high	5	1.4	-	937

Remark: Please see next sub-clause for the measurement plot.


5.5.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = CAT-M1, Radio Technology = eFDD 5 QPSK, Operating Frequency = high channel, ChBW = 1.4 MHz, Ressource Blocks = 6 (S01_BC08)

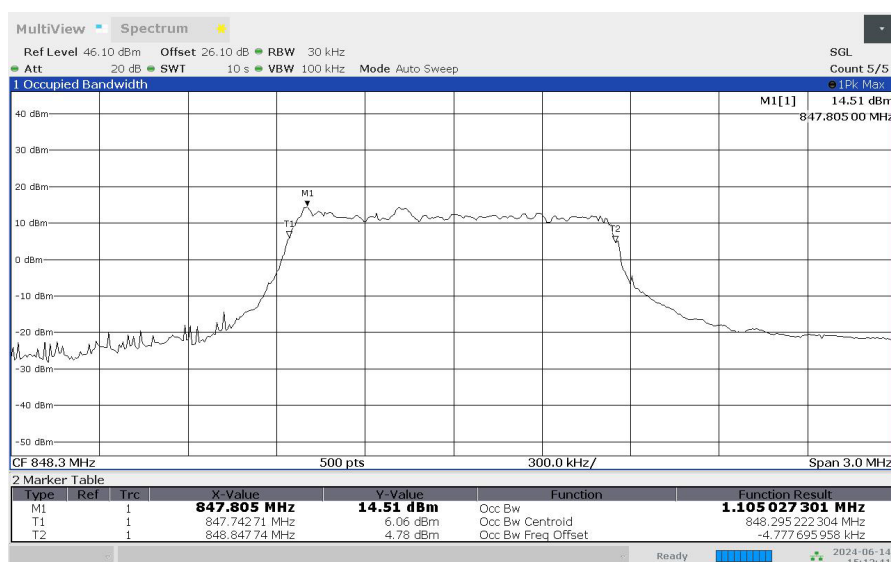

03:12:41 PM 06/14/2024

Technology = CAT-M1, Radio Technology = eFDD 26 QPSK, Operating Frequency = high channel, ChBW = 1.4 MHz, Ressource Blocks = 6 (S01_BC08)

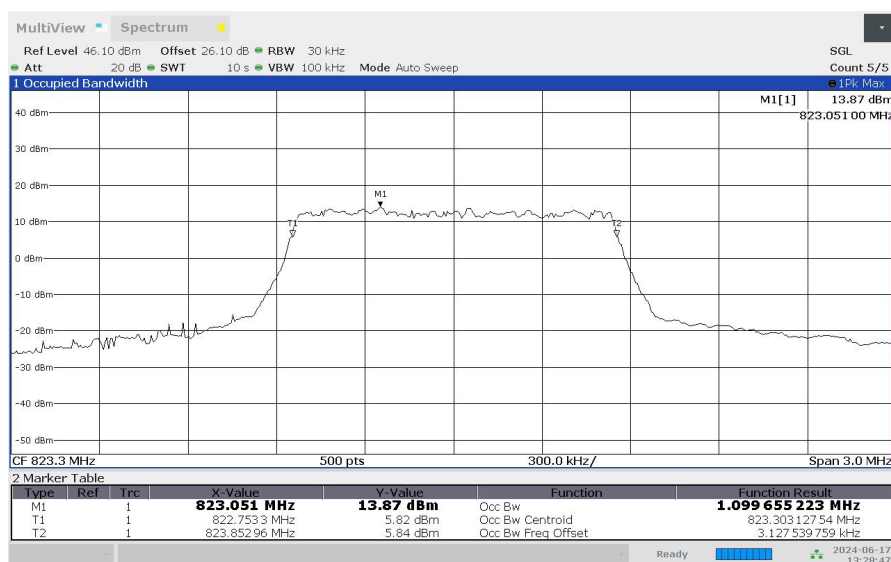

01:28:48 PM 06/17/2024

5.5.5 TEST EQUIPMENT USED

- Radio Lab

5.6 EMISSION AND OCCUPIED BANDWIDTH

Standard **FCC PART 22 Subpart H**


The test was performed according to:

ANSI C63.26: 2015; 5.4.3 (relative meas. Procedure [26dB for GSM, EGDE, WCDMA, HSDPA, HSUPA]) 5.4.4 (Power bandwidth (99%))

5.6.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable conducted spurious emission test case per FCC §2.1049 and RSS-GEN 6.7. The limit and the requirements come from the applicable rule part and ISED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setups according to the following diagram:

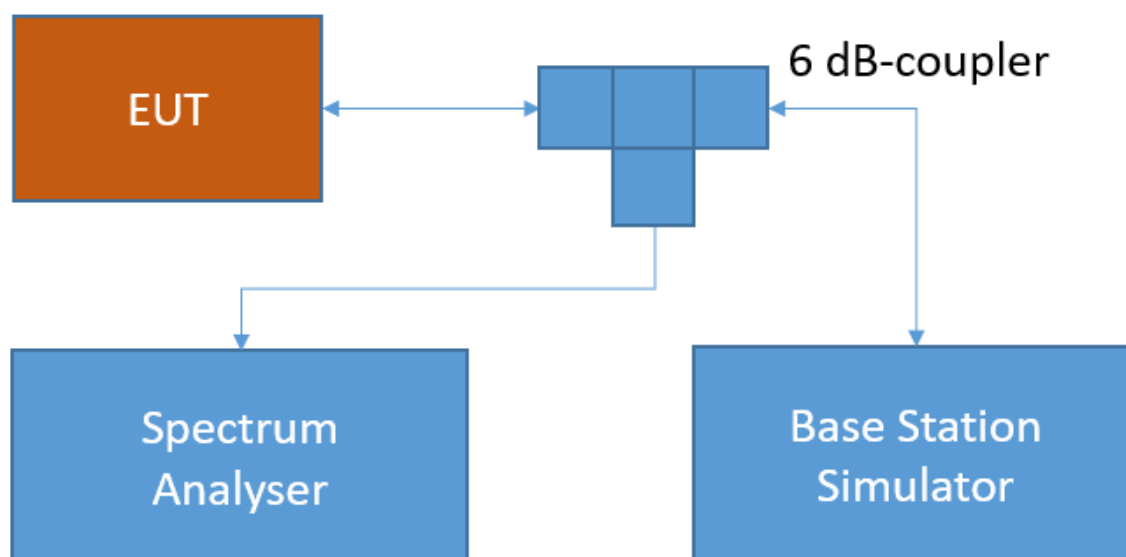

**Test Setup FCC / ISED Cellular;
Emission and occupied bandwidth**

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 2.1049; Occupied Bandwidth:

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable:

(h) Transmitters employing digital modulation techniques—when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment will be operated. The signal shall be applied through any filter networks, pseudo-random generators or other devices required in normal service. Additionally, the occupied bandwidth shall be shown for operation with any devices used for modifying the spectrum when such devices are optional at the discretion of the user.

(i) Transmitters designed for other types of modulation—when modulated by an appropriate signal of sufficient amplitude to be representative of the type of service in which used. A description of the input signal should be supplied.

RSS-GEN; 6.6 Occupied Bandwidth

The emission bandwidth ($\times$ dB) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated $\times$ dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least $3\times$ the resolution bandwidth.

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

5.6.3 TEST PROTOCOL


Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Bandwidth [MHz]	26 dB BW [kHz]	99 % BW [kHz]
NB-IoT	eFDD 5 QPSK	low	12	0.2	-	124
NB-IoT	eFDD 5 QPSK	mid	12	0.2	-	128
NB-IoT	eFDD 5 QPSK	high	12	0.2	-	123
NB-IoT	eFDD 5 BPSK	low	1	0.2	-	126
NB-IoT	eFDD 5 BPSK	mid	1	0.2	-	123
NB-IoT	eFDD 5 BPSK	high	1	0.2	-	125

Remark: Please see next sub-clause for the measurement plot.

5.6.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = NB-IoT, Radio Technology = eFDD 5 QPSK, Operating Frequency = mid channel, ChBW = 0.2 MHz, Ressource Blocks = 12 (S01_BC08)

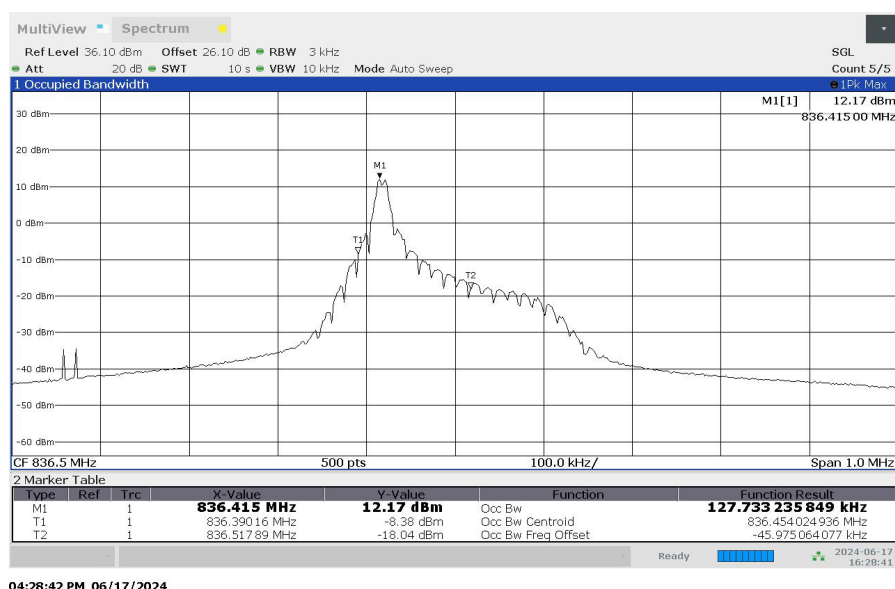

04:28:42 PM 06/17/2024

5.6.5 TEST EQUIPMENT USED

- Radio Lab

5.7 RF OUTPUT POWER

Standard **FCC PART 24 Subpart E**


The test was performed according to:

ANSI C63.26: 2015; 5.2.4.1 Narrowband Signal: 5.2.4.3.3

5.7.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

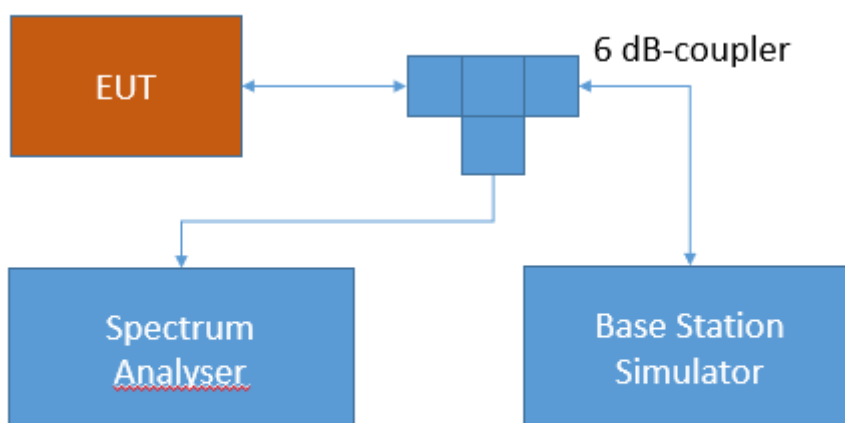

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.7.2 TEST REQUIREMENTS / LIMITS

FCC Part 24, § 24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

RSS-133; 6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

SRSP-510; 5.1.2 Radiated Power and Antenna Height Limits – Mobile Stations

Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. The equipment shall employ means to limit the power to the minimum necessary for successful communication.

5.7.3 TEST PROTOCOL

Ambient temperature: 20 - 28 °C
 Relative humidity: 30 - 40 %

Radio Technology		Channel	Ressource Blocks / Subcarrier	Band-width [MHz]	Peak Cond. Power [dBm]	Average Cond. Power [dBm]	RMS Cond. Power [dBm]	FCC EIRP Limit [W]	IC EIRP Limit [W]	Maximum Antenna Gain FCC [dBi]	Maximum Antenna Gain IC [dBi]
GSM	GSM 1900 GPRS	low	-	0.2	29.2	27.73	28.12	2	2	4.88	4.88
GSM	GSM 1900 GPRS	mid	-	0.2	29.11	27.70	28.12	2	2	4.88	4.88
GSM	GSM 1900 GPRS	high	-	0.2	29.2	27.73	28.15	2	2	4.85	4.85
GSM	GSM 1900 EDGE	low	-	0.2	28.52	25.12	25.73	2	2	7.27	7.27
GSM	GSM 1900 EDGE	mid	-	0.2	28.3	25.13	25.69	2	2	7.31	7.31
GSM	GSM 1900 EDGE	high	-	0.2	28.17	25.00	25.35	2	2	7.65	7.65


Remarks:

Please see next sub-clause for the measurement plot.

The max. antenna gain is regarding the output power not SAR / MPE.


5.7.4 MEASUREMENT PLOT (EXAMPLE PLOT, SHOWING WORST CASE, IF APPLICABLE)

Technology = GPRS, Radio Technology = GPRS 1900, Operating Frequency = high channel (S01_BC08)

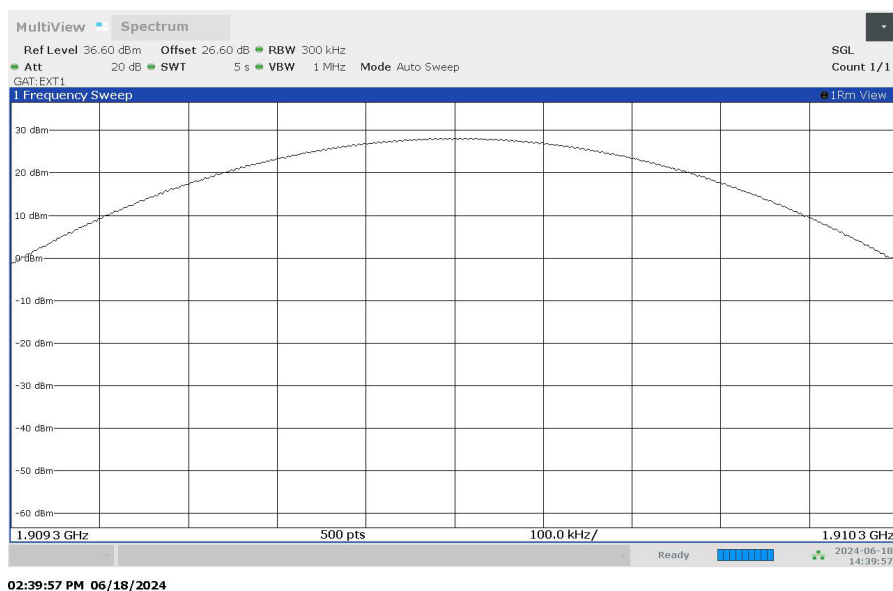

maximum value 28.15dBm measured at 1909.8MHz

Technology = EDGE, Radio Technology = EDGE 1900, Operating Frequency = low channel (S01_BC08)

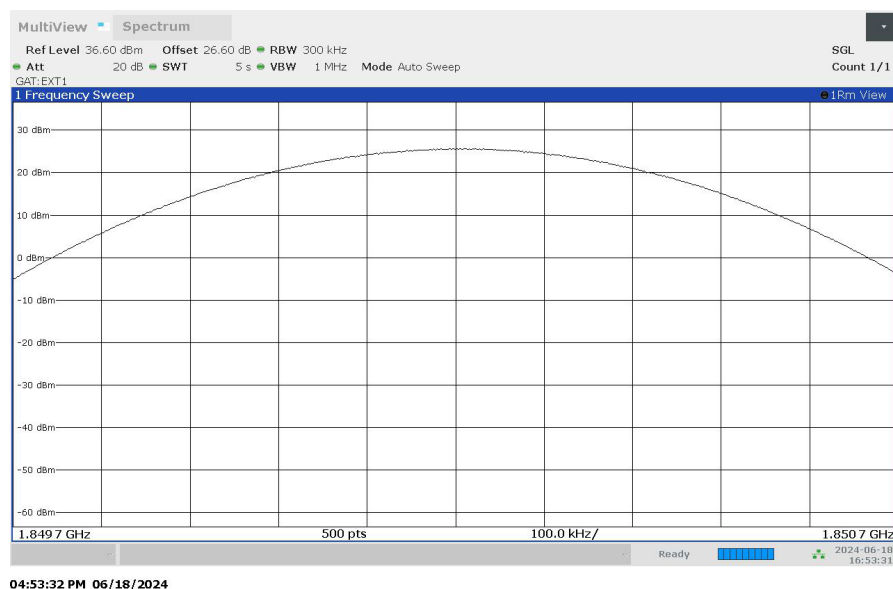

maximum value 25.73dBm measured at 1850.2MHz

5.7.5 TEST EQUIPMENT USED

- Radio Lab

5.8 RF OUTPUT POWER

Standard **FCC PART 24 Subpart E**


The test was performed according to:

ANSI C63.26: 2015; 5.2.4.1, Wideband Signal: 5.2.4.4

5.8.1 TEST DESCRIPTION

This test case is intended to demonstrate compliance to the applicable RF Output power test case per § 2.1046 and RSS-GEN 6.12. The limit and the requirements come from the applicable rule part and ISSED RSS-Standard for the operating band of the cellular device.

The EUT was connected to the test setup according to the following diagram:

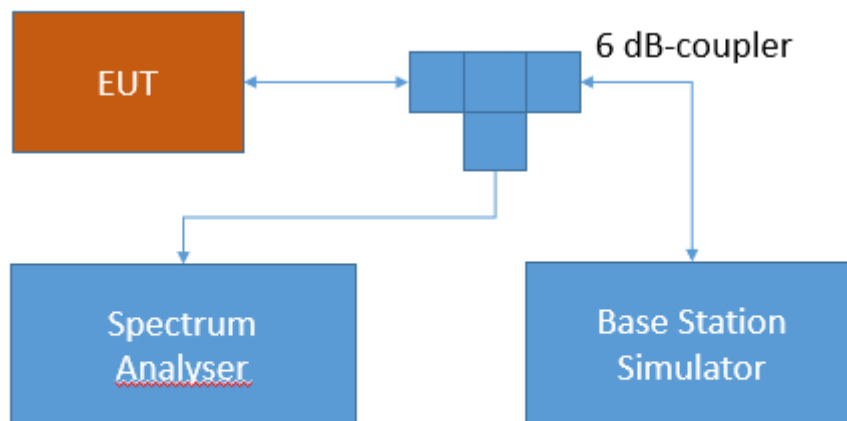

Test Setup FCC Part 22/24/27/90 Cellular;
RF Output power

The attenuation of the measuring and stimulus path are known for each measured frequency and are considered.

The Spectrum Analyzer settings can be directly found in the measurement diagrams.

5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 24, § 24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

RSS-133; 6.4 Transmitter Output Power and Equivalent Isotropically Radiated Power

The equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510.

SRSP-510; 5.1.2 Radiated Power and Antenna Height Limits – Mobile Stations

Mobile stations and hand-held portables are limited to 2 watts maximum e.i.r.p. The equipment shall employ means to limit the power to the minimum necessary for successful communication.

5.8.3 TEST PROTOCOL

Ambient temperature: 20 - 28 °C
Relative humidity: 30 - 40 %

Radio Technology		Channel	Resource Blocks / Subcarrier	Bandwidth [MHz]	Peak Cond. Power [dBm]	Average Cond. Power [dBm]	RMS Cond. Power [dBm]	FCC EIRP Limit [W]	IC EIRP Limit [W]	Maximum Antenna Gain FCC [dBi]	Maximum Antenna Gain IC [dBi]
CAT-M1	eFDD 2 QPSK	low	1	1.4	-	-	22.33	2	2	10.67	10.67
CAT-M1	eFDD 2 QPSK	low	3	1.4	-	-	21.23	2	2	11.77	11.77
CAT-M1	eFDD 2 QPSK	low	6	1.4	-	-	20.12	2	2	12.88	12.88
CAT-M1	eFDD 2 QPSK	mid	1	1.4	-	-	22.37	2	2	10.63	10.63
CAT-M1	eFDD 2 QPSK	mid	3	1.4	-	-	21.29	2	2	11.71	11.71
CAT-M1	eFDD 2 QPSK	mid	6	1.4	-	-	20.24	2	2	12.76	12.76
CAT-M1	eFDD 2 QPSK	high	1	1.4	-	-	22.28	2	2	10.72	10.72
CAT-M1	eFDD 2 QPSK	high	3	1.4	-	-	21.18	2	2	11.82	11.82
CAT-M1	eFDD 2 QPSK	high	6	1.4	-	-	20.10	2	2	12.9	12.9
CAT-M1	eFDD 2 16QAM	low	1	1.4	-	-	21.12	2	2	11.88	11.88
CAT-M1	eFDD 2 16QAM	low	5	1.4	-	-	20.23	2	2	12.77	12.77
CAT-M1	eFDD 2 16QAM	mid	1	1.4	-	-	21.19	2	2	11.81	11.81
CAT-M1	eFDD 2 16QAM	mid	5	1.4	-	-	20.47	2	2	12.53	12.53
CAT-M1	eFDD 2 16QAM	high	1	1.4	-	-	21.21	2	2	11.79	11.79
CAT-M1	eFDD 2 16QAM	high	5	1.4	-	-	20.19	2	2	12.81	12.81
CAT-M1	eFDD 2 QPSK	low	1	3	-	-	23.06	2	2	9.94	9.94
CAT-M1	eFDD 2 QPSK	low	3	3	-	-	21.90	2	2	11.1	11.1
CAT-M1	eFDD 2 QPSK	low	6	3	-	-	20.83	2	2	12.17	12.17
CAT-M1	eFDD 2 QPSK	mid	1	3	-	-	22.76	2	2	10.24	10.24
CAT-M1	eFDD 2 QPSK	mid	3	3	-	-	21.86	2	2	11.14	11.14
CAT-M1	eFDD 2 QPSK	mid	6	3	-	-	20.78	2	2	12.22	12.22
CAT-M1	eFDD 2 QPSK	high	1	3	-	-	22.64	2	2	10.36	10.36
CAT-M1	eFDD 2 QPSK	high	3	3	-	-	21.76	2	2	11.24	11.24
CAT-M1	eFDD 2 QPSK	high	6	3	-	-	20.56	2	2	12.44	12.44
CAT-M1	eFDD 2 16QAM	low	1	3	-	-	21.89	2	2	11.11	11.11
CAT-M1	eFDD 2 16QAM	low	5	3	-	-	20.82	2	2	12.18	12.18
CAT-M1	eFDD 2 16QAM	mid	1	3	-	-	21.67	2	2	11.33	11.33
CAT-M1	eFDD 2 16QAM	mid	5	3	-	-	20.84	2	2	12.16	12.16
CAT-M1	eFDD 2 16QAM	high	1	3	-	-	21.71	2	2	11.29	11.29
CAT-M1	eFDD 2 16QAM	high	5	3	-	-	20.60	2	2	12.4	12.4
CAT-M1	eFDD 2 QPSK	low	1	5	-	-	22.86	2	2	10.14	10.14
CAT-M1	eFDD 2 QPSK	low	3	5	-	-	21.87	2	2	11.13	11.13
CAT-M1	eFDD 2 QPSK	low	6	5	-	-	21.91	2	2	11.09	11.09
CAT-M1	eFDD 2 QPSK	mid	1	5	-	-	22.82	2	2	10.18	10.18
CAT-M1	eFDD 2 QPSK	mid	3	5	-	-	21.97	2	2	11.03	11.03
CAT-M1	eFDD 2 QPSK	mid	6	5	-	-	21.86	2	2	11.14	11.14
CAT-M1	eFDD 2 QPSK	high	1	5	-	-	22.61	2	2	10.39	10.39
CAT-M1	eFDD 2 QPSK	high	3	5	-	-	21.90	2	2	11.1	11.1
CAT-M1	eFDD 2 QPSK	high	6	5	-	-	21.75	2	2	11.25	11.25
CAT-M1	eFDD 2 16QAM	low	1	5	-	-	22.97	2	2	10.03	10.03
CAT-M1	eFDD 2 16QAM	low	5	5	-	-	20.57	2	2	12.43	12.43
CAT-M1	eFDD 2 16QAM	mid	1	5	-	-	22.75	2	2	10.25	10.25
CAT-M1	eFDD 2 16QAM	mid	5	5	-	-	20.56	2	2	12.44	12.44
CAT-M1	eFDD 2 16QAM	high	1	5	-	-	21.90	2	2	11.1	11.1
CAT-M1	eFDD 2 16QAM	high	5	5	-	-	20.47	2	2	12.53	12.53
CAT-M1	eFDD 2 QPSK	low	1	10	-	-	22.94	2	2	10.06	10.06
CAT-M1	eFDD 2 QPSK	low	3	10	-	-	17.96	2	2	15.04	15.04
CAT-M1	eFDD 2 QPSK	low	6	10	-	-	21.91	2	2	11.09	11.09
CAT-M1	eFDD 2 QPSK	mid	1	10	-	-	22.93	2	2	10.07	10.07
CAT-M1	eFDD 2 QPSK	mid	3	10	-	-	22.72	2	2	10.28	10.28
CAT-M1	eFDD 2 QPSK	mid	6	10	-	-	21.93	2	2	11.07	11.07
CAT-M1	eFDD 2 QPSK	high	1	10	-	-	22.38	2	2	10.62	10.62
CAT-M1	eFDD 2 QPSK	high	3	10	-	-	22.73	2	2	10.27	10.27
CAT-M1	eFDD 2 QPSK	high	6	10	-	-	21.77	2	2	11.23	11.23
CAT-M1	eFDD 2 16QAM	low	1	10	-	-	22.72	2	2	10.28	10.28
CAT-M1	eFDD 2 16QAM	low	5	10	-	-	21.94	2	2	11.06	11.06
CAT-M1	eFDD 2 16QAM	mid	1	10	-	-	22.78	2	2	10.22	10.22
CAT-M1	eFDD 2 16QAM	mid	5	10	-	-	21.84	2	2	11.16	11.16
CAT-M1	eFDD 2 16QAM	high	1	10	-	-	22.19	2	2	10.81	10.81
CAT-M1	eFDD 2 16QAM	high	5	10	-	-	21.71	2	2	11.29	11.29
CAT-M1	eFDD 25 QPSK	low	1	1.4	-	-	23.34	2	2	9.66	9.66
CAT-M1	eFDD 25 QPSK	low	3	1.4	-	-	22.28	2	2	10.72	10.72
CAT-M1	eFDD 25 QPSK	low	6	1.4	-	-	21.16	2	2	11.84	11.84

CAT-M1	eFDD 25 QPSK	mid	1	1.4	-	-	23.20	2	2	9.8	9.8
CAT-M1	eFDD 25 QPSK	mid	3	1.4	-	-	22.22	2	2	10.78	10.78
CAT-M1	eFDD 25 QPSK	mid	6	1.4	-	-	21.11	2	2	11.89	11.89
CAT-M1	eFDD 25 QPSK	high	1	1.4	-	-	23.03	2	2	9.97	9.97
CAT-M1	eFDD 25 QPSK	high	3	1.4	-	-	21.91	2	2	11.09	11.09
CAT-M1	eFDD 25 QPSK	high	6	1.4	-	-	20.96	2	2	12.04	12.04
CAT-M1	eFDD 25 16QAM	low	1	1.4	-	-	22.03	2	2	10.97	10.97
CAT-M1	eFDD 25 16QAM	low	5	1.4	-	-	19.98	2	2	13.02	13.02
CAT-M1	eFDD 25 16QAM	mid	1	1.4	-	-	22.23	2	2	10.77	10.77
CAT-M1	eFDD 25 16QAM	mid	5	1.4	-	-	19.55	2	2	13.45	13.45
CAT-M1	eFDD 25 16QAM	high	1	1.4	-	-	21.85	2	2	11.15	11.15
CAT-M1	eFDD 25 16QAM	high	5	1.4	-	-	19.56	2	2	13.44	13.44
CAT-M1	eFDD 25 QPSK	low	1	3	-	-	23.10	2	2	9.9	9.9
CAT-M1	eFDD 25 QPSK	low	3	3	-	-	22.06	2	2	10.94	10.94
CAT-M1	eFDD 25 QPSK	low	6	3	-	-	21.12	2	2	11.88	11.88
CAT-M1	eFDD 25 QPSK	mid	1	3	-	-	22.98	2	2	10.02	10.02
CAT-M1	eFDD 25 QPSK	mid	3	3	-	-	21.99	2	2	11.01	11.01
CAT-M1	eFDD 25 QPSK	mid	6	3	-	-	21.00	2	2	12	12
CAT-M1	eFDD 25 QPSK	high	1	3	-	-	22.79	2	2	10.21	10.21
CAT-M1	eFDD 25 QPSK	high	3	3	-	-	21.97	2	2	11.03	11.03
CAT-M1	eFDD 25 QPSK	high	6	3	-	-	20.75	2	2	12.25	12.25
CAT-M1	eFDD 25 16QAM	low	1	3	-	-	22.08	2	2	10.92	10.92
CAT-M1	eFDD 25 16QAM	low	5	3	-	-	19.80	2	2	13.2	13.2
CAT-M1	eFDD 25 16QAM	mid	1	3	-	-	21.87	2	2	11.13	11.13
CAT-M1	eFDD 25 16QAM	mid	5	3	-	-	19.51	2	2	13.49	13.49
CAT-M1	eFDD 25 16QAM	high	1	3	-	-	21.85	2	2	11.15	11.15
CAT-M1	eFDD 25 16QAM	high	5	3	-	-	19.45	2	2	13.55	13.55
CAT-M1	eFDD 25 QPSK	low	1	5	-	-	23.13	2	2	9.87	9.87
CAT-M1	eFDD 25 QPSK	low	3	5	-	-	22.16	2	2	10.84	10.84
CAT-M1	eFDD 25 QPSK	low	6	5	-	-	22.07	2	2	10.93	10.93
CAT-M1	eFDD 25 QPSK	mid	1	5	-	-	22.95	2	2	10.05	10.05
CAT-M1	eFDD 25 QPSK	mid	3	5	-	-	22.13	2	2	10.87	10.87
CAT-M1	eFDD 25 QPSK	mid	6	5	-	-	22.04	2	2	10.96	10.96
CAT-M1	eFDD 25 QPSK	high	1	5	-	-	22.85	2	2	10.15	10.15
CAT-M1	eFDD 25 QPSK	high	3	5	-	-	22.00	2	2	11	11
CAT-M1	eFDD 25 QPSK	high	6	5	-	-	21.86	2	2	11.14	11.14
CAT-M1	eFDD 25 16QAM	low	1	5	-	-	23.16	2	2	9.84	9.84
CAT-M1	eFDD 25 16QAM	low	5	5	-	-	19.86	2	2	13.14	13.14
CAT-M1	eFDD 25 16QAM	mid	1	5	-	-	22.86	2	2	10.14	10.14
CAT-M1	eFDD 25 16QAM	mid	5	5	-	-	19.49	2	2	13.51	13.51
CAT-M1	eFDD 25 16QAM	high	1	5	-	-	22.95	2	2	10.05	10.05
CAT-M1	eFDD 25 16QAM	high	5	5	-	-	19.43	2	2	13.57	13.57
CAT-M1	eFDD 25 QPSK	low	1	10	-	-	23.32	2	2	9.68	9.68
CAT-M1	eFDD 25 QPSK	low	3	10	-	-	23.21	2	2	9.79	9.79
CAT-M1	eFDD 25 QPSK	low	6	10	-	-	22.13	2	2	10.87	10.87
CAT-M1	eFDD 25 QPSK	mid	1	10	-	-	23.05	2	2	9.95	9.95
CAT-M1	eFDD 25 QPSK	mid	3	10	-	-	23.18	2	2	9.82	9.82
CAT-M1	eFDD 25 QPSK	mid	6	10	-	-	22.05	2	2	10.95	10.95
CAT-M1	eFDD 25 QPSK	high	1	10	-	-	22.69	2	2	10.31	10.31
CAT-M1	eFDD 25 QPSK	high	3	10	-	-	22.97	2	2	10.03	10.03
CAT-M1	eFDD 25 QPSK	high	6	10	-	-	21.81	2	2	11.19	11.19
CAT-M1	eFDD 25 16QAM	low	1	10	-	-	23.15	2	2	9.85	9.85
CAT-M1	eFDD 25 16QAM	low	5	10	-	-	20.85	2	2	12.15	12.15
CAT-M1	eFDD 25 16QAM	mid	1	10	-	-	22.80	2	2	10.2	10.2
CAT-M1	eFDD 25 16QAM	mid	5	10	-	-	20.38	2	2	12.62	12.62
CAT-M1	eFDD 25 16QAM	high	1	10	-	-	22.63	2	2	10.37	10.37
CAT-M1	eFDD 25 16QAM	high	5	10	-	-	20.38	2	2	12.62	12.62

Remarks:

Please see next sub-clause for the measurement plot.

The max. antenna gain is regarding the output power not SAR / MPE.