



# ADDENDUM TO IMPINJ INC. TEST REPORT FC06-010D

#### **FOR THE**

# RFID READER ANTENNA (BRICKYARD), IPJ-A0400-USA; RFID READER ANTENNA (GUARDWALL), IPJ-A0401-USA AND RFID READER ANTENNA (MINI-GUARDRAIL), IPJ-A0301-USA

# FCC PART 15 SUBPART C SECTIONS 15.209 & 15.247

#### **COMPLIANCE**

**DATE OF ISSUE: MARCH 8, 2007** 

PREPARED FOR: PREPARED BY:

Impinj Inc.

701 N. 34th Street

CKC Laboratories, Inc.

Seattle, WA 98103

Source Pines Drive Mariposa, CA 95338

W.O. No.: 83127 Date of test: February 13-15, 2007

Report No.: FC06-010E

This report contains a total of 29 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.



# TABLE OF CONTENTS

Administrative Information	3
Approvals	4
Conditions for Compliance	4
Equipment Under Test (EUT) Description	5
FCC 15.33(a) Frequency Ranges Tested	5
EUT Operating Frequency	5
Equipment Under Test	
Peripheral Devices	
Report of Emissions Measurements	7
Testing Parameters	
FCC 15.247 – Radiated RF Power (b)(3)	
FCC 15.247/15.209/15.205 – Radiated Spurious Emissions	



#### **ADMINISTRATIVE INFORMATION**

**DATE OF TEST:** February 13-15, 2007

**DATE OF RECEIPT:** February 13, 2007

**MANUFACTURER:** Impinj Inc.

701 N. 34th Street Seattle, WA 98103

**REPRESENTATIVE:** Vince Moretti

**TEST LOCATION:** CKC Laboratories, Inc.

22116 23rd Drive S.E., Suite A Bothell, WA 98021-4413

**TEST METHOD:** ANSI C63.4 (2003)

**PURPOSE OF TEST:** Original Report: To demonstrate the compliance of the Speedway

Reader, IPJ-R1000, with the requirements for FCC part 15 Subpart B sections 15.107 & 15.109 Class B, Subpart C Sections 15.207, 15.209

&15.247 and RSS-210 devices.

**Addendum A:** To clarify the plot on page 21.

**Addendum B:** To demonstrate the compliance of the RFID Reader, IPJ-R1000, with partial re-testing for FCC Part 15 Subpart C Sections

15.209 and 15.247 after component changes in the EUT.

**Addendum C** is to add limit lines to the band edge plots and revise

the frequency range on page 5.

**Addendum D:** To demonstrate the compliance of the RFID Reader Antenna (Brickyard), IPJ-A0400-USA; RFID Reader Antenna (Guardwall), IPJ-A0401-USA and RFID Reader Antenna (Mini-Guardrail), IPJ-A0301-USA with the requirements for FCC Part 15 Subpart C Sections 15.209 & 15.247 devices with testing of new antennas.

**Addendum E:** To correct sequence 7 on page 12 and sequence 6 on

page 18 with no new testing.

Page 3 of 29 Report No: FC06-010E



# **APPROVALS**

Steve Behm, Director of Engineering Services

**QUALITY ASSURANCE:** 

**TEST PERSONNEL:** 

Joyce Walker, Quality Assurance Administrative Manager

Ryan Rutledge, Test Technologist

Katie Molina, Senior EMC Engineer/Lab

Manager

# CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply. Conducted emissions not required for this device.



# **EQUIPMENT UNDER TEST (EUT) DESCRIPTION**

The customer declares the EUT tested by CKC Laboratories was representative of a production unit.

# FCC 15.33(a) Frequency Ranges Tested

15.209/15.247 Radiated Emissions: 1-10 GHz.

# **EUT Operating Frequency**

The EUT was operating at 902-928 MHz.

The following model was tested by CKC Laboratories: **IPJ-A0400-USA** 

An additional model with a second manufacturer (OEM) is the same as the model tested. Any differences between the names does not affect their EMC characteristics and therefore complies to the level of testing equivalent to the tested model name shown on the data sheets: **Manufacturer CSL**, **Model CS-777-2** 

# **EQUIPMENT UNDER TEST**

RFID Reader Antenna (Brickyard) RFID Reader Antenna (Guardwall)

Manuf: Impinj Manuf: Impinj

Model: IPJ-A0400-USA Model: IPJ-A0401-USA

Serial: Serial: FCC ID: FCC ID:

# **RFID Reader Antenna (Mini-Guardrail)**

Manuf: Impini

Model: IPJ-A0301-USA

Serial: FCC ID:

RFID Reader Antenna (Brickyard), IPJ-A0400-USA; RFID Reader Antenna (Guardwall), IPJ-A0401-USA and RFID Reader Antenna (Mini-Guardrail), IPJ-A0301-USA

Page 5 of 29 Report No: FC06-010E



#### PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

<u>Laptop PC</u> <u>Crossover Ethernet Cable (UTP)</u>

Manuf:DellManuf:NAModel:Latitude D505Model:NASerial:CN-0H2049-48643-49E-0525Serial:NA

<u>Laptop AC Adapter</u> <u>AC Adapter</u>

Manuf: Dell Manuf: CUI Inc

Model: HP-OQ065B83 Model: DSA-60W-20 1 24060 Serial: CN-0N2765-47890-45D-5387 Serial: DTS240250UC-P11P-DB

**RFID Reader Core** 

Manuf: Impinj

Model: IPJ-R1000-USA-0-01-01

Serial: 40306280020

Page 6 of 29 Report No: FC06-010E



#### REPORT OF EMISSIONS MEASUREMENTS

#### TESTING PARAMETERS

#### TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within  $+15^{\circ}$ C and  $+35^{\circ}$ C. The relative humidity was between 20% and 75%.

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits to determine compliance. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### **CORRECTION FACTORS**

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in  $dB\mu V/m$ , the spectrum analyzer reading in  $dB\mu V$  was corrected by using the following formula. This reading was then compared to the applicable specification limit to determine compliance.

SAMPLE CALCULATIONS					
	Meter reading	$(dB\mu V)$			
+	Antenna Factor	(dB)			
+	Cable Loss	(dB)			
-	Distance Correction	(dB)			
-	Preamplifier Gain	(dB)			
=	Corrected Reading	$(dB\mu V/m)$			

Page 7 of 29 Report No: FC06-010E



#### TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE						
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING			
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz			
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz			
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz			

#### SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

#### <u>Peak</u>

In this mode, the spectrum analyzer/receiver readings were recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

# **Quasi-Peak**

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.

# **Average**

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

A thorough scan of all frequencies was made manually using a small frequency span, rotating the turntable and raising and lowering the antenna from one to four meters as needed. The test engineer maximized the readings with respect to the table rotation, antenna height and configuration of EUT. Maximizing of the EUT was achieved by monitoring the spectrum analyzer on a closed circuit television monitor.

Page 8 of 29 Report No: FC06-010E



# FCC 15.247(b)(3) – RADIATED RF POWER

#### **Test Data Sheets**

Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc Specification: 15.247(b)(3)

 Work Order #:
 83127
 Date: 2/13/2007

 Test Type:
 Radiated Scan
 Time: 13:51:41

Equipment: **RFID Reader Antenna (Brickyard)** Sequence#: 3
Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0400-USA

S/N:

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #	
HP 8596E	3346A00209	11/08/2006	11/08/2008	AN00784	
Bothell 5m Cable Set	S/N: P05444	11/28/2005	11/28/2007	ANP05444	
HP 8447D PreAmp	S/N: 2944A08601	07/10/2006	07/10/2008	AN01517	
Chase BILOG	S/N: 2458	01/31/2007	01/31/2009	AN01993	

Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N	
RFID Reader Antenna	Impinj	IPJ-A0400-USA		
(Brickyard)*				

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTP)			
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40305280513
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

#### Test Conditions / Notes:

Transmitting modulated carrier at full output power. Low Channel: 902.75 MHz, High Channel: 927.25 MHz. Measuring radiated band edge compliance. RBW = 120 kHz; VBW = 300 kHz.

### Transducer Legend:

T1=ANT AN01993 25-1000MHz	T2=CAB-P05444-112805

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2			Dist	Corr	Spec	Margin	Polar
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
1	927.250M	102.2	+23.7	+4.8			+0.0	130.7	137.0	-6.3	Vert
							25				105
2	927.250M	101.8	+23.7	+4.8			+0.0	130.3	137.0	-6.7	Horiz
							360				200
3	902.755M	101.4	+23.4	+4.6			+0.0	129.4	137.0	-7.6	Vert
							41				105
4	902.755M	99.8	+23.4	+4.6			+0.0	127.8	137.0	-9.2	Horiz
							360				188

Page 9 of 29 Report No: FC06-010E



Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc Specification: 15.247(b)(3)

Work Order #: 83127 Date: 2/13/2007
Test Type: Radiated Scan Time: 11:39:50
Equipment: RFID Reader Antenna (Guardwall) Sequence#: 1

Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0401-USA

S/N:

### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #	
HP 8596E	3346A00209	11/08/2006	11/08/2008	AN00784	
Bothell 5m Cable Set	S/N: P05444	11/28/2005	11/28/2007	ANP05444	
HP 8447D PreAmp	S/N: 2944A08601	07/10/2006	07/10/2008	AN01517	
Chase BILOG	S/N: 2458	01/31/2007	01/31/2009	AN01993	

# Equipment Under Test (\* = EUT):

1 1	,			
Function	Manufacturer	Model #	S/N	
RFID Reader Antenna	Impinj	IPJ-A0401-USA		
(Guardwall)*				

#### Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTI	P)		
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40305280513
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

#### Test Conditions / Notes:

Transmitting modulated carrier at full output power. Low Channel: 902.75 MHz, High Channel: 927.25 MHz. Measuring radiated band edge compliance. RBW = 120 kHz; VBW = 300 kHz.

#### Transducer Legend:

T1=ANT AN01993 25-1000MHz	T2=CAB-P05444-112805

Measu	rement Data:	Re	eading lis	ted by ma	argin.		Te	est Distance	e: 3 Meters		
#	Freq	Rdng	T1	T2			Dist	Corr	Spec	Margin	Polar
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
1	902.755M	108.0	+23.4	+4.6			+0.0	136.0	137.0	-1.0	Horiz
							360				205
2	902.755M	107.2	+23.4	+4.6			+0.0	135.2	137.0	-1.8	Horiz
							360				205
3	927.250M	106.0	+23.7	+4.8			+0.0	134.4	137.0	-2.6	Horiz
							2				192
4	927.250M	94.4	+23.7	+4.8			+0.0	122.9	137.0	-14.1	Vert
							337				185
5	902.755M	91.4	+23.4	+4.6			+0.0	119.4	137.0	-17.6	Vert
							35				230

Page 10 of 29 Report No: FC06-010E



Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc Specification: 15,247(b)(3)

Work Order #: 83127 Date: 2/13/2007
Test Type: Radiated Scan Time: 12:19:31
Equipment: RFID Reader Antenna (Mini-Sequence#: 2

Guardrail)

Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0301-USA

S/N:

#### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
HP 8596E	3346A00209	11/08/2006	11/08/2008	AN00784
Bothell 5m Cable Set		11/28/2005	11/28/2007	ANP05444
HP 8447D PreAmp	S/N: 2944A08601	07/10/2006	07/10/2008	AN01517
Chase BILOG	S/N: 2458	01/31/2007	01/31/2009	AN01917 AN01993

Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N	
RFID Reader Antenna	Impinj	IPJ-A0301-USA		
(Mini-Guardrail)*				

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTP)			
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40305280513
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

#### Test Conditions / Notes:

Transmitting modulated carrier at full output power. Low Channel: 902.75 MHz, High Channel: 927.25 MHz. Measuring radiated band edge compliance. RBW = 120 kHz; VBW = 300 kHz.

### Transducer Legend:

Transaucer Legena.	
T1=ANT AN01993 25-1000MHz	T2=CAB-P05444-112805

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

112000000	· ciiiciii 2 iiiii		7444111g 1119	<del>100</del> 0 j 1110				or 2 istaire.			
#	Freq	Rdng	T1	T2		•	Dist	Corr	Spec	Margin	Polar
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
1	902.755M	87.0	+23.4	+4.6			+0.0	115.0	137.0	-22.0	Horiz
							5				100
2	927.255M	84.5	+23.7	+4.8			+0.0	113.0	137.0	-24.0	Horiz
											100
3	902.760M	74.0	+23.4	+4.6			+0.0	102.0	137.0	-35.0	Vert
							113				173
4	927.255M	71.4	+23.7	+4.8			+0.0	99.9	137.0	-37.1	Vert
							116				169

Page 11 of 29 Report No: FC06-010E



#### FCC 15.247(d)/15.209/15.205 – RADIATED SPURIOUS EMISSIONS

#### **Test Data Sheets**

Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc

Specification: FCC 15.247 (d) / 15.209 / 15.205

 Work Order #:
 83127
 Date: 2/15/2007

 Test Type:
 Radiated Scan
 Time: 17:30:43

Equipment: **RFID Reader Antenna (Brickyard)** Sequence#: 7

Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0400-USA

S/N:

Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A	S/N: US44300437	06/13/2005	06/13/2007	AN02673
120" Pasternack 40 GHz Coax	S/N: N/A	05/10/2006	05/10/2008	AN05425
30' Andrews Heliax 18 GHz	S/N: N/A	06/19/2006	06/19/2008	AN05545
60" Pasternack 40 GHz Coax	S/N: N/A	05/11/2006	05/11/2008	AN05423
HP 83017A .5 - 26.5 GHz Pre-amp	S/N: 3123A00464	10/03/2005	10/03/2007	AN01271
EMCO 3115 Horn Ant	S/N: 9606-4854	12/13/2005	12/13/2007	AN01412
1 GHz HP Filter	S/N: 2	03/07/2006	03/07/2008	AN02750

#### *Equipment Under Test* (\* = EUT):

Function	Manufacturer	Model #	S/N
RFID Reader Antenna (Brickyard)*	Impinj	IPJ-A0400-USA	

#### Support Devices:

Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTP)			
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40306280020
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

# Test Conditions / Notes:

EUT transmitting at maximum power in constant TX mode on each channel Low Channel: 902.75 MHz, Mid Channel: 915.25 MHz, High Channel: 927.25 MHz. Measuring radiated spurious emissions 1 - 10 GHz RBW = 1 MHz.

# Transducer Legend:

T3=CAB-ANP05425-051006 T4=CAB-ANP05425-051006	
TE CAR ANDOCAGO OCTOOC	
T5=CAB-ANP05423-051006 T6=Filter 3GHz HP AN02745	

Mea	surement Data:	Re	eading lis	ted by ma	argin.		Тє	est Distance	e: 3 Meters	3	
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6							
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
	1 5563.509M	38.8	+34.4	-33.2	+4.1	+5.9	+0.0	53.5	54.0	-0.5	Vert
	Ave		+3.4	+0.1			178		High Chan	inel	103
	^ 5563.450M	42.0	+34.4	-33.2	+4.1	+5.9	+0.0	56.7	54.0	+2.7	Vert
			+3.4	+0.1			178		High Chan	inel	103

Page 12 of 29 Report No: FC06-010E



3 5416.503M	38.0	+34.3	-33.1	+3.9	+5.8	+0.0	52.5	54.0 -1.5	Vert
Ave		+3.4	+0.2			187		Low Channel	105
^ 5416.505M	41.9	+34.3	-33.1	+3.9	+5.8	+0.0	56.4	54.0 +2.4	Vert
		+3.4	+0.2			187		Low Channel	105
5 5491.501M	37.3	+34.4	-33.1	+3.9	+5.8	+0.0	51.9	54.0 -2.1	Vert
Ave		+3.4	+0.2			178		Mid Channel	117
^ 5491.570M	41.3	+34.4	-33.1	+3.9	+5.8	+0.0	55.9	54.0 +1.9	Vert
		+3.4	+0.2			178		Mid Channel	117
7 4576.255M	39.1	+32.7	-33.2	+3.6	+5.4	+0.0	51.0	54.0 -3.0	Vert
Ave		+3.1	+0.3			191		Mid Channel	115
^ 4576.317M	42.5	+32.7	-33.2	+3.6	+5.4	+0.0	54.4	54.0 +0.4	Vert
		+3.1	+0.3			191		Mid Channel	115
9 3660.772M	41.1	+31.5	-33.2	+3.0	+4.8	+0.0	50.2	54.0 -3.8	Vert
		+2.7	+0.3			36		Mid Channel	110
10 5416.307M	35.3	+34.3	-33.1	+3.9	+5.8	+0.0	49.8	54.0 -4.2	Horiz
		+3.4	+0.2			146		Low Channel	139
11 2708.263M	32.2	+29.4	-33.7	+2.5	+4.2	+0.0	49.5	54.0 -4.5	Vert
Ave		+2.3	+12.6			182		Low Channel	114
^ 2708.226M	40.8	+29.4	-33.7	+2.5	+4.2	+0.0	58.1	54.0 +4.1	Vert
		+2.3	+12.6			182		Low Channel	114
13 3610.914M	40.2	+31.3	-33.2	+3.0	+4.8	+0.0	49.2	54.0 -4.8	Horiz
		+2.7	+0.4			227		Low Channel	136
14 4636.138M	36.9	+32.8	-33.1	+3.6	+5.4	+0.0	49.0	54.0 -5.0	Vert
		+3.1	+0.3			181		High Channel	133
15 2781.605M	37.9	+29.5	-33.6	+2.6	+4.2	+0.0	48.9	54.0 -5.1	Horiz
		+2.4	+5.9			235		High Channel	100
16 3709.011M	39.4	+31.7	-33.2	+3.0	+4.8	+0.0	48.7	54.0 -5.3	Vert
Ave		+2.7	+0.3			170		High Channel	149
^ 3708.963M	43.9	+31.7	-33.2	+3.0	+4.8	+0.0	53.2	54.0 -0.8	Vert
0,000,000.2		+2.7	+0.3			170		High Channel	149
18 5491.371M	33.7	+34.4	-33.1	+3.9	+5.8	+0.0	48.3	54.0 -5.7	Horiz
		+3.4	+0.2			156		Mid Channel	123
19 3611.011M	39.2	+31.3	-33.2	+3.0	+4.8	+0.0	48.2	54.0 -5.8	Vert
Ave		+2.7	+0.4			177		Low Channel	104
^ 3610.949M	43.2	+31.3	-33.2	+3.0	+4.8	+0.0	52.2	54.0 -1.8	Vert
		+2.7	+0.4			177		Low Channel	104
21 2745.759M	34.0	+29.5	-33.6	+2.5	+4.2	+0.0	48.0	54.0 -6.0	Vert
Ave		+2.3	+9.1	- 2.0		167		Mid Channel	111
^ 2745.722M	41.0	+29.5	-33.6	+2.5	+4.2	+0.0	55.0	54.0 +1.0	Vert
		+2.3	+9.1	- 2.0		167	22.0	Mid Channel	111
23 3660.854M	38.5	+31.5	-33.2	+3.0	+4.8	+0.0	47.6	54.0 -6.4	Horiz
22 230.03 1171	23.0	+2.7	+0.3	. 5.0		133	.,.0	Mid Channel	100
24 4513.651M	35.3	+32.5	-33.2	+3.6	+5.3	+0.0	46.8	54.0 -7.2	Horiz
21 1313.031141	55.5	+3.0	+0.3	13.0	1 3.3	221	10.0	Low Channel	184
25 3709.001M	36.8	+31.7	-33.2	+3.0	+4.8	+0.0	46.1	54.0 -7.9	Horiz
Ave	20.0	+2.7	+0.3	13.0	1 7.0	137	10.1	High Channel	197
^ 3708.917M	41.1	+31.7	-33.2	+3.0	+4.8	+0.0	50.4	54.0 -3.6	Horiz
3/00.71/111	71.1	+31.7	+0.3	+3.0	±+.0	+0.0 137	50.4	High Channel	197
		⊤∠./	+0.5			131		Tilgii Challici	17/

Page 13 of 29 Report No: FC06-010E



27 2708.282M	28.2	+29.4	-33.7	+2.5	+4.2	+0.0	45.5	54.0 -8.5	Horiz
Ave		+2.3	+12.6			216		Low Channel	106
^ 2708.261M	38.0	+29.4	-33.7	+2.5	+4.2	+0.0	55.3	54.0 +1.3	Horiz
		+2.3	+12.6			216		Low Channel	106
29 4513.758M	33.2	+32.5	-33.2	+3.6	+5.3	+0.0	44.7	54.0 -9.3	Vert
Ave		+3.0	+0.3			182		Low Channel	110
^ 4513.780M	39.7	+32.5	-33.2	+3.6	+5.3	+0.0	51.2	54.0 -2.8	Vert
		+3.0	+0.3			182		Low Channel	110
31 2781.747M	33.5	+29.5	-33.6	+2.6	+4.2	+0.0	44.5	54.0 -9.5	Vert
Ave		+2.4	+5.9			152		High Channel	108
^ 2781.711M	40.4	+29.5	-33.6	+2.6	+4.2	+0.0	51.4	54.0 -2.6	Vert
		+2.4	+5.9			152		High Channel	108
33 3661.007M	34.7	+31.5	-33.2	+3.0	+4.8	+0.0	43.8	54.0 -10.2	Vert
Ave		+2.7	+0.3			36		Mid Channel	110
34 4576.262M	31.8	+32.7	-33.2	+3.6	+5.4	+0.0	43.7	54.0 -10.3	Horiz
Ave		+3.1	+0.3			165		Mid Channel	124
^ 4576.263M	38.0	+32.7	-33.2	+3.6	+5.4	+0.0	49.9	54.0 -4.1	Horiz
		+3.1	+0.3			165		Mid Channel	124
36 3611.015M	34.4	+31.3	-33.2	+3.0	+4.8	+0.0	43.4	54.0 -10.6	Horiz
Ave		+2.7	+0.4			227		Low Channel	136
37 2745.765M	27.6	+29.5	-33.6	+2.5	+4.2	+0.0	41.6	54.0 -12.4	Horiz
Ave		+2.3	+9.1			234		Mid Channel	173
^ 2745.692M	37.8	+29.5	-33.6	+2.5	+4.2	+0.0	51.8	54.0 -2.2	Horiz
		+2.3	+9.1			234		Mid Channel	173
39 5416.496M	27.1	+34.3	-33.1	+3.9	+5.8	+0.0	41.6	54.0 -12.4	Horiz
Ave		+3.4	+0.2			146		Low Channel	139
40 5563.508M	26.3	+34.4	-33.2	+4.1	+5.9	+0.0	41.0	54.0 -13.0	Horiz
Ave		+3.4	+0.1			220		High Channel	189
^ 5563.577M	35.4	+34.4	-33.2	+4.1	+5.9	+0.0	50.1	54.0 -3.9	Horiz
		+3.4	+0.1			220		High Channel	189
42 2781.743M	29.6	+29.5	-33.6	+2.6	+4.2	+0.0	40.6	54.0 -13.4	Horiz
Ave	_>.5	+2.4	+5.9			235	0	High Channel	100
43 4636.250M	27.3	+32.8	-33.1	+3.6	+5.4	+0.0	39.4	54.0 -14.6	Vert
Ave	_,	+3.1	+0.3	. 5.0		181	٠,٠١	High Channel	133
44 3661.009M	30.0	+31.5	-33.2	+3.0	+4.8	+0.0	39.1	54.0 -14.9	Horiz
Ave	50.0	+2.7	+0.3	13.0	11.0	133	37.1	Mid Channel	100
45 5491.490M	23.0	+34.4	-33.1	+3.9	+5.8	+0.0	37.6	54.0 -16.4	Horiz
Ave	23.0	+3.4	+0.2	1 3.7	1 2.0	156	57.0	Mid Channel	123
46 4513.767M	25.6	+32.5	-33.2	+3.6	+5.3	+0.0	37.1	54.0 -16.9	
Ave	23.0	+32.3	+0.3	13.0	1 2.2	221	37.1	Low Channel	184
AVC		13.0	10.5			441		Low Chamici	104

Page 14 of 29 Report No: FC06-010E



Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc

Specification: FCC 15.247 (d) / 15.209 / 15.205

Work Order #: 83127 Date: 2/15/2007
Test Type: Radiated Scan Time: 12:50:44
Equipment: RFID Reader Antenna (Guardwall) Sequence#: 5

Equipment: **RFID Reader Antenna (Guardwall)** Sequence#: 5
Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0401-USA

S/N:

#### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A	S/N: US44300437	06/13/2005	06/13/2007	AN02673
120" Pasternack 40 GHz Coax	S/N: N/A	05/10/2006	05/10/2008	AN05425
30' Andrews Heliax 18 GHz	S/N: N/A	06/19/2006	06/19/2008	AN05545
60" Pasternack 40 GHz Coax	S/N: N/A	05/11/2006	05/11/2008	AN05423
HP 83017A .5 - 26.5 GHz Pre-amp	S/N: 3123A00464	10/03/2005	10/03/2007	AN01271
EMCO 3115 Horn Ant	S/N: 9606-4854	12/13/2005	12/13/2007	AN01412
1 GHz HP Filter	S/N: 2	03/07/2006	03/07/2008	AN02750

Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
RFID Reader Antenna	Impinj	IPJ-A0401-USA	
(Guardwall)*			

#### Support Devices:

Support Devices.			
Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTP)			
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40306280020
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

#### Test Conditions / Notes:

EUT transmitting at maximum power in constant TX mode on each channel. Low Channel: 902.75 MHz, Mid Channel: 915.25 MHz, High Channel: 927.25 MHz. Measuring radiated spurious emissions 1 - 10 GHz RBW = 1 MHz.

# Transducer Legend:

T1=ANT-AN01412-121305	T2=AMP-AN01271-1003055-26.5 GHz
T3=CAB-ANP05545-061906	T4=CAB-ANP05425-051006
T5=CAB-ANP05423-051006	T6=Filter 3GHz HP AN02745

Measu	rement Data:	R	Reading listed by margin.					st Distanc	e: 3 Metei	îs.
#	Freq	Rdng	T1	T2	Т3	T4	Dist	Corr	Spec	
			mr.	TIC.						

#	Freq	Rdng	TI	12	13	14	Dist	Corr	Spec	Margın	Polar
			T5	T6							
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
	1 5416.494M	39.1	+34.3	-33.1	+3.9	+5.8	+0.0	53.6	54.0	-0.4	Vert
	Ave		+3.4	+0.2			184		Low Chan	nel	131
	^ 5416.464M	42.7	+34.3	-33.1	+3.9	+5.8	+0.0	57.2	54.0	+3.2	Vert
			+3.4	+0.2			184		Low Chan	nel	131

Page 15 of 29 Report No: FC06-010E



3 3611.013M     43.2     +31.3     -33.2     +3.0     +4.8     +0.0     52.2     54.0     -1.8       Ave     +2.7     +0.4     181     Low Channel       ^ 3611.002M     47.0     +31.3     -33.2     +3.0     +4.8     +0.0     56.0     54.0     +2.0       +2.7     +0.4     181     Low Channel       5 3610.864M     42.7     +31.3     -33.2     +3.0     +4.8     +0.0     51.7     54.0     -2.3	Vert
^ 3611.002M	
+2.7 +0.4 181 Low Channel	106
	Vert
5 3610 864M 42.7 ±31.3 ±33.2 ±3.0 ±4.8 ±0.0 51.7 54.0 ±2.3	106
3 3010.00 <del>1</del> 101	Horiz
+2.7 +0.4 148 Low Channel	131
6 4576.268M 39.2 +32.7 -33.2 +3.6 +5.4 +0.0 51.1 54.0 -2.9	Vert
Ave +3.1 +0.3 188 Mid Channel	100
^ 4576.253M	Vert
+3.1 +0.3 188 Mid Channel	100
8 2781.644M 40.0 +29.5 -33.6 +2.6 +4.2 +0.0 51.0 54.0 -3.0	Horiz
+2.4 +5.9 234 High Channel	154
9 5491.506M 36.4 +34.4 -33.1 +3.9 +5.8 +0.0 51.0 54.0 -3.0	Vert
Ave +3.4 +0.2 177 Mid Channel	105
^ 5491.503M	Vert
+3.4 +0.2 177 Mid Channel	105
	Horiz 104
12 2708.249M 33.0 +29.4 -33.7 +2.5 +4.2 +0.0 50.3 54.0 -3.7	Vert
Ave +2.3 +12.6 198 Low Channel	104
^ 2708.249M 38.8 +29.4 -33.7 +2.5 +4.2 +0.0 56.1 54.0 +2.1	Vert
+2.3 +12.6 198 Low Channel	104
14 5563.525M 35.1 +34.4 -33.2 +4.1 +5.9 +0.0 49.8 54.0 -4.2	Vert
Ave +3.4 +0.1 177 High Channel	104
^ 5563.542M	Vert
+3.4 +0.1 177 High Channel	104
16 2745.764M 35.3 +29.5 -33.6 +2.5 +4.2 +0.0 49.3 54.0 -4.7	Vert
Ave +2.3 +9.1 292 Mid Channel	118
^ 2745.739M	Vert
+2.3 +9.1 292 Mid Channel	118
18 3709.006M 38.0 +31.7 -33.2 +3.0 +4.8 +0.0 47.3 54.0 -6.7	Vert
Ave $+2.7 +0.3$ 161 High Channel	177
^ 3709.036M	Vert
+2.7 +0.3 161 High Channel	177
20 2708.244M 29.4 +29.4 -33.7 +2.5 +4.2 +0.0 46.7 54.0 -7.3	Horiz
Ave +2.3 +12.6 142 Low Channel	125
^ 2708.279M	Horiz
+2.3 +12.6 142 Low Channel	125
22 2781.749M 35.6 +29.5 -33.6 +2.6 +4.2 +0.0 46.6 54.0 -7.4	Vert
Ave +2.4 +5.9 185 High Channel	107
1 11 12.7 13.7 103 Ingli Chamici	Vert
	107
^ 2781.804M	Horiz
^ 2781.804M	EIOIT7
^ 2781.804M     41.2     +29.5     -33.6     +2.6     +4.2     +0.0     52.2     54.0     -1.8       +2.4     +5.9     185     High Channel       24 2745.757M     32.4     +29.5     -33.6     +2.5     +4.2     +0.0     46.4     54.0     -7.6	
^ 2781.804M       41.2       +29.5       -33.6       +2.6       +4.2       +0.0       52.2       54.0       -1.8         +2.4       +5.9       185       High Channel         24 2745.757M       32.4       +29.5       -33.6       +2.5       +4.2       +0.0       46.4       54.0       -7.6         Ave       +2.3       +9.1       143       Mid Channel	126
^ 2781.804M       41.2       +29.5       -33.6       +2.6       +4.2       +0.0       52.2       54.0       -1.8         +2.4       +5.9       185       High Channel         24 2745.757M       32.4       +29.5       -33.6       +2.5       +4.2       +0.0       46.4       54.0       -7.6         Ave       +2.3       +9.1       143       Mid Channel         ^ 2745.856M       40.9       +29.5       -33.6       +2.5       +4.2       +0.0       54.9       54.0       +0.9	126 Horiz
^ 2781.804M       41.2       +29.5       -33.6       +2.6       +4.2       +0.0       52.2       54.0       -1.8         +2.4       +5.9       185       High Channel         24 2745.757M       32.4       +29.5       -33.6       +2.5       +4.2       +0.0       46.4       54.0       -7.6         Ave       +2.3       +9.1       143       Mid Channel         ^ 2745.856M       40.9       +29.5       -33.6       +2.5       +4.2       +0.0       54.9       54.0       +0.9         +2.3       +9.1       143       Mid Channel	126 Horiz 126
^ 2781.804M       41.2       +29.5       -33.6       +2.6       +4.2       +0.0       52.2       54.0       -1.8         +2.4       +5.9       185       High Channel         24 2745.757M       32.4       +29.5       -33.6       +2.5       +4.2       +0.0       46.4       54.0       -7.6         Ave       +2.3       +9.1       143       Mid Channel         ^ 2745.856M       40.9       +29.5       -33.6       +2.5       +4.2       +0.0       54.9       54.0       +0.9	126 Horiz

Page 16 of 29 Report No: FC06-010E



27 4513.758M	34.6	+32.5	-33.2	+3.6	+5.3	+0.0	46.1	54.0 -7.9	Vert
Ave		+3.0	+0.3			191		Low Channel	116
^ 4513.760M	39.4	+32.5	-33.2	+3.6	+5.3	+0.0	50.9	54.0 -3.1	Vert
		+3.0	+0.3			191		Low Channel	116
29 3661.021M	35.8	+31.5	-33.2	+3.0	+4.8	+0.0	44.9	54.0 -9.1	Vert
Ave		+2.7	+0.3			176		Mid Channel	106
^ 3661.021M	40.6	+31.5	-33.2	+3.0	+4.8	+0.0	49.7	54.0 -4.3	Vert
		+2.7	+0.3			176		Mid Channel	106
31 2781.750M	33.7	+29.5	-33.6	+2.6	+4.2	+0.0	44.7	54.0 -9.3	Horiz
Ave		+2.4	+5.9			234		High Channel	154
32 3708.999M	35.2	+31.7	-33.2	+3.0	+4.8	+0.0	44.5	54.0 -9.5	Horiz
Ave		+2.7	+0.3			118		High Channel	179
^ 3709.083M	41.2	+31.7	-33.2	+3.0	+4.8	+0.0	50.5	54.0 -3.5	Horiz
		+2.7	+0.3			118		High Channel	179
34 4576.250M	31.2	+32.7	-33.2	+3.6	+5.4	+0.0	43.1	54.0 -10.9	Horiz
Ave		+3.1	+0.3			213		Mid Channel	104
35 5416.488M	28.3	+34.3	-33.1	+3.9	+5.8	+0.0	42.8	54.0 -11.2	Horiz
Ave		+3.4	+0.2			163		Low Channel	153
^ 5416.508M	34.1	+34.3	-33.1	+3.9	+5.8	+0.0	48.6	54.0 -5.4	Horiz
		+3.4	+0.2			163		Low Channel	153
37 4513.750M	27.2	+32.5	-33.2	+3.6	+5.3	+0.0	38.7	54.0 -15.3	Horiz
Ave		+3.0	+0.3			173		Low Channel	116
^ 4513.751M	33.4	+32.5	-33.2	+3.6	+5.3	+0.0	44.9	54.0 -9.1	Horiz
		+3.0	+0.3			173		Low Channel	116
39 3661.009M	28.7	+31.5	-33.2	+3.0	+4.8	+0.0	37.8	54.0 -16.2	Horiz
Ave		+2.7	+0.3			217		Mid Channel	198
^ 3660.920M	39.0	+31.5	-33.2	+3.0	+4.8	+0.0	48.1	54.0 -5.9	Horiz
		+2.7	+0.3			217		Mid Channel	198
41 4636.256M	24.6	+32.8	-33.1	+3.6	+5.4	+0.0	36.7	54.0 -17.3	Vert
Ave		+3.1	+0.3			174		High Channel	137
^ 4636.285M	36.9	+32.8	-33.1	+3.6	+5.4	+0.0	49.0	54.0 -5.0	Vert
		+3.1	+0.3			174		High Channel	137
43 4636.272M	24.5	+32.8	-33.1	+3.6	+5.4	+0.0	36.6	54.0 -17.4	Horiz
Ave		+3.1	+0.3			312		High Channel	102
^ 4636.271M	35.3	+32.8	-33.1	+3.6	+5.4	+0.0	47.4	54.0 -6.6	Horiz
		+3.1	+0.3			312		High Channel	102

Page 17 of 29 Report No: FC06-010E



Test Location: CKC Laboratories •22116 23rd Dr SE • Bothell, WA 98021-4413 • 425-402-1717

Customer: Impinj Inc

Specification: FCC 15.247 (d) / 15.209 / 15.205

 Work Order #:
 83127
 Date:
 2/15/2007

 Test Type:
 Radiated Scan
 Time:
 17:12:31

Equipment: **RFID Reader Antenna (Mini-Guardrail)** Sequence#: 6

Manufacturer: Impinj Tested By: Ryan Rutledge

Model: IPJ-A0301-USA

S/N:

#### Test Equipment:

Function	S/N	Calibration Date	Cal Due Date	Asset #
Agilent E4446A	S/N: US44300437	06/13/2005	06/13/2007	AN02673
120" Pasternack 40 GHz Coax	S/N: N/A	05/10/2006	05/10/2008	AN05425
30' Andrews Heliax 18 GHz	S/N: N/A	06/19/2006	06/19/2008	AN05545
60" Pasternack 40 GHz Coax	S/N: N/A	05/11/2006	05/11/2008	AN05423
HP 83017A .5 - 26.5 GHz Pre-amp	S/N: 3123A00464	10/03/2005	10/03/2007	AN01271
EMCO 3115 Horn Ant	S/N: 9606-4854	12/13/2005	12/13/2007	AN01412
1 GHz HP Filter	S/N: 2	03/07/2006	03/07/2008	AN02750

Equipment Under Test (\* = EUT):

Function	Manufacturer	Model #	S/N
RFID Reader Antenna (Mini-	Impinj	IPJ-A0301-USA	
Guardrail)*			

#### Support Devices:

Support Bertees.			
Function	Manufacturer	Model #	S/N
Laptop PC	Dell	Latitude D505	CN-0H2049-48643-49E-0525
Laptop AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-45D-5387
Crossover Ethernet Cable (UTP)			
RFID Reader Core	Impinj	IPJ-R1000-USA-0-01-01	40306280020
AC Adapter	CUI Inc	DSA-60W-20 1 24060	DTS240250UC-P11P-DB

#### Test Conditions / Notes:

EUT transmitting at maximum power in constant TX mode on each channel Low Channel: 902.75 MHz, Mid Channel: 915.25 MHz, High Channel: 927.25 MHz. Measuring radiated spurious emissions 1 - 10 GHz RBW = 1 MHz.

# Transducer Legend:

T1=ANT-AN01412-121305	T2=AMP-AN01271-1003055-26.5 GHz
T3=CAB-ANP05545-061906	T4=CAB-ANP05425-051006
T5=CAB-ANP05423-051006	T6=Filter 3GHz HP AN02745

Measu	rement Data:	R	Reading 1	isted by n	Test Distance: 3 Meters					
#	Freq	Rdng	T1	T2	Т3	T4	Dist	Corr	Spec	ľ
			mr.	TIC.						

#	Freq	Rdng	TI	T2	T3	T4	Dist	Corr	Spec	Margın	Polar
			T5	T6							
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
1	5416.498M	38.2	+34.3	-33.1	+3.9	+5.8	+0.0	52.7	54.0	-1.3	Vert
	Ave		+3.4	+0.2		Low Channel			nel	131	
^	5416.537M	41.8	+34.3	-33.1	+3.9	+5.8	+0.0	56.3	54.0	+2.3	Vert
			+3.4	+0.2			181		Low Chan	nel	131

Page 18 of 29 Report No: FC06-010E



3 5491.506M	37.7	+34.4	-33.1	+3.9	+5.8	+0.0	52.3	54.0 -1.7	Vert
Ave		+3.4	+0.2			177		Mid Channel	105
^ 5491.506M	39.1	+34.4	-33.1	+3.9	+5.8	+0.0	53.7	54.0 -0.3	Vert
		+3.4	+0.2			177		Mid Channel	105
5 2708.249M	32.7	+29.4	-33.7	+2.5	+4.2	+0.0	50.0	54.0 -4.0	Vert
Ave		+2.3	+12.6			182		Low Channel	113
^ 2708.271M	41.1	+29.4	-33.7	+2.5	+4.2	+0.0	58.4	54.0 +4.4	Vert
		+2.3	+12.6			182		Low Channel	113
7 4576.255M	37.6	+32.7	-33.2	+3.6	+5.4	+0.0	49.5	54.0 -4.5	Vert
Ave		+3.1	+0.3			188		Mid Channel	100
^ 4576.216M	41.7	+32.7	-33.2	+3.6	+5.4	+0.0	53.6	54.0 -0.4	Vert
		+3.1	+0.3			188		Mid Channel	100
9 3611.003M	40.0	+31.3	-33.2	+3.0	+4.8	+0.0	49.0	54.0 -5.0	Vert
Ave		+2.7	+0.4			182		Low Channel	104
^ 3610.956M	44.1	+31.3	-33.2	+3.0	+4.8	+0.0	53.1	54.0 -0.9	Vert
		+2.7	+0.4			182		Low Channel	104
11 5563.506M	34.1	+34.4	-33.2	+4.1	+5.9	+0.0	48.8	54.0 -5.2	Vert
Ave		+3.4	+0.1			177		High Channel	130
^ 5563.585M	39.8	+34.4	-33.2	+4.1	+5.9	+0.0	54.5	54.0 +0.5	Vert
		+3.4	+0.1			177		High Channel	130
13 3661.126M	39.7	+31.5	-33.2	+3.0	+4.8	+0.0	48.8	54.0 -5.2	Horiz
		+2.7	+0.3			156		Mid Channel	108
14 2745.758M	33.8	+29.5	-33.6	+2.5	+4.2	+0.0	47.8	54.0 -6.2	Vert
Ave	00.0	+2.3	+9.1			179	.,.0	Mid Channel	111
^ 2745.745M	41.4	+29.5	-33.6	+2.5	+4.2	+0.0	55.4	54.0 +1.4	Vert
27 1017 10111		+2.3	+9.1			179		Mid Channel	111
16 3709.000M	38.3	+31.7	-33.2	+3.0	+4.8	+0.0	47.6	54.0 -6.4	Vert
Ave		+2.7	+0.3			170	.,,,	High Channel	174
^ 3708.952M	42.9	+31.7	-33.2	+3.0	+4.8	+0.0	52.2	54.0 -1.8	Vert
0,000,02111	,	+2.7	+0.3			170	02.2	High Channel	174
18 5563.257M	32.7	+34.4	-33.2	+4.1	+5.9	+0.0	47.4	54.0 -6.6	Horiz
10 0000.2071.1	02	+3.4	+0.1			219		High Channel	209
19 4513.751M	35.3	+32.5	-33.2	+3.6	+5.3	+0.0	46.8	54.0 -7.2	Vert
Ave	00.0	+3.0	+0.3			191		Low Channel	114
^ 4513.736M	40.3	+32.5	-33.2	+3.6	+5.3	+0.0	51.8	54.0 -2.2	Vert
1013.730111	10.5	+3.0	+0.3	15.0	10.0	191	51.0	Low Channel	114
21 3611.006M	35.9	+31.3	-33.2	+3.0	+4.8	+0.0	44.9	54.0 -9.1	Horiz
Ave	55.7	+2.7	+0.4	13.0	. 1.0	228		Low Channel	156
^ 3611.101M	41.5	+31.3	-33.2	+3.0	+4.8	+0.0	50.5	54.0 -3.5	Horiz
3011.101141	11.5	+2.7	+0.4	13.0	1 7.0	228	50.5	Low Channel	156
23 4636.254M	31.6	+32.8	-33.1	+3.6	+5.4	+0.0	43.7	54.0 -10.3	Vert
Ave	21.0	+32.8	+0.3	13.0	1 J.T	+0.0 191	тЭ.1	High Channel	113
^ 4636.178M	38.8	+32.8	-33.1	+3.6	+5.4	+0.0	50.9	54.0 -3.1	Vert
T030.170W	30.0	+32.8	+0.3	13.0	1 3.4	+0.0 191	50.7	High Channel	113
25 3709.011M	34.3	+31.7	-33.2	+3.0	+4.8	+0.0	43.6	54.0 -10.4	Horiz
Ave	J <del>+</del> .J	+31.7	+0.3	+3.0	±+.0	+0.0 108	+3.0	High Channel	158
^ 3709.035M	40.9			12.0	<sub>1</sub> / O		50.2	54.0 -3.8	
. 3/U9.U33IVI	40.9	+31.7	-33.2	+3.0	+4.8	+0.0	50.2		Horiz
		+2.7	+0.3			108		High Channel	158

Page 19 of 29 Report No: FC06-010E




27 2781.765M	31.6	+29.5	-33.6	+2.6	+4.2	+0.0	42.6	54.0	-11.4	Vert
Ave		+2.4	+5.9			171		High Chann	nel	110
^ 2781.773M	39.4	+29.5	-33.6	+2.6	+4.2	+0.0	50.4	54.0	-3.6	Vert
		+2.4	+5.9			171		High Channel		110
29 2745.744M	28.1	+29.5	-33.6	+2.5	+4.2	+0.0	42.1	54.0	-11.9	Horiz
Ave		+2.3	+9.1			242		Mid Channe	el	172
^ 2745.770M	39.0	+29.5	-33.6	+2.5	+4.2	+0.0	53.0	54.0	-1.0	Horiz
		+2.3	+9.1			242		Mid Channe	el	172
31 3661.013M	32.8	+31.5	-33.2	+3.0	+4.8	+0.0	41.9	54.0	-12.1	Vert
Ave		+2.7	+0.3			33		Mid Channe	el	112
^ 3661.011M	40.5	+31.5	-33.2	+3.0	+4.8	+0.0	49.6	54.0	-4.4	Vert
		+2.7	+0.3			33		Mid Channe	el	112
33 2781.744M	30.4	+29.5	-33.6	+2.6	+4.2	+0.0	41.4	54.0	-12.6	Horiz
Ave		+2.4	+5.9			241		High Chann	nel	176
^ 2781.658M	39.5	+29.5	-33.6	+2.6	+4.2	+0.0	50.5	54.0	-3.5	Horiz
		+2.4	+5.9			241		High Chann	nel	176
35 3661.010M	30.9	+31.5	-33.2	+3.0	+4.8	+0.0	40.0	54.0	-14.0	Horiz
Ave		+2.7	+0.3			156		Mid Channe	el	108
36 4576.256M	27.6	+32.7	-33.2	+3.6	+5.4	+0.0	39.5	54.0	-14.5	Horiz
Ave		+3.1	+0.3			157		Mid Channe	el	100
^ 4576.192M	37.4	+32.7	-33.2	+3.6	+5.4	+0.0	49.3	54.0	-4.7	Horiz
		+3.1	+0.3			157		Mid Channe	el	100
38 5563.517M	23.8	+34.4	-33.2	+4.1	+5.9	+0.0	38.5	54.0	-15.5	Horiz
Ave		+3.4	+0.1			219		High Chann	nel	209
39 5416.496M	23.8	+34.3	-33.1	+3.9	+5.8	+0.0	38.3	54.0	-15.7	Horiz
Ave		+3.4	+0.2			152		Low Chann	el	141
^ 5416.447M	35.5	+34.3	-33.1	+3.9	+5.8	+0.0	50.0	54.0	-4.0	Horiz
		+3.4	+0.2			152		Low Chann	el	141
41 4513.753M	26.2	+32.5	-33.2	+3.6	+5.3	+0.0	37.7	54.0	-16.3	Horiz
Ave		+3.0	+0.3			218		Low Channel		114
^ 4513.675M	36.9	+32.5	-33.2	+3.6	+5.3	+0.0	48.4	54.0	-5.6	Horiz
		+3.0	+0.3			218		Low Chann	el	114


Page 20 of 29 Report No: FC06-010E



# FCC 15.247 BANDEDGE BRICKYARD - HORIZONTAL LOWER

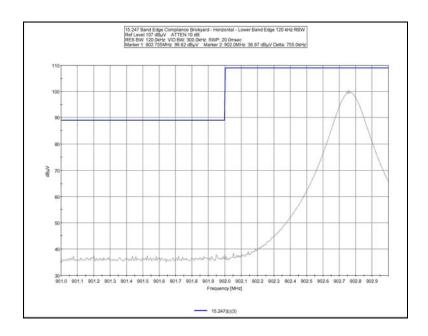


# FCC 15.247 BANDEDGE BRICKYARD - HORIZONTAL UPPER

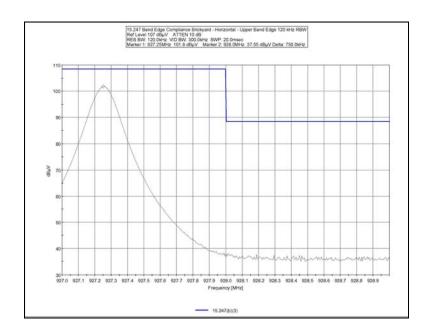


Page 21 of 29 Report No: FC06-010E



# FCC 15.247 BANDEDGE BRICKYARD - VERTICAL LOWER

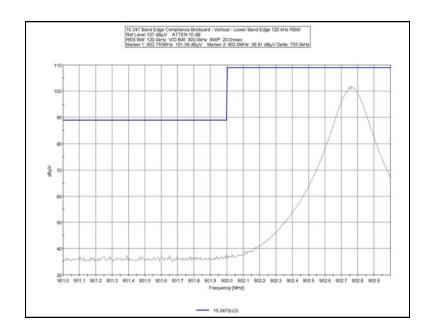


# FCC 15.247 BANDEDGE BRICKYARD - VERTICAL UPPER

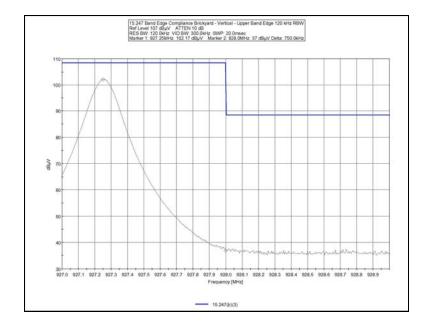


:



# FCC 15.247 BANDEDGE GUARDWALL - HORIZONTAL LOWER

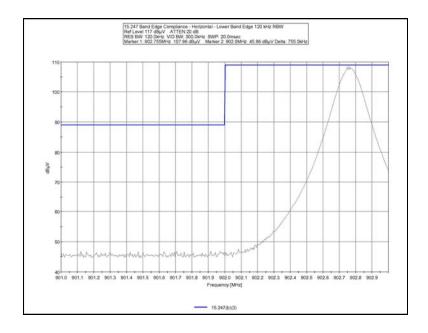


# FCC 15.247 BANDEDGE GUARDWALL - HORIZONTAL UPPER

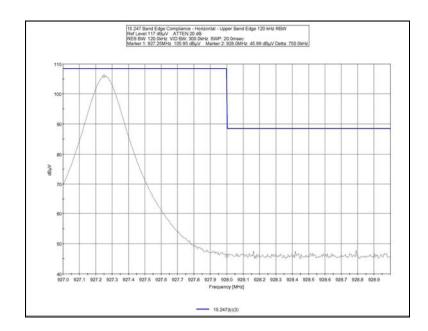


Page 23 of 29 Report No: FC06-010E



# FCC 15.247 BANDEDGE GUARDWALL - VERTICAL LOWER

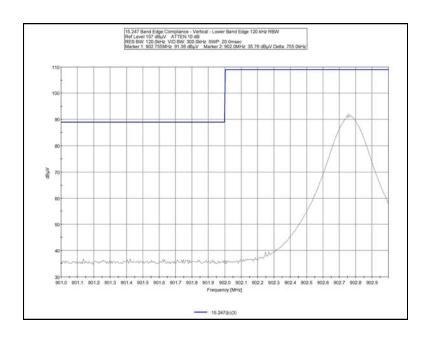


# FCC 15.247 BANDEDGE GUARDWALL - VERTICAL UPPER

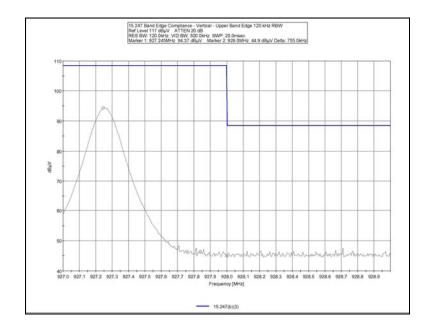


Page 24 of 29 Report No: FC06-010E



# FCC 15.247 BANDEDGE MINI-GUARDRAIL - HORIZONTAL LOWER

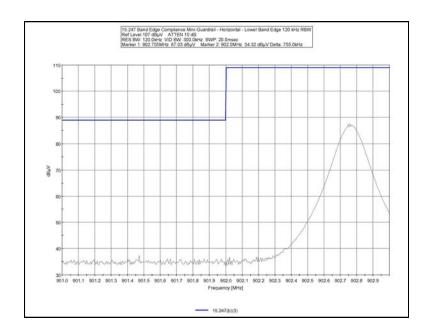


# FCC 15.247 BANDEDGE MINI-GUARDRAIL - HORIZONTAL UPPER

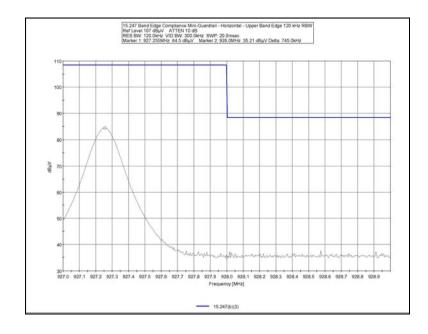


Page 25 of 29 Report No: FC06-010E



# FCC 15.247 BANDEDGE MINI-GUARDRAIL - VERTICAL LOWER

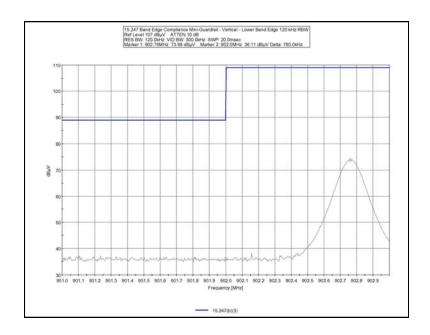

# FCC 15.247 BANDEDGE MINI-GUARDRAIL - VERTICAL UPPER

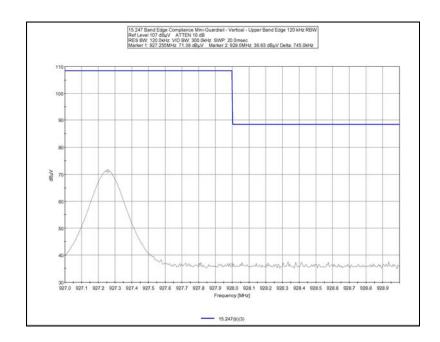


Page 26 of 29 Report No: FC06-010E



# **Test Setup Photos**



Brickyard Setup Front

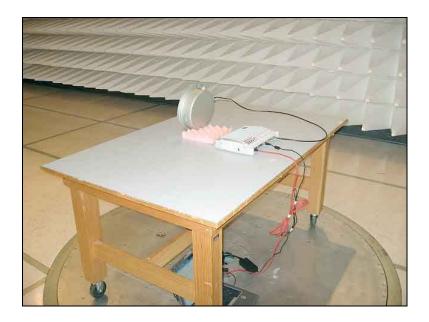

Brickyard Setup Back






Guardwell Setup Front



Guardwell Setup Back



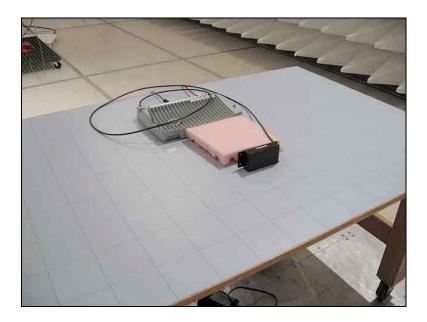

Mini-Guardrail Setup Front



Mini-Guardrail Setup Back